


Appendix B. Radiated Emission Co-location Report

1. Results of Radiated Emissions for Co-located


Temperature	22°C	Humidity	54%
Test Engineer	John Tang	Configurations	2.4GHz + 5GHz
Test Mode	Mode 2		

Horizontal

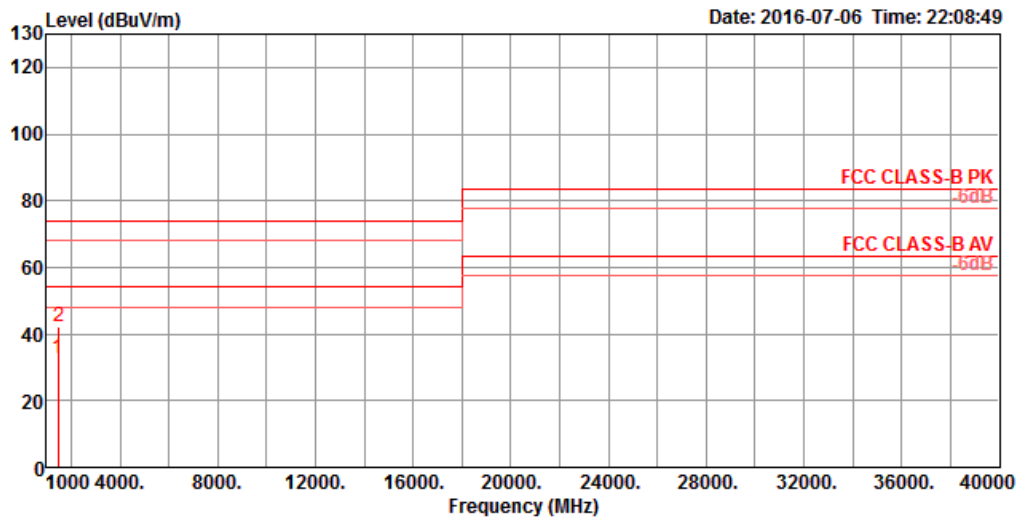

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	1482.90	32.65	54.00	-21.35	35.79	4.38	25.37	32.89	100	278	Average	HORIZONTAL
2	1484.21	42.26	74.00	-31.74	45.38	4.39	25.38	32.89	100	278	Peak	HORIZONTAL

Vertical

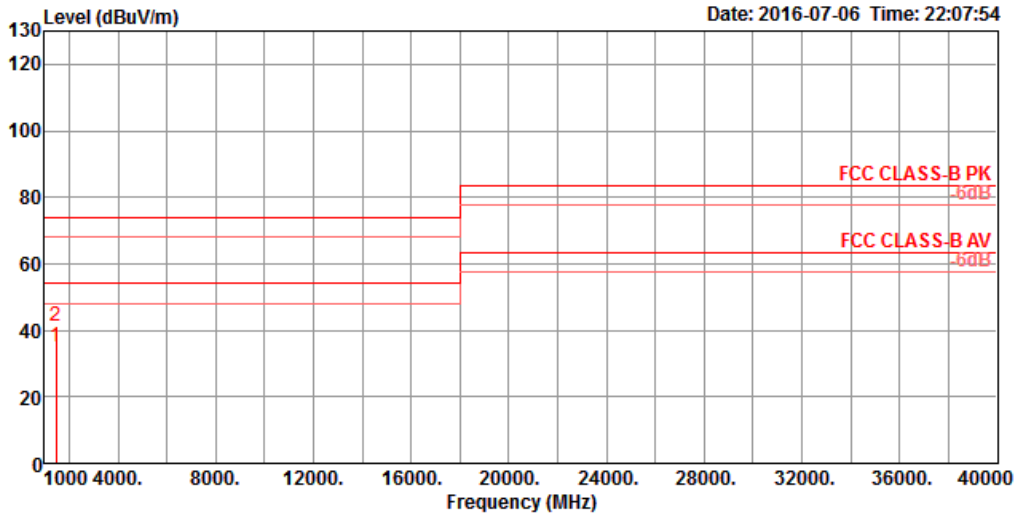

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	A/Pos	T/Pos	Remark	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	1482.98	34.84	54.00	-19.16	37.98	4.38	25.37	32.89	123	68 Average	VERTICAL
2	1483.56	41.43	74.00	-32.57	44.57	4.38	25.37	32.89	123	68 Peak	VERTICAL