


EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac20_TX_Band4_CH 165	Test Voltage	AC 120V/60Hz

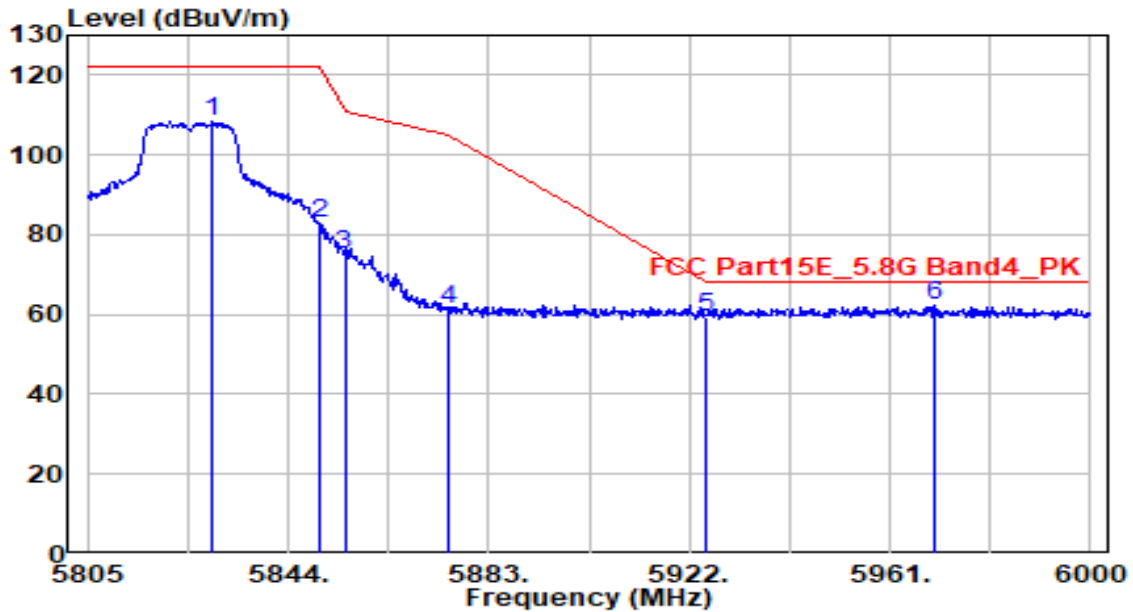


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5829.375	107.03	1.25	108.28	N/A	N/A	150	120	Peak
2	5850.000	81.75	1.28	83.03	-39.17	122.20	150	120	Peak
3	5855.000	73.74	1.28	75.02	-35.78	110.80	150	120	Peak
4	5875.000	59.82	1.30	61.12	-44.08	105.20	150	120	Peak
5	5925.000	58.25	1.35	59.60	-8.60	68.20	150	120	Peak
6	* 5969.775	61.02	1.40	62.42	-5.78	68.20	150	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac20_TX_Band4_CH 165	Test Voltage	AC 120V/60Hz

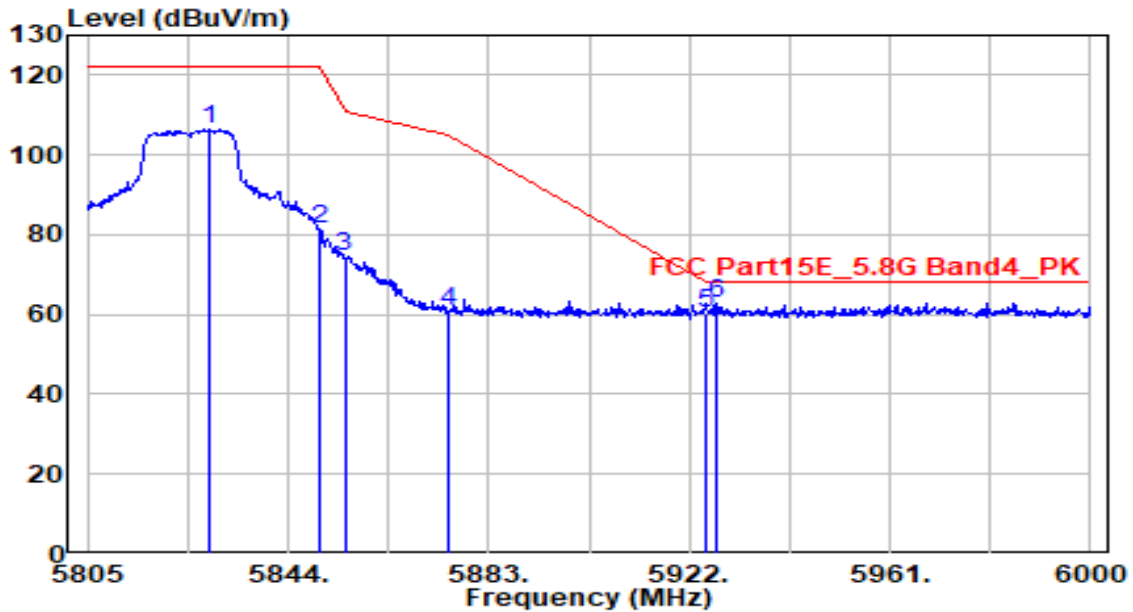


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5828.790	105.35	1.25	106.60	N/A	N/A	250	185	Peak
2	5850.000	80.35	1.28	81.62	-40.58	122.20	250	185	Peak
3	5855.000	73.32	1.28	74.60	-36.20	110.80	250	185	Peak
4	5875.000	59.67	1.30	60.97	-44.23	105.20	250	185	Peak
5	5925.000	59.03	1.35	60.39	-7.81	68.20	250	185	Peak
6	* 5927.460	61.40	1.36	62.76	-5.44	68.20	250	185	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac40_TX_Band1_CH 38	Test Voltage	AC 120V/60Hz

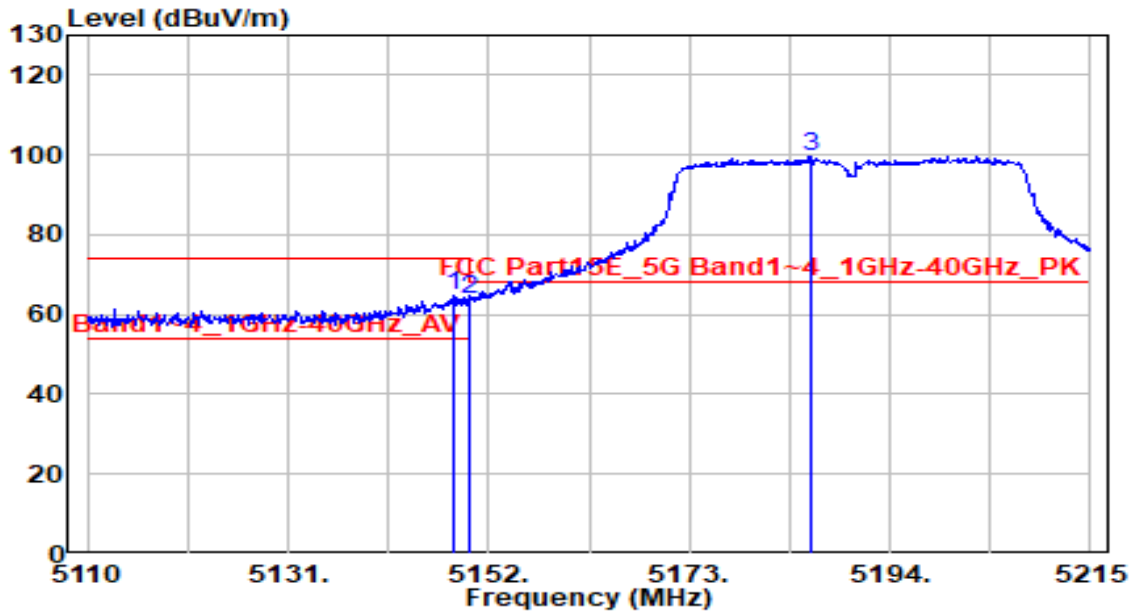


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.430	64.86	-0.32	64.54	-9.46	74.00	150	190	Peak
2	5150.000	63.94	-0.32	63.62	-10.38	74.00	150	190	Peak
3	5185.705	100.07	-0.32	99.75	N/A	N/A	150	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac40_TX_Band1_CH 38	Test Voltage	AC 120V/60Hz

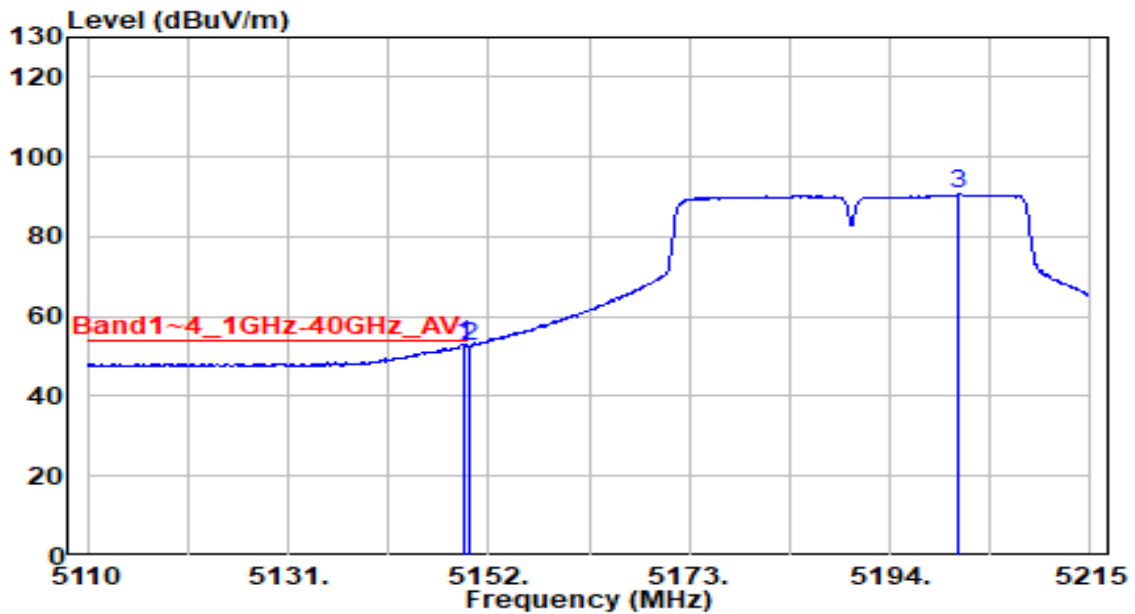


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5149.375	53.33	-0.32	53.01	-0.99	54.00	150	190	Average
2	5150.000	52.84	-0.32	52.52	-1.48	54.00	150	190	Average
3	5201.245	90.90	-0.32	90.58	N/A	N/A	150	190	Average

Note:

- "*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac40_TX_Band1_CH 38	Test Voltage	AC 120V/60Hz

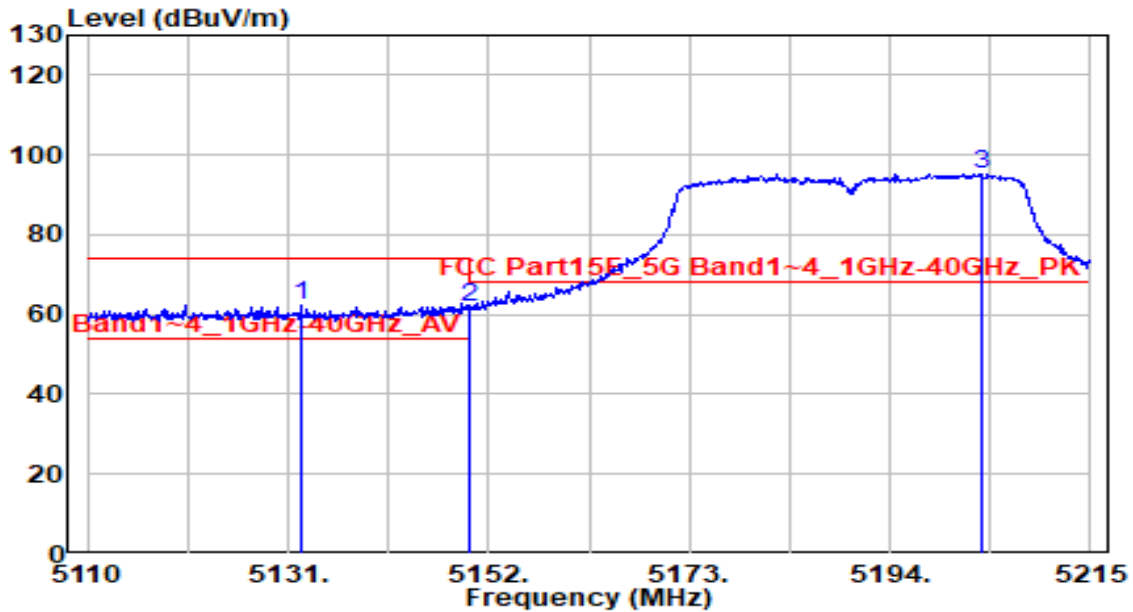


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5132.260	62.69	-0.32	62.37	-11.63	74.00	255	210	Peak
2	5150.000	62.09	-0.32	61.77	-12.23	74.00	255	210	Peak
3	5203.660	95.65	-0.32	95.32	N/A	N/A	255	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac40_TX_Band1_CH 38	Test Voltage	AC 120V/60Hz

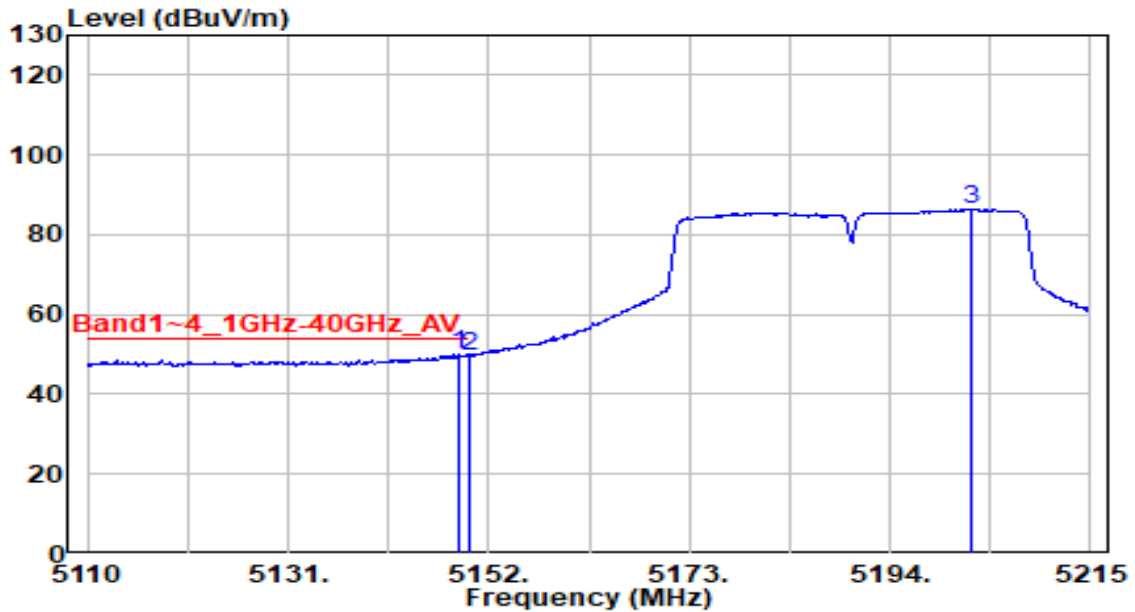


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5148.955	50.30	-0.32	49.98	-4.02	54.00	255	210	Average
2	5150.000	50.06	-0.32	49.74	-4.26	54.00	255	210	Average
3	5202.400	86.74	-0.32	86.42	N/A	N/A	255	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac40_TX_Band4_CH 151	Test Voltage	AC 120V/60Hz

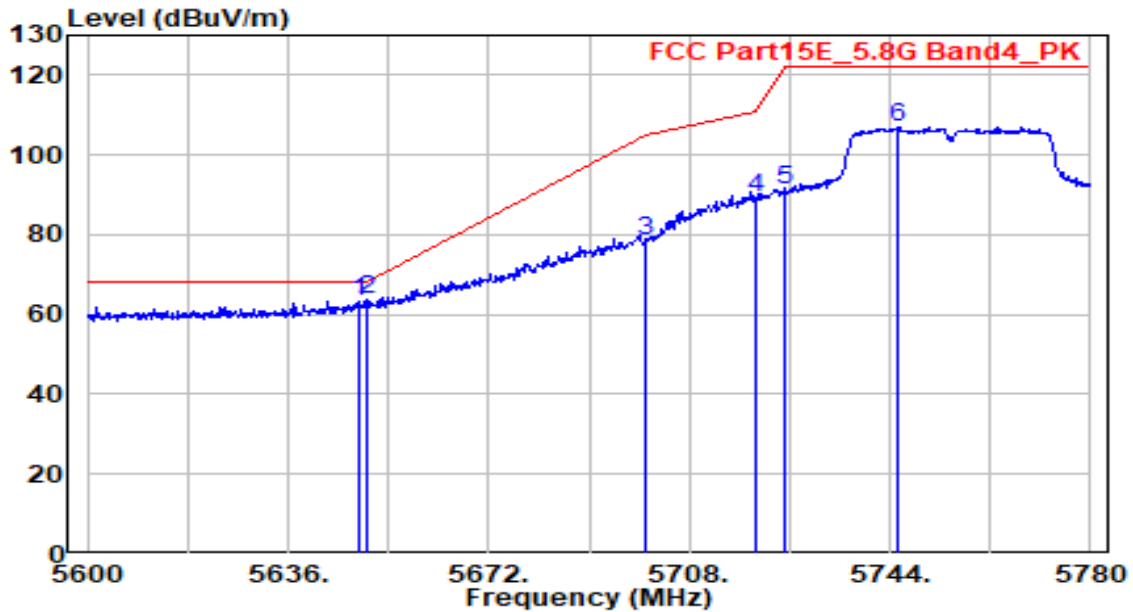


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5648.600	62.65	0.60	63.25	-4.95	68.20	150	120	Peak
2	* 5650.000	63.13	0.60	63.73	-4.47	68.20	150	120	Peak
3	5700.000	77.59	0.81	78.40	-26.80	105.20	150	120	Peak
4	5720.000	88.53	0.89	89.42	-21.38	110.80	150	120	Peak
5	5725.000	90.55	0.91	91.46	-30.74	122.20	150	120	Peak
6	5745.440	106.17	1.00	107.17	N/A	N/A	150	120	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac40_TX_Band4_CH 151	Test Voltage	AC 120V/60Hz

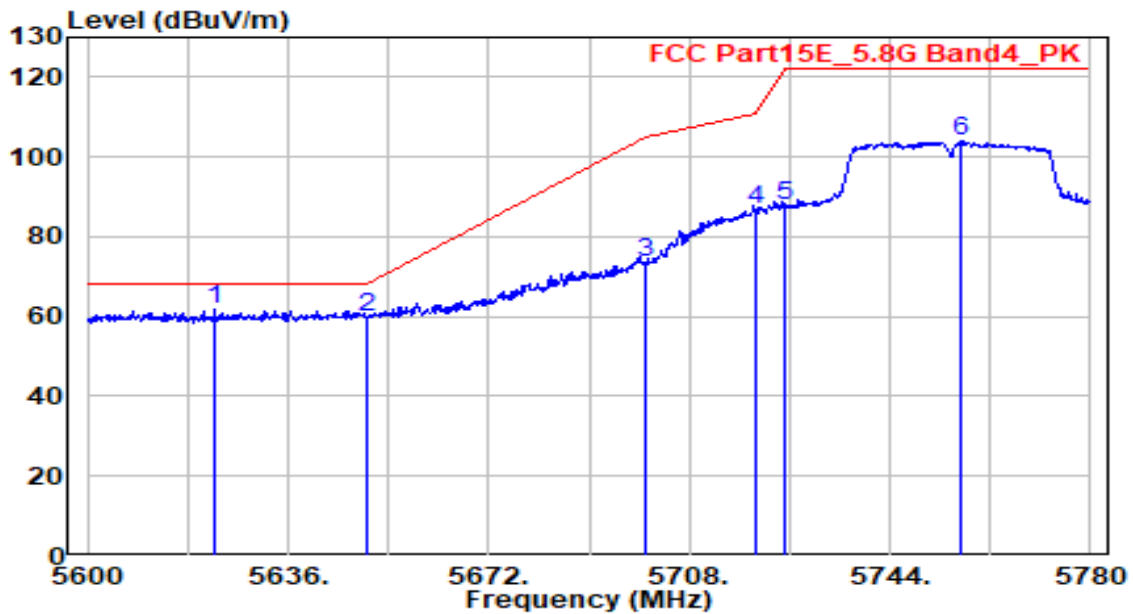


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5623.040	61.41	0.49	61.91	-6.29	68.20	245	190	Peak
2	5650.000	59.20	0.60	59.81	-8.39	68.20	245	190	Peak
3	5700.000	72.77	0.81	73.58	-31.62	105.20	245	190	Peak
4	5720.000	86.04	0.89	86.94	-23.86	110.80	245	190	Peak
5	5725.000	86.83	0.91	87.74	-34.46	122.20	245	190	Peak
6	5756.780	103.07	1.04	104.12	N/A	N/A	245	190	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac40_TX_Band4_CH 159	Test Voltage	AC 120V/60Hz

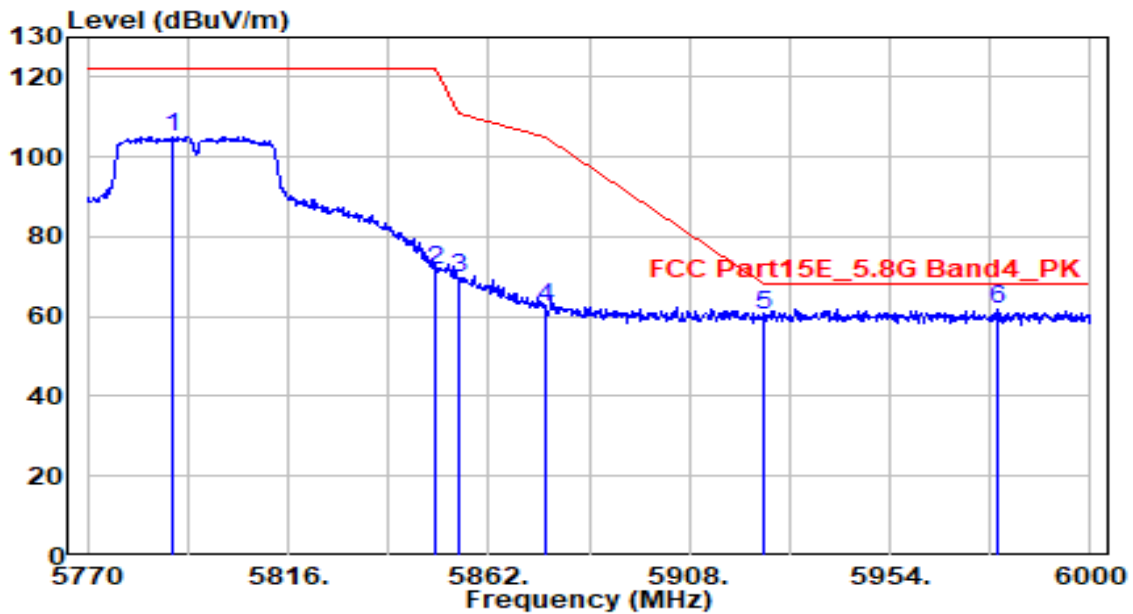


No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5789.320	104.02	1.18	105.20	N/A	N/A	150	125	Peak
2	5850.000	70.44	1.28	71.71	-50.49	122.20	150	125	Peak
3	5855.000	68.58	1.28	69.86	-40.94	110.80	150	125	Peak
4	5875.000	60.96	1.30	62.26	-42.94	105.20	150	125	Peak
5	5925.000	58.88	1.35	60.23	-7.97	68.20	150	125	Peak
6	* 5978.840	60.46	1.41	61.87	-6.33	68.20	150	125	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac40_TX_Band4_CH 159	Test Voltage	AC 120V/60Hz

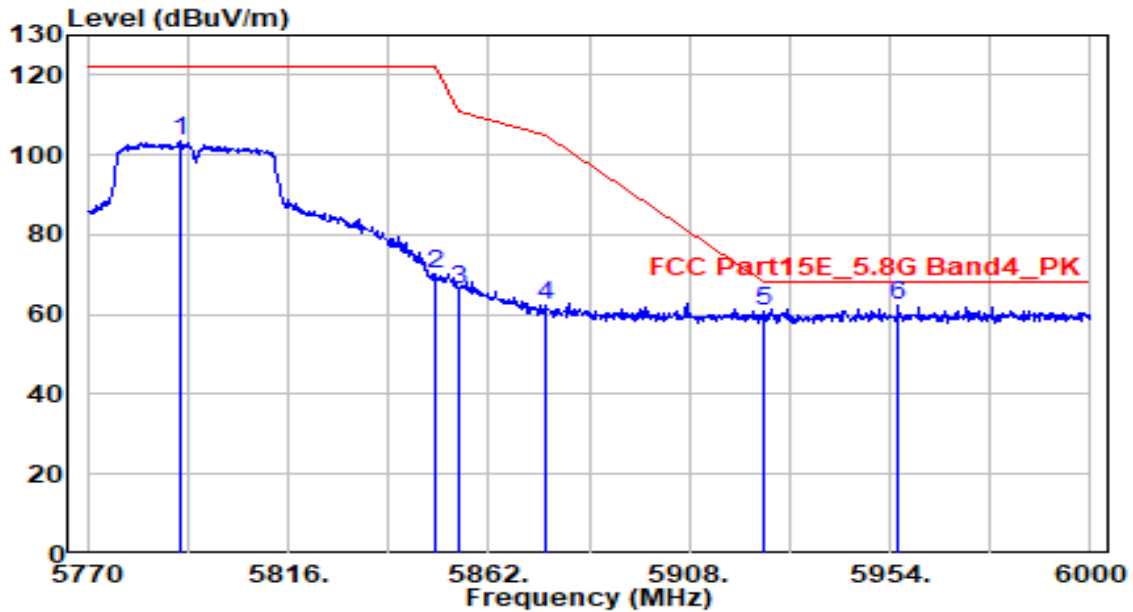


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5791.390	102.29	1.19	103.48	N/A	N/A	255	190	Peak
2	5850.000	69.02	1.28	70.30	-51.90	122.20	255	190	Peak
3	5855.000	65.17	1.28	66.45	-44.35	110.80	255	190	Peak
4	5875.000	60.95	1.30	62.25	-42.95	105.20	255	190	Peak
5	5925.000	59.37	1.35	60.73	-7.47	68.20	255	190	Peak
6	* 5956.070	60.90	1.39	62.29	-5.91	68.20	255	190	Peak

Note:

- "*" means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
- Measurement (dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac80_TX_Band1_CH 42	Test Voltage	AC 120V/60Hz

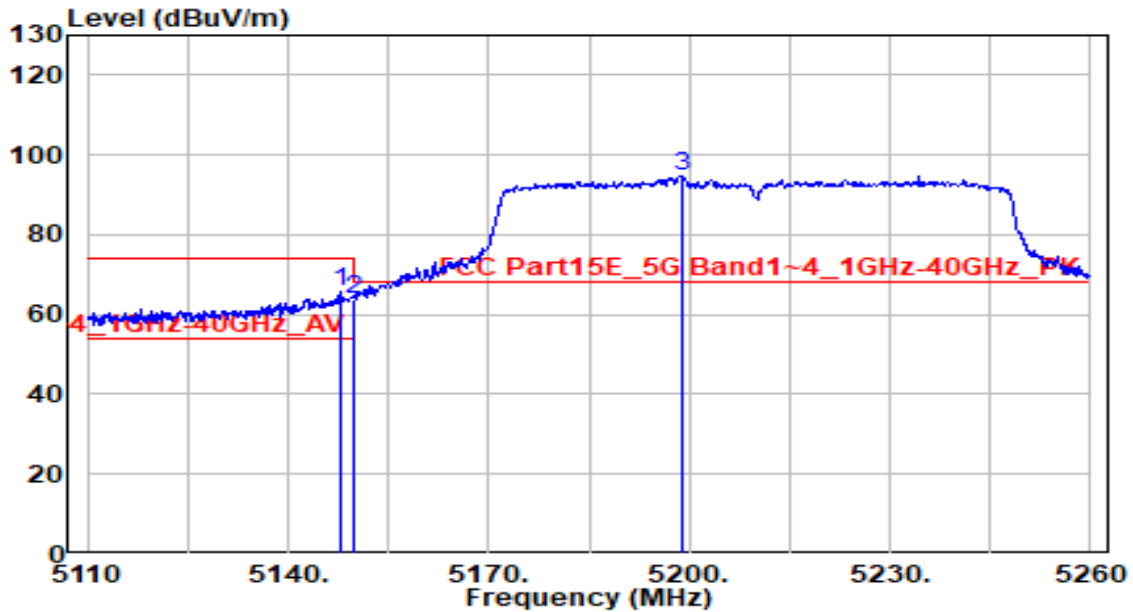


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)	
1	*	5147.950	65.90	-0.32	65.58	-8.42	74.00	170	110	Peak
2		5150.000	64.31	-0.32	63.99	-10.01	74.00	170	110	Peak
3		5198.800	95.21	-0.32	94.89	N/A	N/A	170	110	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac80_TX_Band1_CH 42	Test Voltage	AC 120V/60Hz

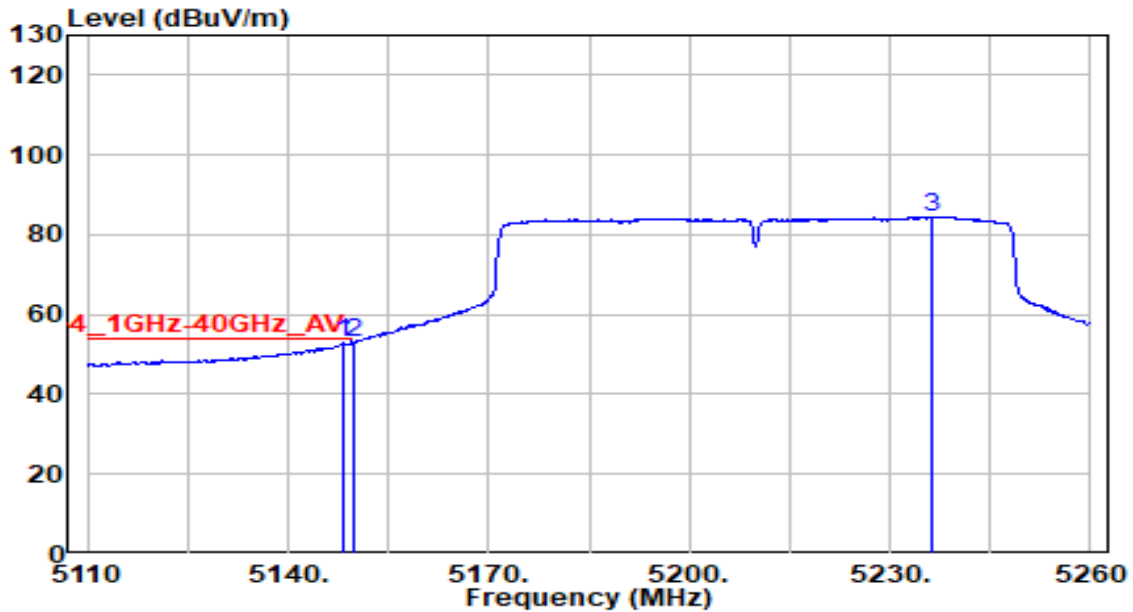


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5148.400	53.10	-0.32	52.78	-1.22	54.00	170	110	Average
2	* 5150.000	53.44	-0.32	53.12	-0.88	54.00	170	110	Average
3	5236.450	84.85	-0.33	84.53	N/A	N/A	170	110	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac80_TX_Band1_CH 42	Test Voltage	AC 120V/60Hz

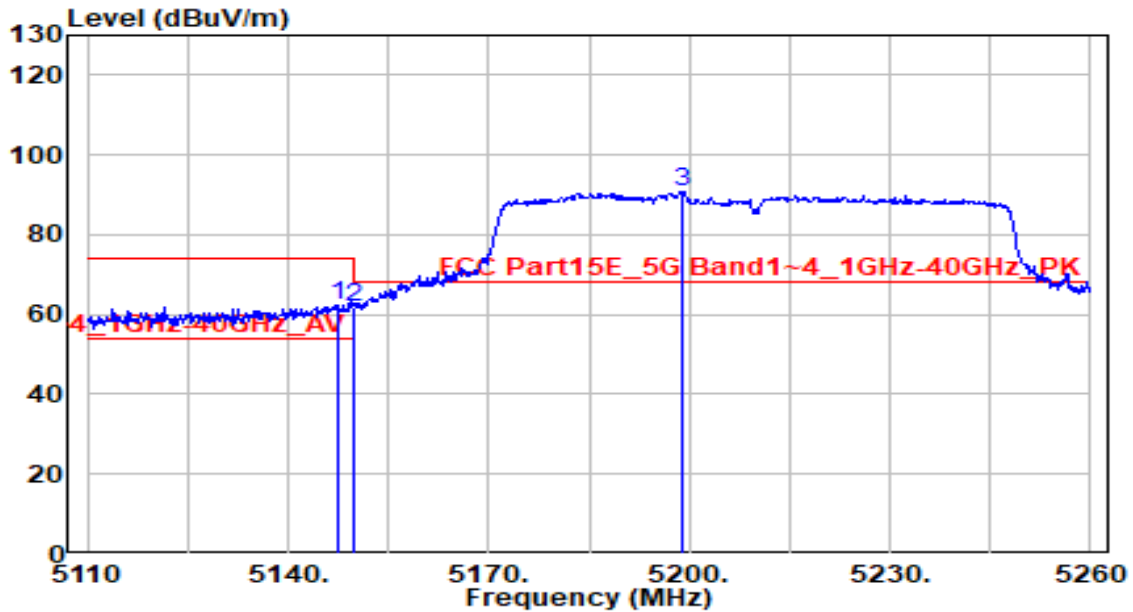


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5147.650	62.86	-0.32	62.54	-11.46	74.00	150	210	Peak
2	5150.000	62.15	-0.32	61.84	-12.16	74.00	150	210	Peak
3	5198.800	91.31	-0.32	90.98	N/A	N/A	150	210	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Pre-amplifier(dB) + 20dB Attenuation.
3. Measurement (dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac80_TX_Band1_CH 42	Test Voltage	AC 120V/60Hz

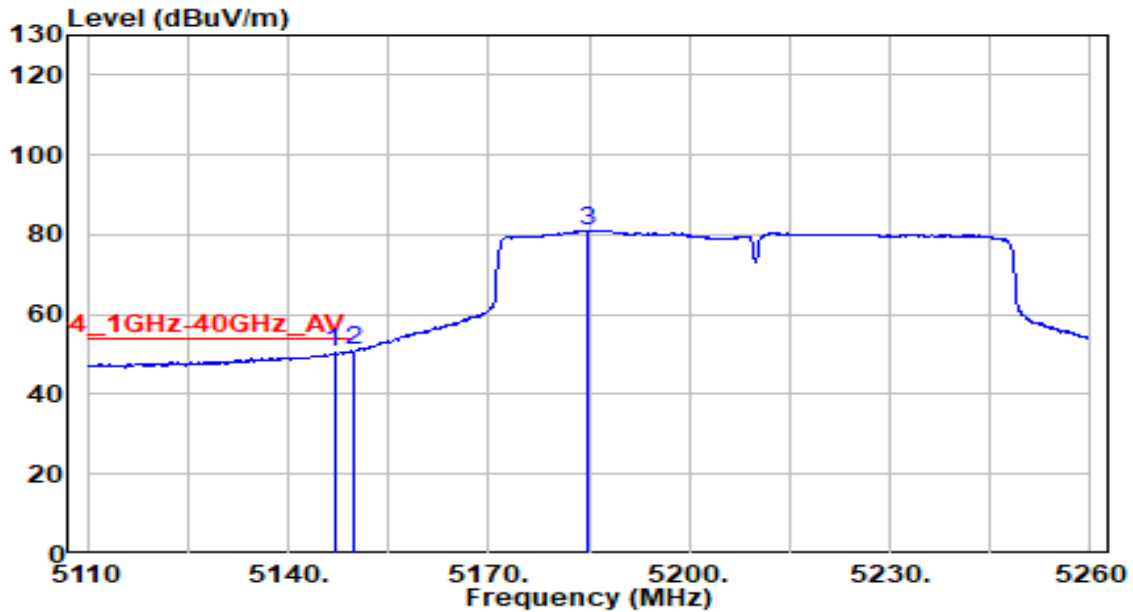


No	Frequency (MHz)	Reading (dB μ V)	C.F (dB/m)	Measurement (dB μ V/m)	Margin (dB)	Limit (dB μ V/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5146.900	50.68	-0.32	50.36	-3.64	54.00	150	210	Average
2	* 5150.000	51.10	-0.32	50.78	-3.22	54.00	150	210	Average
3	5184.850	81.45	-0.32	81.12	N/A	N/A	150	210	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dB μ V/m) = Reading(dB μ V) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Horizontal	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac80_TX_Band4_CH 155	Test Voltage	AC 120V/60Hz

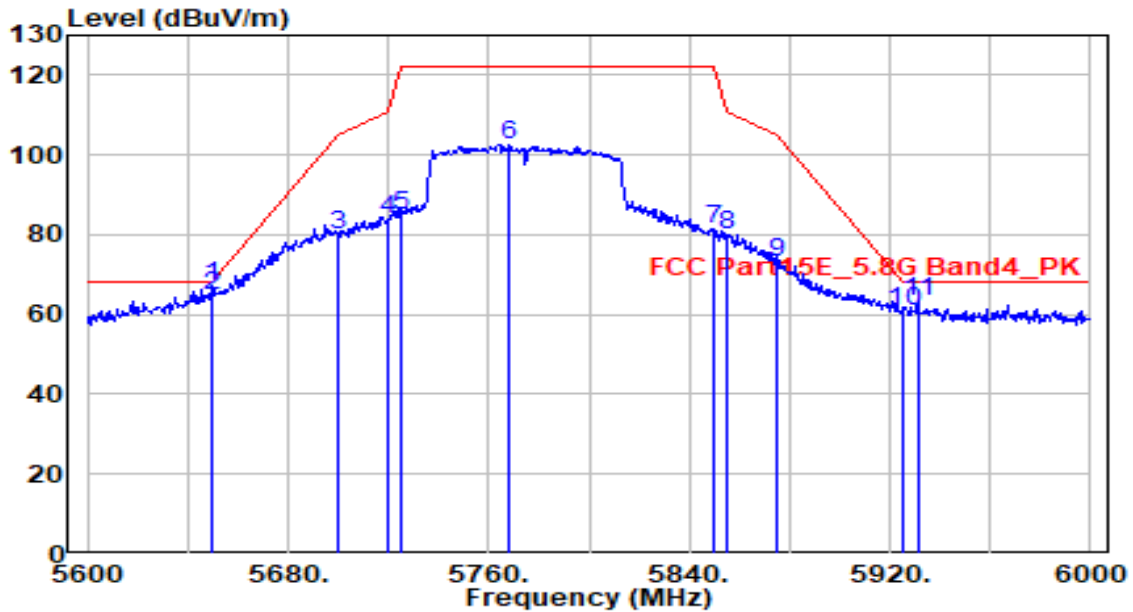


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	* 5649.200	66.56	0.60	67.16	-1.04	68.20	150	120	Peak
2	5650.000	64.32	0.60	64.93	-3.27	68.20	150	120	Peak
3	5700.000	78.96	0.81	79.77	-25.43	105.20	150	120	Peak
4	5720.000	82.86	0.89	83.76	-27.04	110.80	150	120	Peak
5	5725.000	83.77	0.91	84.68	-37.52	122.20	150	120	Peak
6	5768.400	101.58	1.09	102.67	N/A	N/A	150	120	Peak
7	5850.000	80.30	1.28	81.58	-40.62	122.20	150	120	Peak
8	5855.000	78.68	1.28	79.96	-30.84	110.80	150	120	Peak
9	5875.000	71.71	1.30	73.01	-32.19	105.20	150	120	Peak
10	5925.000	59.39	1.35	60.75	-7.45	68.20	150	120	Peak
11	5931.200	62.13	1.36	63.49	-4.71	68.20	150	120	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	OmniAccess Stellar	Date of Test	2021-10-07
Factor	DRH18-E	Temp. / Humidity	23°C /49%
Polarity	Vertical	Site / Test Engineer	AC2 / Jay
Test Mode	802.11ac80_TX_Band4_CH 155	Test Voltage	AC 120V/60Hz

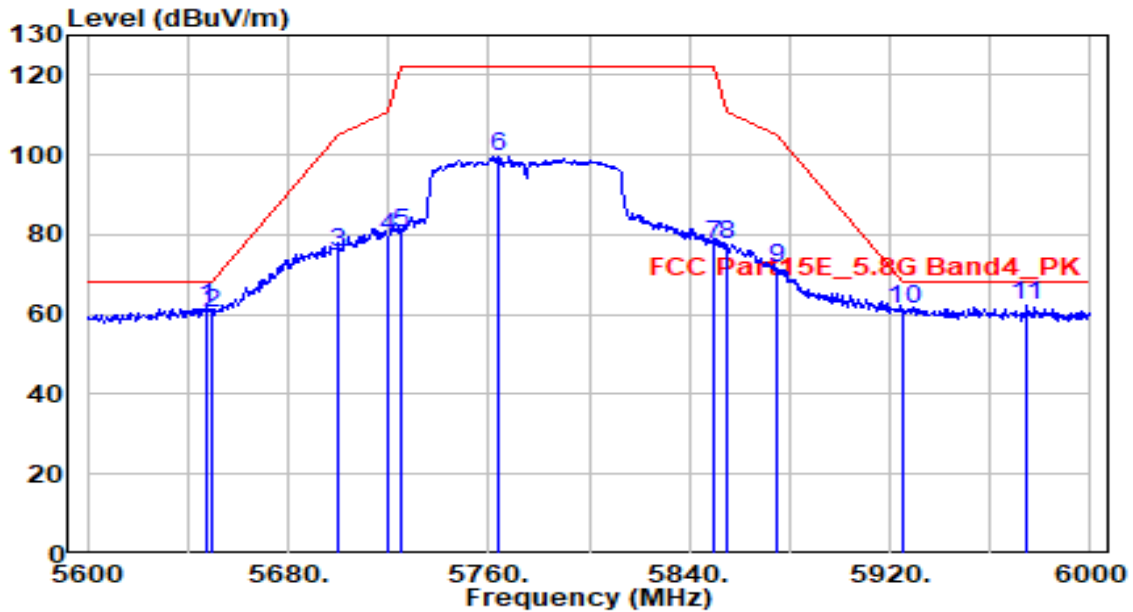

No	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5648.000	61.13	0.60	61.73	-6.47	68.20	250	190	Peak
2	5650.000	59.73	0.60	60.33	-7.87	68.20	250	190	Peak
3	5700.000	74.91	0.81	75.72	-29.48	105.20	250	190	Peak
4	5720.000	78.80	0.89	79.69	-31.11	110.80	250	190	Peak
5	5725.000	79.47	0.91	80.38	-41.82	122.20	250	190	Peak
6	5763.600	98.61	1.07	99.68	N/A	N/A	250	190	Peak
7	5850.000	76.26	1.28	77.53	-44.67	122.20	250	190	Peak
8	5855.000	76.35	1.28	77.63	-33.17	110.80	250	190	Peak
9	5875.000	70.25	1.30	71.55	-33.65	105.20	250	190	Peak
10	5925.000	59.77	1.35	61.12	-7.08	68.20	250	190	Peak
11	* 5974.400	61.05	1.40	62.45	-5.75	68.20	250	190	Peak

Note:

1. "*" , means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 20dB Attenuation.
3. Measurement (dBμV/m) = Reading(dBμV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.8. AC Conducted Emissions Measurement


7.8.1. Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.


Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

7.8.2. Test Setup

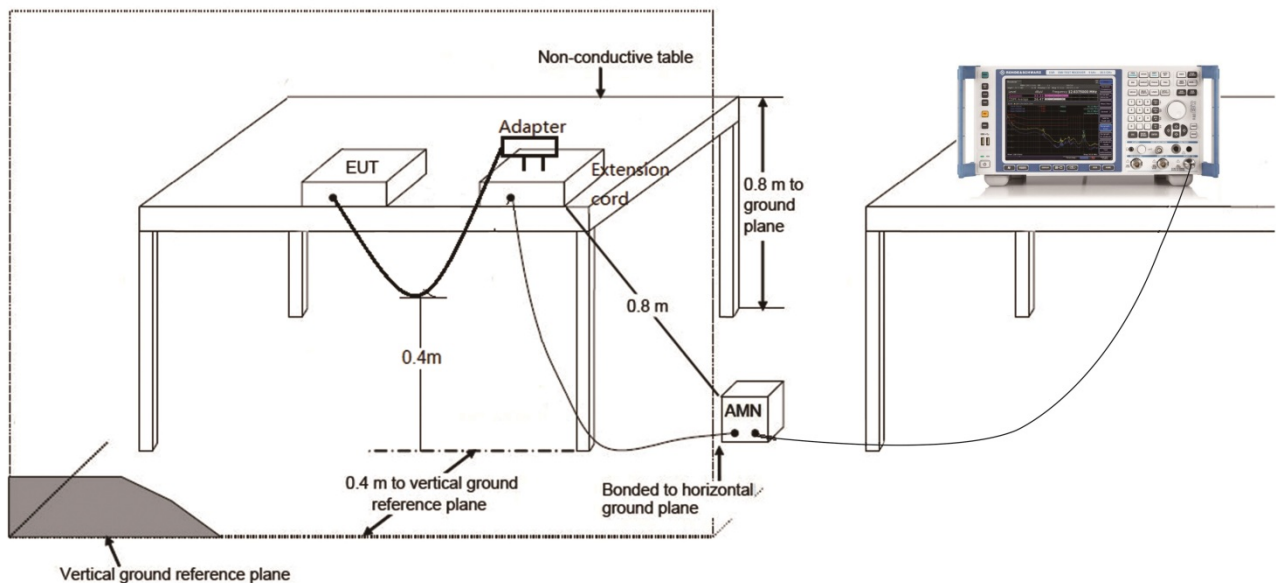

7.8.3. Test Result

EUT	OmniAccess Stellar	Date of Test	2021-11-05
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	25.3°C / 57.6%
Polarity	Neutral	Site / Test Engineer	SR2 / Eric Lin
Test Mode	Transmit by 802.11a at channel 5745MHz	Test Voltage	AC 120V/60Hz

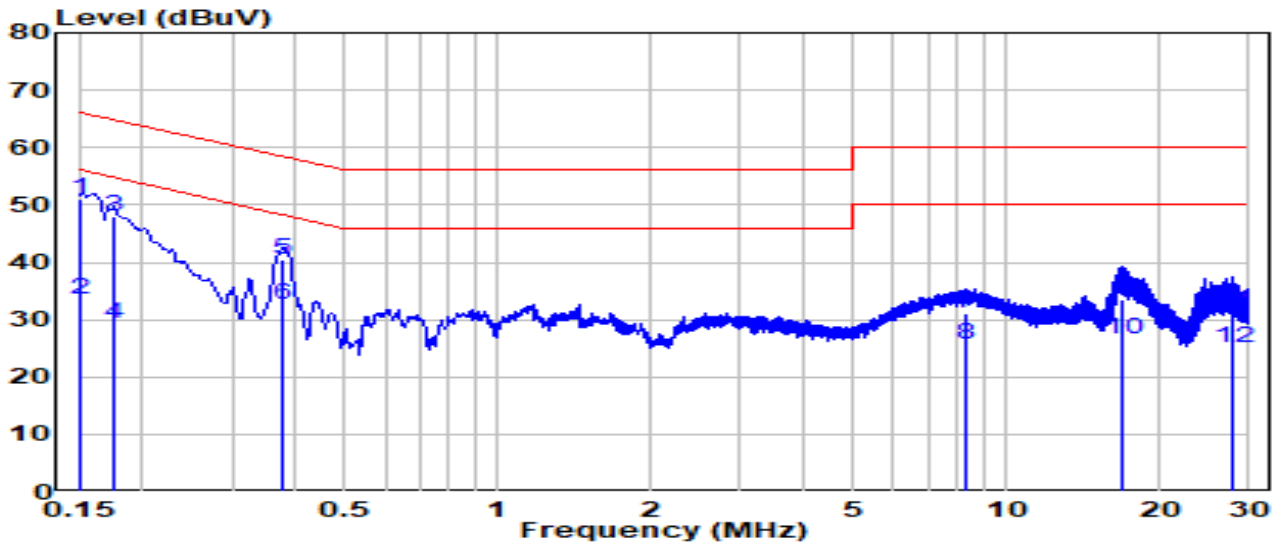


No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Remark (QP/PK/AV)
1	* 0.150	41.29	9.62	50.91	-15.08	65.99	QP
2	0.150	23.89	9.62	33.51	-22.48	55.99	Average
3	0.175	38.29	9.62	47.91	-16.82	64.73	QP
4	0.175	19.59	9.62	29.21	-25.52	54.73	Average
5	0.379	30.77	9.64	40.41	-17.88	58.29	QP
6	0.379	22.97	9.64	32.61	-15.68	48.29	Average
7	8.365	21.31	9.87	31.18	-28.82	60.00	QP
8	8.365	15.71	9.87	25.58	-24.42	50.00	Average
9	16.872	23.39	10.04	33.43	-26.58	60.00	QP
10	16.872	16.49	10.04	26.53	-23.48	50.00	Average
11	27.720	21.20	10.20	31.39	-28.61	60.00	QP
12	27.720	14.90	10.20	25.09	-24.91	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBμV) = Reading(dBμV) + C.F (Correction Factor).

EUT	OmniAccess Stellar	Date of Test	2021-11-05
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	25.3°C / 57.6%
Polarity	Line	Site / Test Engineer	SR2 / Eric Lin
Test Mode	Transmit by 802.11a at channel 5745MHz	Test Voltage	AC 120V/60Hz

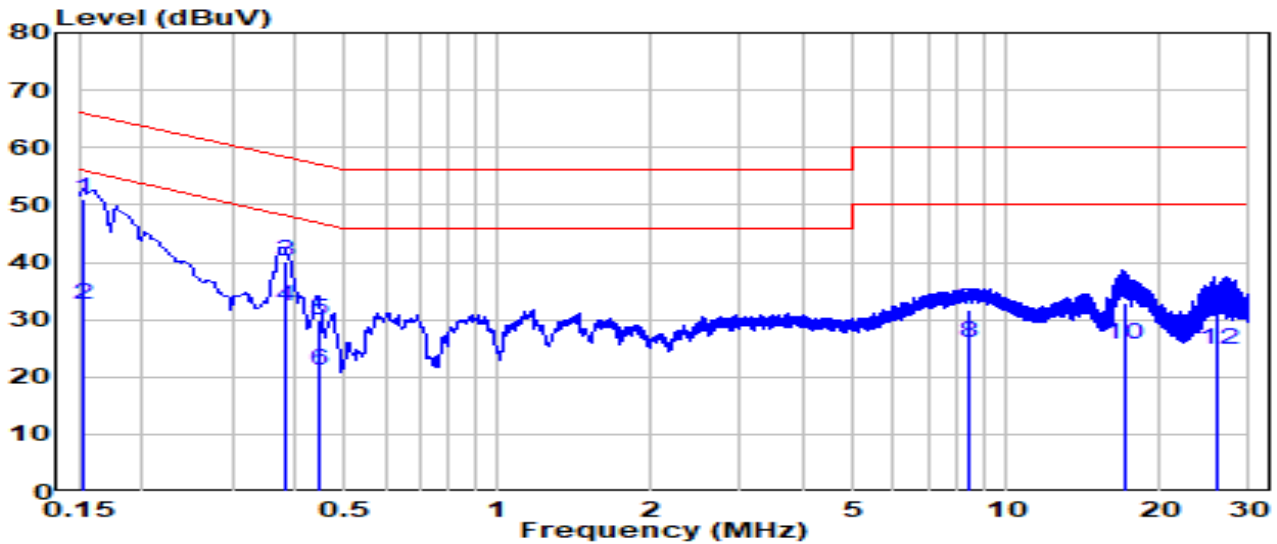

No	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Remark (QP/PK/AV)
1	* 0.152	41.41	9.61	51.02	-14.86	65.88	QP
2	0.152	23.11	9.61	32.72	-23.16	55.88	Average
3	0.380	30.48	9.64	40.12	-18.16	58.28	QP
4	0.380	22.78	9.64	32.42	-15.86	48.28	Average
5	0.445	20.38	9.64	30.02	-26.95	56.97	QP
6	0.445	11.38	9.64	21.02	-25.95	46.97	Average
7	8.490	21.74	9.86	31.60	-28.41	60.00	QP
8	8.490	16.04	9.86	25.90	-24.11	50.00	Average
9	17.025	22.84	9.98	32.82	-27.18	60.00	QP
10	17.025	15.74	9.98	25.72	-24.28	50.00	Average
11	26.155	21.51	10.09	31.60	-28.40	60.00	QP
12	26.155	14.81	10.09	24.90	-25.10	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement(dBμV) = Reading(dBμV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

————— The End —————

Appendix A - Test Setup Photograph

Refer to “2108TW0004-Test setup photo” file.

Appendix B - EUT Photograph

Refer to "OAW-AP1331-EUT Photo" file.