
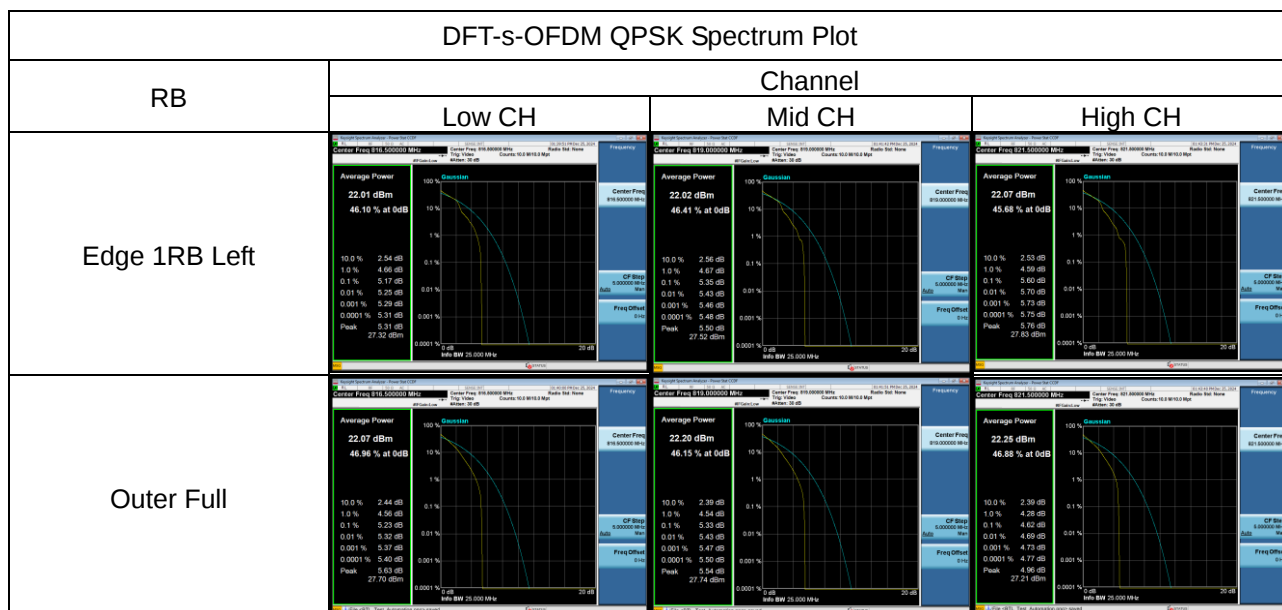


NR n26_5MHz						
Channel	Peak To Average Ratio (dB)				Max. Limit (dB)	Result
	DFT-s-OFDM PI/2 BPSK		DFT-s-OFDM QPSK			
	Edge 1RB Left	Outer Full	Edge 1RB Left	Outer Full		
Low CH	3.88	4.59	5.17	5.23	13	Pass
Mid CH	3.91	4.090	5.35	5.33	13	Pass
High CH	3.87	4.16	5.60	4.62	13	Pass

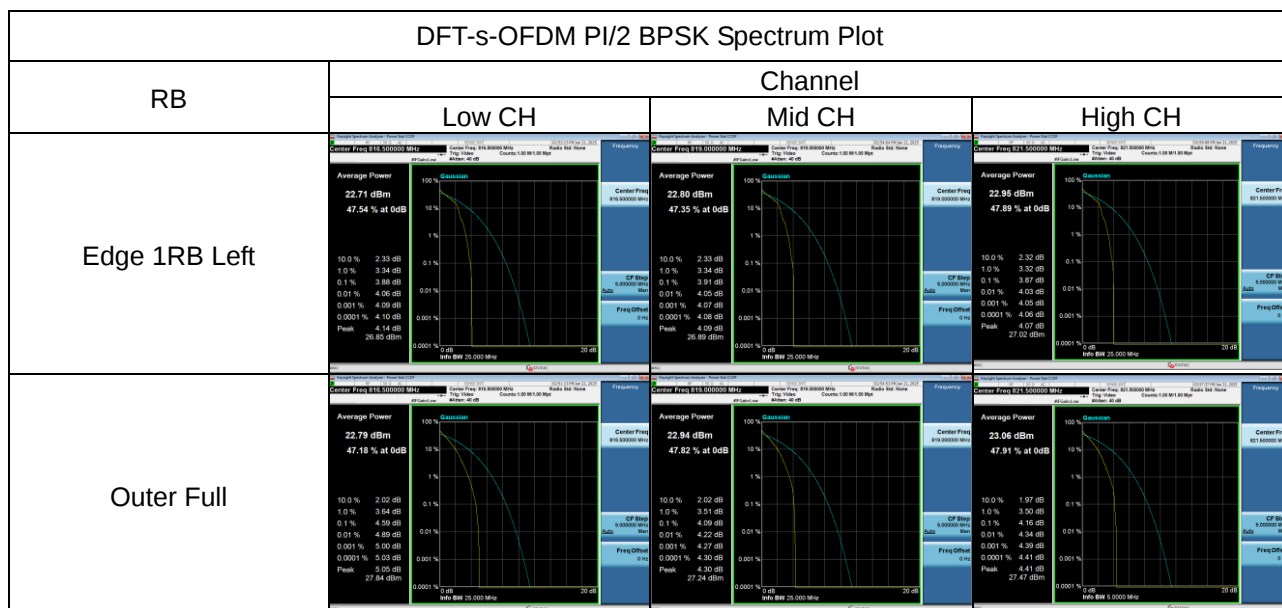

APPENDIX I - FREQUENCY STABILITY

Test Mode	LTE Band 26
-----------	-------------

Frequency error versus temperature and supply voltage			
Temperature (°C)	Frequency error (Hz)	ppm	Limit
50	-5.74	-0.0070	±2.5ppm
40	-6.17	-0.0075	
30	4.32	0.0053	
20	4.34	0.0053	
10	12.24	0.0149	
0	-6.89	-0.0084	
-10	3.48	0.0042	
-20	-4.79	-0.0058	
-30	-4.92	-0.0060	
Minimun Voltage	6.54	0.0080	
Maximun Voltage	-6.46	-0.0079	
Normal Voltage	5.12	0.0063	

Note: Nominal voltage= 3.8V, Maximum voltage= 4.2V, Minimum voltage= 3.5V.

Test Mode	5G NR n26
-----------	-----------

Frequency error versus temperature and supply voltage			
Temperature (°C)	Frequency error (Hz)	ppm	Limit
50	-6.22	-0.0076	±2.5ppm
40	-6.52	-0.0080	
30	5.32	0.0065	
20	4.58	0.0056	
10	13.21	0.0161	
0	-7.36	-0.0090	
-10	4.36	0.0053	
-20	-5.26	-0.0064	
-30	-3.85	-0.0047	
Minimun Voltage	4.68	0.0057	
Maximun Voltage	-5.52	-0.0067	
Normal Voltage	6.54	0.0080	

Note: Nominal voltage= 3.8V, Maximum voltage= 4.2V, Minimum voltage= 3.5V.

End of Test Report