

Test Laboratory: BTL Inc.

Date: 2025/1/8

System Check_H750_0108

DUT: Dipole 750 MHz D750V3;SN:1095;


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 43.222$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $22.8 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(9.68, 9.48, 9.54) @ 750 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 2.70 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 58.34 V/m ; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 3.04 W/kg
SAR(1 g) = 2.14 W/kg ; SAR(10 g) = 1.44 W/kg
Maximum value of SAR (measured) = 2.77 W/kg

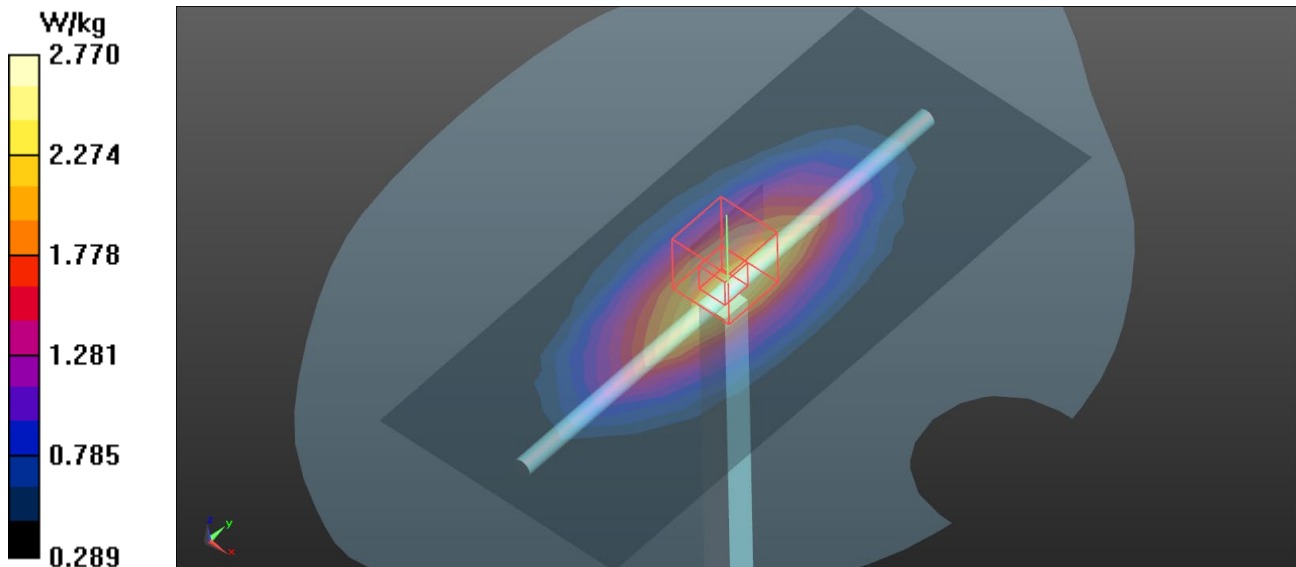

Test Laboratory: BTL Inc.

Date: 2025/1/9

System Check_H750_0109

DUT: Dipole 750 MHz D750V3;SN:1095;


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.886 \text{ S/m}$; $\epsilon_r = 43.344$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(9.68, 9.48, 9.54) @ 750 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 2.86 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 61.15 V/m ; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 2.92 W/kg
SAR(1 g) = 2.05 W/kg ; SAR(10 g) = 1.38 W/kg
Maximum value of SAR (measured) = 2.66 W/kg

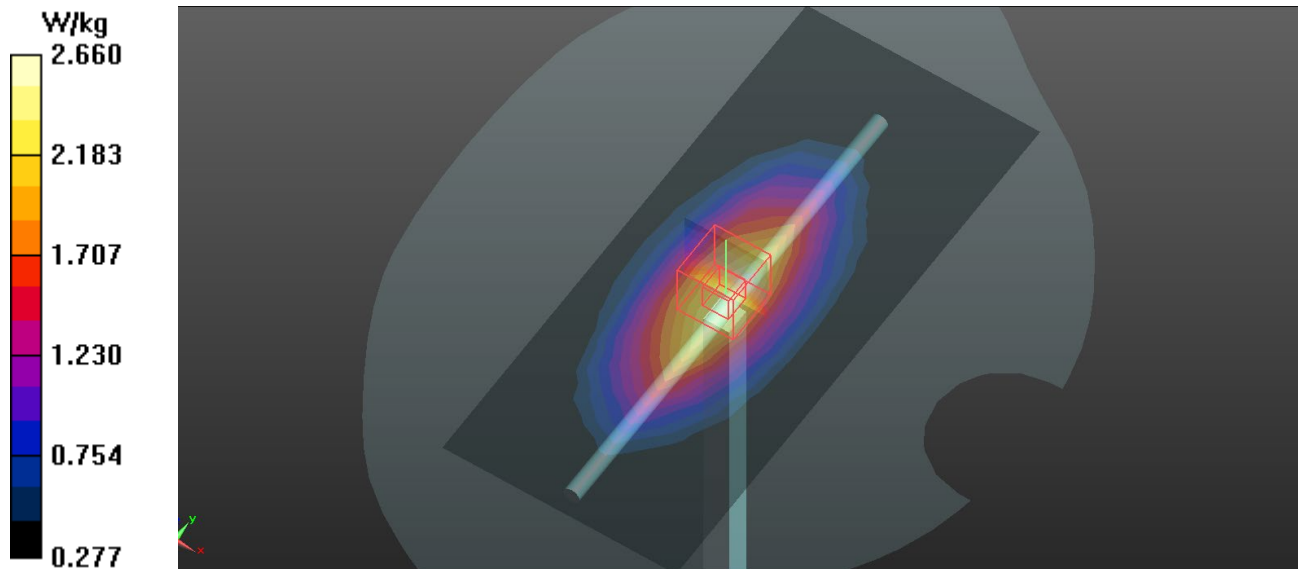

Test Laboratory: BTL Inc.

Date: 2025/1/10

System Check_H750_0110**DUT: Dipole 750 MHz D750V3;SN:1095;**


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750$ MHz; $\sigma = 0.885$ S/m; $\epsilon_r = 43.872$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(9.68, 9.48, 9.54) @ 750 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x15x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 2.54 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 56.85 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 2.97 W/kg
SAR(1 g) = 2.13 W/kg; SAR(10 g) = 1.43 W/kg
Maximum value of SAR (measured) = 2.71 W/kg

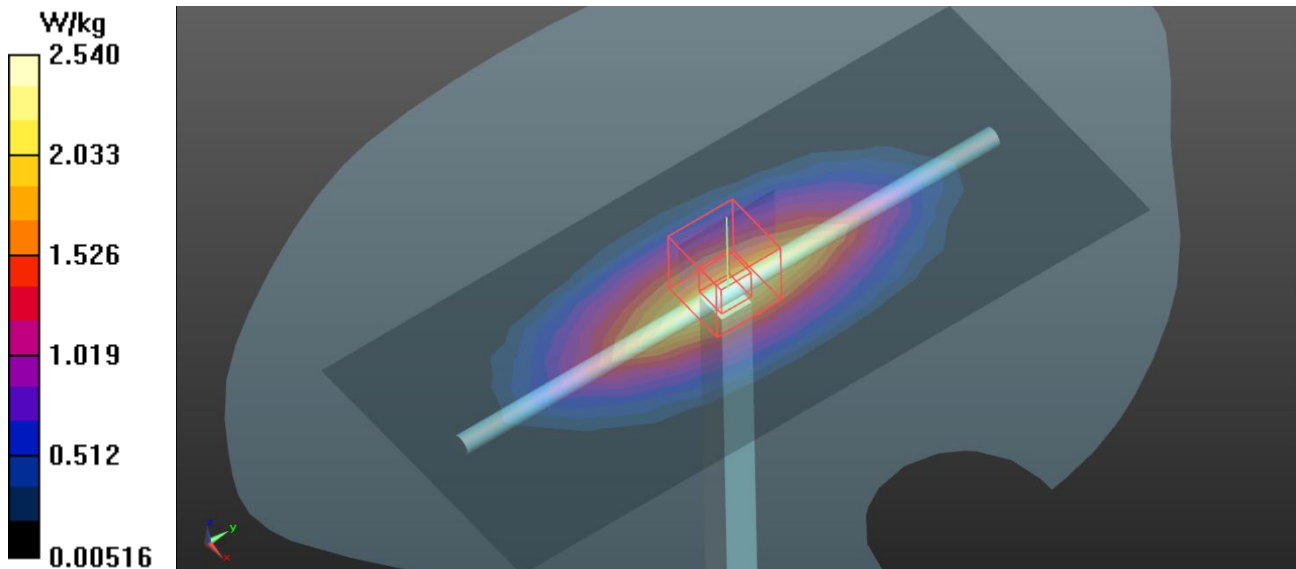

Test Laboratory: BTL Inc.

Date: 2025/1/14

System Check_H750_0114

DUT: Dipole 750 MHz D750V3;SN:1095;


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.894 \text{ S/m}$; $\epsilon_r = 42.995$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.7 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.59, 9.35, 10.02) @ 750 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 2.52 W/kg

Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 54.09 V/m ; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 3.09 W/kg
SAR(1 g) = 2.16 W/kg ; SAR(10 g) = 1.44 W/kg
Maximum value of SAR (measured) = 2.50 W/kg

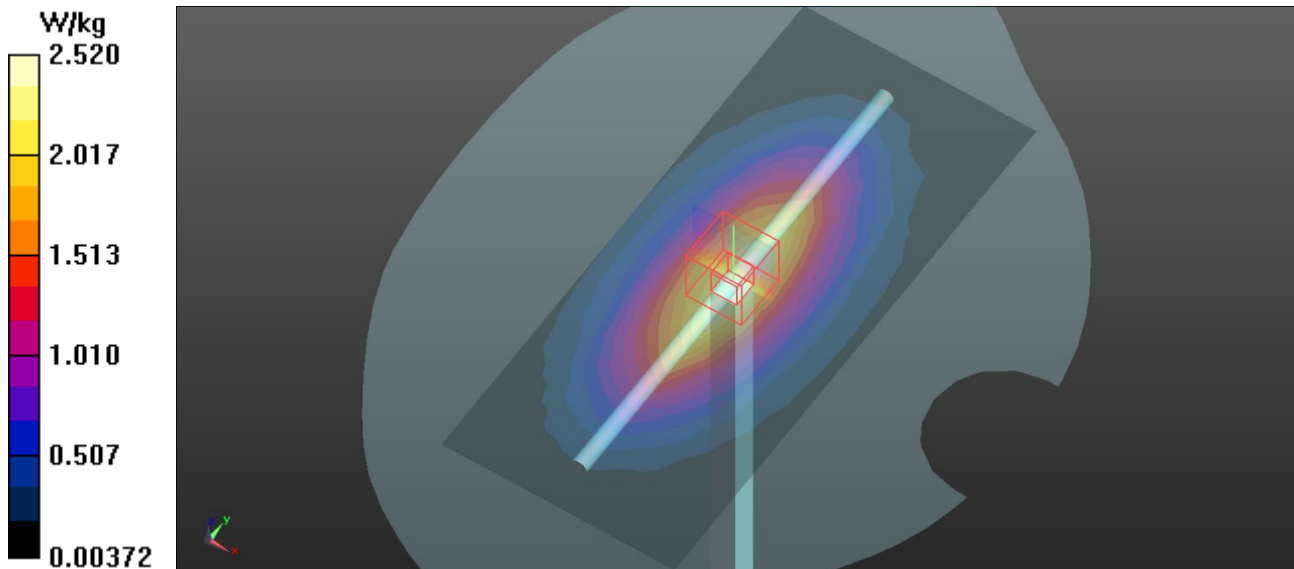

Test Laboratory: BTL Inc.

Date: 2025/2/07

System Check_H750_0207

DUT: Dipole 750 MHz D750V3;SN:1095;


Communication System: UID 0, CW (0); Frequency: 750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 750 \text{ MHz}$; $\sigma = 0.926 \text{ S/m}$; $\epsilon_r = 43.048$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.1 \text{ }^\circ\text{C}$; Liquid Temperature : $22.7 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.59, 9.35, 10.02) @ 750 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x15x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 2.32 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 50.86 V/m ; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 3.08 W/kg
SAR(1 g) = 2.14 W/kg ; SAR(10 g) = 1.46 W/kg (SAR corrected for target medium)
Maximum value of SAR (measured) = 2.48 W/kg

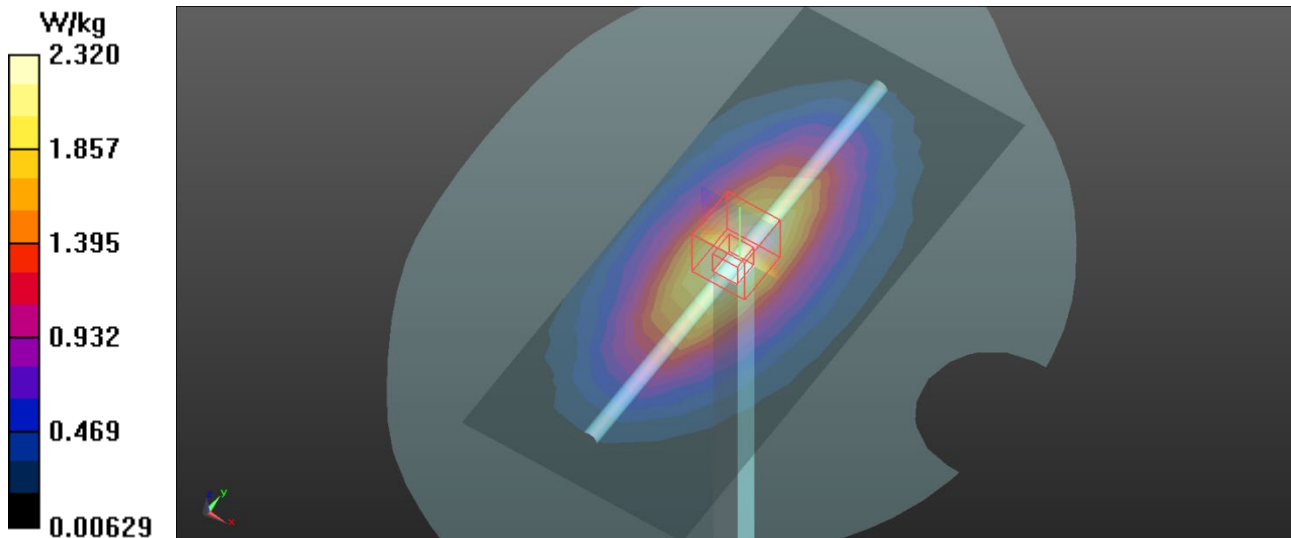

Test Laboratory: BTL Inc.

Date: 2025/1/3

System Check_H835_0103

DUT: Dipole 835 MHz D835V2;SN:4d160;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.928 \text{ S/m}$; $\epsilon_r = 42.398$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.9 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(9.34, 9.18, 9.3) @ 835 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 3.00 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 60.42 V/m ; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 3.30 W/kg
SAR(1 g) = 2.28 W/kg ; SAR(10 g) = 1.52 W/kg
Maximum value of SAR (measured) = 2.99 W/kg

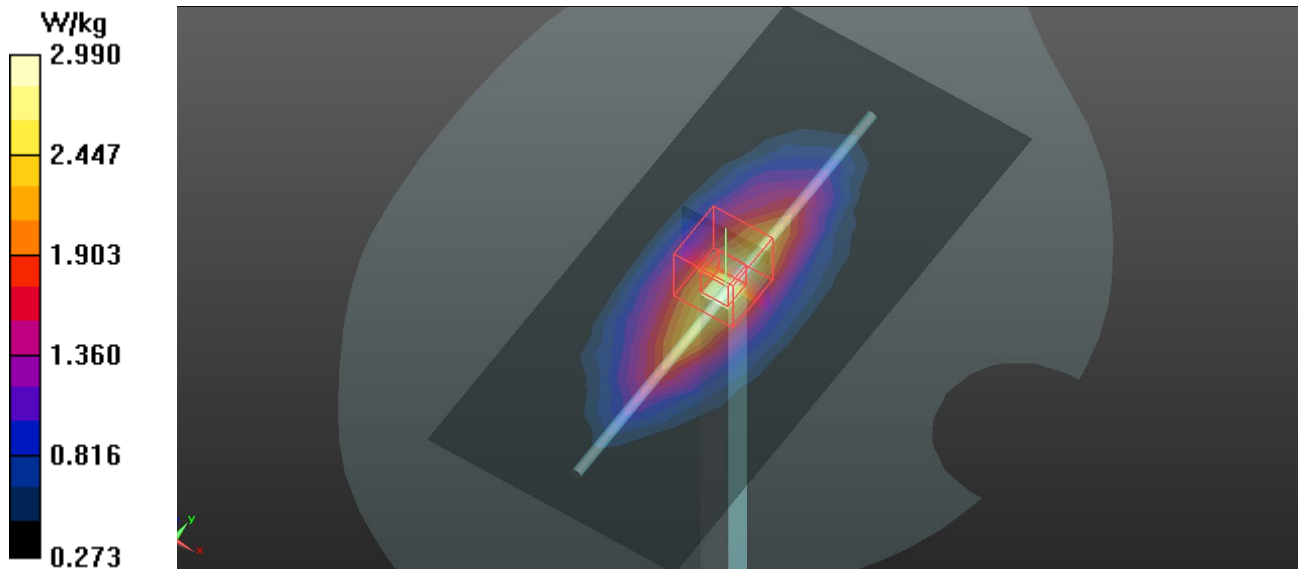

Test Laboratory: BTL Inc.

Date: 2025/1/7

System Check_H835_0107

DUT: Dipole 835 MHz D835V2;SN:4d160;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.928 \text{ S/m}$; $\epsilon_r = 42.398$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.1 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(9.34, 9.18, 9.3) @ 835 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 2.65 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 54.75 V/m ; Power Drift = 0.09 dB
Peak SAR (extrapolated) = 3.27 W/kg
SAR(1 g) = 2.28 W/kg ; SAR(10 g) = 1.52 W/kg
Maximum value of SAR (measured) = 2.97 W/kg

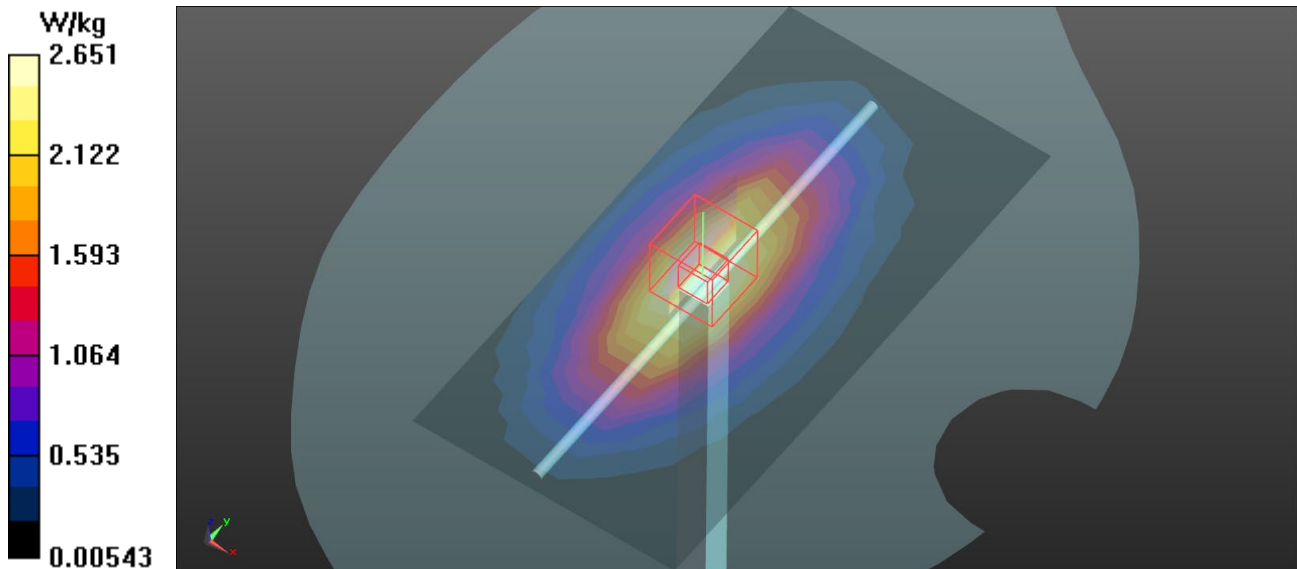

Test Laboratory: BTL Inc.

Date: 2025/1/13

System Check_H835_0113

DUT: Dipole 835 MHz D835V2;SN:4d160;


Communication System: UID 0, CW (0); Frequency: 835 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.906 \text{ S/m}$; $\epsilon_r = 40.917$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.4 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(9.32, 9.08, 9.73) @ 835 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x14x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 3.12 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 59.57 V/m ; Power Drift = -0.16 dB
Peak SAR (extrapolated) = 3.39 W/kg
SAR(1 g) = 2.36 W/kg ; SAR(10 g) = 1.55 W/kg
Maximum value of SAR (measured) = 3.08 W/kg

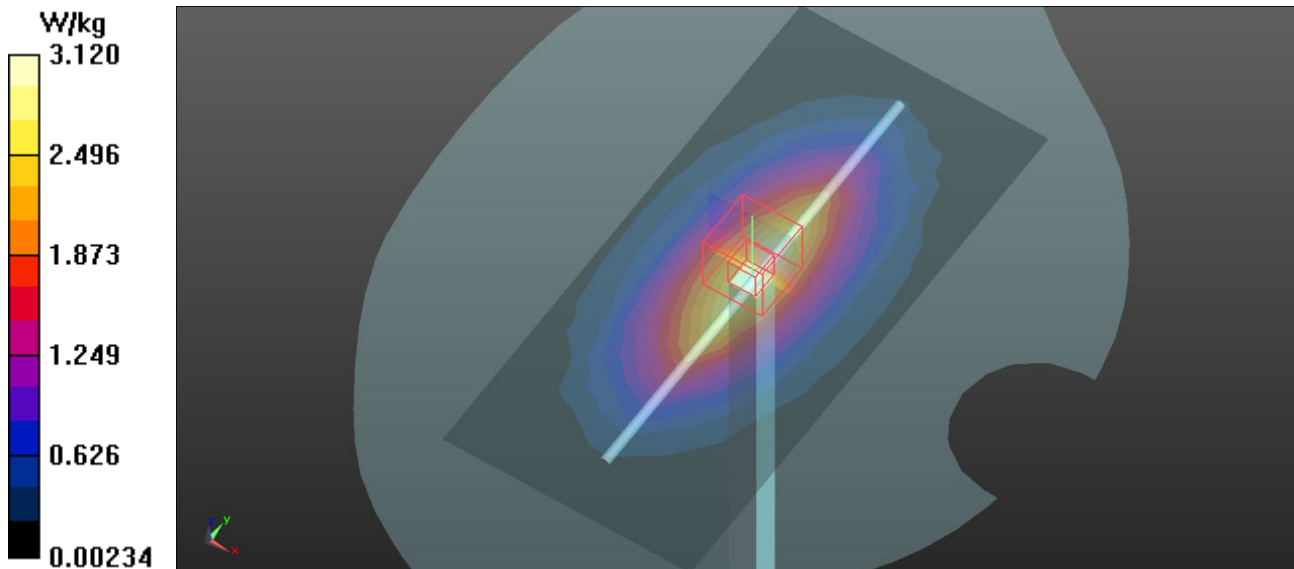

Test Laboratory: BTL Inc.

Date: 2025/1/2

System Check_H1750_0102

DUT: Dipole 1750 MHz D1750V2;SN:1101;

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 39.585$; $\rho = 1000$ kg/m³

Ambient Temperature : 23 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(8.19, 7.93, 7.97) @ 1750 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 3mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 10.8 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 77.12 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 15.6 W/kg

SAR(1 g) = 8.72 W/kg; SAR(10 g) = 4.65 W/kg

Maximum value of SAR (measured) = 10.9 W/kg

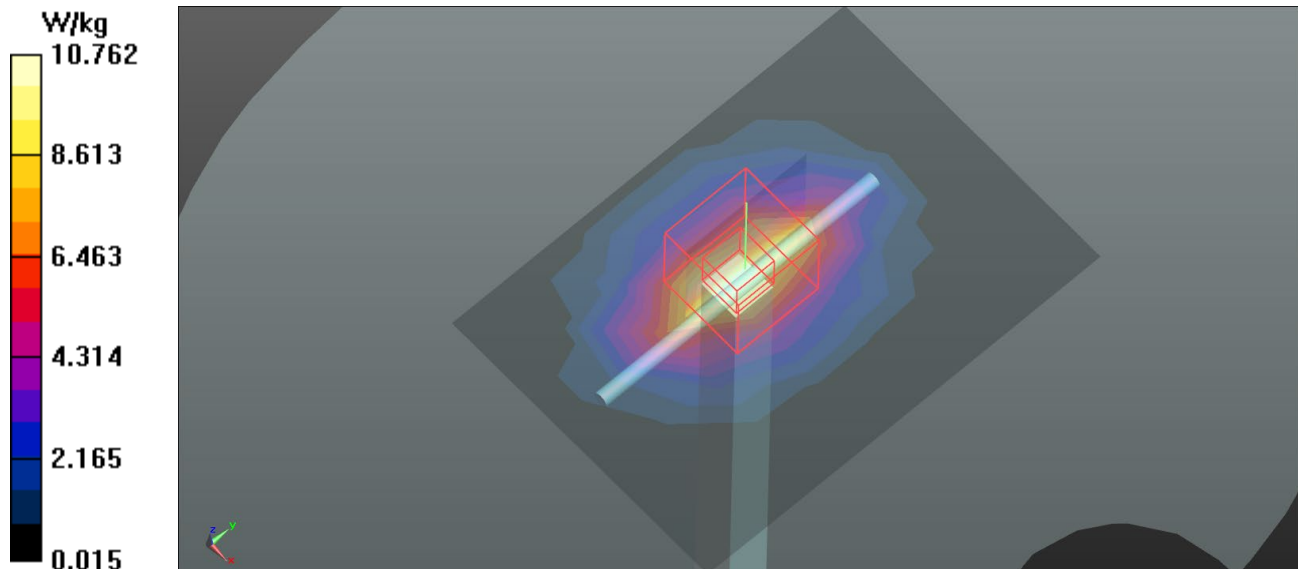

Test Laboratory: BTL Inc.

Date: 2025/1/6

System Check_H1750_0106

DUT: Dipole 1750 MHz D1750V2;SN:1101;


Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 1750$ MHz; $\sigma = 1.41$ S/m; $\epsilon_r = 40.992$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.9 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(8.19, 7.93, 7.97) @ 1750 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm
Maximum value of SAR (measured) = 11.3 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 76.72 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 16.3 W/kg
SAR(1 g) = 9.08 W/kg; SAR(10 g) = 4.83 W/kg
Maximum value of SAR (measured) = 11.4 W/kg

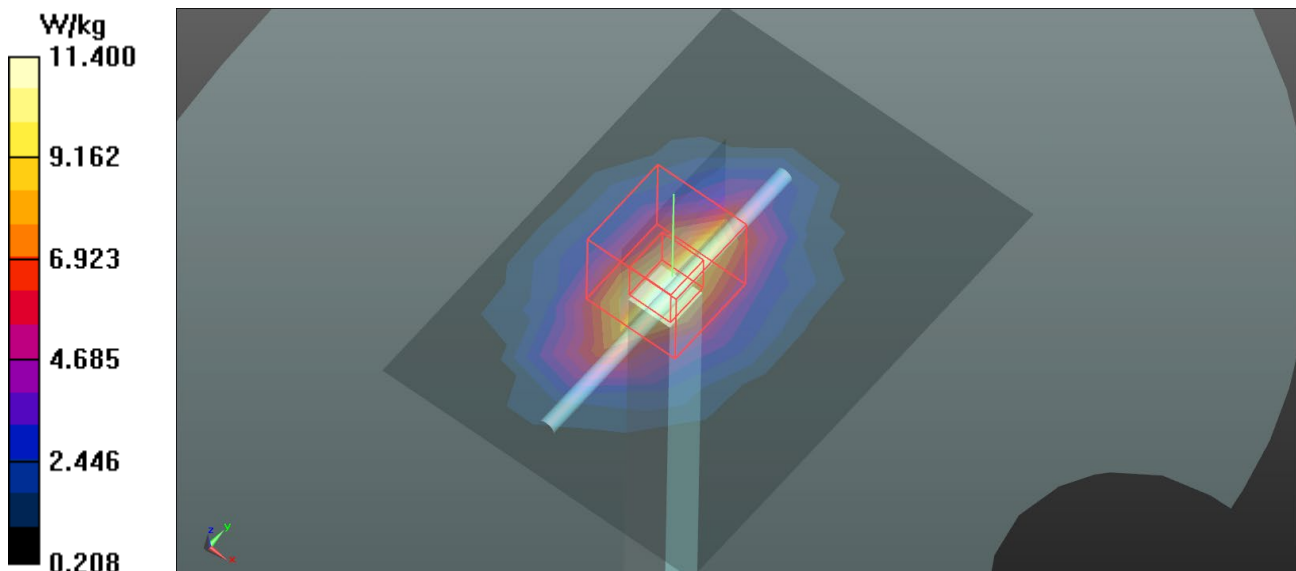

Test Laboratory: BTL Inc.

Date: 2025/1/15

System Check_H1750_0115

DUT: Dipole 1750 MHz D1750V2;SN:1101;

Communication System: UID 0, CW (0); Frequency: 1750 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1750$ MHz; $\sigma = 1.349$ S/m; $\epsilon_r = 39.422$; $\rho = 1000$ kg/m³

Ambient Temperature : 23°C; Liquid Temperature : 22.6°C

DASY Configuration:

- Probe: EX3DV4 - SN7351; ConvF(8.48, 8.48, 8.48) @ 1750 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4(Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x8x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 8.86 W/kg


Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 91.02 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 16.3 W/kg

SAR(1 g) = 8.85 W/kg; SAR(10 g) = 4.68 W/kg

Maximum value of SAR (measured) = 11.2 W/kg

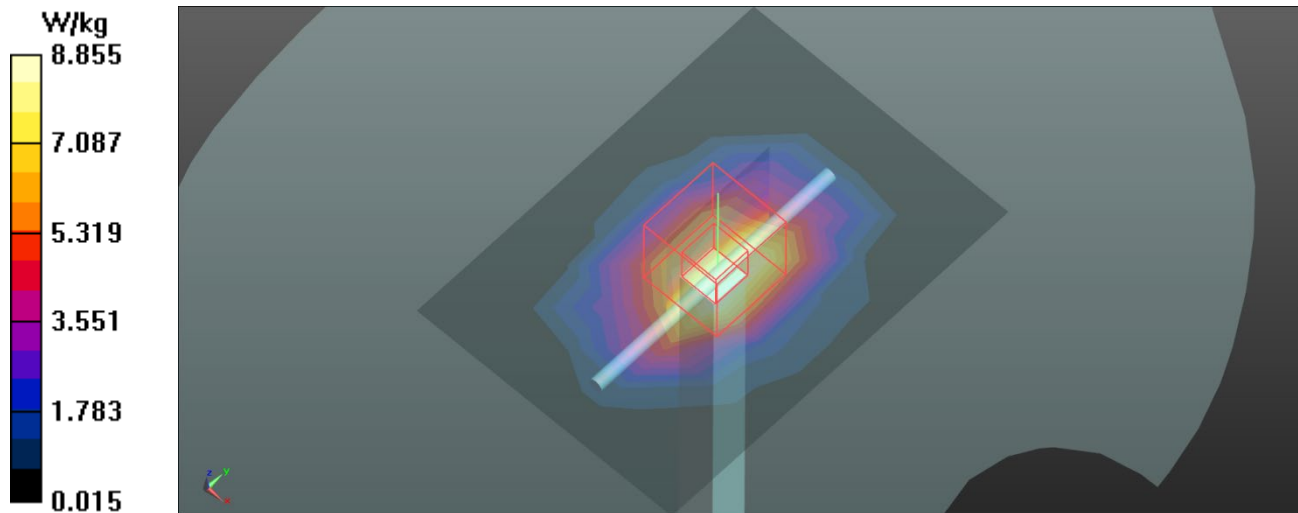

Test Laboratory: BTL Inc.

Date: 2025/1/4

System Check_H1900_0104

DUT: Dipole 1900 MHz D1900V2;SN:5d179;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.461 \text{ S/m}$; $\epsilon_r = 38.898$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(8.01, 7.77, 7.76) @ 1900 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x7x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 14.6 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 82.20 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 17.6 W/kg

SAR(1 g) = 9.46 W/kg; SAR(10 g) = 4.88 W/kg

Maximum value of SAR (measured) = 14.5 W/kg

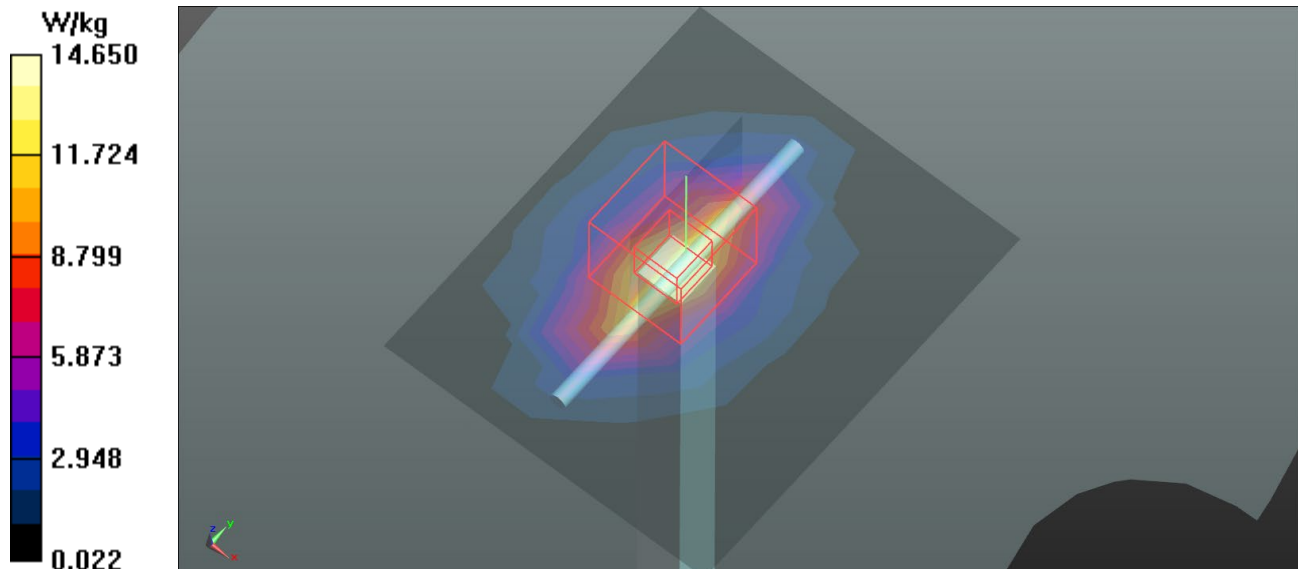

Test Laboratory: BTL Inc.

Date: 2025/1/5

System Check_H1900_0105

DUT: Dipole 1900 MHz D1900V2;SN:5d179;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.333$ S/m; $\epsilon_r = 41.485$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(8.01, 7.77, 7.76) @ 1900 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 9.50 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 108.9 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 16.9 W/kg

SAR(1 g) = 9.43 W/kg; SAR(10 g) = 4.96 W/kg

Maximum value of SAR (measured) = 14.3 W/kg

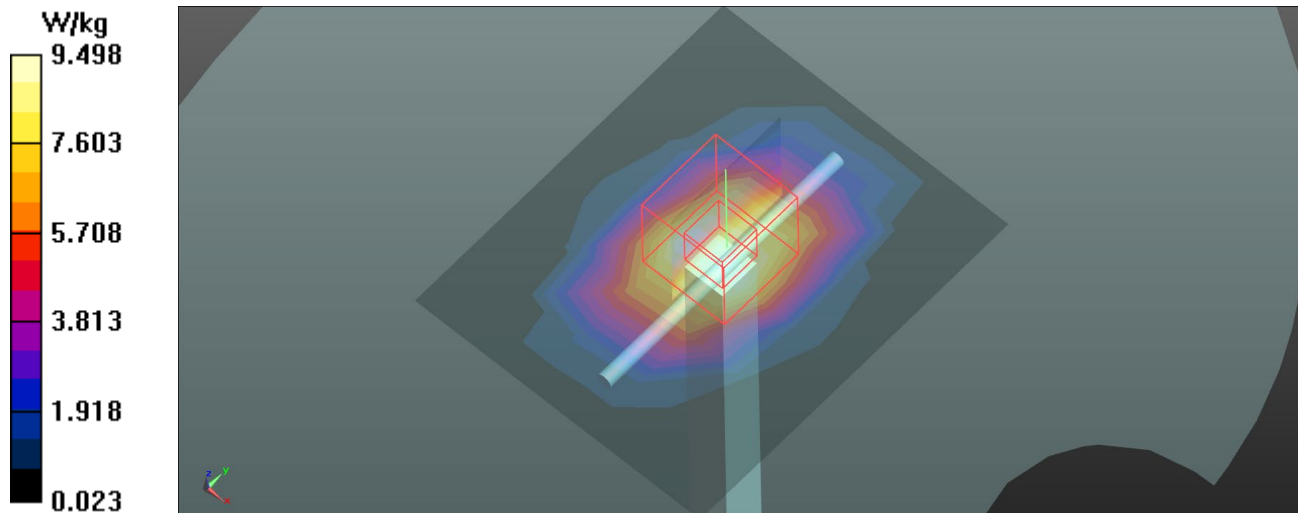

Test Laboratory: BTL Inc.

Date: 2025/1/14

System Check_H1900_0114

DUT: Dipole 1900 MHz D1900V2;SN:5d179;

Communication System: UID 0, CW (0); Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 1900$ MHz; $\sigma = 1.335$ S/m; $\epsilon_r = 40.252$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.9°C; Liquid Temperature : 22.6°C

DASY Configuration:

- Probe: EX3DV4 - SN7544; ConvF(8.01, 7.77, 7.76) @ 1900 MHz; Calibrated: 2024/4/3
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x7x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (measured) = 10.2 W/kg


Zoom Scan (5x5x4)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 109.3 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 17.4 W/kg

SAR(1 g) = 9.57 W/kg; SAR(10 g) = 4.98 W/kg

Maximum value of SAR (measured) = 14.7 W/kg

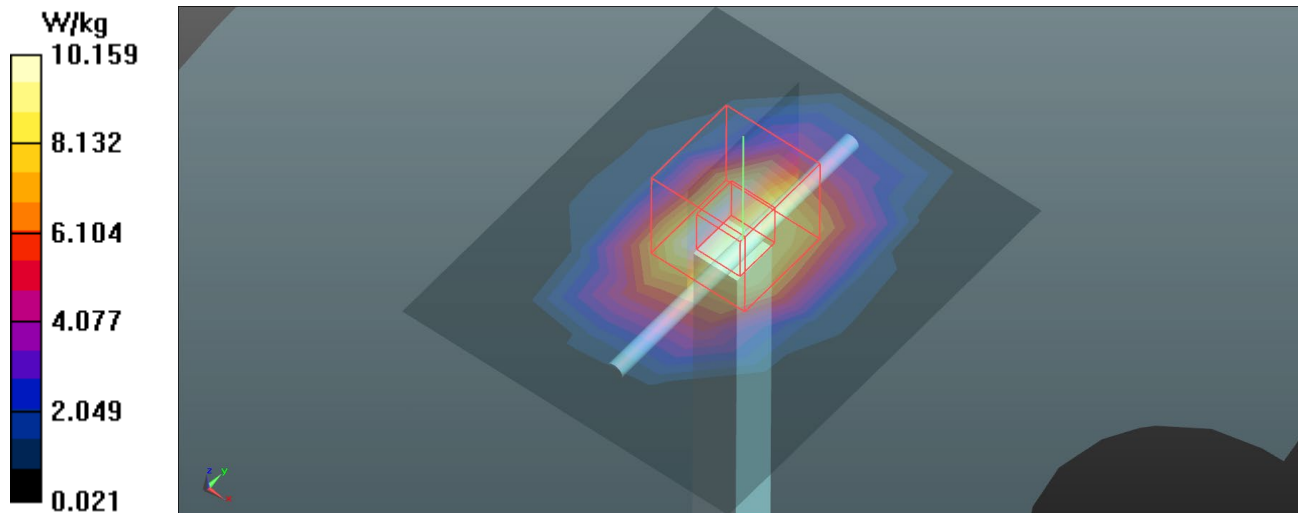

Test Laboratory: BTL Inc.

Date: 2025/1/6

System Check_H2300_0106

DUT: Dipole 2300 MHz D2300V2;SN:1033;

Communication System: UID 0, CW (0); Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.657$ S/m; $\epsilon_r = 40.491$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.8 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.42, 7.23, 7.74) @ 2300 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x7x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 15.0 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 118.3 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 22.9 W/kg

SAR(1 g) = 12.3 W/kg; SAR(10 g) = 5.97 W/kg

Maximum value of SAR (measured) = 19.2 W/kg

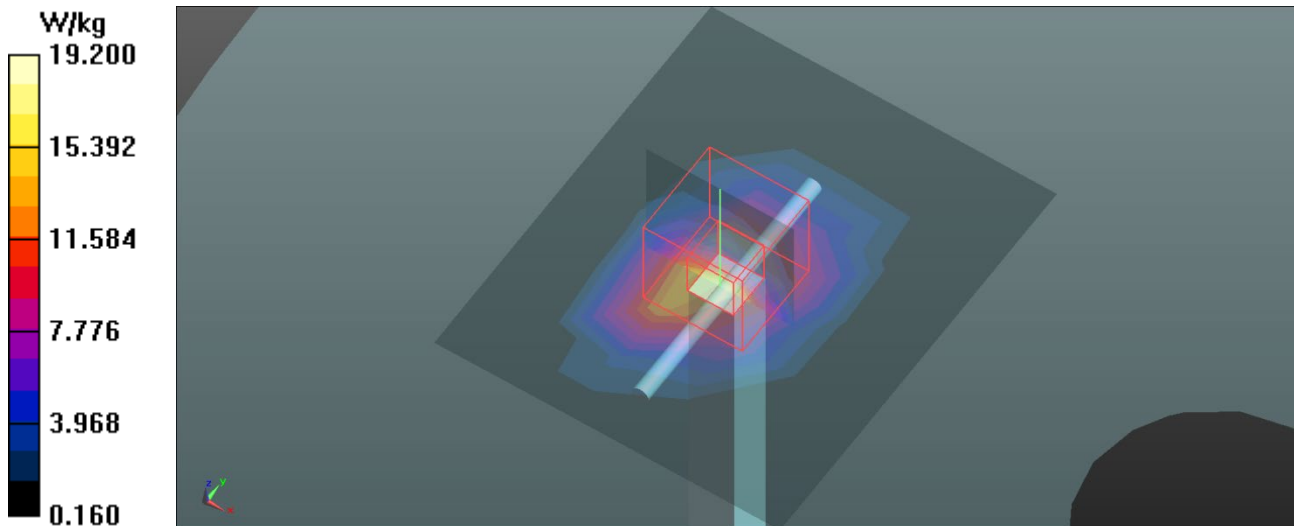

Test Laboratory: BTL Inc.

Date: 2025/1/7

System Check_H2300_0107

DUT: Dipole 2300 MHz D2300V2;SN:1033;


Communication System: UID 0, CW (0); Frequency: 2300 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2300$ MHz; $\sigma = 1.667$ S/m; $\epsilon_r = 40.45$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.9 °C; Liquid Temperature : 22.6 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.42, 7.23, 7.74) @ 2300 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x7x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 18.1 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 107.8 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 23.3 W/kg
SAR(1 g) = 12.4 W/kg; SAR(10 g) = 5.97 W/kg
Maximum value of SAR (measured) = 19.6 W/kg

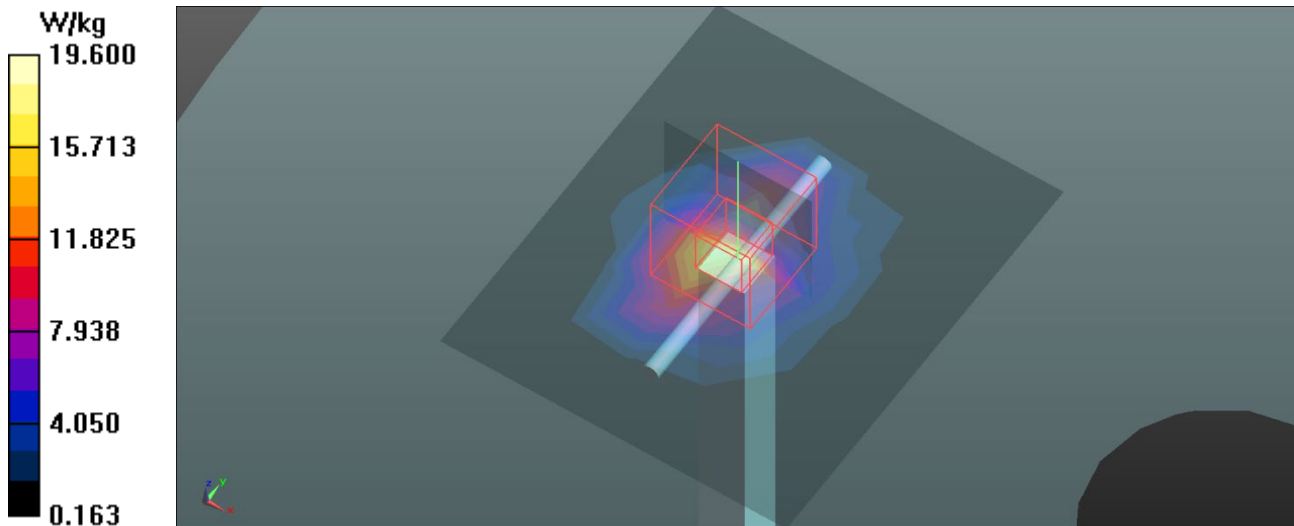

Test Laboratory: BTL Inc.

Date: 2025/1/16

System Check_H2300_0116

DUT: Dipole 2300 MHz D2300V2;SN:1033;

Communication System: UID 0, CW (0); Frequency: 2300 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2300$ MHz; $\sigma = 1.703$ S/m; $\epsilon_r = 38.877$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.42, 7.23, 7.74) @ 2300 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 14.7 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 115.6 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 22.6 W/kg

SAR(1 g) = 12.1 W/kg; SAR(10 g) = 5.86 W/kg

Maximum value of SAR (measured) = 18.9 W/kg

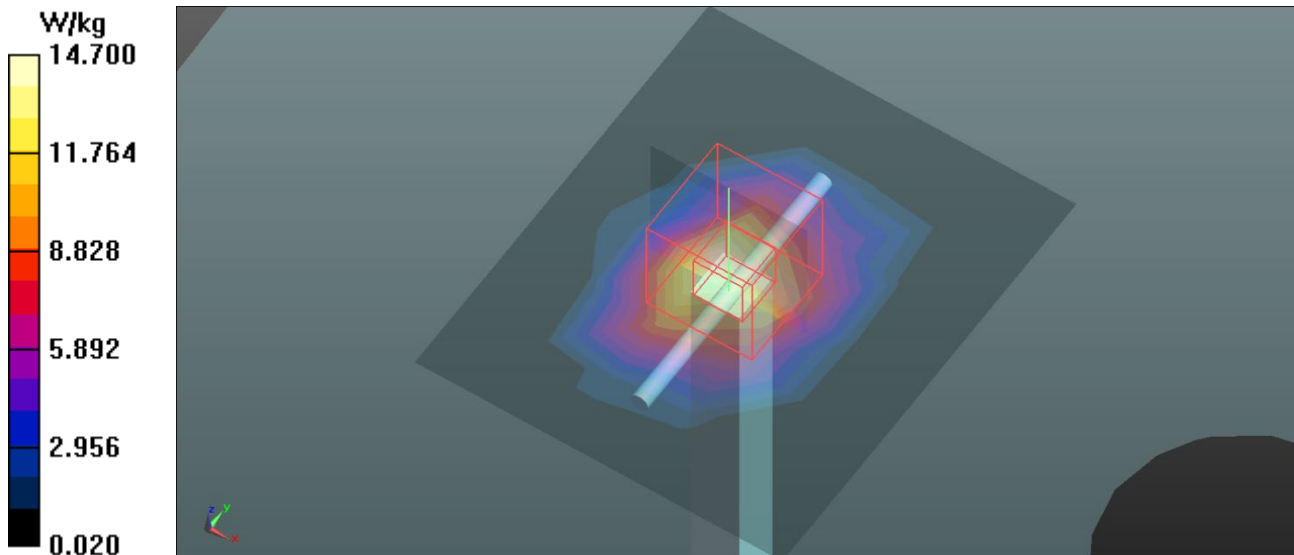

Test Laboratory: BTL Inc.

Date: 2025/1/9

System Check_H2450_0109

DUT: Dipole 2450 MHz D2450V2;SN:919;

Communication System: UID 0, CW (0); Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2450$ MHz; $\sigma = 1.881$ S/m; $\epsilon_r = 38.258$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 22.7 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.25, 7.07, 7.57) @ 2450 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x7x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 16.3 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 118.7 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 25.8 W/kg

SAR(1 g) = 13.2 W/kg; SAR(10 g) = 6.14 W/kg

Maximum value of SAR (measured) = 21.2 W/kg

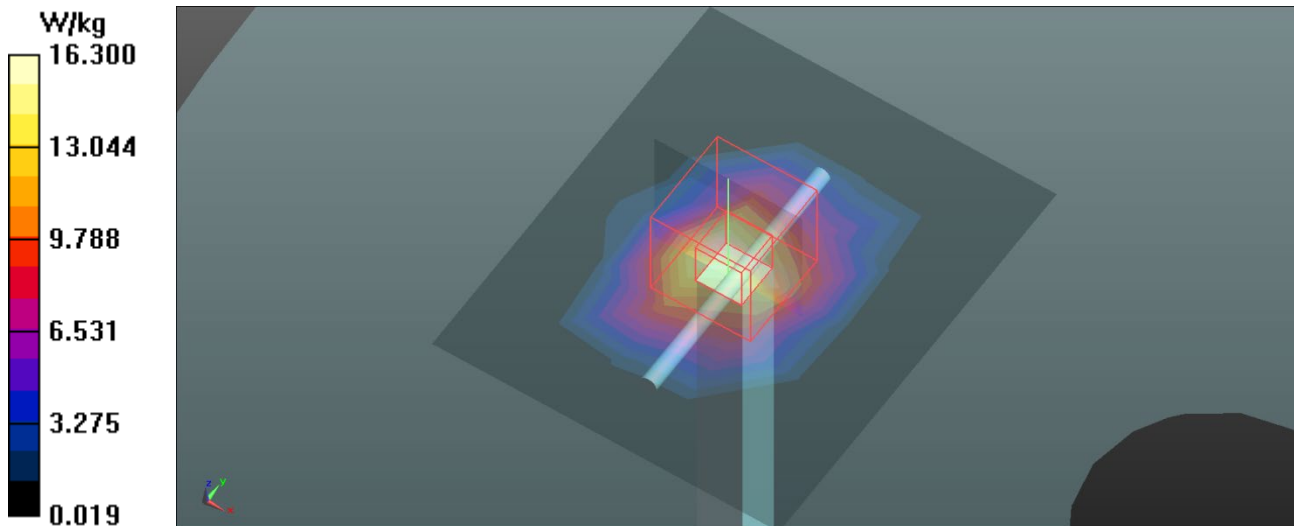

Test Laboratory: BTL Inc.

Date: 2025/1/5

System Check_H2600_0105

DUT: Dipole 2600 MHz D2600V2;SN:1067;


Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.959$ S/m; $\epsilon_r = 39.25$; $\rho = 1000$ kg/m³
Ambient Temperature : 22.3 °C; Liquid Temperature : 21.7 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.1, 6.92, 7.41) @ 2600 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x7x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 15.0 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 108.0 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 28.8 W/kg
SAR(1 g) = 14 W/kg; SAR(10 g) = 6.24 W/kg
Maximum value of SAR (measured) = 23.6 W/kg

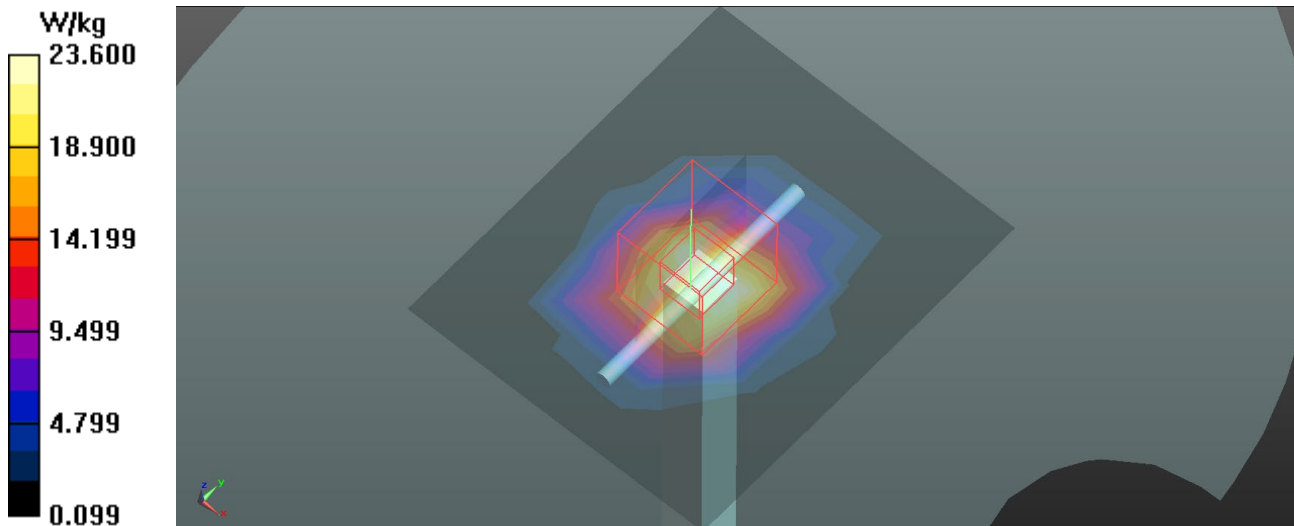

Test Laboratory: BTL Inc.

Date: 2025/1/6

System Check_H2600_0106

DUT: Dipole 2600 MHz D2600V2;SN:1067;


Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 2600$ MHz; $\sigma = 1.994$ S/m; $\epsilon_r = 39.42$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C; Liquid Temperature : 22.8 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.1, 6.92, 7.41) @ 2600 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x7x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (measured) = 15.3 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 108.0 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 29.3 W/kg
SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.34 W/kg
Maximum value of SAR (measured) = 24.0 W/kg

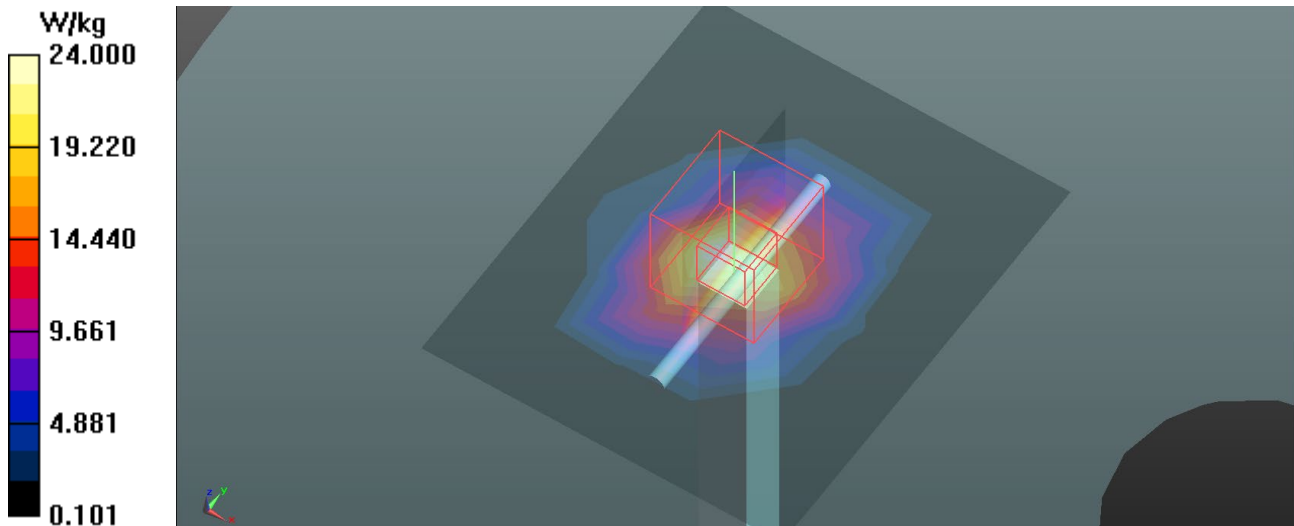

Test Laboratory: BTL Inc.

Date: 2025/1/8

System Check_H2600_0108

DUT: Dipole 2600 MHz D2600V2;SN:1067;

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.046$ S/m; $\epsilon_r = 37.741$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.2 °C; Liquid Temperature : 21.9 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.1, 6.92, 7.41) @ 2600 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x7x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 15.7 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 108.0 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 29.7 W/kg

SAR(1 g) = 14.4 W/kg; SAR(10 g) = 6.45 W/kg

Maximum value of SAR (measured) = 24.4 W/kg

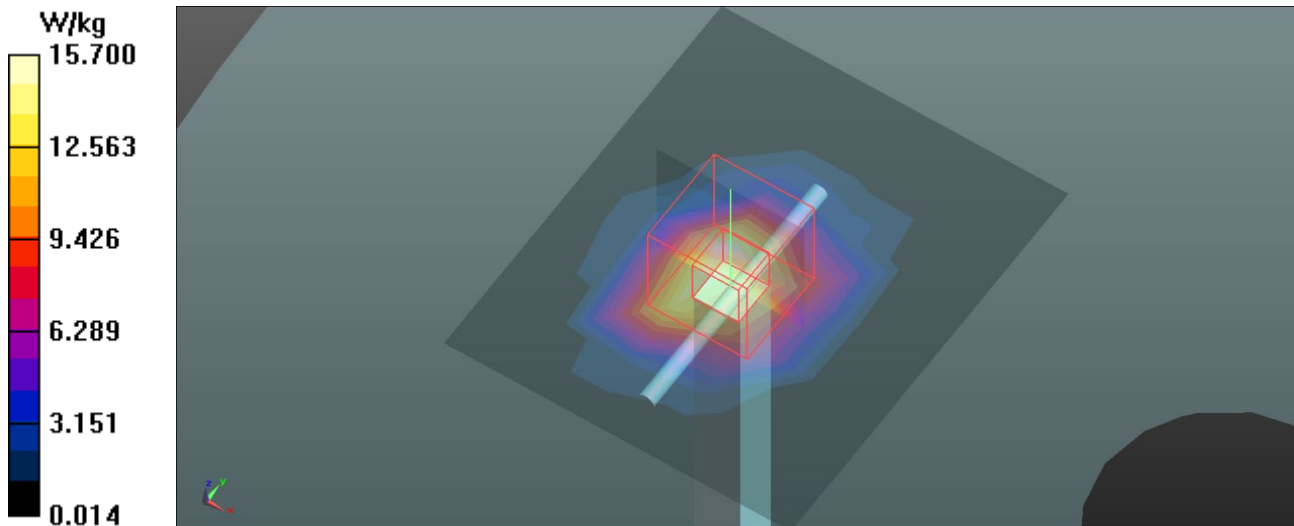

Test Laboratory: BTL Inc.

Date: 2025/1/15

System Check_H2600_0115

DUT: Dipole 2600 MHz D2600V2;SN:1067;

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 1.992$ S/m; $\epsilon_r = 37.885$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 22.3 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.1, 6.92, 7.41) @ 2600 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 16.8 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 112.6 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 28.5 W/kg

SAR(1 g) = 13.9 W/kg; SAR(10 g) = 6.25 W/kg

Maximum value of SAR (measured) = 23.2 W/kg

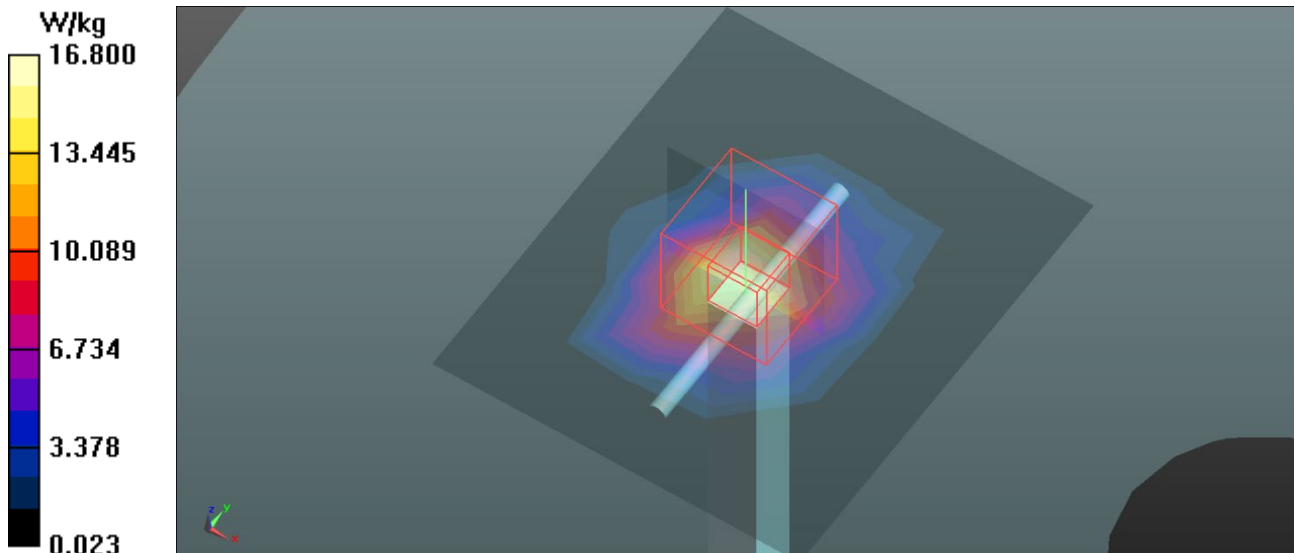

Test Laboratory: BTL Inc.

Date: 2025/1/16

System Check_H2600_0116

DUT: Dipole 2600 MHz D2600V2;SN:1067;

Communication System: UID 0, CW (0); Frequency: 2600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2600$ MHz; $\sigma = 2.039$ S/m; $\epsilon_r = 37.739$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 22.2 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(7.1, 6.92, 7.41) @ 2600 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 31.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (8x9x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 17.2 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 112.1 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 29.1 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.36 W/kg

Maximum value of SAR (measured) = 23.8 W/kg

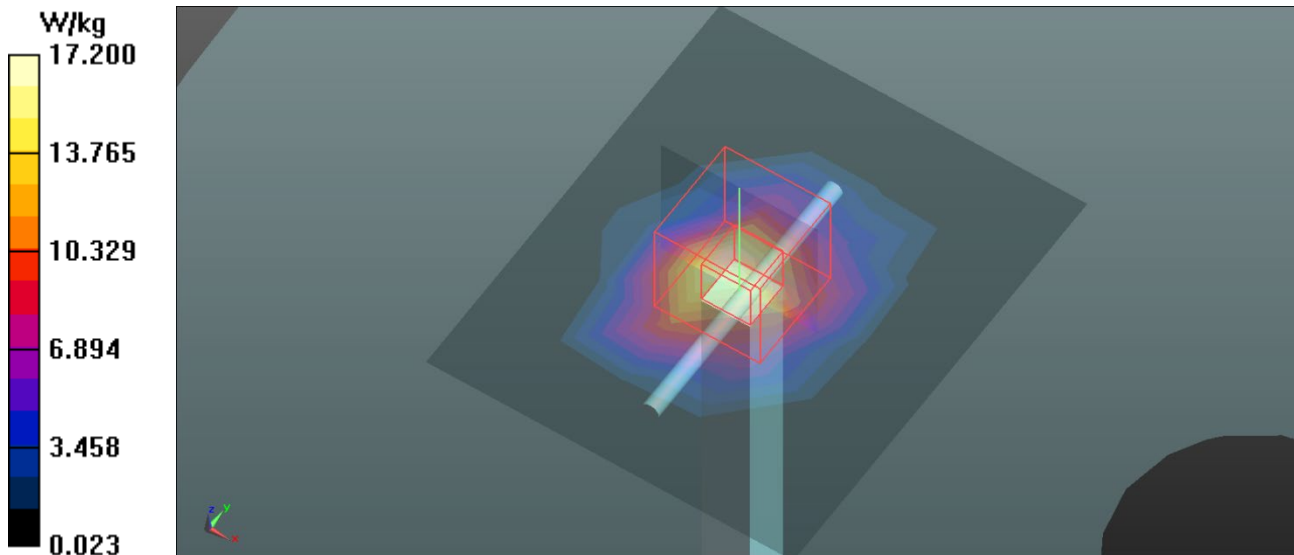

Test Laboratory: BTL Inc.

Date: 2025/1/4

System Check_H3500_0104

DUT: Dipole 3500 MHz D3500V2;SN:1095;

Communication System: UID 0, CW (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500$ MHz; $\sigma = 2.954$ S/m; $\epsilon_r = 38.916$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.5 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(6.84, 6.66, 7.14) @ 3500 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (5x6x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 10.7 W/kg


Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 65.27 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 17.0 W/kg

SAR(1 g) = 6.35 W/kg; SAR(10 g) = 2.38 W/kg

Maximum value of SAR (measured) = 12.6 W/kg

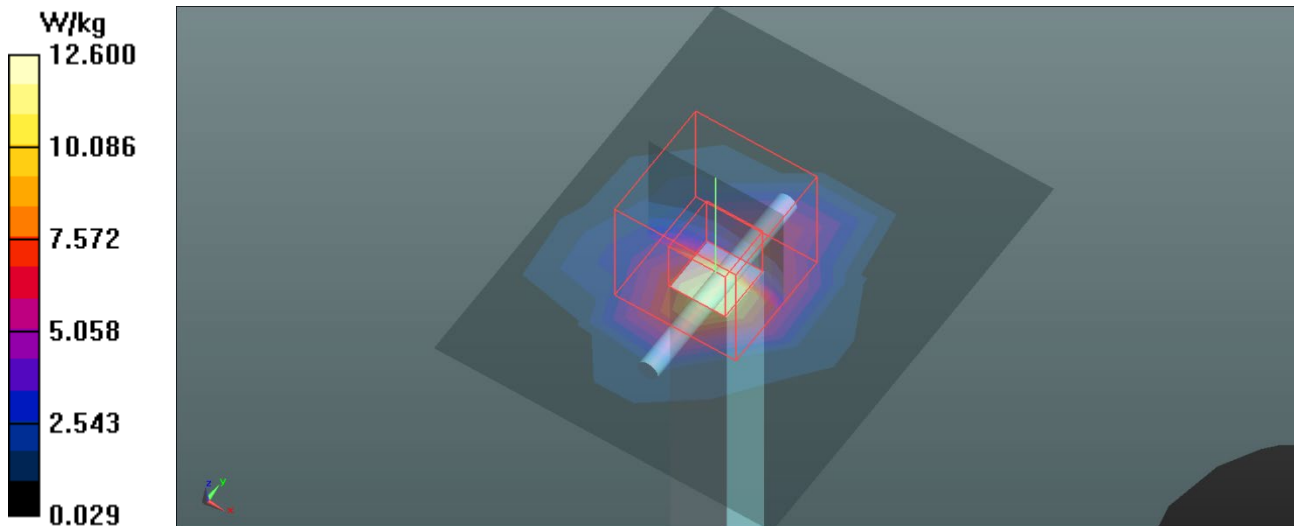

Test Laboratory: BTL Inc.

Date: 2025/1/22

System Check_H3500_0122

DUT: Dipole 3500 MHz D3500V2;SN:1095;

Communication System: UID 0, CW (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3500 \text{ MHz}$; $\sigma = 2.854 \text{ S/m}$; $\epsilon_r = 38.908$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.8 \text{ }^\circ\text{C}$; Liquid Temperature : $22.6 \text{ }^\circ\text{C}$

DASY Configuration:


- Probe: EX3DV4 - SN7693; ConvF(6.84, 6.66, 7.14) @ 3500 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn420; Calibrated: 2024/3/19
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x8x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 9.65 W/kg
Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 68.37 V/m ; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 17.0 W/kg
SAR(1 g) = 6.43 W/kg ; SAR(10 g) = 2.42 W/kg

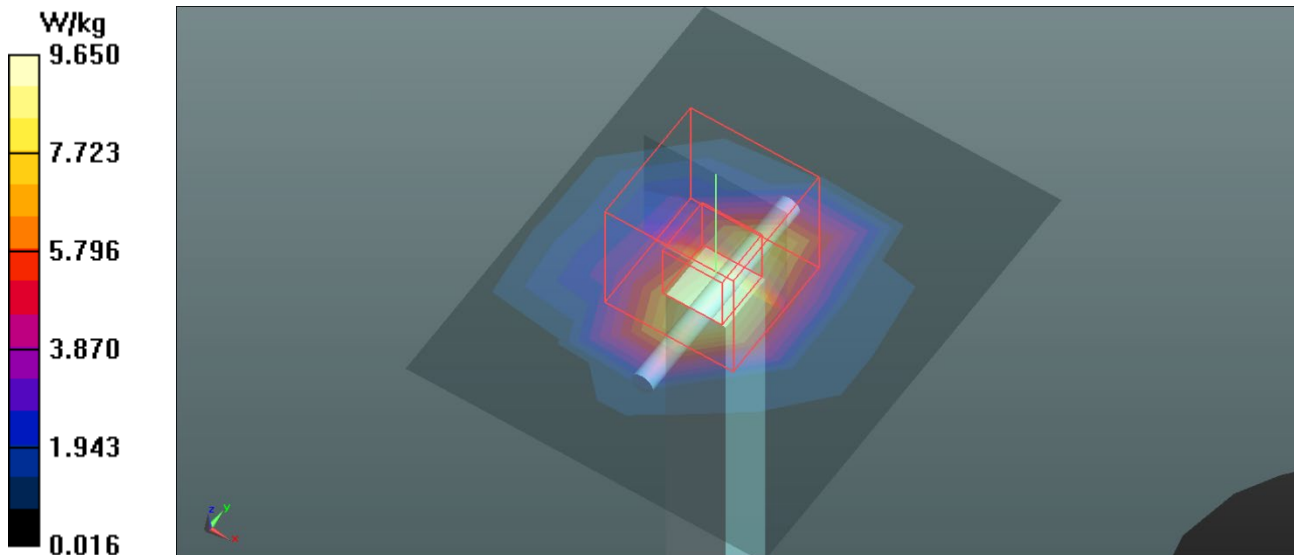Maximum value of SAR (measured) = 12.7 W/kg


Test Laboratory: BTL Inc.

Date: 2025/1/3

System Check_H3700_0103

DUT: Dipole 3700 MHz D3700V2;SN:1064;

Communication System: UID 0, CW (0); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.121$ S/m; $\epsilon_r = 38.346$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C; Liquid Temperature : 22.9 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(6.79, 6.62, 7.09) @ 3700 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn1390; Calibrated: 2024/11/14
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (5x5x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 13.1 W/kg


Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 68.78 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 19.3 W/kg

SAR(1 g) = 6.61 W/kg; SAR(10 g) = 2.37 W/kg

Maximum value of SAR (measured) = 13.6 W/kg

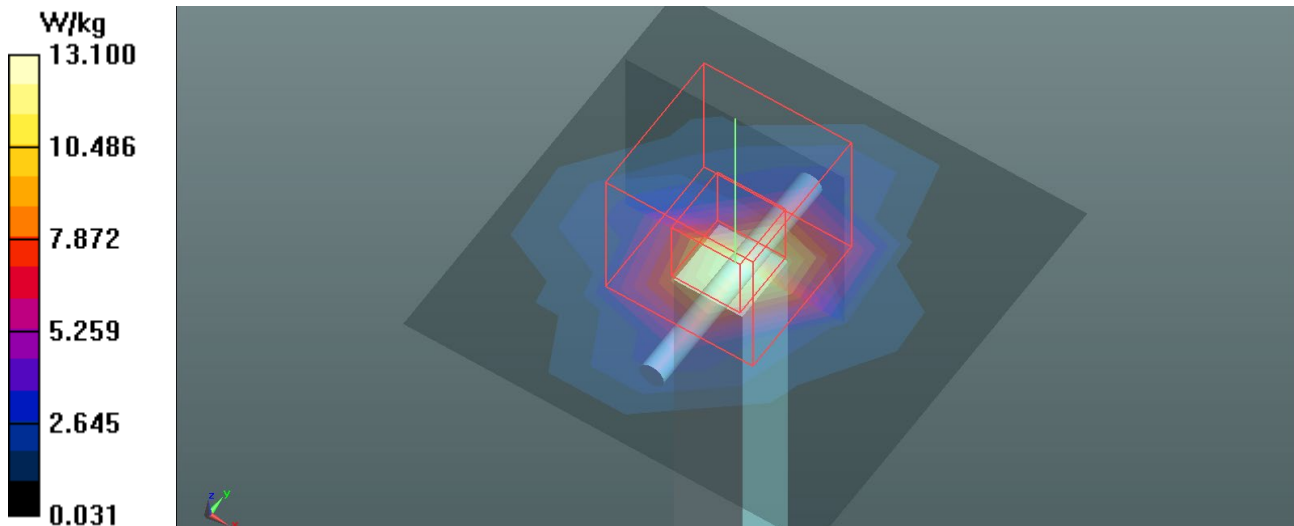

Test Laboratory: BTL Inc.

Date: 2025/1/18

System Check_H3700_0118

DUT: Dipole 3700 MHz D3700V2;SN:1064;

Communication System: UID 0, CW (0); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.176$ S/m; $\epsilon_r = 38.259$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.6 °C; Liquid Temperature : 22.4 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(6.79, 6.62, 7.09) @ 3700 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn420; Calibrated: 2024/3/19
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x7x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 13.5 W/kg


Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 68.86 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 19.7 W/kg

SAR(1 g) = 6.82 W/kg; SAR(10 g) = 2.45 W/kg

Maximum value of SAR (measured) = 13.9 W/kg

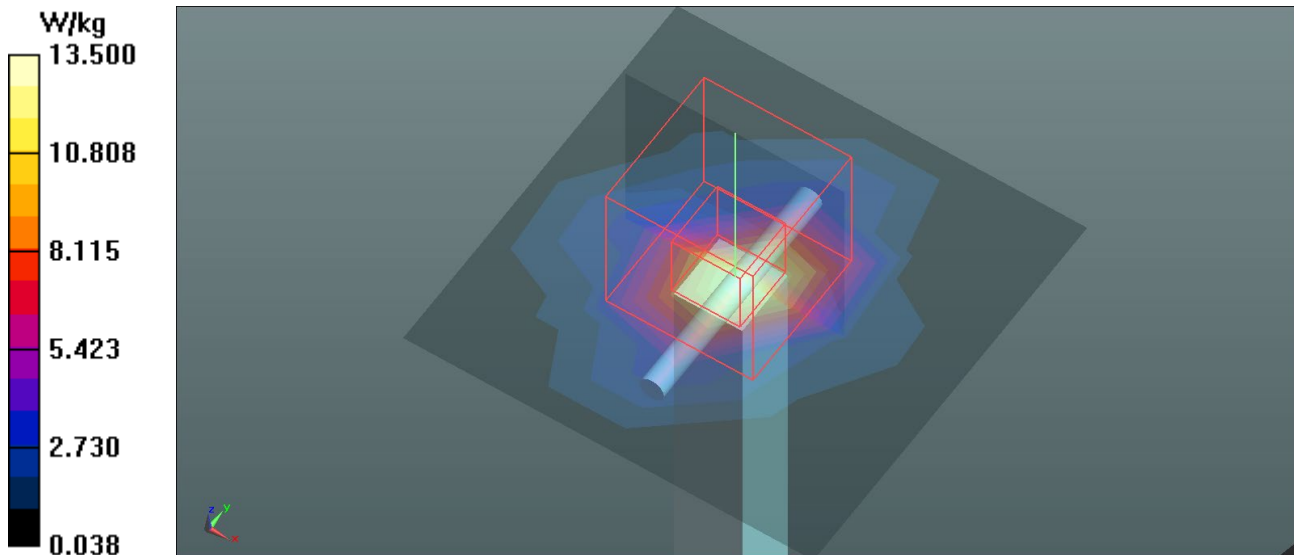

Test Laboratory: BTL Inc.

Date: 2025/1/22

System Check_H3700_0122

DUT: Dipole 3700 MHz D3700V2;SN:1064;

Communication System: UID 0, CW (0); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.084$ S/m; $\epsilon_r = 38.434$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.6 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(6.79, 6.62, 7.09) @ 3700 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn420; Calibrated: 2024/3/19
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x7x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 12.9 W/kg


Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 68.73 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 18.9 W/kg

SAR(1 g) = 6.53 W/kg; SAR(10 g) = 2.35 W/kg

Maximum value of SAR (measured) = 13.4 W/kg

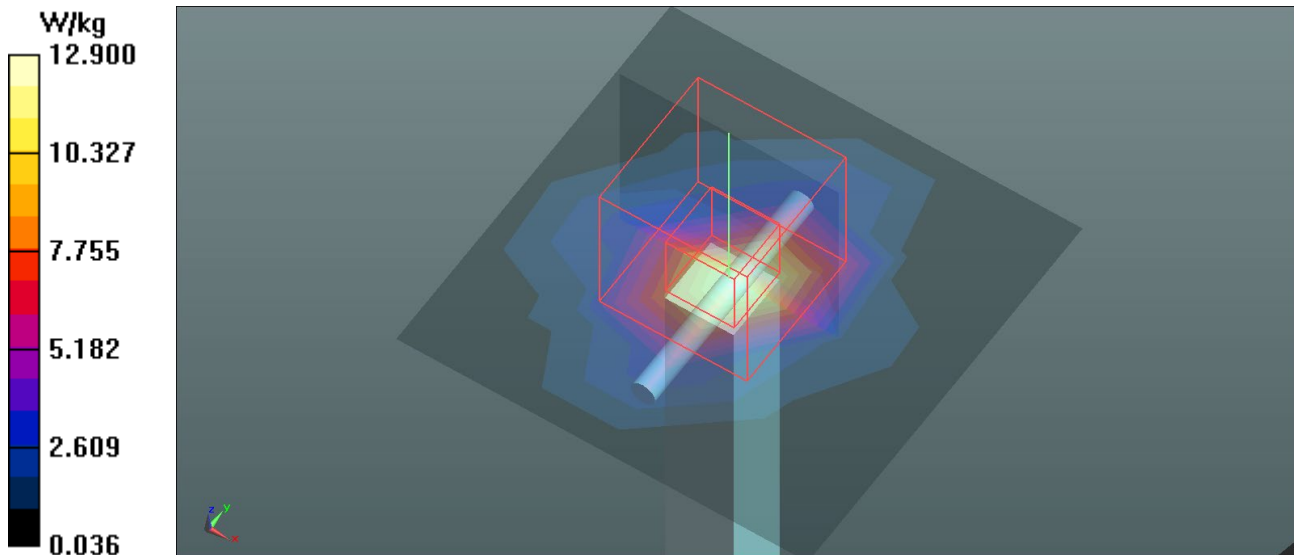

Test Laboratory: BTL Inc.

Date: 2025/1/23

System Check_H3700_0123

DUT: Dipole 3700 MHz D3700V2;SN:1064;

Communication System: UID 0, CW (0); Frequency: 3700 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3700$ MHz; $\sigma = 3.167$ S/m; $\epsilon_r = 38.269$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.7 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(6.79, 6.62, 7.09) @ 3700 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn420; Calibrated: 2024/3/19
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x7x1): Measurement grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (measured) = 11.2 W/kg


Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=3$ mm

Reference Value = 63.48 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 18.4 W/kg

SAR(1 g) = 6.91 W/kg; SAR(10 g) = 2.52 W/kg

Maximum value of SAR (measured) = 13.5 W/kg

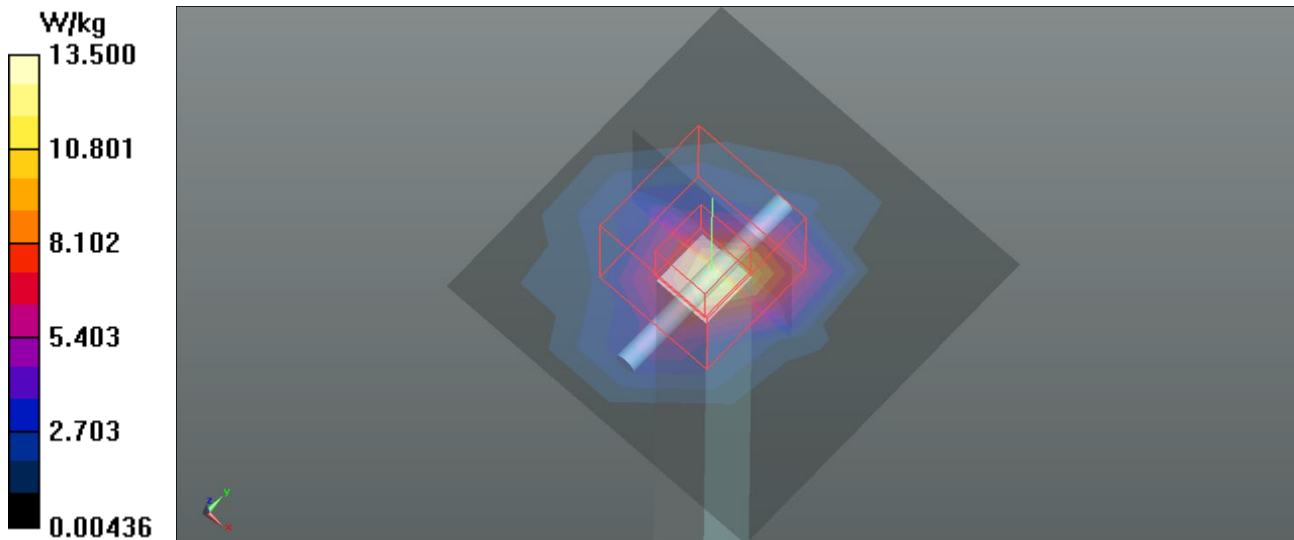

Test Laboratory: BTL Inc.

Date: 2025/1/22

System Check_H3900_0122

DUT: Dipole 3900 MHz D3900V2;SN:1039;

Communication System: UID 0, CW (0); Frequency: 3900 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 3900 \text{ MHz}$; $\sigma = 3.312 \text{ S/m}$; $\epsilon_r = 37.829$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 22.8 °C; Liquid Temperature : 22.6 °C

DASY Configuration:

- Probe: EX3DV4 - SN7693; ConvF(6.71, 6.54, 7.01) @ 3900 MHz; Calibrated: 2024/11/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 25.0$
- Electronics: DAE4 Sn420; Calibrated: 2024/3/19
- Phantom: SAM Right v5.0; Type: QD000P40CC; Serial: TP:1469
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (7x7x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (measured) = 12.9 W/kg


Zoom Scan (7x7x9)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=3\text{mm}$

Reference Value = 66.72 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 20.6 W/kg

SAR(1 g) = 6.65 W/kg; SAR(10 g) = 2.28 W/kg

Maximum value of SAR (measured) = 14.0 W/kg

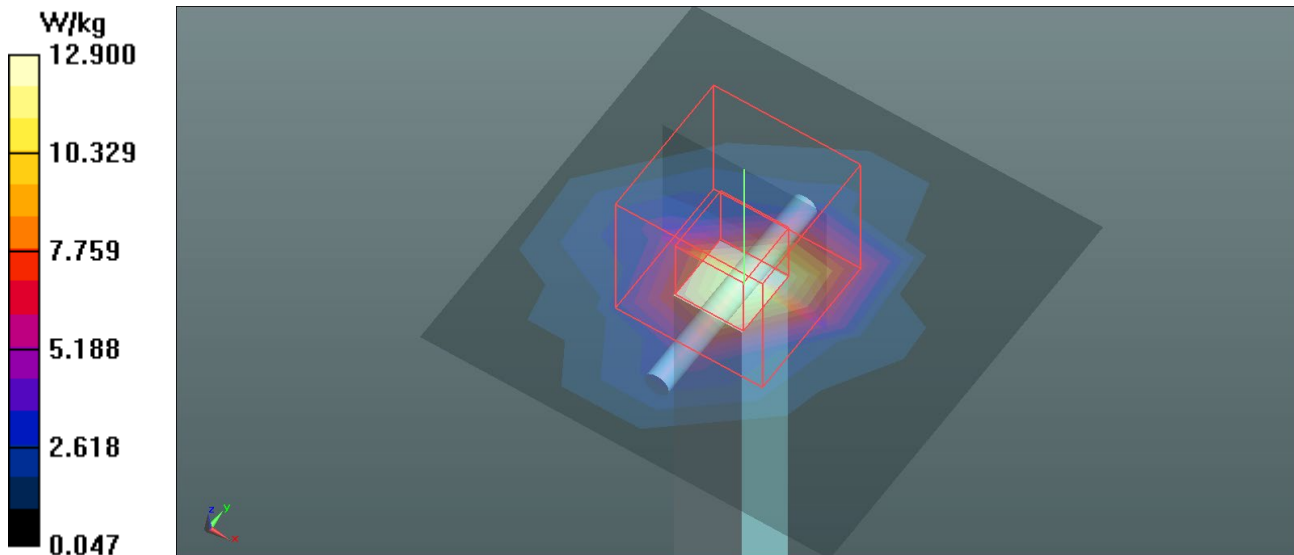

Test Laboratory: BTL Inc.

Date: 2025/1/12

System Check_H5250_0112

DUT: Dipole D5GHzV2;SN:1160;

Communication System: UID 0, CW (0); Frequency: 5250 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5250$ MHz; $\sigma = 4.634$ S/m; $\epsilon_r = 35.583$; $\rho = 1000$ kg/m³

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.9 °C

DASY Configuration:

- Probe: EX3DV4 - SN7351; ConvF(5.78, 5.78, 5.78) @ 5250 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x6x1): Measurement grid: $dx=10$ mm, $dy=10$ mm

Maximum value of SAR (measured) = 13.1 W/kg


Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4$ mm, $dy=4$ mm, $dz=2$ mm

Reference Value = 69.58 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 32.5 W/kg

SAR(1 g) = 7.66 W/kg; SAR(10 g) = 2.24 W/kg

Maximum value of SAR (measured) = 19.4 W/kg

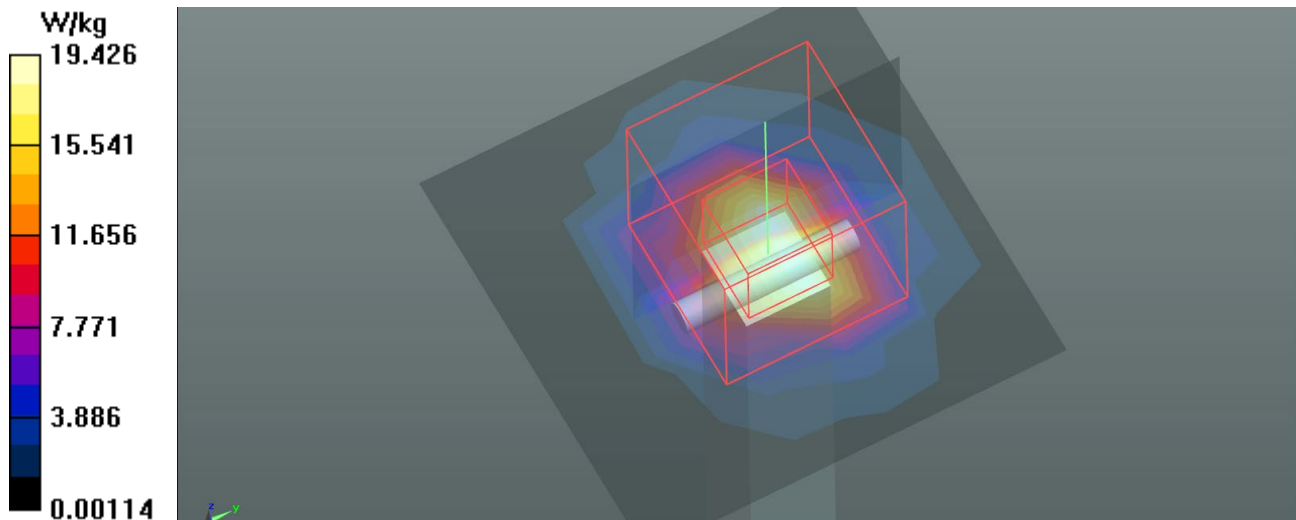

Test Laboratory: BTL Inc.

Date: 2025/1/13

System Check_H5600_0113

DUT: Dipole D5GHzV2;SN:1160;

Communication System: UID 0, CW (0); Frequency: 5600 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5600 \text{ MHz}$; $\sigma = 5.125 \text{ S/m}$; $\epsilon_r = 34.618$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $22.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:


- Probe: EX3DV4 - SN7351; ConvF(5.16, 5.16, 5.16) @ 5600 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x6x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$

Maximum value of SAR (measured) = 14.5 W/kg
Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$

Reference Value = 70.56 V/m ; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 38.5 W/kg
SAR(1 g) = 8.29 W/kg ; SAR(10 g) = 2.4 W/kg

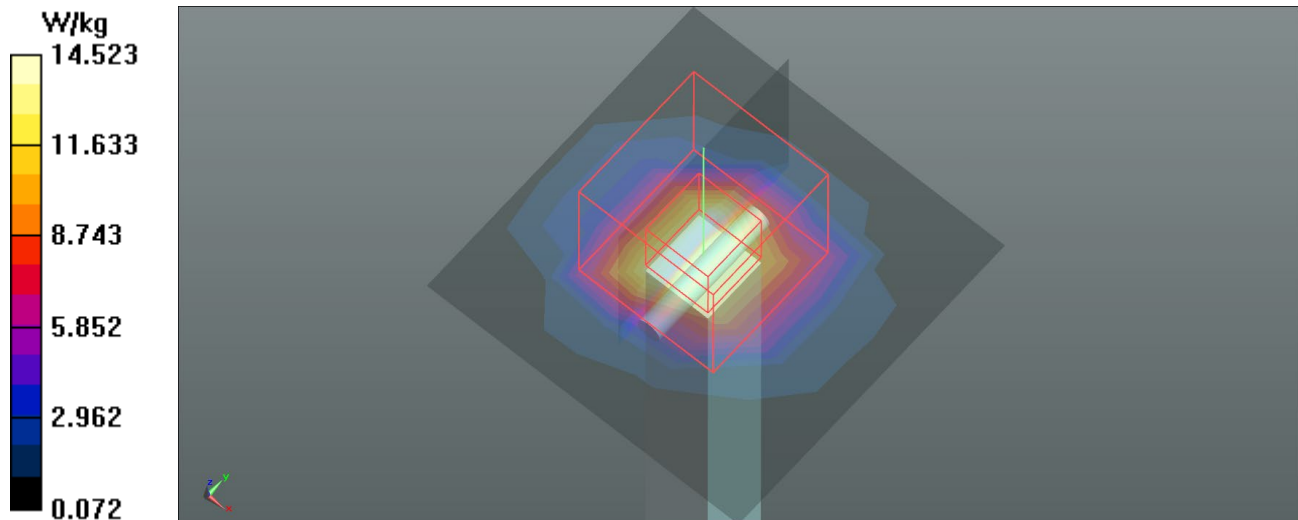Maximum value of SAR (measured) = 21.5 W/kg


Test Laboratory: BTL Inc.

Date: 2025/1/13

System Check_H5750_0113

DUT: Dipole D5GHzV2;SN:1160;

Communication System: UID 0, CW (0); Frequency: 5750 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 5750 \text{ MHz}$; $\sigma = 5.293 \text{ S/m}$; $\epsilon_r = 34.255$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $22.6 \text{ }^\circ\text{C}$; Liquid Temperature : $22.1 \text{ }^\circ\text{C}$

DASY Configuration:

- Probe: EX3DV4 - SN7351; ConvF(5.36, 5.36, 5.36) @ 5750 MHz; Calibrated: 2024/3/20
- Sensor-Surface: 1.4mm (Mechanical Surface Detection), $z = 1.0, 23.0$
- Electronics: DAE4 Sn1717; Calibrated: 2024/4/18
- Phantom: SAM Mid v5.0; Type: QD000P40CD; Serial: S/N:1896
- DASY52 52.10.2(1495); SEMCAD X 14.6.12(7450)

Area Scan (6x6x1): Measurement grid: $dx=10\text{mm}$, $dy=10\text{mm}$
Maximum value of SAR (measured) = 13.9 W/kg

Zoom Scan (7x7x12)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=2\text{mm}$
Reference Value = 67.19 V/m ; Power Drift = -0.03 dB
Peak SAR (extrapolated) = 36.6 W/kg
SAR(1 g) = 7.55 W/kg ; SAR(10 g) = 2.17 W/kg
Maximum value of SAR (measured) = 19.9 W/kg

