




NR n78 _40MHz		
Modulation	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
DFT-s-OFDM PI/2 BPSK	35.891	38.29
DFT-s-OFDM QPSK	35.974	38.31
DFT-s-OFDM 16QAM	36.034	38.23
DFT-s-OFDM 64QAM	35.991	38.40
DFT-s-OFDM 256QAM	35.986	38.80
CP-OFDM QPSK	38.079	40.18
CP-OFDM 16QAM	38.087	40.29
CP-OFDM 64QAM	38.083	40.12
CP-OFDM 256QAM	38.149	40.68

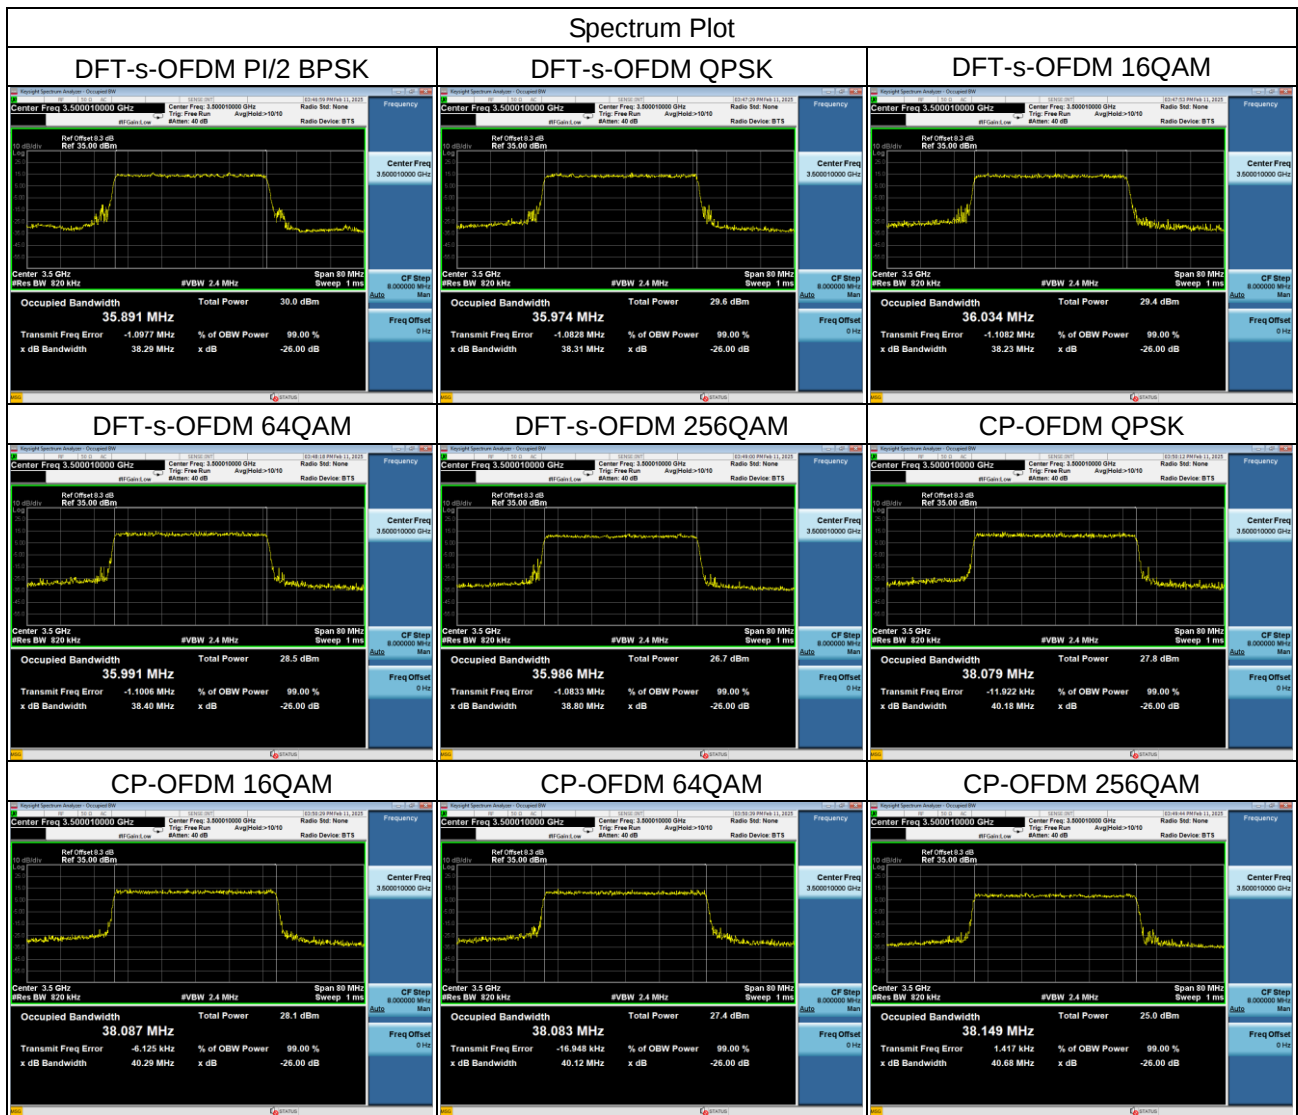


NR n78 _50MHz		
Modulation	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
DFT-s-OFDM PI/2 BPSK	46.141	48.61
DFT-s-OFDM QPSK	46.000	48.28
DFT-s-OFDM 16QAM	46.111	50.81
DFT-s-OFDM 64QAM	46.084	48.44
DFT-s-OFDM 256QAM	46.069	50.34
CP-OFDM QPSK	47.786	50.61
CP-OFDM 16QAM	47.843	50.87
CP-OFDM 64QAM	47.828	52.81
CP-OFDM 256QAM	47.877	50.17

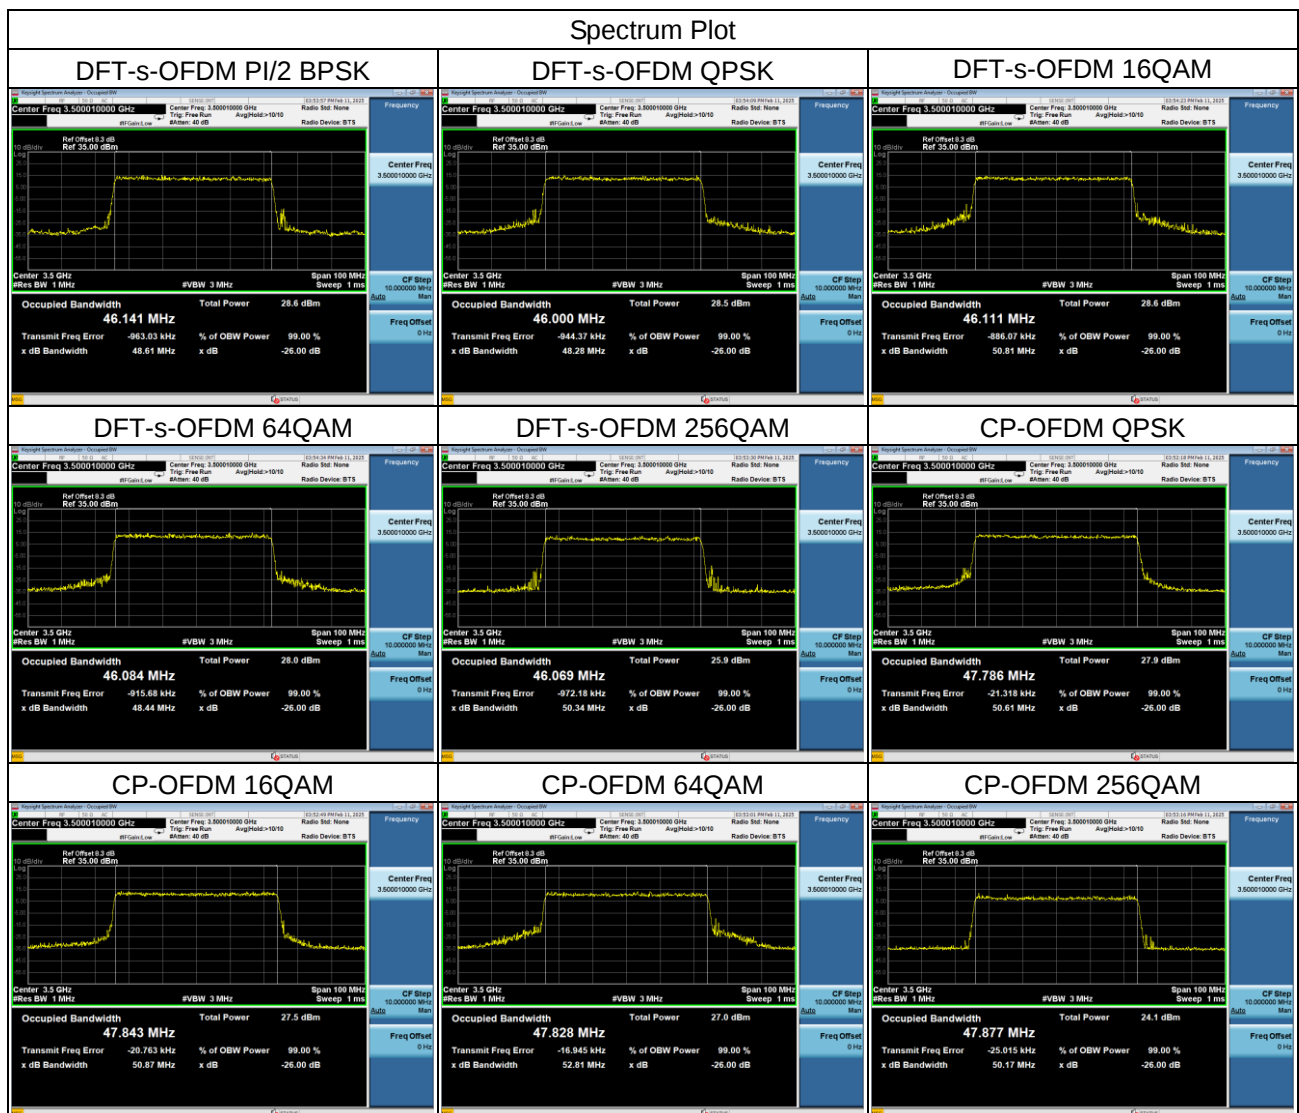


NR n78 _60MHz		
Modulation	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
DFT-s-OFDM PI/2 BPSK	58.258	62.47
DFT-s-OFDM QPSK	58.425	62.79
DFT-s-OFDM 16QAM	58.289	61.20
DFT-s-OFDM 64QAM	58.265	61.16
DFT-s-OFDM 256QAM	58.158	61.07
CP-OFDM QPSK	58.294	61.04
CP-OFDM 16QAM	58.286	61.50
CP-OFDM 64QAM	58.215	61.11
CP-OFDM 256QAM	58.141	61.92

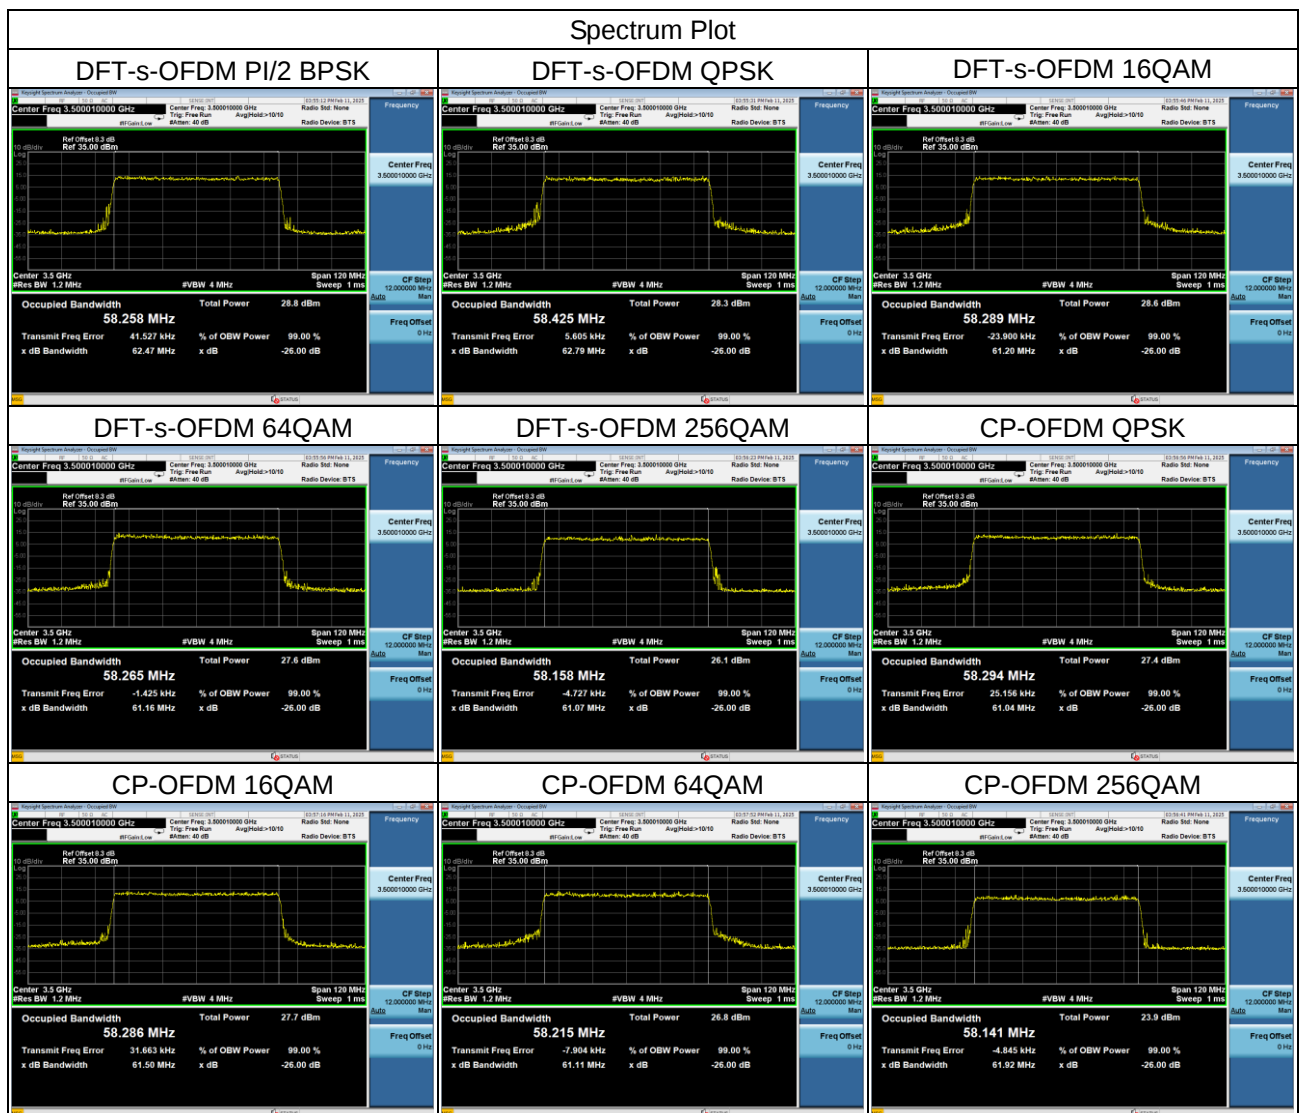


NR n78 _70MHz		
Modulation	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
DFT-s-OFDM PI/2 BPSK	64.821	68.29
DFT-s-OFDM QPSK	64.927	68.15
DFT-s-OFDM 16QAM	64.984	68.23
DFT-s-OFDM 64QAM	64.860	68.14
DFT-s-OFDM 256QAM	64.740	68.10
CP-OFDM QPSK	68.044	71.87
CP-OFDM 16QAM	68.149	71.47
CP-OFDM 64QAM	67.972	71.41
CP-OFDM 256QAM	67.876	71.34

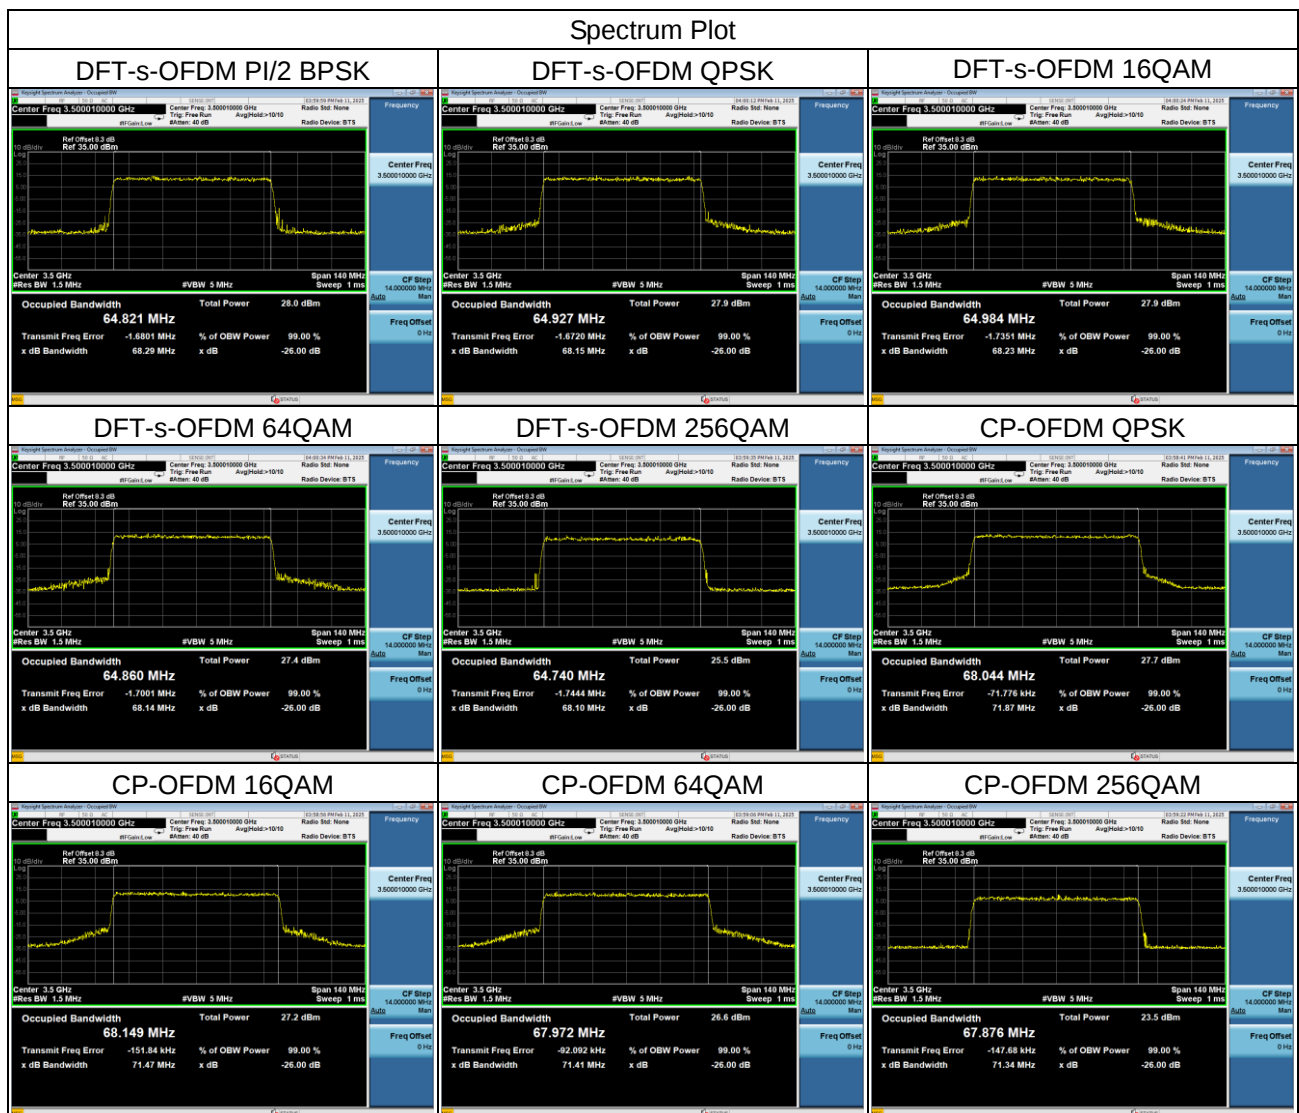


NR n78_80MHz		
Modulation	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
DFT-s-OFDM PI/2 BPSK	77.596	81.36
DFT-s-OFDM QPSK	77.590	81.26
DFT-s-OFDM 16QAM	77.786	81.35
DFT-s-OFDM 64QAM	77.645	81.27
DFT-s-OFDM 256QAM	77.619	81.32
CP-OFDM QPSK	77.922	81.71
CP-OFDM 16QAM	77.967	81.68
CP-OFDM 64QAM	77.879	81.72
CP-OFDM 256QAM	77.955	81.69

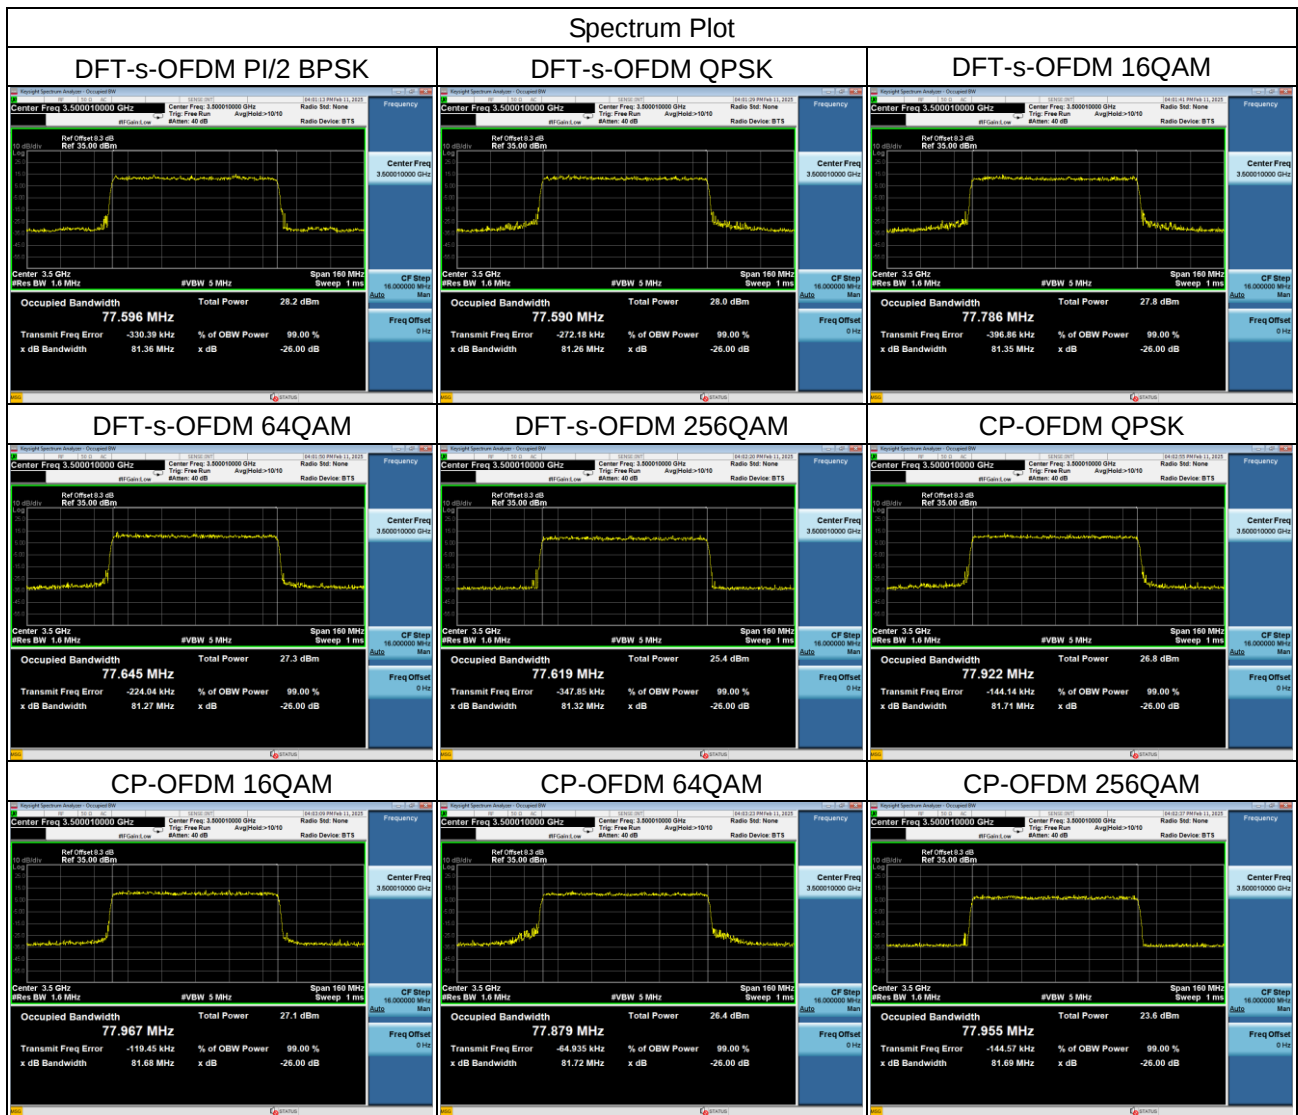


NR n78 _90MHz		
Modulation	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
DFT-s-OFDM PI/2 BPSK	87.446	91.60
DFT-s-OFDM QPSK	87.236	91.56
DFT-s-OFDM 16QAM	87.309	92.01
DFT-s-OFDM 64QAM	87.377	91.54
DFT-s-OFDM 256QAM	87.080	91.54
CP-OFDM QPSK	88.069	92.28
CP-OFDM 16QAM	88.026	92.31
CP-OFDM 64QAM	88.069	92.34
CP-OFDM 256QAM	88.344	92.24

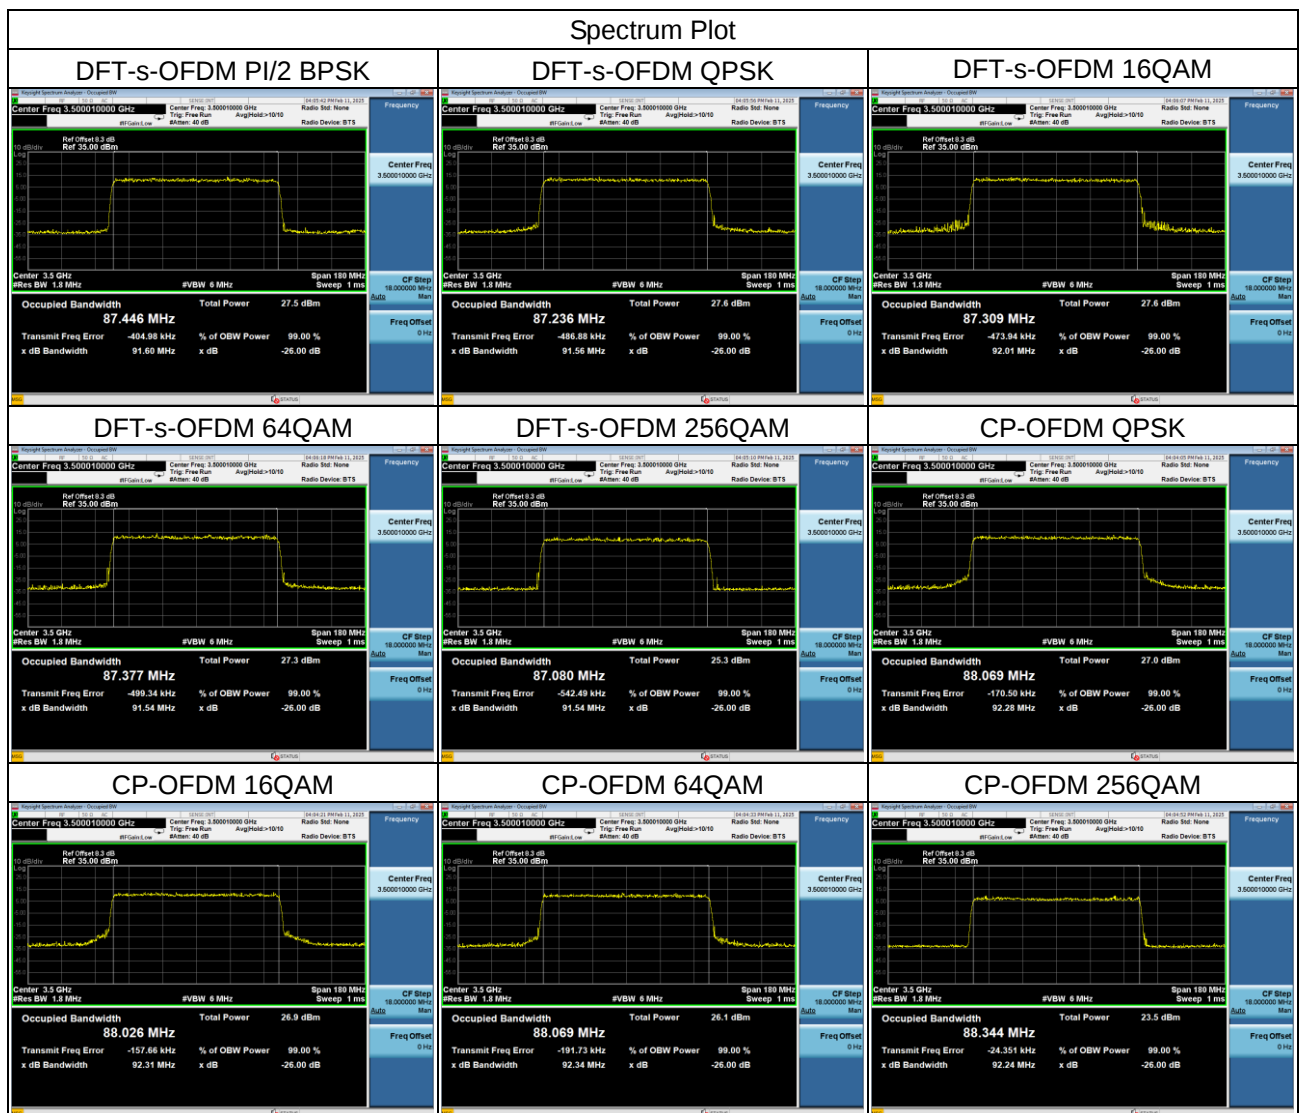



NR n78_100MHz		
Modulation	99% Occupied Bandwidth (MHz)	26dB Bandwidth (MHz)
DFT-s-OFDM PI/2 BPSK	97.783	104.1
DFT-s-OFDM QPSK	97.463	103.9
DFT-s-OFDM 16QAM	97.971	104.1
DFT-s-OFDM 64QAM	97.613	104.4
DFT-s-OFDM 256QAM	97.726	104.0
CP-OFDM QPSK	98.468	104.6
CP-OFDM 16QAM	98.785	104.8
CP-OFDM 64QAM	98.708	104.9
CP-OFDM 256QAM	98.972	105.0

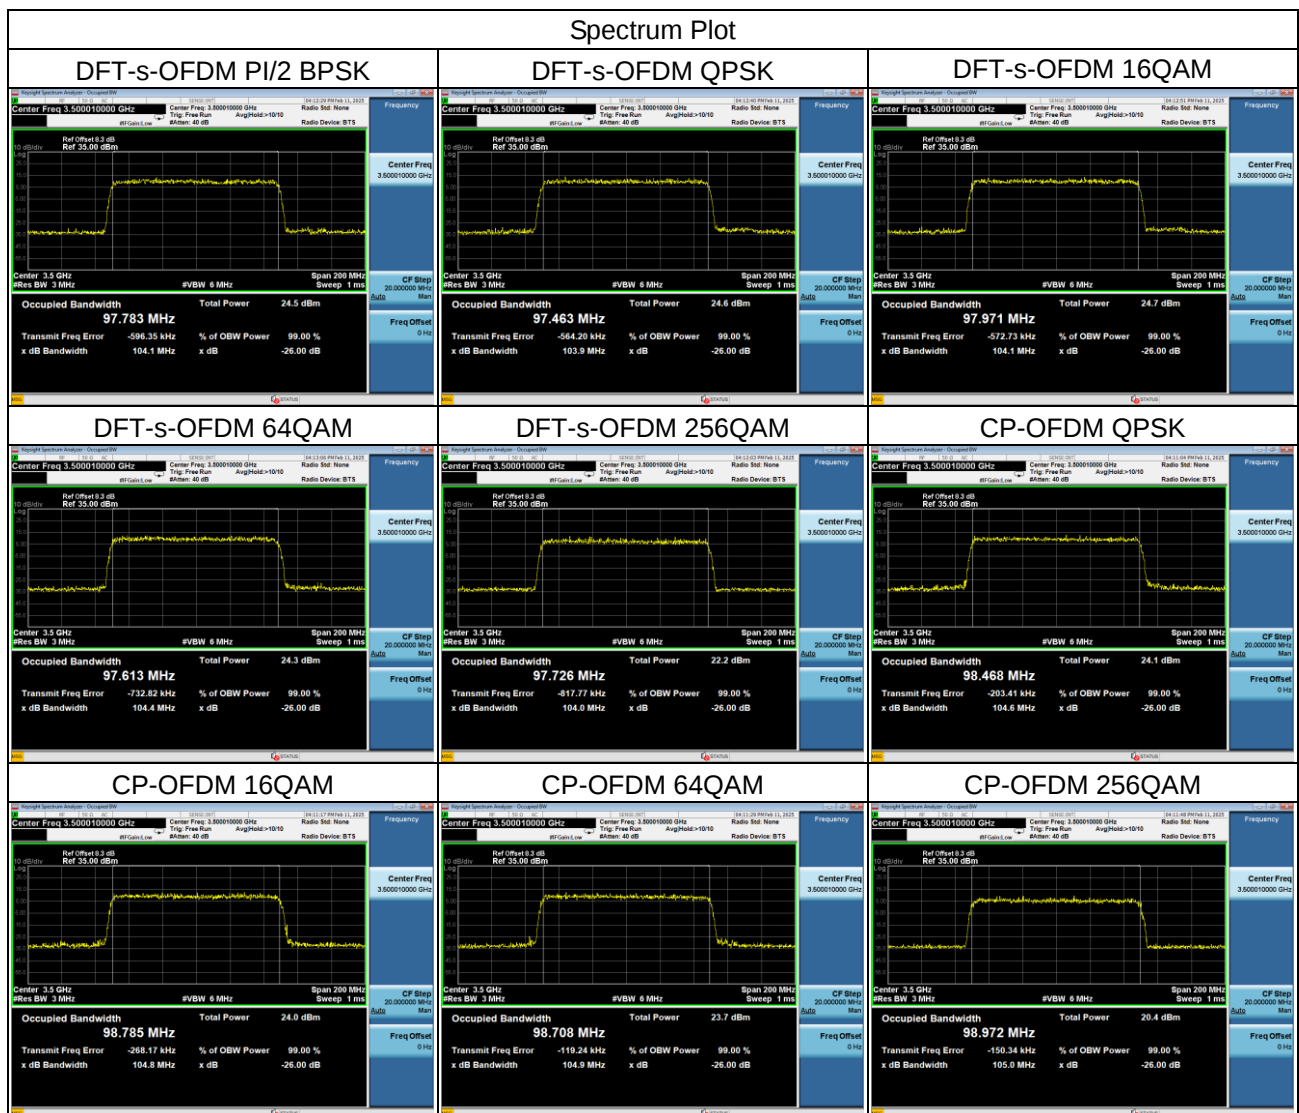

APPENDIX C - CONDUCTED SPURIOUS EMISSIONS

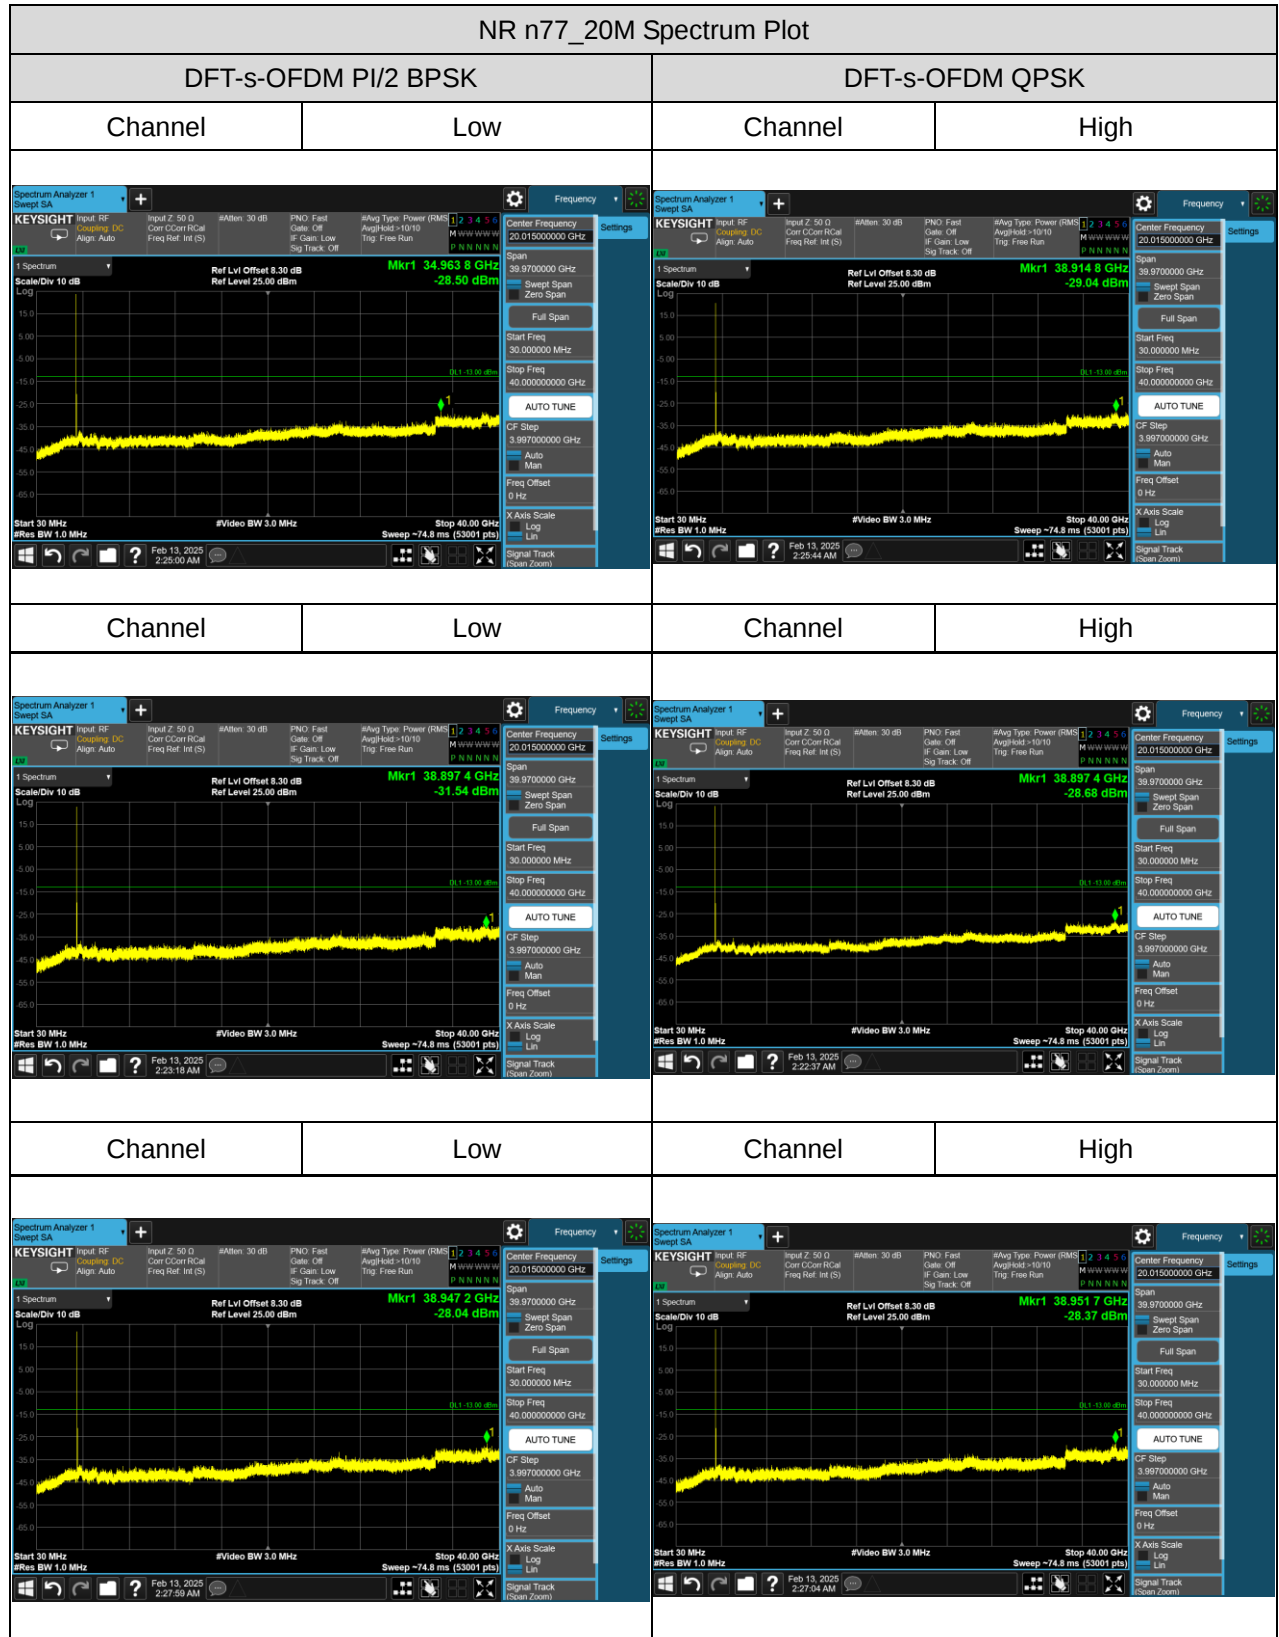

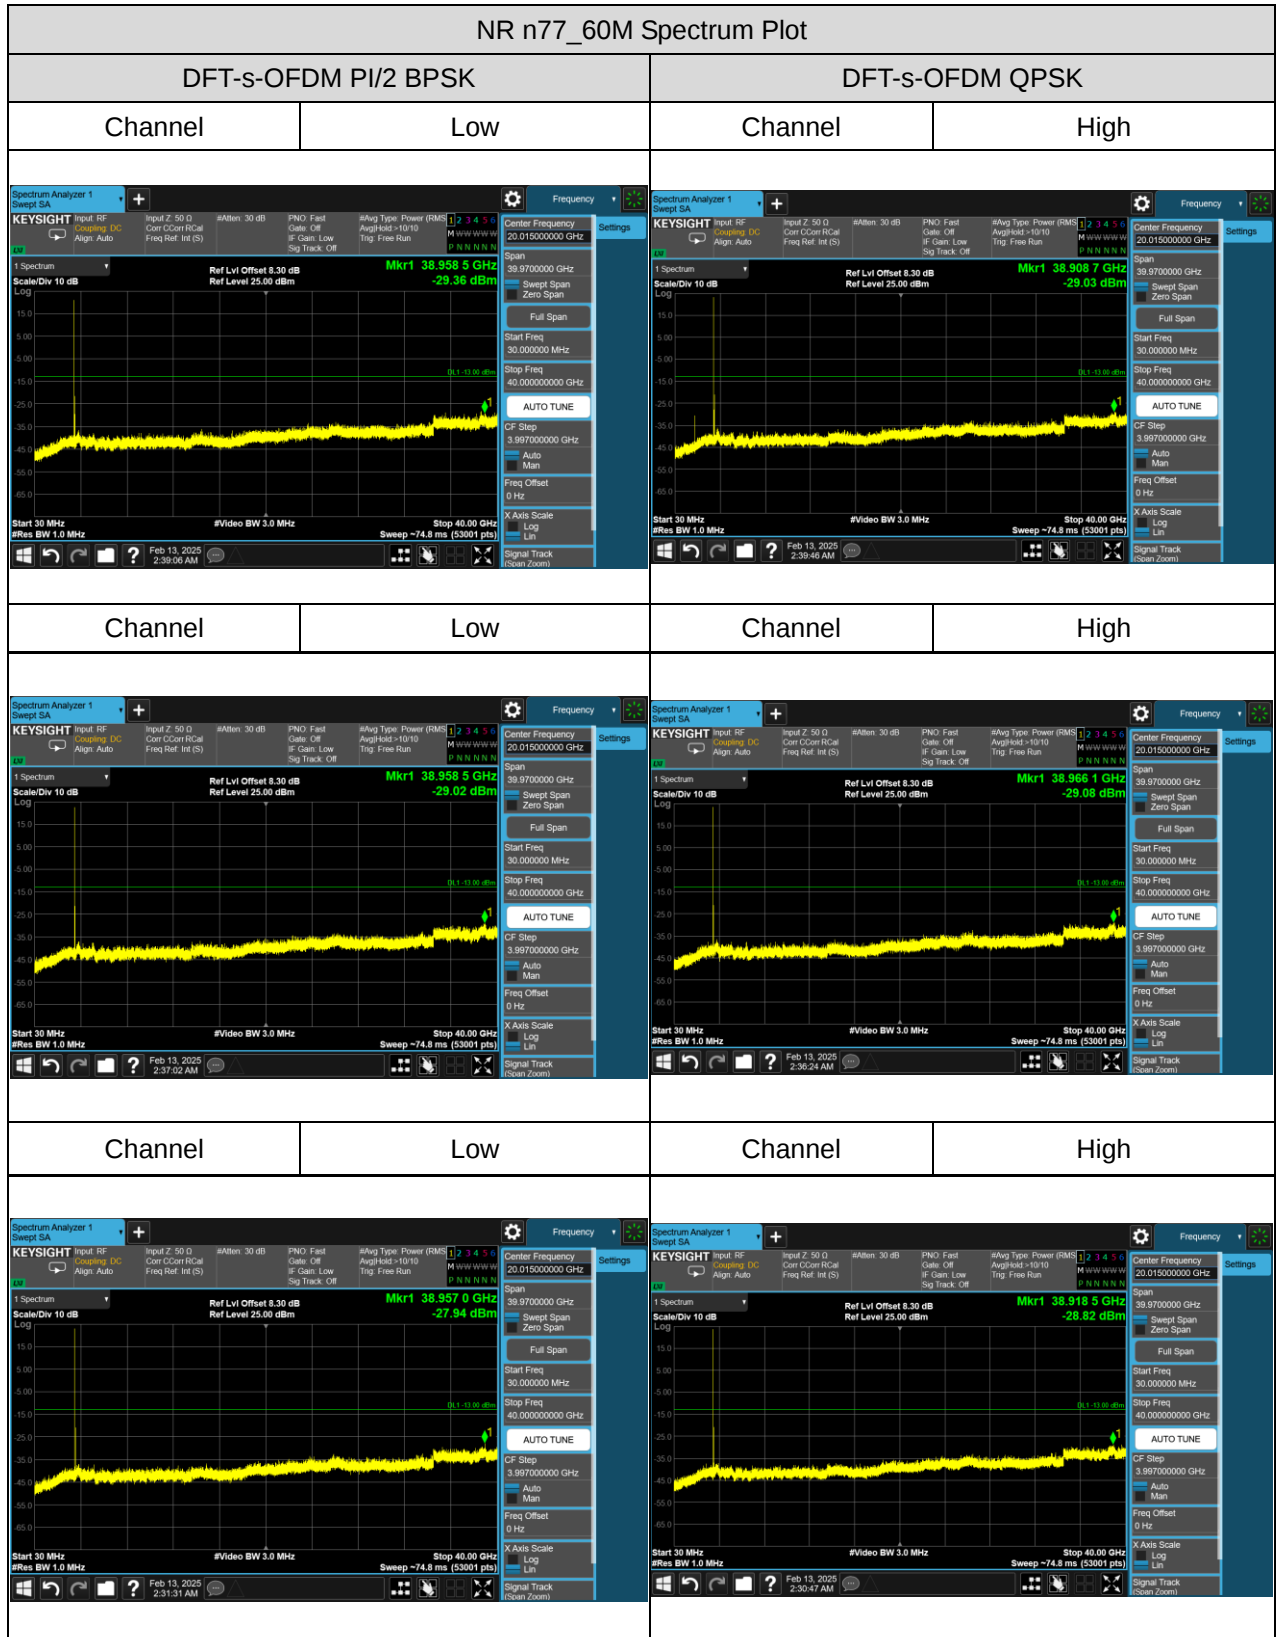


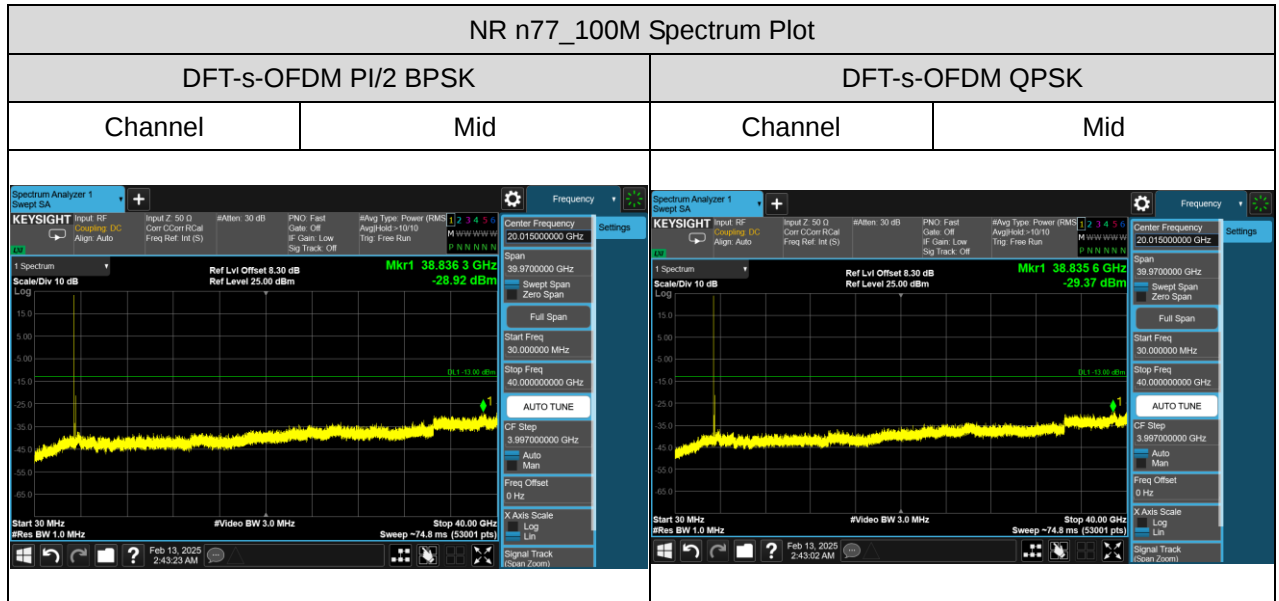

APPENDIX D - RADIATED SPURIOUS EMISSIONS (9KHZ TO 30MHZ)


Test Mode : TX Mode

Ant 0°

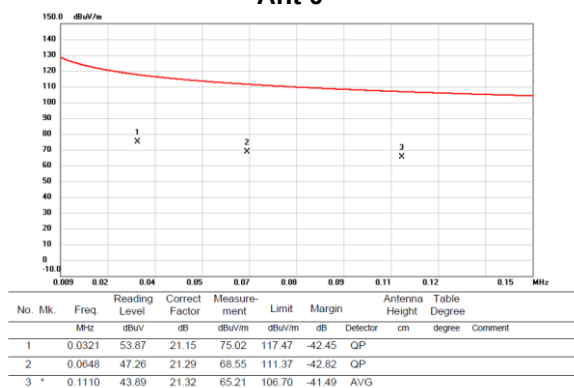


Test Mode : TX Mode

Ant 0°

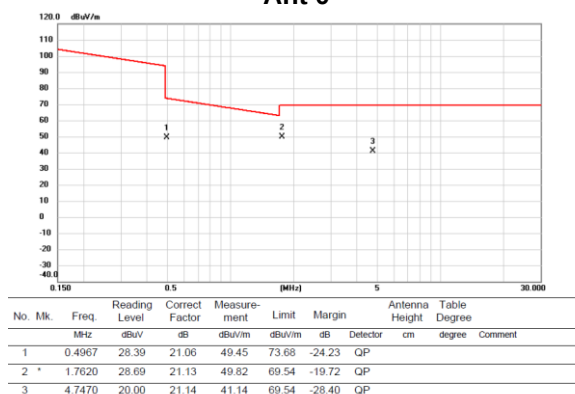


Test Mode : TX Mode

Ant 90°

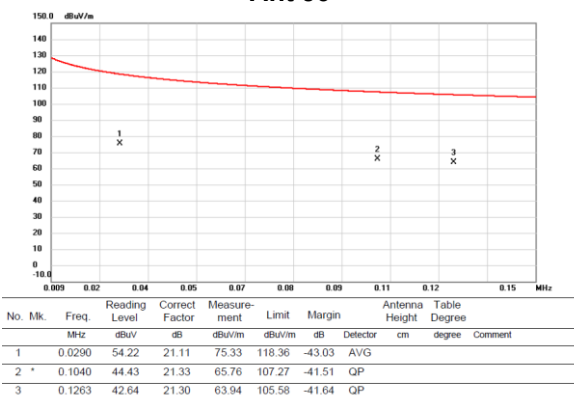


Test Mode : TX Mode

Ant 90°

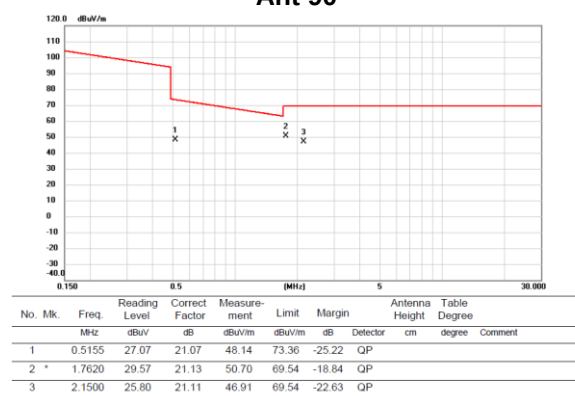


APPENDIX E - RADIATED SPURIOUS EMISSIONS (30MHZ TO 1GHZ)

Test Mode : NR n77_TX Mid CH_20M

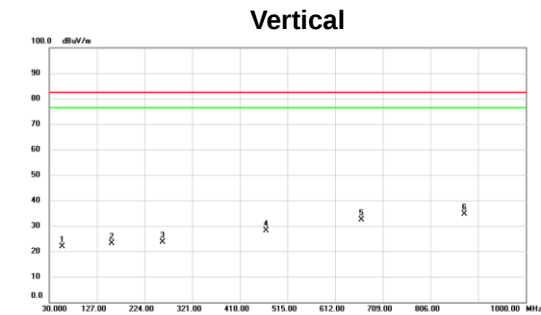


No. Msk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	56.675	33.39	-11.61	21.78	82.30	-60.52	peak	
2	157.555	33.97	-10.93	23.04	82.30	-59.26	peak	
3	260.860	35.75	-12.02	23.73	82.30	-58.57	peak	
4	471.350	34.64	-6.46	28.18	82.30	-54.12	peak	
5	665.350	35.07	-2.67	32.40	82.30	-49.90	peak	
6 *	874.870	34.71	-0.05	34.66	82.30	-47.64	peak	

Test Mode : NR n77_TX Mid CH_20M

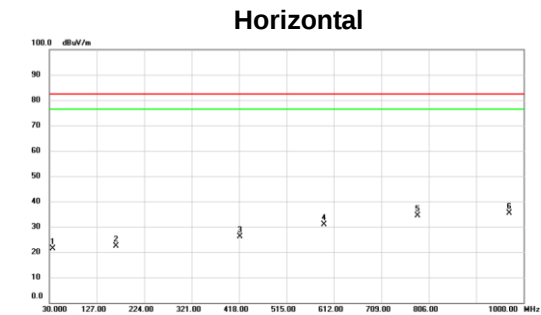


No. Msk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	37.275	33.50	-12.06	21.44	82.30	-60.86	peak	
2	165.800	33.57	-11.08	22.49	82.30	-59.81	peak	
3	419.455	33.55	-7.54	26.01	82.30	-56.29	peak	
4	591.630	34.64	-3.82	30.82	82.30	-51.48	peak	
5	783.690	35.68	-1.20	34.48	82.30	-47.82	peak	
6 *	971.385	34.60	0.74	35.34	82.30	-46.96	peak	

Test Mode : NR n77_TX Mid CH_100M

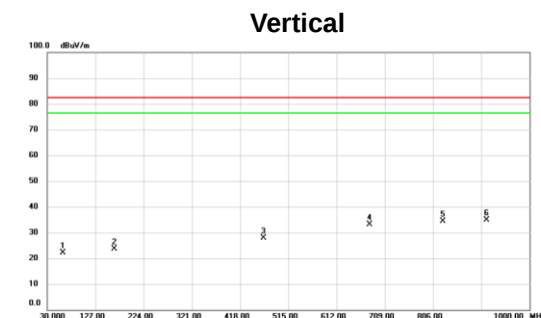

No. Msk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	61.040	34.12	-12.09	22.03	82.30	-60.27	peak	
2	165.315	34.77	-11.06	23.71	82.30	-58.59	peak	
3	464.560	34.44	-6.55	27.89	82.30	-54.41	peak	
4	678.930	35.68	-2.52	33.16	82.30	-49.14	peak	
5	825.400	35.25	-0.81	34.44	82.30	-47.86	peak	
6 *	913.670	34.60	0.36	34.96	82.30	-47.34	peak	


Test Mode : NR n77_TX Mid CH_100M

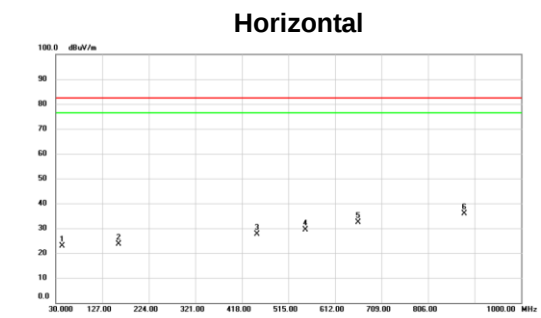

No. Msk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	43.095	34.42	-11.48	22.94	82.30	-59.36	peak	
2	160.950	34.49	-10.88	23.61	82.30	-58.69	peak	
3	449.040	34.33	-6.79	27.54	82.30	-54.76	peak	
4	550.890	34.29	-4.97	29.32	82.30	-52.98	peak	
5	660.500	35.16	-2.72	32.44	82.30	-49.86	peak	
6 *	881.175	35.87	0.04	35.91	82.30	-46.39	peak	

Test Mode : NR n78_TX Mid CH_20M


Vertical

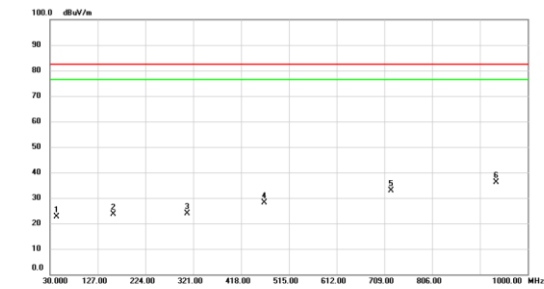

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dBμV/m	Margin dB	Detector	Comment
1		44.065	34.01	-11.41	22.60	82.30	-59.70	peak	
2		158.040	34.55	-10.91	23.64	82.30	-58.66	peak	
3		308.875	34.22	-10.36	23.86	82.30	-58.44	peak	
4		465.530	34.62	-6.54	28.08	82.30	-54.22	peak	
5		723.065	34.55	-1.72	32.83	82.30	-49.47	peak	
6 *		935.495	35.73	0.47	36.20	82.30	-46.10	peak	

Test Mode : NR n78_TX Mid CH_20M


Horizontal

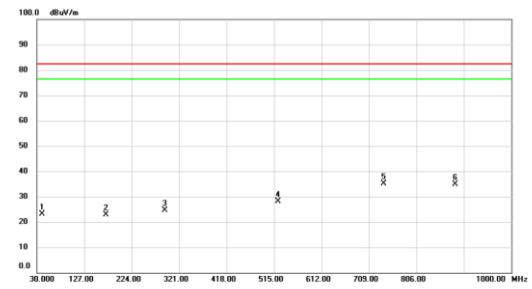

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dBμV/m	Margin dB	Detector	Comment
1		40.670	34.78	-11.69	23.09	82.30	-59.21	peak	
2		172.105	34.46	-11.46	23.00	82.30	-59.30	peak	
3		291.415	35.30	-10.72	24.58	82.30	-57.72	peak	
4		522.760	33.77	-5.55	28.22	82.30	-54.08	peak	
5 *		739.555	36.51	-1.31	35.20	82.30	-47.10	peak	
6		885.055	34.82	0.09	34.91	82.30	-47.39	peak	

Test Mode : NR n78_TX Mid CH_100M


Vertical

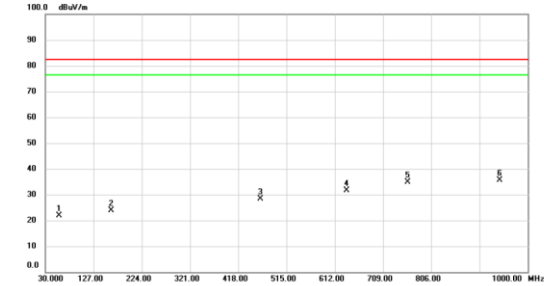

No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dBμV/m	Margin dB	Detector	Comment
1		57.160	33.56	-11.65	21.91	82.30	-60.39	peak	
2		161.920	34.69	-10.92	23.77	82.30	-58.53	peak	
3		463.105	34.86	-6.57	28.29	82.30	-54.01	peak	
4		635.765	34.68	-3.05	31.63	82.30	-50.67	peak	
5		758.955	35.90	-1.10	34.80	82.30	-47.50	peak	
6 *		943.740	35.22	0.51	35.73	82.30	-46.57	peak	

Test Mode : NR n78_TX Mid CH_100M

Horizontal

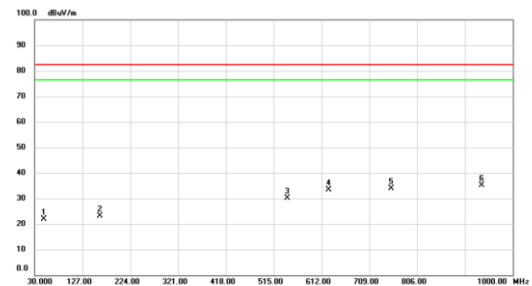


No.	Mk.	Freq. MHz	Reading Level dBμV	Correct Factor dB	Measure- ment dBμV/m	Limit dBμV/m	Margin dB	Detector	Comment
1		48.915	33.19	-11.27	21.92	82.30	-60.38	peak	
2		162.405	34.04	-10.94	23.10	82.30	-59.20	peak	
3		543.130	35.16	-5.14	30.02	82.30	-52.28	peak	
4		626.550	36.47	-3.19	33.28	82.30	-49.02	peak	
5		753.135	34.93	-1.07	33.86	82.30	-48.44	peak	
6 *		937.435	34.73	0.48	35.21	82.30	-47.09	peak	

APPENDIX F - RADIATED SPURIOUS EMISSIONS (ABOVE 1GHZ)

Test Mode : NR n77_TX Mid CH_20M


Vertical

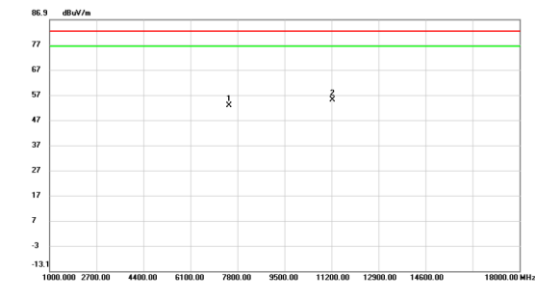

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7485.500	42.34	10.36	52.70	82.30	-29.60	peak	
2	11225.500	44.11	10.90	55.01	82.30	-27.29	peak	

Test Mode : NR n77_TX Mid CH_20M


Horizontal

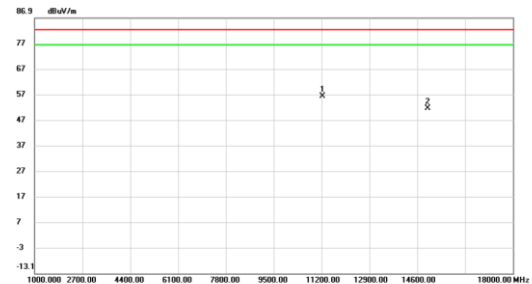

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11225.500	45.46	10.90	56.36	82.30	-25.94	peak	
2	14965.500	41.56	10.04	51.60	82.30	-30.70	peak	

Test Mode : NR n77_TX Mid CH_20M


Vertical

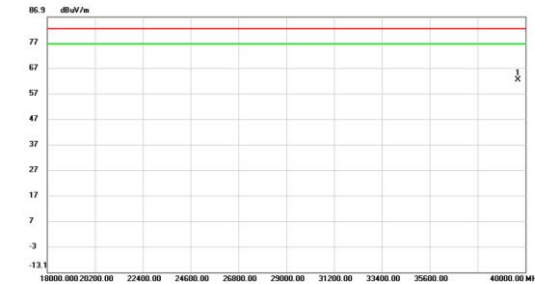

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	39648.000	51.43	10.88	62.31	82.30	-19.99	peak	


Test Mode : NR n77_TX Mid CH_20M

Horizontal

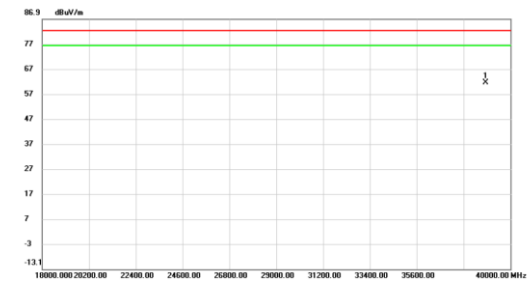


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	38845.000	50.67	10.88	61.55	82.30	-20.75	peak	


Test Mode : NR n77_TX Mid CH_100M

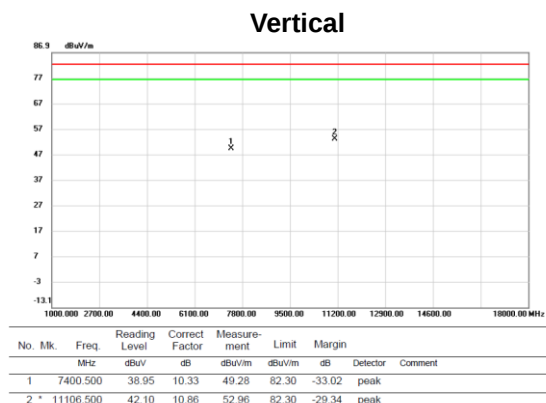


Test Mode : NR n77_TX Mid CH_100M

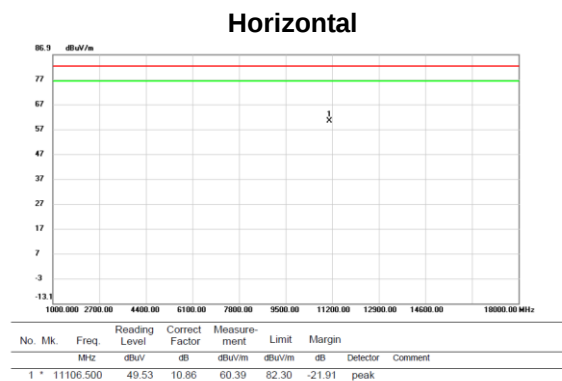

Test Mode : NR n77_TX Mid CH_100M

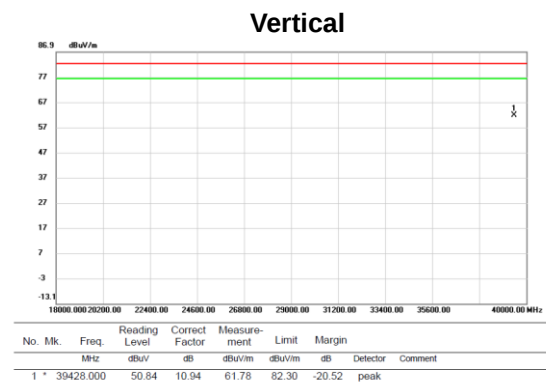


Test Mode : NR n77_TX Mid CH_100M

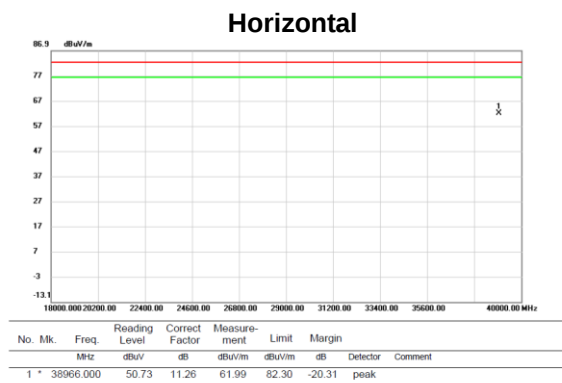

Test Mode : NR n78_TX Mid CH_20M

Vertical

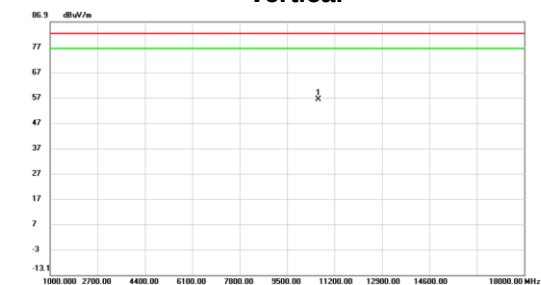

No. M.k.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10622.000	45.32	10.85	56.17	82.30	-26.13	peak	

Test Mode : NR n78_TX Mid CH_20M


Horizontal



No. M.k.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7086.000	38.99	10.22	49.21	82.30	-33.09	peak	
2 *	10622.000	44.99	10.85	55.84	82.30	-26.46	peak	

Test Mode : NR n78_TX Mid CH_20M


Vertical

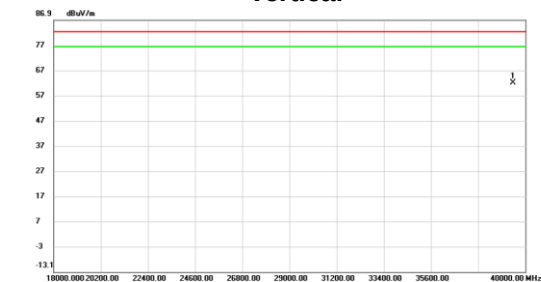

No. M.k.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39428.000	51.14	10.94	62.08	82.30	-20.22	peak	

Test Mode : NR n78_TX Mid CH_20M

Horizontal

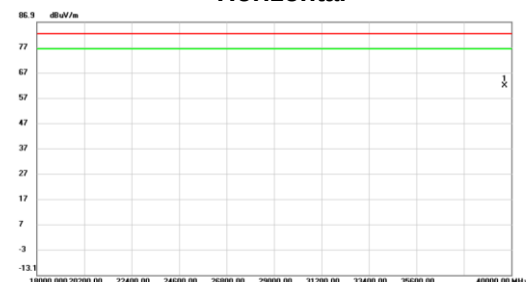

No. M.k.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	39681.000	50.85	10.88	61.73	82.30	-20.57	peak	