


Test Mode :	Transmit(802.11n HT20)	Test Date :	2021/10/08
Test Channel :	CH01(2412MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

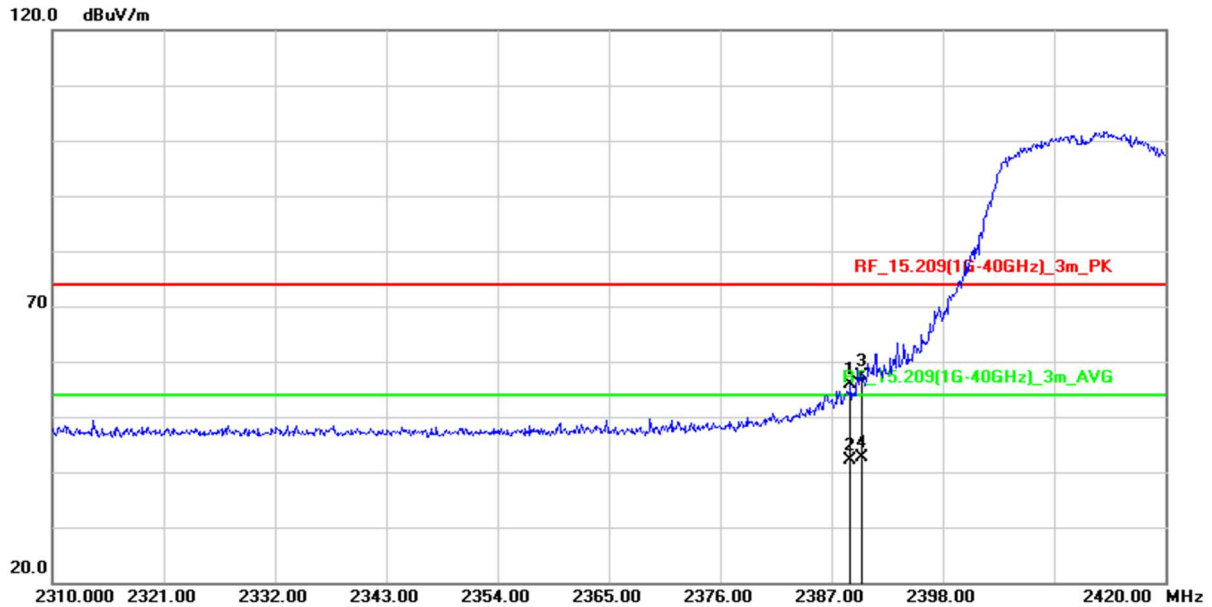


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2388.870	62.48	-6.70	55.78	74.00	-18.22	peak
2	2388.870	48.89	-6.70	42.19	54.00	-11.81	AVG
3	2390.000	64.19	-6.69	57.50	74.00	-16.50	peak
4	2390.000	49.27	-6.69	42.58	54.00	-11.42	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2021/10/08
Test Channel :	CH01(2412MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

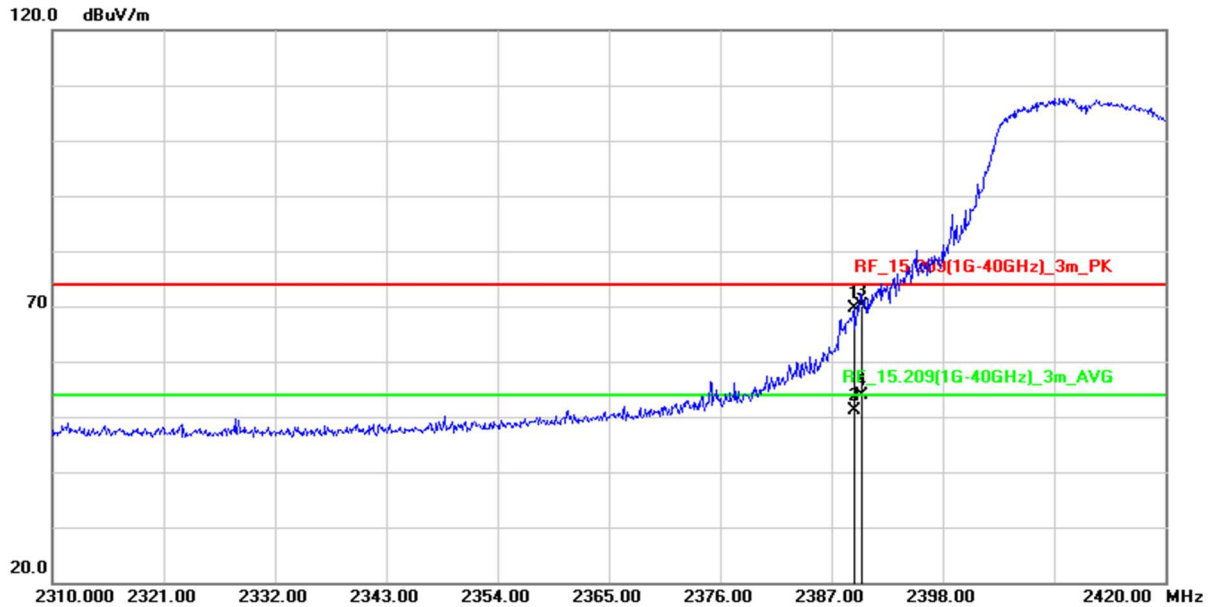


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2389.200	76.40	-6.70	69.70	74.00	-4.30	peak
2	2389.200	57.82	-6.70	51.12	54.00	-2.88	AVG
3	2390.000	76.72	-6.69	70.03	74.00	-3.97	peak
4	2390.000	60.54	-6.69	53.85	54.00	-0.15	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2021/10/08
Test Channel :	CH11(2462MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

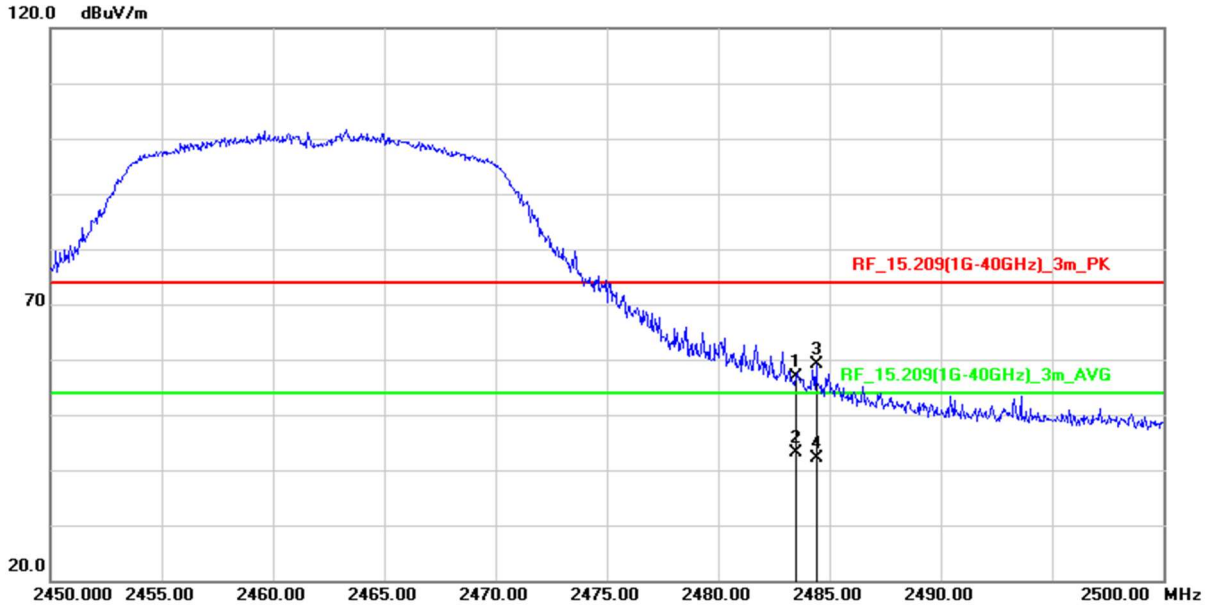


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	63.47	-6.61	56.86	74.00	-17.14	peak
2	2483.500	49.84	-6.61	43.23	54.00	-10.77	AVG
3	2484.400	65.74	-6.61	59.13	74.00	-14.87	peak
4	2484.400	48.74	-6.61	42.13	54.00	-11.87	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2021/10/08
Test Channel :	CH11(2462MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

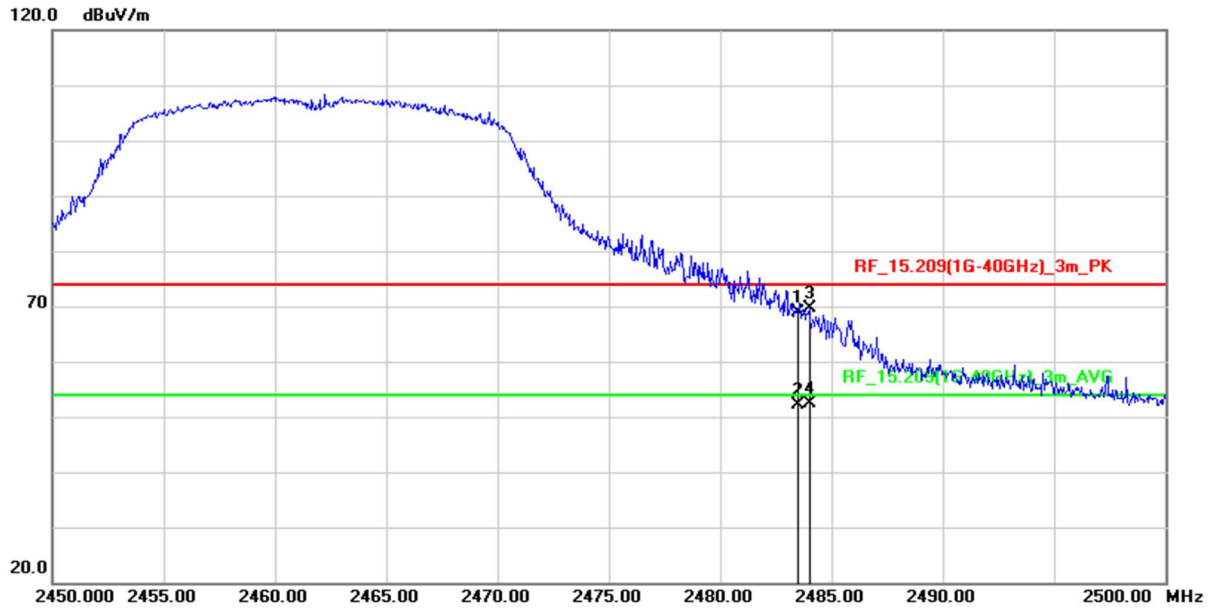

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2483.500	75.49	-6.61	68.88	74.00	-5.12	peak
2	2483.500	58.76	-6.61	52.15	54.00	-1.85	AVG
3	2484.000	76.16	-6.61	69.55	74.00	-4.45	peak
4	2484.000	58.87	-6.61	52.26	54.00	-1.74	AVG

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


2.6.6 Test Result of Radiated Spurious Emission Measurement

- (1) The radiation measurement frequency is 9kHz ~ 30MHz. The interference value of this frequency range is less than the limit value of 20 dB. It is considered that the background noise value is not recorded.
- (2) The following table shows the radiation measurement frequency from 30MHz to 26.5GHz, pre-scanning in the X, Y and Z axes. The worst case (X-axis) is documented in this report.

Test Frequency	
RF	802.11b / 802.11g / 802.11n HT20
Tx	CH01 (2412MHz) CH06 (2437MHz) CH11 (2462MHz)

Above 1GHz Data

Test Mode :	Transmit(802.11b)	Test Date :	2021/10/11
Test Channel :	CH01(2412MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

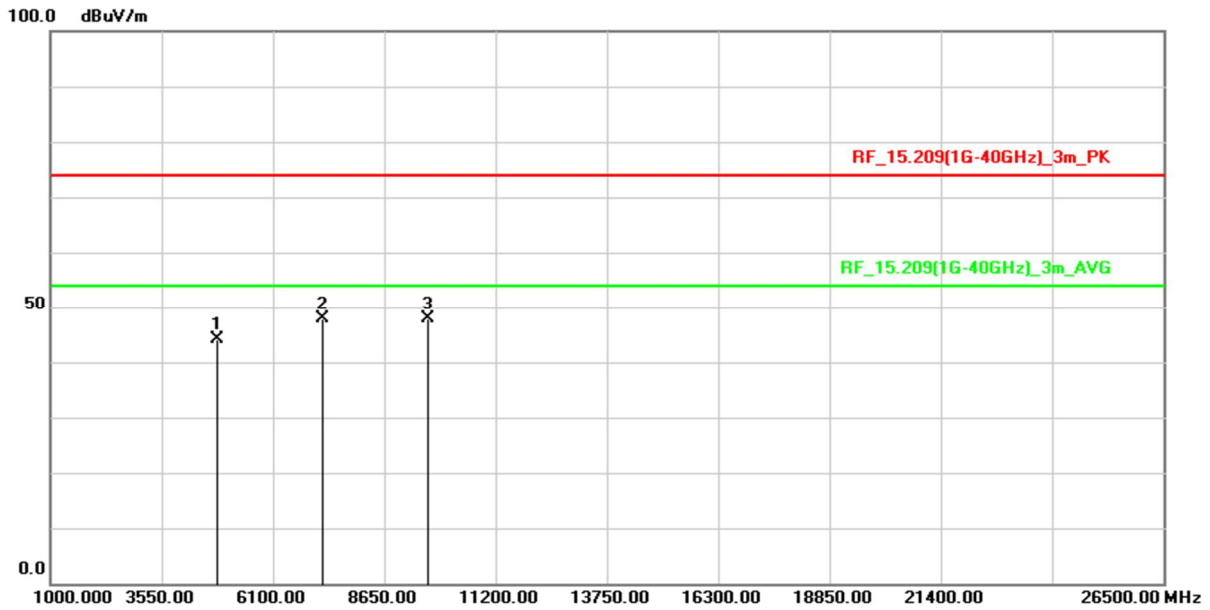


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	64.86	-20.64	44.22	74.00	-29.78	peak
2	7236.000	62.79	-14.88	47.91	74.00	-26.09	peak
3	9648.000	58.78	-10.91	47.87	74.00	-26.13	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2021/10/11
Test Channel :	CH01(2412MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

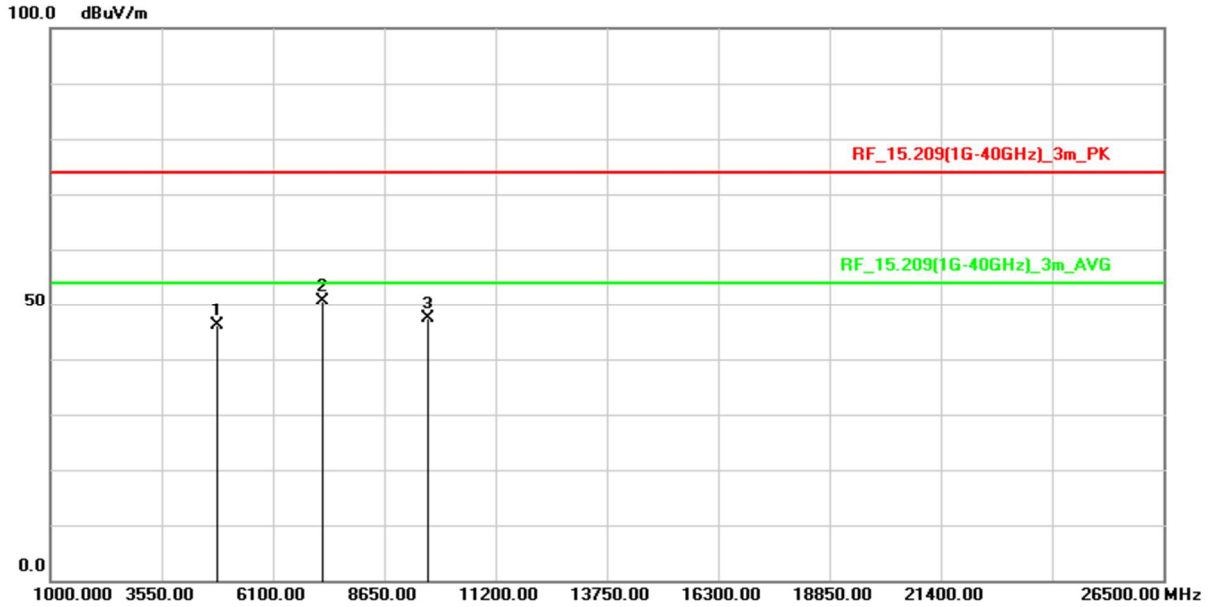


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	66.83	-20.64	46.19	74.00	-27.81	peak
2	7236.000	65.56	-14.88	50.68	74.00	-23.32	peak
3	9648.000	58.34	-10.91	47.43	74.00	-26.57	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2021/10/11
Test Channel :	CH06(2437MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

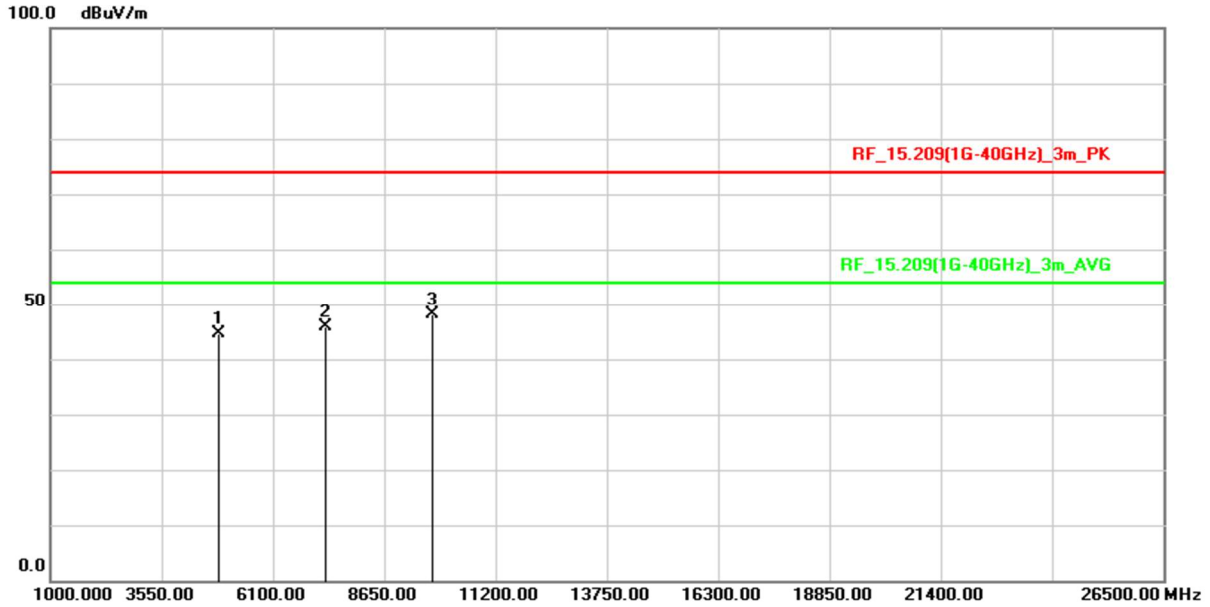


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	65.40	-20.72	44.68	74.00	-29.32	peak
2	7311.000	60.82	-15.01	45.81	74.00	-28.19	peak
3	9748.000	58.95	-10.73	48.22	74.00	-25.78	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2021/10/11
Test Channel :	CH06(2437MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

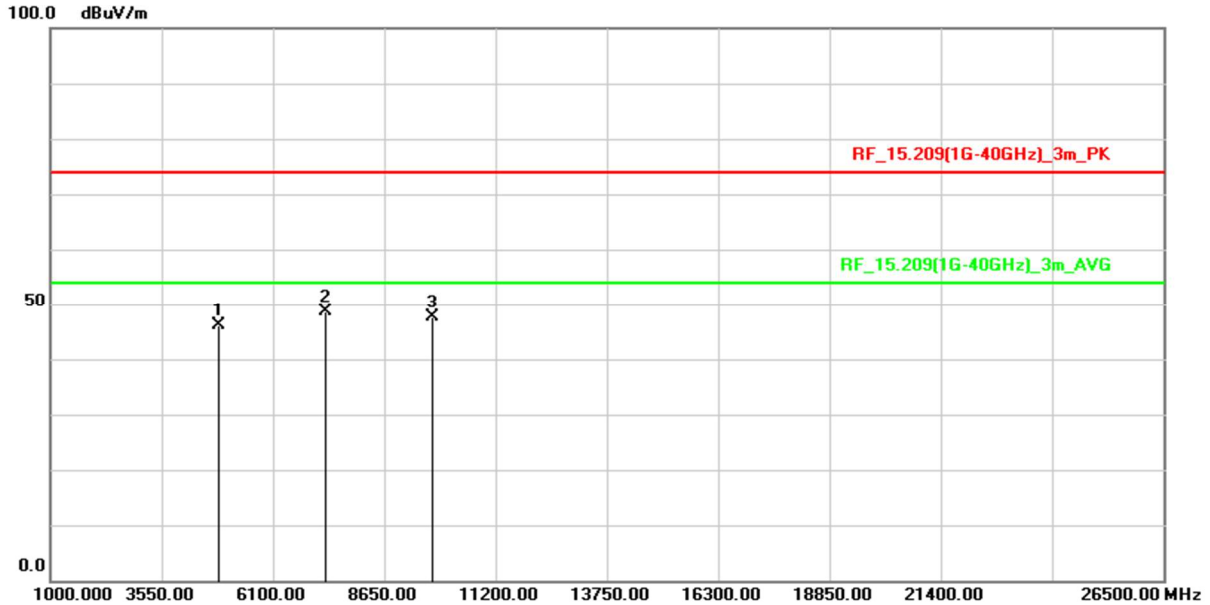


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	66.94	-20.72	46.22	74.00	-27.78	peak
2	7311.000	63.56	-15.01	48.55	74.00	-25.45	peak
3	9748.000	58.42	-10.73	47.69	74.00	-26.31	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2021/10/11
Test Channel :	CH11(2462MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

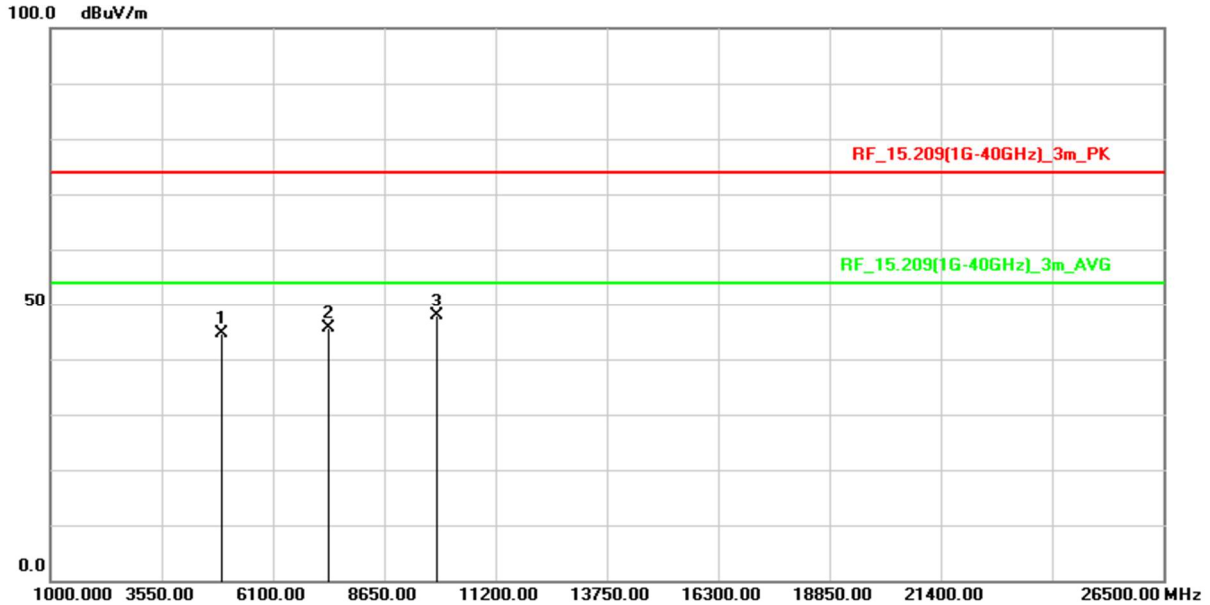


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	65.48	-20.74	44.74	74.00	-29.26	peak
2	7386.000	60.35	-14.70	45.65	74.00	-28.35	peak
3	9848.000	58.39	-10.63	47.76	74.00	-26.24	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2021/10/11
Test Channel :	CH11(2462MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

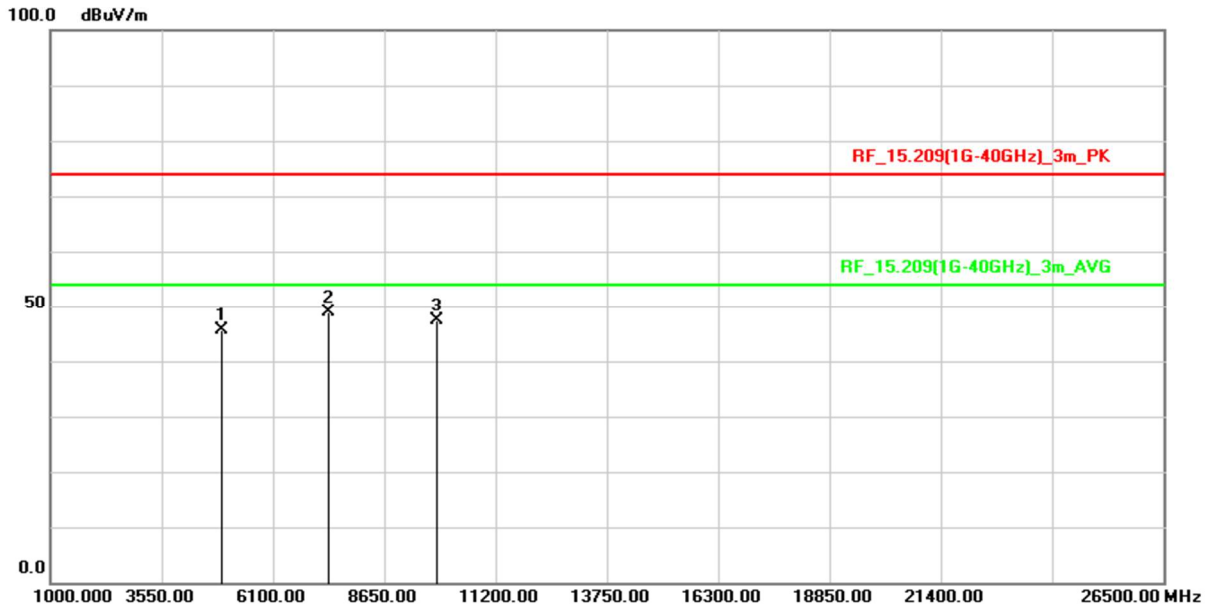


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	66.44	-20.74	45.70	74.00	-28.30	peak
2	7386.000	63.61	-14.70	48.91	74.00	-25.09	peak
3	9848.000	58.03	-10.63	47.40	74.00	-26.60	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2021/10/11
Test Channel :	CH01(2412MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

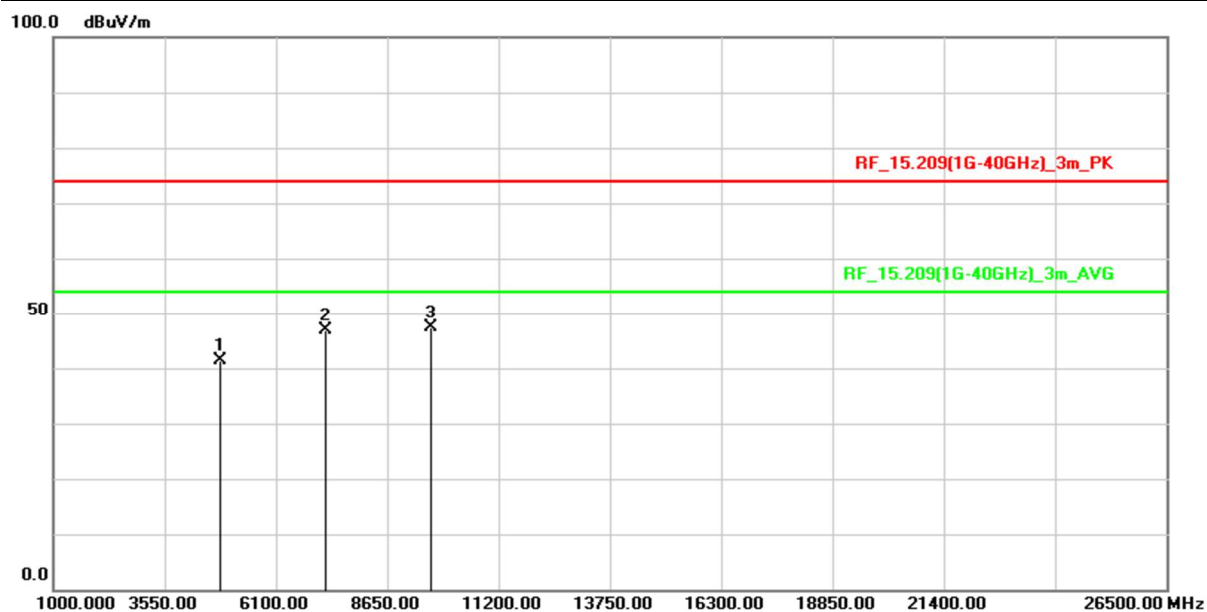


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	62.06	-20.64	41.42	74.00	-32.58	peak
2	7236.000	61.88	-14.88	47.00	74.00	-27.00	peak
3	9648.000	58.23	-10.91	47.32	74.00	-26.68	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2021/10/11
Test Channel :	CH01(2412MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

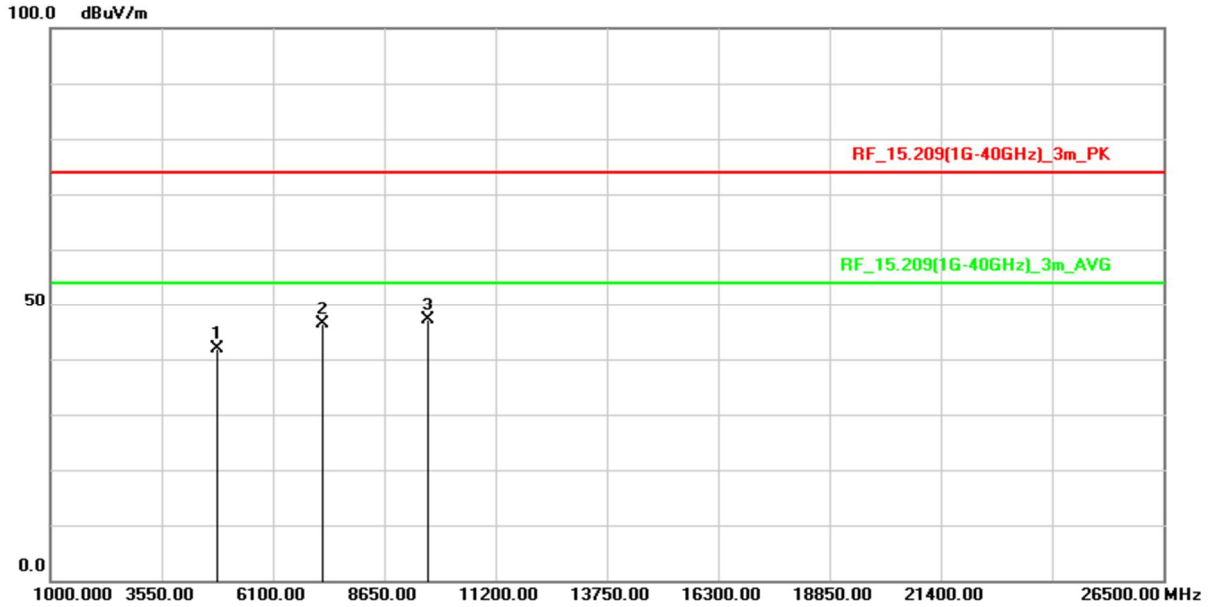


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	62.52	-20.64	41.88	74.00	-32.12	peak
2	7236.000	61.16	-14.88	46.28	74.00	-27.72	peak
3	9648.000	58.13	-10.91	47.22	74.00	-26.78	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2021/10/11
Test Channel :	CH06(2437MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

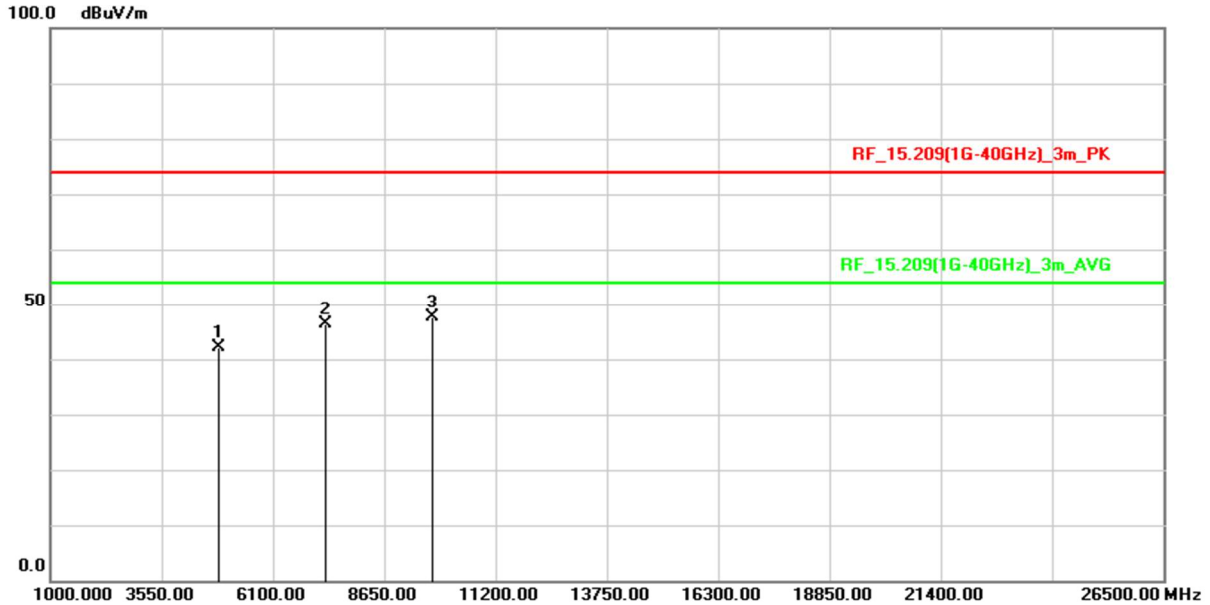


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	62.88	-20.72	42.16	74.00	-31.84	peak
2	7311.000	61.29	-15.01	46.28	74.00	-27.72	peak
3	9748.000	58.45	-10.73	47.72	74.00	-26.28	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2021/10/11
Test Channel :	CH06(2437MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

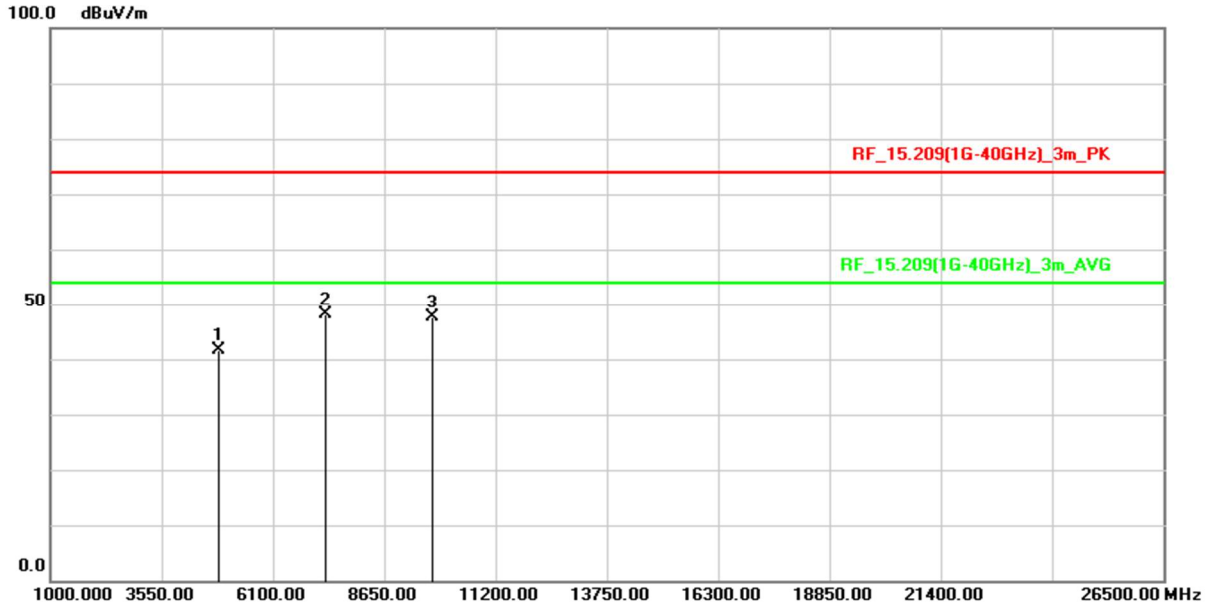


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	62.45	-20.72	41.73	74.00	-32.27	peak
2	7311.000	63.14	-15.01	48.13	74.00	-25.87	peak
3	9748.000	58.25	-10.73	47.52	74.00	-26.48	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2021/10/11
Test Channel :	CH11(2462MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

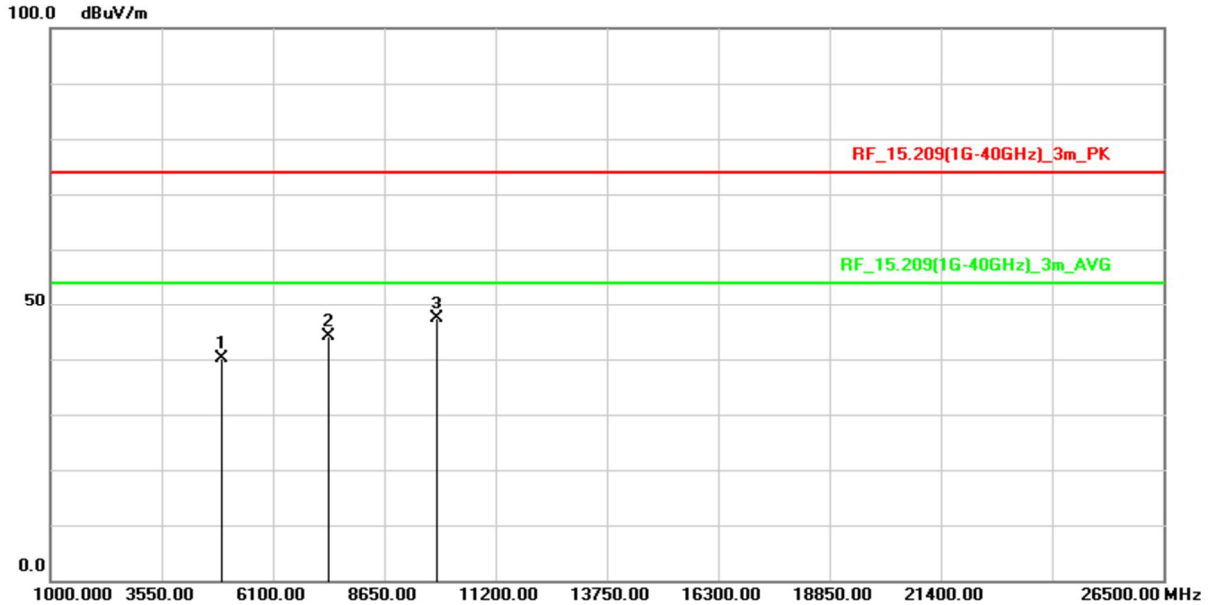


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	60.77	-20.74	40.03	74.00	-33.97	peak
2	7386.000	58.88	-14.70	44.18	74.00	-29.82	peak
3	9848.000	57.93	-10.63	47.30	74.00	-26.70	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11g)	Test Date :	2021/10/11
Test Channel :	CH11(2462MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

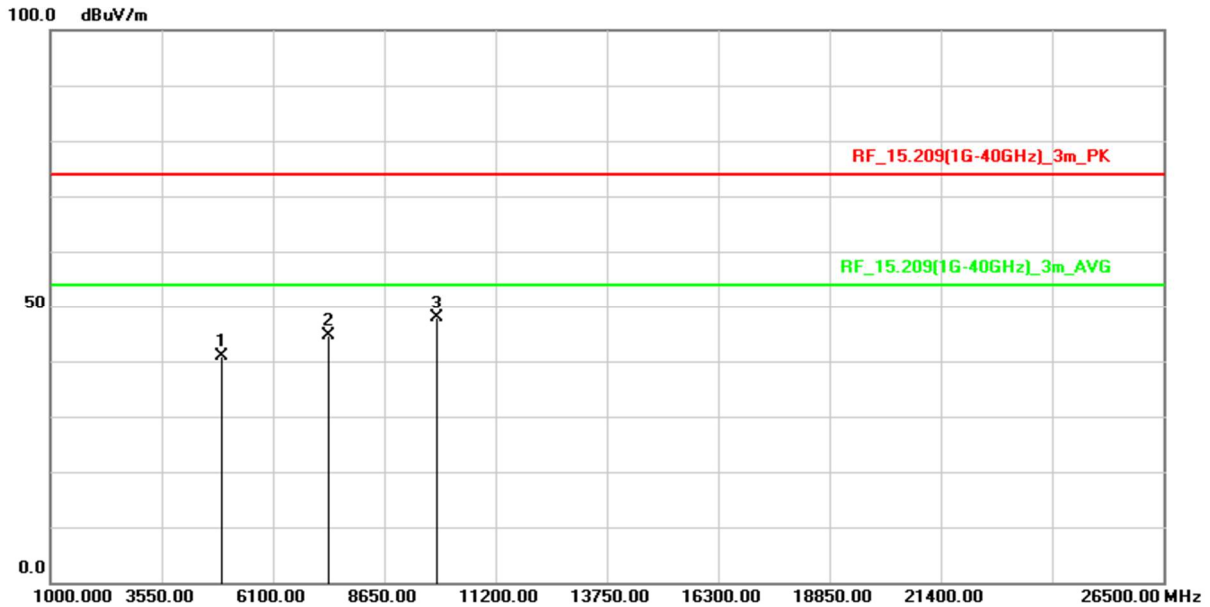


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	61.71	-20.74	40.97	74.00	-33.03	peak
2	7386.000	59.39	-14.70	44.69	74.00	-29.31	peak
3	9848.000	58.62	-10.63	47.99	74.00	-26.01	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2021/10/11
Test Channel :	CH01(2412MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

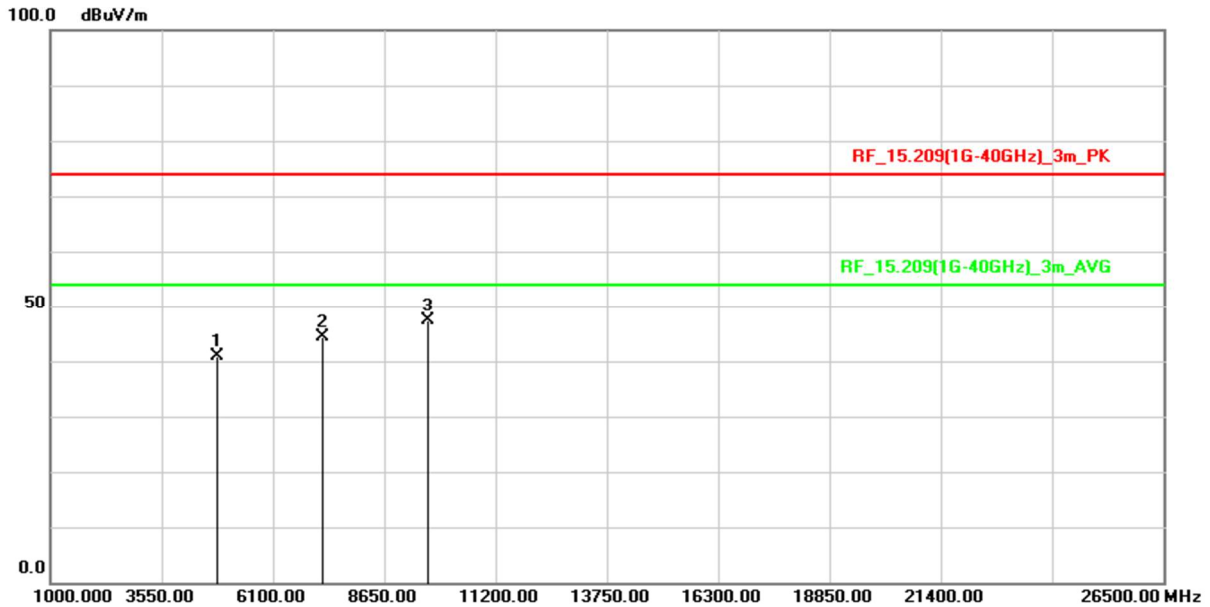


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	61.52	-20.64	40.88	74.00	-33.12	peak
2	7236.000	59.31	-14.88	44.43	74.00	-29.57	peak
3	9648.000	58.32	-10.91	47.41	74.00	-26.59	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2021/10/11
Test Channel :	CH01(2412MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

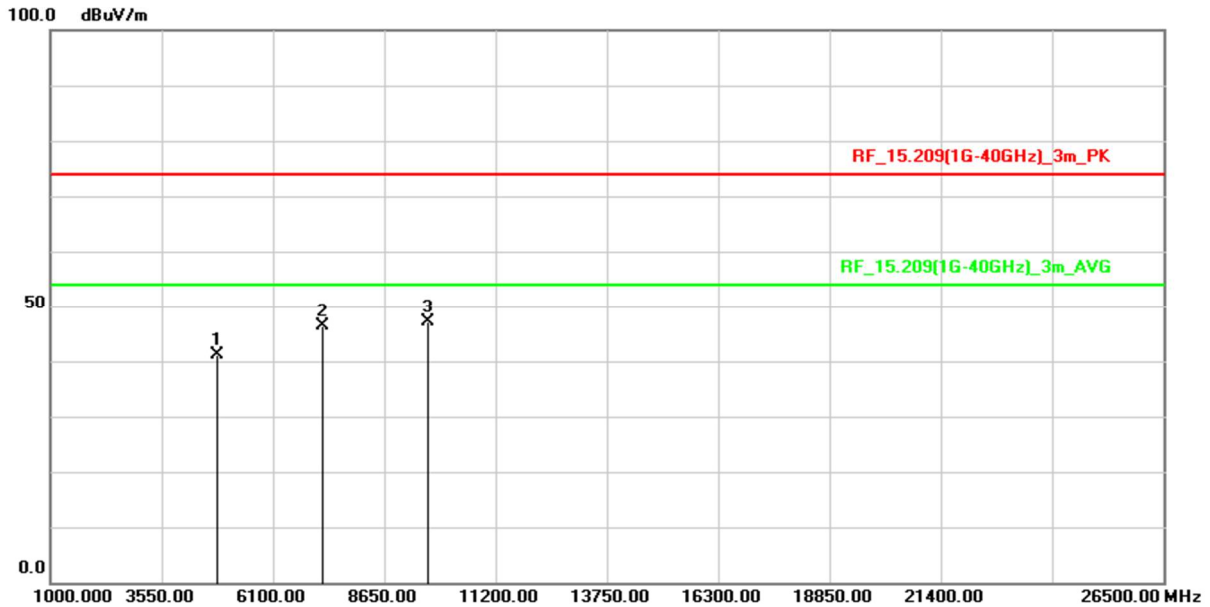


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	61.85	-20.64	41.21	74.00	-32.79	peak
2	7236.000	61.30	-14.88	46.42	74.00	-27.58	peak
3	9648.000	58.10	-10.91	47.19	74.00	-26.81	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2021/10/11
Test Channel :	CH06(2437MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

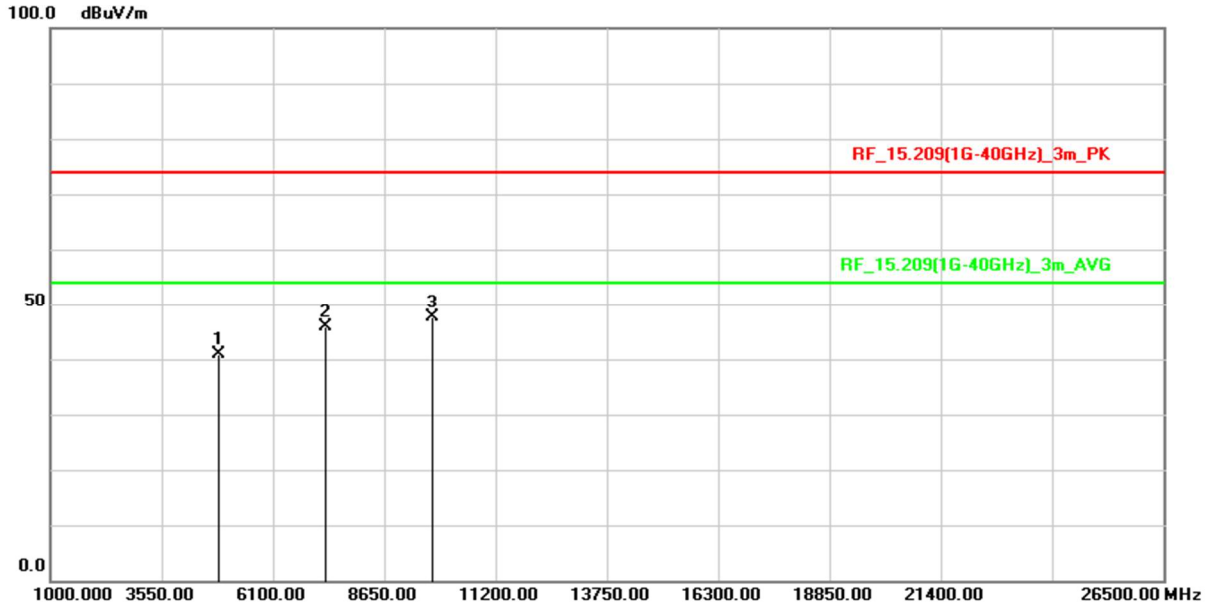


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	61.72	-20.72	41.00	74.00	-33.00	peak
2	7311.000	60.90	-15.01	45.89	74.00	-28.11	peak
3	9748.000	58.42	-10.73	47.69	74.00	-26.31	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2021/10/11
Test Channel :	CH06(2437MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

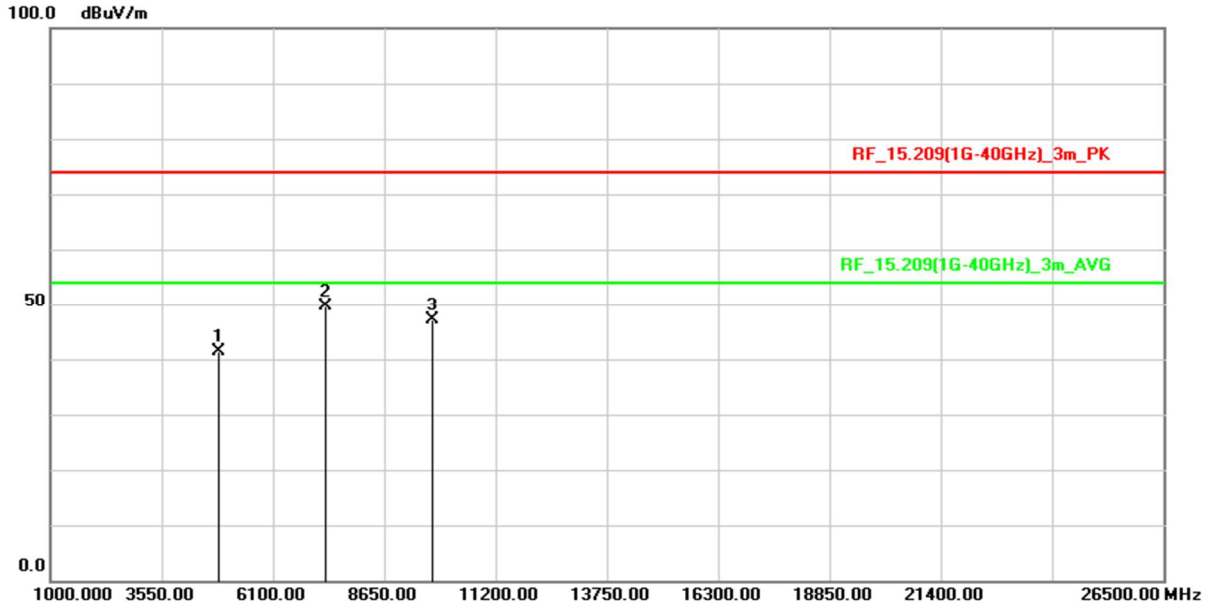


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4874.000	62.16	-20.72	41.44	74.00	-32.56	peak
2	7311.000	64.68	-15.01	49.67	74.00	-24.33	peak
3	9748.000	57.85	-10.73	47.12	74.00	-26.88	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2021/10/11
Test Channel :	CH11(2462MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

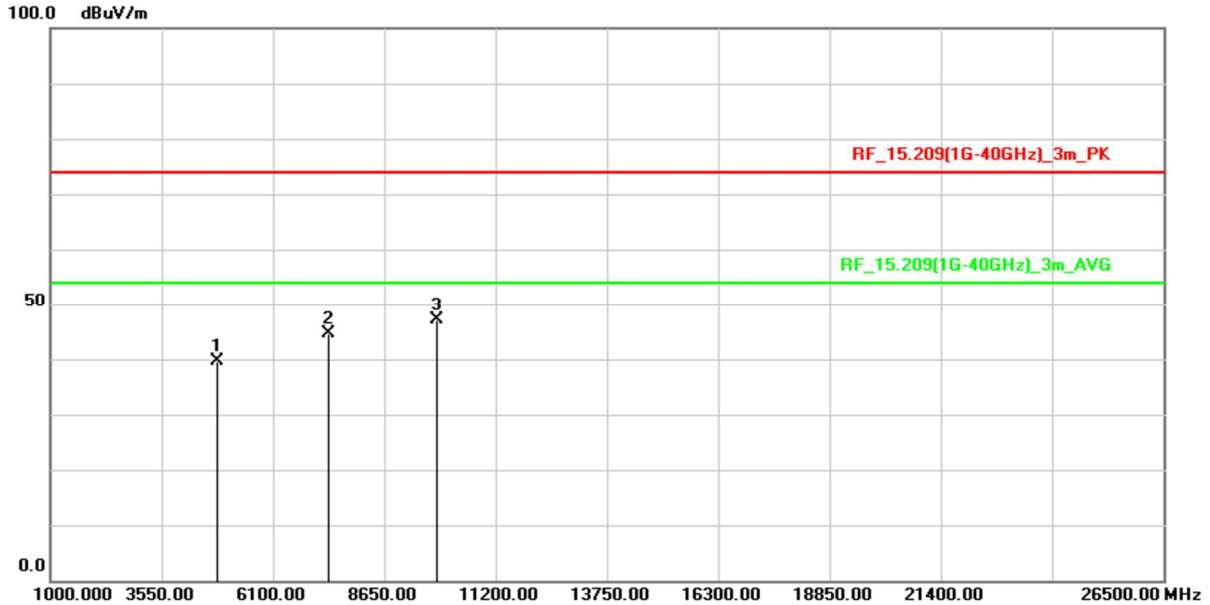


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4824.000	60.29	-20.64	39.65	74.00	-34.35	peak
2	7386.000	59.28	-14.70	44.58	74.00	-29.42	peak
3	9848.000	57.82	-10.63	47.19	74.00	-26.81	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11n HT20)	Test Date :	2021/10/11
Test Channel :	CH11(2462MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

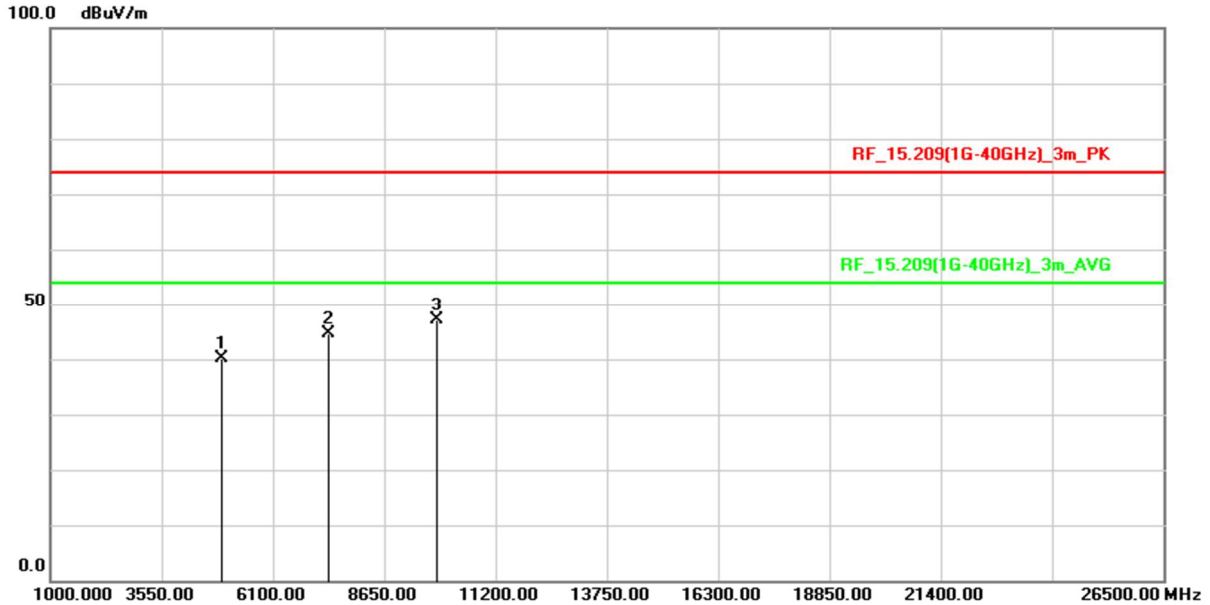


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4924.000	60.81	-20.74	40.07	74.00	-33.93	peak
2	7386.000	59.35	-14.70	44.65	74.00	-29.35	peak
3	9848.000	57.74	-10.63	47.11	74.00	-26.89	peak

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Below 1GHz Data

Test Mode :	Transmit(802.11b)	Test Date :	2021/10/11
Test Channel :	CH06(2437MHz)	Temperature :	24 °C
Polarization :	Horizontal	Relative Humidity :	49 %

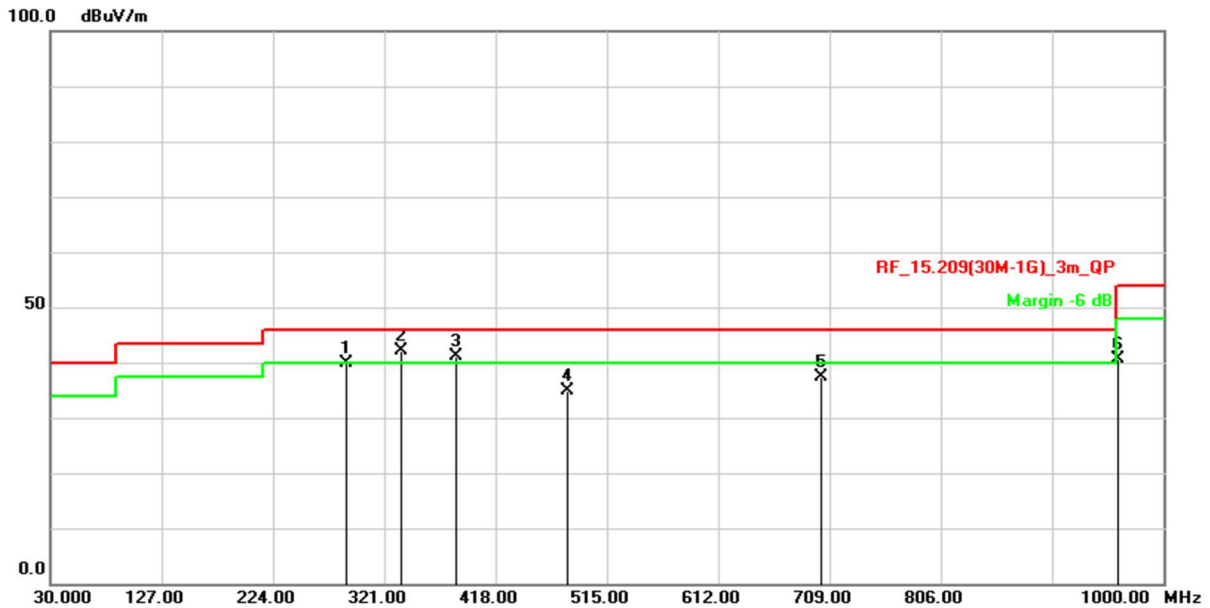


No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	288.0200	50.71	-10.80	39.91	46.00	-6.09	QP
2	335.5500	51.53	-9.33	42.20	46.00	-3.80	QP
3	384.0500	49.40	-8.23	41.17	46.00	-4.83	QP
4	480.0800	40.41	-5.61	34.80	46.00	-11.20	QP
5	702.2100	38.41	-1.03	37.38	46.00	-8.62	QP
6	960.2300	37.31	3.25	40.56	53.90	-13.34	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit

Test Mode :	Transmit(802.11b)	Test Date :	2021/10/11
Test Channel :	CH06(2437MHz)	Temperature :	24 °C
Polarization :	Vertical	Relative Humidity :	49 %

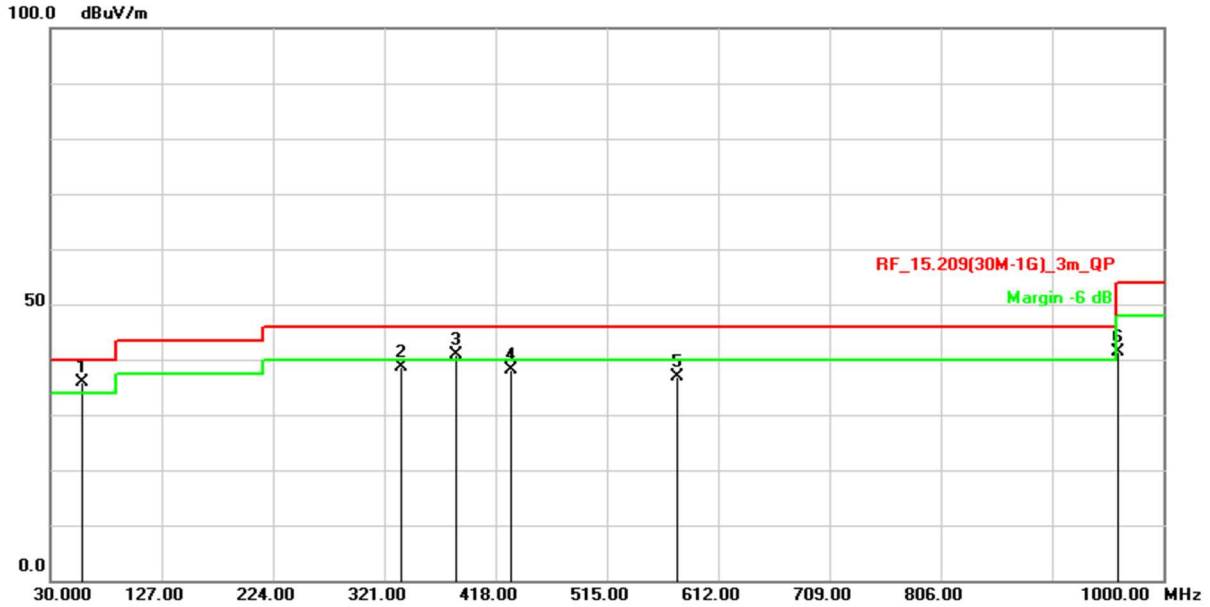

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	57.1600	47.71	-11.75	35.96	40.00	-4.04	QP
2	335.5500	48.06	-9.33	38.73	46.00	-7.27	QP
3	384.0500	49.16	-8.23	40.93	46.00	-5.07	QP
4	431.5800	44.79	-6.65	38.14	46.00	-7.86	QP
5	576.1100	40.39	-3.51	36.88	46.00	-9.12	QP
6	960.2300	38.10	3.25	41.35	53.90	-12.55	QP

Remark :

1. Correction Factor = Antenna factor + Cable loss – Amplifier gain
2. Result Value = Reading Level + Correct Factor
3. Margin Level = Result Value – Limit Value
4. The other emission levels were very low against the limit


2.7 AC Conducted Emissions Measurement

2.7.1 Limit

Frequency (MHz)	FCC Part 15 Subpart C Paragraph 15.207 (dB μ V) Limit	
	Quasi-peak	Average
0.15 to 0.5	66 to 56*	56 to 46*
0.50 to 5.0	56	46
5.0 to 30.0	60	50

*Decreases with the logarithm of the frequency

2.7.2 Test Setup

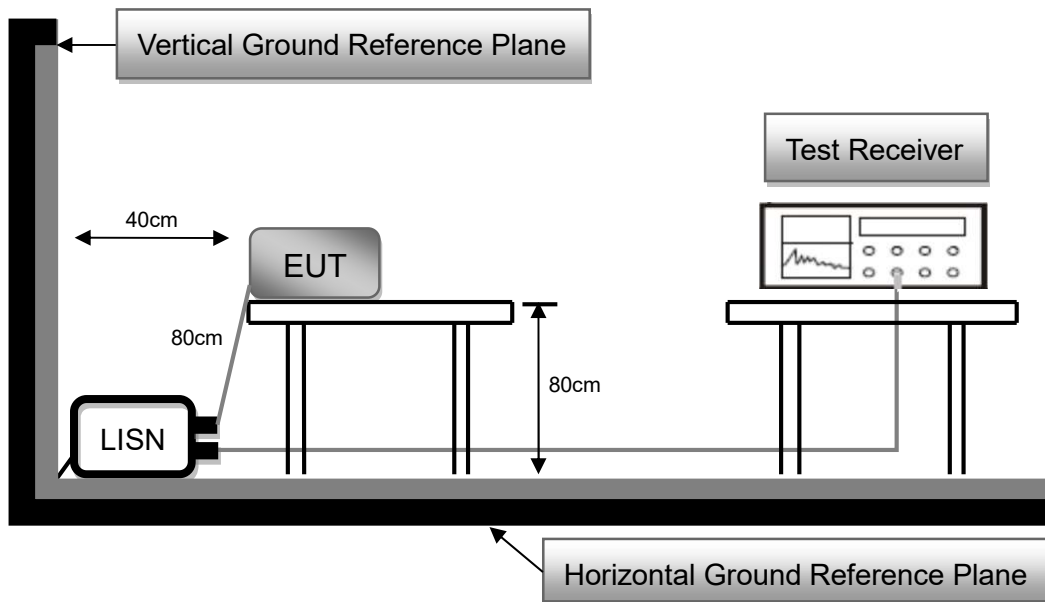


2.7.3 Test Procedure

1. The EUT was placed 0.8 meter height wooden table from the horizontal ground plane with EUT being connected to power source through a line impedance stabilization network (LISN). The LISN at least be 80 cm from nearest chassis of EUT.
2. The line impedance stabilization network (LISN) provides 50 ohm/50uH of coupling impedance for the measuring instrument. All other support equipments powered from additional LISN(s).
3. Interrelating cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle. All I/O cables were positioned to simulate typical usage.
4. All I/O cables that are not connected to a peripheral shall be bundle in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
5. The EMI test receiver connected to LISN powering the EUT. The actual test configuration, please refer to EUT test photos.
6. The receiver scanned from 150kHz to 30MHz for emissions in each of test modes. A scan was taken on both power lines, Line and Neutral, recording at least six highest emissions.
7. The EUT and cable configuration of the above highest emission levels were recorded. The test data of the worst case was recorded.

2.7.4 Test Result

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2021/09/24	Phase :	L
Temperature :	26°C	Humidity :	38 %

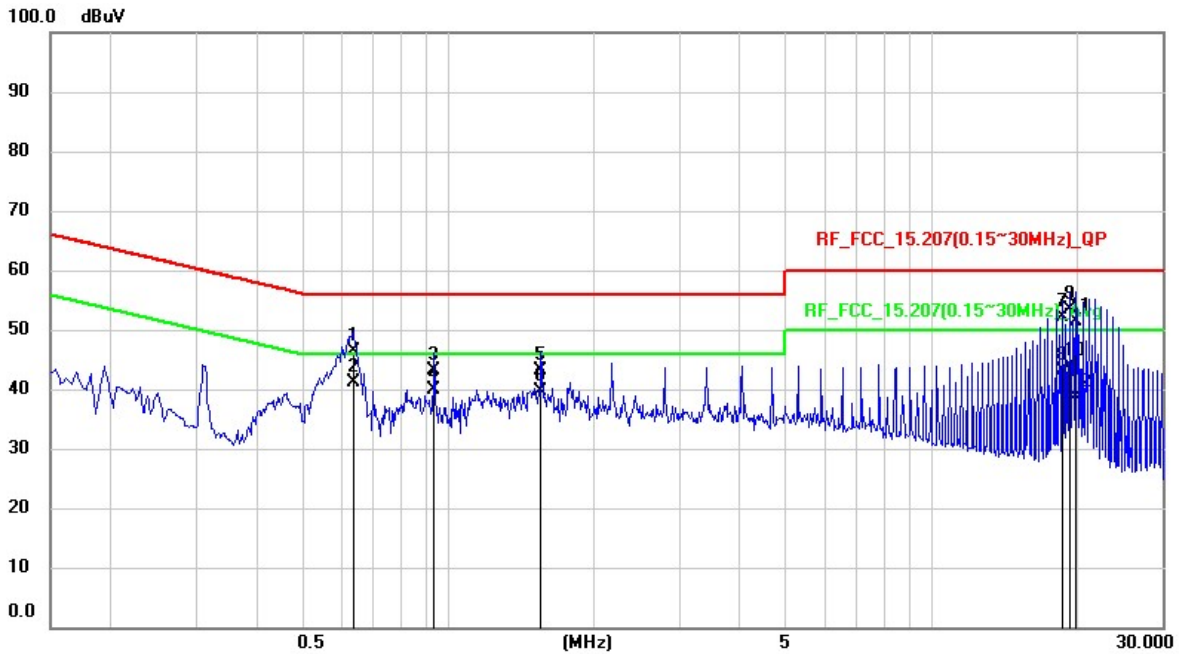


No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.6391	36.65	9.82	46.47	56	-9.53	QP
2	0.6391	31.41	9.82	41.23	46	-4.77	AVG
3	0.9346	33.33	9.82	43.15	56	-12.85	QP
4	0.9346	29.99	9.82	39.81	46	-6.19	AVG
5	1.5571	33.3	9.86	43.16	56	-12.84	QP
6	1.5571	29.87	9.86	39.73	46	-6.27	AVG
7	18.6961	41.85	10.23	52.08	60	-7.92	QP
8	18.6961	32.92	10.23	43.15	50	-6.85	AVG
9	19.3196	43.02	10.25	53.27	60	-6.73	QP
10	19.3196	33.68	10.25	43.93	50	-6.07	AVG
11	19.9469	41.11	10.26	51.37	60	-8.63	QP
12	19.9469	28.32	10.26	38.58	50	-11.42	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

Test Voltage :	120Vac, 60Hz	Frequency Range:	0.15-30 MHz
Test Mode :	Normal Link	6dB Bandwidth :	9 kHz
Test Date :	2021/09/24	Phase :	N
Temperature :	26°C	Humidity :	38 %

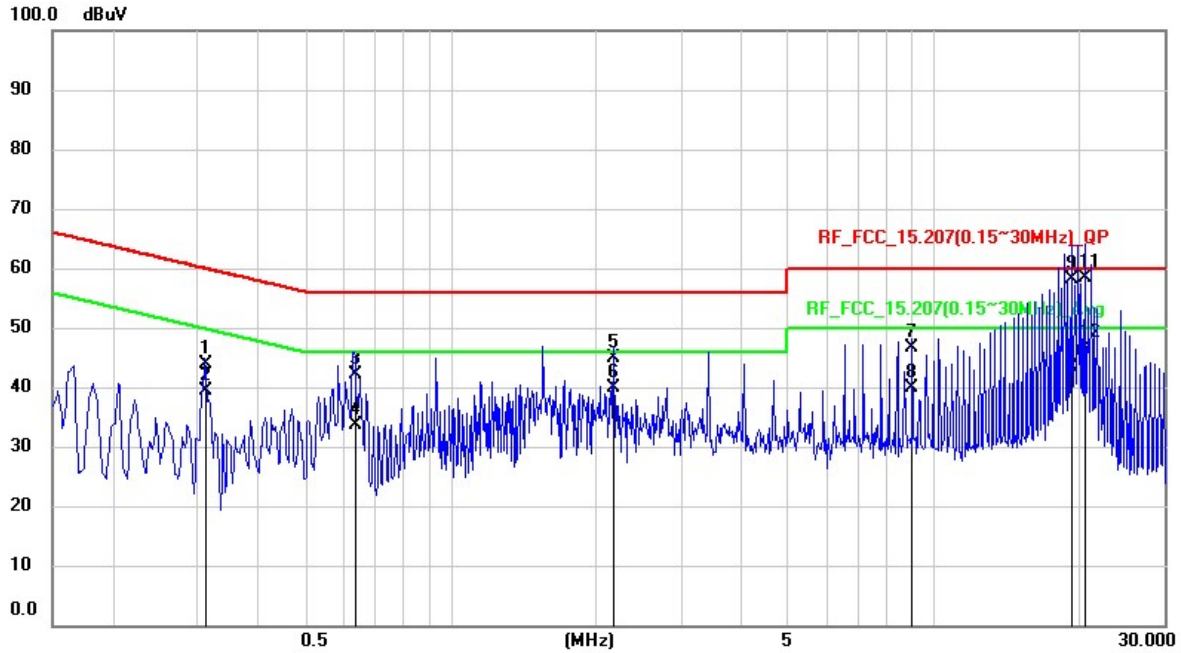

No.	Frequency (MHz)	Reading Level (dBuV)	Correct Factor (dB)	Measurement (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.3116	34.01	9.82	43.83	59.93	-16.1	QP
2	0.3116	29.59	9.82	39.41	49.93	-10.52	AVG
3	0.6393	32.24	9.82	42.06	56	-13.94	QP
4	0.6393	23.87	9.82	33.69	46	-12.31	AVG
5	2.1803	34.89	9.89	44.78	56	-11.22	QP
6	2.1803	30.02	9.89	39.91	46	-6.09	AVG
7	9.0355	36.66	10.04	46.7	60	-13.3	QP
8	9.0355	29.84	10.04	39.88	50	-10.12	AVG
9	19.3224	47.77	10.25	58.02	60	-1.98	QP
10	19.3224	33.25	10.25	43.5	50	-6.5	AVG
11	20.5657	48.1	10.27	58.37	60	-1.63	QP
12	20.5657	36.48	10.27	46.75	50	-3.25	AVG

Remark:

1. QP = Quasi Peak, AVG = Average
2. Correction Factor = Insertion loss of LISN + Cable loss
3. Measurement Value = Reading Level + Correct Factor
4. Margin Level = Measurement Value – Limit Value

--- END ---