



FCC / ISED Test Report

For:
IOSiX, LLC

Model Name:
IO-2110

Product Description:
OBD vehicle data interface with Bluetooth and WiFi connectivity

FCC ID: 2AICQ-2110
IC: 21520-2110

Applied Rules and Standards:
47 CFR Part 15.247 (DTS)
RSS-247 Issue 2 (DTSS) & RSS-Gen Issue 5

REPORT #: EMC_LOOMA-011-22001_15_247_WIFI_DTS

DATE: 12-12-2022



A2LA Accredited

IC recognized #
3462B-1

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecom.com • <http://www.cetecom.com>
CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1	ASSESSMENT.....	3
2	ADMINISTRATIVE DATA	4
2.1	IDENTIFICATION OF THE TESTING LABORATORY ISSUING THE EMC TEST REPORT	4
2.2	IDENTIFICATION OF THE CLIENT	4
2.3	IDENTIFICATION OF THE MANUFACTURER.....	4
3	EQUIPMENT UNDER TEST (EUT).....	5
3.1	EUT SPECIFICATIONS	5
3.2	EUT SAMPLE DETAILS	5
3.3	ACCESSORY EQUIPMENT (AE) DETAILS.....	6
3.4	TEST SAMPLE CONFIGURATION	6
3.5	SOFTWARE USED TO CONFIGURE THE SAMPLES.....	6
3.6	JUSTIFICATION FOR WORST CASE MODE OF OPERATION.....	6
4	SUBJECT OF INVESTIGATION	7
5	MEASUREMENT RESULTS SUMMARY	7
6	MEASUREMENT UNCERTAINTY.....	8
6.1	ENVIRONMENTAL CONDITIONS DURING TESTING:.....	8
6.2	DATES OF TESTING:	8
7	MEASUREMENT PROCEDURES	9
7.1	RADIATED MEASUREMENT.....	9
7.2	POWER LINE CONDUCTED MEASUREMENT PROCEDURE	11
7.3	RF CONDUCTED MEASUREMENT PROCEDURE	11
8	TEST RESULT DATA	12
8.1	MAXIMUM CONDUCTED (AVERAGE) OUTPUT POWER	12
8.2	POWER SPECTRAL DENSITY	16
8.3	BAND EDGE COMPLIANCE	20
8.4	EMISSION BANDWIDTH 6dB AND 99% OCCUPIED BANDWIDTH.....	31
8.5	RADIATED TRANSMITTER SPURIOUS EMISSIONS AND RESTRICTED BANDS	43
9	TEST SETUP PHOTOS	56
10	TEST EQUIPMENT AND ANCILLARIES USED FOR TESTING	56
11	HISTORY	56

1 **Assessment**

The following device was evaluated against the applicable criteria specified in FCC rules Parts 15.247 of Title 47 of the Code of Federal Regulations and the relevant ISED Canada standard RSS-247.

No deviations were ascertained.

Company	Description	Model #
IOSiX, LLC	OBD vehicle data interface with Bluetooth and WiFi connectivity	IO-2110

Responsible for Testing Laboratory:

12-12-2022	Compliance	Arndt Stoecker (Director of Regulatory Services)	
Date	Section	Name	Signature

Responsible for the Report:

12-12-2022	Compliance	Kris Lazarov (Senior EMC Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3.
CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2 Administrative Data

2.1 Identification of the Testing Laboratory Issuing the EMC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Street Address:	411 Dixon Landing Road
City/Zip Code	Milpitas, CA 95035
Country	USA
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Director of Regulatory Services:	Arndt Stoecker
Responsible Project Leader:	Akanksha Baskaran

2.2 Identification of the Client

Client Firm/Name:	IOSiX, LLC
Street Address:	1161 Oak Valley Dr
City/Zip Code	Ann Arbor, MI 48108
Country	USA

2.3 Identification of the Manufacturer

Manufacturer's Name:	Same as Client
Manufacturers Address:	
City/Zip Code	
Country	

3 Equipment Under Test (EUT)

3.1 EUT Specifications

Model No:	IO-2110
HW Version :	5.0b
SW Version :	1.0
FCC-ID :	2AICQ-2110
IC:	21520-2110
FWIN:	-
HVIN:	IO-2110
PMN:	IO-2110
Product Description:	OBD vehicle data interface with Bluetooth and WiFi connectivity
Frequency Range / number of channels:	Nominal band: 2400 MHz – 2483.5 MHz; Center to center: 2412 MHz (ch 1) – 2462 MHz (ch 11), 11 channels
Modes of Operation:	802.11b,g,n
Antenna Information as declared:	Trace antenna Max gain 0.44 dBi
Max. Conducted Output Power:	Average measurement: 15.68 dBm
Power Supply/ Rated Operating Voltage Range:	5-27V DC
Operating Temperature Range	-40 C to 125 C
Other Radios included in the device:	Bluetooth (LE)
Sample Revision	☐ Prototype Unit; ☐ Production Unit; ☒ Pre-Production

3.2 EUT Sample details

EUT #	Serial Number	HW Version	SW Version	Notes/Comments
1	Engineering Sample 1	5.0b	1.0	Conducted
2	Engineering Sample 2	5.0b	1.0	Radiated

3.3 Accessory Equipment (AE) details

AE #	Type	Model	Manufacturer	Serial Number
1	N/A	N/A	N/A	N/A

3.4 Test Sample Configuration

EUT Set-up #	Combination of AE used for test set up	Comments
1	EUT#1	The radio of the EUT was configured to a fixed channel transmission using software that is not available to the end user. The measurement equipment was connected to the 50 ohm RF port of the EUT.
2	EUT#2	The radio of the EUT was configured to a fixed channel transmission using software that is not available to the end user. The internal antenna was connected.

3.5 Software Used to Configure the Samples

- Software date: 2021.11.10
- Version: V2.8
- Storage location: https://www.espressif.com/sites/default/files/tools/ESP_RF_Test_EN.zip

3.6 Justification for Worst Case Mode of Operation

During the testing process, the EUT was tested with transmitter sets to operate at the highest output power mode 802.11b on low, mid and high channels, and 100% duty cycle. For radiated measurements, all data in this report show the worst case between horizontal and vertical antenna polarizations and for all orientations of the EUT. Emissions bandwidth, and Band-edge measurements were conducted for 802.11, b, g and n mode of operation at the data rate producing the highest power spectral density.

4 Subject of Investigation

The objective of the measurements done by CETECOM Inc. was to assess the performance of the EUT according to the relevant requirements specified in FCC rules Part 15.247 of Title 47 of the Code of Federal Regulations and Radio Standard Specification RSS-247 of ISED Canada.

This test report is to support a request for new equipment authorization under the FCC ID: 2AICQ-2110 and IC: 21520-2110.

Testing procedures are based on 558074 D01 15.247 Meas Guidance v05r02 – “GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES” - April 2, 2019, by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.

5 Measurement Results Summary

Test Specification	Test Case	Temperature and Voltage Conditions	Mode	Pass	NA	NP	Result
§15.247(a)(1) RSS-247 5.2(a)	Emission Bandwidth	Nominal	802.11b,g,n	■	□	□	Complies
§15.247(e) RSS-247 5.2(b)	Power Spectral Density	Nominal	802.11b,g,n	■	□	□	Complies
§15.247(b)(3) RSS-247 5.4(d)	Maximum Conducted Output Power and EIRP	Nominal	802.11b,g,n	■	□	□	Complies
§15.247(d) RSS-247 5.5	Band edge compliance Unrestricted Band Edges	Nominal	802.11b,g,n	■	□	□	Complies
§15.247; 15.209; 15.205 RSS-Gen 8.9; 8.10	Band edge compliance Restricted Band Edges	Nominal	802.11b,g,n	■	□	□	Complies
§15.247(d); §15.209 RSS-Gen 6.13	TX Spurious emissions- Radiated	Nominal	802.11b	■	□	□	Complies
§15.207(a) RSS Gen 8.8	AC Conducted Emissions	Nominal	N/A	□	■	□	Complies

Note: NA= Not Applicable; NP= Not Performed.

6 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus, with 95% confidence interval (in dB delta to result), based on a coverage factor k=2.

Measurement System	EMC 1	EMC 2
Conducted emissions (mains port)	1.12 dB	0.46 dB
Radiated emissions (< 30 MHz)	3.66 dB	3.88 dB
(30 MHz – 1GHz)	3.17 dB	3.34 dB
(1 GHz – 3 GHz)	5.01 dB	4.45 dB
(>3 GHz)	4.0 dB	4.79 dB

6.1 Environmental Conditions During Testing:

The following environmental conditions were maintained during the course of testing:

- Ambient Temperature: 20-25° C
- Relative humidity: 40-60%

6.2 Dates of Testing:


10/17/2022 – 12/12/2022

7 Measurement Procedures


7.1 Radiated Measurement

The radiated measurement is performed according to ANSI C63.10 (2013)


- The exploratory measurement is accomplished by running a matrix of 16 sweeps over the required frequency range with R&S Test-SW EMC32 for 4 positions of the turntable, two orthogonal positions of the EUT and both antenna polarizations. This procedure exceeds the requirement of the above standards to cover the 3 orthogonal axis of the EUT. A max peak detector is utilized during the exploratory measurement. The Test-SW creates an overall maximum trace for all 12 sweeps and saves the settings for each point of this trace. The maximum trace is part of the test report.
- The 10 highest emissions are selected with an automatic algorithm of EMC32 searching for peaks in the noise floor and ensuring that broadband signals are not selected multiple times.
- The maxima are then put through the final measurement and again maximized in a 90deg range of the turntable, fine search in frequency domain and height scan between 1m and 4m.
- The above procedure is repeated for all possible ways of power supply to EUT and for all supported modulations.
- In case there are no emissions above noise floor level only the maximum trace is reported as described above.
- The results are split up into up to 4 frequency ranges due to antenna bandwidth restrictions. A magnetic loop is used from 9 kHz to 30 MHz, a Biconilog antenna is used from 30 MHz to 1 GHz, and two different horn antennas are used to cover frequencies up to 40 GHz.

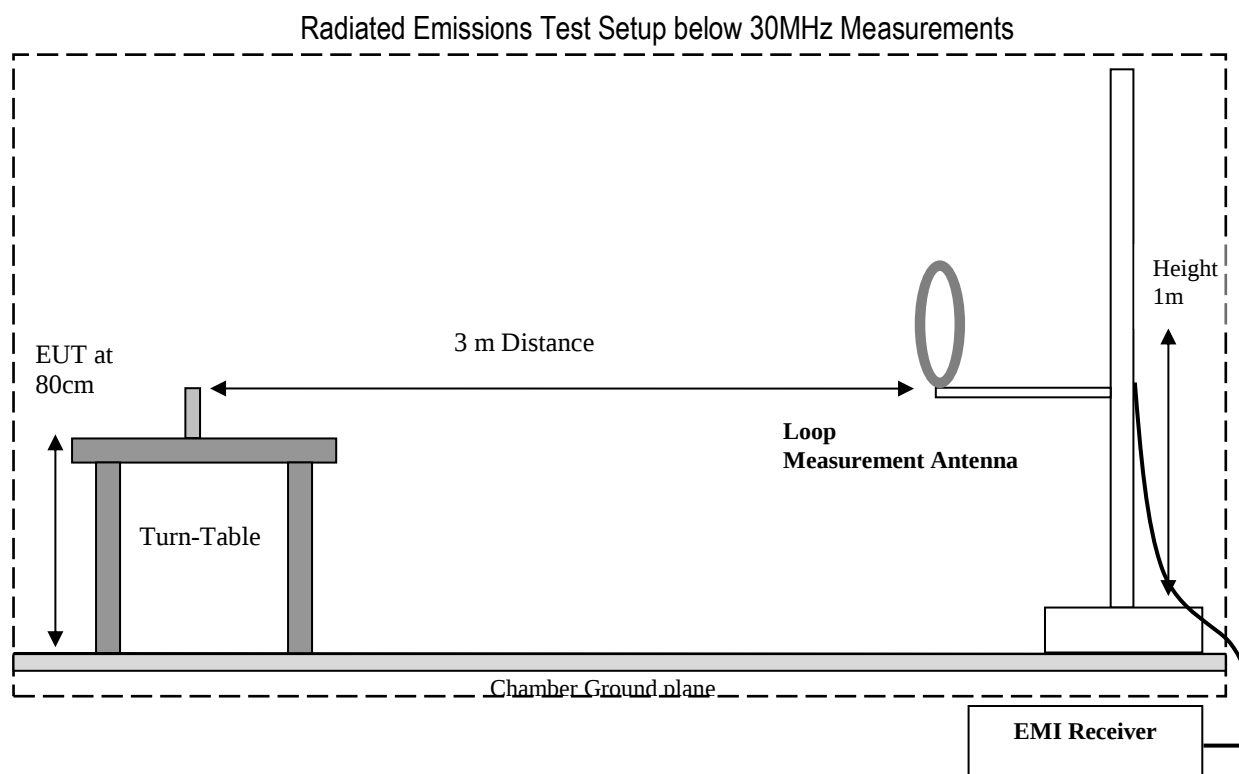

Radiated Emissions Test Setup 30MHz-1GHz Measurements

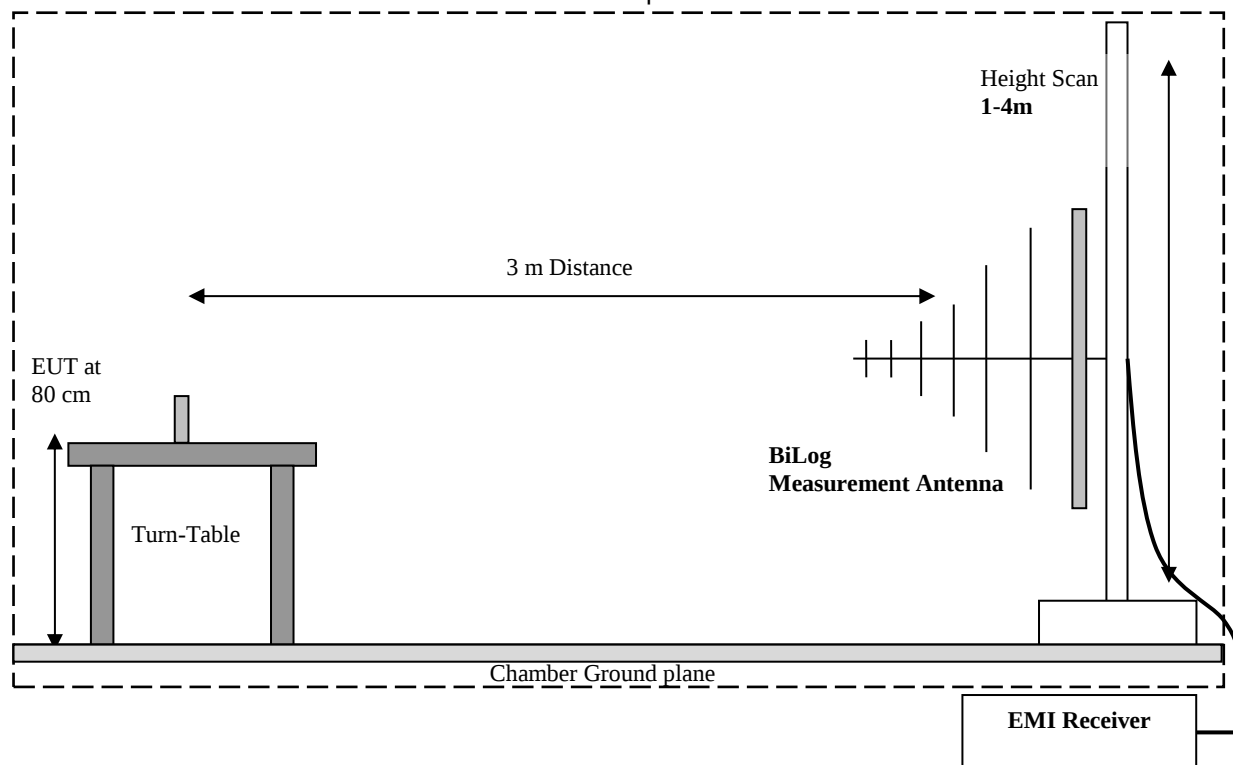

Radiated Emissions Test Setup above 1GHz Measurements

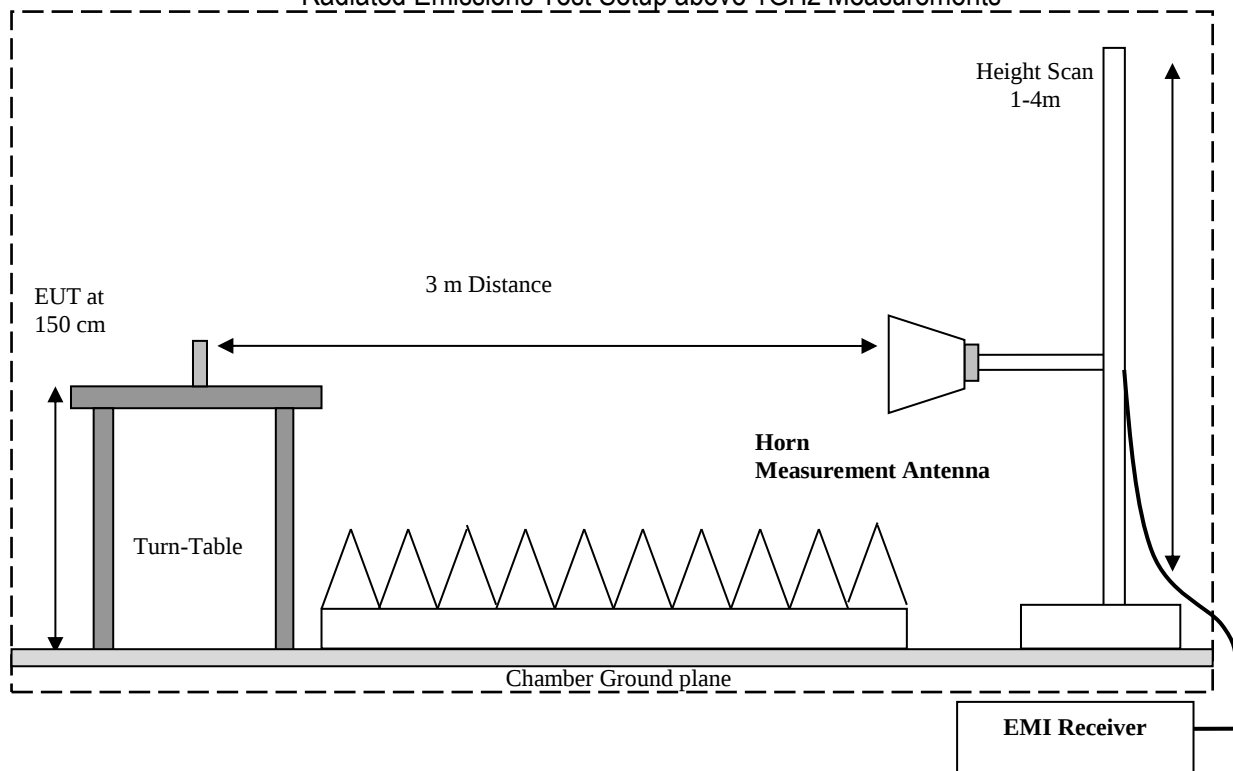

7.1.1 Sample Calculations for Field Strength Measurements

Field Strength is calculated from the Spectrum Analyzer/ Receiver readings, taking into account the following parameters:

1. Measured reading in dB μ V
2. Cable Loss between the receiving antenna and SA in dB and
3. Antenna Factor in dB/m

All radiated measurement plots in this report are taken from a test SW that calculates the Field Strength based on the following equation:

$$FS \text{ (dB}\mu\text{V/m)} = \text{Measured Value on SA (dB}\mu\text{V)} + \text{Cable Loss (dB)} + \text{Antenna Factor (dB/m)}$$

Example:

Frequency (MHz)	Measured SA (dB μ V)	Cable Loss (dB)	Antenna Factor Correction (dB)	Field Strength Result (dB μ V/m)
1000	80.5	3.5	14	98.0

7.2 Power Line Conducted Measurement Procedure

AC Power Line conducted emissions measurements performed according to: ANSI C63.4 (2014)

7.3 RF Conducted Measurement Procedure

Testing procedures are based on 558074 D01 15.247 Meas Guidance v05r02 – “GUIDANCE FOR COMPLIANCE MEASUREMENTS ON DIGITAL TRANSMISSION SYSTEM, FREQUENCY HOPPING SPREAD SPECTRUM SYSTEM, AND HYBRID SYSTEM DEVICES OPERATING UNDER SECTION 15.247 OF THE FCC RULES” - April 2, 2019, by the Federal Communications Commission, Office of Engineering and Technology, Laboratory Division.



- Connect the equipment as shown in the above diagram.
- Adjust the settings of the SA (Rohde-Schwarz Spectrum Analyzer) to connect the EUT at the required mode of test.
- Measurements are to be performed with the EUT set to the low, middle and high channels and for worst case modulation schemes.

8 Test Result Data

8.1 Maximum Conducted (Average) Output Power

8.1.1 Measurement according to ANSI C63.10 (2013), 11.9.2.2.2

Spectrum Analyzer settings:

- RBW = 1% to 5% of the OBW, not to exceed 1 MHz
- VBW $\geq 3 \times$ RBW
- Span ≥ 1.5 times the OBW
- Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
- Sweep = Auto couple
- Detector function = RMS
- Trace = Trace average at least 100 traces in power averaging (rms) mode
- Compute power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function with band limits set equal to the OBW band edges

8.1.2 Limits:

Maximum Output Power:

- FCC §15.247 (b)(1): 1 W
- IC RSS-247: 1 W

8.1.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Measurement Path Loss	Antenna Gain
20°C	1	802.11b,g,n	25.4 dB	0.44 dBi


8.1.4 Measurement result:


Mode	Maximum Conducted Power CH1 (dBm)	Maximum Conducted Power CH1 (W)	Maximum Conducted Power CH6 (dBm)	Maximum Conducted Power CH6 (W)	Maximum Conducted Power CH11 (dBm)	Maximum Conducted Power CH11 (W)	Limit (W)	Result
b_11Mbit	14.60	0.029	15.32	0.034	15.68	0.037	1	Pass
g_6Mbit	13.05	0.021	13.86	0.024	14.42	0.028	1	Pass
n_MCS1	12.61	0.018	13.60	0.023	14.12	0.026	1	Pass

8.1.5 Measurement Plots:

Only the plots for the highest power conducted measurements in 802.11b mode are included in this test report for example.

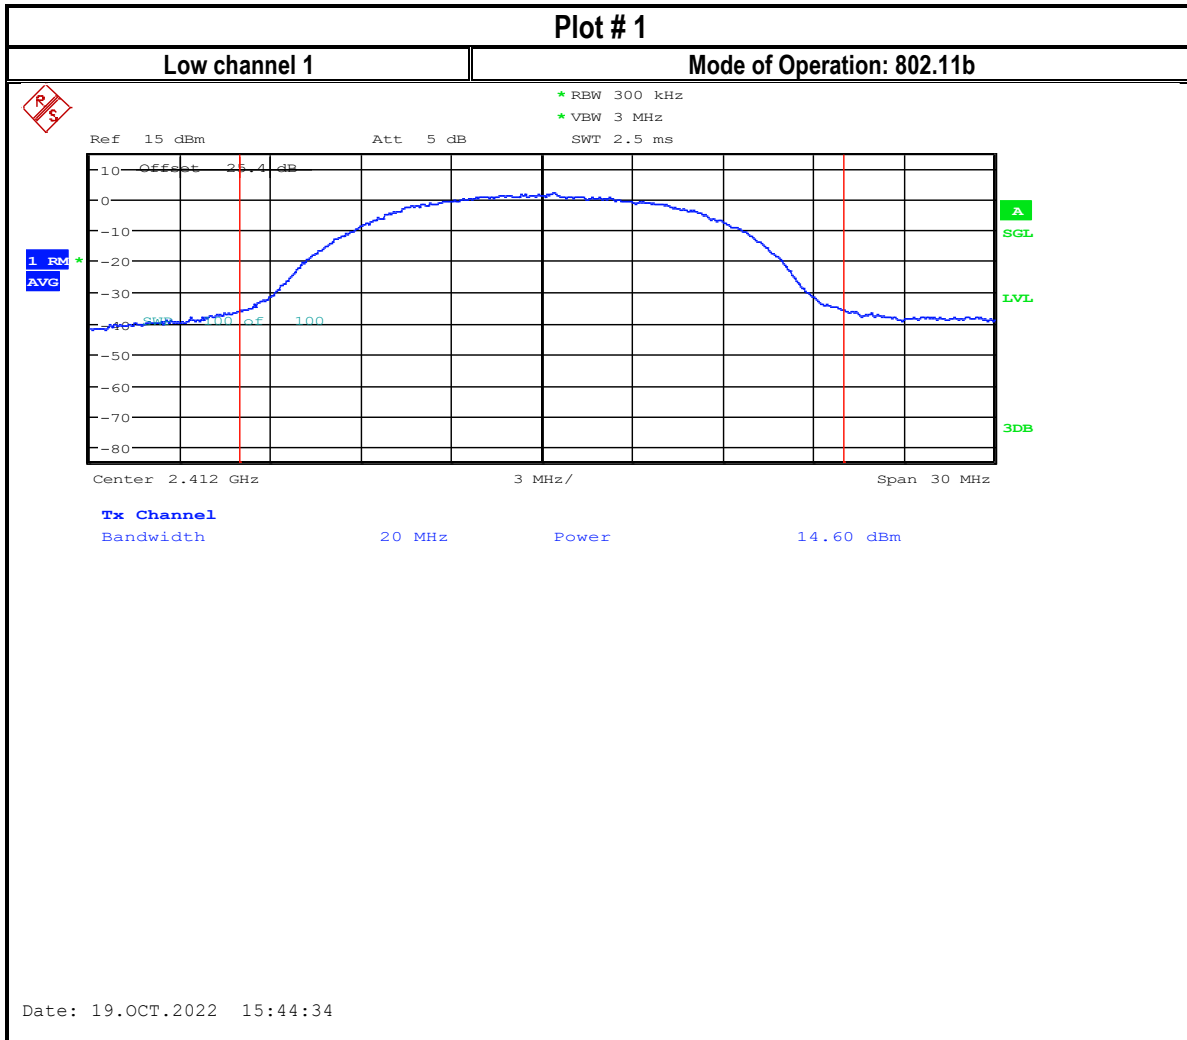

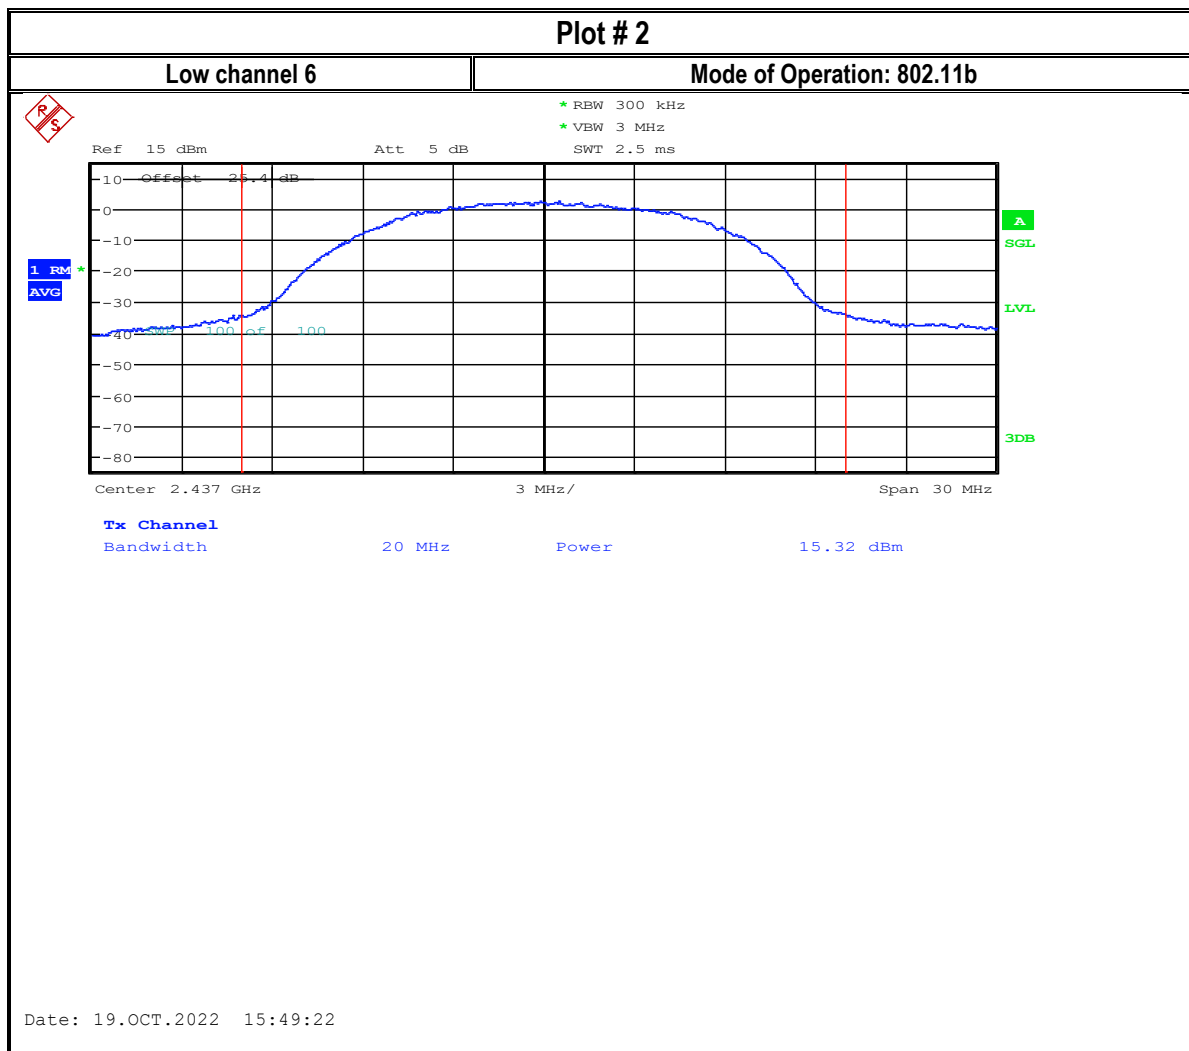

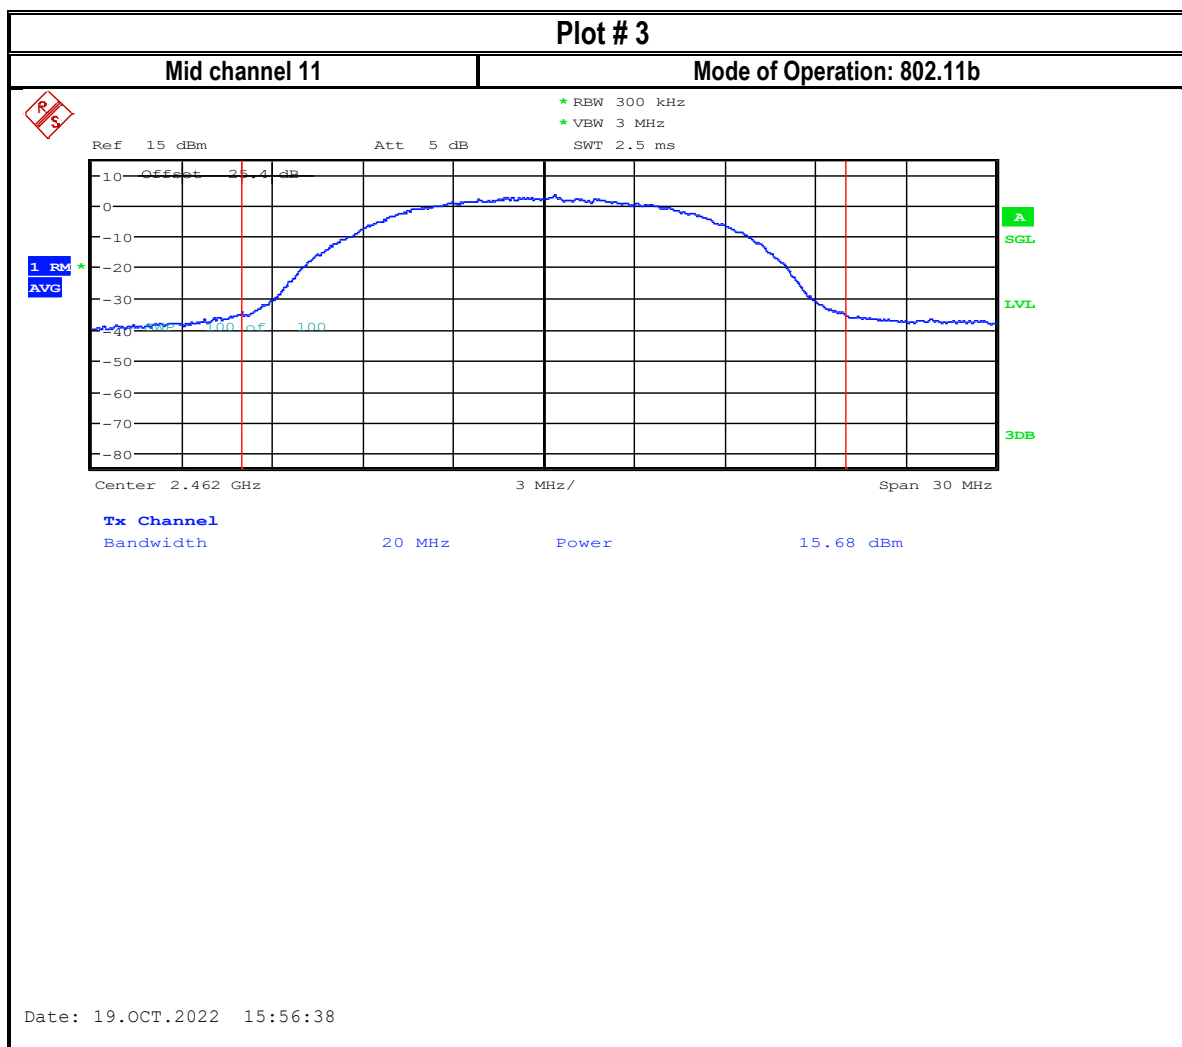

Date: 19.OCT.2022 15:56:38

8.2 Power Spectral Density

8.2.1 Measurement according to ANSI C63.10-2013 11.10.2.

Spectrum Analyzer settings:

- Set analyzer center frequency to DTS channel center frequency
- Set the span to 1.5 x DTS bandwidth
- Set RBW to: $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$
- Set the VBW $\geq 3 \times \text{RBW}$
- Detector = Peak
- Sweep time = Auto couple
- Trace mode = Max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum amplitude level within the RBW
- If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat

8.2.2 Limits:

FCC §15.247(e) & RSS-247 5.2(b):

- For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

8.2.3 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Measurement Path Loss	Antenna Gain
20°C	1	802.11b,g,n	25.4 dB	0.44 dBi


8.2.4 Measurement result:


Data Rate	Measured PSD CH 1 (dBm/3kHz)	Measured PSD CH 6 (dBm/3kHz)	Measured PSD CH 11 (dBm/3kHz)	Limit (dBm/3kHz)	Result
11 Mbit	-9.08	-8.08	-8.17	8	Pass
6 Mbit	-13.68	-13.15	-12.51	8	Pass
MCS1	-13.64	-12.84	-12.81	8	Pass

8.2.5 Measurement Plots:

Only the plots for the highest power spectral density measurements in 802.11b mode are included in this test report for example.

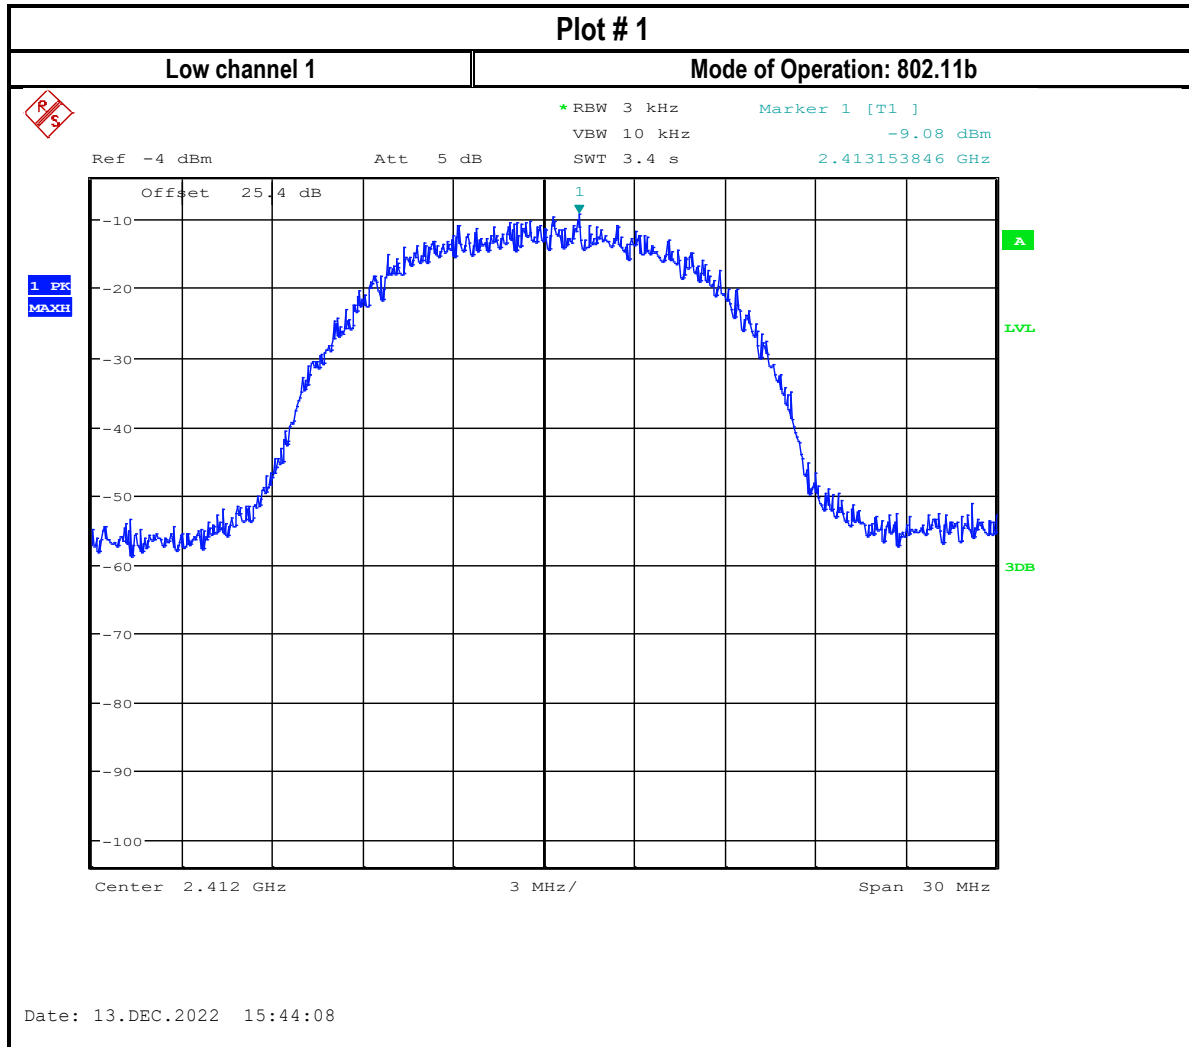

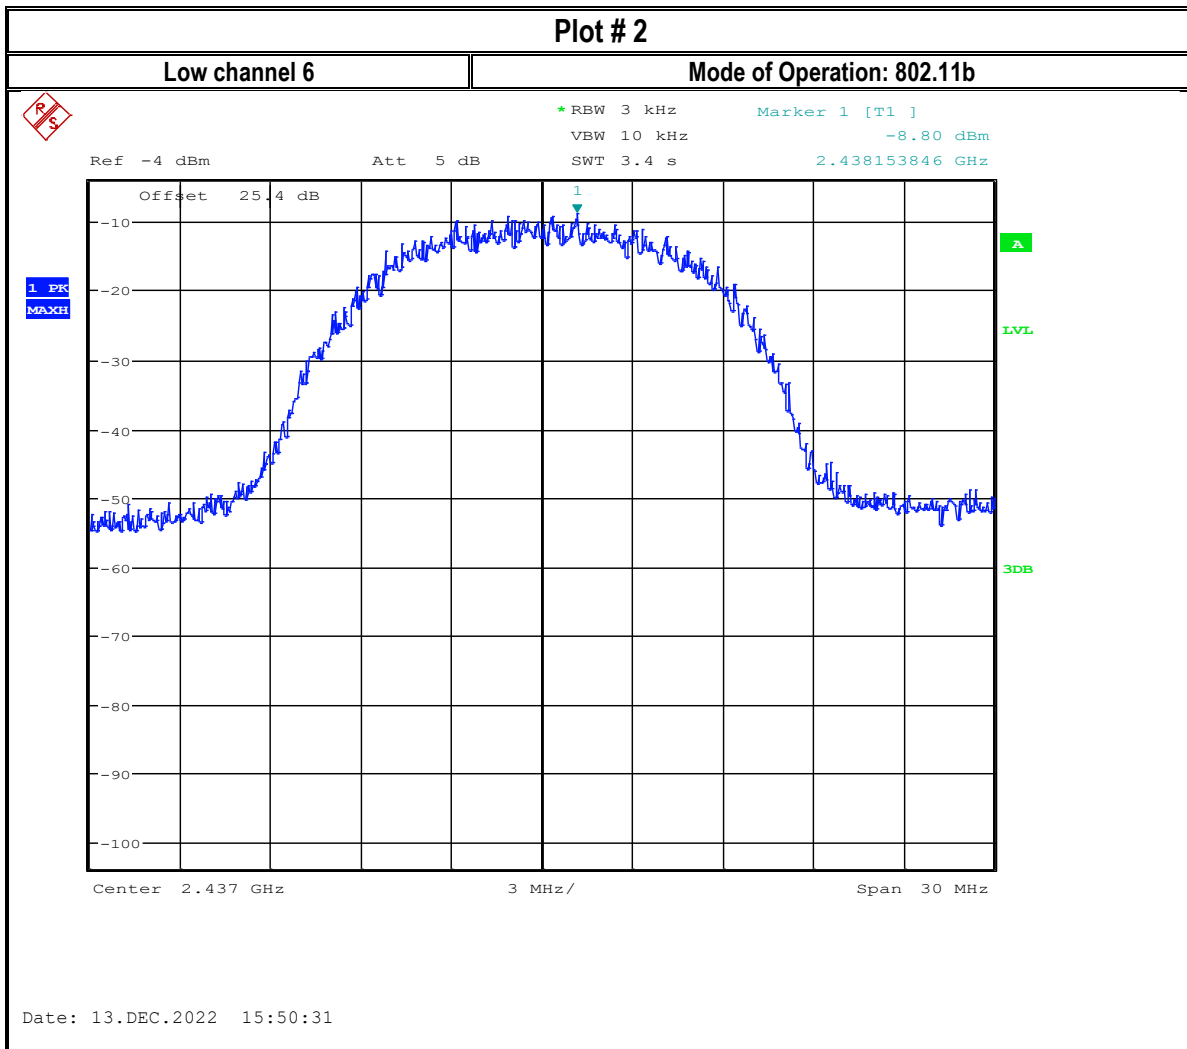

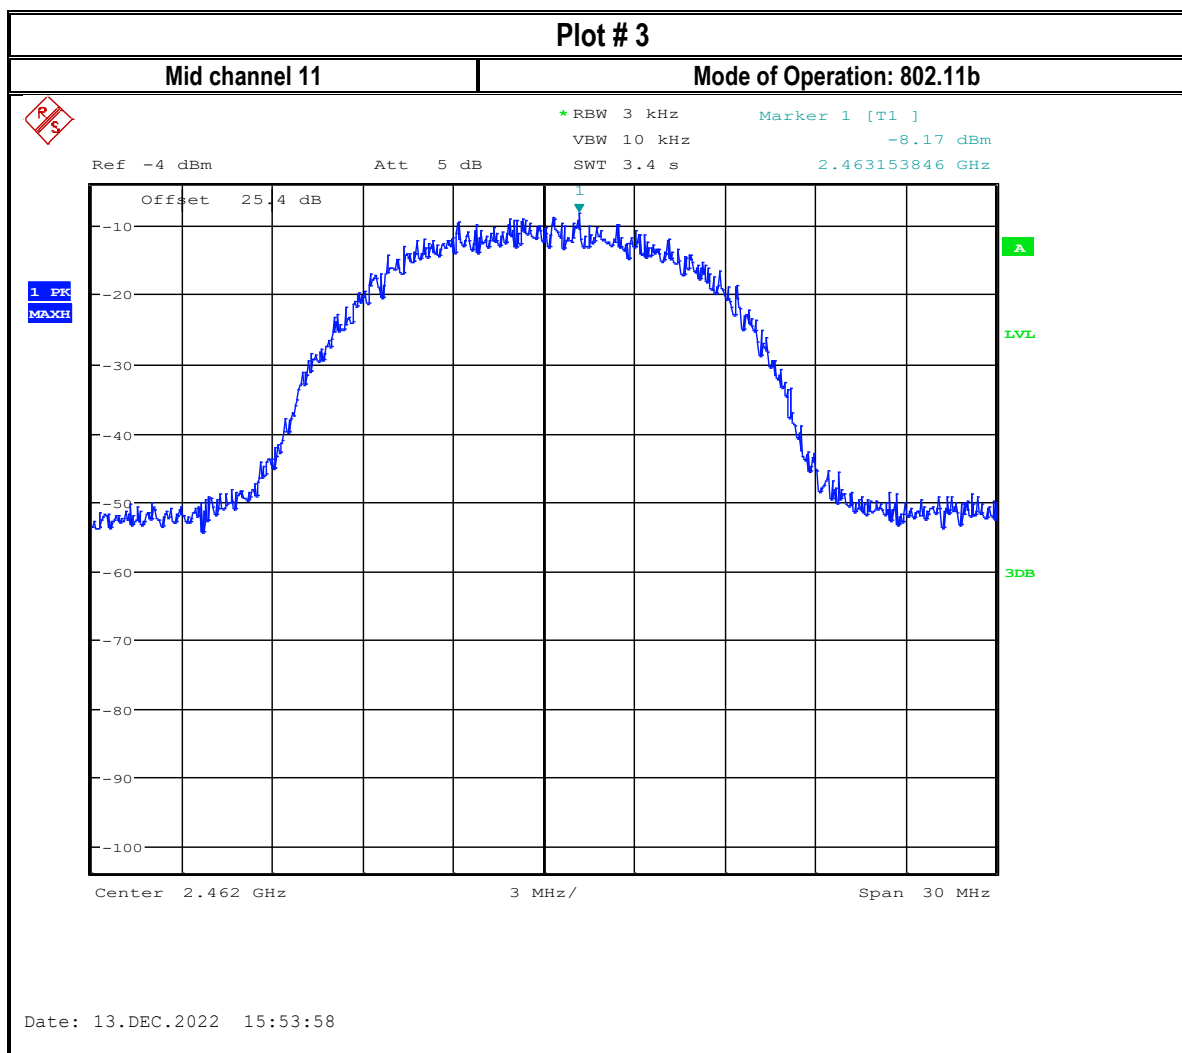

8.3 Band Edge Compliance

8.3.1 Measurement according to FCC 558074 D01 15.247 Meas Guidance v05r02

- Lower non-restricted band edge was measured conductively
- Upper restricted band edge was measured radiated at 3 m distance

Spectrum Analyzer settings for non-restricted band edge ANSI 63.10 Section 11.11:

- Set the center frequency and span to encompass frequency range to be measured
- RBW = 100 kHz
- VBW $\geq 3 \times$ RBW
- Sweep Time: Auto couple
- Detector = Peak
- Trace = Max hold
- Allow trace to fully stabilize
- Use the peak marker function to determine the maximum amplitude level
- Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge

Spectrum Analyzer settings for restricted band radiated measurements ANSI 63.10 Section 11.12.1:

- RBW=1 MHz
- Detector Peak / RMS

8.3.2 Limits non restricted band:

FCC§15.247 (d)

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

RSS-247 5/5

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30dB instead of 20dB.

8.3.3 Limits restricted band §15.247/15.209/15.205 and RSS-Gen 8.9/8.10

- *PEAK LIMIT= 74 dBμV/m @3m
- *AVG. LIMIT= 54 dBμV/m @3m
- Start frequency & stop frequency according to frequency range specified in the restricted band table in FCC section 15.205 & RSS-Gen 8.10
- Measurements with a peak detector were used to show compliance to average limits, thus showing compliance to both peak and average limits.

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			


8.3.4 Test conditions and setup:


Ambient Temperature	EUT Set-Up #	EUT operating mode	Measurement Path Loss	Antenna Gain
20°C	1	802.11n	25.4 dB	0.44 dBi


8.3.5 Measurement result:


Plot #	Operating Mode	Band Edge	Band Edge Delta (dBc)	Limit (dBc)	Result
1	802.11b	Lower, Non-restricted	43.24	>30	Pass
2	802.11g	Lower, Non-restricted	31.14	>30	Pass
3	802.11n	Lower, Non-restricted	32.43	>30	Pass

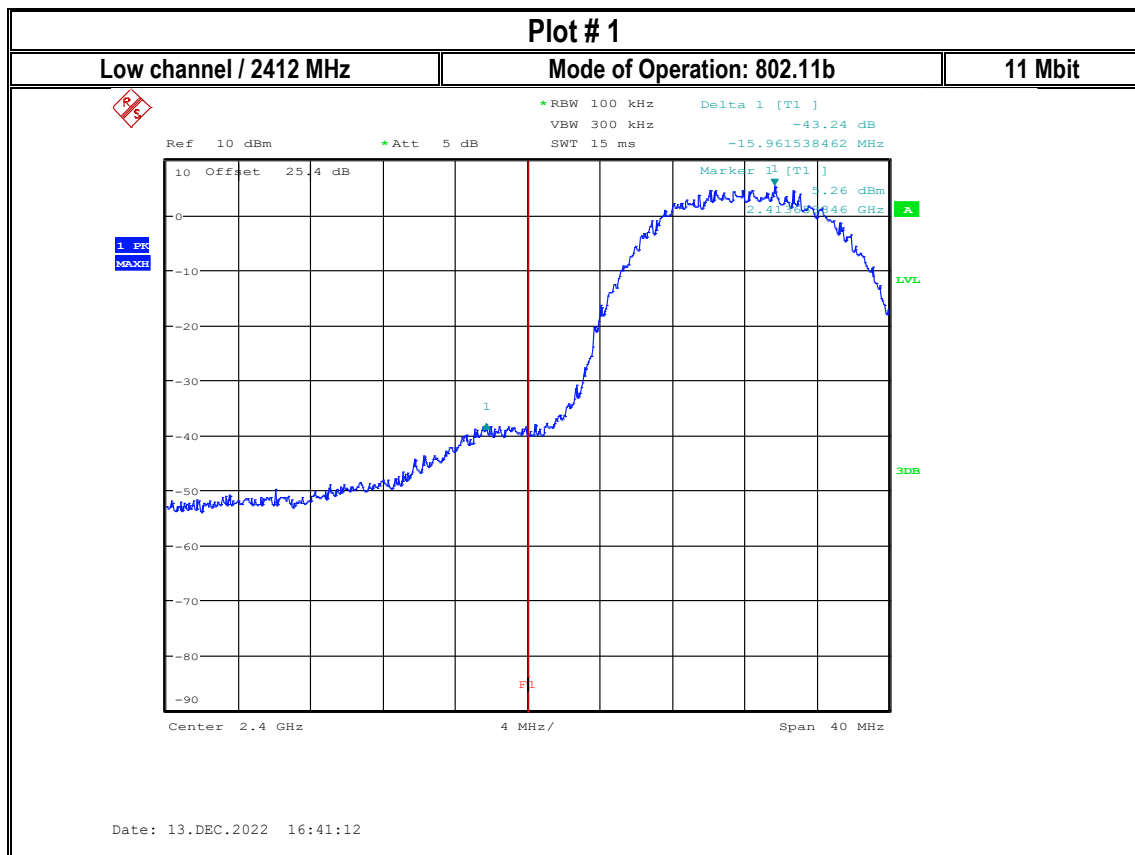


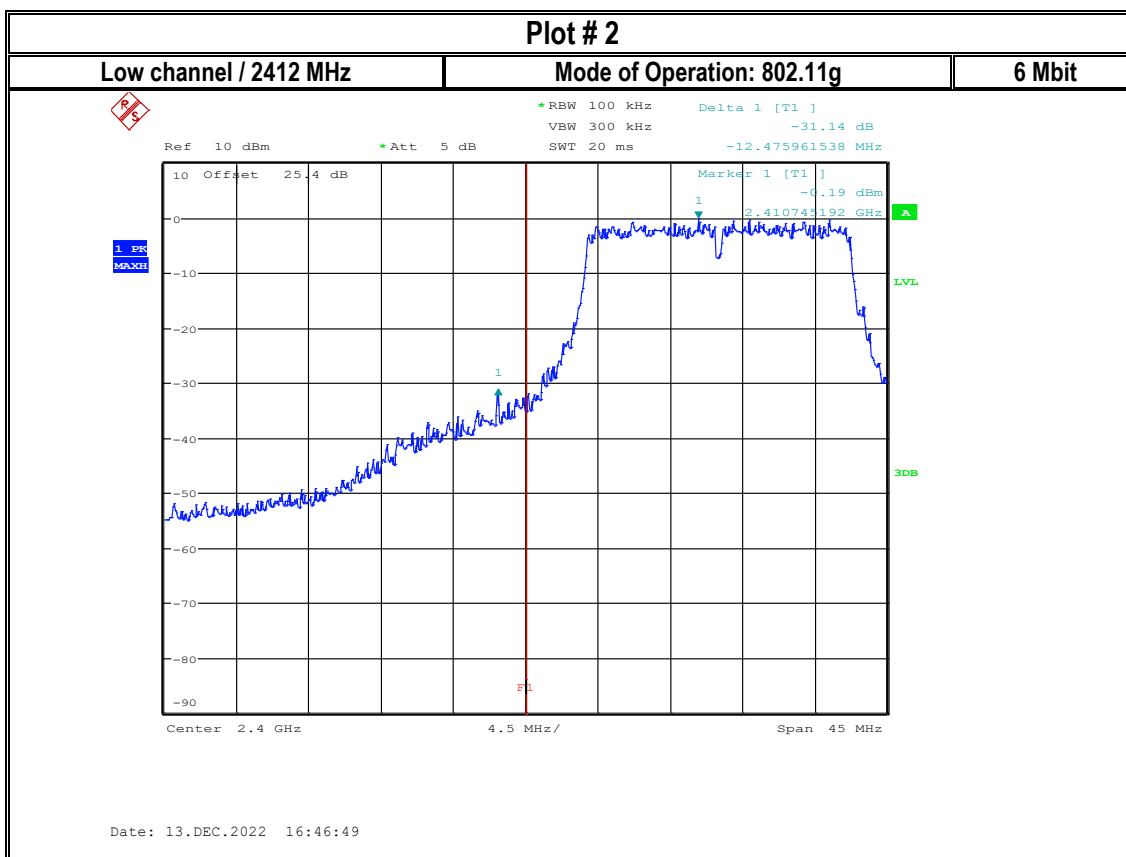


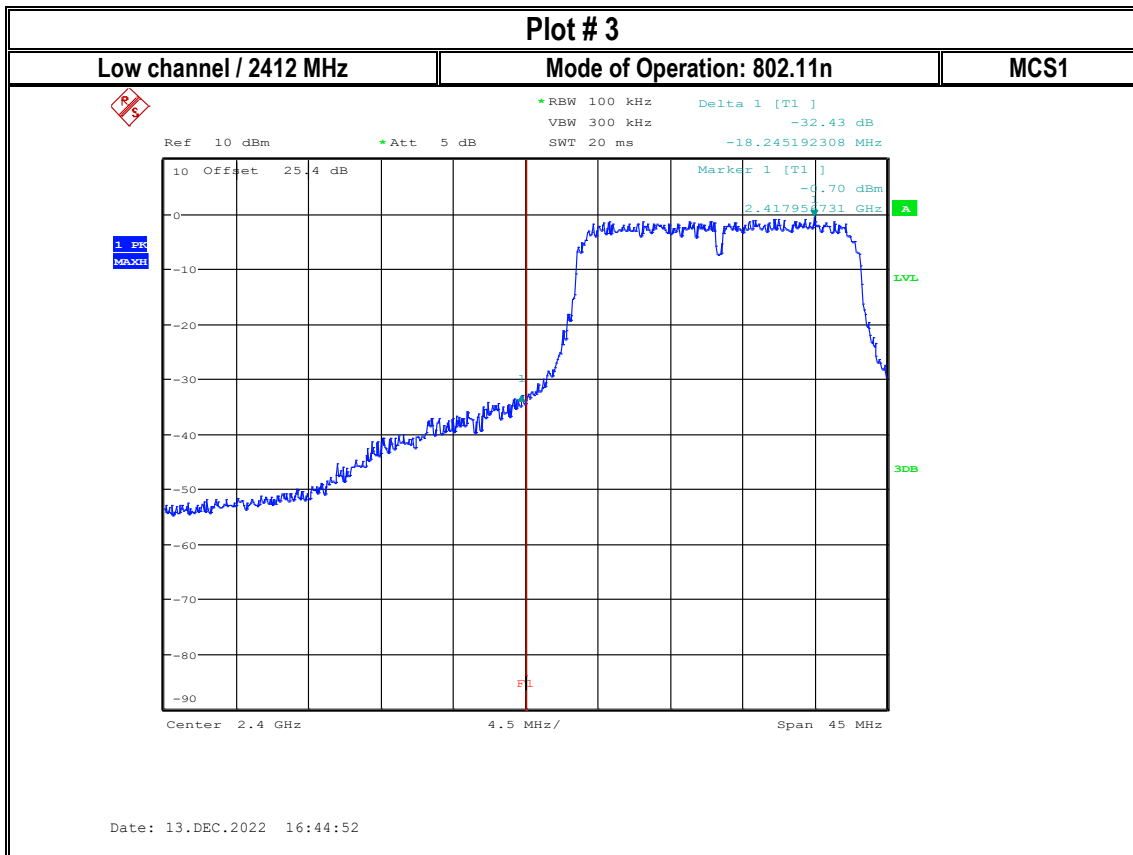


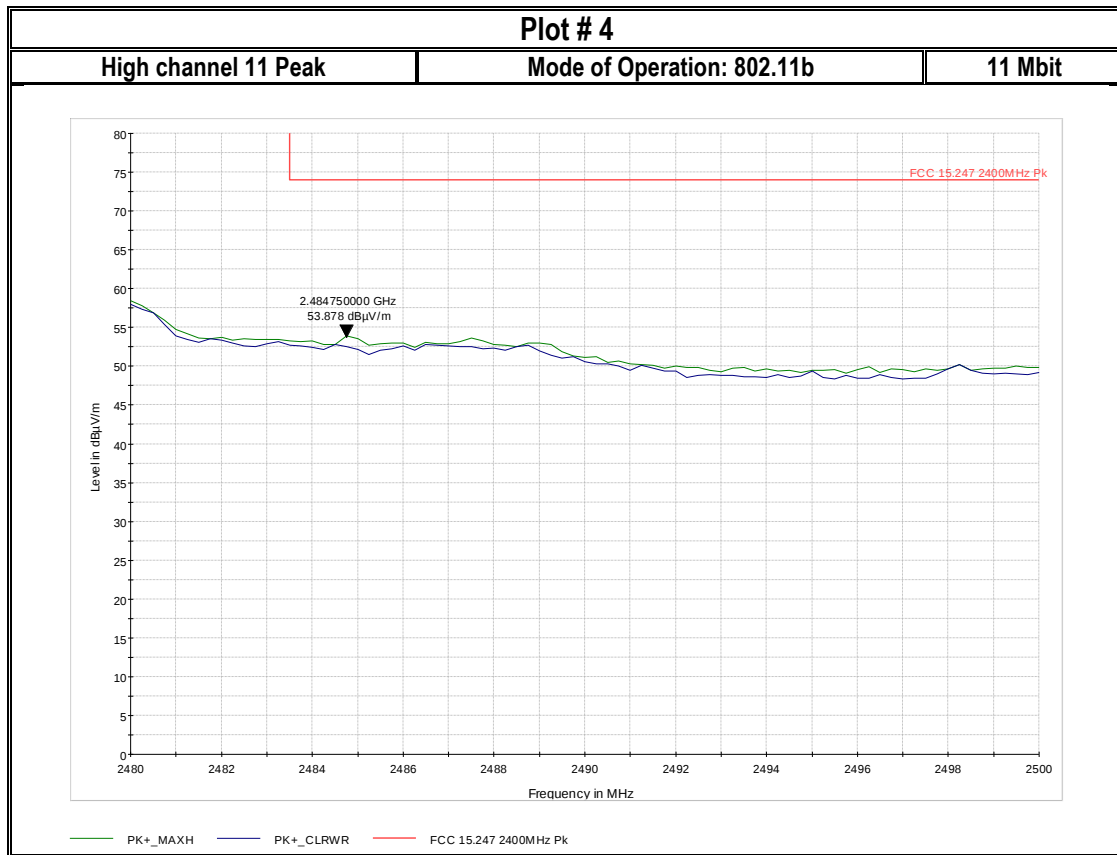


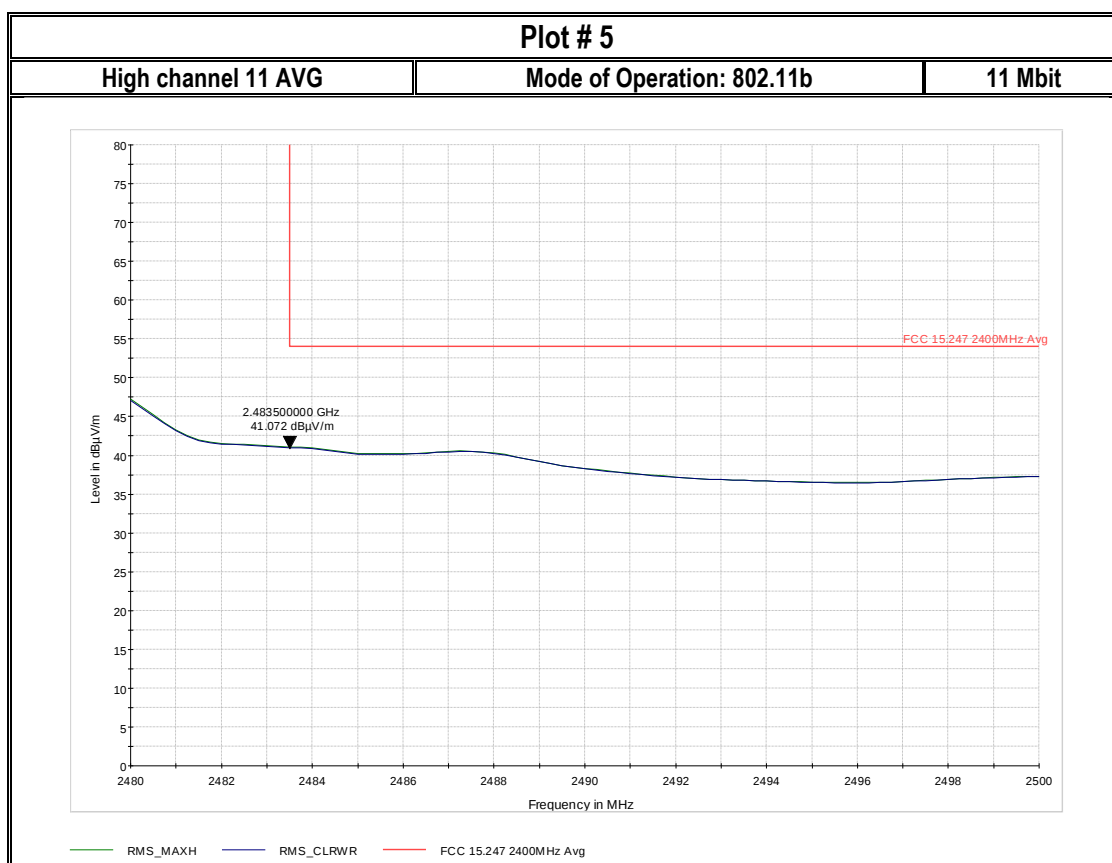

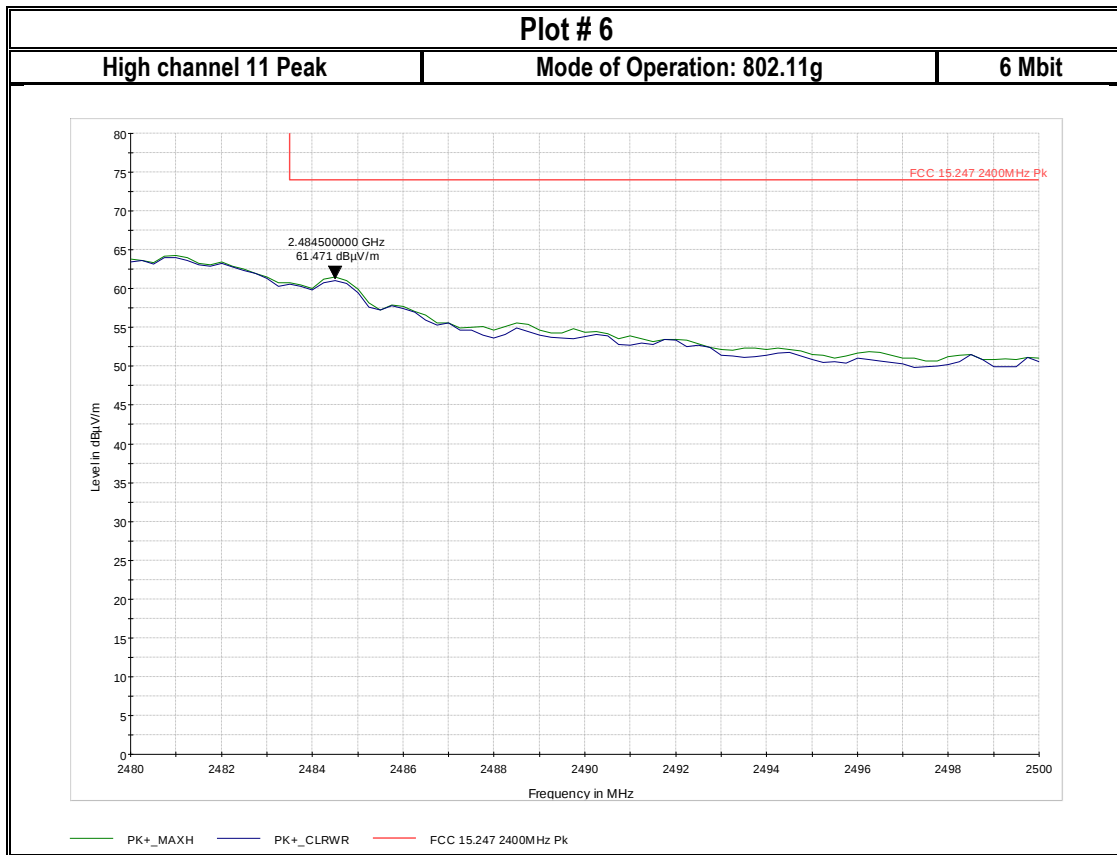

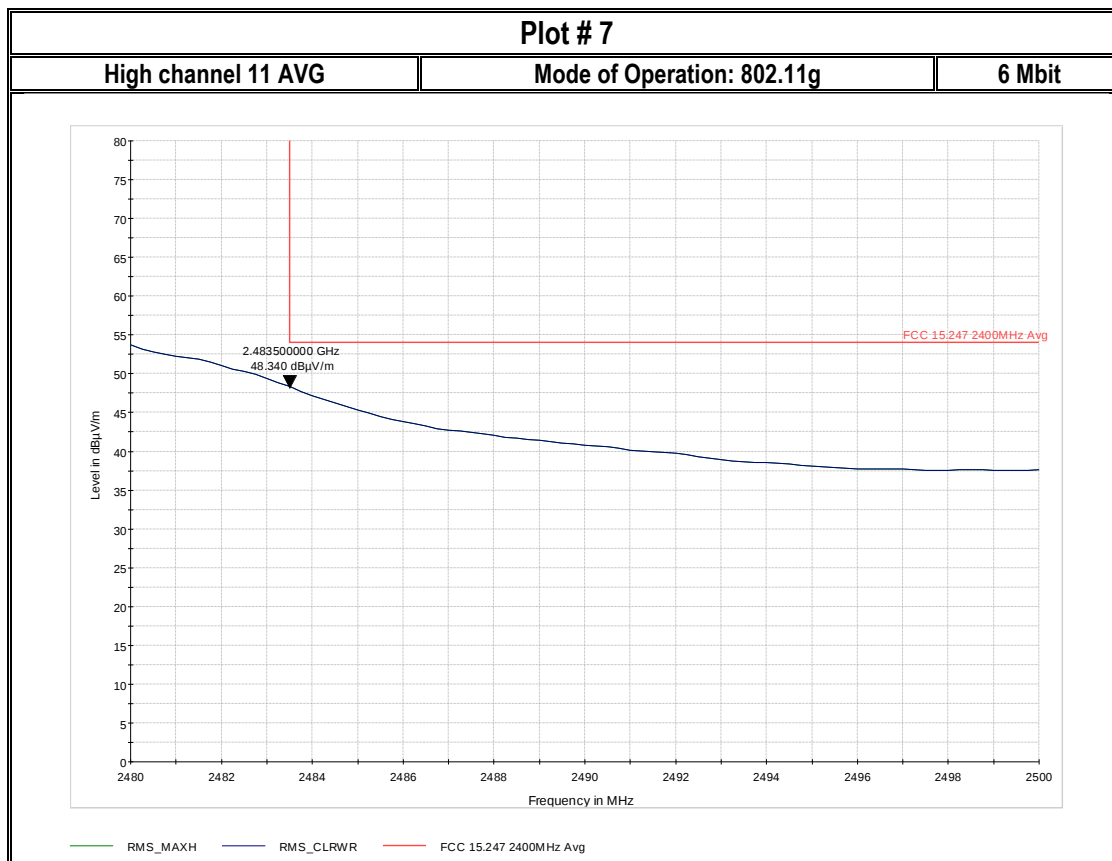

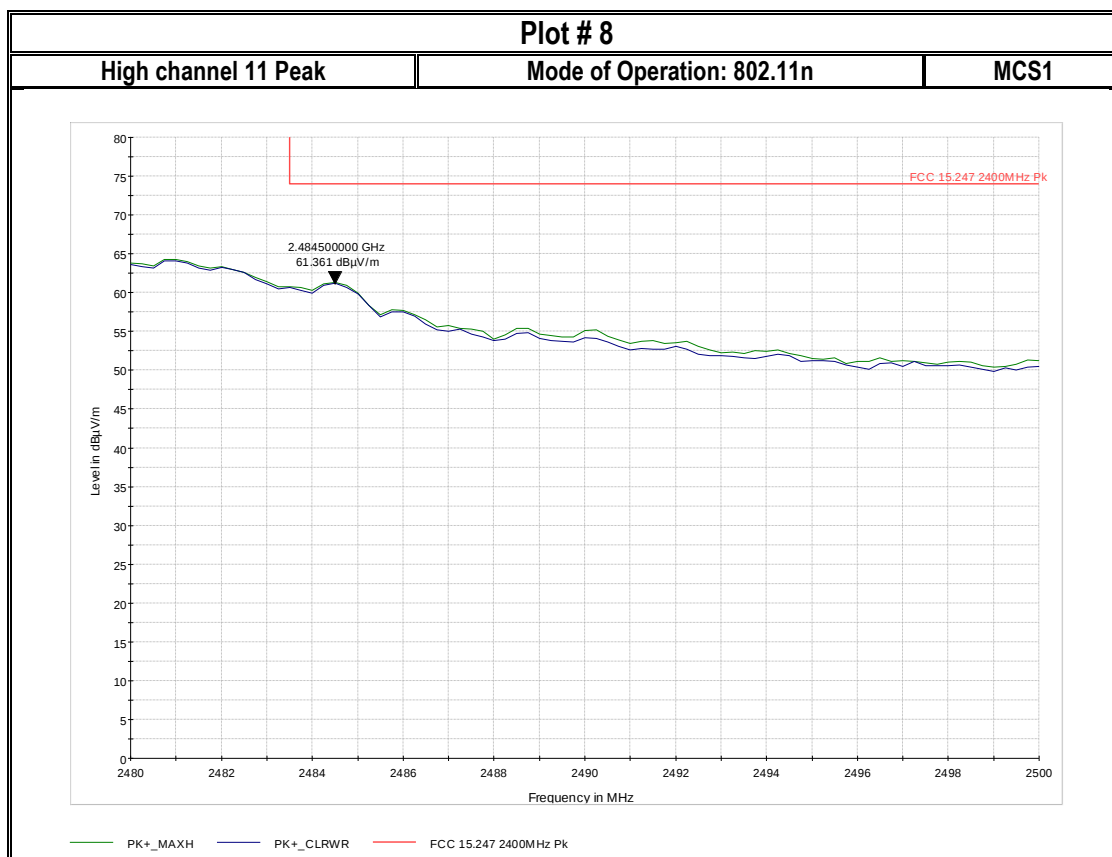

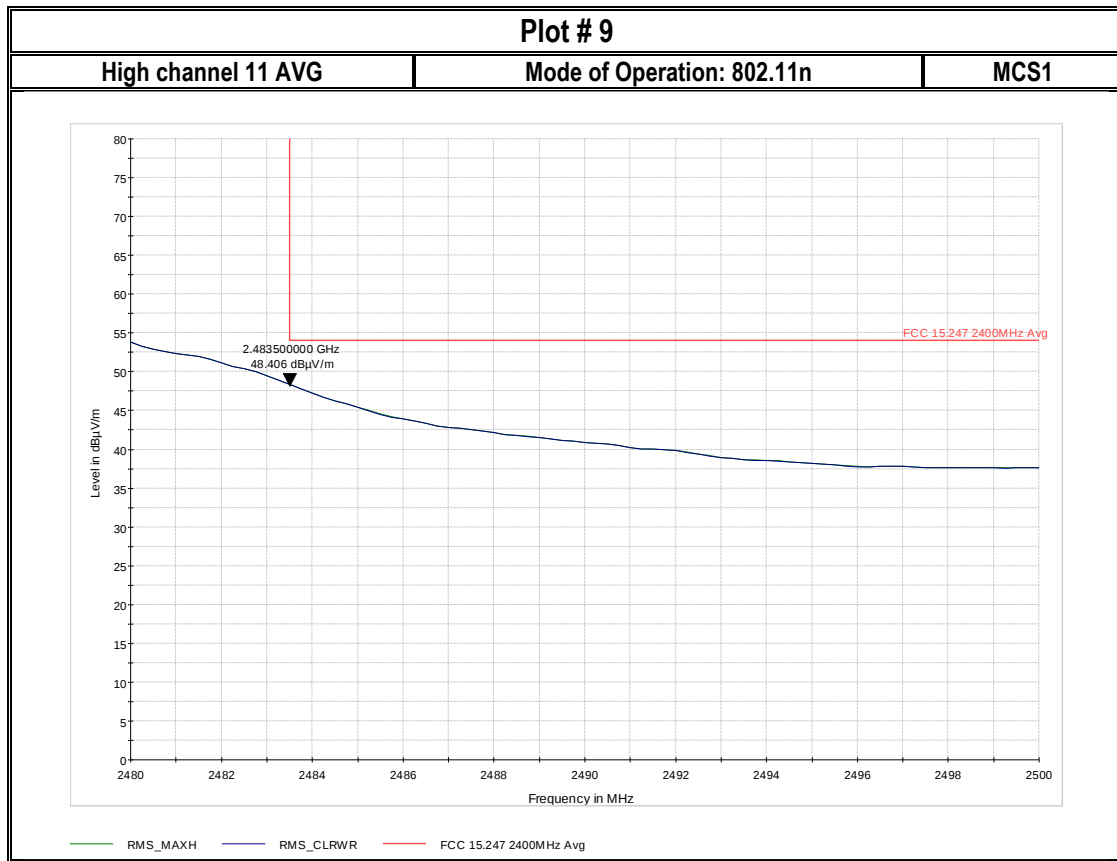

8.4 Emission Bandwidth 6dB and 99% Occupied Bandwidth

8.4.1 Measurement according to ANSI C63.10-2013 11.8.

Spectrum Analyzer settings:

6dB (DTS) Bandwidth:

- Set RBW = 100 kHz
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep = Auto couple
- Allow the trace to stabilize
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

99% Occupied Bandwidth:

- Set frequency = nominal EUT channel center frequency
- Set Span = 1.5 x to 5.0 x OBW
- Set RBW = 1% to 5% of OBW
- Set the video bandwidth (VBW) $\approx 3 \times$ RBW
- Detector = Peak
- Trace mode = Max hold
- Sweep = Auto couple
- Allow the trace to stabilize
- Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth
- If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.

8.4.2 Limits:

FCC §15.247(a)(2) and RSS-247 5.2(a)

- Systems using digital modulation techniques may operate in the 2400–2483.5 MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.

8.4.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Measurement Path Loss
20°C	1	802.11b,g,n	25.4 dB



8.4.4 Measurement result:



Plot #	Frequency (MHz)	EUT Operating Mode	6dB Emission Bandwidth (MHz)	Limit (MHz)	Result
1	2412	802.11b	9.71	> 0.5	Pass
2	2437	802.11b	9.62	> 0.5	Pass
3	2462	802.11b	9.71	> 0.5	Pass
4	2412	802.11g	16.54	> 0.5	Pass
5	2437	802.11g	16.54	> 0.5	Pass
6	2462	802.11g	16.44	> 0.5	Pass
7	2412	802.11n HT20	16.97	> 0.5	Pass
8	2437	802.11n HT20	17.02	> 0.5	Pass
9	2462	802.11n HT20	17.45	> 0.5	Pass



Plot #	Frequency (MHz)	EUT Operating Mode	99% Occupied Bandwidth (MHz)	Limit (MHz)	Result
10	2412	802.11b	13.27	> 0.5	Pass
11	2437	802.11b	13.32	> 0.5	Pass
12	2462	802.11b	13.27	> 0.5	Pass
13	2412	802.11g	16.73	> 0.5	Pass
14	2437	802.11g	16.73	> 0.5	Pass
15	2462	802.11g	16.73	> 0.5	Pass
16	2412	802.11n HT20	17.50	> 0.5	Pass
17	2437	802.11n HT20	17.55	> 0.5	Pass
18	2462	802.11n HT20	17.55	> 0.5	Pass



8.4.5 Measurement Plots:


6 dB Emission Bandwidth

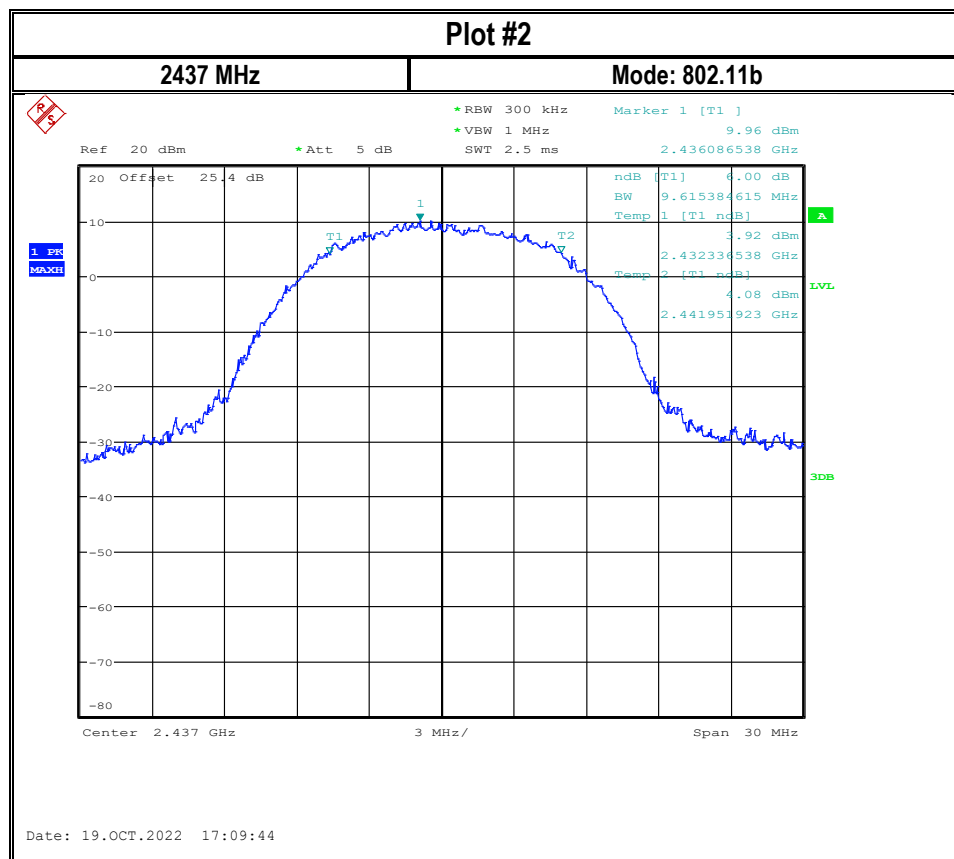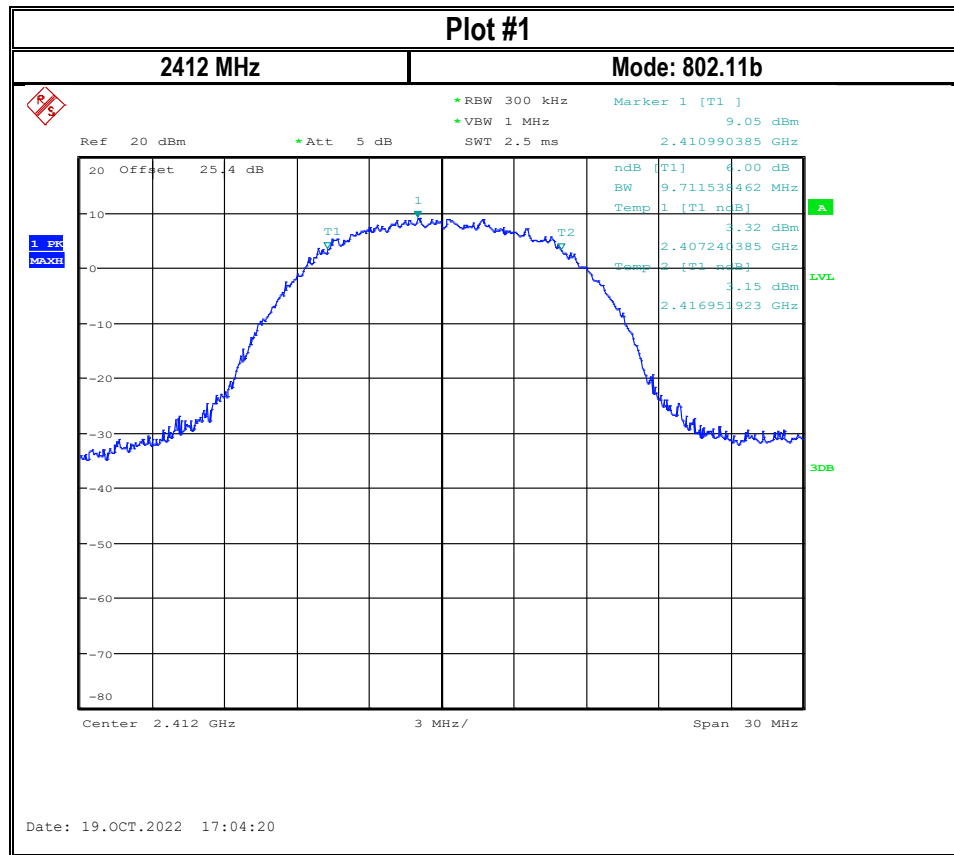

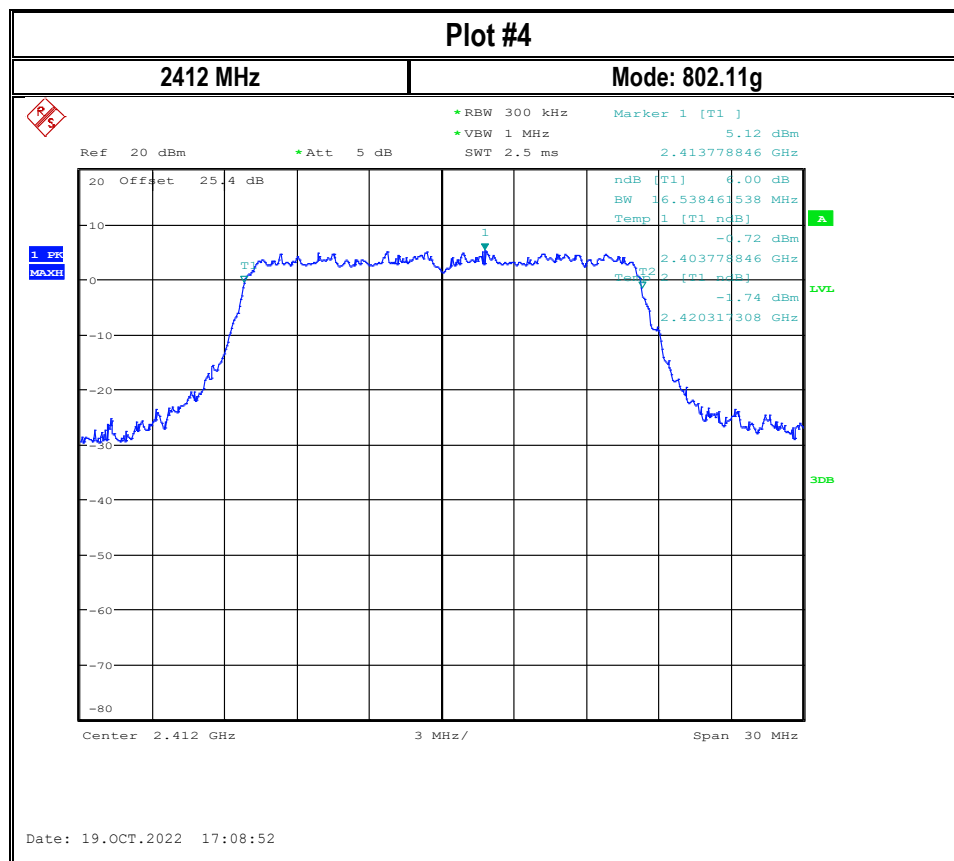
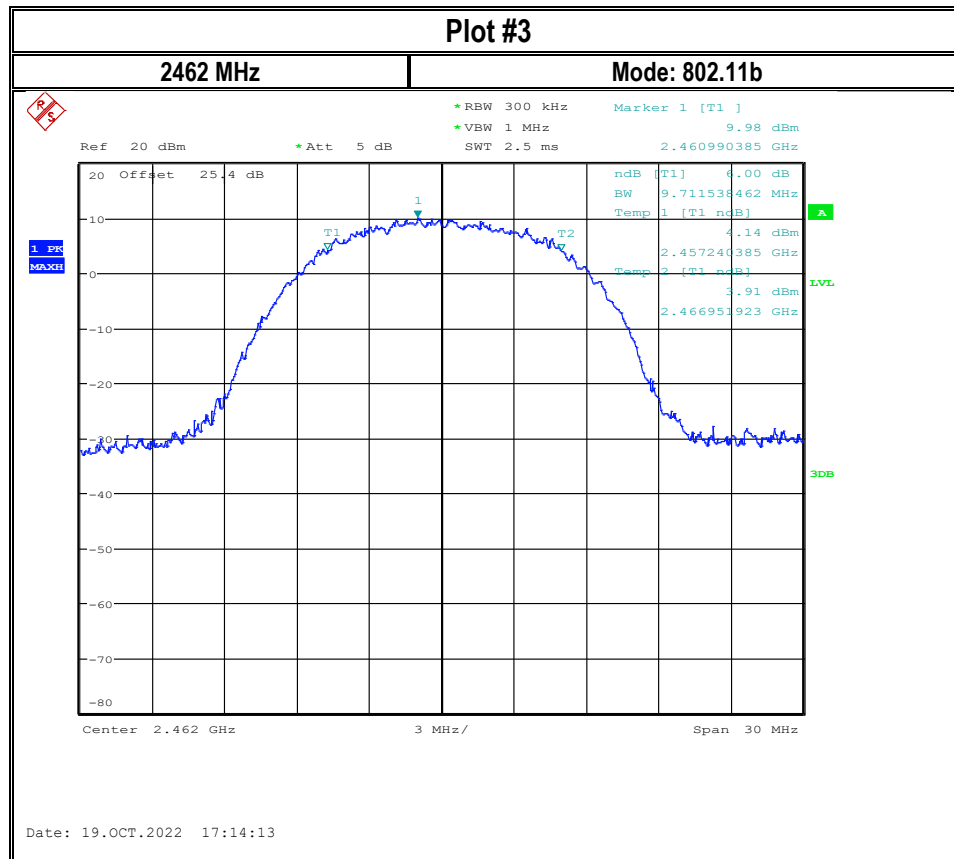


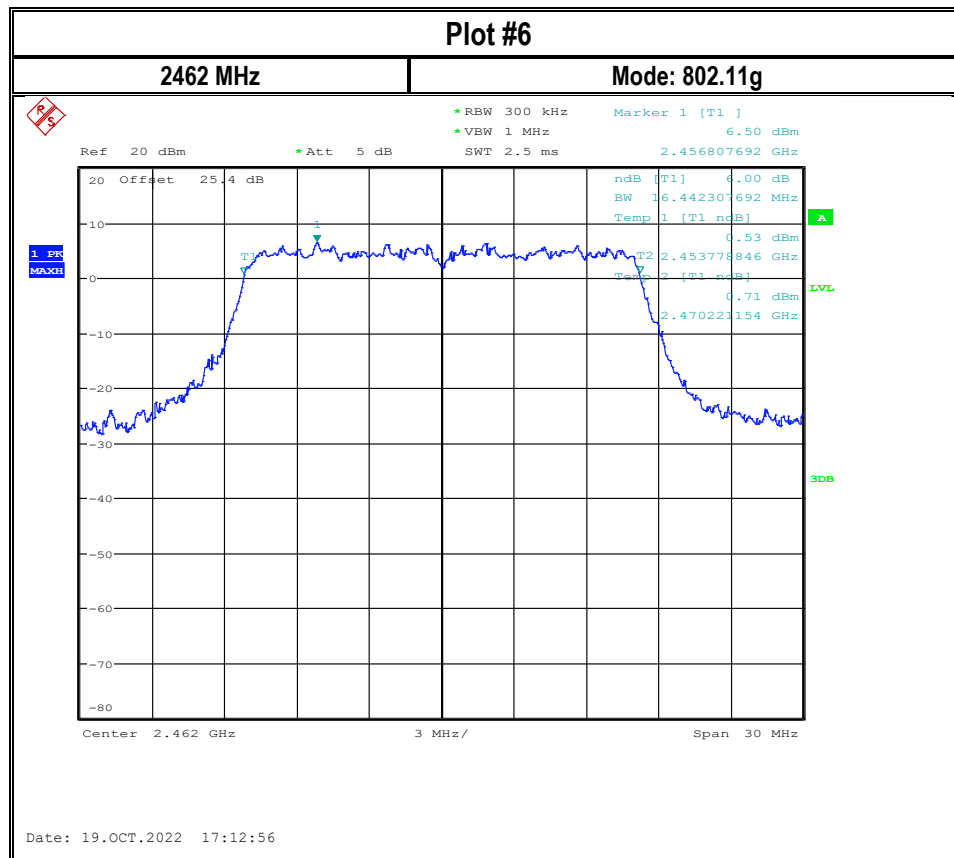
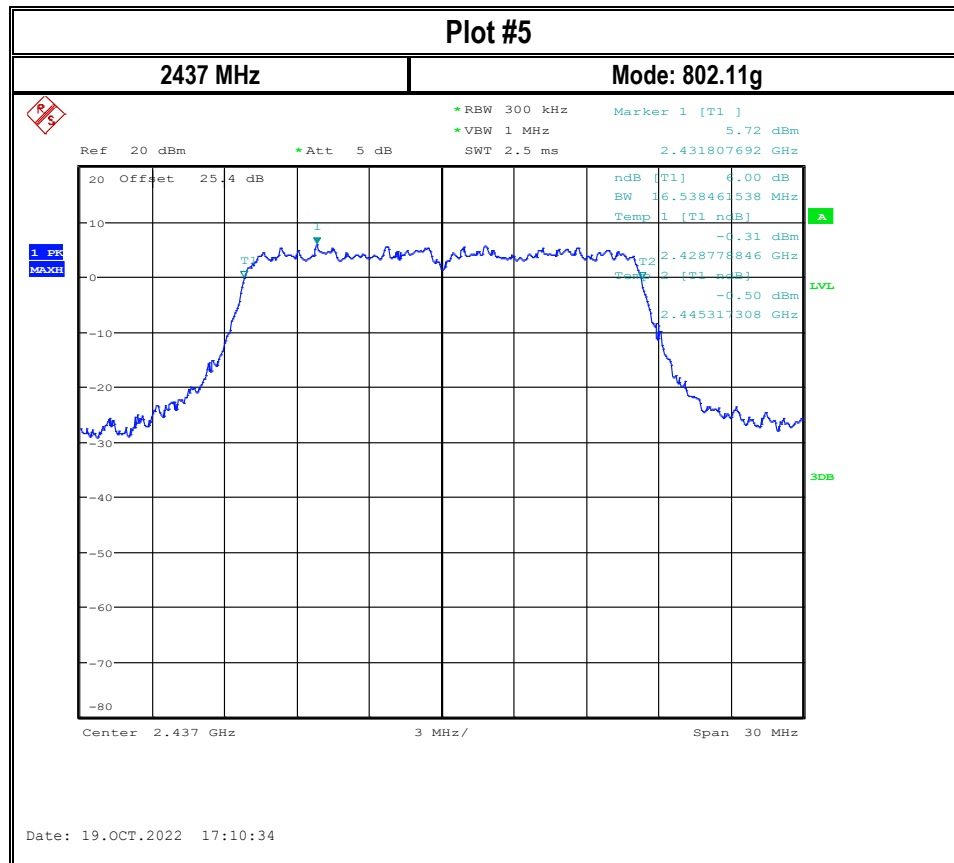


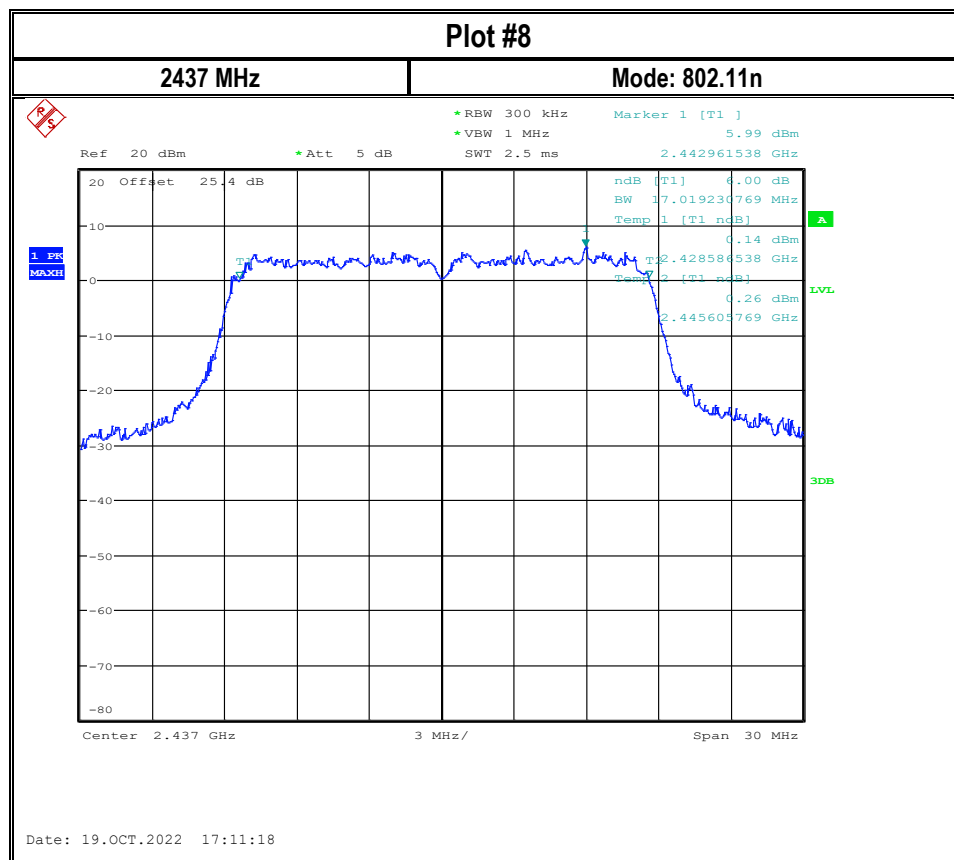
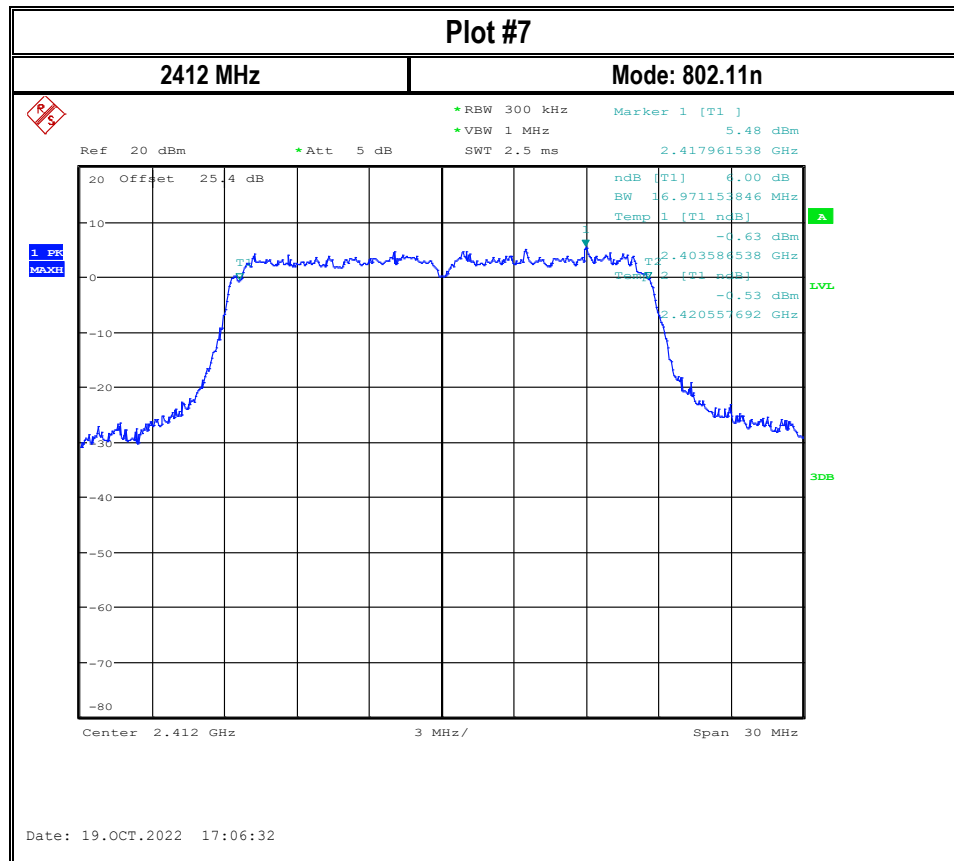



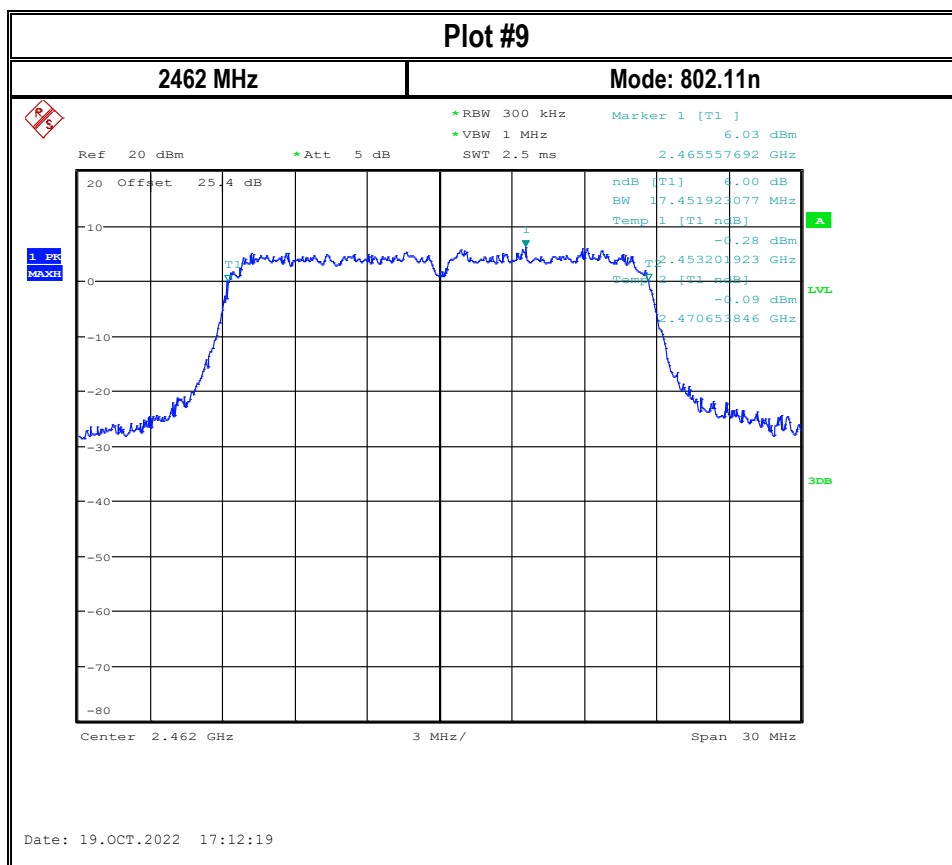



99% Occupied Bandwidth

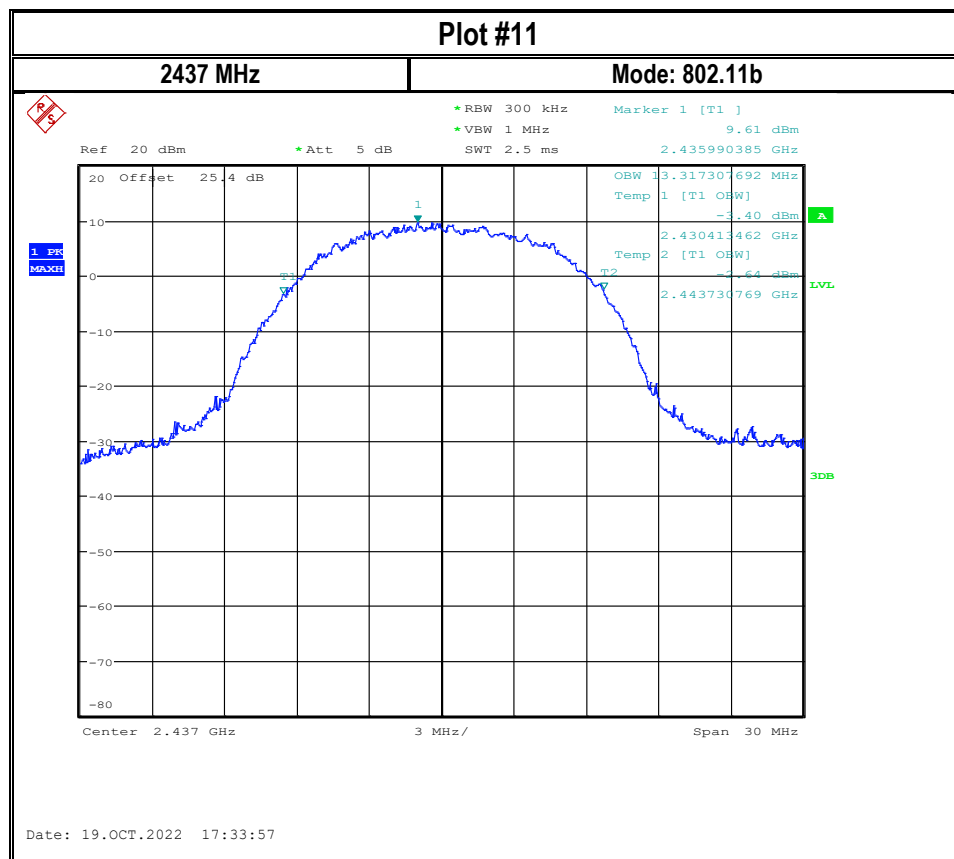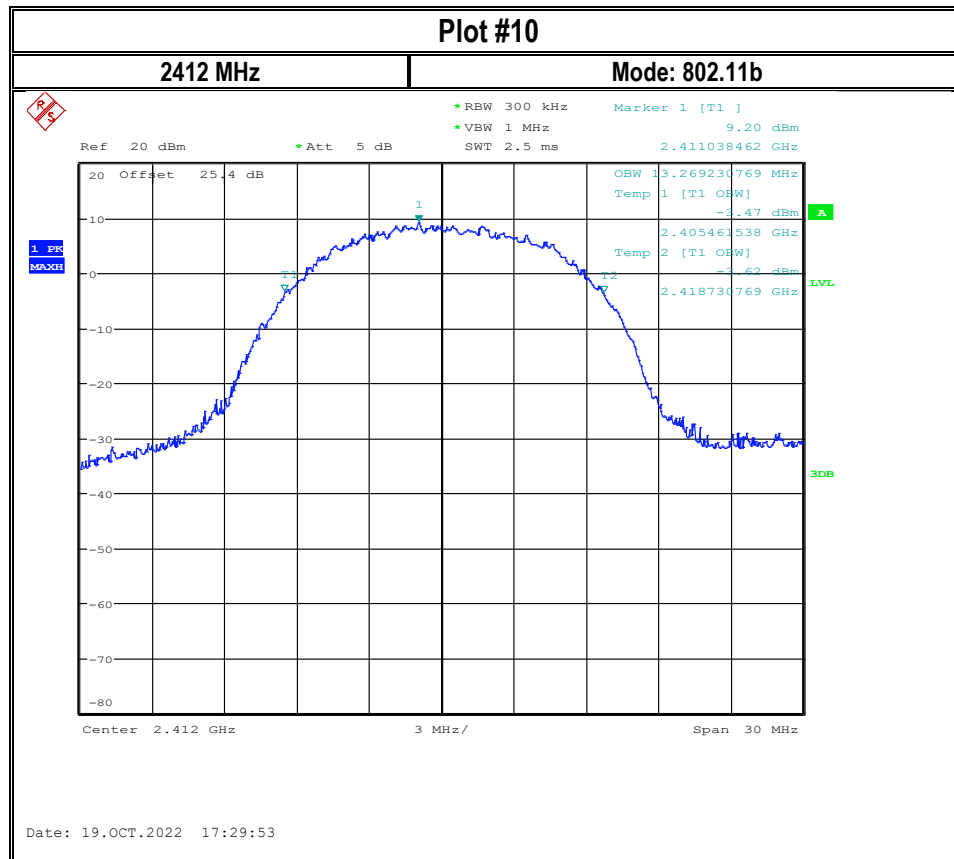

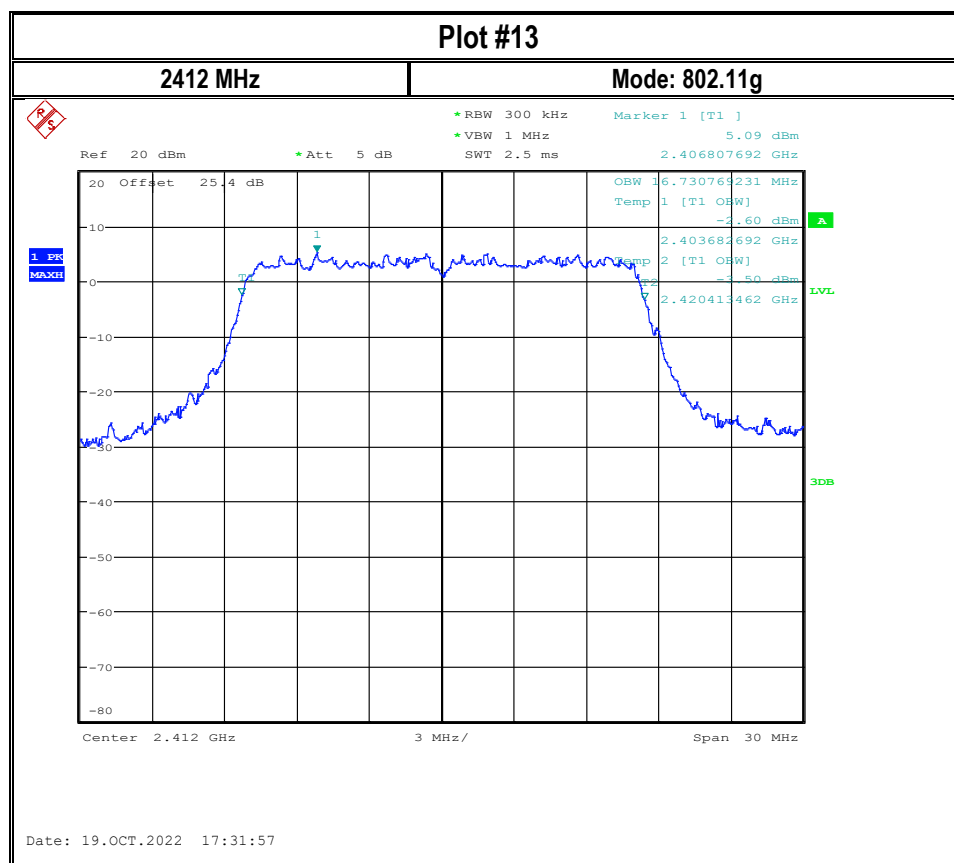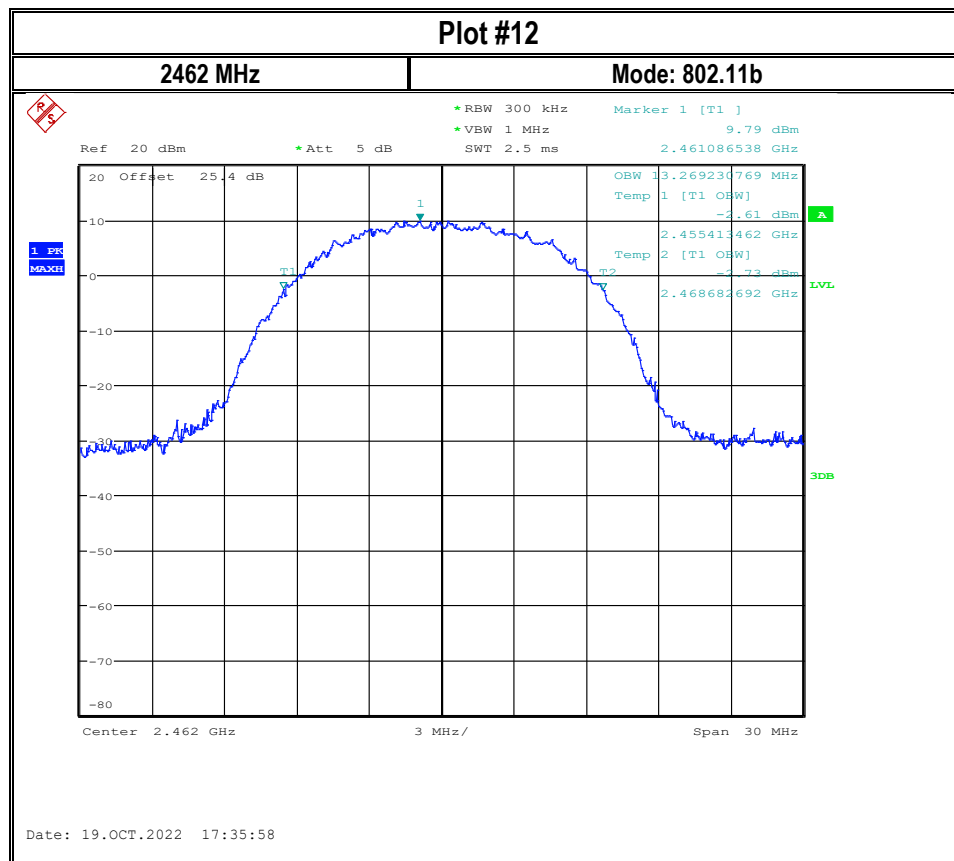

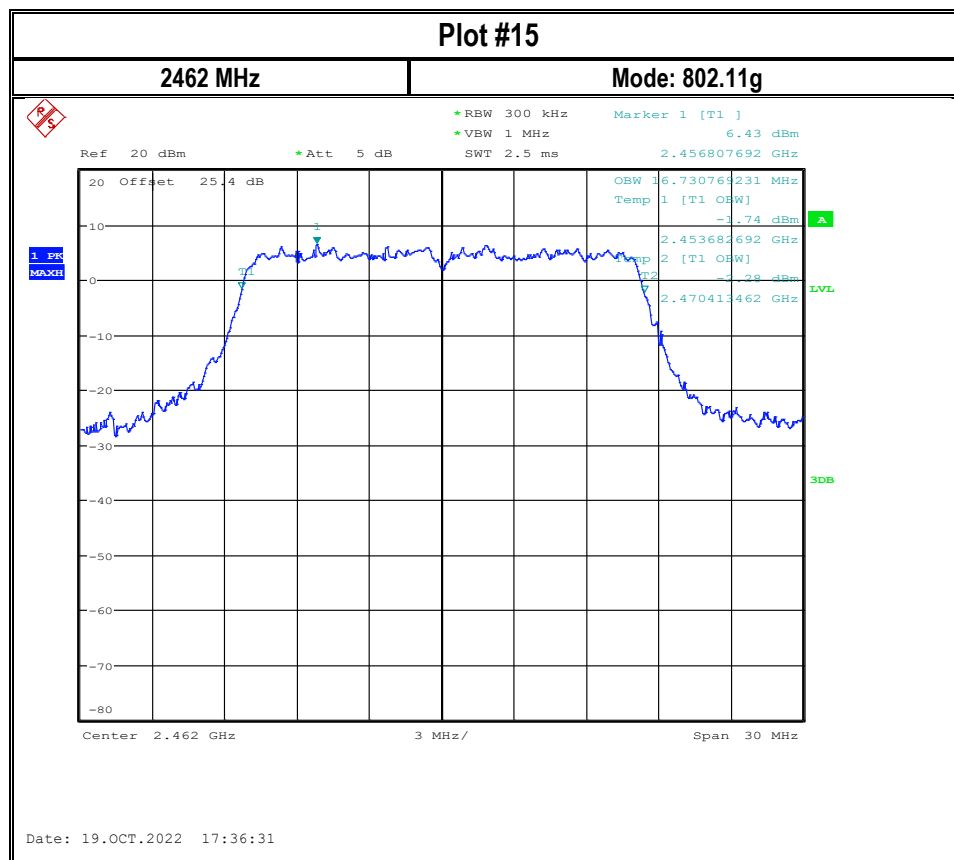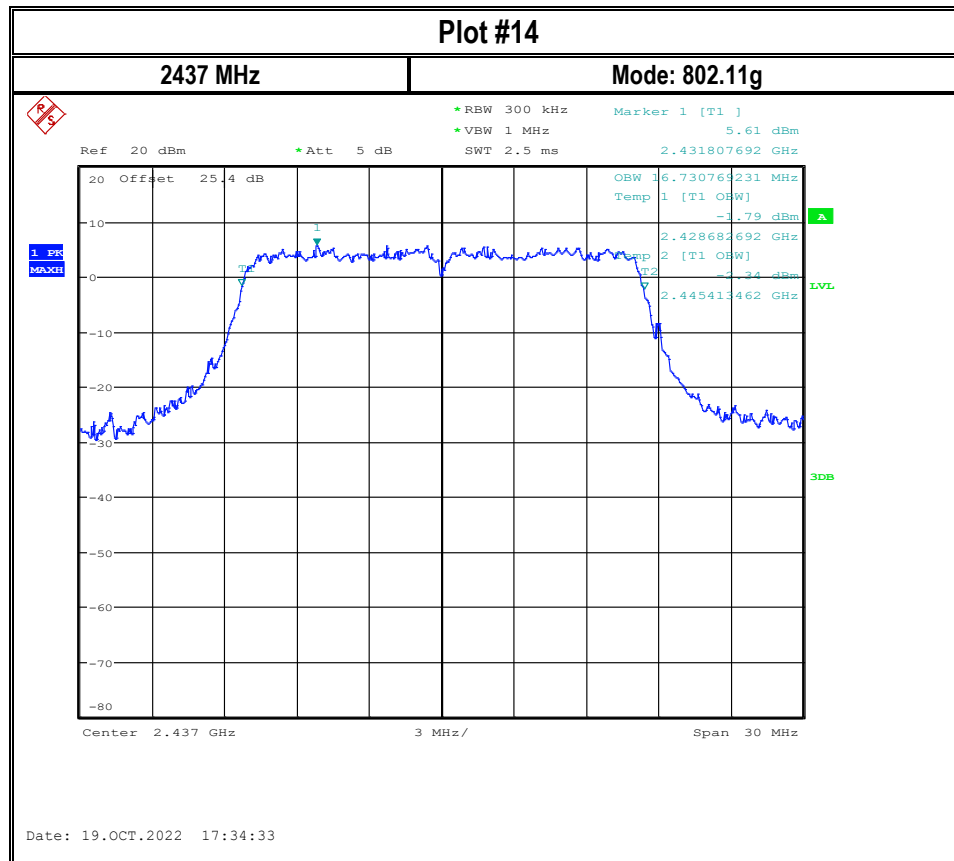

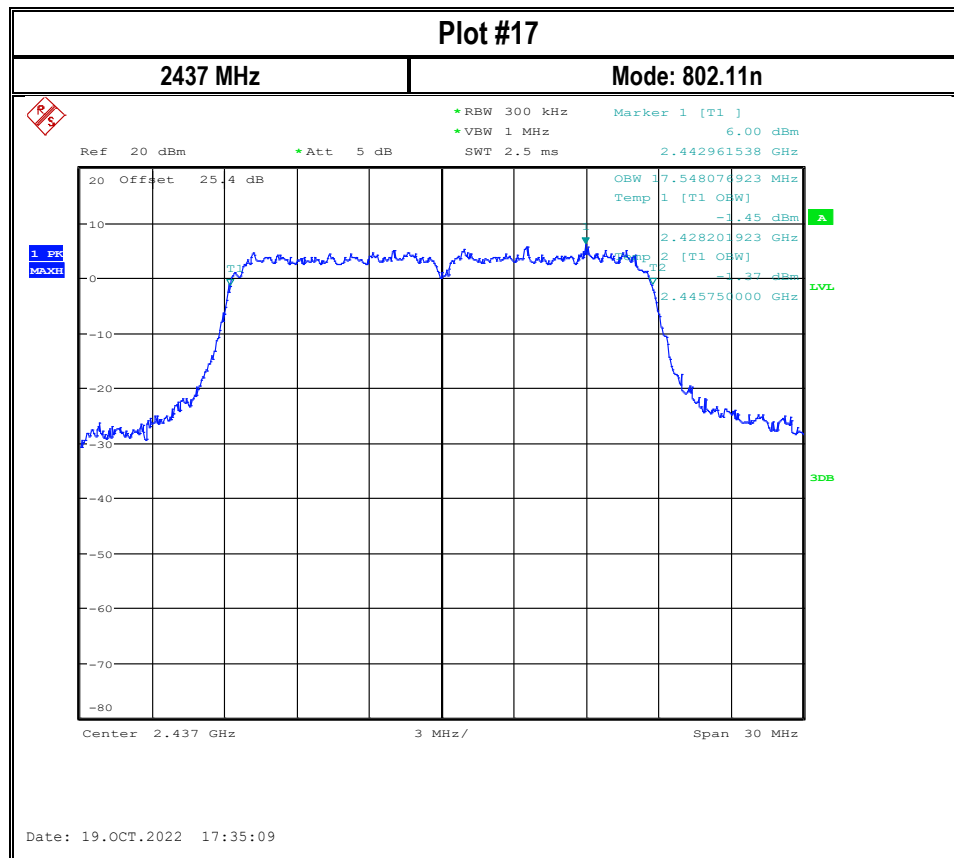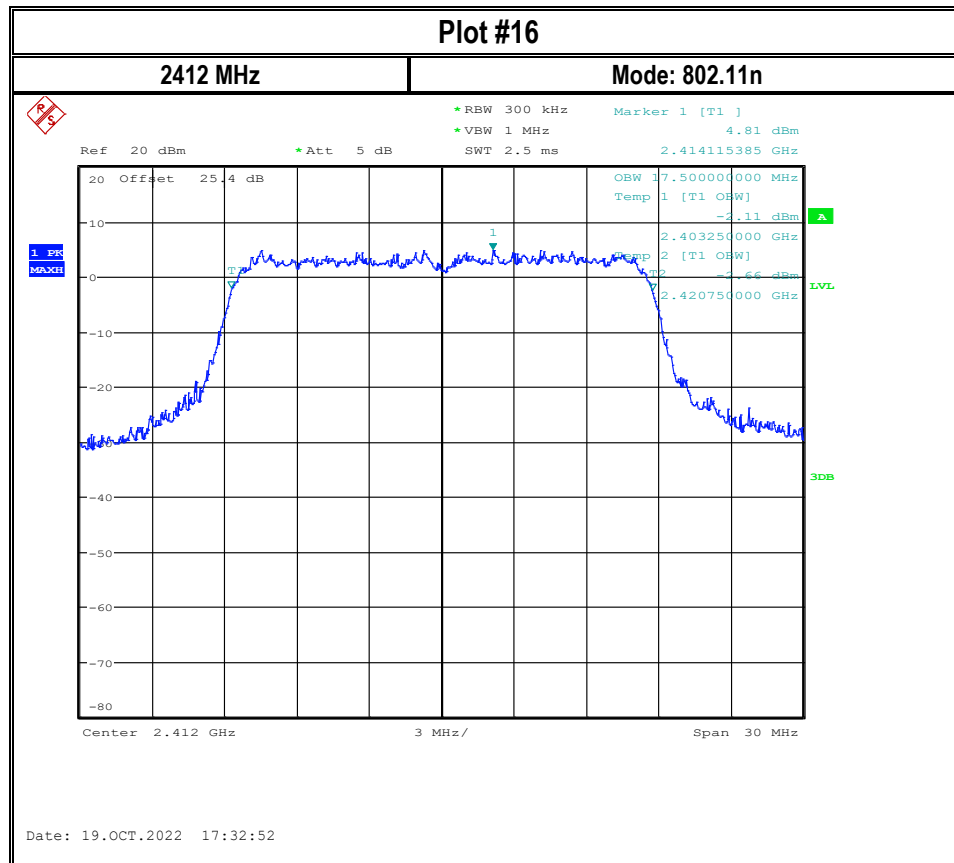

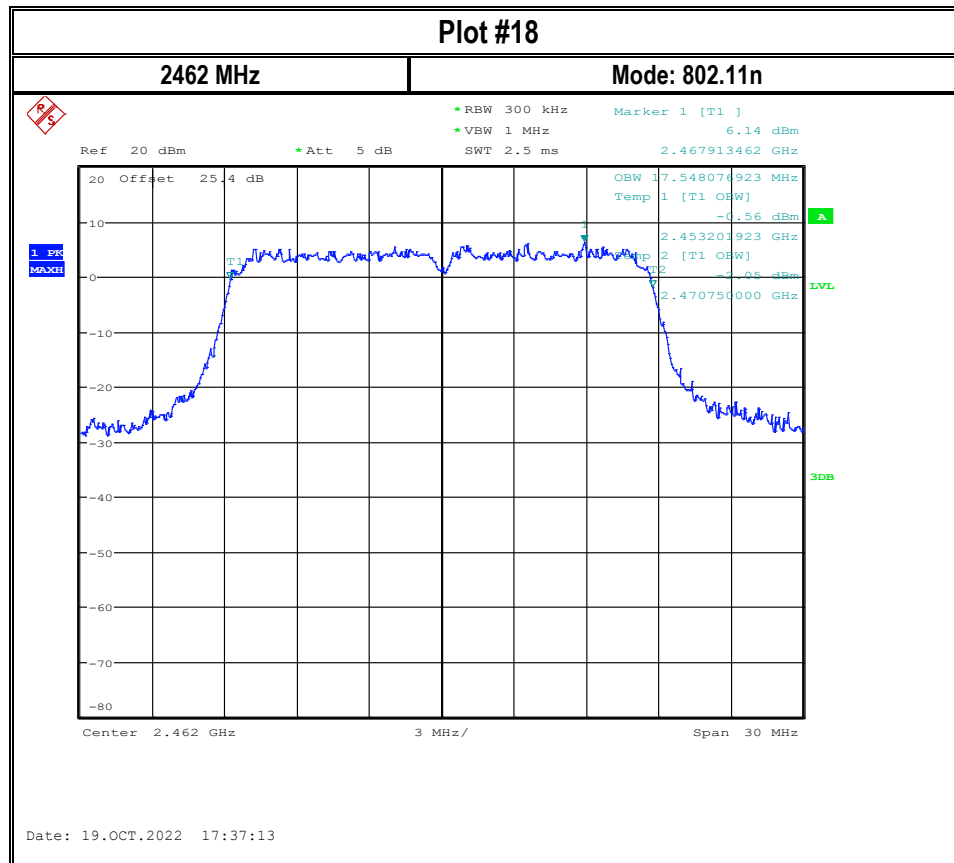

8.5 Radiated Transmitter Spurious Emissions and Restricted Bands

8.5.1 Measurement according to ANSI C63.10 (2013)

Spectrum Analyzer Settings:

- Frequency = 9 KHz – 30 MHz
- RBW = 9 KHz
- Detector: Peak

- Frequency = 30 MHz – 1 GHz
- Detector = Peak / Quasi-Peak
- RBW= 120 KHz (<1GHz)

- Frequency > 1 GHz
- Detector = Peak / Average
- RBW = 1 MHz

- Radiated spurious emissions shall be measured for the transmit frequencies, transmit power, and data rate for the lowest, middle and highest channel in each frequency band of operation and for the highest gain antenna for each antenna type, and using the appropriate parameters and test requirements.
- The highest (or worst-case) data rate shall be recorded for each measurement.
- For testing frequencies below 30 MHz at distance other than the specified in the standard, the limit conversion is calculated by using the FCC materials for the ANSI 63 committee issued on January, 27 1991.

8.5.2 Limits:

FCC §15.247

- In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

FCC §15.209 & RSS-Gen 8.9

- Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency of emission (MHz)	Field strength (μV/m)	Measurement Distance (m)	Field strength @ 3m (dBμV/m)
0.009–0.490	2400/F(kHz) / -----	300	-
0.490–1.705	24000/F(kHz) / -----	30	-
1.705–30.0	30 / (29.5)	30	-
30–88	100	3	40 dBμV/m
88–216	150	3	43.5 dBμV/m
216–960	200	3	46 dBμV/m
Above 960	500	3	54 dBμV/m

FCC §15.205 & RSS-Gen 8.10

- Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
10.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

- Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

*PEAK LIMIT= 74 dBμV/m

*AVG. LIMIT= 54 dBμV/m


8.5.3 Test conditions and setup:

Ambient Temperature	EUT Set-Up #	EUT operating mode	Power Input
22.0° C	2	802.11b	7.4 VDC

8.5.4 Measurement result:

Plot #	Channel #	Scan Frequency	Limit	Result
1-3	Low	30 MHz – 18 GHz	See section 8.5.2	Pass
4-8	Mid	9 kHz – 26 GHz	See section 8.5.2	Pass
9-11	High	30 MHz – 18 GHz	See section 8.5.2	Pass

8.5.5 Measurement Plots:

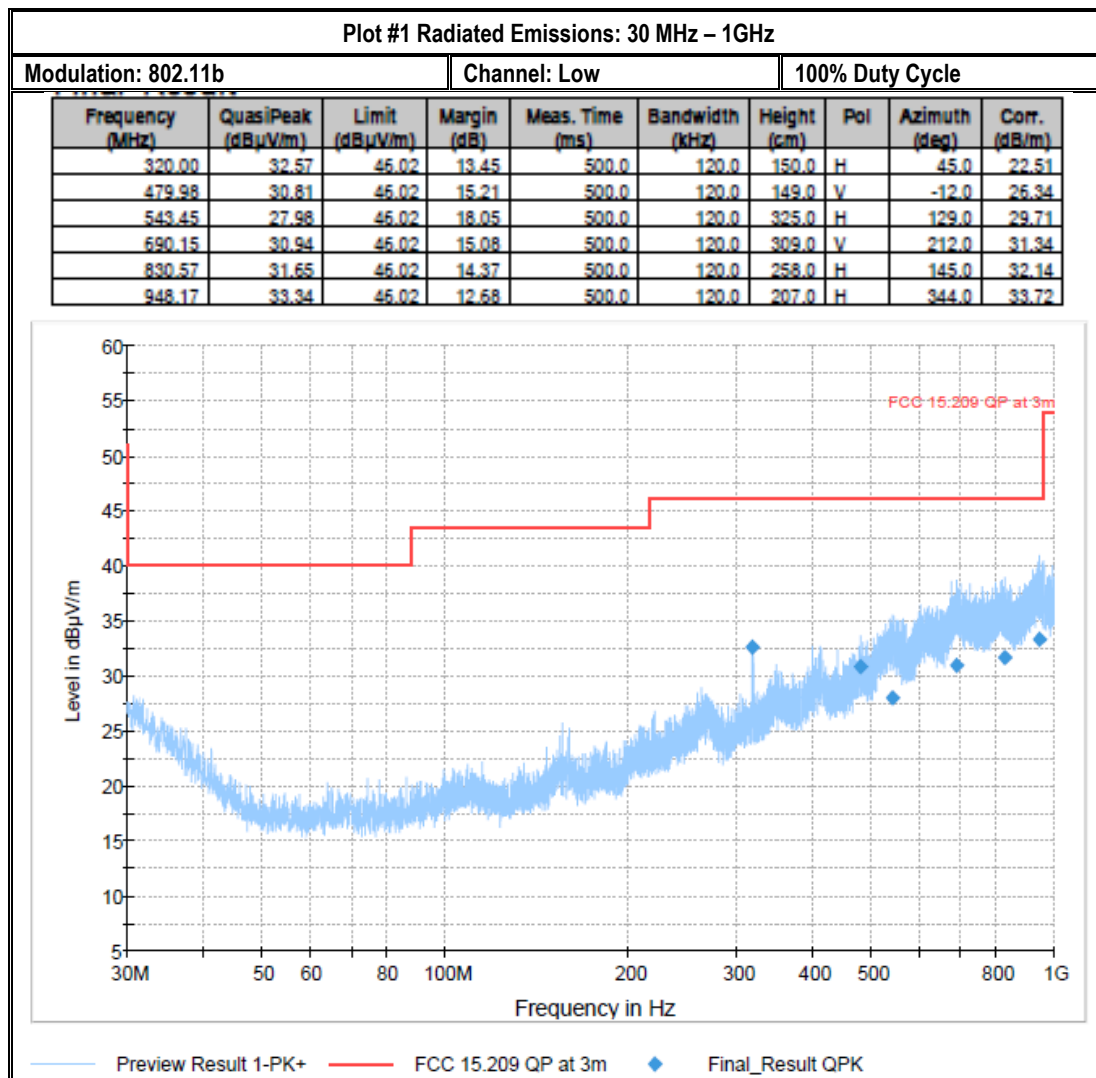


Plot #2 Radiated Emissions: 1-3 GHz

Modulation: 802.11b

Channel: Low

100% Duty Cycle

Frequency (MHz)	MaxPeak (dBµV/m)	CAverage (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2493.00	—	34.00	53.98	19.98	500.0	1000.0	184.0	H	243.0	9.24
2493.00	45.67	—	73.98	27.31	500.0	1000.0	184.0	H	243.0	9.24

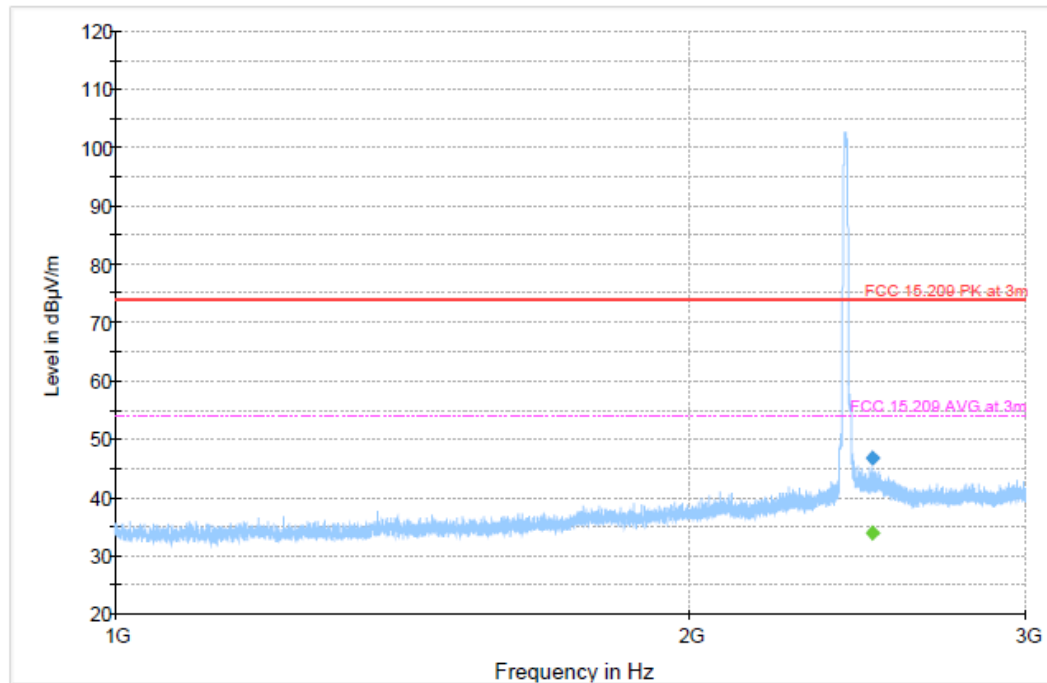

Preview Result 1-PK+ Final_Result PK+ FCC 15.209 PK at 3m Final_Result CAV FCC 15.209 AVG at 3m


Plot #3 Radiated Emissions: 3-18 GHz

Modulation: 802.11b

Channel: Low

100% Duty Cycle

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (Hz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3215.50	---	40.36	53.98	13.62	500.0	1000.0	149.0	H	223.0	-7.55
3215.50	45.70	---	73.98	28.28	500.0	1000.0	149.0	H	223.0	-7.55
4824.00	---	41.45	53.98	12.53	500.0	1000.0	149.0	V	126.0	-4.10
4824.00	54.52	---	73.98	19.46	500.0	1000.0	149.0	V	126.0	-4.10
16312.00	---	33.81	53.98	20.17	500.0	1000.0	253.0	V	314.0	7.36
16312.00	46.60	---	73.98	27.38	500.0	1000.0	253.0	V	314.0	7.36

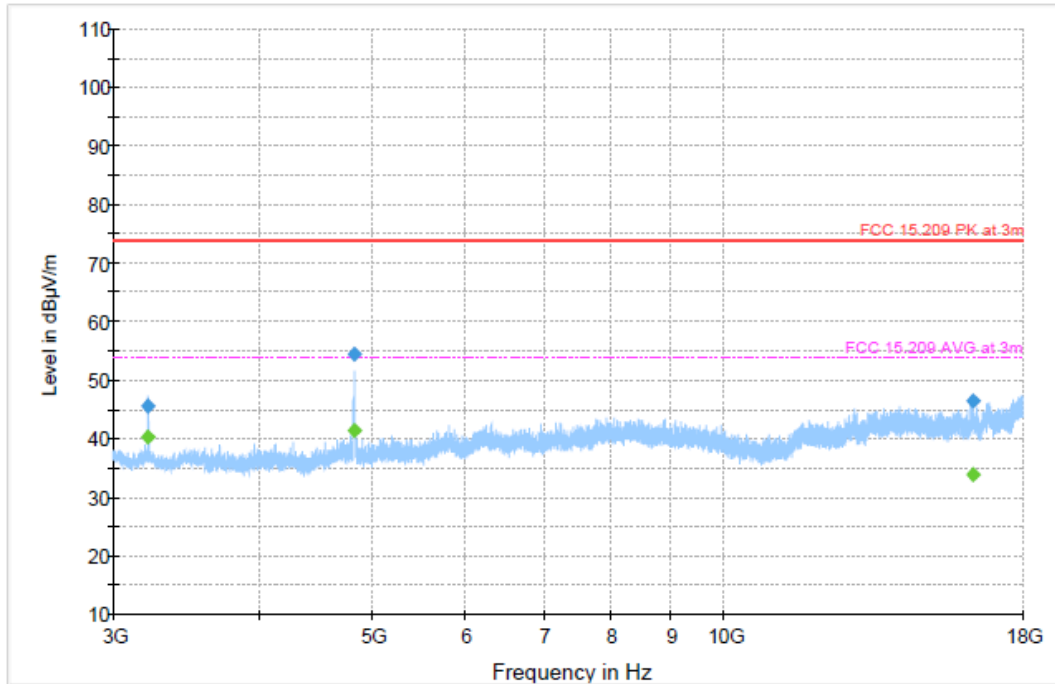


Plot #4 Radiated Emissions: 9 KHz – 30 MHz

Modulation: 802.11b

Channel: Mid

100% Duty Cycle

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
20.62	22.75	55.66	32.91	500.0	9.0	149.0	H	-7.0	16.62

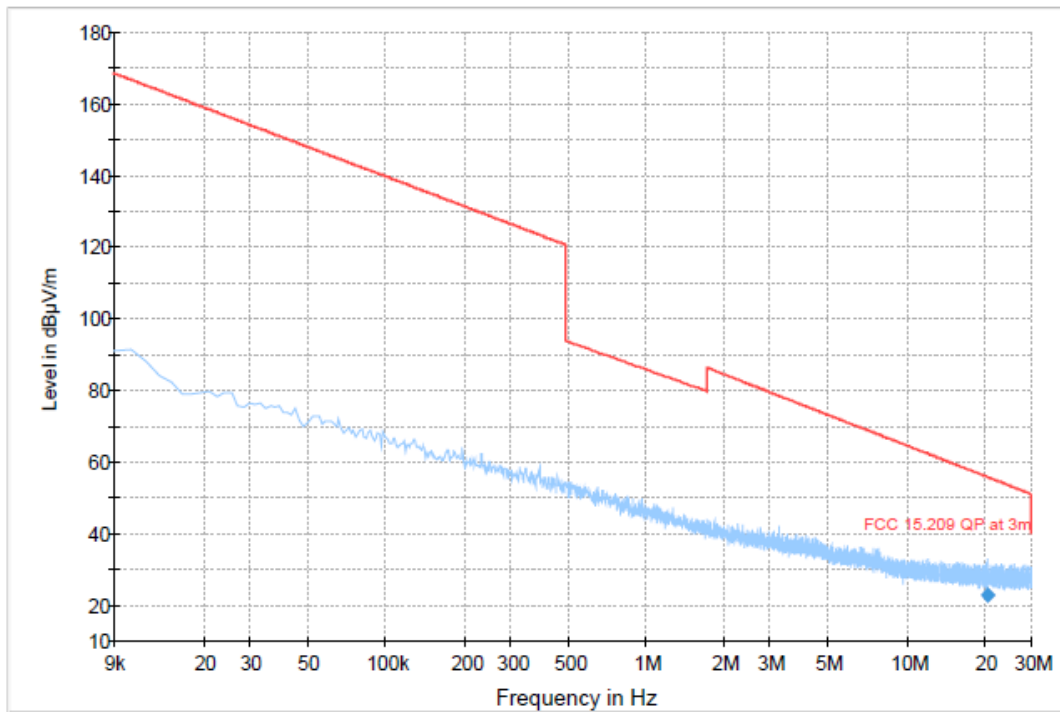

Preview Result 1-PK+ FCC 15.209 QP at 3m Final_Result QPK


Plot #5 Radiated Emissions: 30 MHz – 1GHz

Modulation: 802.11b

Channel: Mid

100% Duty Cycle

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
625.74	29.93	45.02	15.09	500.0	120.0	312.0	H	49.0	30.15
687.01	31.50	45.02	14.52	500.0	120.0	301.0	H	61.0	31.95
822.55	31.97	45.02	14.05	500.0	120.0	289.0	H	196.0	32.46
894.33	31.66	45.02	14.36	500.0	120.0	325.0	H	136.0	32.07
935.24	33.31	45.02	12.72	500.0	120.0	195.0	H	16.0	33.63
960.75	32.75	53.98	21.23	500.0	120.0	314.0	H	315.0	33.22

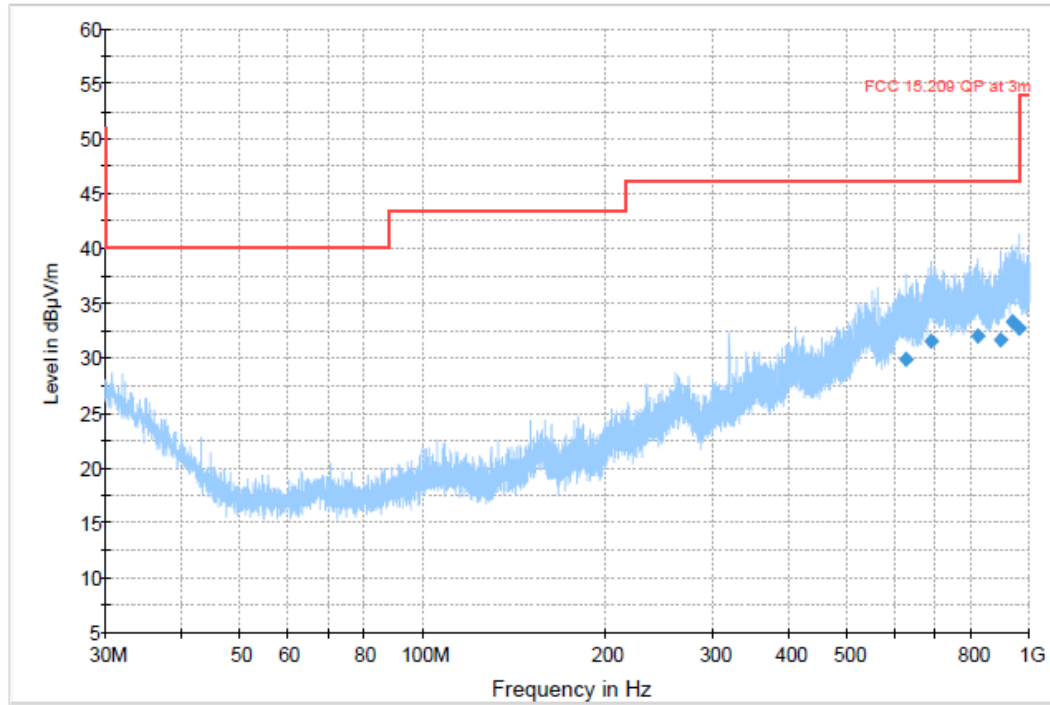

Preview Result 1-PK+ FCC 15.209 QP at 3m Final_Result QPK


Plot #6 Radiated Emissions: 1-3 GHz

Modulation: 802.11b

Channel: Mid

100% Duty Cycle

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
1901.29	—	27.05	53.98	26.92	500.0	1000.0	325.0	V	284.0	6.87
1901.29	39.33	—	73.98	34.65	500.0	1000.0	325.0	V	284.0	6.87

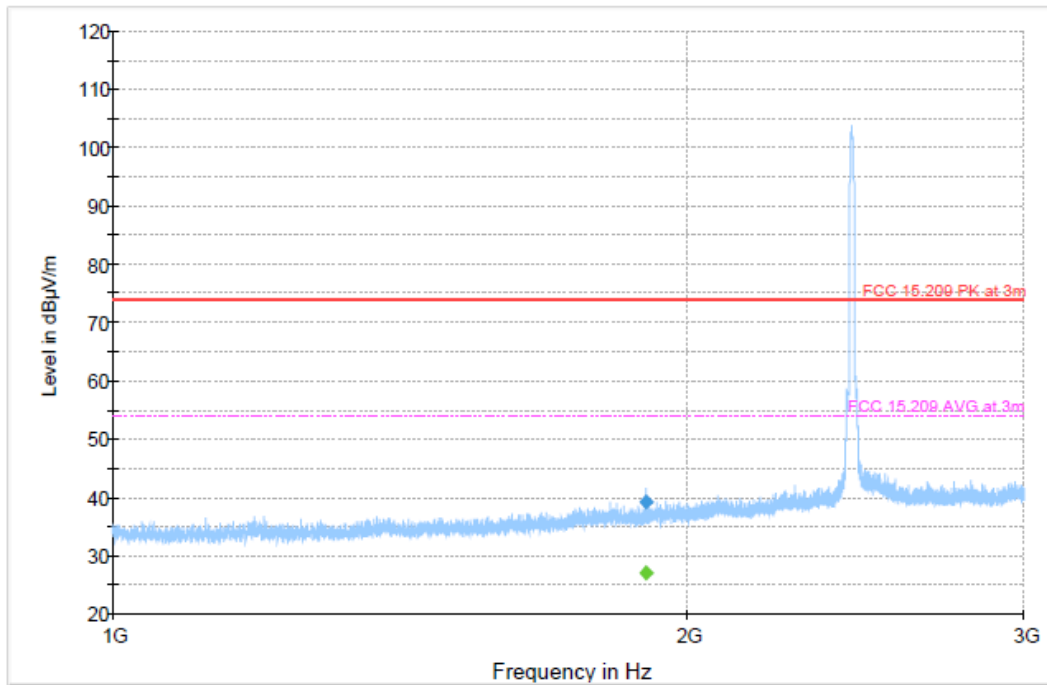

Preview Result 1-PK+ Final_Result PK+ FCC 15.209 PK at 3m Final_Result CAV FCC 15.209 AVG at 3m


Plot #7 Radiated Emissions: 3-18 GHz

Modulation: 802.11b

Channel: Mid

100% Duty Cycle

Frequency (MHz)	MaxPeak (dB μ V/m)	CAverage (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3249.00	—	41.83	53.98	12.15	500.0	1000.0	149.0	H	105.0	-8.07
3249.00	46.66	—	73.98	27.32	500.0	1000.0	149.0	H	105.0	-8.07
4874.50	—	45.48	53.98	8.50	500.0	1000.0	164.0	V	126.0	-4.41
4874.50	55.89	—	73.98	18.09	500.0	1000.0	164.0	V	126.0	-4.41

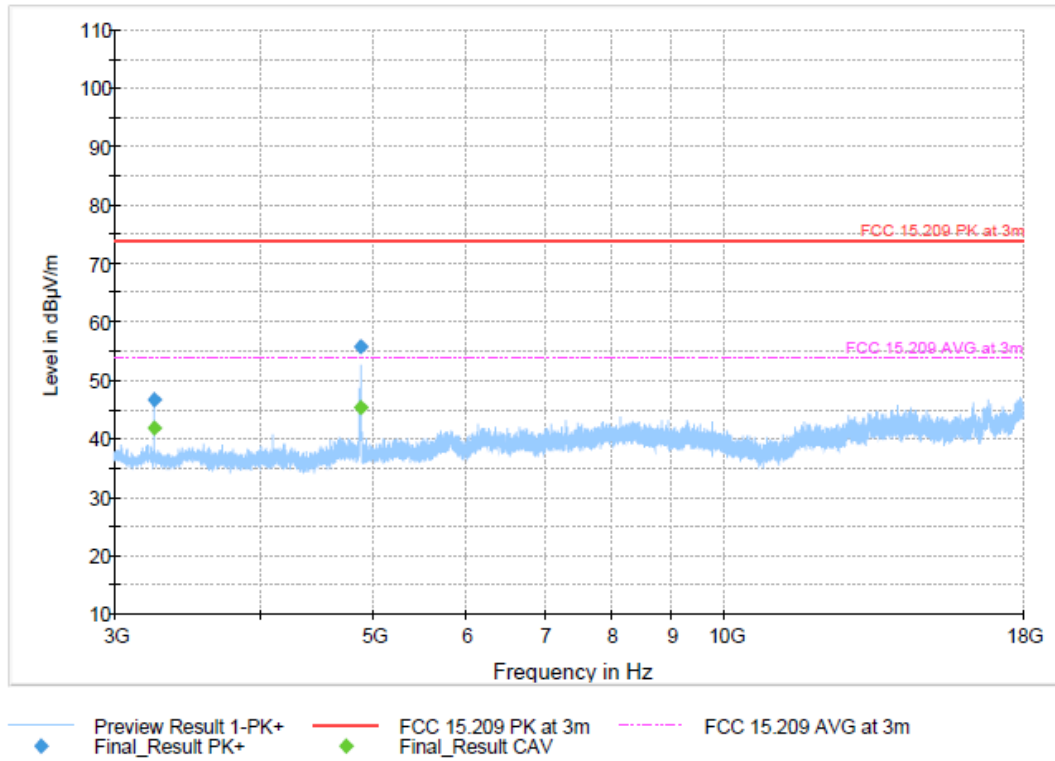


Plot #8 Radiated Emissions: 18-26 GHz

Modulation: 802.11b

Channel: Mid

100% Duty Cycle

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
22416.00	58.45	—	83.50	25.05	500.0	1000.0	140.0	H	93.0	19.23
22416.00	—	45.17	63.50	18.33	500.0	1000.0	140.0	H	93.0	19.23
22834.00	58.61	—	83.50	24.89	500.0	1000.0	140.0	H	97.0	19.76
22834.00	—	45.45	63.50	18.05	500.0	1000.0	140.0	H	97.0	19.76

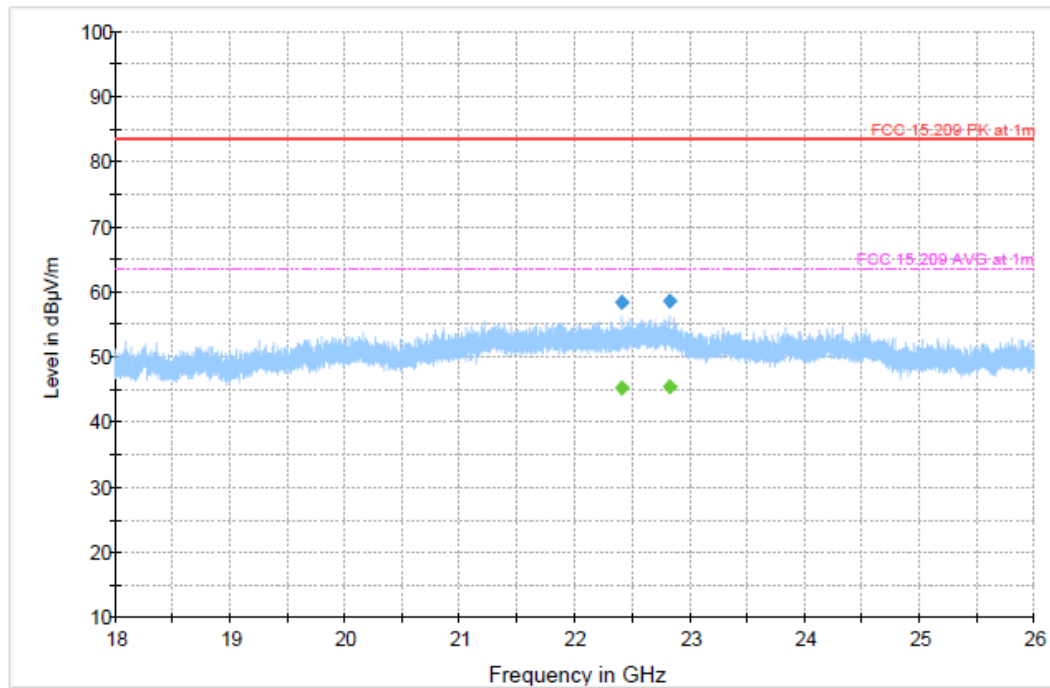

— Preview Result 1-PK+ — FCC 15.209 PK at 1m - - - - - FCC 15.209 AVG at 1m
◆ Final_Result PK+ ◆ Final_Result CAV


Plot #9 Radiated Emissions: 30 MHz – 1GHz

Modulation: 802.11b

Channel: High

100% Duty Cycle

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
36.60	17.17	40.00	22.83	500.0	120.0	149.0	H	226.0	20.05
320.00	31.32	46.02	14.70	500.0	120.0	149.0	H	50.0	22.51
630.98	30.11	46.02	15.91	500.0	120.0	295.0	H	-25.0	30.28
765.03	30.83	46.02	15.19	500.0	120.0	310.0	H	216.0	31.18
832.68	31.47	46.02	14.55	500.0	120.0	262.0	H	304.0	32.00
928.71	33.28	46.02	12.74	500.0	120.0	185.0	H	10.0	33.56

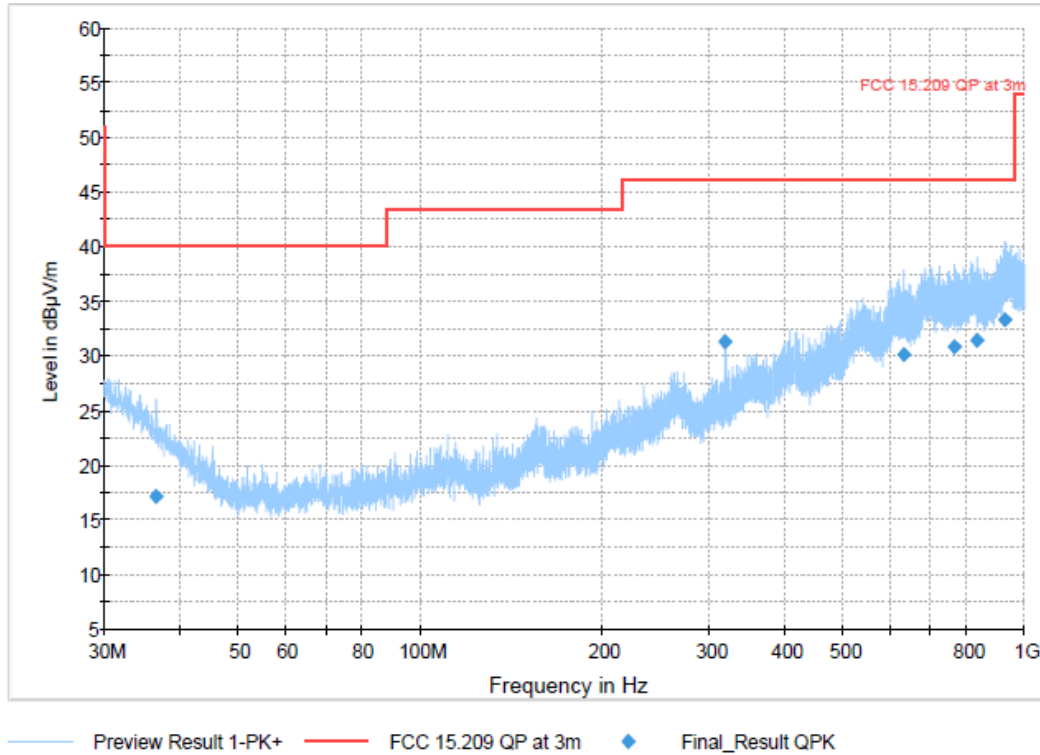


Plot #10 Radiated Emissions: 1-3 GHz

Modulation: 802.11b

Channel: High

100% Duty Cycle

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (kHz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2415.85	—	32.15	53.98	21.83	500.0	1000.0	248.0	V	95.0	8.45
2415.85	44.57	—	73.98	29.41	500.0	1000.0	248.0	V	95.0	8.45

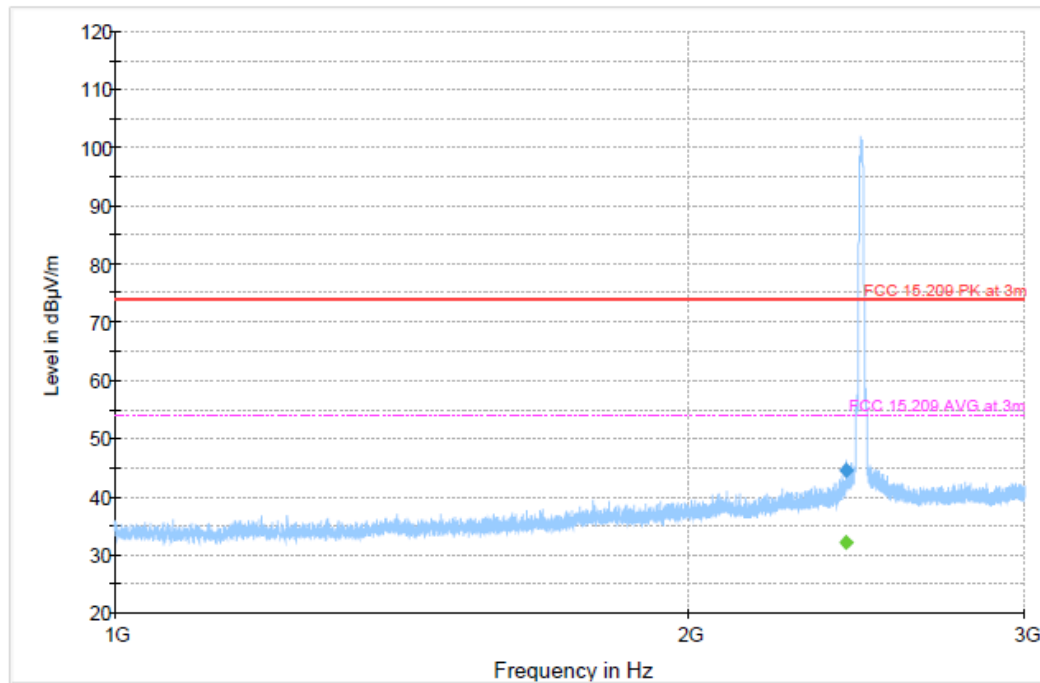


Plot #11 Radiated Emissions: 3-18 GHz

Modulation: 802.11b

Channel: High

100% Duty Cycle

Frequency (MHz)	MaxPeak (dBμV/m)	CAverage (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Meas. Time (ms)	Bandwidth (Hz)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
3282.50	—	43.59	53.98	10.39	500.0	1000.0	149.0	V	122.0	-8.24
3282.50	47.55	—	73.98	26.43	500.0	1000.0	149.0	V	122.0	-8.24
4924.50	—	39.26	53.98	14.72	500.0	1000.0	149.0	V	103.0	-4.47
4924.50	50.51	—	73.98	23.47	500.0	1000.0	149.0	V	103.0	-4.47
7384.50	—	35.29	53.98	18.69	500.0	1000.0	150.0	V	77.0	0.88
7384.50	47.42	—	73.98	26.56	500.0	1000.0	150.0	V	77.0	0.88

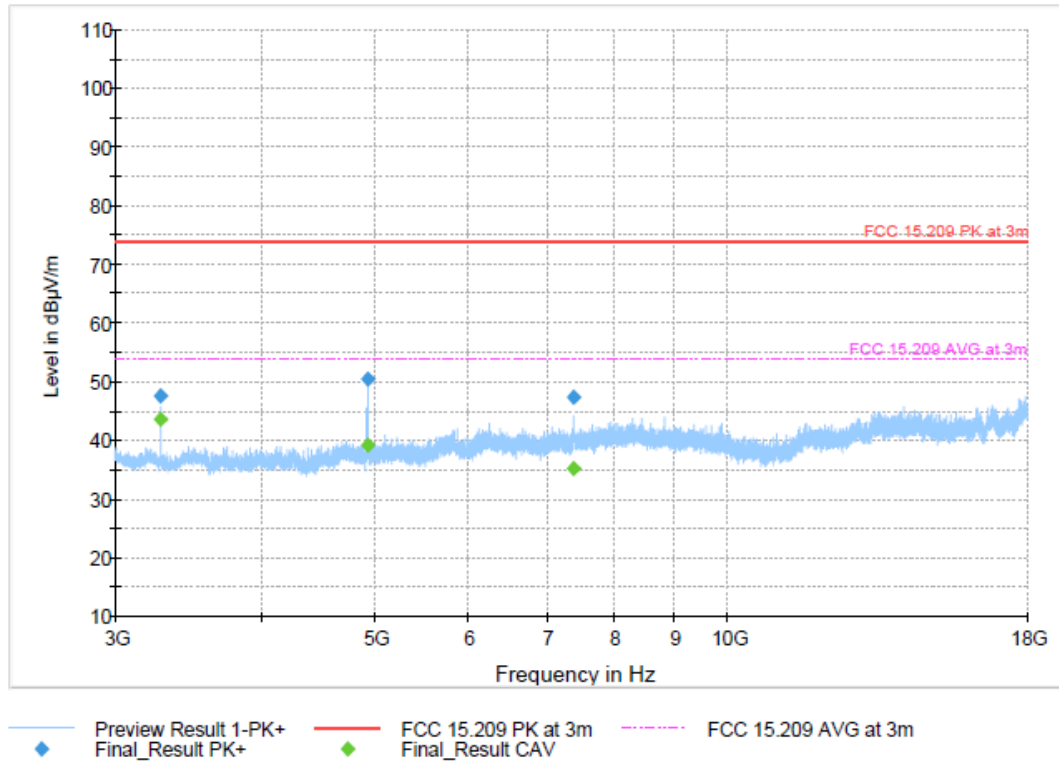

9 Test setup photos

Setup photos are included in supporting file name: "EMC_LOOMA-011-22001_15.247_RSE_Setup_Photos.pdf"

10 Test Equipment And Ancillaries Used For Testing

Equipment Name/Type	Manufacturer	Model	Serial #	Calibration Cycle	Last Calibration Date
EMI Receiver	Rohde & Schwarz	ESW44	101715	3 Years	9/13/2021
Signal Analyzer	Rohde & Schwarz	FSV40	101022	3 Years	9/14/2021
Active Loop antenna	ETS Lindgren	6507	161344	3 Years	10/30/2020
Biconlog Antenna	AH systems	BiLA2G	569	3 years	12/1/2020
Horn Antenna	EMCO	3115	35111	3 years	9/30/2021
Horn Antenna	ETS Lindgren	3117-PA	169547	3 years	9/1/2020
Horn Antenna	ETS Lindgren	3116C-PA	169535	3 years	9/30/2020
Digital Thermometer	Control Company	36934-164	191872028	3 Years	10/20/2021
Digital Barometer	VWR	10510-922	200236891	3 Years	4/13/2020

Note: Equipment used meets the measurement uncertainty requirements as required per applicable standards for 95% confidence levels. Calibration due dates, unless defined specifically, falls on the last day of the month. Items indicated "N/A" for cal status either do not specifically require calibration or is internally characterized before use.

11 History

Date	Template Revision	Changes to report	Prepared by
12-12-2022	EMC_LOOMA-011-22001_15_247_WIFI_DTS	Initial Version	Kris Lazarov

<<< The End >>>