

ISED CABid: ES1909

Test Report No:  
 NIE: 69904RRF.002A1

# Test Report

## USA FCC Part 15.247, 15.209

## CANADA RSS-247, RSS-Gen

(*) Identification of item tested	QP 4530
(*) Trademark	Philips OneBlade
(*) Model and /or type reference	OneBlade
Other identification of the product	HW version: 1.0 SW version: 327 FCC ID: 2AICSQP45 IC: 21912-QP45
(*) Features	Bluetooth 5.1
Applicant	Philips Consumer Lifestyle B.V. Tussendiepen 4, 9206 AD Drachten, The Netherlands
Test method requested, standard	USA FCC Part 15.247 (10-1-20 Edition): Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-20 Edition): Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 amendment 1 (March 2019). Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Summary	IN COMPLIANCE
Approved by (name / position & signature)	Jose Manuel Gómez Galván EMC Consumer & RF Lab. Manager
Date of issue	2024-02-20
Report template No	FDT08_23 (* "Data provided by the client")

## Index

Competences and guarantees .....	3
General conditions .....	3
Uncertainty .....	3
Data provided by the client.....	3
Usage of samples .....	4
Test sample description .....	4
Identification of the client.....	5
Testing period and place.....	5
Document history .....	5
Environmental conditions .....	6
Remarks and comments .....	7
Testing verdicts.....	8
Summary .....	8
Appendix A: Test results. Bluetooth Low Energy.....	9

## Competences and guarantees

---

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that covers the performed tests in this report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory, CABid: ES1909, with the appropriate scope of accreditation that covers the performed tests in this report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

**IMPORTANT:** No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

## General conditions

---

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

## Uncertainty

---

Uncertainty (factor  $k=2$ ) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

## Data provided by the client

---

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model OneBlade is a Bluetooth connected grooming device.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of result.

## Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Reception
69904B/003	QP 4530	OneBlade	#377	2021-10-06

Auxiliary elements used with the Sample S/01:

Control Nº	Description	Model	Serial Nº	Reception
69904B/007	DTM UART Dongle	--	--	2021-10-06

Sample S/01 has undergone the test(s): The Conducted tests indicated in the Appendix A.

- Sample S/02 is composed of the following elements:

Control Nº	Description	Model	Serial Nº	Reception
69904B/001	QP 4530	OneBlade	#823	2021-10-06

Auxiliary elements used with the Sample S/02:

Control Nº	Description	Model	Serial Nº	Reception
69904B/004	Shaver machine head	--	--	2021-10-06
69904B/008	USB Cable	--	--	2021-10-06

Sample S/02 has undergone the test(s): The Radiated tests indicated in the Appendix A.

## Test sample description

Ports.....:	Port name and description	Cable			
		Specified max length [m]	Attached during test	Shielded	Coupled to patient <sup>(3)</sup>
-	-		<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Supplementary information to the ports.....:	-				
Rated power supply .....	Voltage and Frequency				
	<input checked="" type="checkbox"/> DC:				
Rated Power..... :	3,6 Volt				
Clock frequencies..... :	-				
Other parameters .....	-				
Software version..... :	327				
Hardware version .....	1.0				
Dimensions in cm (W x H x D) ... :	46,72 mm X 138,98 mm x 53,33 mm				
Mounting position .....	<input checked="" type="checkbox"/> Hand-held equipment				
Modules/parts..... :	Module/parts of test item	Type	Manufacturer		
	-				
Accessories (not part of the test item) .....	Description	Type	Manufacturer		
	-				
Documents as provided by the applicant .....	Description	File name	Issue date		
	-				

<sup>(3)</sup> Only applicable to medical equipments.

## Identification of the client

Philips Consumer Lifestyle B.V.  
Oliemolenstraat 5, 9203 ZN Drachten, The Netherlands.

## Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2021-10-20
Date (finish)	2021-11-05

## Document history

Report number	Date	Description
69904RRF.002	2022-01-11	First release.
69904RRF.002A1	2024-02-20	First modification. Some typos are corrected: <ul style="list-style-type: none"><li>- The spectrum analyzer parameters are added for the measurements.</li><li>- Limit is added to the table in the Band-Edge test case</li><li>- Tables with single measurements are added to the graphs in the "Emission Limitations Radiated test case".</li></ul> This report cancels and replaces the previous 69904RRF.002.

## Environmental conditions

---

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C
	Max. = 35 °C
Relative humidity	Min. = 20 %
	Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C
	Max. = 35 °C
Relative humidity	Min. = 20 %
	Max. = 75 %

In the chamber for conducted measurements, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C
	Max. = 35 °C
Relative humidity	Min. = 20 %
	Max. = 75 %

## Remarks and comments

The tests have been performed by the technical personnel: Javier Miguel Nadales, Jaime Barranquero.

Used instrumentation:

### Conducted Measurements:

	Last Calibration	Due Calibration
1. Signal Generator 8 KHz-6 GHz, ROHDE AND SCHWARZ SMB100B	2021/11	2023/11
2. Vector Signal Generator 8 kHz - 6 GHz ROHDE AND SCHWARZ SMBV100B	2021/10	2023/10
3. Signal and Spectrum Analyzer 10 Hz - 40 GHz ROHDE AND SCHWARZ FSV40	2021/02	2023/02
4. Wireless Connectivity Tester BW 160 MHz ROHDE AND SCHWARZ CMW270	2020/11	2021/11
5. Open Switch Unit ROHDE AND SCHWARZ OSP120	2021/10	2023/10
6. Open Switch Unit up to 18 GHz ROHDE AND SCHWARZ OSP 150	2021/09	2023/09

### Radiated Measurements:

	Last Calibration	Due Calibration
1. Semianechoic Absorber Lined Chamber VI ALBATROSS P29419	2020/01	2023/01
2. Shielded Room ALBATROSS PROJECTS GMBH P294191	N/A	N/A
3. Ultralog Antenna 30MHz-6GHz, ROHDE AND SCHWARZ HL562E_UPG	2019/10	2022/10
4. EMI Test Receiver 2Hz-44GHz, ROHDE AND SCHWARZ ESW44	2020/02	2022/02
5. Horn Antenna 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D	2019/11	2022/11
6. Horn Antenna 18 - 40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170	2021/03	2024/03
7. Preamplifier 30 dB 500MHz-18GHz, SCHWARZBECK BBV 9718 C	2021/02	2022/02
8. Preamplifier G>30 dB 18-40GHz BONN ELEKTRONIK BLMA 1840-3G	2019/11	2021/11

## Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

## Summary

### Bluetooth Low Energy:

FCC PART 15 PARAGRAPH / RSS-247			
Requirement – Test case		Verdict	Remark
FCC 15.247 (a)(2) / RSS-247 5.2. (a)	6 dB Bandwidth	P	
FCC 15.247 (b) / RSS-247 5.4. (d)	Maximum output power and antenna gain	P	
FCC 15.247 (d) / RSS-247 5.5.	Band-edge emissions compliance (Transmitter)	P	
FCC 15.247 (e) / RSS-247 5.2. (b)	Power spectral density	P	
FCC 15.247 (d) / RSS-247 5.5.	Emission limitations radiated (Transmitter)	P	
<u>Supplementary information and remarks:</u>			
None.			



## Appendix A: Test results. Bluetooth Low Energy

## INDEX

TEST CONDITIONS.....	11
Occupied Bandwidth .....	14
FCC 15.247 (a)(2) / RSS-247 5.2. (a) 6 dB Bandwidth .....	18
FCC 15.247 (b) / RSS-247 5.4. (d) Maximum Output Power and Antenna Gain .....	22
FCC 15.247 (d) / RSS-247 5.5. Band-Edge Emissions Compliance (Transmitter) .....	25
FCC 15.247 (e) / RSS-247 5.2. (b) Power Spectral Density.....	31
FCC 15.247 (d) / RSS-247 5.5. Emission Limitations Radiated (Transmitter) .....	35

## TEST CONDITIONS

(\*) Declared by the Applicant

### POWER SUPPLY (\*):

Vnominal: 3.6 Vdc  
Type of Power Supply: Battery.

### ANTENNA (\*):

Type of Antenna: Integral.  
Maximum Declared Antenna Gain: +2.5 dBi

### TEST FREQUENCIES (\*):

Low Channel: 2402 MHz  
Middle Channel: 2440 MHz  
High Channel: 2480 MHz

### CONDUCTED MEASUREMENTS:

The equipment under test was set up in a shielded room and it is connected to the TS8997 using a low loss RF cable. The reading of the spectrum analyser is corrected taking into account the cable loss.



### RADIATED MEASUREMENTS:

All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1000 MHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1 m for the frequency range 17 GHz-26 GHz (antenna and 18 GHz-40 GHz horn antenna).


For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.

The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.


Measurements were made in both horizontal and vertical planes of polarization.

A resolution bandwidth/video bandwidth of 100/300 kHz was used for frequencies below 1 GHz and 1/3 MHz for frequencies above 1 GHz.


Radiated measurements setup from 30 MHz to 1 GHz:

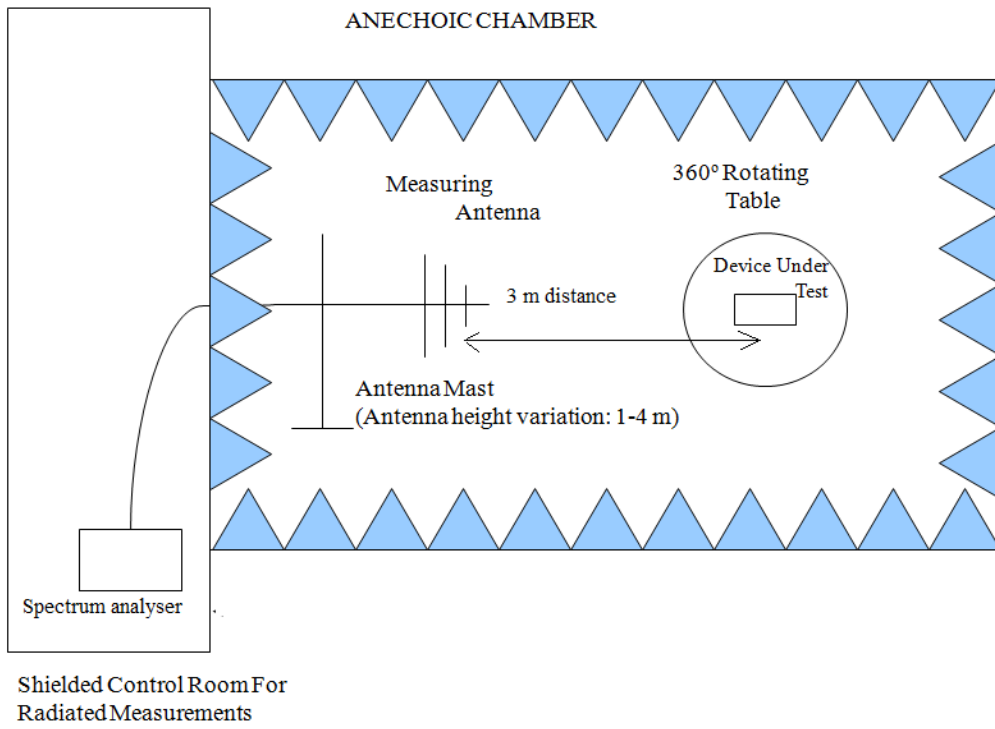

Radiated measurements setup from 1 GHz to 17 GHz:

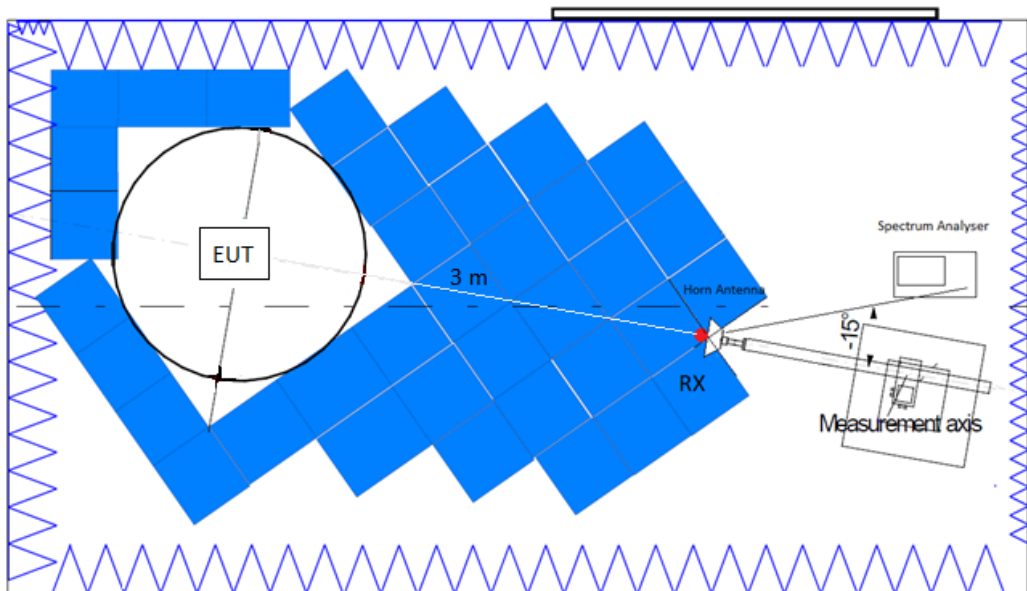

Radiated measurements setup  $f > 17$  GHz:

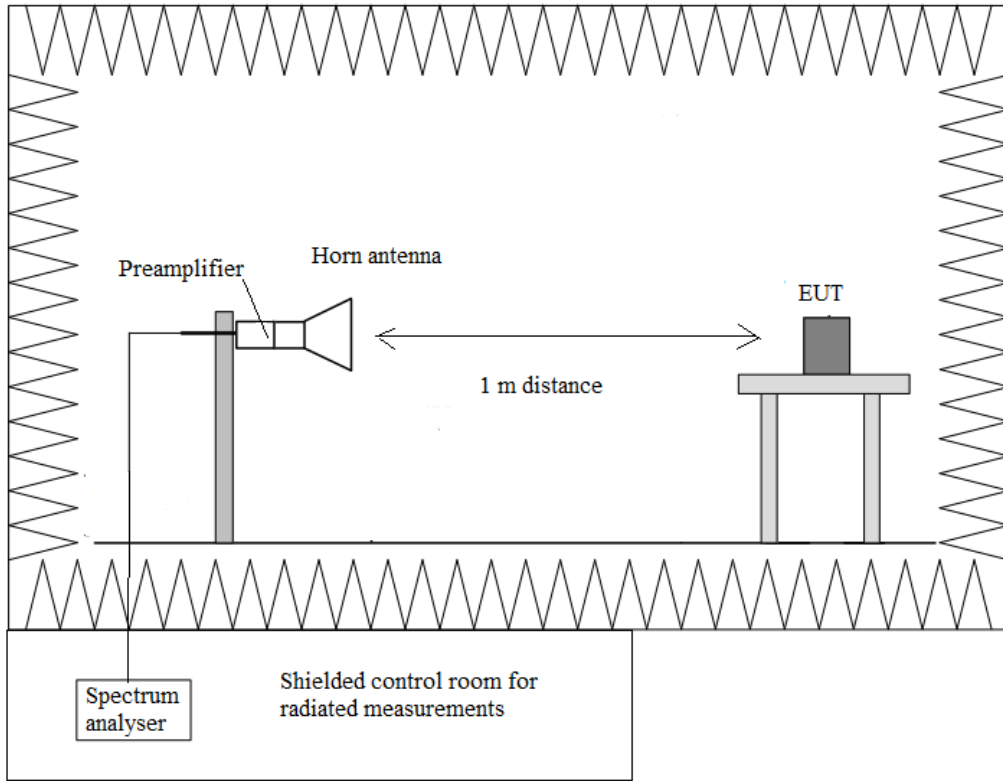

## Occupied Bandwidth

### RESULTS:


- **1M modulation:**

	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
99% Bandwidth (MHz)	1.045000	1.055000	1.055000
Measurement Uncertainty (%)	<± 1.17		

Verdict: PASS

- Low Channel:

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)                      Frequency MHz = 2402.00000  
 Mode = SISO    Active Port = 1

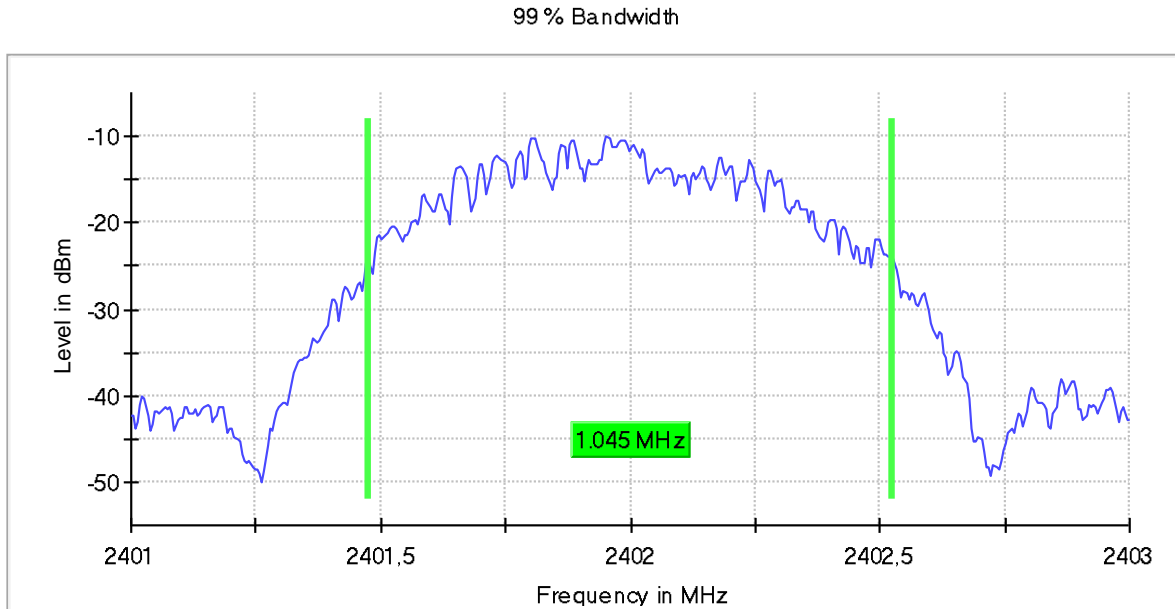


### Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.22 dB	0.30 dB

- Middle Channel:

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)                      Frequency MHz = 2440.00000  
 Mode = SISO    Active Port = 1

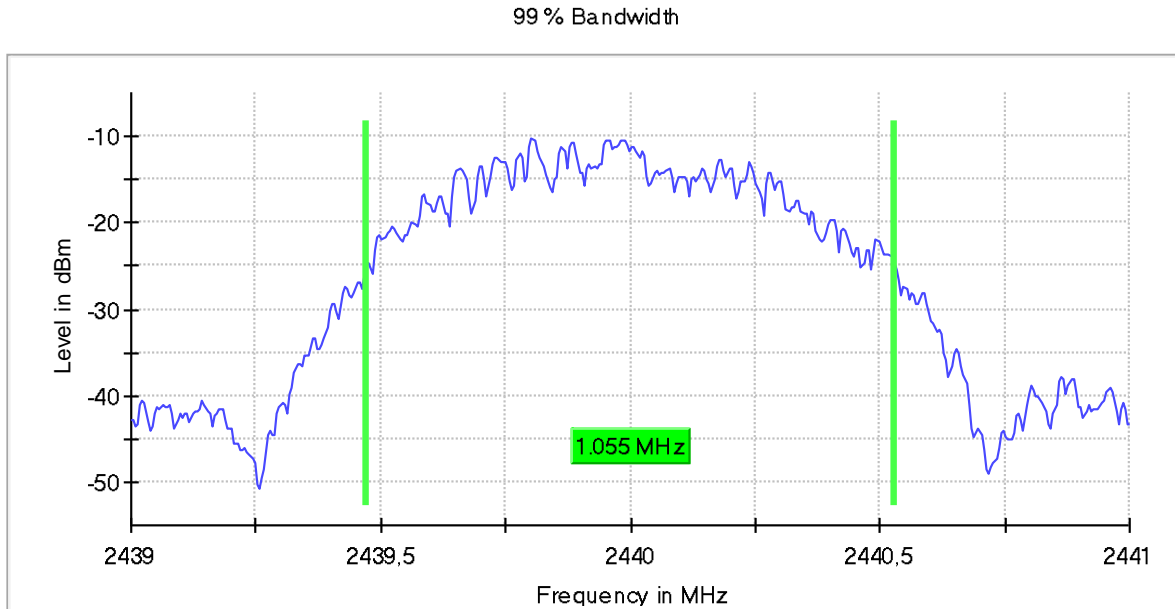


### Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.29 dB	0.30 dB



- High Channel:

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)                      Frequency MHz = 2480.00000  
 Mode = SISO    Active Port = 1

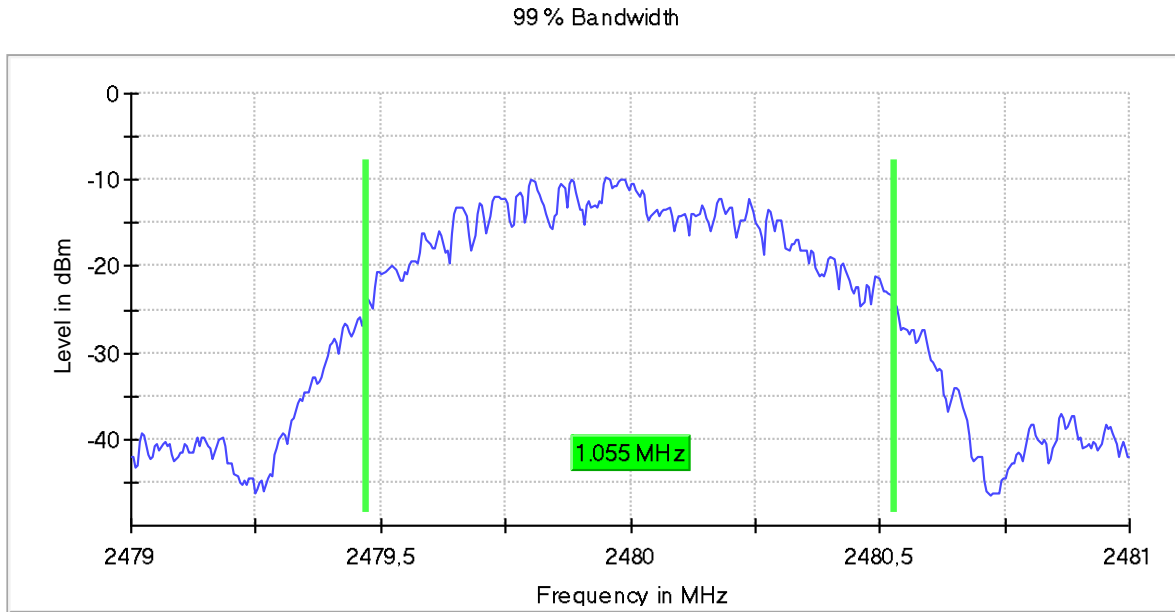

### Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	10.000 kHz	>= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	400	~ 400
Sweeptime	189.648 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.30 dB	0.30 dB
Run	7 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.11 dB	0.30 dB

## FCC 15.247 (a)(2) / RSS-247 5.2. (a) 6 dB Bandwidth

### SPECIFICATION:

The minimum 6 dB Bandwidth shall be at least 500 kHz.

### RESULTS:


- **1M modulation:**

	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
6 dB Spectrum Bandwidth (MHz)	0.732674	0.732674	0.732674
Measurement Uncertainty (%)	<±2.84		

Verdict: PASS

- Low Channel:

Bandwidth MHz = 1                      Modulation = BTLE 5.0 (GFSK 1 Mbit/s)  
 Frequency MHz = 2402.00000    Mode = SISO  
 Active Port = 1

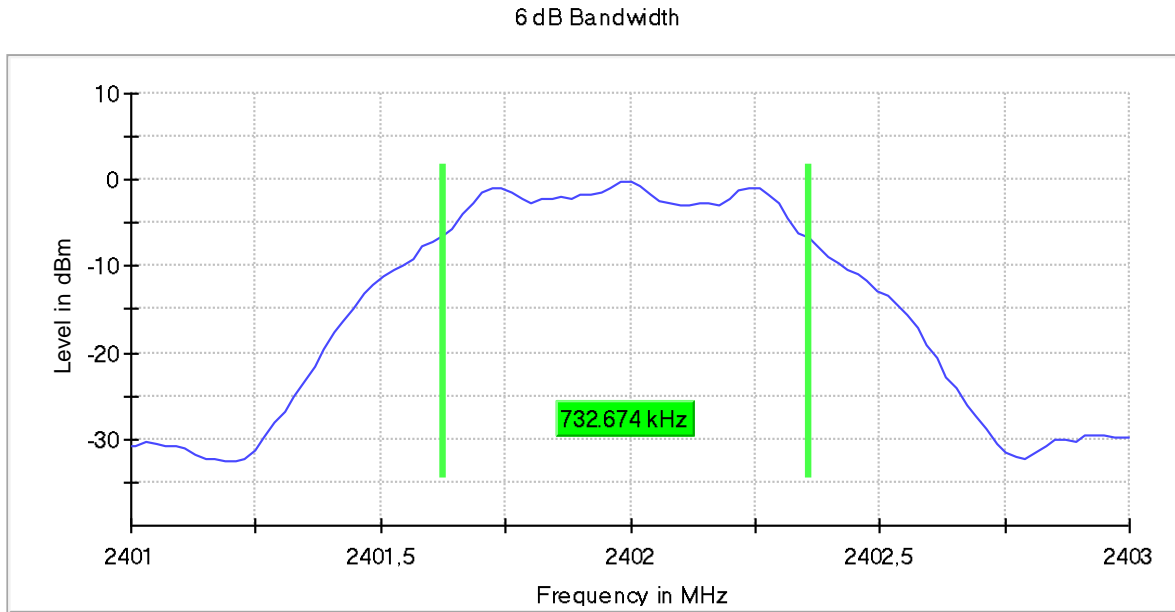


### Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.40100 GHz	2.40100 GHz
Stop Frequency	2.40300 GHz	2.40300 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.00 dB	0.50 dB

- Middle Channel:

Bandwidth MHz = 1                      Modulation = BTLE 5.0 (GFSK 1 Mbit/s)  
 Frequency MHz = 2440.00000    Mode = SISO  
 Active Port = 1

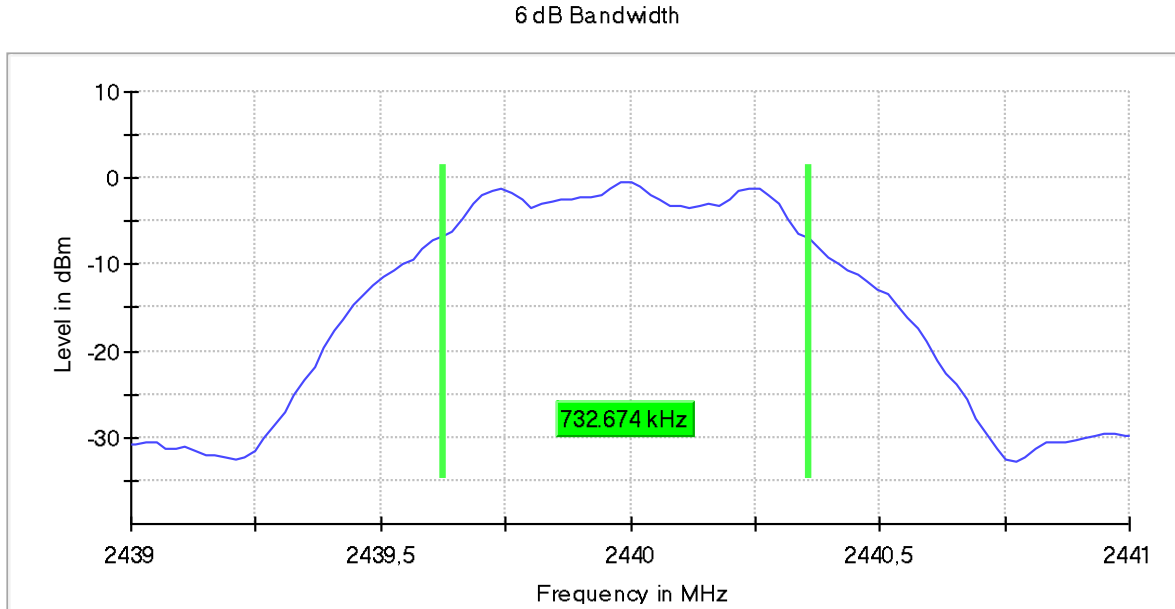


### Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.43900 GHz	2.43900 GHz
Stop Frequency	2.44100 GHz	2.44100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.14 dB	0.50 dB

- High Channel:

Bandwidth MHz = 1                      Modulation = BTLE 5.0 (GFSK 1 Mbit/s)  
 Frequency MHz = 2480.00000    Mode = SISO  
 Active Port = 1

6 dB Bandwidth

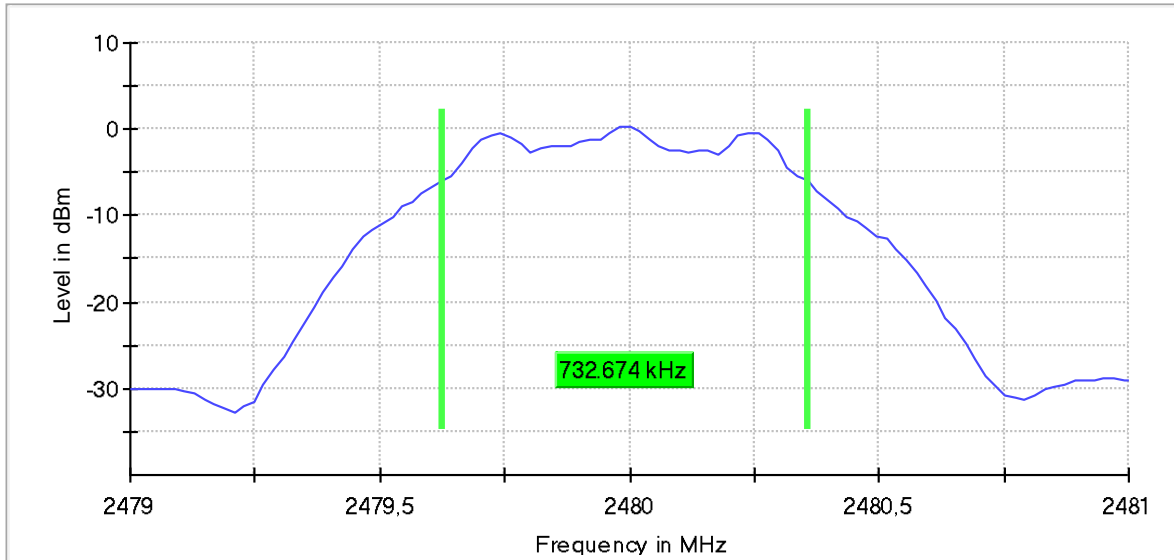

### Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.47900 GHz	2.47900 GHz
Stop Frequency	2.48100 GHz	2.48100 GHz
Span	2.000 MHz	2.000 MHz
RBW	100.000 kHz	~ 100.000 kHz
VBW	300.000 kHz	~ 300.000 kHz
SweepPoints	101	~ 40
Sweeptime	18.938 µs	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	10 / max. 150	max. 150
Stable	5 / 5	5
Max Stable Difference	0.12 dB	0.50 dB

## FCC 15.247 (b) / RSS-247 5.4. (d) Maximum Output Power and Antenna Gain

### SPECIFICATION:

For systems using digital modulation in the 2400-2483.5 MHz band: 1 watt (30 dBm).  
The e.i.r.p. shall not exceed 4 W (36 dBm) (Canada).

### RESULTS:

The maximum peak conducted output power level in the fundamental emission was measured using the method according to point 11.9.1.1 "RBW  $\geq$  DTS bandwidth" of ANSI C.63.10-2013.

The EIRP power (dBm) is calculated by adding the declared maximum antenna gain to the measured conducted power.

Maximum Declared Antenna Gain: +2.5 dBi

#### • 1M modulation:

	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
Maximum Conducted Power (dBm)	-0.1	-0.3	0.2
Maximum EIRP Power (dBm)	2.4	2.2	2.7
Measurement Uncertainty (dB)	< $\pm$ 0.80		


The maximum directional gain of the antenna is less than 6 dBi and therefore the maximum output power is not required to be reduced from the stated values.

Verdict: PASS

- Low Channel:

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)                      Frequency MHz = 2402.00000  
 Mode = SISO    Active Port = 1

Peak Power

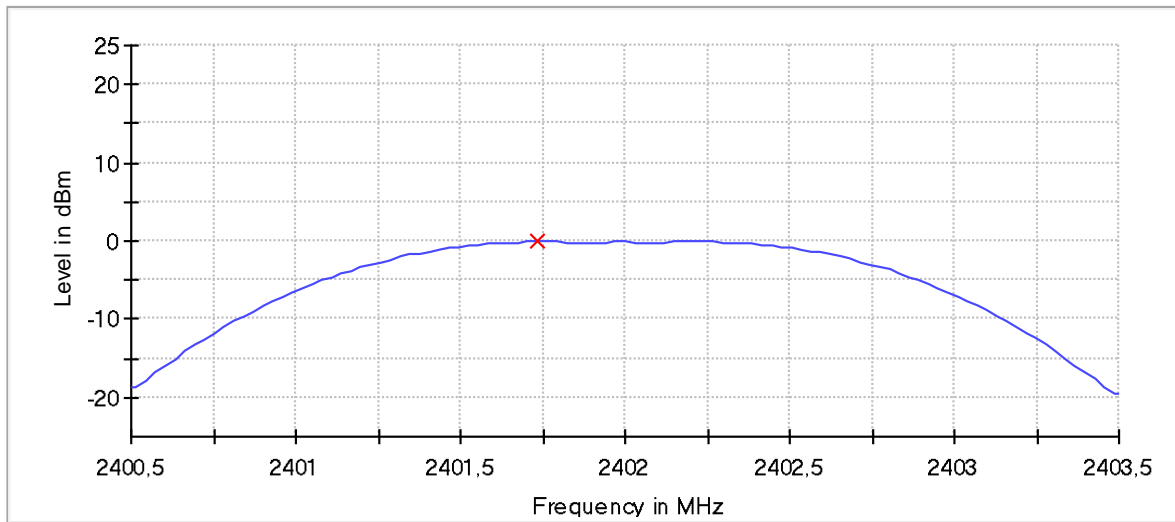


— Connector 1      × Peak Connector 1

### Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.40050 GHz	2.40050 GHz
Stop Frequency	2.40350 GHz	2.40350 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 732.675 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 101
Sweeptime	1.907 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.02 dB	0.50 dB

- Middle Channel:

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)                      Frequency MHz = 2440.00000  
 Mode = SISO    Active Port = 1

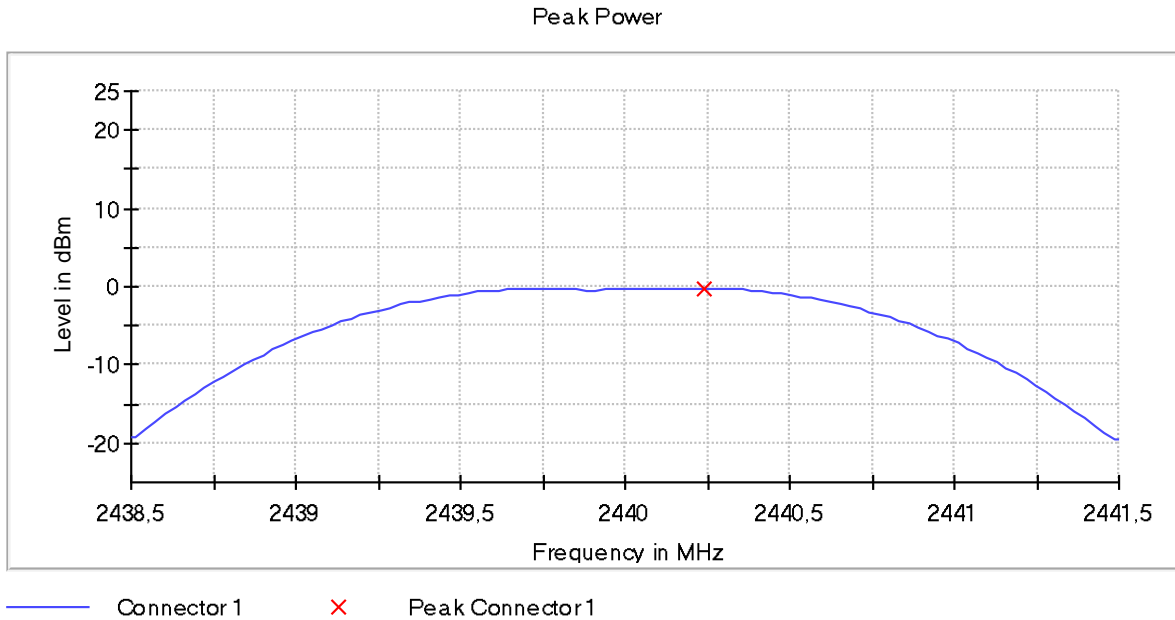


### Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.43850 GHz	2.43850 GHz
Stop Frequency	2.44150 GHz	2.44150 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 732.675 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 101
Sweeptime	1.907 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB



- High Channel:

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)                      Frequency MHz = 2480.00000  
 Mode = SISO    Active Port = 1

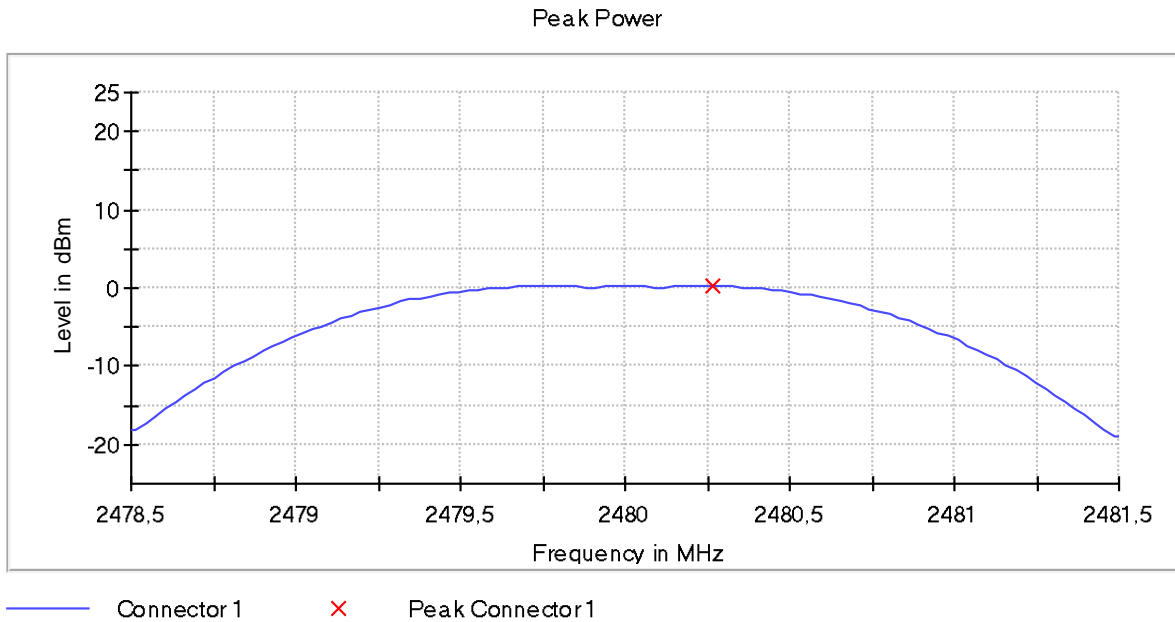

### Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.47850 GHz	2.47850 GHz
Stop Frequency	2.48150 GHz	2.48150 GHz
Span	3.000 MHz	3.000 MHz
RBW	1.000 MHz	>= 732.675 kHz
VBW	3.000 MHz	>= 3.000 MHz
SweepPoints	101	~ 101
SweepTime	1.907 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.02 dB	0.50 dB

## FCC 15.247 (d) / RSS-247 5.5. Band-Edge Emissions Compliance (Transmitter)

### SPECIFICATION:

In any 100 kHz bandwidths outside the frequency band in which the intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.


### RESULTS:

Equipment	Freq (MHz)	Port	Freq (MHz)	Inband Peak Lvl (dBm)	Limit (dBm)
Digital Transmission System (DTS)	2402.00000	1	[2310-2400]	<-43	-20.1
	2480.00000		[2483.5-2500]	<-45	-20.1

- **1M modulation:**

- Low Channel:

Equipment Type = Digital Transmission System (DTS)      Bandwidth MHz = 1  
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)                      Frequency MHz = 2402.00000  
 Mode = SISO    Measurement Point = 1  
 Active Port = 1

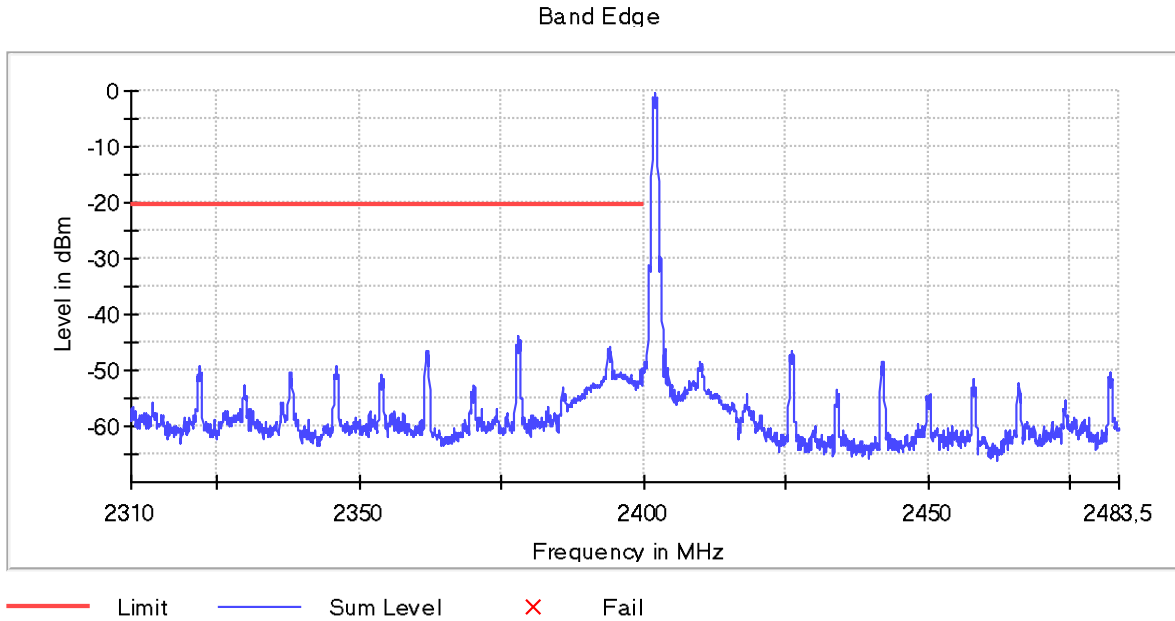

Measurement Uncertainty (dB)	<±1.53
------------------------------	--------

### Spectrum Analyzer Parameters 1


Setting	Instrument Value	Target Value
Start Frequency	2.31000 GHz	2.31000 GHz
Stop Frequency	2.40000 GHz	2.40000 GHz
Span	90.000 MHz	90.000 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1800	~ 1800
Sweeptime	113.672 μs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	13 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.13 dB	0.50 dB

## Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
Sweeptime	94.727 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	6 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

- High Channel:

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)                      Frequency MHz = 2480.00000  
 Mode = SISO    Measurement Point = 1  
 Active Port = 1

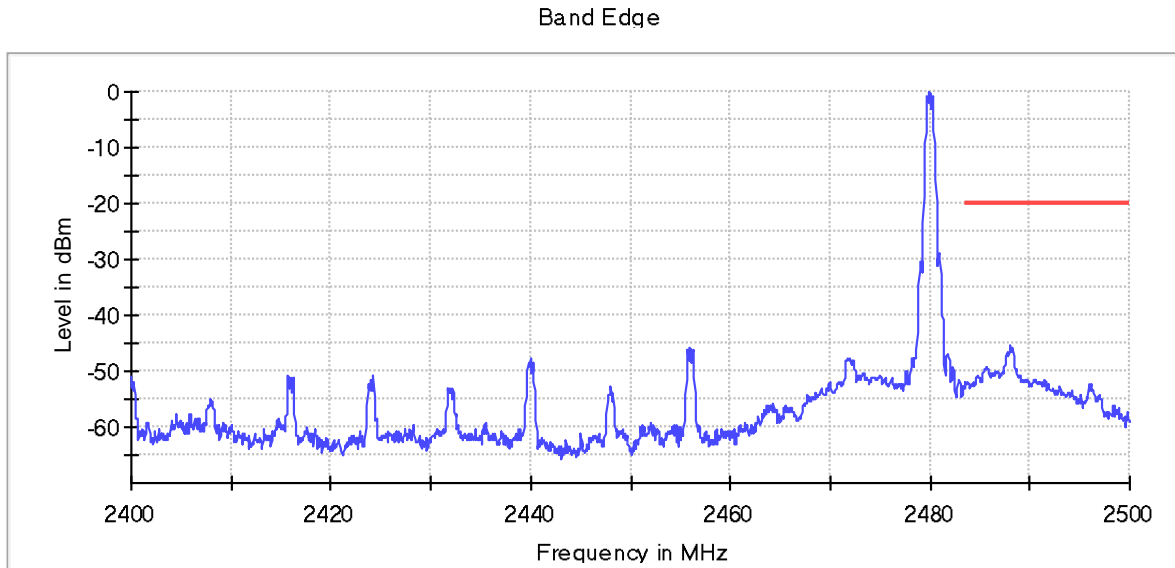

— Limit    — Sum Level    × Fail

Measurement Uncertainty (dB)	<±1.53
------------------------------	--------

### Spectrum Analyzer Parameters 1

Setting	Instrument Value	Target Value
Start Frequency	2.40000 GHz	2.40000 GHz
Stop Frequency	2.48350 GHz	2.48350 GHz
Span	83.500 MHz	83.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	1670	~ 1670
SweepTime	94.727 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	9 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

## Spectrum Analyzer Parameters 2

Setting	Instrument Value	Target Value
Start Frequency	2.48350 GHz	2.48350 GHz
Stop Frequency	2.50000 GHz	2.50000 GHz
Span	16.500 MHz	16.500 MHz
RBW	100.000 kHz	<= 100.000 kHz
VBW	300.000 kHz	>= 300.000 kHz
SweepPoints	330	~ 330
SweepTime	18.945 µs	AUTO
Reference Level	0.000 dBm	0.000 dBm
Attenuation	20.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
SweepType	FFT	AUTO
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	8 / max. 150	max. 150
Stable	3 / 3	3
Max Stable Difference	0.00 dB	0.50 dB

Verdict: PASS

## FCC 15.247 (e) / RSS-247 5.2. (b) Power Spectral Density

### SPECIFICATION:

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### RESULTS:

The maximum power spectral density level in the fundamental emission was measured using the method according to point 11.10.2." Method PKPSD (peak PSD)" of ANSI C.63.10-2013.

- **1M modulation:**


	Low Channel 2402 MHz	Middle Channel 2440 MHz	High Channel 2480 MHz
Power Spectral Density (dBm)	-9.867	-10.153	-9.566
Measurement Uncertainty (dB)	<±0.99		

Verdict: PASS

- Low Channel:

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)                      Frequency MHz = 2402.00000  
 Mode = SISO    Active Port = 1

Peak Power Spectral Density

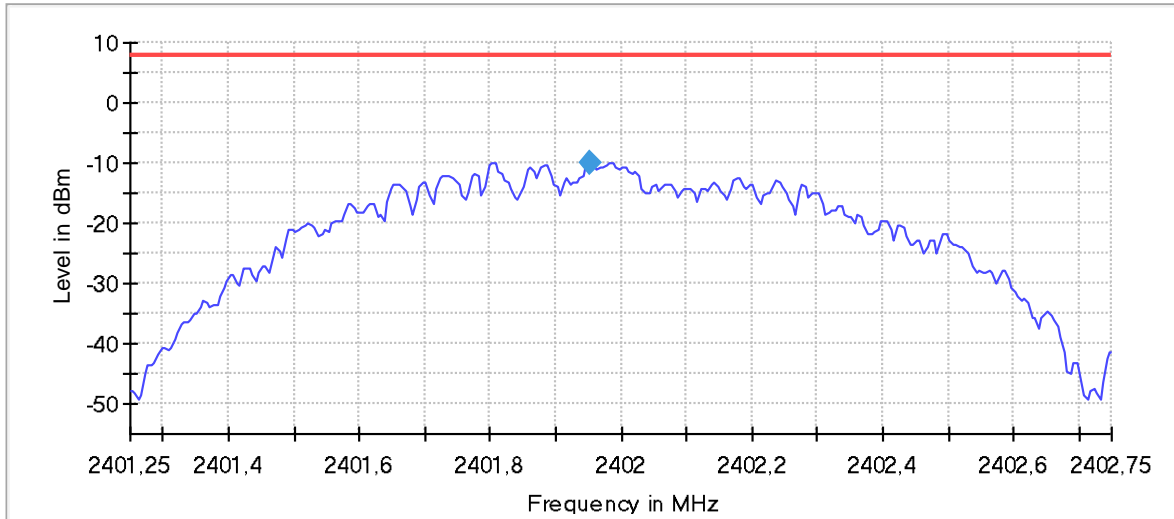

— Limit    — Sum Level    ◆ PSD

### Spectrum Analyzer Parameters


Setting	Instrument Value	Target Value
Start Frequency	2.40125 GHz	2.40125 GHz
Stop Frequency	2.40275 GHz	2.40275 GHz
Span	1.500 MHz	1.500 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	300	~ 300
Sweeptime	1.500 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	5 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.30 dB	0.50 dB



- Middle Channel:

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)                      Frequency MHz = 2440.00000  
 Mode = SISO    Active Port = 1

Peak Power Spectral Density

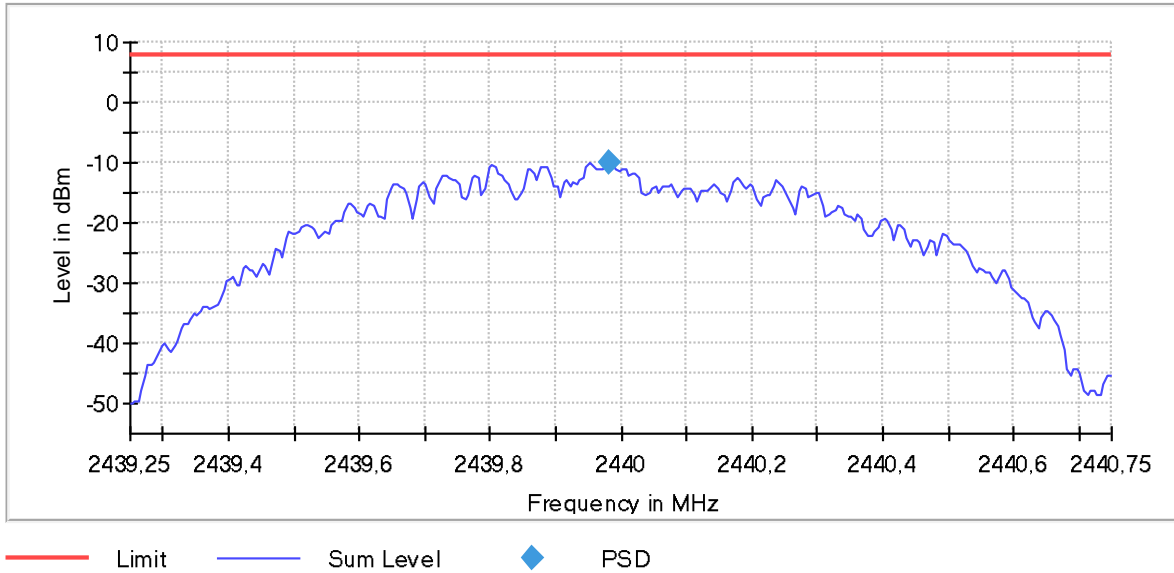


### Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.43925 GHz	2.43925 GHz
Stop Frequency	2.44075 GHz	2.44075 GHz
Span	1.500 MHz	1.500 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	300	~ 300
Sweeptime	1.500 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.22 dB	0.50 dB

- High Channel:

Equipment Type = Digital Transmission System (DTS)    Bandwidth MHz = 1  
 Modulation = BTLE 5.0 (GFSK 1 Mbit/s)                      Frequency MHz = 2480.00000  
 Mode = SISO    Active Port = 1

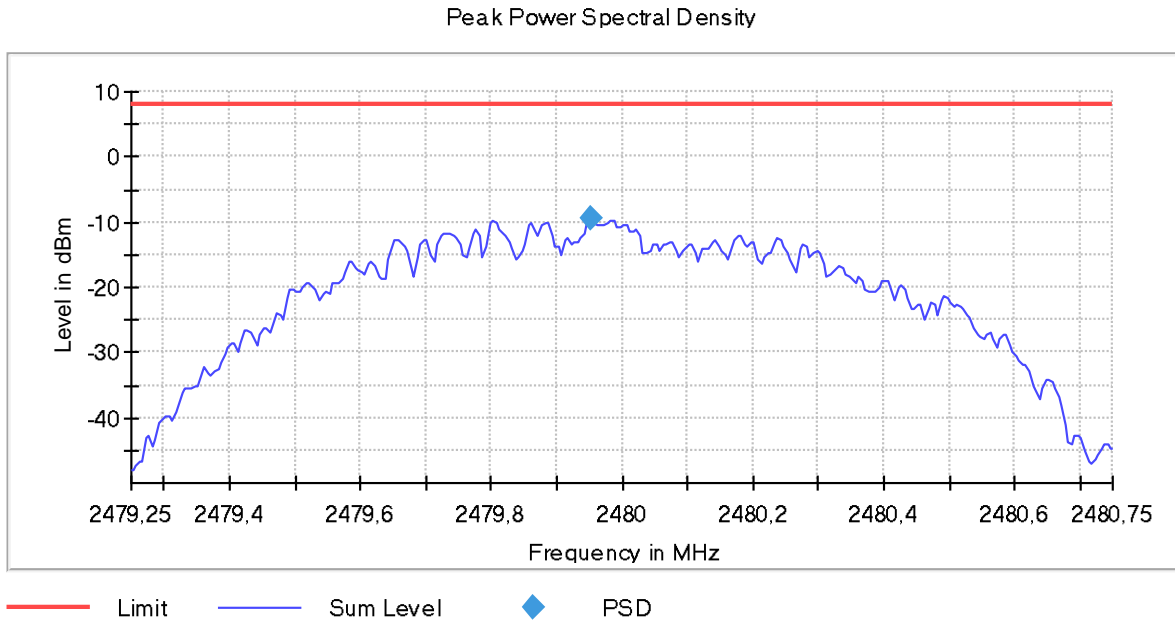

### Spectrum Analyzer Parameters

Setting	Instrument Value	Target Value
Start Frequency	2.47925 GHz	2.47925 GHz
Stop Frequency	2.48075 GHz	2.48075 GHz
Span	1.500 MHz	1.500 MHz
RBW	10.000 kHz	<= 10.000 kHz
VBW	30.000 kHz	>= 30.000 kHz
SweepPoints	300	~ 300
Sweeptime	1.500 ms	AUTO
Reference Level	-10.000 dBm	-10.000 dBm
Attenuation	10.000 dB	AUTO
Detector	MaxPeak	MaxPeak
SweepCount	100	100
Filter	3 dB	3 dB
Trace Mode	Max Hold	Max Hold
Sweeptype	Sweep	Sweep
Preamp	off	off
Stablemode	Trace	Trace
Stablevalue	0.50 dB	0.50 dB
Run	4 / max. 150	max. 150
Stable	2 / 2	2
Max Stable Difference	0.27 dB	0.50 dB

## FCC 15.247 (d) / RSS-247 5.5. Emission Limitations Radiated (Transmitter)

### SPECIFICATION:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ( $\mu\text{V/m}$ )	Field strength ( $\text{dB}\mu\text{V/m}$ )	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 10000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247: Attenuation below the general field strength limits specified in RSS-Gen is not required.

### RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-17 GHz and at distance of 1 m for the frequency range 17 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

### **Frequency range 30 MHz - 1 GHz (worst-case):**

The spurious frequencies detected do not depend neither on the operating channel nor the modulation mode.

No spurious frequencies at less than 20 dB below the limit.

Measurement Uncertainty (dB)  $<\pm 5.1$

## Frequency range 1 - 26 GHz:

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Spurious frequencies with peak levels above the average limit (54 dB $\mu$ V/m at 3 m) are measured with average detector for checking compliance with the average limit.

- **1M modulation:**

- LOW CHANNEL. All spurious detected are below the limit:

- MIDDLE CHANNEL. All spurious detected are below the limit.

- HIGH CHANNEL. All spurious detected are below the limit.

Measurement Uncertainty (dB):  $<\pm 4.6$  for  $1 < f < \leq 17$  GHz  
 $<\pm 4.89$  for  $17 < f \leq 26$  GHz

See maximizations in graphs below.


Verdict: PASS

### Spectrum Analyzer Parameters:

Subrange	Step Size	Detectors	Bandwidth	Sweep Time	Preamp
Receiver: [ESW 44] 30 MHz - 1 GHz	48,5 kHz	PK+	100 kHz	1 s	30 dB
Receiver: [ESW 44] 1 GHz - 3 GHz	66,667 kHz	PK+ ; AVG	1 MHz	1 s	0 dB
Receiver: [ESW 44] 3 GHz - 17 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB
Receiver: [FSV 40] 17 GHz - 26 GHz	500 kHz	PK+ ; AVG	1 MHz	1 s	0 dB

### FREQUENCY RANGE 30 MHz - 1 GHz (worst-case):

The spurious frequencies detected do not depend neither on the operating channel nor the modulation mode.

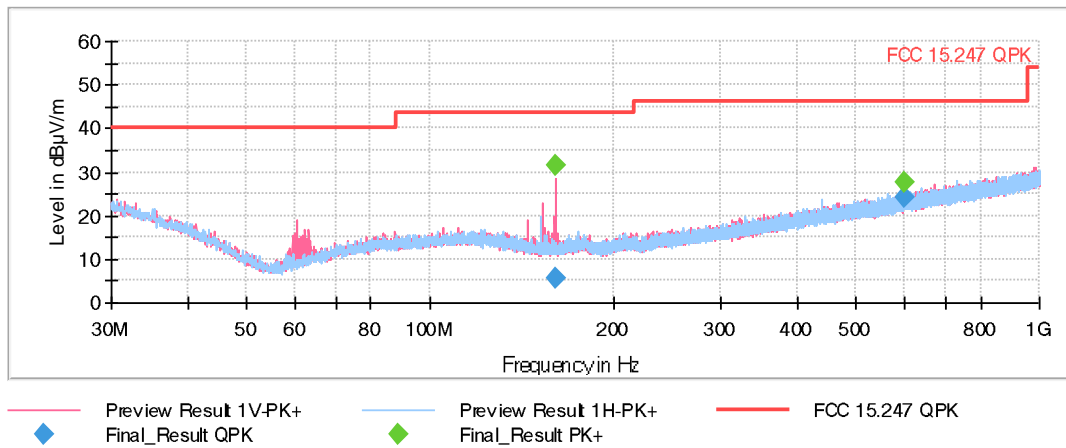


This plot is valid for the Low, Middle and High Channels.

### Maximizations

Frequency (MHz)	QuasiPeak (dBµV/m)	MaxPeak (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Azimuth (deg)	Bandwidth (kHz)	Height (cm)	Pol
160.804500	---	31.68	---	---	232.0	120.000	100.0	V
160.804500	5.60	---	43.50	37.90	232.0	120.000	100.0	V
599.972000	---	27.45	---	---	330.0	120.000	158.0	V
599.972000	24.04	---	46.00	21.96	330.0	120.000	158.0	V

- **1M modulation:**  
 FREQUENCY RANGE 1 - 3 GHz.  
 - Low Channel:

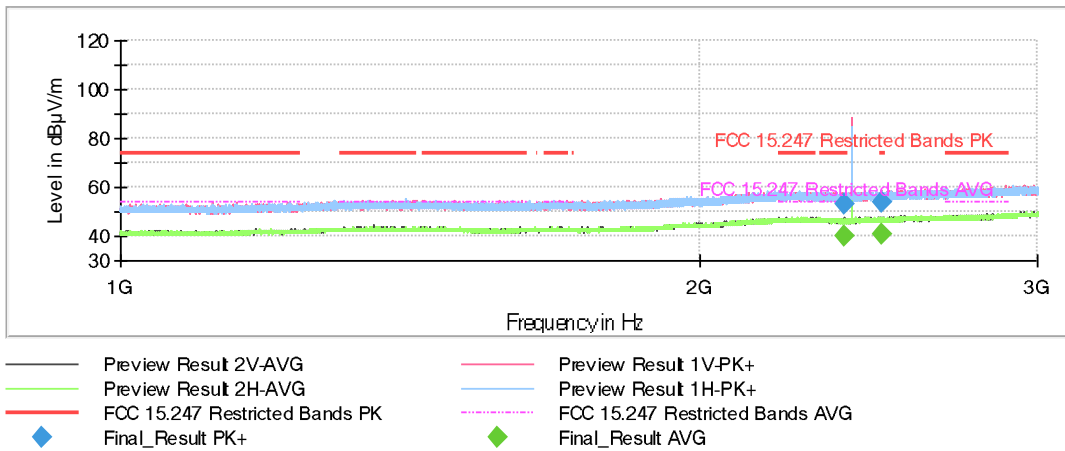


The peak above the limit is the carrier frequency.

## Maximizations

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Azimuth (deg)
2377.933333	53.33	---	74.00	20.67	V	261.0
2377.933333	---	40.20	54.00	13.80	V	261.0
2492.400000	53.46	---	74.00	20.54	V	46.0
2492.400000	---	40.50	54.00	13.50	V	46.0

- Middle Channel:

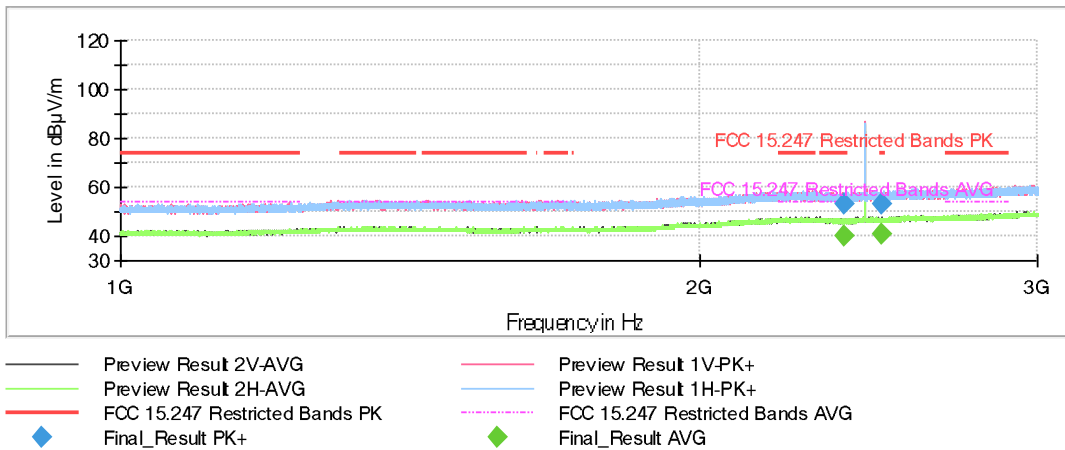


The peak above the limit is the carrier frequency.

## Maximizations

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Azimuth (deg)
2382.866667	52.87	---	74.00	21.13	V	325.0
2382.866667	---	40.18	54.00	13.82	V	325.0
2488.133333	53.35	---	74.00	20.65	V	280.0
2488.133333	---	40.45	54.00	13.55	V	280.0

- High Channel:

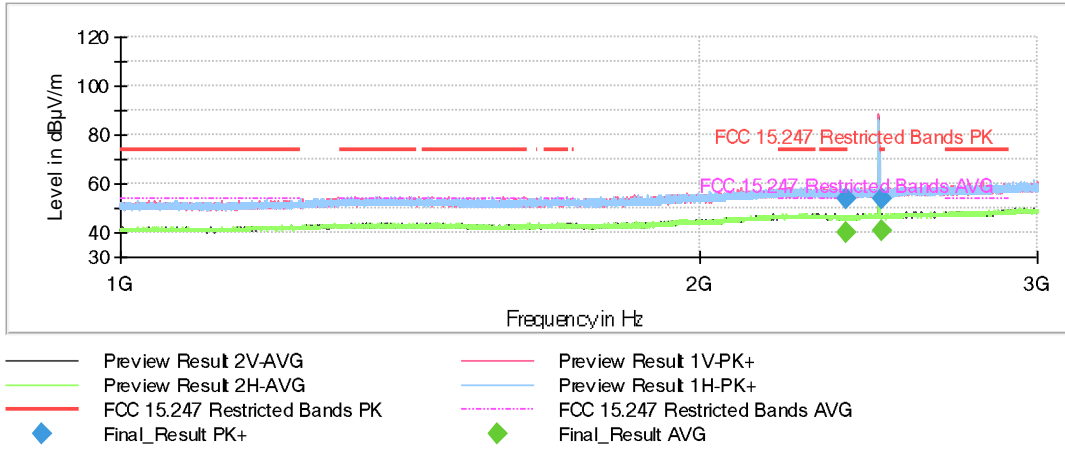


The peak above the limit is the carrier frequency.

## Maximizations

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Pol	Azimuth (deg)
2386.200000	---	40.14	54.00	13.86	H	65.0
2386.200000	53.72	---	74.00	20.28	H	65.0
2487.533333	---	40.44	54.00	13.56	V	248.0
2487.533333	53.50	---	74.00	20.50	V	248.0

FREQUENCY RANGE 3 - 17 GHz:


- Low Channel:

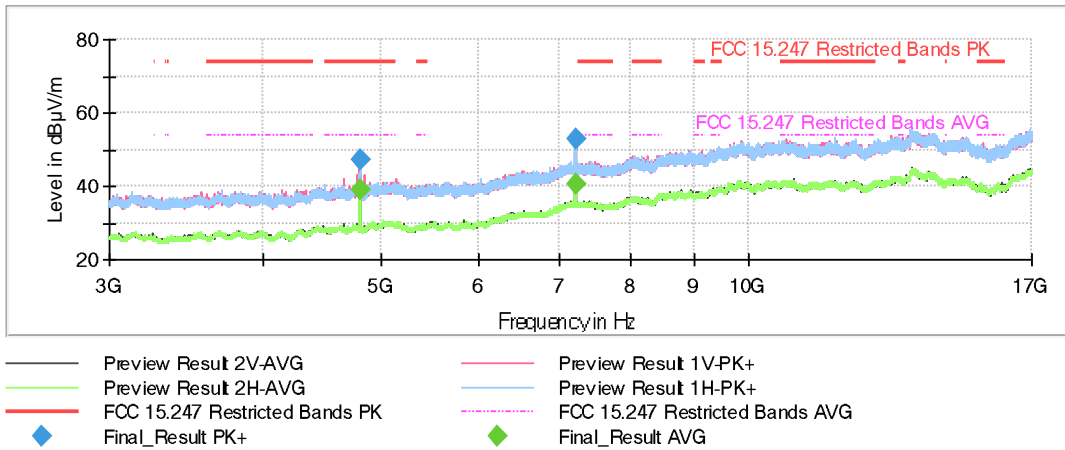

## Maximizations

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol
4803.500000	47.39	---	74.00	26.61	125.0	V
4803.500000	---	38.91	54.00	15.09	125.0	V
7205.000000	52.68	---	---	---	138.0	H
7205.000000	---	40.71	---	---	138.0	H


- Middle Channel:

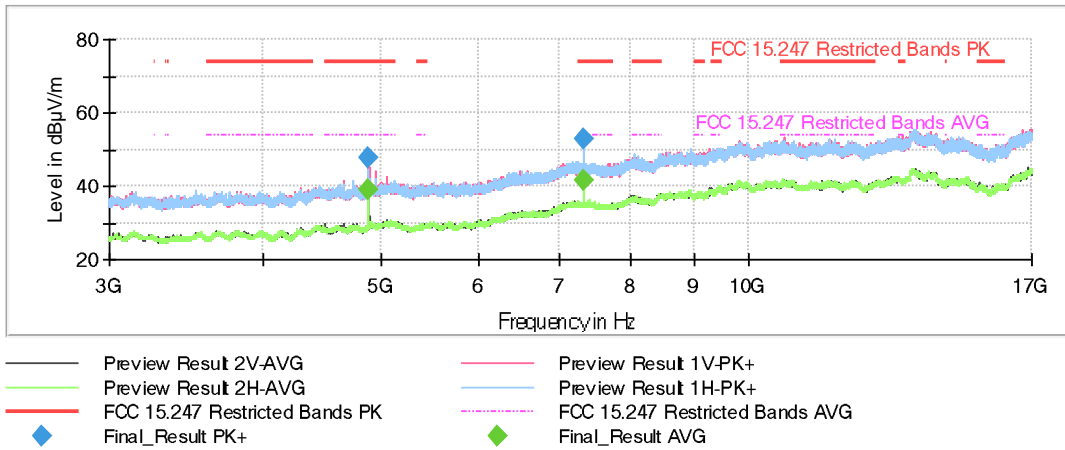

### Maximizations

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol
4879.500000	47.93	---	74.00	26.07	126.0	V
4879.500000	---	39.22	54.00	14.78	126.0	V
7320.500000	52.71	---	74.00	21.29	171.0	H
7320.500000	---	41.43	54.00	12.57	171.0	H

- High Channel:

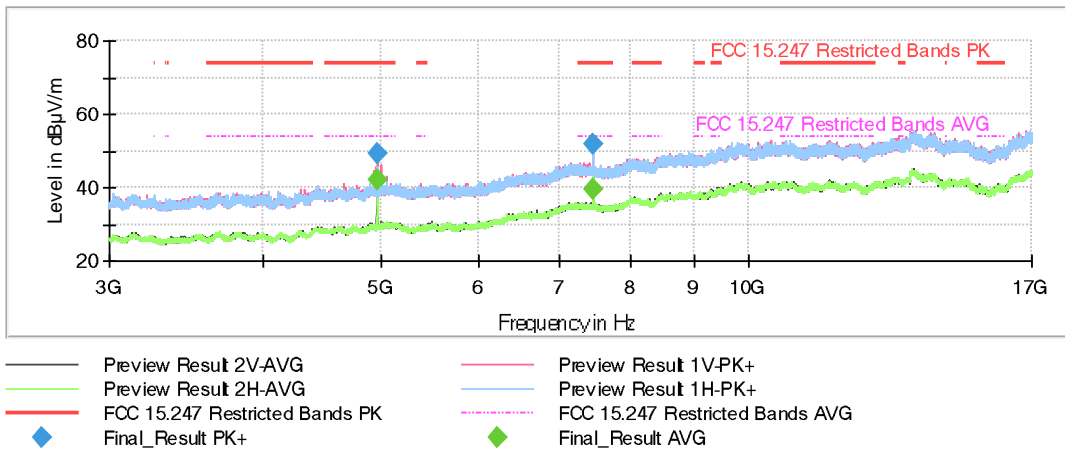


### Maximizations

Frequency (MHz)	MaxPeak (dBµV/m)	Average (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Height (cm)	Pol
4960.000000	49.09	---	74.00	24.91	158.0	V
4960.000000	---	42.00	54.00	12.00	158.0	V
7439.000000	51.68	---	74.00	22.32	172.0	H
7439.000000	---	39.43	54.00	14.57	172.0	H



FREQUENCY RANGE 17 - 26 GHz:


The spurious frequencies detected do not depend on the operating channel.

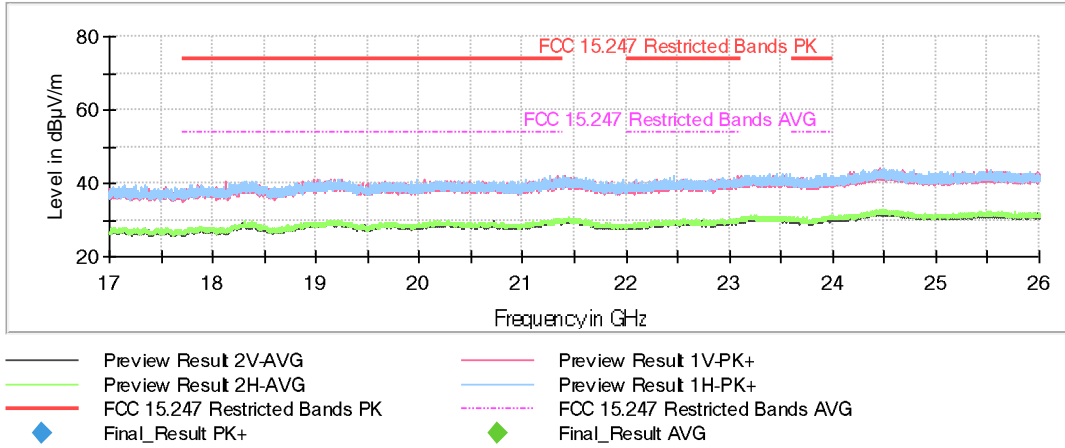


This plot is valid for the Low, Middle and High Channels.

FREQUENCY RANGE 2.31-2.39 GHz:


- Low Channel:

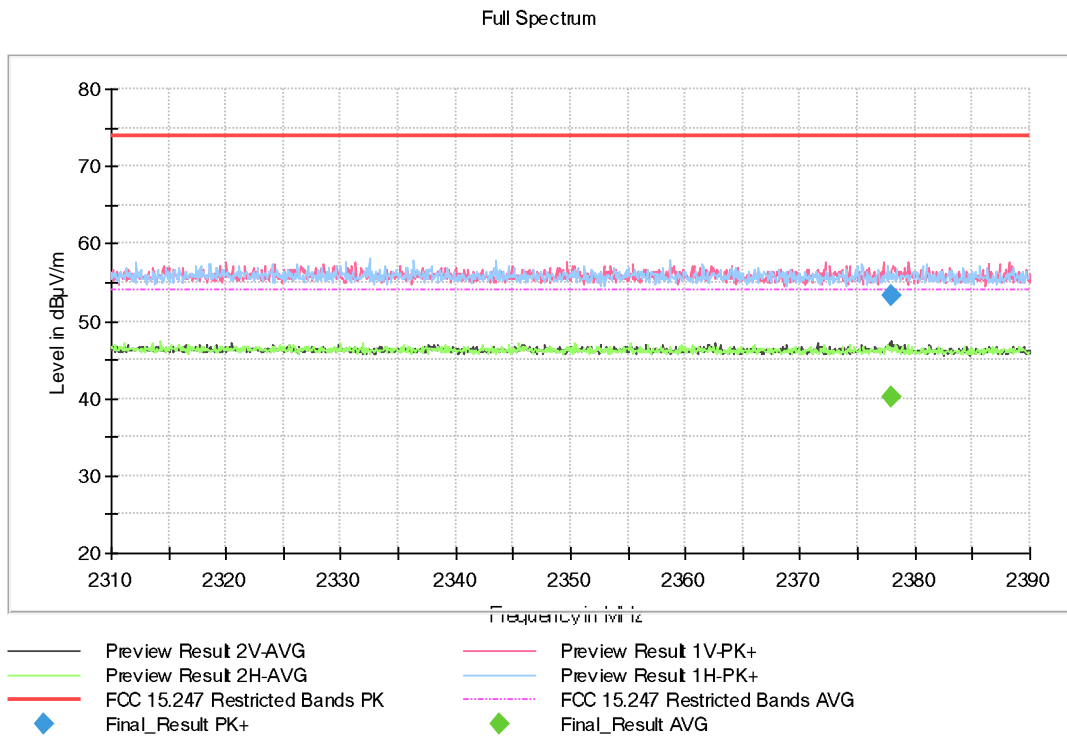

- Middle Channel:

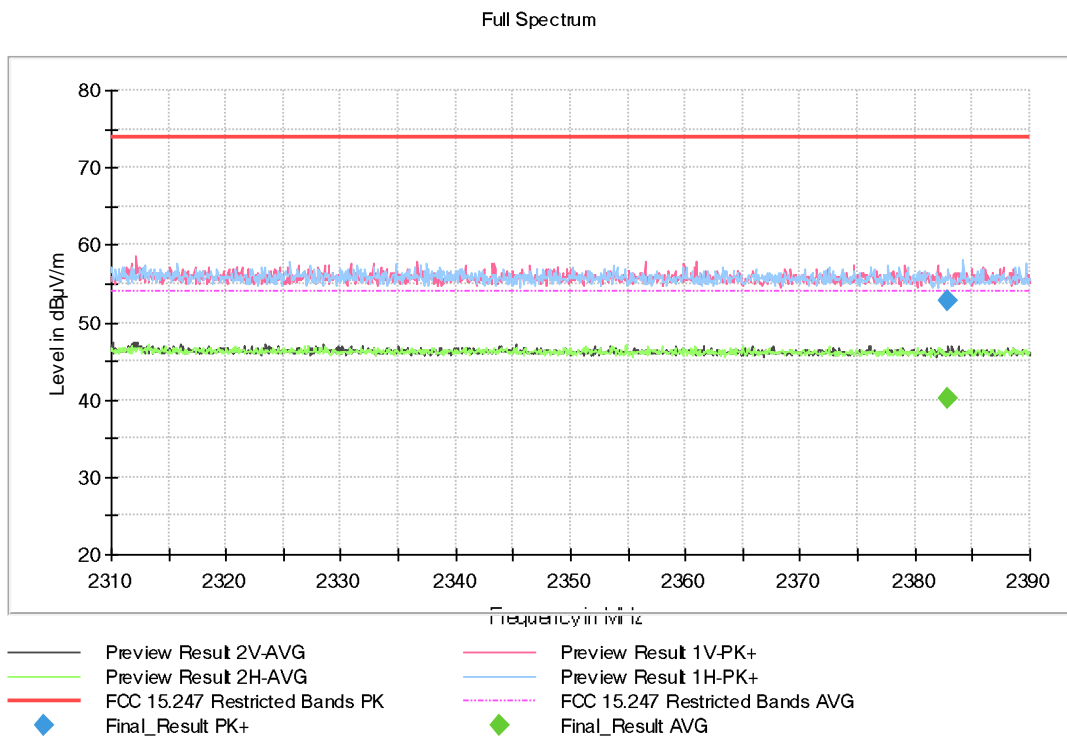


- High Channel:

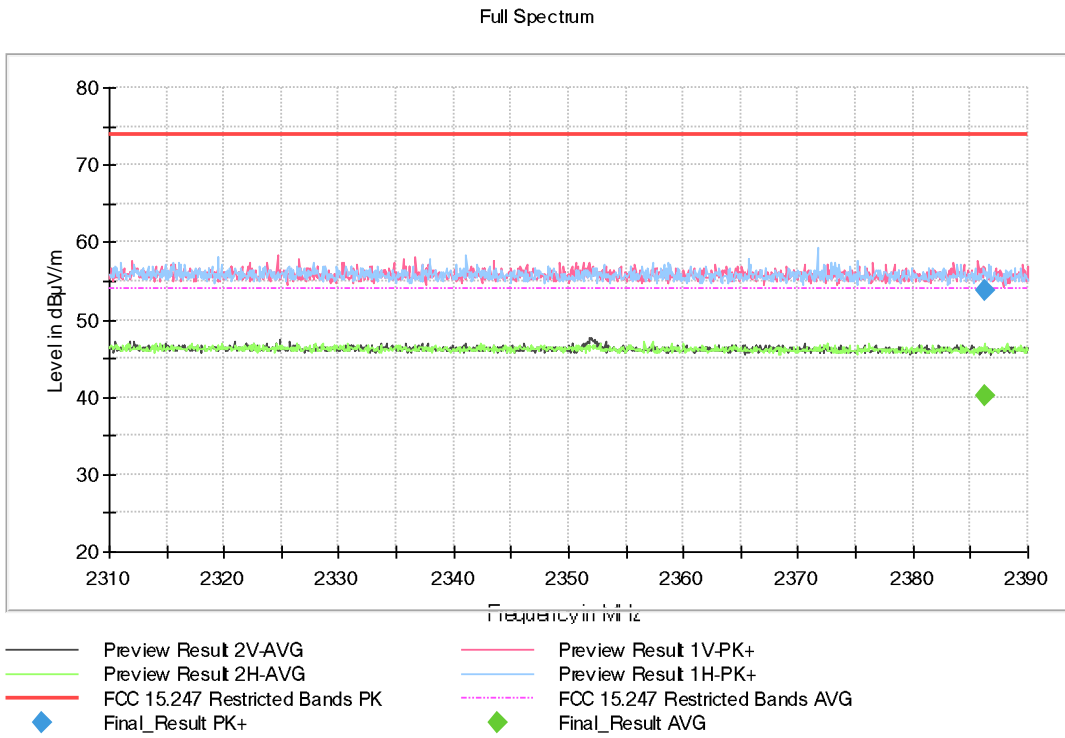


FREQUENCY RANGE 2.4835-2.5 GHz:

- Low Channel:

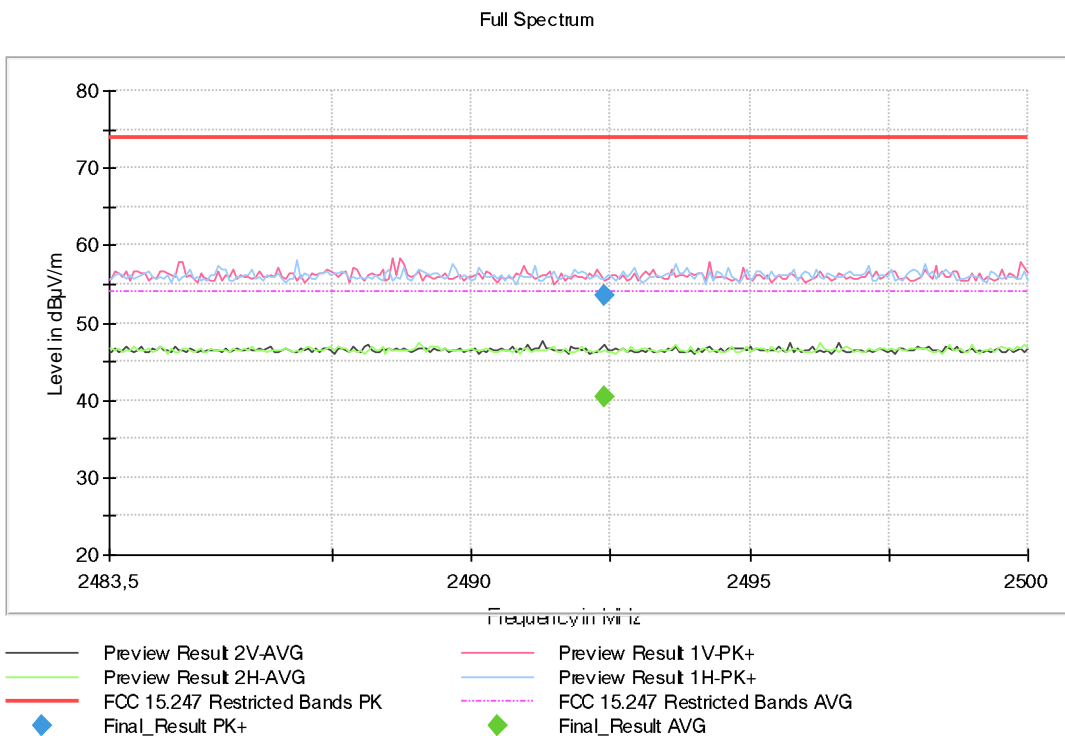

- Middle Channel:

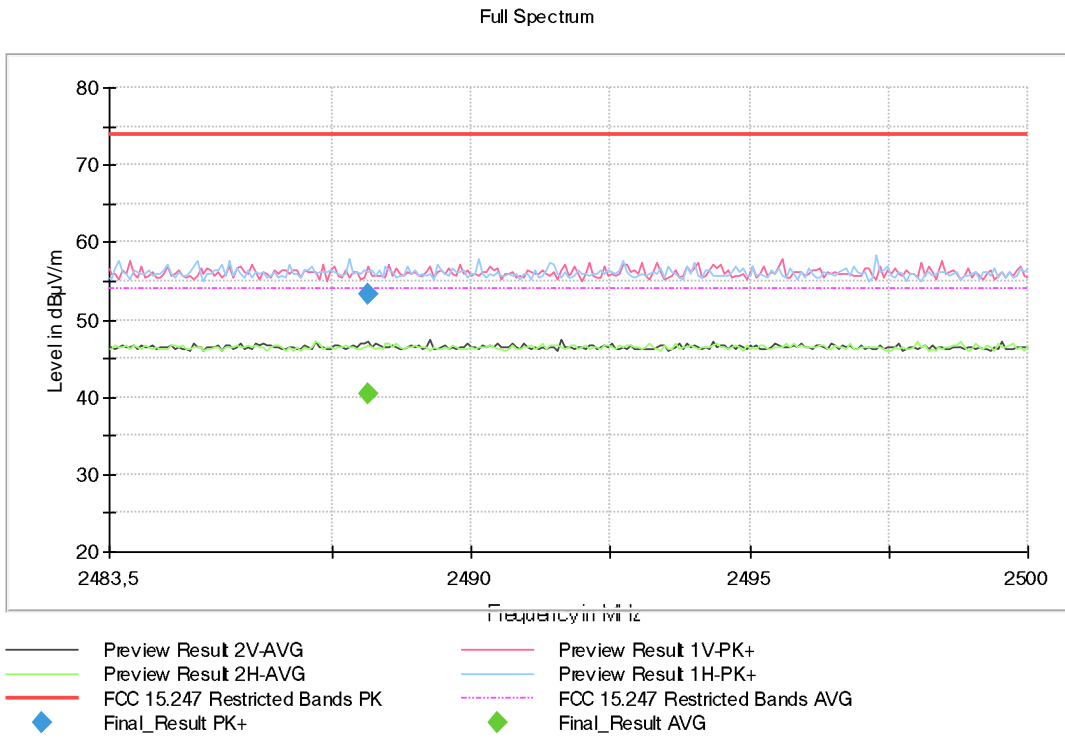

- High Channel:

