



Test report No:
 NIE: 64305RRF.001

Partial Test Report

USA FCC Part 15.247, 15.209
 CANADA RSS-247, RSS-Gen

Radio Frequency Devices. Operation within the bands 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz.

Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices.

General Requirements and Information for the Certification of Radio Apparatus.

(*) Identification of item tested	S7900 series Philips shaver with Bluetooth (S79xx)
(*) Trademark	Philips (or Philips Norelco in the US)
(*) Model and /or type reference	S7900 series
Other identification of the product	HW version: 1.0 SW version: 286 FCC ID: 2AICSS79 IC ID: 21912-S79
(*) Features	Bluetooth 4.1
Applicant	Philips Consumer Lifestyle B.V. Tussendiepen 4, 9206 AD Drachten, The Netherlands
Test method requested, standard	USA FCC Part 15.247 (10-1-19) Edition: Operation within the bands 902 - 928 MHz, 2400 -2483.5 MHz, and 5725 - 5850 MHz. USA FCC Part 15.209 (10-1-19) Edition: Radiated emission limits; general requirements. CANADA RSS-247 Issue 2 (February 2017). CANADA RSS-Gen Issue 5 (March 2019). - Emission limitations radiated (Transmitter) Guidance for Performing Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid Systems Devices Operating Under Section 15.247 of the FCC Rules. 558074 D01 Meas Guidance v05r02 dated April 2, 2019. Guidance for Emission Testing of Transmitters with Multiple Outputs in the Same Band 662911 D01 Multiple Transmitter Output v02r01 dated 10/31/2013. ANSI C63.10-2013: American National Standard for Testing Unlicensed Wireless Devices.
Approved by (name / position & signature)	Rafael López Martín EMC Consumer &RF Lab. Manager
Date of issue	2020-09-23
Report template No	FDT08_22 (*) "Data provided by the client"

Index

Competences and guarantees	3
General conditions.....	3
Uncertainty.....	3
Data provided by the client	3
Usage of samples	3
Test sample description.....	4
Identification of the client	6
Testing period and place	6
Document history.....	6
Environmental conditions	6
Remarks and comments.....	7
Testing verdicts.....	8
Summary	8
Appendix A: Test results. Bluetooth Low Energy	9

Competences and guarantees

DEKRA Testing and Certification S.A.U. is a testing laboratory accredited by the National Accreditation Body (ENAC -Entidad Nacional de Acreditación), to perform the tests indicated in the Certificate No. 51/LE 147.

DEKRA Testing and Certification is a FCC-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

DEKRA Testing and Certification is an ISED-recognized accredited testing laboratory with appropriate scope of accreditation that include testing performed in this test report.

In order to assure the traceability to other national and international laboratories, DEKRA Testing and Certification S.A.U. has a calibration and maintenance program for its measurement equipment.

DEKRA Testing and Certification S.A.U. guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated on the report and, it is based on the knowledge and technical facilities available at DEKRA Testing and Certification S.A.U. at the time of performance of the test.

DEKRA Testing and Certification S.A.U. is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA Testing and Certification S.A.U.

General conditions

1. This report is only referred to the item that has undergone the test.
2. This report does not constitute or imply on its own an approval of the product by the Certification Bodies or competent Authorities.
3. This document is only valid if complete; no partial reproduction can be made without previous written permission of DEKRA Testing and Certification S.A.U.
4. This test report cannot be used partially or in full for publicity and/or promotional purposes without previous written permission of DEKRA Testing and Certification S.A.U. and the Accreditation Bodies.

Uncertainty

Uncertainty (factor $k=2$) was calculated according to the DEKRA Testing and Certification S.A.U. internal document PODT000.

Data provided by the client

The following data has been provided by the client:

1. Information relating to the description of the sample ("Identification of the item tested", "Trademark", "Model and/or type reference tested").
2. The sample of the model S7900 series is a Bluetooth connected shaver.

DEKRA Testing and Certification S.A.U. declines any responsibility with respect to the information provided by the client and that may affect the validity of result.

Usage of samples

Samples undergoing test have been selected by: The client.

- Sample S/01 is composed of the following elements:

Control N°	Description	Model	Serial N°	Date of reception
60899/013	S7900 series Philips shaver with Bluetooth (S79xx)	Series S7000	--	2019/09/10

Auxiliary elements used with the Sample S/01:

Control N°	Description	Model	Serial N°	Date of reception
64305/002	AC/DC Adapter	AD21163HF	--	2020/07/13

Sample S/01 has undergone the following test(s): The tests indicated in the Appendix A.

Test sample description

Ports..... :	Port name and description	Cable					
		Specified max length [m]	Attached during test	Shielded	Coupled to patient ⁽³⁾		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>		
Supplementary information to the ports..... :							
Rated power supply	Voltage and Frequency		Reference poles				
			L1	L2	L3	N	PE
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input type="checkbox"/>	AC:	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
	<input checked="" type="checkbox"/>	DC:					
<input type="checkbox"/>	DC:						
Rated Power	3,6 Volt						

Clock frequencies.....:			
Other parameters.....:			
Software version.....:	286		
Hardware version.....:	1.0		
Dimensions in cm (W x H x D).....:	46,72 mm X 138,98 mm x 53,33 mm		
Mounting position.....:	<input type="checkbox"/>	Table top equipment	
	<input type="checkbox"/>	Wall/Ceiling mounted equipment	
	<input type="checkbox"/>	Floor standing equipment	
	<input checked="" type="checkbox"/>	Hand-held equipment	
	<input type="checkbox"/>	Other:	
Modules/parts.....:	Module/parts of test item	Type	Manufacturer
Accessories (not part of the test item).....:	Description	Type	Manufacturer
Documents as provided by the applicant.....:	Description	File name	Issue date

⁽³⁾ Only for Medical Equipment

Identification of the client

Philips Consumer Lifestyle B.V.
Oliemolenstraat 5, 9203 ZN Drachten, The Netherlands

Testing period and place

Test Location	DEKRA Testing and Certification S.A.U.
Date (start)	2020-07-27
Date (finish)	2020-07-28

Document history

Report number	Date	Description
64305RRF.001	2020-09-23	First release

Environmental conditions

In the control chamber, the following limits were not exceeded during the test:

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

In the semianechoic chamber, the following limits were not exceeded during the test.

Temperature	Min. = 15 °C Max. = 35 °C
Relative humidity	Min. = 20 % Max. = 75 %

Remarks and comments

The tests have been performed by the technical personnel: Antonio Manuel Sánchez, Jaime Barranquero, Victoria Olmedo.

Used instrumentation:

Radiated Measurements:

	Last Calibration	Due Calibration
1. Semianechoic Absorber Lined Chamber ALBATROSS P29419	2020/01	2023/01
2. Ultralog Antenna 30MHz-6GHz, ROHDE AND SCHWARZ HL562E_UPG	2019/10	2022/10
3. EMI Test Receiver 2Hz-44GHz, ROHDE AND SCHWARZ ESW44	2019/10	2021/10
4. Horn Antenna 1-18 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9120 D	2019/11	2022/11
5. Broadband Horn Antenna 18 - 40 GHz SCHWARZBECK MESS-ELEKTRONIK BBHA 9170	2017/12	2020/12
6. Preamplifier 30dB 500MHz-18GHz, SCHWARZBECK BBV 9718 C	2020/01	2021/01

Testing verdicts

Not applicable:	N/A
Pass:	P
Fail:	F
Not measured:	N/M

Summary

1. Bluetooth Low Energy

FCC PART 15 PARAGRAPH/ RSS-247			
Requirement – Test case		Verdict	Remark
FCC 15.247 (a)(2) / RSS-247 5.2. (a)	6 dB Bandwidth	N/M	
FCC 15.247 (b) / RSS-247 5.4. (d)	Maximum output power and antenna gain	N/M	
FCC 15.247 (d) / RSS-247 5.5.	Band-edge emissions compliance (Transmitter)	N/M	
FCC 15.247 (e) / RSS-247 5.2. (b)	Power spectral density	N/M	
FCC 15.247 (d) / RSS-247 5.5.	Emission limitations radiated (Transmitter)	P	(1)
<u>Supplementary information and remarks:</u>			
(1) Only test requested.			

Appendix A: Test results. Bluetooth Low Energy

INDEX

TEST CONDITIONS	11
FCC 15.247 (d) / RSS-247 5.5. Emission limitations radiated (Transmitter).....	11

TEST CONDITIONS

POWER SUPPLY (V):

Vnominal:	15 Vdc
Type of Power Supply:	AC/DC Adapter.

ANTENNA:

Type of Antenna:	Integral.
Maximum Declared Antenna Gain:	+2.5 dBi

TEST FREQUENCIES:

Low Channel:	2402 MHz
Middle Channel:	2440 MHz
High Channel:	2480 MHz

RADIATED MEASUREMENTS:


All radiated tests were performed in a semi-anechoic chamber. The measurement antenna (Bilog antenna for the range between 30 MHz to 1 GHz and 1 GHz-17 GHz Double ridge horn antenna) is situated at a distance of 3 m and at a distance of 1 m for the frequency range 17 GHz-26 GHz (17 GHz-26 GHz horn antenna).

For radiated emissions in the range 17 GHz-26 GHz that is performed at a distance closer than the specified distance, an inverse proportionality factor of 20 dB per decade is used to normalize the measured data for determining compliance.


The equipment under test was set up on a non-conductive platform above the ground plane and the situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height (Bilog antenna and Double ridge horn antenna) was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.


Radiated measurements setup from 30 MHz to 1 GHz:

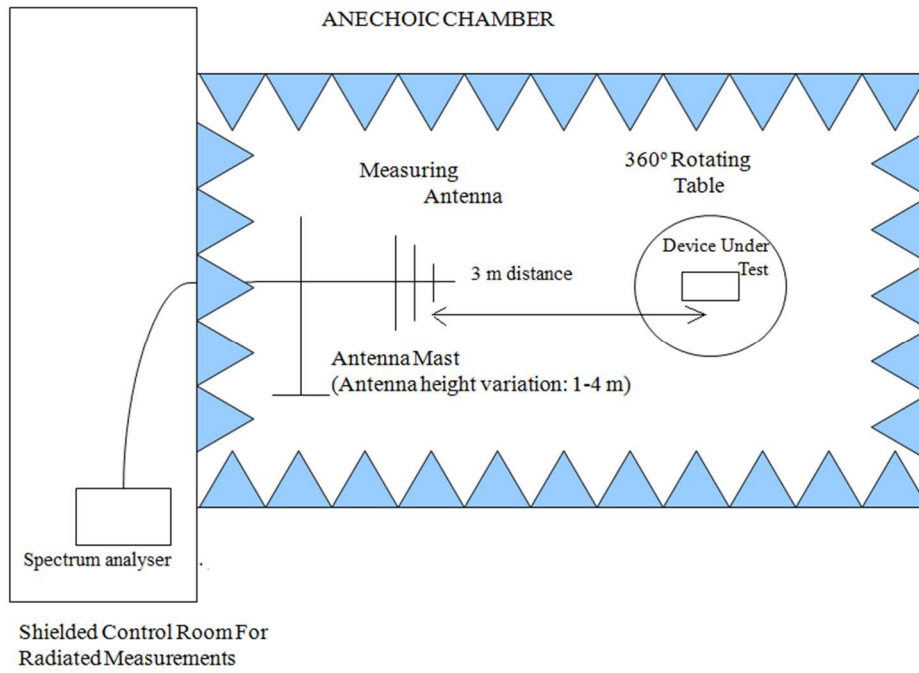

Radiated measurements setup from 1 GHz to 17 GHz:

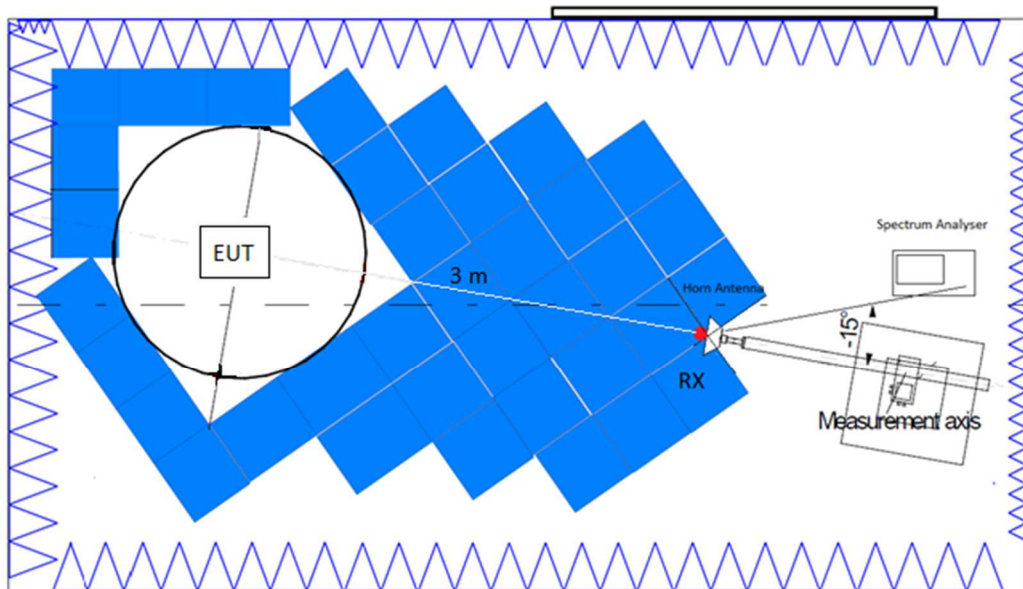

Radiated measurements setup $f > 17$ GHz:

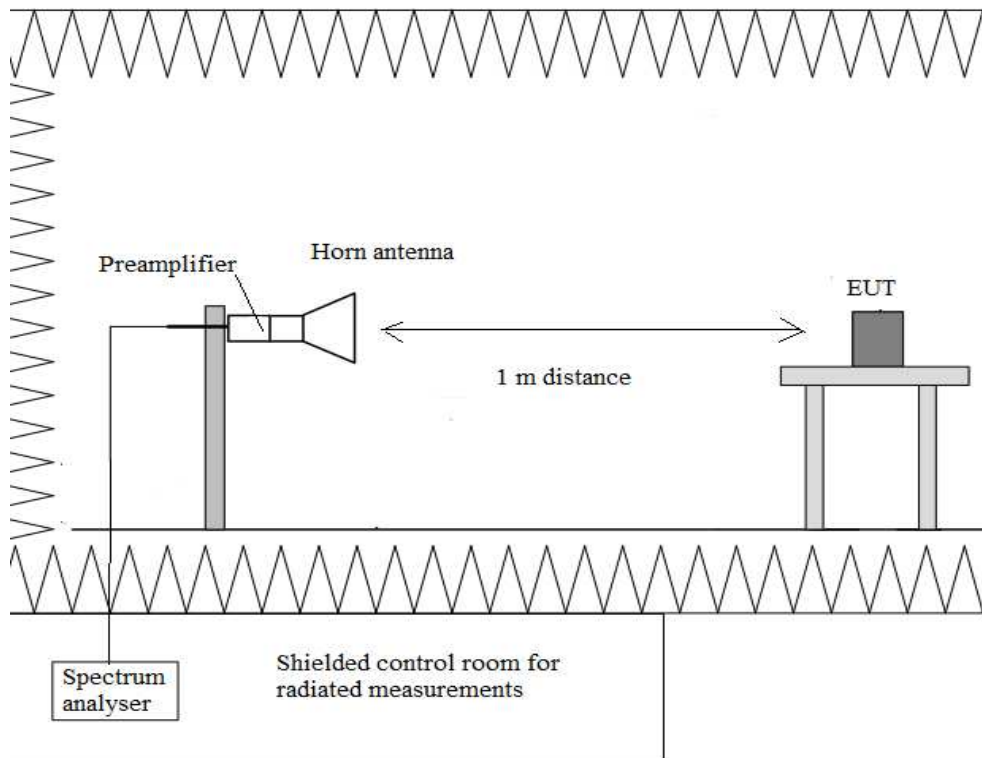

FCC 15.247 (d) / RSS-247 5.5. Emission limitations radiated (Transmitter)

SPECIFICATION:

Radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)/RSS-Gen):

Frequency Range (MHz)	Field strength ($\mu\text{V}/\text{m}$)	Field strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009-0.490	2400/F(kHz)	-	300
0.490-1.705	24000/F(kHz)	-	30
1.705 - 30.0	30	-	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
960 - 25000	500	54	3

The emission limits shown in the above table are based on measurements employing CISPR quasi-peak detector except for the frequency bands 9-90 kHz, 110-490 kHz and above 1000 MHz. Radiated emission limits in these three bands are based on measurements employing an average detector.

For average radiated emission measurements above 1000 MHz, there is also a limit corresponding to 20 dB above the indicated values in the table is specified when measuring with peak detector function.

RSS-247. Attenuation below the general field strength limits specified in RSS-Gen is not required.

RESULTS:

The situation and orientation was varied to find the maximum radiated emission. It was also rotated 360° and the antenna height was varied from 1 to 4 meters to find the maximum radiated emission.

Measurements were made in both horizontal and vertical planes of polarization.

All tests were performed in a semi-anechoic chamber at a distance of 3 m for the frequency range 30 MHz-17 GHz and at distance of 1 m for the frequency range 17 GHz-26 GHz.

The field strength is calculated by adding correction factor to the measured level from the spectrum analyzer. This correction factor includes antenna factor, cable loss and pre-amplifiers gain.

Frequency range 30 MHz - 1 GHz:

The spurious frequencies detected below 1 GHz do not depend on either the operating channel or the modulation mode selected in the EUT.

Spurious frequencies operating detected at less than 20 dB below the limit:

Spurious frequency (MHz)	Emission Level ($\text{dB}\mu\text{V}/\text{m}$)	Polarization	Detector	Measurement Uncertainty (dB)
43.9195	28.73	V	Quasi Peak	< \pm 4.94
52.4555	27.34	V	Quasi Peak	< \pm 4.94
101.586	28.31	V	Quasi Peak	< \pm 4.94
112.9835	27.99	V	Quasi Peak	< \pm 4.94

Frequency range 1 - 26 GHz:

The results in the next tables show the maximum measured levels in the 1-26 GHz range including the restricted bands 2.31-2.39 GHz and 2.4835-2.5 GHz.

Spurious frequencies with peak levels above the average limit (54 dBµV/m at 3 m) are measured with average detector for checking compliance with the average limit.

- LOW CHANNEL. Spurious frequencies closest to the limit:

Spurious Frequency (GHz)	Emission Level (dBµV/m)	Duty Cycle Correction (dB)	Corrected Emission Level (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
4.8035	44.37	-	44.37	H	Peak	<± 4.6
	34.69	2.13	36.82		Average	<± 4.6

RESTRICTED BANDS. No spurious frequencies at less than 20 dB below the limit.

- MIDDLE CHANNEL. Spurious frequencies closest to the limit:

Spurious Frequency (GHz)	Emission Level (dBµV/m)	Duty Cycle Correction (dB)	Corrected Emission Level (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
4.8805	45.06	-	45.06	H	Peak	<± 4.6
	34.88	2.13	37.01		Average	<± 4.6

RESTRICTED BANDS. No spurious frequencies at less than 20 dB below the limit.

- HIGH CHANNEL. Spurious frequencies closest to the limit:

Spurious Frequency (GHz)	Emission Level (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
4.922	35.16	V	Peak	<± 4.6

RESTRICTED BANDS. Spurious frequencies closest to the limit:


Spurious Frequency (GHz)	Emission Level (dBµV/m)	Duty Cycle Correction (dB)	Corrected Emission Level (dBµV/m)	Polarization	Detector	Measurement Uncertainty (dB)
2.483533333	54.44	-	54.44	H	Peak	<± 4.6
	41.38	2.13	43.51		Average	<± 4.6

Measurement Uncertainty (dB): 1GHz-17GHz <± 4.6
 17GHz-26GHz <± 4.89

Verdict: PASS


FREQUENCY RANGE 30 MHz - 1 GHz:

This plot is valid for the Low, Middle and High Channels and all the modulation modes.

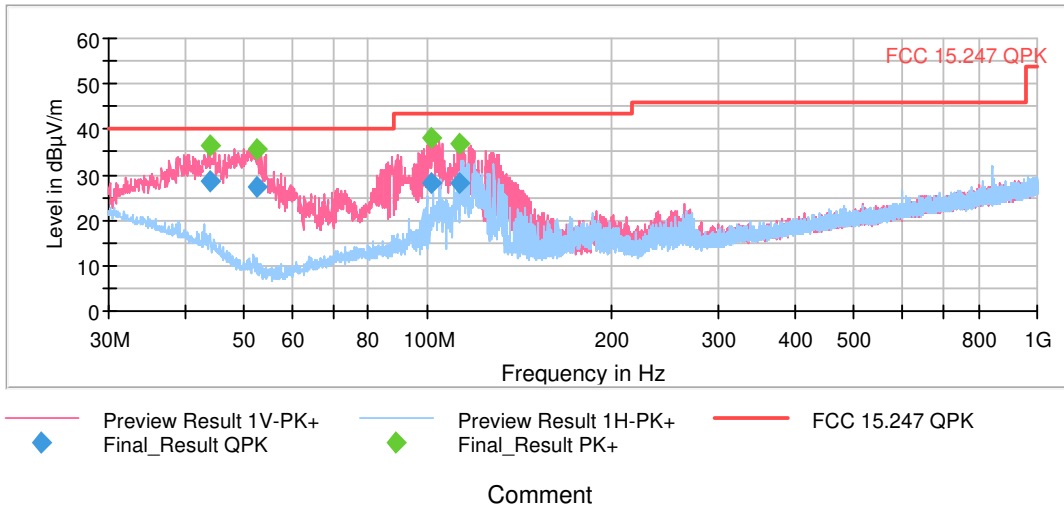


FREQUENCY RANGE 1 - 3 GHz:

- Low Channel:

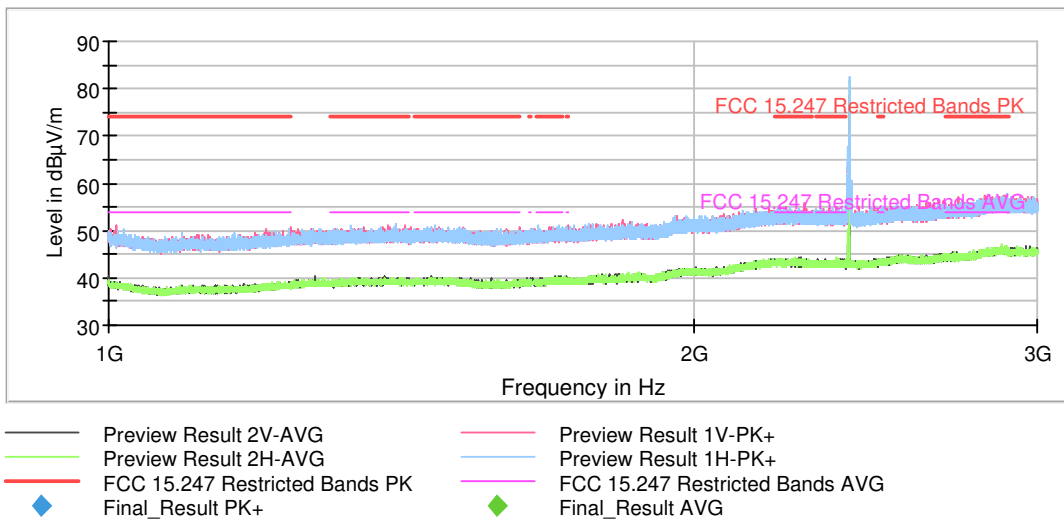


The peak above the limit is the carrier frequency.

- Middle Channel:

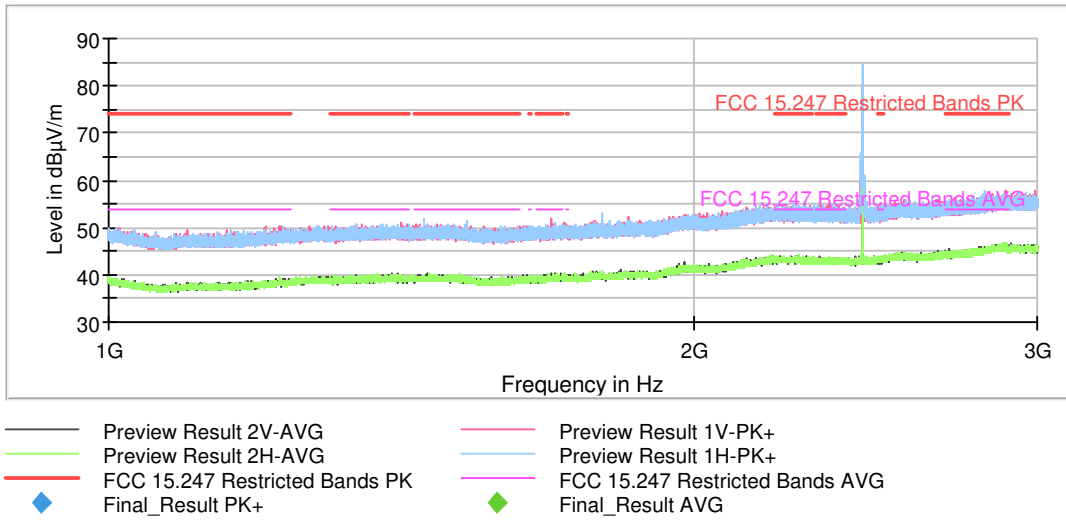

The peak above the limit is the carrier frequency.


- High Channel:

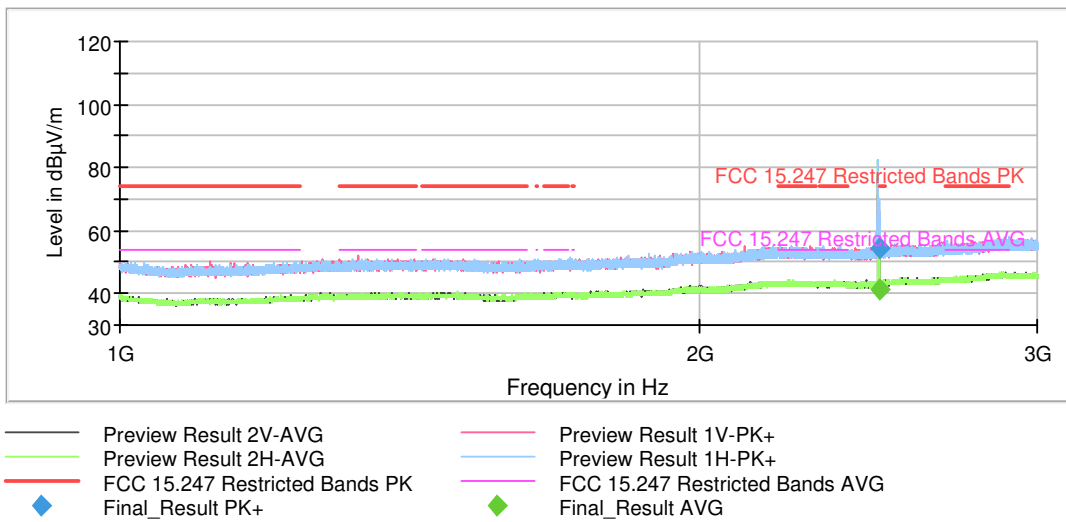

The peak above the limit is the carrier frequency.


FREQUENCY RANGE 3 - 17 GHz:

- Low Channel:

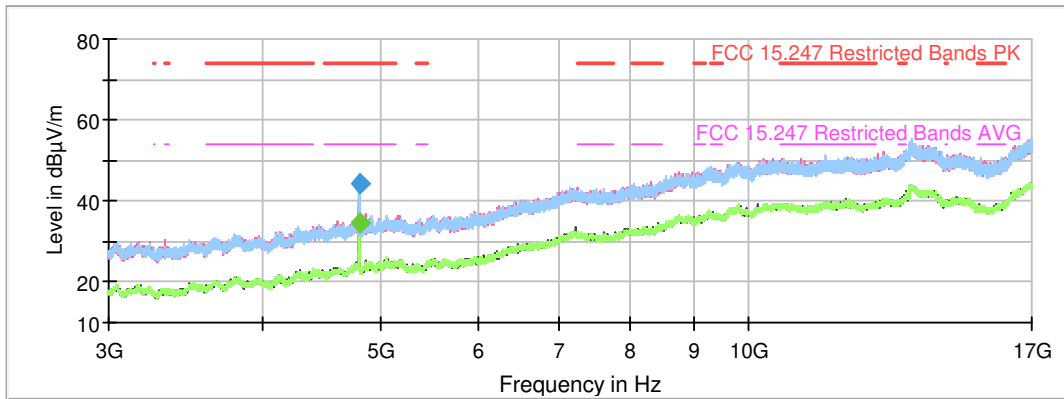


- Preview Result 2V-AVG
- Preview Result 2H-AVG
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- ◆ Final_Result PK+
- ◆ Final_Result AVG
- FCC 15.247 Restricted Bands PK
- FCC 15.247 Restricted Bands AVG

- Middle Channel:

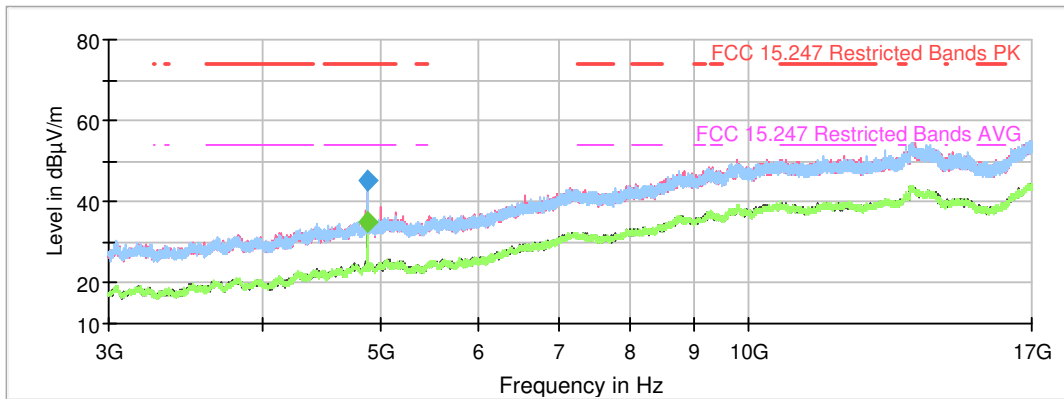


- Preview Result 2V-AVG
- Preview Result 2H-AVG
- Preview Result 1V-PK+
- Preview Result 1H-PK+
- ◆ Final_Result PK+
- ◆ Final_Result AVG
- FCC 15.247 Restricted Bands PK
- FCC 15.247 Restricted Bands AVG

- High Channel:

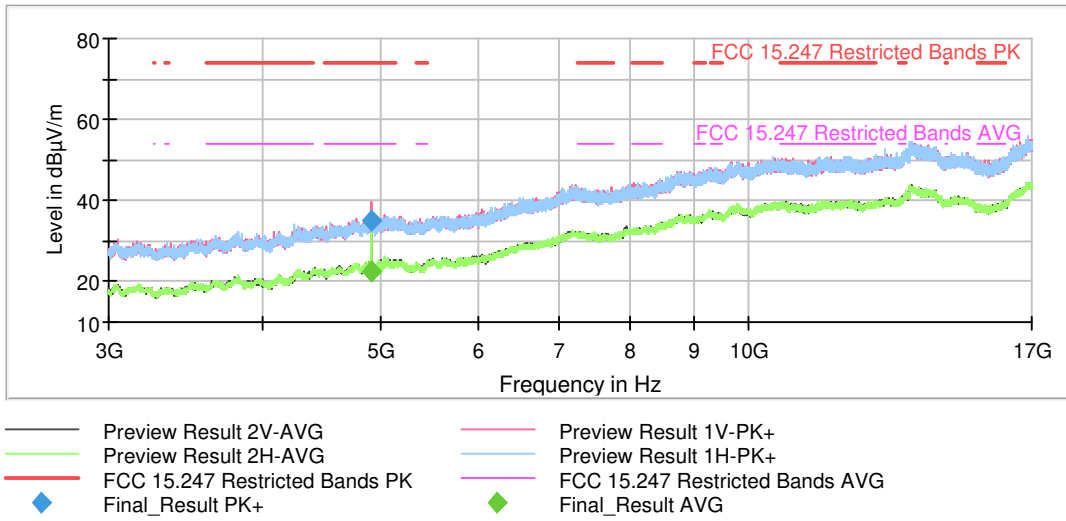


FREQUENCY RANGE 17 - 26 GHz:

This plot is valid for the Low, Middle and High Channels and all the modulation modes.

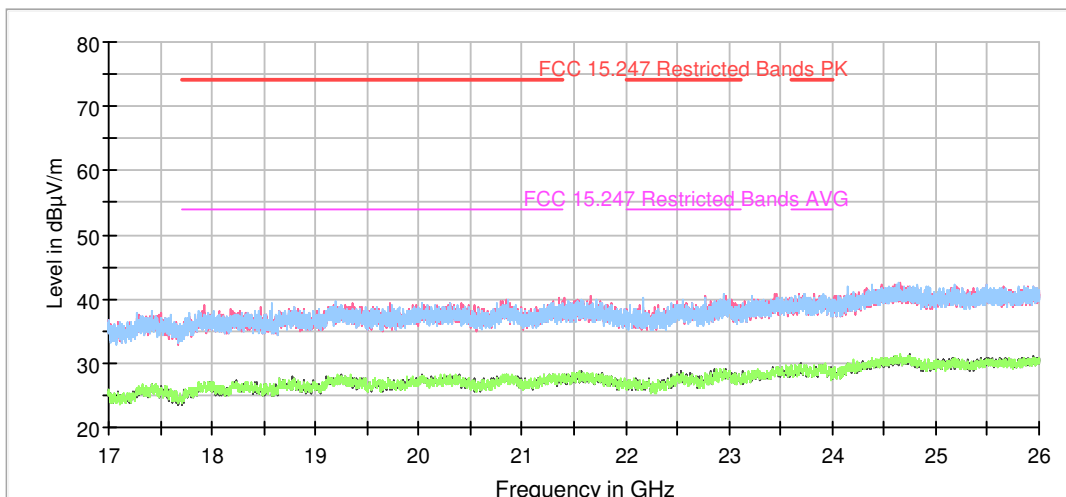


RESTRICTED BAND 2.31-2.39 GHz:


- Low Channel:

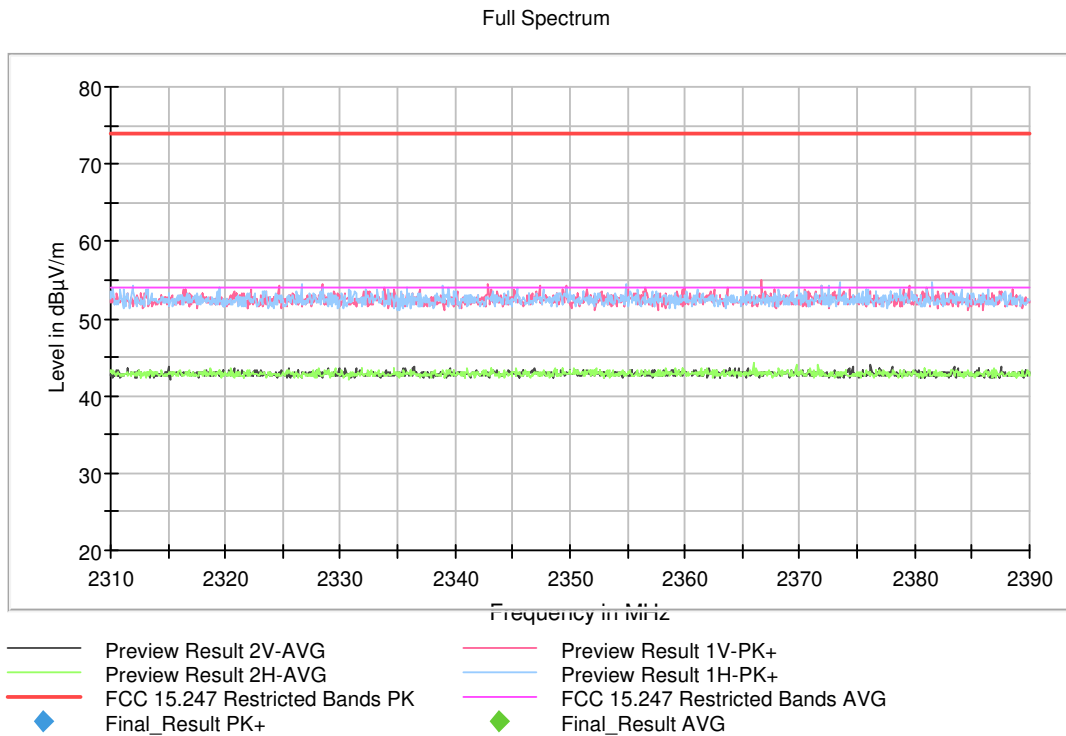

- Middle Channel:

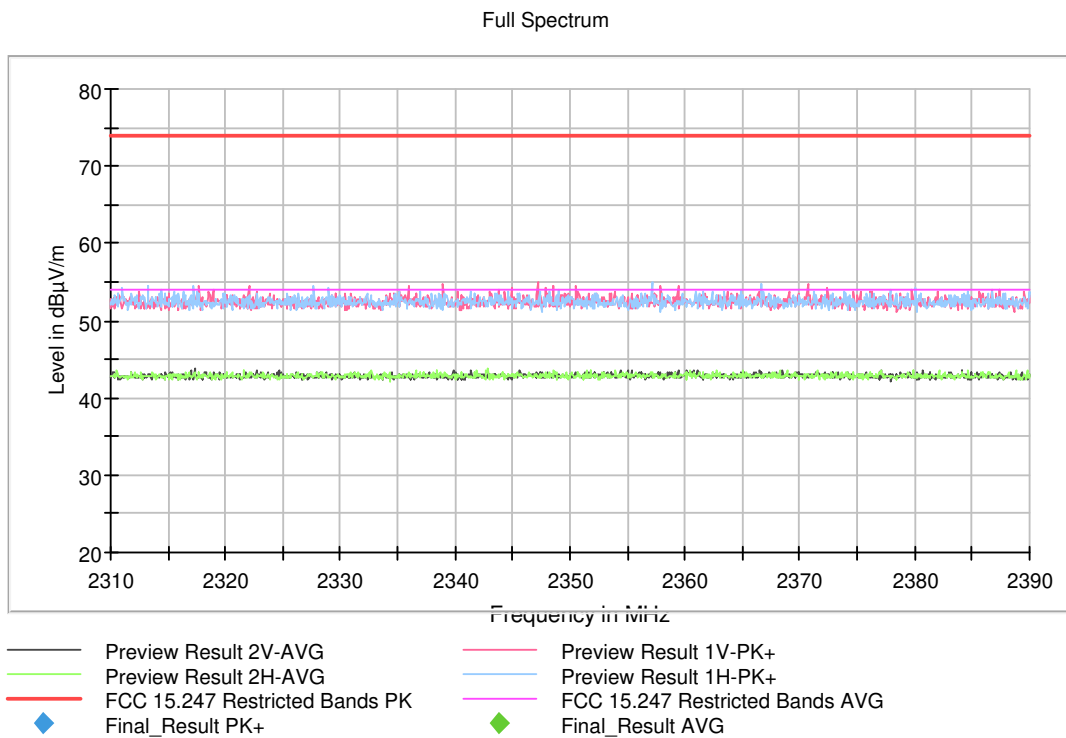


- High Channel:

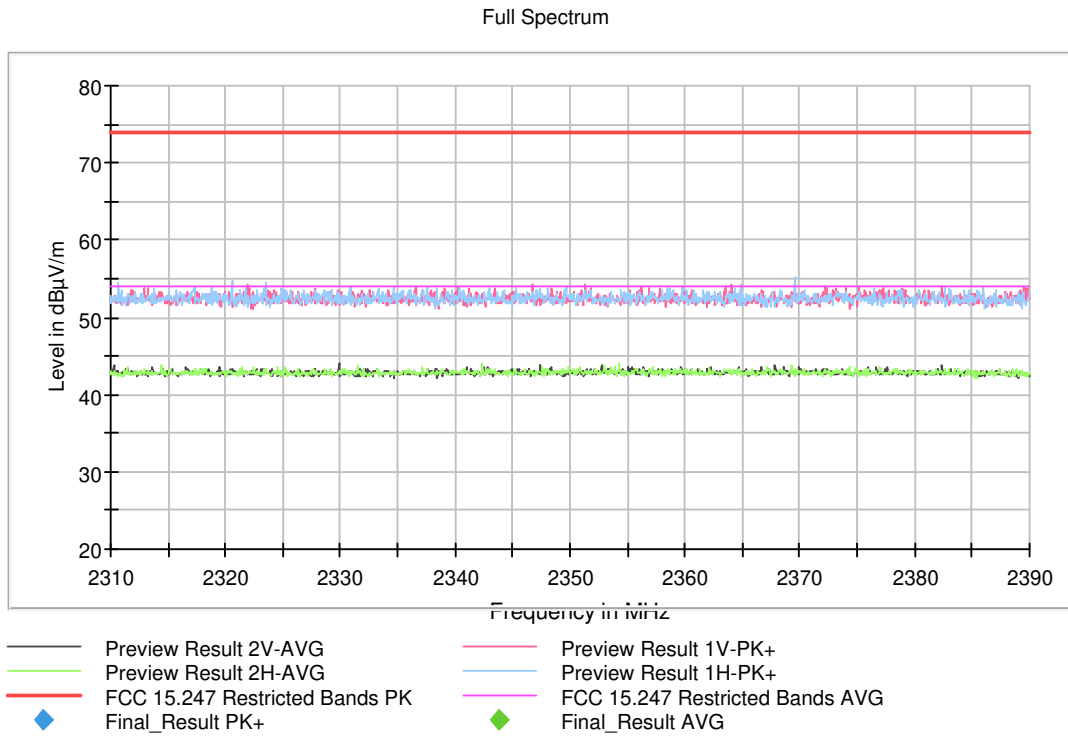


RESTRICTED BAND 2.4835-2.5 GHz:

- Low Channel:

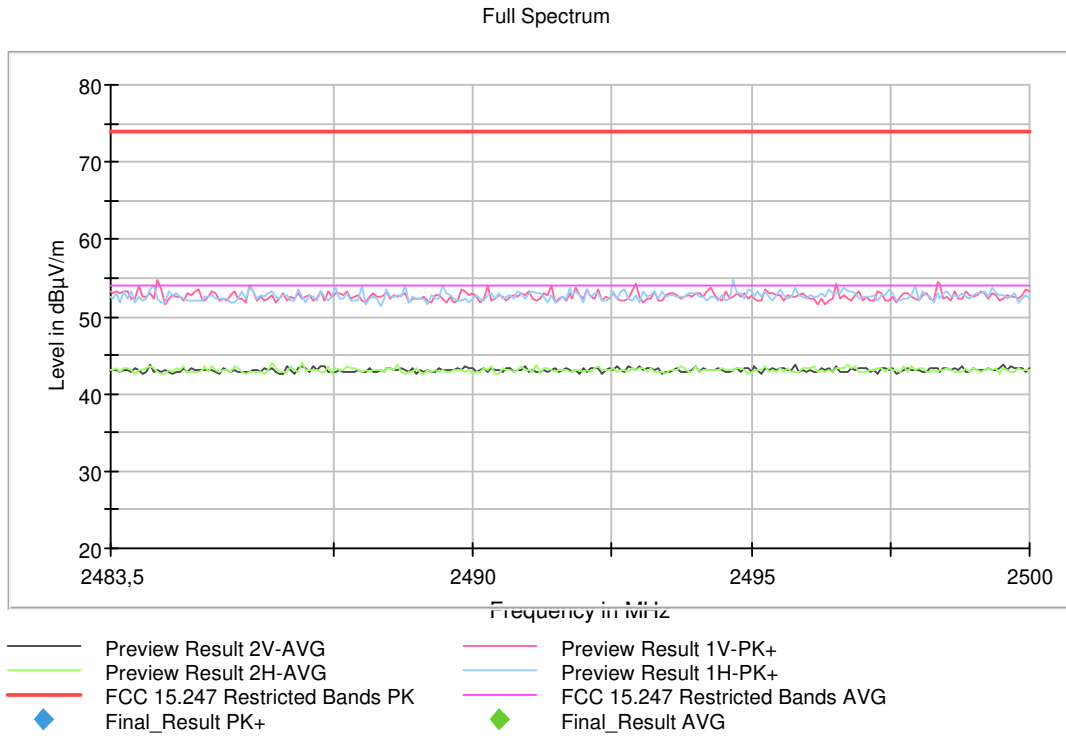

- Middle Channel:

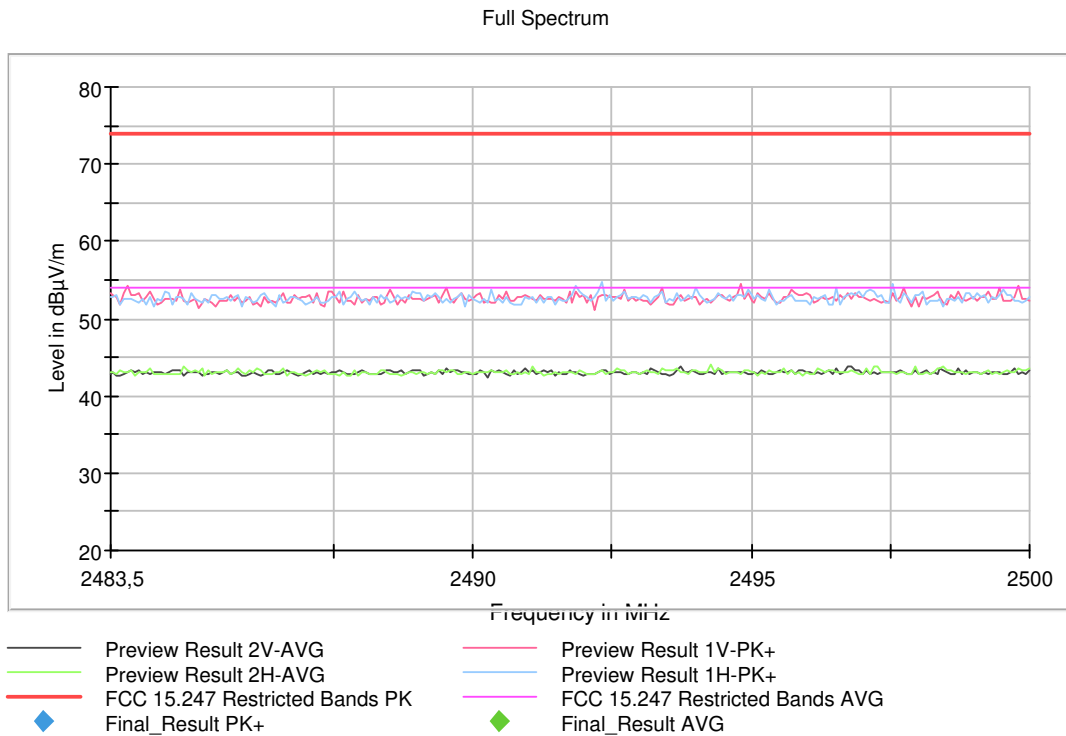

- High Channel:

Full Spectrum

