



RF TEST REPORT

Report No.: 20240617G10725X-W5

Product Name: HOVERAir X1Smart

Model No.: ZZ-H-1-002

FCC ID: 2AIDW-ZZ-H-1-003

IC: 21647-ZZH1003

Applicant: Shenzhen Zero Zero Infinity Technology Co., Ltd.

Address: 4th Floor, Qianhai E-metro Tower, Shenzhen-Hong Kong
Cooperation Zone, Shenzhen, China

Dates of Testing: 06/18/2024 - 07/15/2024

Issued by: CCIC Southern Testing Co., Ltd.

Lab Location: Electronic Testing Building, No. 43 Shahe Road, Xili Street,
Nanshan District, Shenzhen, Guangdong, China.

Tel: 86-755-26627338 **E-Mail:** manager@ccic-set.com

This test report consists of 68 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CCIC-SET. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver. Any objections must be raised to CCIC-SET within 15 days since the date when the report is received. It will not be taken into consideration beyond this limit.



Test Report

Product.....: HOVERAir X1Smart

Trade Name: ZERO ZERO ROBOTICS

Applicant.....: Shenzhen Zero Zero Infinity Technology Co., Ltd.

Applicant Address.....: 4th Floor,Qianhai E-metro Tower,Shenzhen-Hong Kong
Cooperation Zone, Shenzhen,China

Manufacturer: Shenzhen Zero Zero Infinity Technology Co., Ltd.

Manufacturer Address: 4th Floor,Qianhai E-metro Tower,Shenzhen-Hong Kong
Cooperation Zone, Shenzhen,China

Test Standards: 47 CFR Part 15 Subpart E 15.407
ANSI C63.10-2020
RSS-Gen Issue 5, Feb 2021
RSS-247 Issue 3, Aug 2023

Test Result: Pass

Tested by: Kim Li 2024.07.19
Kim Li, Test Engineer

Reviewed by: Sun Jiaohui 2024.07.19
Sun Jiaohui, Senior Engineer

Approved by: Chris You 2024.07.19
Chris You, Manager



Table of Contents

1. GENERAL INFORMATION	5
1.1. EUT Description	5
1.2. Test Standards and Results.....	6
1.3. Channel List	7
1.4. Test environment and mode	8
1.5. Table for Supporting Units.....	9
1.6. Laboratory Facilities	10
2. 47 CFR PART 15E REQUIREMENTS.....	11
2.1. Antenna requirement.....	11
2.2. Maximum Conducted Output Power	12
2.3. Power spectral density (PSD)	15
2.4. 26dB Emission Bandwidth and 99% Occupied Bandwidth.....	17
2.5. Frequency Stability	19
2.6. Radiated Band Edge and Spurious Emission.....	21
2.7. AC Power Line Conducted Emission	34
3. LIST OF MEASURING EQUIPMENT	38
4. UNCERTAINTY OF EVALUATION	39
APPENDIX A	40



Change History		
Issue	Date	Reason for change
1.0	2024.07.19	First edition

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	HOVERAir X1Smart
Model No.	ZZ-H-1-002
Hardware Version	H130_HMB_V21
Software Version	ZZ_IMG_H121_V7.6.1/7.0.62
EUT supports Radios application	WLAN5.0GHz 802.11a/n/ac
Product Type	Client devices
Modulation Type	802.11a/n: OFDM (BPSK/QPSK/16QAM/64QAM) 802.11ac: OFDM (BPSK/QPSK/16QAM/64QAM/256QAM)
Transfer Rate	802.11a: 54/48/36/24/18/12/9/6 Mbps 802.11n: up to 150 Mbps 802.11ac: up to 433.333 Mbps
Frequency Range	UNII-1: 5150 ~ 5250MHz UNII-3: 5725 ~ 5850MHz
Channel Bandwidth	802.11a: 20MHz 802.11n: 20MHz/40MHz 802.11ac: 20MHz/40MHz/80MHz
Channel Number	UNII-1: 4 for 802.11a, 802.11n(HT20), 802.11ac(VHT20) 2 for 802.11n(HT40), 802.11ac(VHT40) 1 for 802.11ac(VHT80) UNII-3: 5 for 802.11a, 802.11n(HT20), 802.11ac(VHT20) 2 for 802.11n(HT40), 802.11ac(VHT40)) 1 for 802.11ac(VHT80)
Antenna Type	Internal Antenna
Antenna Gain	UNII-1: 4.28dBi UNII-3: 4.28dBi
Output Power (Max.)	UNII-1: 14.30dBm UNII-3: 13.69dBm
Test Control Software	QRCT 4.0
Power supply	Rechargeable Li-ion Polymer Battery DC7.7V/690mAh

Note 1: The information of antenna gain and cable loss is provided by the manufacturer and our lab is not responsible for the accuracy of the antenna gain and cable loss information.

1.2. Test Standards and Results

The purpose of the report is to conduct testing according to the following FCC/IC certification standards:

No.	Identity	Document Title
1	47 CFR Part 15 Subpart E §15.407	Radio Frequency Devices
2	KDB789033 D02 General UNII Test Procedures New Rules v02r01	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
3	KDB 662911 D01 Multiple Transmitter Output v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band
4	ANSI C63.10-2020	American National Standard for Testing Unlicensed Wireless Devices
5	RSS-Gen Issue 5, Feb 2021	General Requirements for Compliance of Radio Apparatus
6	RSS-247 Issue 3, Aug 2023	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices

Test detailed items/section required by FCC/IC rules and results are as below:

No.	FCC Rule	IC Rule	Description	Result
1	15.203 15.407(a)	RSS-GEN, 6.8	Antenna Requirement	PASS
2	15.407(a)(1)(iv) 15.407 (a)(2) 15.407(a)(3)(i)	RSS-247, 6.2.1.1 RSS-247, 6.2.2.1 RSS-247, 6.2.3.1 RSS-247, 6.2.4.1	Maximum Conducted Output Power	PASS
3	15.407(a)(12)	RSS-GEN, 6.7	26dB Emission Bandwidth 99% Occupied Bandwidth	PASS
4	15.407(e)	RSS-247, 6.2.4.1	6dB Emission Bandwidth	PASS
5	15.407(a)(1)(iv) 15.407 (a)(2) 15.407(a)(3)(i)	RSS-247, 6.2.1.1 RSS-247, 6.2.2.1 RSS-247, 6.2.3.1 RSS-247, 6.2.4.1	Power spectral density (PSD)	PASS
6	15.207	RSS-GEN, 8.8	AC Power Line Conducted Emission	PASS
7	15.205 15.209 15.407(b)(1) 15.407(b)(2) 15.407(b)(3) 15.407(b)(4)	RSS-GEN, 6.13 RSS-GEN, 8.10 RSS-247, 6.2.1.2 RSS-247, 6.2.2.2 RSS-247, 6.2.3.2 RSS-247, 6.2.4.2	Radiated Band Edges and Spurious Emission	PASS
8	15.407(g)	RSS-GEN, 6.11	Frequency Stability	PASS

1.3. Channel List

Operated band in 5150 MHz ~ 5250MHz

4 channels are provided for 802.11a, 802.11n-HT20, 802.11ac-VHT20.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
36	5180	44	5220
40	5200	48	5240

2 channels are provided for 802.11n-HT40, 802.11ac-VHT40.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
38	5190	46	5230

1 channels are provided for 802.11ac-VHT80.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
42	5210	/	/

Operated band in 5725 MHz ~ 5850MHz

5 channels are provided for 802.11a, 802.11n-HT20, 802.11ac-VHT20.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

2 channels are provided for 802.11n-HT40, 802.11ac-VHT40.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
151	5755	159	5795

1 channel are provided for 802.11ac-VHT80.

Channel	Frequency(MHz)	Channel	Frequency(MHz)
155	5775	/	/

1.4. Test environment and mode

During the measurement, the environmental conditions were within the listed ranges:

Operating Environment	
Temperature	15°C - 35°C
Humidity	30% -60%
Atmospheric Pressure	86KPa-106KPa
Test mode:	
Continuously transmitting mode	Keeps the EUT in 100% duty cycle transmitting with modulation in SISO, duty cycle factor is not required.

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

For Frequency band 5150 ~ 5250 MHz				
Test Mode	Frequency(MHz)			Data rate
	LCH	MCH	HCH	
802.11a	5180	5220	5240	6 Mbps
802.11n-HT20/ac-VHT20				MCS 0
802.11n-HT40/ac-VHT40	5190	/	5230	MCS 0
802.11ac-VHT80	5210	/	/	MCS 0
Note: After scanning all modulation types and data rates for all test patterns, the above list was found to be the worst case.				

For Frequency band 5725 ~ 5850 MHz				
Test Mode	Frequency(MHz)			Data rate
	LCH	MCH	HCH	
802.11a	5745	5785	5825	6 Mbps
802.11n-HT20/ac-VHT20				MCS 0
802.11n-HT40/ac-VHT40	5755	/	5795	MCS 0
802.11ac-VHT80	5775	/	/	MCS 0
Note: After scanning all modulation types and data rates for all test patterns, the above list was found to be the worst case.				

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation modes or test configuration modes mentioned above was evaluated respectively.

Pretest Test Mode	Description
Mode 1	TX 802.11a SISO Mode
Mode 2	TX 802.11n-HT20 SISO Mode
Mode 3	TX 802.11n-HT40 SISO Mode
Mode 4	TX 802.11ac-VHT20 SISO Mode
Mode 5	TX 802.11ac-VHT40 SISO Mode
Mode 6	TX 802.11ac-VHT80 SISO Mode
Mode 7	TX Mode

The EUT system operated these modes were found to be the worst case during the pre-scanning test as following:

For Conducted Test	
Final Test Mode	Description
Mode 7	TX Mode
For Radiated Test	
Final Test Mode	Description
Mode 1	TX 802.11a SISO Mode
Mode 2	TX 802.11n-HT20 SISO Mode
Mode 3	TX 802.11n-HT40 SISO Mode
Mode 4	TX 802.11ac-VHT20 SISO Mode
Mode 5	TX 802.11ac-VHT40 SISO Mode
Mode 6	TX 802.11ac-VHT80 SISO Mode
Mode 7	TX Mode

1.5. Table for Supporting Units

No.	Equipment	Brand Name	Model Name	Manufacturer	Serial No.	Note
1	Laptop	HP	TPN-Q221	HP	5CD14347QB	FCC DOC



1.6. Laboratory Facilities

FCC-Registration No.: 406086

CCIC Southern Testing Co., Ltd EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. Designation Number: CN1283, valid time is until June 30, 2025.

ISED Registration: 11185A-1

CCIC Southern Testing Co., Ltd. EMC Laboratory has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No. 11185A-1 on Aug. 04, 2016, valid time is until June 30, 2025.

A2LA Code: 5721.01

CCIC-SET is a third party testing organization accredited by A2LA according to ISO/IEC 17025.

2. 47 CFR Part 15E Requirements

2.1. Antenna requirement

2.1.1. Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

According to FCC 15.407(a)(1): For client devices in the 5.15-5.25 GHz band, If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to FCC 15.407(a)(2): For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to FCC 15.407(a)(3): For the band 5.725-5.850 GHz, If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

According to RSS GEN 6.8, The applicant for equipment certification shall provide a list of all antenna types that may be used with the transmitter, where applicable (i.e. for transmitters with detachable antenna), indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna. The test report shall demonstrate the compliance of the transmitter with the limit for maximum equivalent isotropically radiated power (e.i.r.p.) specified in the applicable RSS, when the transmitter is equipped with any antenna type, selected from this list.

2.1.2. Antenna Information

Antenna Category: Internal Antenna

A internal Antenna was soldered to the antenna port of EUT via an adaptor cable, can't be removed.

No.	EUT	Operating frequency range	Ant. Type	Ant. Gain
1	HOVERAir X1Smart	2402-2480MHz	Internal	4.28dBi

2.1.3. Result: comply

The EUT has two permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

2.2. Maximum Conducted Output Power

2.2.1. Limit of Maximum Conducted Output Power

FCC Part 15.407(a):

The maximum conducted output power should not exceed:

Band	EUT Category	Limit
U-NII-1	☐ Outdoor Access Point	1 Watt (30 dBm) (Max. e.i.r.p $\leq$ 125mW(21dBm) at any elevation angle above 30 degrees as measured from the horizon)
	☐ Fixed point-to-point Access device	1 Watt (30 dBm)
	☐ Indoor Access Point	1 Watt (30 dBm)
	☒ Mobile and portable client device	250mW (24 dBm)
U-NII-2A	☒	250mW (24 dBm) or 11dBm+10logB* Whichever is less.
U-NII-2C	☒	250mW (24 dBm) or 11dBm+10logB* Whichever is less.
U-NII-3	☒	1 Watt (30 dBm)
Note: B* is the 26 dB emission bandwidth in MHz.		

RSS-247, 6:


The maximum conducted output power should not exceed:

Band	EUT Category	Limit
U-NII-1	☐ For OEM devices installed in vehicles	Max. e.i.r.p $\leq$ 30mW(14.77dBm) or 1.76+10log ₁₀ B* Whichever is less.
	☒ Equipment other than OEM equipment	Max. e.i.r.p $\leq$ 200mW(23dBm) or 10+10log ₁₀ B* Whichever is less.
U-NII-2A U-NII-2C	☐ For OEM devices installed in vehicles	Max. e.i.r.p $\leq$ 30mW(14.77dBm) or 1.76+10log ₁₀ B* Whichever is less.(U-NII-2A only)
	☒ Equipment other than OEM equipment	Max. Cop $\leq$ 250mW(24Bm) or 11+10log ₁₀ B* Whichever is less. Max. e.i.r.p $\leq$ 1W(30Bm) or 17+10log ₁₀ B* Whichever is less.
U-NII-3	☒	1 Watt (30 dBm)
Note: B* is the 99% emission bandwidth in MHz.		

2.2.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.2.3. Test Setup

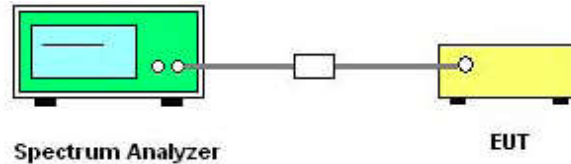

2.2.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.E.2.b and ANSI C63.10-2020 Section 12.3.2.2.
2. The RF output of EUT was connected to spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Power is calculated by integrating over the spectrum of the entire 99% OBW signal using the instrument's band power measurement feature.
4. Set span to encompass the entire 99% OBW of the signal.
5. Set RBW = 1MHz, VBW $\geq$ 3MHz, Sweep time = Auto, Detector = power averaging (RMS).
6. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Replace the EUT center frequency and repeat steps 3~7.



2.2.5. Test Results of Maximum Conducted Output Power

Please refer to APPENDIX A for detail

2.3. Power spectral density (PSD)

2.3.1. Limit of Power Spectral Density

FCC Part 15.407(a)

The maximum power spectral density should not exceed:

Band	EUT Category	Limit
U-NII-1	☐ Outdoor Access Point	17 dBm/MHz
	☐ Fixed point-to-point Access device	
	☐ Indoor Access Point	
	☒ Mobile and portable client device	11 dBm/MHz
U-NII-2A	☒	11 dBm/MHz
U-NII-2C	☒	11 dBm/MHz
U-NII-3	☒	30dBm/500kHz

RSS-247, 6:


The maximum power spectral density should not exceed:

Band	EUT Category	Limit
U-NII-1	☒ Equipment other than OEM equipment	10 dBm/MHz (EIRP)
U-NII-2A	☒	11 dBm/MHz
U-NII-2C	☒	11 dBm/MHz
U-NII-3	☒	30dBm/500kHz

2.3.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.3.3. Test Setup

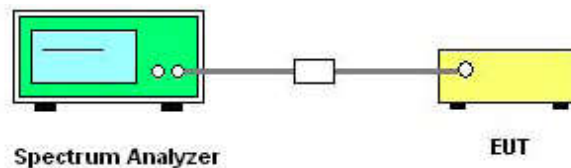

2.3.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.F and ANSI C63.10-2020 Section 12.5.
2. The RF output of EUT was connected to spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set span to encompass the entire 99% OBW of the signal.
4. For U-NII-1, U-NII-2a, U-NII-2c Band: Set RBW = 1MHz, VBW $\geq$ 3MHz, Sweep time = Auto,

Detector = power averaging (RMS).

5. For U-NII-3 Band: Set RBW = 500kHz, VBW $\geq$ 2MHz, Sweep time = Auto, Detector = power averaging (RMS).
6. Number of points in sweep $\geq 2 \times \text{span} / \text{RBW}$.
7. Trace average at least 100 traces in power averaging (rms) mode.
8. Use the peak search function on the instrument to find the peak of the spectrum.
9. Replace the EUT center frequency and repeat steps 3~8.

2.3.5. Test Result of Power Spectral Density

Please refer to APPENDIX A for detail

2.4. 26dB Emission Bandwidth and 99% Occupied Bandwidth

2.4.1. Limit of 26dB Emission Bandwidth and 99% Occupied Bandwidth


26dB Emission Bandwidth and 99% Occupied Bandwidth no Bandwidth limit.

The minimum 6dB bandwidth of U-NII-3 shall be at least 500 kHz.

2.4.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.4.3. Test Description

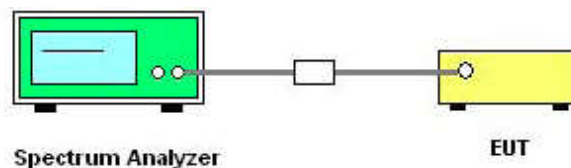

2.4.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.C.D and ANSI C63.10-2020 Section 12.4.
2. The RF output of EUT was connected to spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Use the spectrum analyzer “Channel Bandwidth” function to easurement the 26dB EBW, 6dB EBW and 99% OBW.
4. Set center frequency to the nominal EUT channel center frequency.
5. Set span = 1.5 times to 5.0 times the OBW or EBW.
6. For 26dB EBW and 99% OBW Measurement:
Set RBW = approximately 1% EBW or 1.5 times to 5.0 times the OBW, $VBW \geq 3 \times RBW$.
7. For 6dB EBW Measurement:
Set RBW =100kHz, $VBW \geq 3 \times RBW$.
8. Set Detector = Peak, Trace mode = max hold and Sweep time = auto couple.
9. Allow the trace to stabilize.
10. Replace the EUT center frequency and repeat steps 3~9.



2.4.5. Test Results of 26dB Emission Bandwidth and 99% Occupied Bandwidth

Please refer to APPENDIX A for detail

2.5. Frequency Stability


2.5.1. Limit of Frequency Stability

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the users manual.

2.5.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.5.3. Test Setup

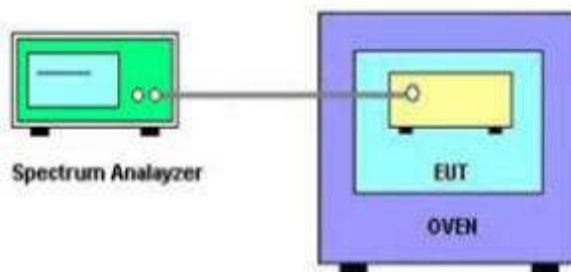

2.5.4. Test Procedures

1. The testing follows the of KDB 789033 D02 v02r01 Section II.A.3 and ANSI C63.10-2020 Section 6.8.
2. The EUT is installed in an environment test chamber with external power source, was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set the chamber to operate at 50°C and external power source to output at nominal voltage of EUT.
5. A sufficient stabilization period at each temperatures in used prior to each frequency measurement.
6. The test shall be performed under -30°C to 50°C and 85% to 115% of the nominal voltage. Change setting of chamber and external power source to complete all conditions.
7. Replace the EUT center frequency and repeat steps 3~6.



2.5.5. Test Result of Frequency Stability

Please refer to APPENDIX A for detail

2.6. Radiated Band Edge and Spurious Emission

2.6.1. Limit of Radiated Band Edges and Spurious Emission

Radiated emission which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level ($\mu\text{V/m}$).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

FCC Part 15.407(b)			
Frequency Band (MHz)	Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength @3m (dB $\mu\text{V/m}$)
5150 - 5250	Outside of the 5.15~5.35 GHz	-27	68.2
5725 - 5850	< 5650	-27	68.2
	5650~5700	-27~10	68.2~105.2
	5700~5720	10~15.6	105.2~110.8
	5720~5725	15.6~27	110.8~122.2
	5850~5855	27~15.6	122.2~110.8
	5855~5875	15.6~10	110.8~105.2
	5875~5925	10~-27	105.2~68.2
	> 5925	-27	68.2

Note:

- 1) $\text{EIRP}[\text{dBm}] = \text{E}[\text{dB}\mu\text{V/m}] + 20 \log(d[\text{m}]) - 104.77$, d is the measurement distance in m.
- 2) $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V/m}$, for $\text{EIRP}[\text{dBm}] = -27\text{dBm}$.
 $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 105.2 \text{ dB}\mu\text{V/m}$, for $\text{EIRP}[\text{dBm}] = 10\text{dBm}$.
 $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 110.8 \text{ dB}\mu\text{V/m}$, for $\text{EIRP}[\text{dBm}] = 15.6\text{dBm}$.
 $\text{E}[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] + 95.2 = 122.2 \text{ dB}\mu\text{V/m}$, for $\text{EIRP}[\text{dBm}] = 27\text{dBm}$.



Applicable To	Limit	
KDB 789033 D02 General UNII Test Procedures New Rules v02r01	Field Strength at 3m	
	PK: 68.2(dB μ V/m)	AV: 54 (dB μ V/m)

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
¹ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(²)
13.36-13.41	/	/	/
Note: ¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz. ² Above 38.6.			

2.6.2. Measuring Instruments


The measuring equipment is listed in the section 3 of this test report.

2.6.3. Test Setup


For radiated emissions from 9 kHz to 30 MHz

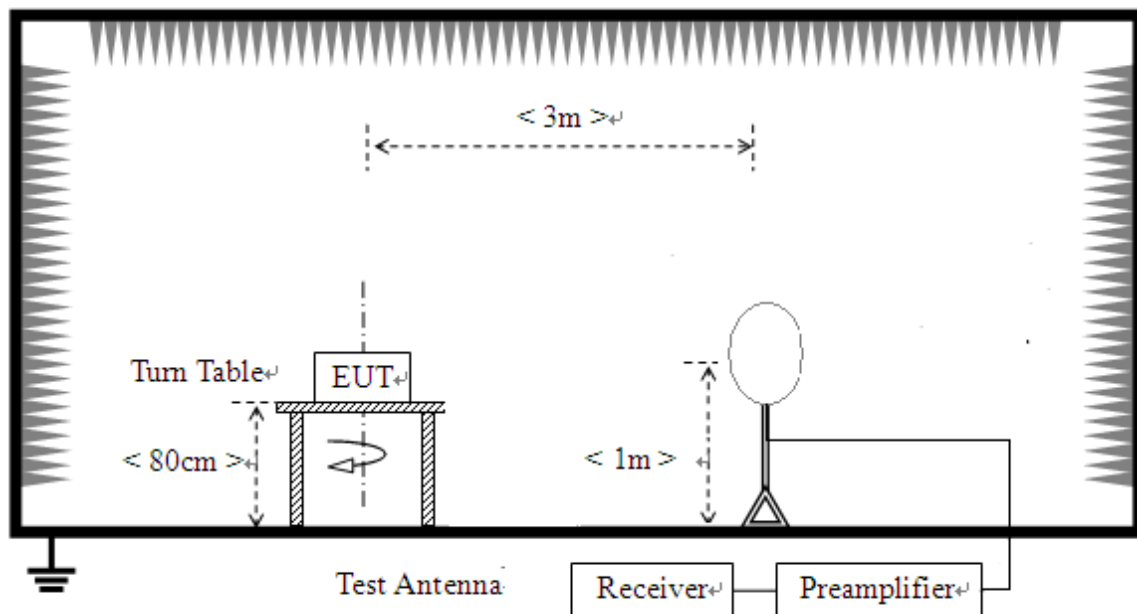

For radiated emissions from 30MHz to 1GHz

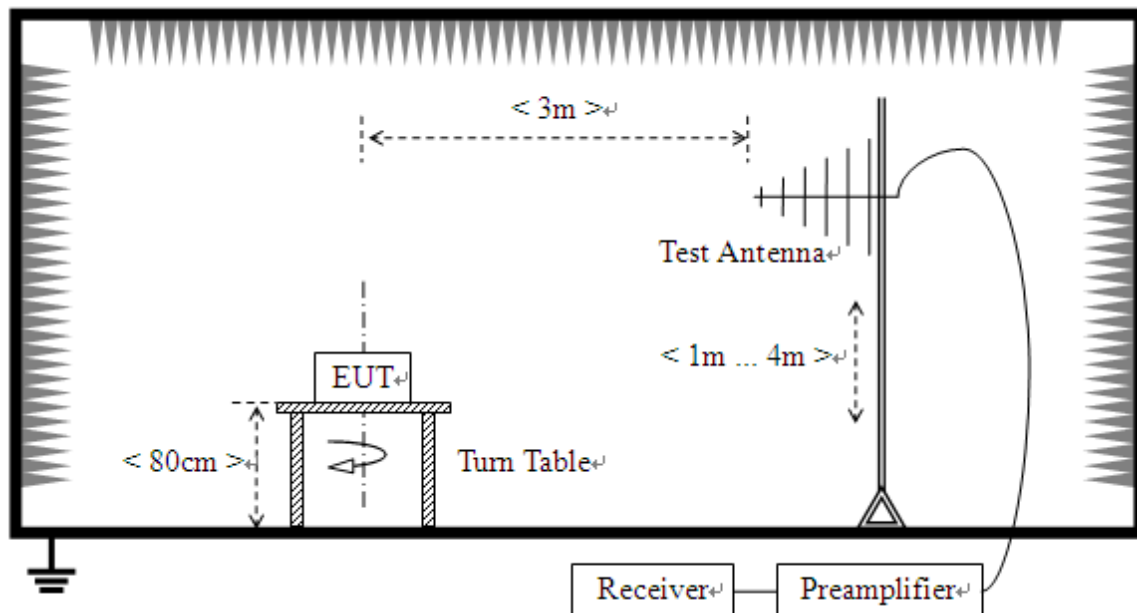

For radiated emissions above 1GHz

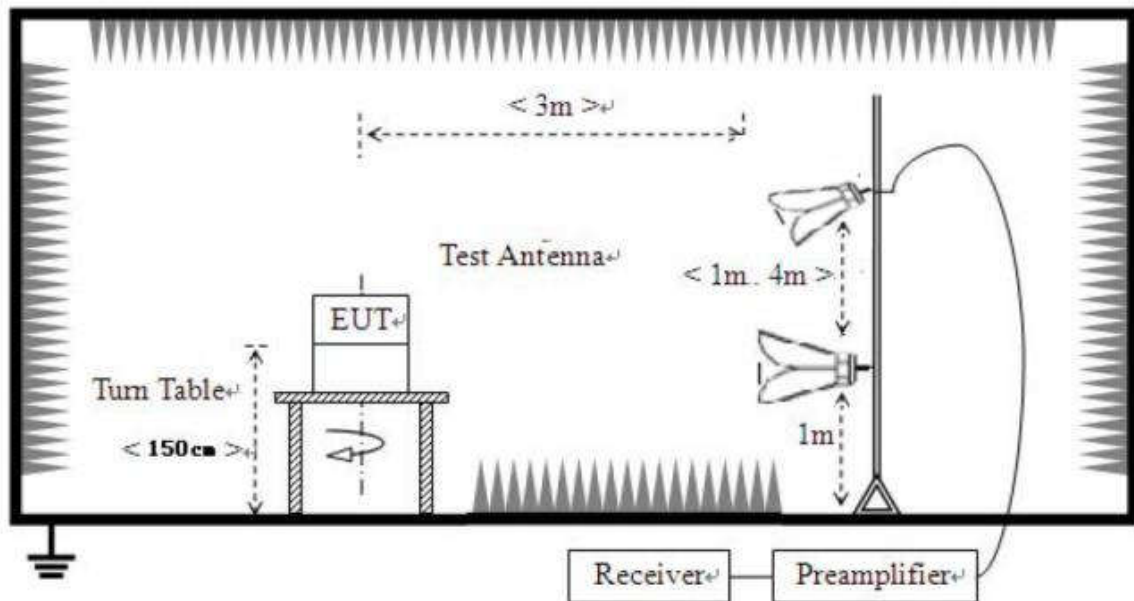

2.6.4. Test Procedures

1. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
3. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
5. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
6. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for

Quasi-peak detection (QP) at frequency below 1 GHz.

2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 3MHz for RMS Average (Duty cycle < 98%) for Average detection (AV) at frequency above 1GHz, then the measurement results was added to a correction factor ($10 \log(1/\text{duty cycle})$).
4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
5. Only worst-Case mode data provide here, 802.11a (20MHz) 5180MHz for Below 1GHz.

2.6.5. Test Result of Radiated Band Edge and Spurious Emission

NOTE 1: For 9 kHz to 30MHz, The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.


NOTE 2: For 30MHz to 1GHz, All of the EUT Configure mode were tested and found 802.11a 5180MHz channel is the worst mode, the worst case is recorded in this report.

NOTE 3: For 1GHz to 40GHz, All EUT configuration modes were tested, and this report only reflects the worst-case low channel and high channel of 20M bandwidth/40M bandwidth/80M bandwidth.

NOTE 4: Antenna height and turntable angle are the worst positions, the worst case is recorded in this report.

For 30MHz to 1000 MHz

EMI Sweep-3M(30-1G)

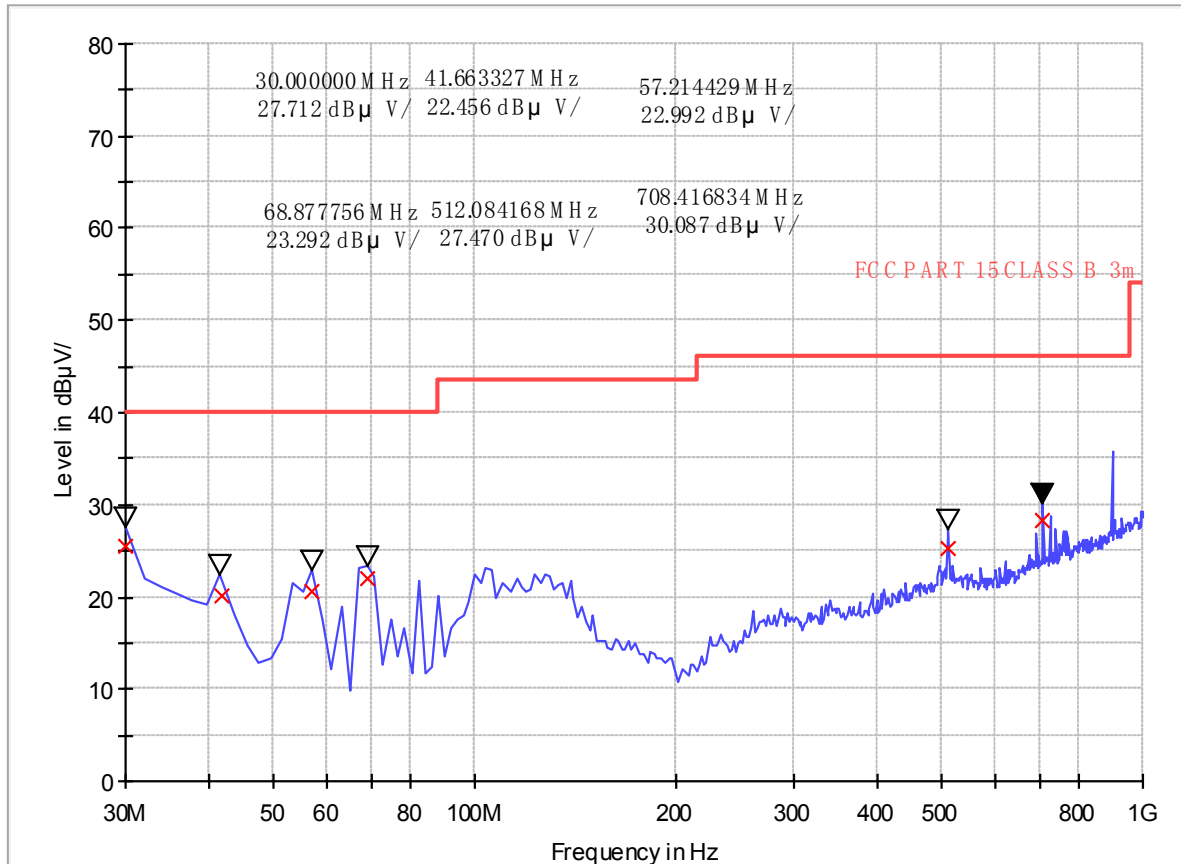


Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Corr.Factor (dB/m)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Polarity
30.000000	25.54	120.000	21.1	100.0	40.0	14.46	Horizontal
41.680000	20.10	120.000	15.6	100.0	40.0	19.90	Horizontal
57.200000	20.66	120.000	8.0	100.0	40.0	19.34	Horizontal
68.880000	21.99	120.000	8.3	100.0	40.0	18.01	Horizontal
512.080000	25.28	120.000	20.2	100.0	46.0	20.72	Horizontal
708.400000	28.39	120.000	22.5	100.0	46.0	17.61	Horizontal

Test Result : Pass

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

EMI Sweep-3M(30-1G)

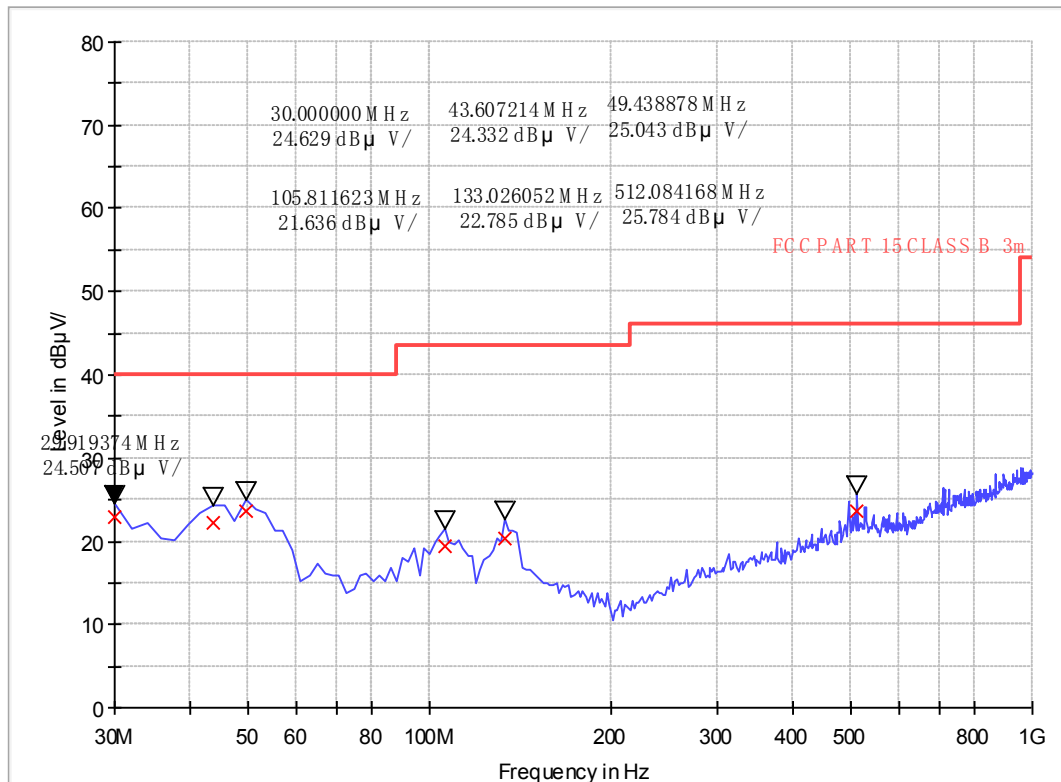

Frequency (MHz)	QuasiPeak (dB μ V/m)	Bandwidth (kHz)	Corr.Factor (dB/m)	Antenna height (cm)	Limit (dB μ V/m)	Margin (dB)	Polarity
30.000000	22.96	120.000	21.1	100.0	40.0	17.04	Vertical
43.600000	22.16	120.000	14.2	100.0	40.0	17.84	Vertical
49.440000	23.59	120.000	10.5	100.0	40.0	16.41	Vertical
105.800000	19.47	120.000	12.6	100.0	43.5	24.03	Vertical
133.040000	20.32	120.000	13.7	100.0	43.5	23.18	Vertical
512.080000	23.60	120.000	20.2	100.0	46.0	22.40	Vertical

Test Result : Pass

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m).
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB).
3. Margin value = Limit value - Emission Level.
4. The other emission levels were very low against the limit.

**For 1GHz to 40 GHz**

U-NII-1_802.11a_5180MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	48.06	68.20	-20.14	1.60	200	47.62	0.44	Horizontal	Peak
5150.00	38.49	54.00	-15.51	1.60	200	38.05	0.44	Horizontal	Average
10360.00	52.66	68.20	-15.54	1.60	200	42.20	10.46	Horizontal	Peak
10360.00	43.96	54.00	-10.04	1.60	200	33.50	10.46	Horizontal	Average
5150.00	47.17	68.20	-21.03	1.70	150	46.73	0.44	Vertical	Peak
5150.00	38.69	54.00	-15.31	1.70	150	38.25	0.44	Vertical	Average
10360.00	54.05	68.20	-14.15	1.70	150	43.59	10.46	Vertical	Peak
10360.00	43.12	54.00	-10.88	1.70	150	32.66	10.46	Vertical	Average
U-NII-1_802.11a_5240MHz									
Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	47.03	68.20	-21.17	1.60	200	46.78	0.25	Horizontal	Peak
5350.00	37.80	54.00	-16.20	1.60	200	37.55	0.25	Horizontal	Average
10480.00	53.02	68.20	-15.18	1.60	200	42.02	11.00	Horizontal	Peak
10480.00	43.40	54.00	-10.60	1.60	200	32.40	11.00	Horizontal	Average
5350.00	47.04	68.20	-21.16	1.70	150	46.79	0.25	Vertical	Peak
5350.00	37.62	54.00	-16.38	1.70	150	37.37	0.25	Vertical	Average
10480.00	53.81	68.20	-14.39	1.70	150	42.81	11.00	Vertical	Peak
10480.00	43.57	54.00	-10.43	1.70	150	32.57	11.00	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

**U-NII-1_802.11n-HT40_5190MHz**

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	48.48	68.20	-19.72	1.60	200	48.04	0.44	Horizontal	Peak
5150.00	38.85	54.00	-15.15	1.60	200	38.41	0.44	Horizontal	Average
10380.00	52.71	68.20	-15.49	1.60	200	42.18	10.53	Horizontal	Peak
10380.00	43.46	54.00	-10.54	1.60	200	32.93	10.53	Horizontal	Average
5150.00	47.51	68.20	-20.69	1.70	150	47.07	0.44	Vertical	Peak
5150.00	38.76	54.00	-15.24	1.70	150	38.32	0.44	Vertical	Average
10380.00	54.43	68.20	-13.77	1.70	150	43.90	10.53	Vertical	Peak
10380.00	43.61	54.00	-10.39	1.70	150	33.08	10.53	Vertical	Average

U-NII-1_802.11n-HT40_5230MHz

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5350.00	47.09	68.20	-21.11	1.60	200	46.84	0.25	Horizontal	Peak
5350.00	37.88	54.00	-16.12	1.60	200	37.63	0.25	Horizontal	Average
10460.00	52.76	68.20	-15.44	1.60	200	41.85	10.91	Horizontal	Peak
10460.00	42.94	54.00	-11.06	1.60	200	32.03	10.91	Horizontal	Average
5350.00	47.40	68.20	-20.80	1.70	150	47.15	0.25	Vertical	Peak
5350.00	37.31	54.00	-16.69	1.70	150	37.06	0.25	Vertical	Average
10460.00	53.52	68.20	-14.68	1.70	150	42.61	10.91	Vertical	Peak
10460.00	43.46	54.00	-10.54	1.70	150	32.55	10.91	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

**U-NII-1_802.11ac-VHT80_5210MHz**

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5150.00	47.47	68.20	-20.73	1.60	200	47.03	0.44	Horizontal	Peak
5150.00	38.11	54.00	-15.89	1.60	200	37.67	0.44	Horizontal	Average
5350.00	48.14	68.20	-20.06	1.60	200	47.89	0.25	Horizontal	Peak
5350.00	39.02	54.00	-14.98	1.60	200	38.77	0.25	Horizontal	Average
10420.00	52.64	68.20	-15.56	1.60	200	41.93	10.71	Horizontal	Peak
10420.00	43.37	54.00	-10.63	1.60	200	32.66	10.71	Horizontal	Average
5150.00	47.50	68.20	-20.70	1.70	150	47.06	0.44	Vertical	Peak
5150.00	37.43	54.00	-16.57	1.70	150	36.99	0.44	Vertical	Average
5350.00	47.70	68.20	-20.50	1.70	150	47.45	0.25	Vertical	Peak
5350.00	39.03	54.00	-14.97	1.70	150	38.78	0.25	Vertical	Average
10420.00	54.29	68.20	-13.91	1.70	150	43.58	10.71	Vertical	Peak
10420.00	43.40	54.00	-10.60	1.70	150	32.69	10.71	Vertical	Average

Remark:

1. *Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)*
2. *Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)*
3. *Margin value = Emission Level – Limit value*
4. *The emission levels of other frequencies are very lower than the limit and not show in test report.*



U-NII-3_802.11a_5745MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	50.43	68.20	-17.77	1.60	190	49.63	0.80	Horizontal	Peak
5700.00	51.34	105.20	-53.86	1.60	190	50.10	1.24	Horizontal	Peak
5720.00	51.71	110.80	-59.09	1.60	190	50.43	1.28	Horizontal	Peak
5725.00	52.70	122.20	-69.50	1.60	190	51.40	1.30	Horizontal	Peak
11490.00	51.83	68.20	-16.37	1.60	190	40.28	11.55	Horizontal	Peak
11490.00	42.92	54.00	-11.08	1.60	190	31.37	11.55	Horizontal	Average
5650.00	50.40	68.20	-17.80	1.50	170	49.60	0.80	Vertical	Peak
5700.00	51.20	105.20	-54.00	1.50	170	49.96	1.24	Vertical	Peak
5720.00	52.53	110.80	-58.27	1.50	170	51.25	1.28	Vertical	Peak
5725.00	51.23	122.20	-70.97	1.50	170	49.93	1.30	Vertical	Peak
11490.00	52.13	68.20	-16.07	1.50	170	40.58	11.55	Vertical	Peak
11490.00	42.79	54.00	-11.21	1.50	170	31.24	11.55	Vertical	Average
U-NII-3_802.11a_5825MHz									
Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	51.78	122.20	-70.42	1.60	190	49.96	1.82	Horizontal	Peak
5855.00	51.41	110.80	-59.39	1.60	190	49.56	1.85	Horizontal	Peak
5875.00	51.44	105.20	-53.76	1.60	190	49.46	1.98	Horizontal	Peak
5925.00	51.90	68.20	-16.30	1.60	190	49.78	2.12	Horizontal	Peak
11650.00	52.26	68.20	-15.94	1.60	190	40.62	11.64	Horizontal	Peak
11650.00	43.18	54.00	-10.82	1.60	190	31.54	11.64	Horizontal	Average
5850.00	50.52	122.20	-71.68	1.50	170	48.70	1.82	Vertical	Peak
5855.00	52.37	110.80	-58.43	1.50	170	50.52	1.85	Vertical	Peak
5875.00	51.15	105.20	-54.05	1.50	170	49.17	1.98	Vertical	Peak
5925.00	52.57	68.20	-15.63	1.50	170	50.45	2.12	Vertical	Peak
11650.00	52.87	68.20	-15.33	1.50	170	41.23	11.64	Vertical	Peak
11650.00	43.03	54.00	-10.97	1.50	170	31.39	11.64	Vertical	Average
Remark: 1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m) 2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB) 3. Margin value = Emission Level – Limit value 4. The emission levels of other frequencies are very lower than the limit and not show in test report.									

**U-NII-3_802.11n-HT40_5755MHz**

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	50.13	68.20	-18.07	1.60	190	49.33	0.80	Horizontal	Peak
5700.00	50.87	105.20	-54.33	1.60	190	49.63	1.24	Horizontal	Peak
5720.00	51.80	110.80	-59.00	1.60	190	50.52	1.28	Horizontal	Peak
5725.00	53.09	122.20	-69.11	1.60	190	51.79	1.30	Horizontal	Peak
11510.00	51.74	68.20	-16.46	1.60	190	40.18	11.56	Horizontal	Peak
11510.00	43.30	54.00	-10.70	1.60	190	31.74	11.56	Horizontal	Average
5650.00	50.34	68.20	-17.86	1.50	170	49.54	0.80	Vertical	Peak
5700.00	51.24	105.20	-53.96	1.50	170	50.00	1.24	Vertical	Peak
5720.00	52.11	110.80	-58.69	1.50	170	50.83	1.28	Vertical	Peak
5725.00	51.44	122.20	-70.76	1.50	170	50.14	1.30	Vertical	Peak
11510.00	52.13	68.20	-16.07	1.50	170	40.57	11.56	Vertical	Peak
11510.00	42.43	54.00	-11.57	1.50	170	30.87	11.56	Vertical	Average

U-NII-3_802.11n-HT40_5795MHz

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5850.00	51.59	122.20	-70.61	1.60	190	49.77	1.82	Horizontal	Peak
5855.00	50.93	110.80	-59.87	1.60	190	49.08	1.85	Horizontal	Peak
5875.00	51.65	105.20	-53.55	1.60	190	49.67	1.98	Horizontal	Peak
5925.00	51.53	68.20	-16.67	1.60	190	49.41	2.12	Horizontal	Peak
11590.00	52.75	68.20	-15.45	1.60	190	41.24	11.51	Horizontal	Peak
11590.00	43.40	54.00	-10.60	1.60	190	31.89	11.51	Horizontal	Average
5850.00	50.05	122.20	-72.15	1.50	170	48.23	1.82	Vertical	Peak
5855.00	52.00	110.80	-58.80	1.50	170	50.15	1.85	Vertical	Peak
5875.00	51.23	105.20	-53.97	1.50	170	49.25	1.98	Vertical	Peak
5925.00	52.82	68.20	-15.38	1.50	170	50.70	2.12	Vertical	Peak
11590.00	52.90	68.20	-15.30	1.50	170	41.39	11.51	Vertical	Peak
11590.00	42.86	54.00	-11.14	1.50	170	31.35	11.51	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



U-NII-3_802.11ac-VHT80_5775MHz

Frequency (MHz)	Emssion Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV/m)	Correction Factor (dB/m)	Polarity	Detector
5650.00	49.94	68.20	-18.26	1.60	190	49.14	0.80	Horizontal	Peak
5700.00	51.14	105.20	-54.06	1.60	190	49.90	1.24	Horizontal	Peak
5720.00	51.36	110.80	-59.44	1.60	190	50.08	1.28	Horizontal	Peak
5725.00	52.83	122.20	-69.37	1.60	190	51.53	1.30	Horizontal	Peak
5850.00	52.07	122.20	-70.13	1.60	190	50.25	1.82	Horizontal	Peak
5855.00	51.27	110.80	-59.53	1.60	190	49.42	1.85	Horizontal	Peak
5875.00	51.46	105.20	-53.74	1.60	190	49.48	1.98	Horizontal	Peak
5925.00	51.67	68.20	-16.53	1.60	190	49.55	2.12	Horizontal	Peak
11550.00	52.40	68.20	-15.80	1.60	190	40.86	11.54	Horizontal	Peak
11550.00	43.48	54.00	-10.52	1.60	190	31.94	11.54	Horizontal	Average
5650.00	50.52	68.20	-17.68	1.50	170	49.72	0.80	Vertical	Peak
5700.00	51.40	105.20	-53.80	1.50	170	50.16	1.24	Vertical	Peak
5720.00	51.80	110.80	-59.00	1.50	170	50.52	1.28	Vertical	Peak
5725.00	51.22	122.20	-70.98	1.50	170	49.92	1.30	Vertical	Peak
5850.00	50.22	122.20	-71.98	1.50	170	48.40	1.82	Vertical	Peak
5855.00	52.18	110.80	-58.62	1.50	170	50.33	1.85	Vertical	Peak
5875.00	51.37	105.20	-53.83	1.50	170	49.39	1.98	Vertical	Peak
5925.00	52.54	68.20	-15.66	1.50	170	50.42	2.12	Vertical	Peak
11550.00	52.83	68.20	-15.37	1.50	170	41.29	11.54	Vertical	Peak
11550.00	42.72	54.00	-11.28	1.50	170	31.18	11.54	Vertical	Average

Remark:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) - Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

2.7. AC Power Line Conducted Emission

2.7.1. Limit of AC Power Line Conducted Emission

FCC Part 15.207:


For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

2.7.2. Measuring Instruments

The measuring equipment is listed in the section 3 of this test report.

2.7.3. Test Setup

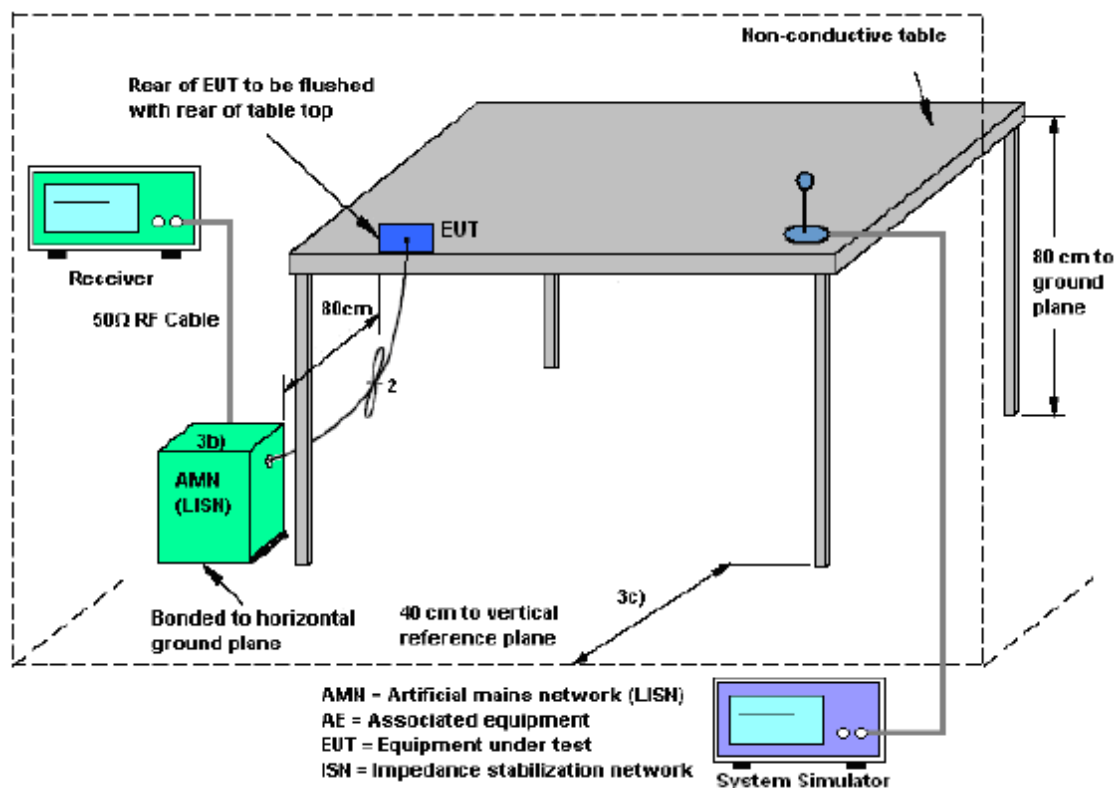

2.7.4. Test Procedures


1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

2.7.5. Test Result of AC Power Line Conducted Emission

NOTE 1: The EUT configuration of the emission tests is 5G WLAN Link + USB Cable (Charging from Adapter).

NOTE 2: All of the EUT Configure mode were tested and found 802.11a 5180MHz channel is the worst mode, the worst case is recorded in this report.

Line Phase

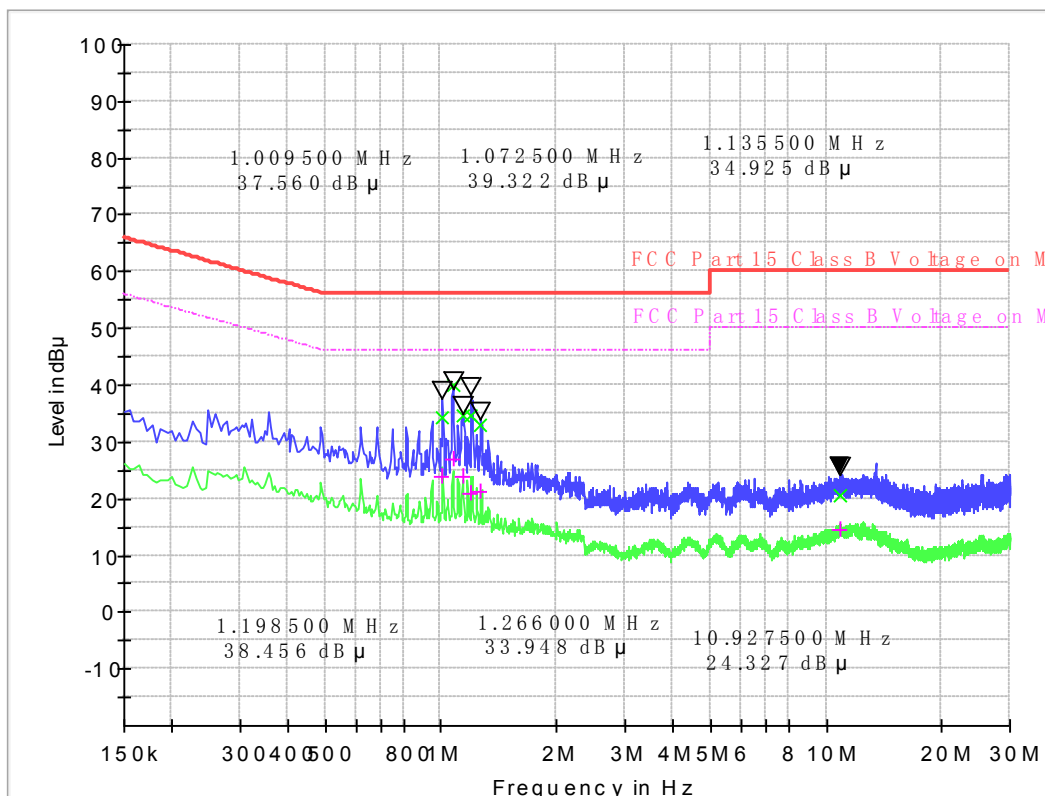


Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Corr.Factor (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dBμV)
1.009500	34.43	23.75	19.8	21.57	56.0	22.25	46.0
1.072500	39.98	26.96	19.8	16.02	56.0	19.04	46.0
1.135500	34.74	23.77	19.8	21.26	56.0	22.23	46.0
1.198500	34.74	20.89	19.8	21.26	56.0	25.11	46.0
1.266000	32.98	21.10	19.8	23.02	56.0	24.90	46.0
10.927500	20.53	14.63	20.0	39.47	60.0	35.37	50.0

Test Result : Pass

Note: Final Level = Receiver Read level + Correction factor.

Neutral Phase

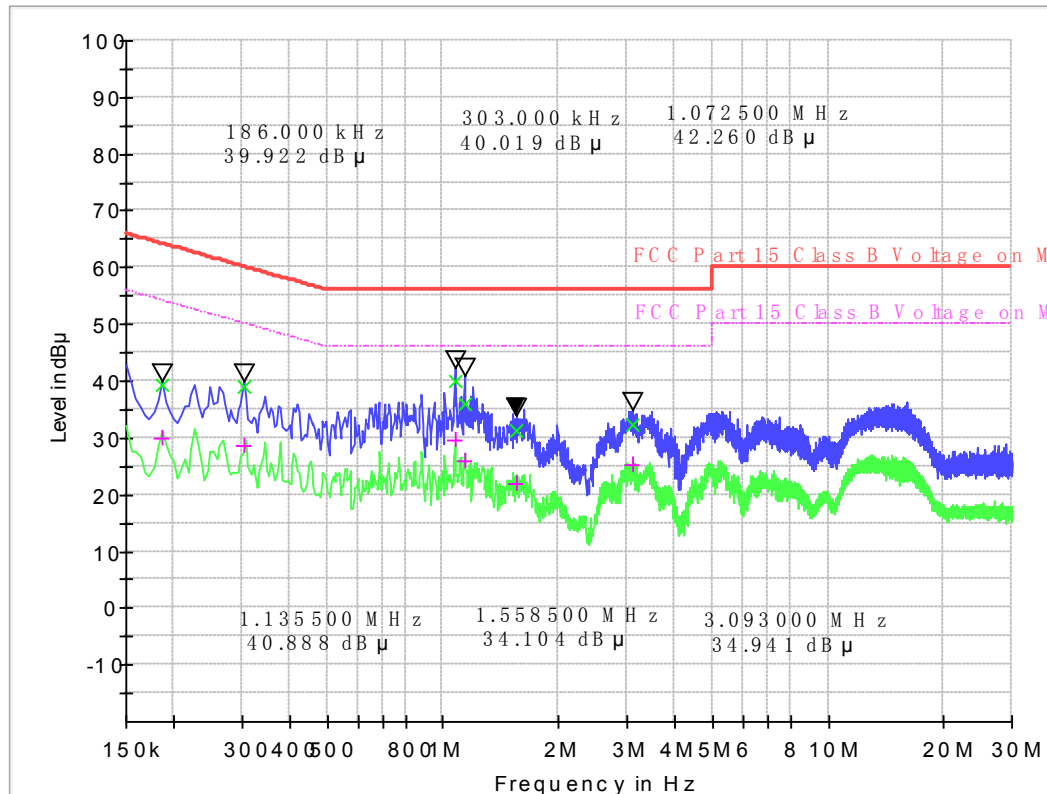

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Corr.Factor (dB)	Margin - QPK	Limit - QPK	Margin - AV	Limit - AV (dBμV)
0.186000	39.39	29.92	19.9	24.82	64.2	24.29	54.2
0.303000	38.89	28.58	19.8	21.27	60.2	21.58	50.2
1.072500	39.94	29.63	19.9	16.06	56.0	16.37	46.0
1.135500	35.88	25.81	19.9	20.12	56.0	20.19	46.0
1.558500	31.14	22.01	19.9	24.86	56.0	23.99	46.0
3.093000	32.34	25.15	19.9	23.66	56.0	20.85	46.0

Test Result : Pass

Note: Final Level = Receiver Read level + Correction factor.



3. List of measuring equipment

Item	Test Equipment	Manufacturer	Model No.	Serial No.	Cal Date	Due Date
1	5M Anechoic Chamber	Albatross	SAC-5MAC 12.8x6.8x6.4m	A0304210	2022.06.09	2025.06.08
2	EMI Test Receiver	ROHDE&SCHWARZ	ESW26	A180502935	2024.05.23	2025.05.22
3	Loop Antenna	Schwarz beck	HFH2-Z2	A0304220	2022.05.02	2025.05.01
4	Broadband antenna (30MHz~1GHz)	R&S	HL562	A0304224	2023.06.08	2026.06.07
5	EMI Horn Ant. (1-18G)	ETC	MCTD-1209	A150402241	2023.05.16	2026.05.15
6	Horn antenna (18GHz~26.5GHz)	AR	AT4510	A0804450	2023.06.01	2026.05.31
7	Amplifier 30M~1GHz	MILMEGA	80RF1000-10004	A140101634	2023.10.20	2024.10.19
8	Amplifier 1G~18GHz	MILMEGA	AS0104R-800/400	A160302517	2023.10.20	2024.10.19
9	Spectrum Analyzer	KEYSIGHT	N9030A	A160702554	2024.01.18	2025.01.17
10	Test Receiver	R&S	ESIB7	A0501375	2024.02.28	2025.02.27
11	Broadband Ant.	ETC	MCTD 2786	A150402240	2023.05.22	2026.05.21
12	3M Anechoic Chamber	Albatross	SAC-3MAC 9*6*6m	A0412375	2024.02.27	2027.02.26
13	Temperature chamber	ESPEC	SU-642	A150802409	2024.02.22	2025.02.21
14	Test Receiver	KEYSIGHT	N9038A	A141202036	2024.06.05	2025.06.04
15	LISN	ROHDE&SCHWARZ	ENV216	A140701847	2024.05.23	2025.05.22

4. Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2020. All the measurement uncertainty value were shown with a coverage $K=2$ to indicate 95% level of confidence . The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of AC Power Line Conducted Emission Measurement (150kHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	2.8dB
--	-------

Uncertainty of Radiated Emission Measurement (9kHz~30MHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	3.5dB
--	-------

Uncertainty of Radiated Emission Measurement (30MHz~1GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	3.91dB
--	--------

Uncertainty of Radiated Emission Measurement (1GHz~18GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	4.5dB
--	-------

Uncertainty of Radiated Emission Measurement (18GHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	4.9dB
--	-------

Uncertainty of RF Conducted Measurement (9kHz~40GHz)

Measuring Uncertainty for a level of confidence of 95%($U=2U_c(y)$)	1.2dB
--	-------



Appendix A

Duty Cycle Test Result and Data

U-NII-1						
TestMode	Antenna	Frequency[MHz]	ON Time[ms]	Period[ms]	Duty Cycle[%]	DC Factor
11A	Ant1	5180	2.07	2.10	98.57	0.06
11N20SISO	Ant1	5180	1.93	1.96	98.47	0.07
11N40SISO	Ant1	5190	0.95	0.99	95.96	0.18
11AC20SISO	Ant1	5180	1.93	1.96	98.47	0.07
11AC40SISO	Ant1	5190	0.95	0.98	96.94	0.13
11AC80SISO	Ant1	5210	0.46	0.50	92.00	0.36

U-NII-3						
TestMode	Antenna	Frequency[MHz]	ON Time[ms]	Period[ms]	Duty Cycle[%]	DC Factor
11A	Ant1	5745	2.07	2.10	98.57	0.06
11N20SISO	Ant1	5745	1.92	1.96	97.96	0.09
11N40SISO	Ant1	5755	0.95	0.98	96.94	0.13
11AC20SISO	Ant1	5745	1.93	1.96	98.47	0.07
11AC40SISO	Ant1	5755	0.95	0.99	95.96	0.18
11AC80SISO	Ant1	5775	0.47	0.50	94.00	0.27





Output power Test Result and Data

U-NII-1 AVGSA Output Power										
Test Mode	Antenna	Frequency [MHz]	Power [dBm]	DC Factor [dBm]	Result [dBm]	Power Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11A	Ant1	5180	13.35	0.06	13.41	≤24.0	4.28	17.69	≤22.22	PASS
11A	Ant1	5200	13.48	0.10	13.58	≤24.0	4.28	17.86	≤22.21	PASS
11A	Ant1	5240	14.21	0.09	14.30	≤24.0	4.28	18.58	≤22.22	PASS
11N20SISO	Ant1	5180	12.16	0.07	12.23	≤24.0	4.28	16.51	≤22.52	PASS
11N20SISO	Ant1	5200	11.33	0.12	11.45	≤24.0	4.28	15.73	≤22.52	PASS
11N20SISO	Ant1	5240	11.77	0.10	11.87	≤24.0	4.28	16.15	≤22.52	PASS
11N40SISO	Ant1	5190	11.78	0.18	11.96	≤24.0	4.28	16.24	≤25.60	PASS
11N40SISO	Ant1	5230	12.33	0.20	12.53	≤24.0	4.28	16.81	≤25.60	PASS
11AC20SISO	Ant1	5180	10.94	0.07	11.01	≤24.0	4.28	15.29	≤22.52	PASS
11AC20SISO	Ant1	5200	11.37	0.10	11.47	≤24.0	4.28	15.75	≤22.52	PASS
11AC20SISO	Ant1	5240	11.73	0.09	11.82	≤24.0	4.28	16.10	≤22.52	PASS
11AC40SISO	Ant1	5190	12.00	0.13	12.13	≤24.0	4.28	16.41	≤25.60	PASS
11AC40SISO	Ant1	5230	12.38	0.19	12.57	≤24.0	4.28	16.85	≤25.60	PASS
11AC80SISO	Ant1	5210	11.77	0.36	12.13	≤24.0	4.28	16.41	≤28.80	PASS

U-NII-1 AVGSA Output Power										
Test Mode	Antenna	Frequency [MHz]	Power [dBm]	DC Factor [dBm]	Result [dBm]	Power Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11A	Ant1	5745	12.98	0.06	13.04	≤30.0	4.28	17.32	≤30.0	PASS
11A	Ant1	5785	13.63	0.06	13.69	≤30.0	4.28	17.97	≤30.0	PASS
11A	Ant1	5825	13.35	0.06	13.41	≤30.0	4.28	17.69	≤30.0	PASS
11N20SISO	Ant1	5745	12.21	0.09	12.30	≤30.0	4.28	16.58	≤30.0	PASS
11N20SISO	Ant1	5785	12.45	0.09	12.54	≤30.0	4.28	16.82	≤30.0	PASS
11N20SISO	Ant1	5825	12.41	0.09	12.50	≤30.0	4.28	16.78	≤30.0	PASS
11N40SISO	Ant1	5755	11.78	0.13	11.91	≤30.0	4.28	16.19	≤30.0	PASS
11N40SISO	Ant1	5795	11.88	0.13	12.01	≤30.0	4.28	16.29	≤30.0	PASS
11AC20SISO	Ant1	5745	11.67	0.07	11.74	≤30.0	4.28	16.02	≤30.0	PASS
11AC20SISO	Ant1	5785	11.77	0.07	11.84	≤30.0	4.28	16.12	≤30.0	PASS
11AC20SISO	Ant1	5825	11.95	0.07	12.02	≤30.0	4.28	16.30	≤30.0	PASS
11AC40SISO	Ant1	5755	11.74	0.18	11.92	≤30.0	4.28	16.20	≤30.0	PASS
11AC40SISO	Ant1	5795	11.88	0.18	12.06	≤30.0	4.28	16.34	≤30.0	PASS
11AC80SISO	Ant1	5775	12.33	0.27	12.60	≤30.0	4.28	16.88	≤30.0	PASS

U-NII-1:

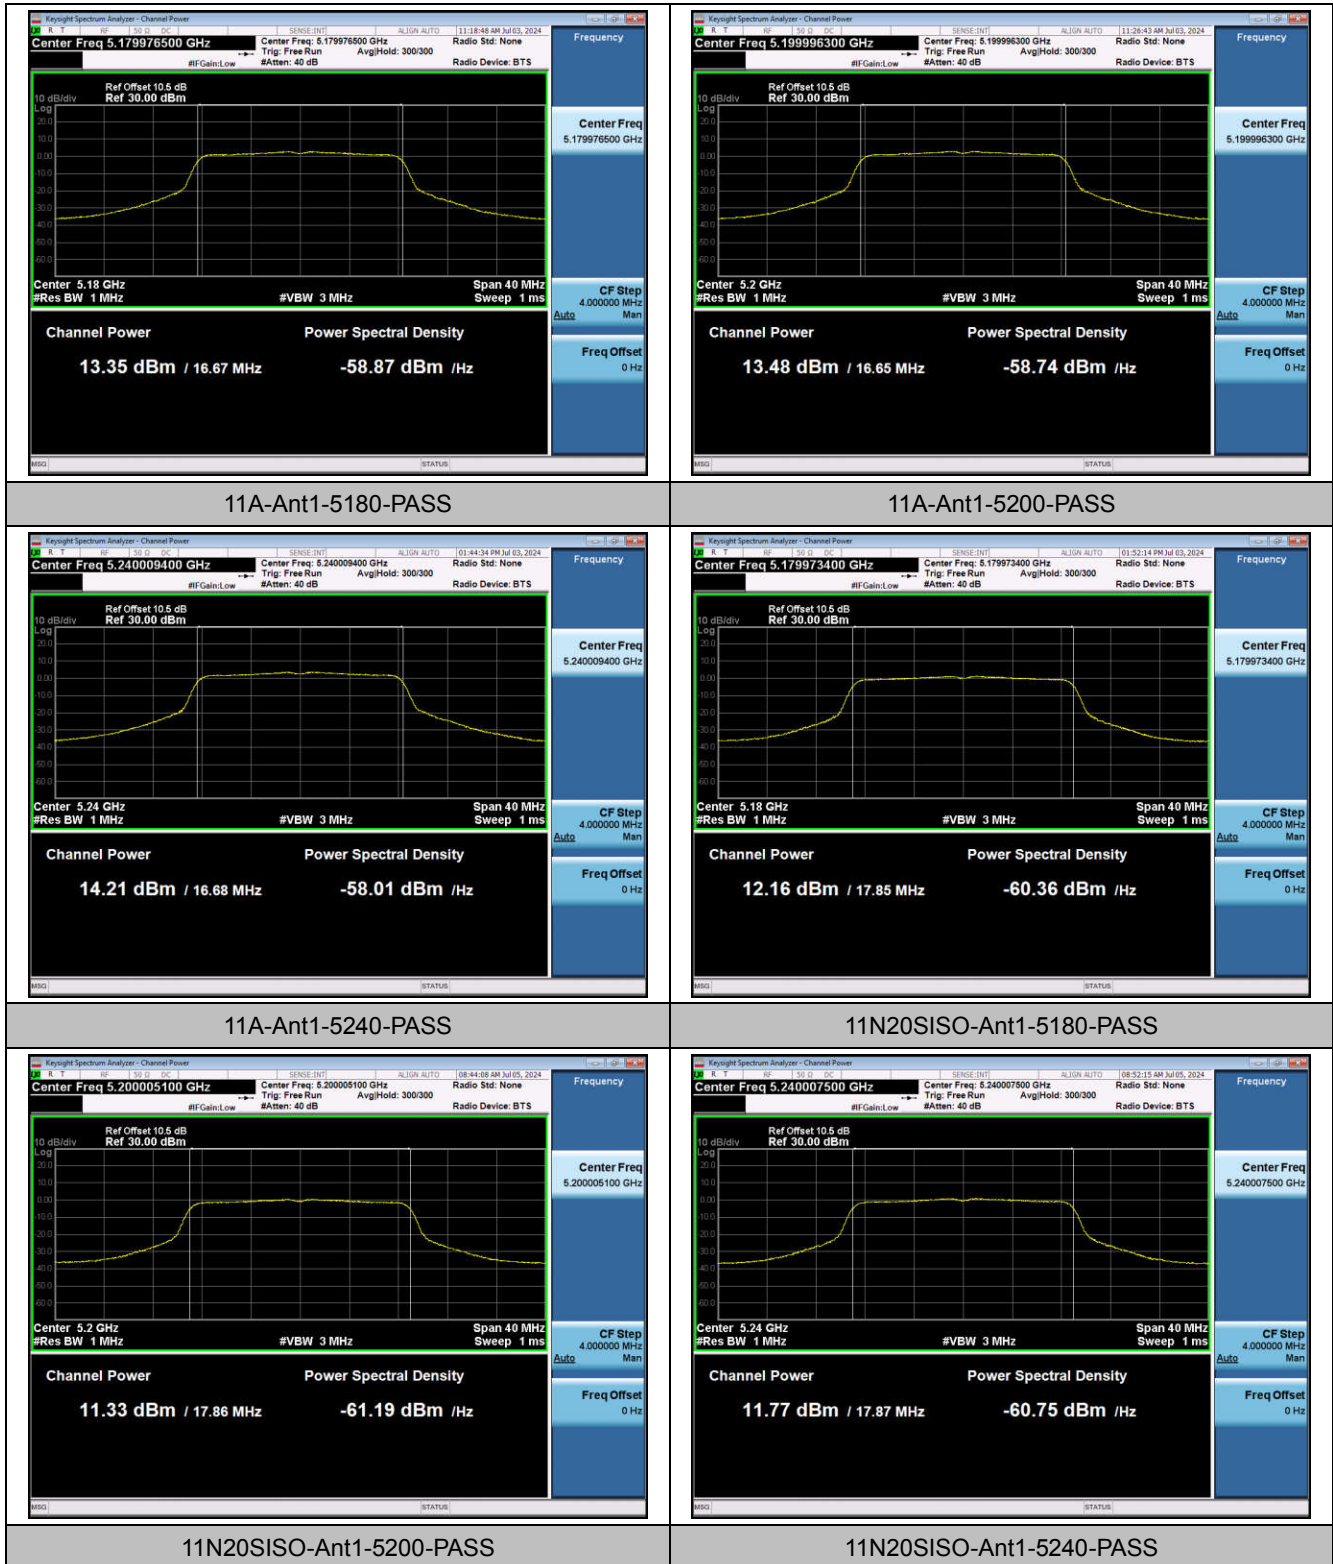


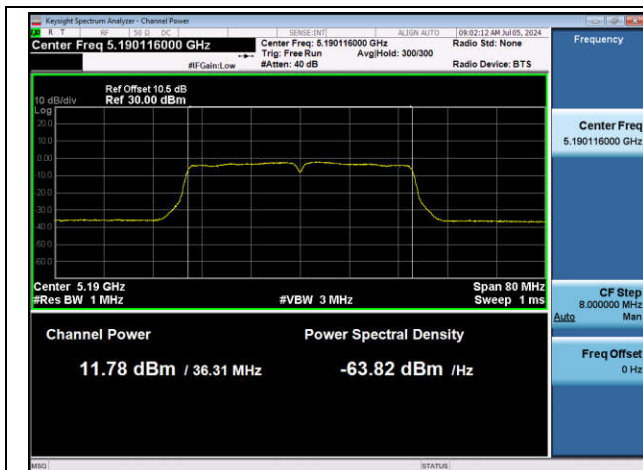


11N40SISO-Ant1-5190-PASS




11N40SISO-Ant1-5230-PASS

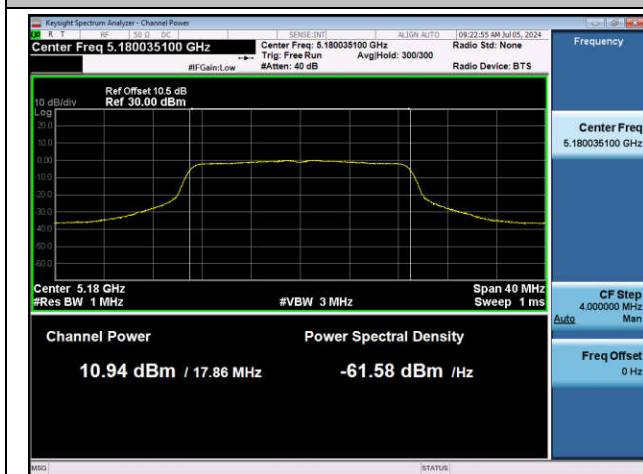


11AC20SISO-Ant1-5180-PASS

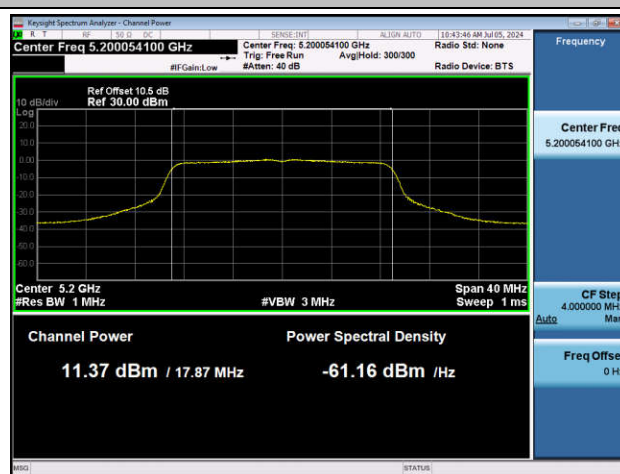


11AC20SISO-Ant1-5200-PASS

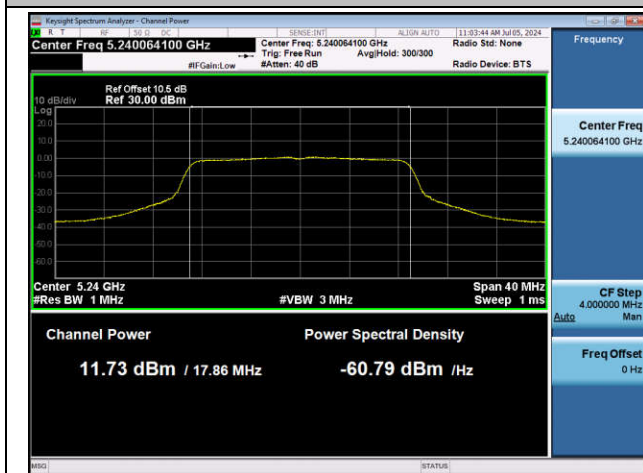


11AC20SISO-Ant1-5240-PASS

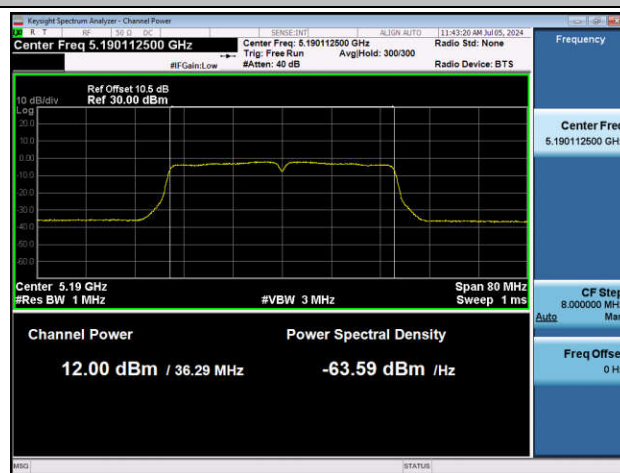

11AC40SISO-Ant1-5190-PASS

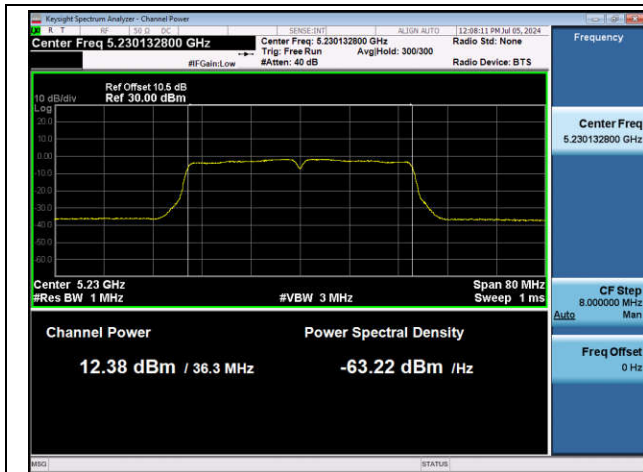


11AC40SISO-Ant1-5230-PASS

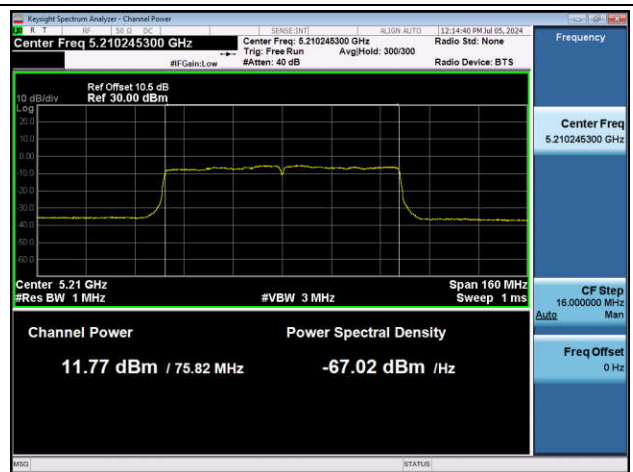


11AC80SISO-Ant1-5210-PASS


U-NII-3:

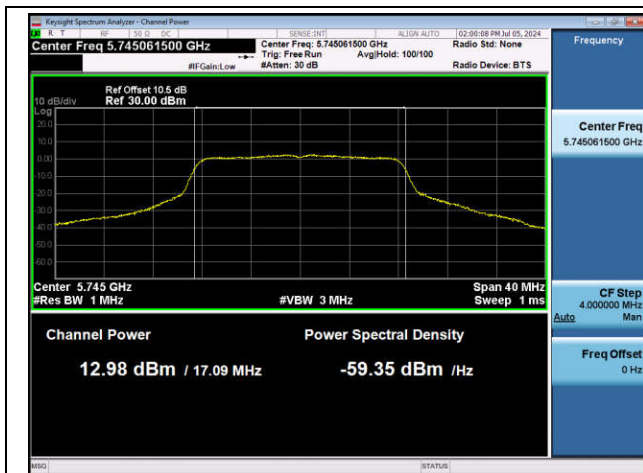


11A-Ant1-5745-PASS

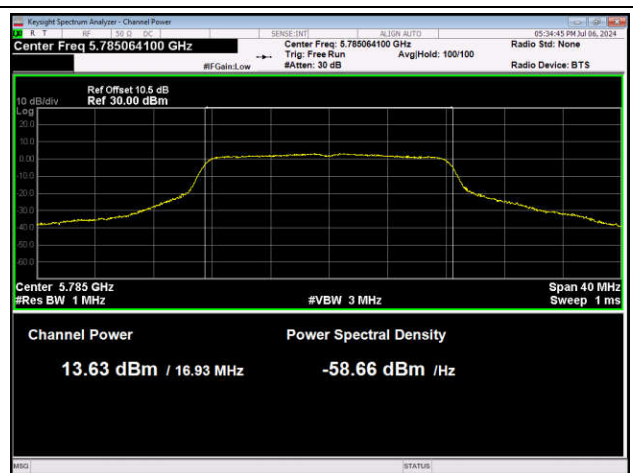


11A-Ant1-5785-PASS

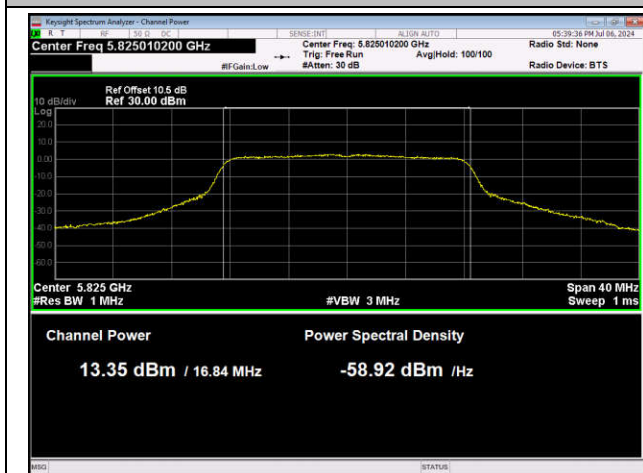


11A-Ant1-5825-PASS

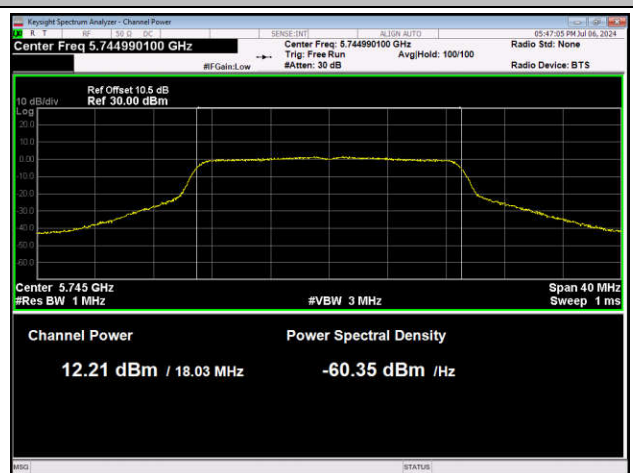


11N20SISO-Ant1-5745-PASS

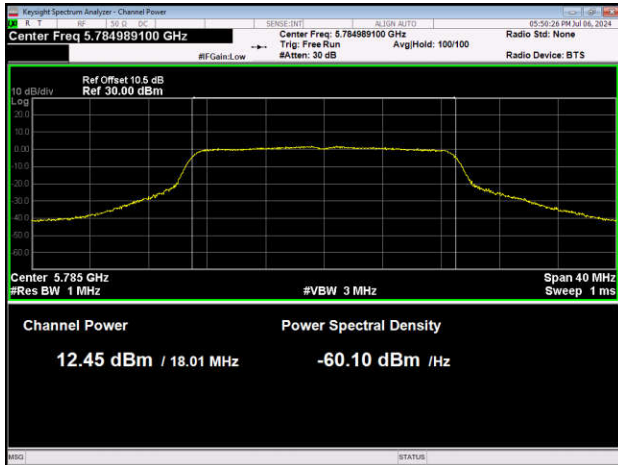


11N20SISO-Ant1-5785-PASS

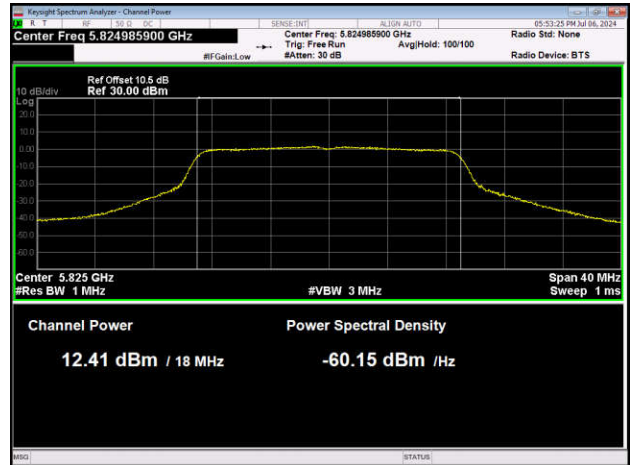


11N20SISO-Ant1-5825-PASS

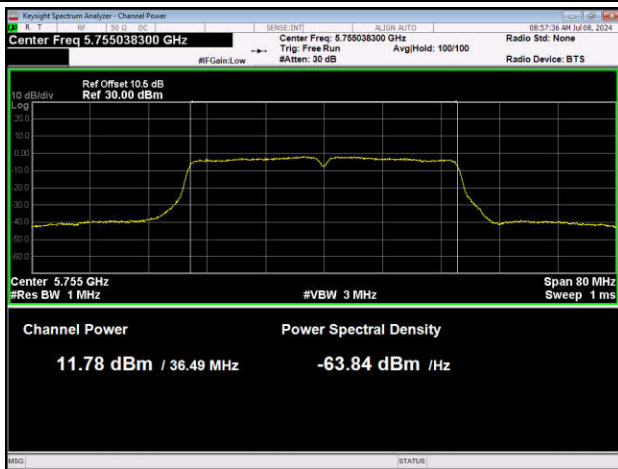


11N40SISO-Ant1-5755-PASS

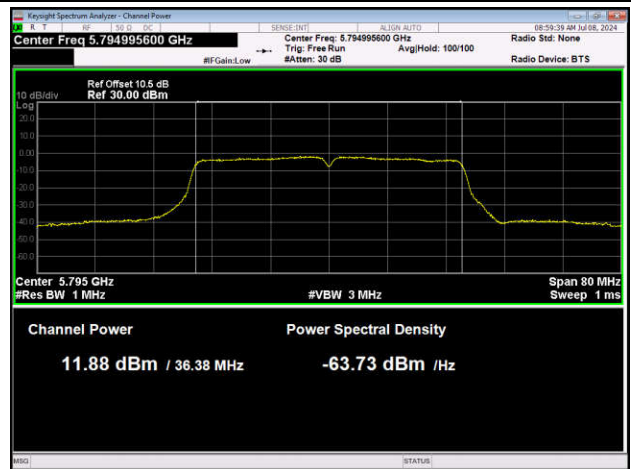


11N40SISO-Ant1-5795-PASS

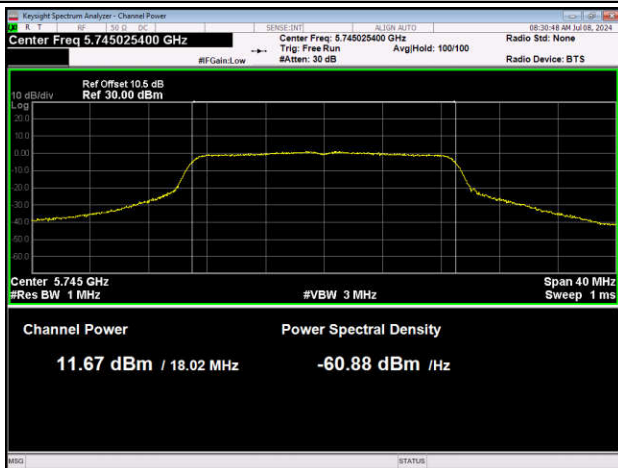


11AC20SISO-Ant1-5745-PASS

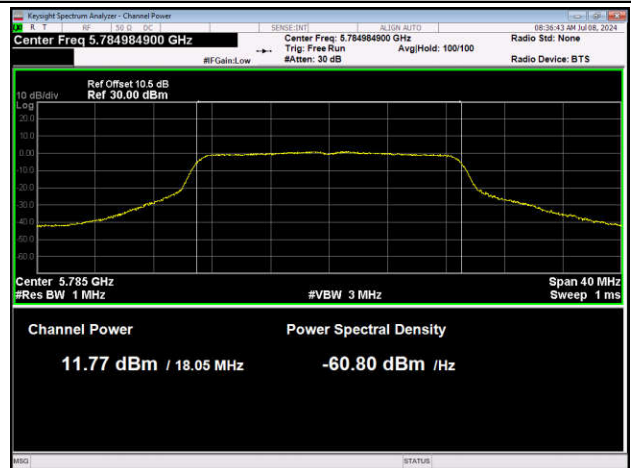


11AC20SISO-Ant1-5785-PASS

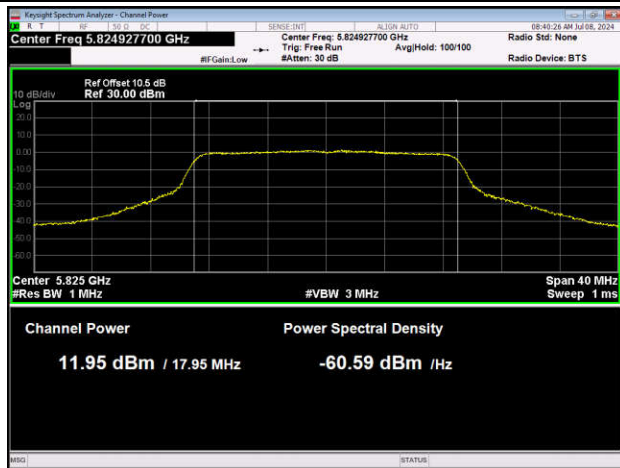


11AC20SISO-Ant1-5825-PASS

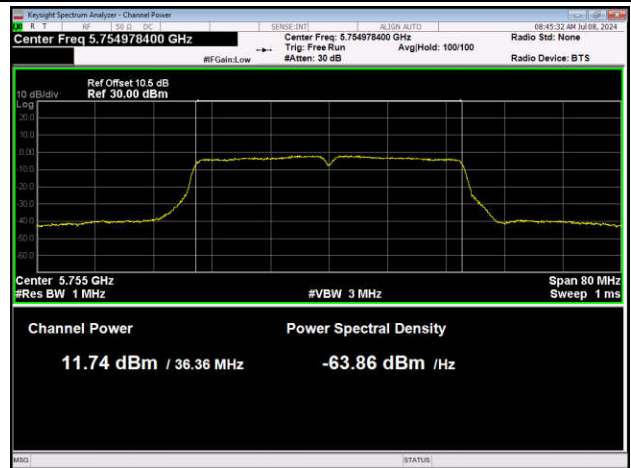

11AC40SISO-Ant1-5755-PASS

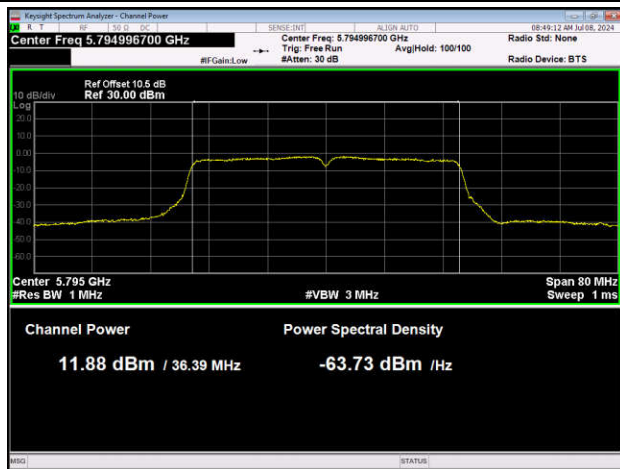

11AC40SISO-Ant1-5795-PASS

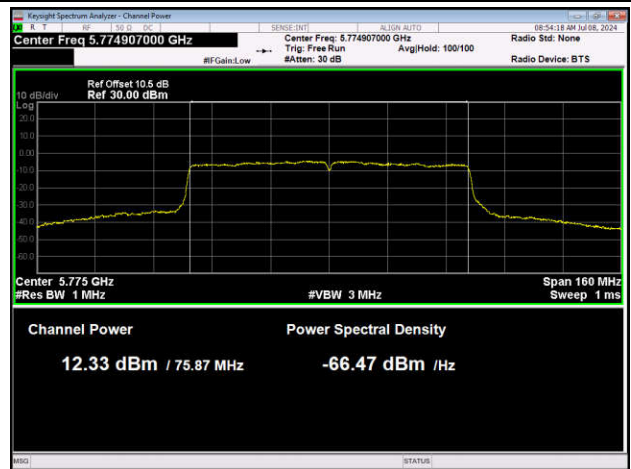

11AC80SISO-Ant1-5775-PASS




AVGSA Power Spectral Density Test Result and Data


U-NII-1 AVGSA Power Spectral Density						
TestMode	Antenna	Frequency [MHz]	Result [dBm/MHz]	FCC Limit [dBm/MHz]	IC Limit [dBm/MHz]	Verdict
11A	Ant1	5180	-0.15	≤11.00	≤10.00	PASS
11A	Ant1	5200	3.03	≤11.00	≤10.00	PASS
11A	Ant1	5240	3.78	≤11.00	≤10.00	PASS
11N20SISO	Ant1	5180	1.30	≤11.00	≤10.00	PASS
11N20SISO	Ant1	5200	0.50	≤11.00	≤10.00	PASS
11N20SISO	Ant1	5240	1.43	≤11.00	≤10.00	PASS
11N40SISO	Ant1	5190	-1.92	≤11.00	≤10.00	PASS
11N40SISO	Ant1	5230	-1.18	≤11.00	≤10.00	PASS
11AC20SISO	Ant1	5180	0.24	≤11.00	≤10.00	PASS
11AC20SISO	Ant1	5200	0.62	≤11.00	≤10.00	PASS
11AC20SISO	Ant1	5240	1.01	≤11.00	≤10.00	PASS
11AC40SISO	Ant1	5190	-1.72	≤11.00	≤10.00	PASS
11AC40SISO	Ant1	5230	-1.05	≤11.00	≤10.00	PASS
11AC80SISO	Ant1	5210	-4.81	≤11.00	≤10.00	PASS

U-NII-3 AVGSA Power Spectral Density					
TestMode	Antenna	Frequency[MHz]	Result[dBm/500kHz]	Limit[dBm/500kHz]	Verdict
11A	Ant1	5745	0.13	≤30.00	PASS
11A	Ant1	5785	0.46	≤30.00	PASS
11A	Ant1	5825	0.51	≤30.00	PASS
11N20SISO	Ant1	5745	-1.12	≤30.00	PASS
11N20SISO	Ant1	5785	-0.94	≤30.00	PASS
11N20SISO	Ant1	5825	-1.00	≤30.00	PASS
11N40SISO	Ant1	5755	-3.23	≤30.00	PASS
11N40SISO	Ant1	5795	-3.06	≤30.00	PASS
11AC20SISO	Ant1	5745	-1.89	≤30.00	PASS
11AC20SISO	Ant1	5785	-1.65	≤30.00	PASS
11AC20SISO	Ant1	5825	-1.23	≤30.00	PASS
11AC40SISO	Ant1	5755	-4.69	≤30.00	PASS
11AC40SISO	Ant1	5795	-4.45	≤30.00	PASS
11AC80SISO	Ant1	5775	-6.99	≤30.00	PASS

U-NII-1:

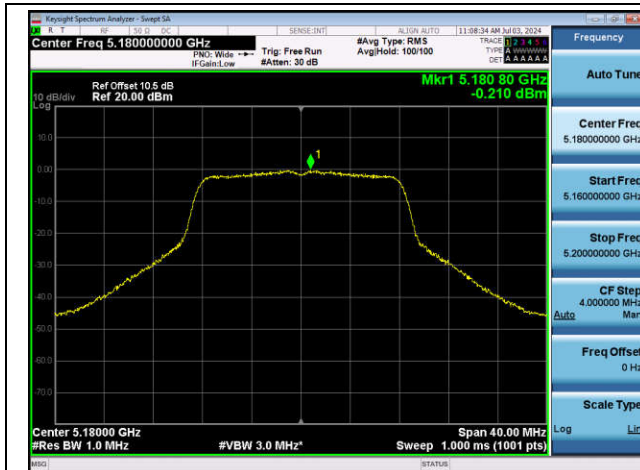

11A-Ant1-5180-PASS

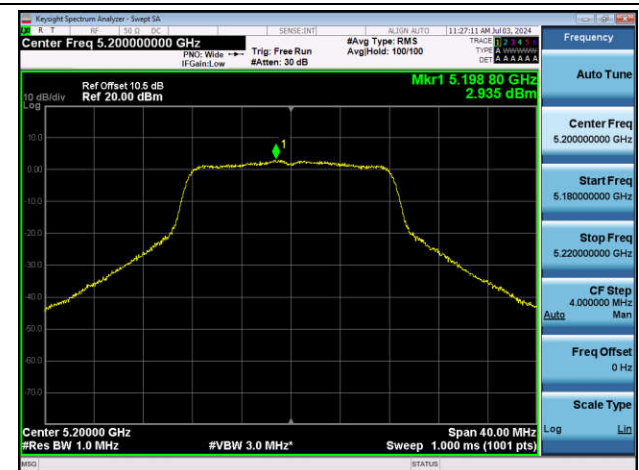


11A-Ant1-5200-PASS




11A-Ant1-5240-PASS



11N20SISO-Ant1-5180-PASS

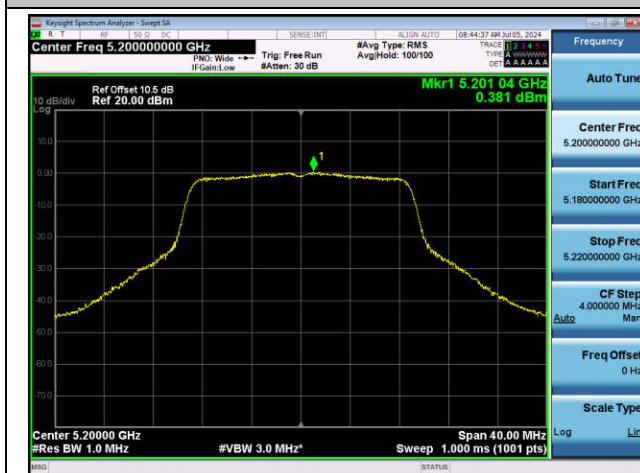

11N20SISO-Ant1-5200-PASS

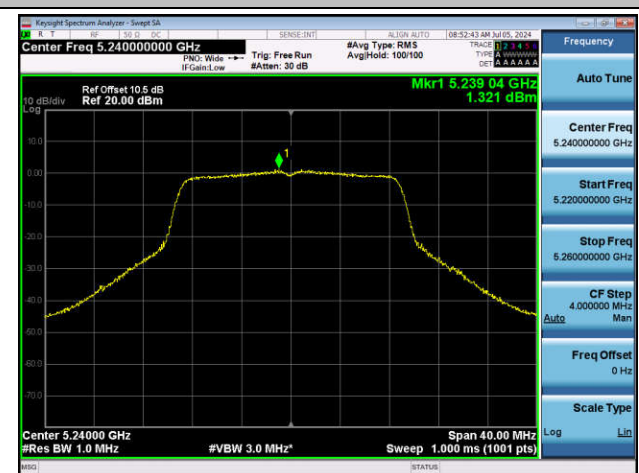


11N20SISO-Ant1-5240-PASS




11N40SISO-Ant1-5190-PASS




11N40SISO-Ant1-5230-PASS

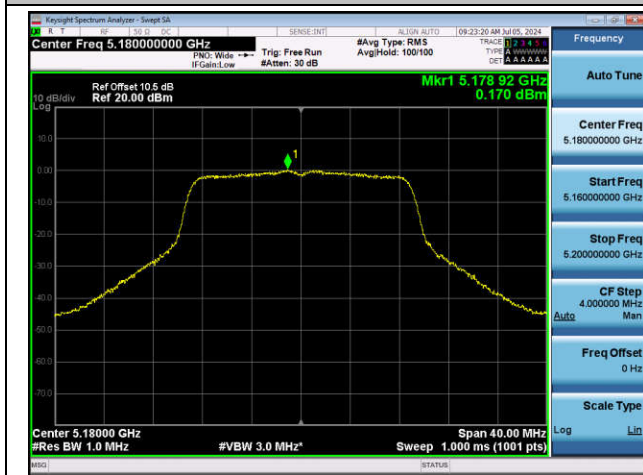


11AC20SISO-Ant1-5180-PASS

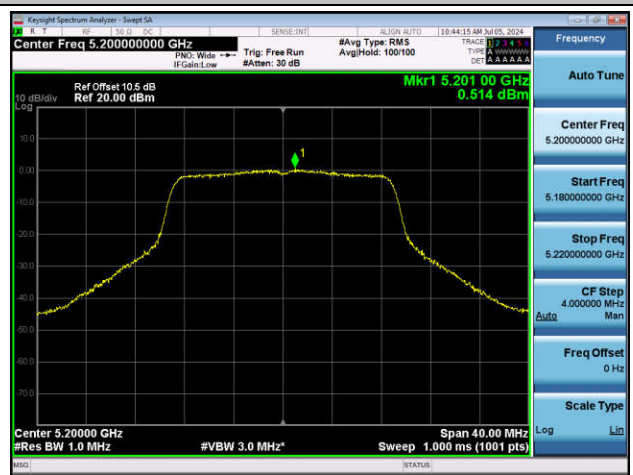


11AC20SISO-Ant1-5200-PASS

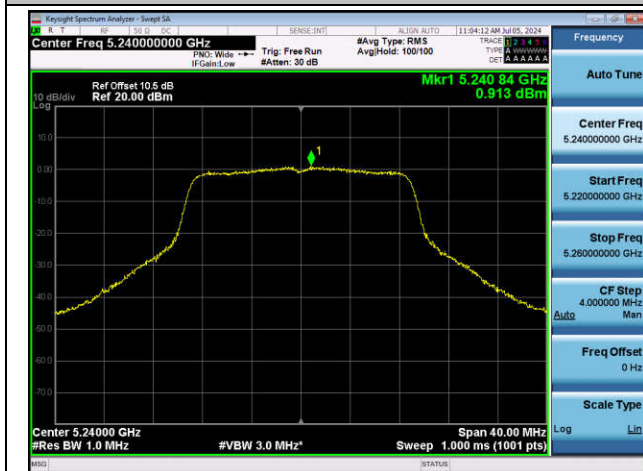

11AC20SISO-Ant1-5240-PASS

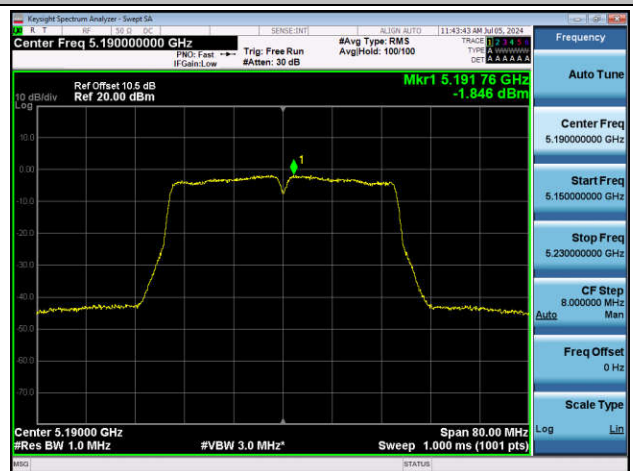

11AC40SISO-Ant1-5190-PASS

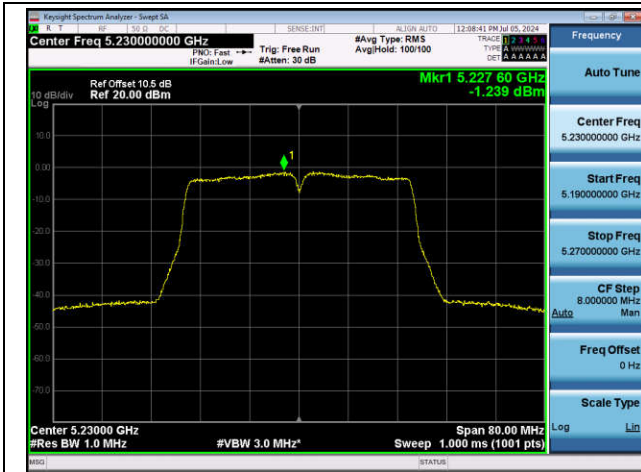


11AC40SISO-Ant1-5230-PASS



11AC80SISO-Ant1-5210-PASS

U-NII-3:

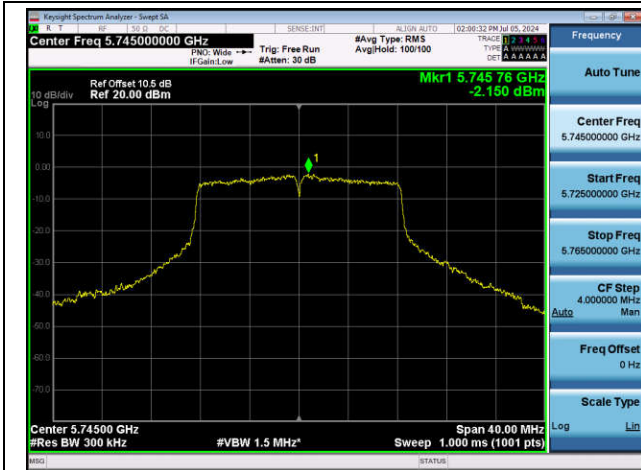


11A-Ant1-5745-PASS



11A-Ant1-5785-PASS




11A-Ant1-5825-PASS

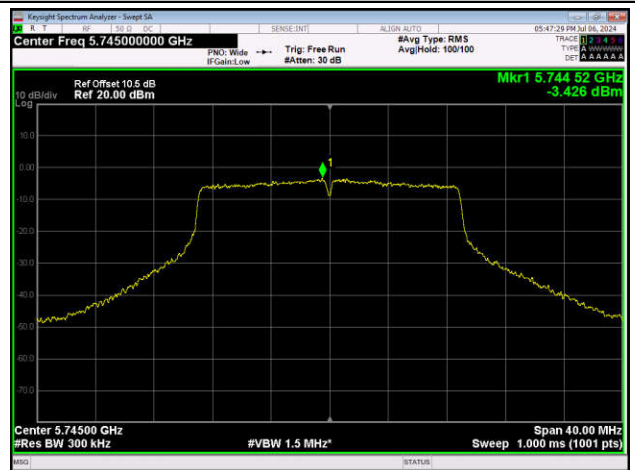

11N20SISO-Ant1-5745-PASS




11N20SISO-Ant1-5785-PASS

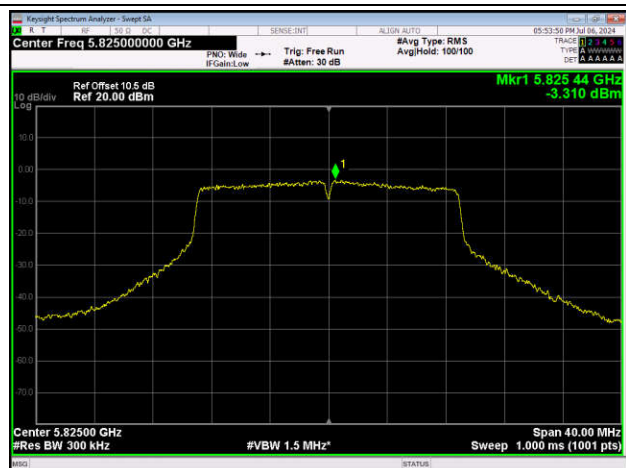

11N20SISO-Ant1-5825-PASS




11N40SISO-Ant1-5755-PASS

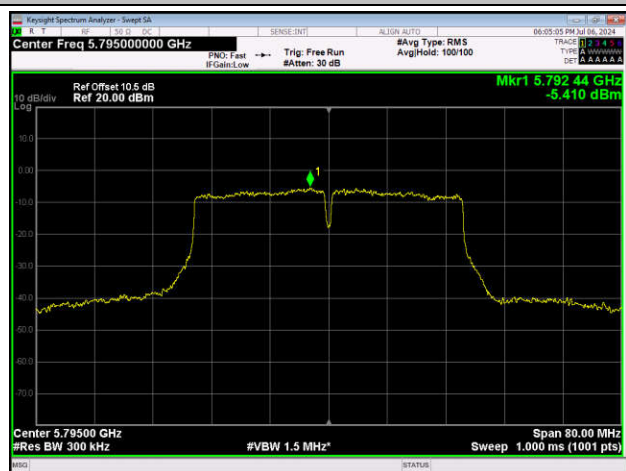


11N40SISO-Ant1-5795-PASS




11AC20SISO-Ant1-5745-PASS

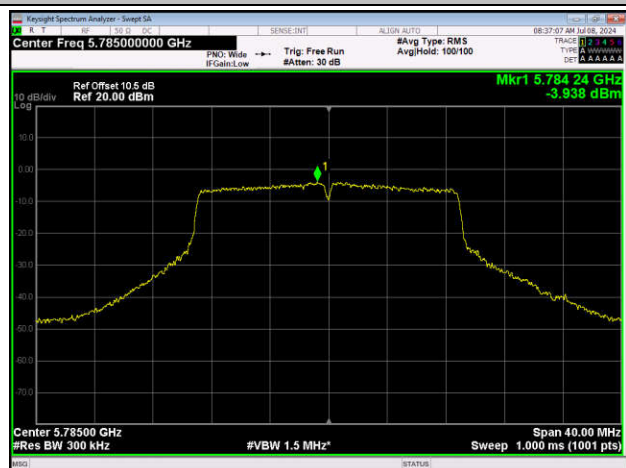


11AC20SISO-Ant1-5785-PASS

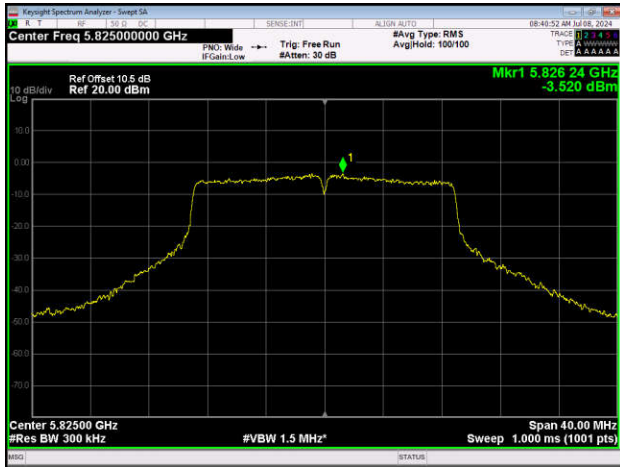


11AC20SISO-Ant1-5825-PASS

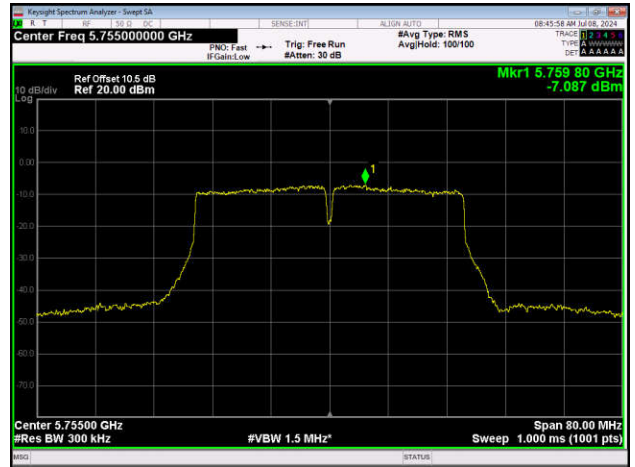

11AC40SISO-Ant1-5755-PASS

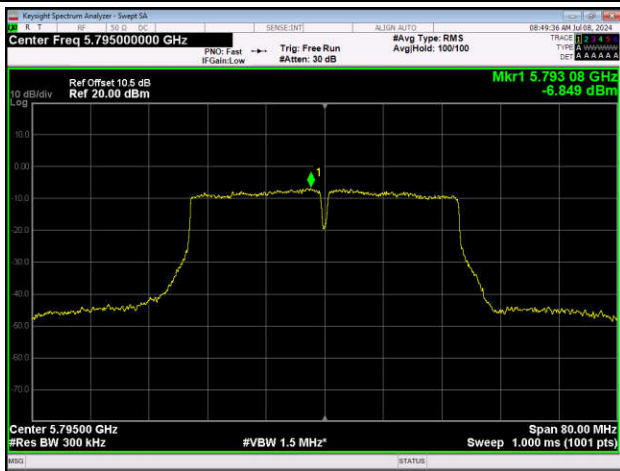

11AC40SISO-Ant1-5795-PASS

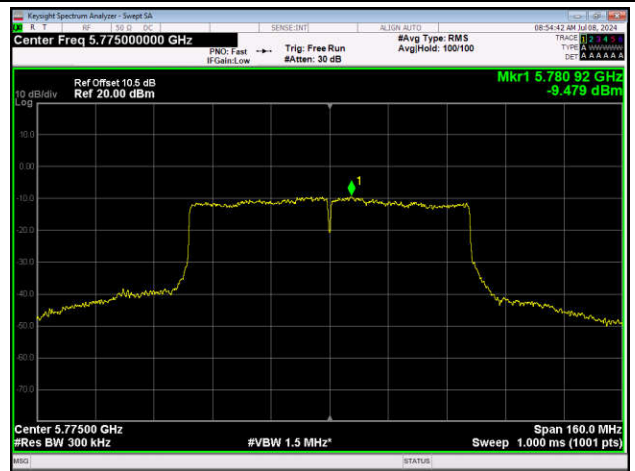

11AC80SISO-Ant1-5775-PASS




99% Occupied Bandwidth and 26dB Emission Bandwidth Test Result and Data


U-NII-1 99% OBW & 26dB EBW					
Test Mode	Antenna	Frequency[MHz]	99% OBW [MHz]	26dB EBW [MHz]	Verdict
11A	Ant1	5180	16.665	22.79	PASS
11A	Ant1	5200	16.647	23.02	PASS
11A	Ant1	5240	16.682	23.05	PASS
11N20SISO	Ant1	5180	17.850	23.47	PASS
11N20SISO	Ant1	5200	17.860	23.04	PASS
11N20SISO	Ant1	5240	17.874	23.27	PASS
11N40SISO	Ant1	5190	36.305	41.16	PASS
11N40SISO	Ant1	5230	36.302	41.22	PASS
11AC20SISO	Ant1	5180	17.860	23.42	PASS
11AC20SISO	Ant1	5200	17.869	23.08	PASS
11AC20SISO	Ant1	5240	17.856	23.13	PASS
11AC40SISO	Ant1	5190	36.292	41.48	PASS
11AC40SISO	Ant1	5230	36.304	41.09	PASS
11AC80SISO	Ant1	5210	75.815	84.17	PASS




U-NII-3 99% OBW & 26dB EBW					
Test Mode	Antenna	Frequency[MHz]	99% OBW [MHz]	26dB EBW [MHz]	Verdict
11A	Ant1	5745	17.085	24.49	PASS
11A	Ant1	5785	16.931	23.86	PASS
11A	Ant1	5825	16.837	22.21	PASS
11N20SISO	Ant1	5745	18.029	23.24	PASS
11N20SISO	Ant1	5785	18.008	24.28	PASS
11N20SISO	Ant1	5825	18.002	23.26	PASS
11N40SISO	Ant1	5755	36.493	41.38	PASS
11N40SISO	Ant1	5795	36.381	41.73	PASS
11AC20SISO	Ant1	5745	18.018	24.02	PASS
11AC20SISO	Ant1	5785	18.052	23.93	PASS
11AC20SISO	Ant1	5825	17.949	23.46	PASS
11AC40SISO	Ant1	5755	36.363	41.36	PASS
11AC40SISO	Ant1	5795	36.391	41.34	PASS
11AC80SISO	Ant1	5775	75.867	83.14	PASS

U-NII-1:

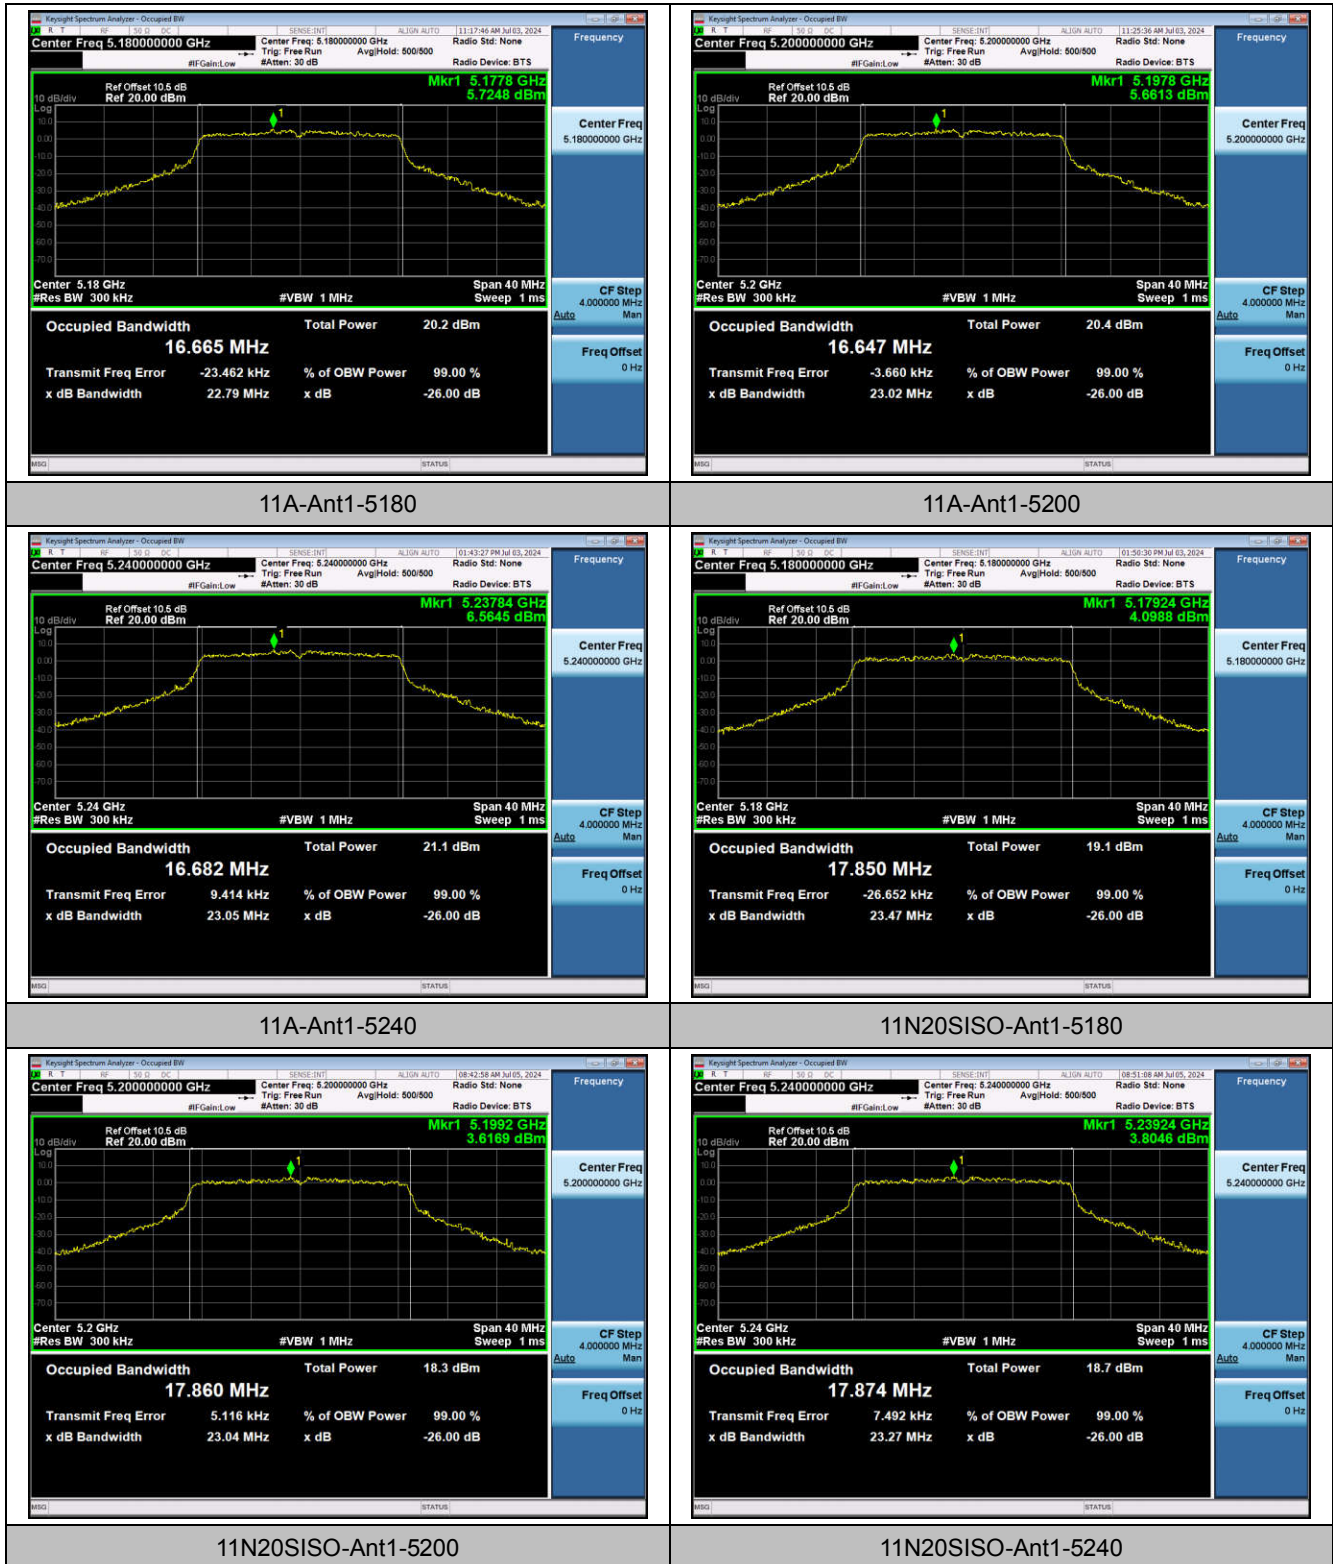


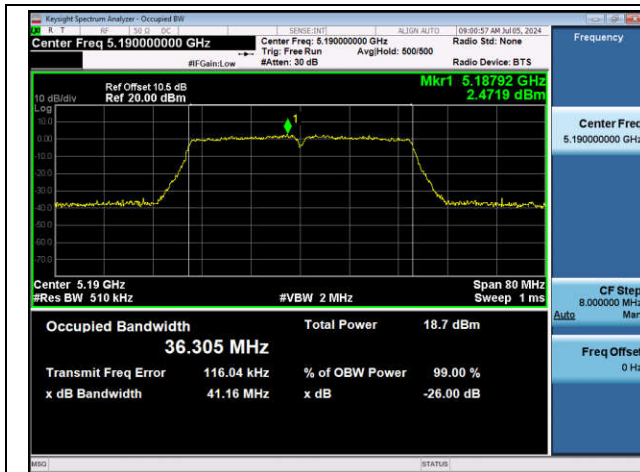

11N40SISO-Ant1-5190

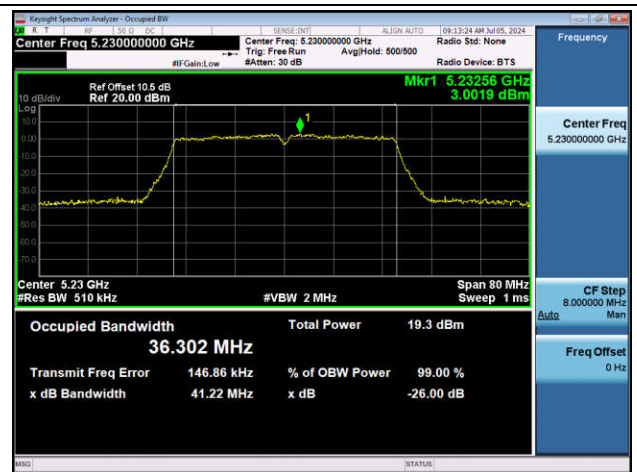


11N40SISO-Ant1-5230

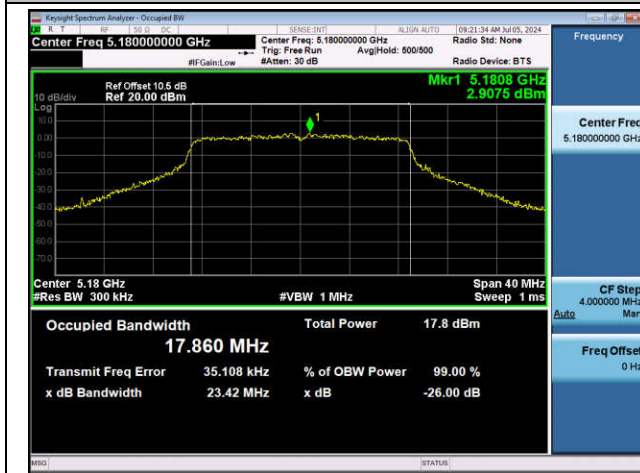


11AC20SISO-Ant1-5180




11AC20SISO-Ant1-5200

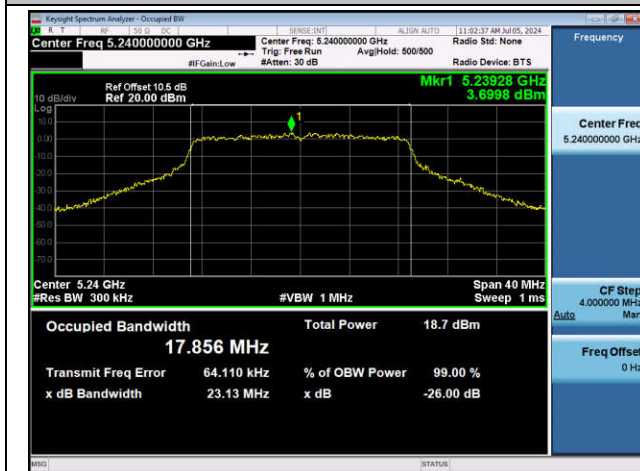


11AC20SISO-Ant1-5240

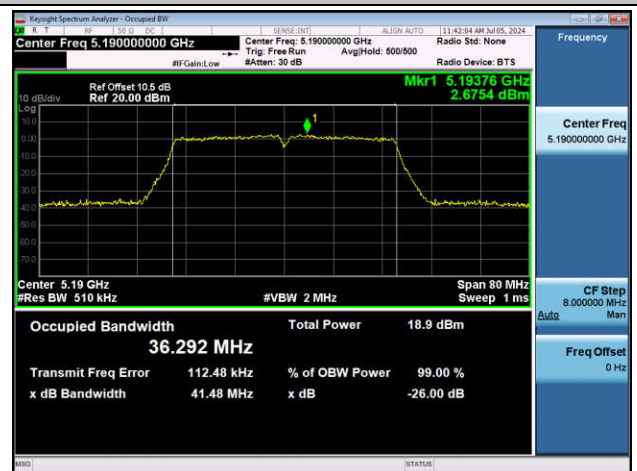

11AC40SISO-Ant1-5190

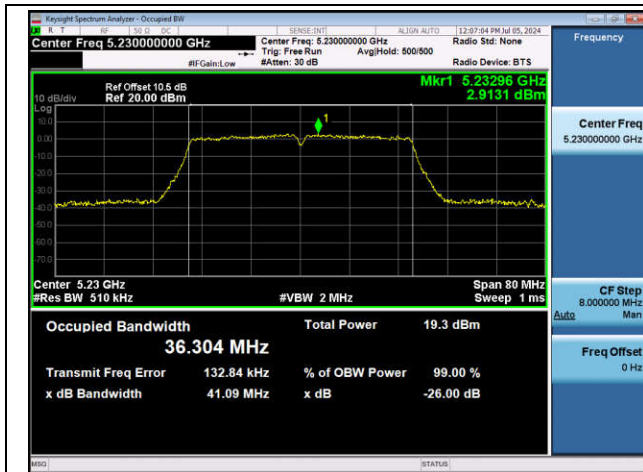


11AC40SISO-Ant1-5230

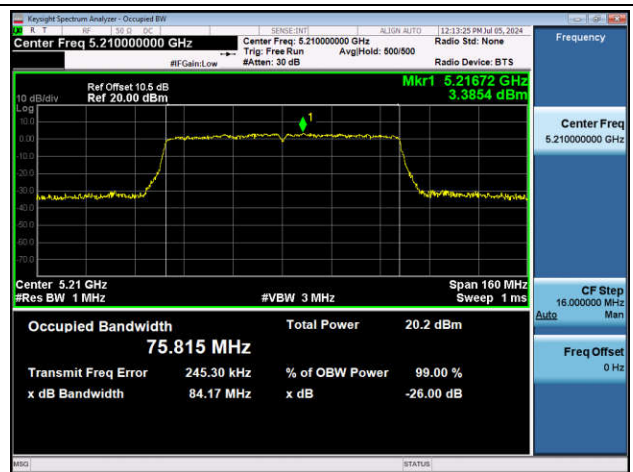

11AC80SISO-Ant1-5210


U-NII-3:

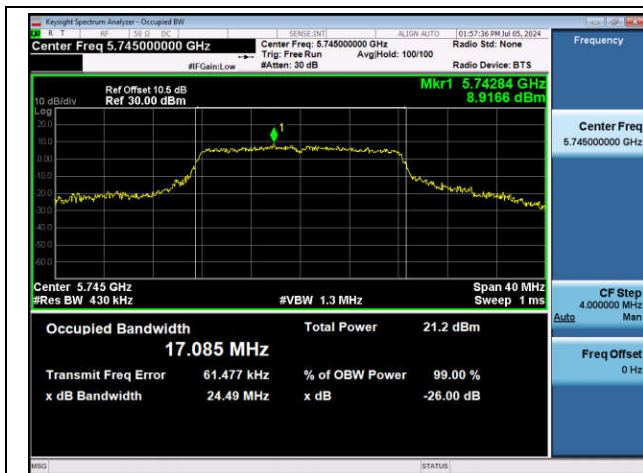


11A-Ant1-5745




11A-Ant1-5785

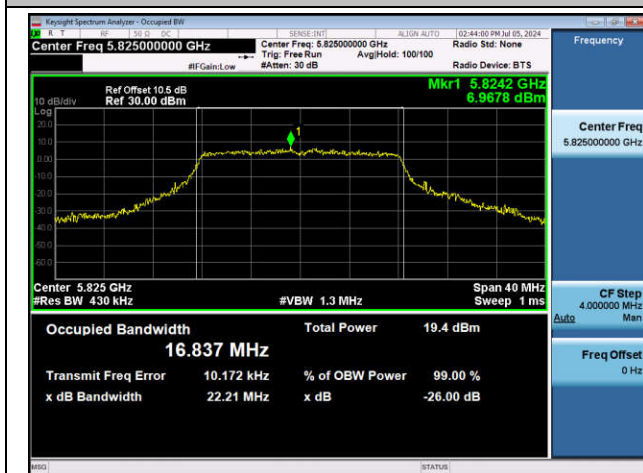


11A-Ant1-5825

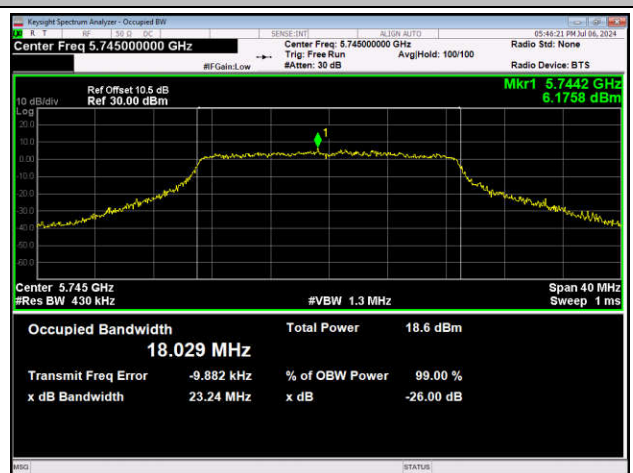


11N20SISO-Ant1-5745

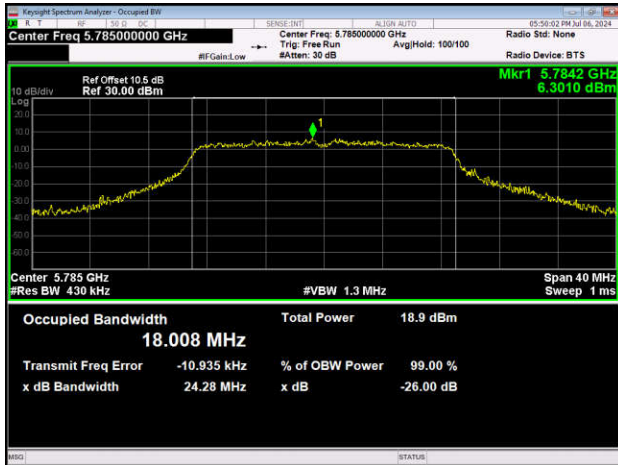


11N20SISO-Ant1-5785

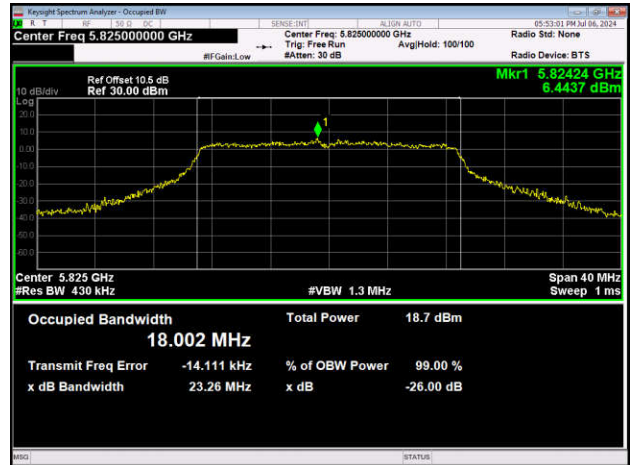


11N20SISO-Ant1-5825

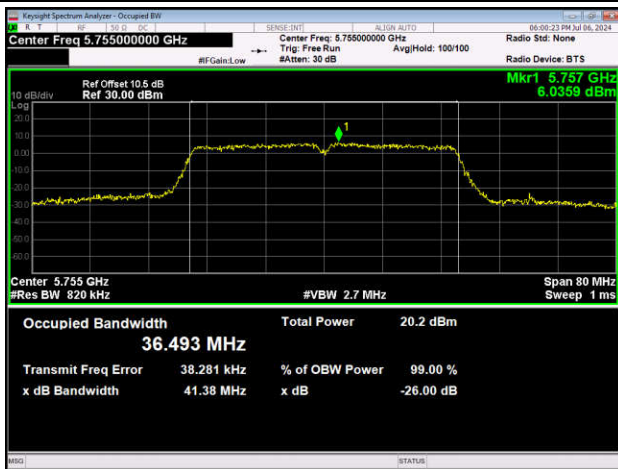


11N40SISO-Ant1-5755

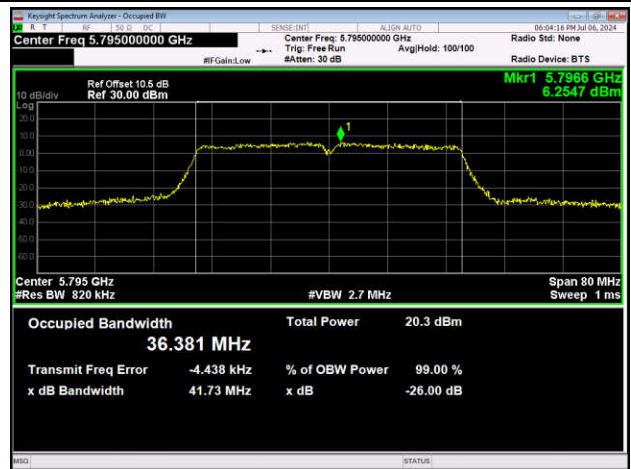

11N40SISO-Ant1-5795

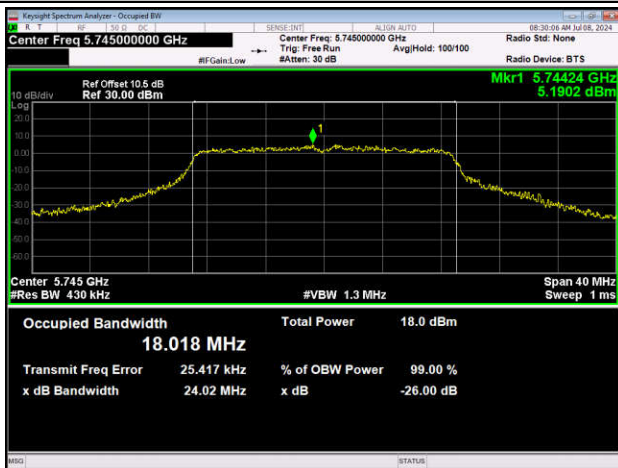

11AC20SISO-Ant1-5745

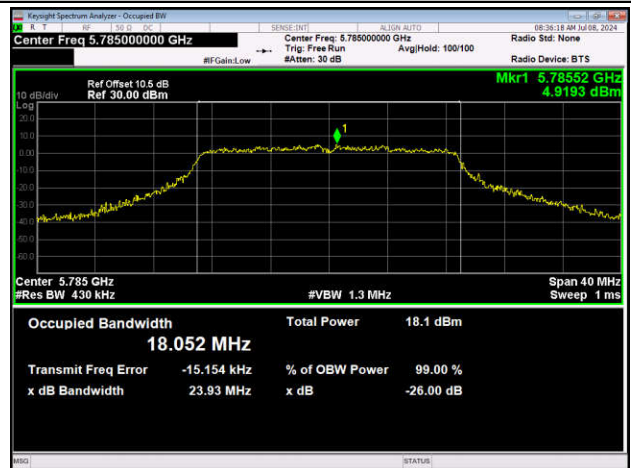

11AC20SISO-Ant1-5785