



FCC TEST REPORT

FCC ID: 2AIEE-DA150

Product Name	:	Wireless Portable Speaker
Model Name	:	DA150
Brand Name	:	N/A
Report No.	:	PTCHX07170921001E-FC01
Prepared for		
Shenzhen Tomtop Technology Co., Ltd		
G Zone 5/f, NO 1 Exchange Square, Huanan City, Pinghu Town, Longgang District Shenzhen, Guangdong Province China		
Prepared by		
Dongguan Precise Testing & Certification Corp., Ltd.		
Building D, Baoding Technology Park, Guangming Road 2, Guangming Community, Dongcheng District, Dongguan, Guangdong, China		



1TEST RESULT CERTIFICATION

Applicant's name : Shenzhen Tomtop Technology Co., Ltd
 Address : G Zone 5/f, NO 1 Exchange Square, Huanan City, Pinghu Town, Longgang District Shenzhen, Guangdong Province China
 Manufacture's name : SHENZHEN NARUI ELECTRONIC CO., LTD.
 Address : No.6 Building, Ma'an shan Industrial Zone, Hao'San Area, Shajing Sub-District, Bao'an District, Shenzhen city, China
 Product name : Wireless Portable Speaker
 Model name : DA150
 Brand Name : N/A
 Standards : FCC CFR47 Part 15 Section 15.247
 Test procedure : ANSI C63.10:2013
 Test Date : July 09, 2017 to July 11, 2017
 Date of Issue : July 12, 2017
 Test Result : Pass

This device described above has been tested by PTC, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.
 This report shall not be reproduced except in full, without the written approval of PTC, this document may be altered or revised by PTC, personal only, and shall be noted in the revision of the document.

Testing Engineer

August Qiu

Technical Manager

Hack Ye

Authorized Signatory

Chris Du



Contents

Page

1 TEST RESULT CERTIFICATION.....2

2 TEST SUMMARY5

3 TEST FACILITY.....6

4 GENERAL INFORMATION7

 4.1 GENERAL DESCRIPTION OF E.U.T.....7

 4.2 TEST MODE8

5 EQUIPMENT DURING TEST10

 5.1 EQUIPMENTS LIST10

 5.2 MEASUREMENT UNCERTAINTY11

 5.3 DESCRIPTION OF SUPPORT UNITS.....12

6 CONDUCTED EMISSION.....13

 6.1 E.U.T. OPERATION13

 6.2 EUT SETUP13

 6.3 TEST SET-UP (BLOCK DIAGRAM OF CONFIGURATION)14

 6.4 MEASUREMENT PROCEDURE:.....14

 6.5 CONDUCTED EMISSION LIMIT.....14

 6.6 MEASUREMENT DESCRIPTION14

 6.7 CONDUCTED EMISSION TEST RESULT.....14

7 RADIATED SPURIOUS EMISSIONS19

 7.1 EUT OPERATION.....19

 7.2 TEST SETUP20

 7.3 SPECTRUM ANALYZER SETUP21

 7.4 TEST PROCEDURE.....22

 7.5 SUMMARY OF TEST RESULTS23

8 CONDUCTED SPURIOUS AND BAND EDGE EMISSION33

 8.1 REQUIREMENT.....33

 8.2 TEST PROCEDURE.....33

 8.3 TEST SETUP33



8.4 EUT OPERATION CONDITIONS..... 33

8.5 TEST RESULTS..... 34

9 20 DB BANDWIDTH MEASUREMENT..... 47

9.1 TEST PROCEDURE..... 47

9.2 TEST RESULT 47

10 MAXIMUM PEAK OUTPUT POWER 54

10.1 TEST PROCEDURE..... 54

10.2 TEST RESULT 54

11 HOPPING CHANNEL SEPARATION..... 61

11.1 TEST PROCEDURE..... 61

11.2 TEST RESULT 62

12 NUMBER OF HOPPING FREQUENCY 68

12.1 TEST PROCEDURE..... 68

12.2 TEST RESULT 68

13 DWELL TIME..... 69

13.1 TEST PROCEDURE..... 69

13.2 TEST RESULT 69

14 ANTENNA REQUIREMENT..... 72

15 TEST PHOTOS..... 73

16 EUT PHOTOS..... 75



2 Test Summary

Test Items	Test Requirement	Result
Radiated Spurious Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
Conduct Emission	15.207	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Antenna Requirement	15.203	PASS

Remark:

N/A: Not Applicable



PRECISE TESTING

Report No.: PTCHX07170921001E-FC01

3 TEST FACILITY

Dongguan Precise Testing & Certification Corp., Ltd.

Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong,
China, Dongguan, 523129

China

FCC Registration Number: 371540

IC Registration Number: 12191A-1



PRECISE TESTING

Report No.: PTCHX07170921001E-FC01

4 General Information

4.1 General Description of E.U.T.

Product Name	: Wireless Portable Speaker
Model Name	: DA150
Bluetooth Version	: BT4.1+EDR
Operating frequency	: 2402-2480MHz
Numbers of Channel	: 79 channels
Antenna Type:	: PCB Print Antenna
Antenna Gain:	: 2dBi
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
Power supply	: DC 3.7V, 1200mAh Battery
Hardware Version	: N/A
Software Version	: 4.1



4.2 Test Mode

The EUT has been tested under its typical operating condition. Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting. Only the worst case data were reported.

The EUT has been associated with peripherals pursuant to ANSI C63.10-2013 and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation (9 KHz to the 10th harmonics of the highest fundamental frequency or to 40 GHz, whichever is lower).

The EUT has been tested under TX operating condition.

This EUT is a FHSS system, were conducted to determine the final configuration from all possible combinations. We use software control the EUT, Let EUT hopping on and transmit with highest power, all the modes GFSK, $\pi/4$ -DQPSK, 8DPSK have been tested. 79 Channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.



Channel List:

Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	1	2403	2	2404	3	2405
4	2406	5	2407	6	2408	7	2409
8	2410	9	2411	10	2412	11	2413
12	2414	13	2415	14	2416	15	2417
16	2418	17	2419	18	2420	19	2421
20	2422	21	2423	22	2424	23	2425
24	2426	25	2427	26	2428	27	2429
28	2430	29	2431	30	2432	31	2433
32	2434	33	2435	34	2436	35	2437
36	2438	37	2439	38	2440	39	2441
40	2442	41	2443	42	2444	43	2445
44	2446	45	2447	46	2448	47	2449
48	2450	49	2451	50	2452	51	2453
52	2454	53	2455	54	2456	55	2457
56	2458	57	2459	58	2460	59	2461
60	2462	61	2463	62	2464	63	2465
64	2466	65	2467	66	2468	67	2469
68	2470	69	2471	70	2472	71	2473
72	2474	73	2475	74	2476	75	2477
76	2478	77	2479	78	2480	-	-

Channel	Frequency(MHz)
1	2402
40	2441
79	2480



5 Equipment During Test

5.1 Equipments List

RF Conducted Test

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
MXG Signal Analyzer	Agilent	N9020A	MY56070279	Apr 7, 18
MIMO4TX-1	/	MIMO4TX	TW5451101	Apr 7, 18
MXG Vector Signal Generator	Agilent	N5182A	MY50143410	Apr 7, 18
MXG Analog Signal Generator	KEYSIGHT	N5181B	MY53050432	Apr 7, 18

Remark: The temporary antenna connector is soldered on the PCB board in order to perform conducted tests and this temporary antenna connector is listed in the equipment list.

Radiated Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Sep. 03, 2018
Bilog Antenna	SCHWARZBECK	VULB9160	9160-3355	Aug 31, 2018
Preamplifier (low frequency)	SCHWARZBECK	BBV 9475	9745-0013	Sep. 03, 2018
Spectrum Analyzer	Agilent	E4407B	MY45109572	Oct. 13, 2017
Horn Antenna	SCHWARZBECK	9120D	9120D-1246	Aug. 31, 2018
LOW NOISE AMPLIFIER	ZHINAN	ZN3380C	15002	Sep 03, 2018

Conducted Emissions

Name of Equipment	Manufacturer	Model	Serial No.	Calibration Due
EMI Test Receiver	Rohde&Schwarz	ESCI	101417	Sep. 03, 2018
Artificial Mains Network	Rohde&Schwarz	L2-16B	000WX31025	Sep. 03, 2018
Artificial Mains Network	Rohde&Schwarz	ENV216	101342	Sep. 03, 2018



5.2 Measurement Uncertainty

Parameter	Uncertainty
RF output power, conducted	±1.0dB
Power Spectral Density, conducted	±2.2dB
Radio Frequency	± 1 x 10 ⁻⁶
Bandwidth	± 1.5 x 10 ⁻⁶
Time	±2%
Duty Cycle	±2%
Temperature	±1°C
Humidity	±5%
DC and low frequency voltages	±3%
Conducted Emissions (150kHz~30MHz)	±3.64dB
Radiated Emission(30MHz~1GHz)	±5.03dB
Radiated Emission(1GHz~25GHz)	±4.74dB
Remark: The coverage Factor (k=2), and measurement Uncertainty for a level of Confidence of 95%	



5.3 Description of Support Units

Equipment	Model No.	Series No.
Adapter	NSA12UH-050200 Input: AC 100-240V, 50/60Hz, 0.5A Output: DC 5V, 2A	N/A



6 Conducted Emission

Test Requirement: : FCC CFR 47 Part 15 Section 15.207
Test Method: : ANSI C63.10:2013
Test Result: : PASS
Frequency Range: : 150kHz to 30MHz
Class/Severity: : Class B
Detector: : Peak for pre-scan (9kHz Resolution Bandwidth)


6.1 E.U.T. Operation

Operating Environment :

Temperature: : 25.5 °C
Humidity: : 51 % RH
Atmospheric Pressure: : 101.2kPa
EUT Operation : : Refer to section 3.3


6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10: 2013

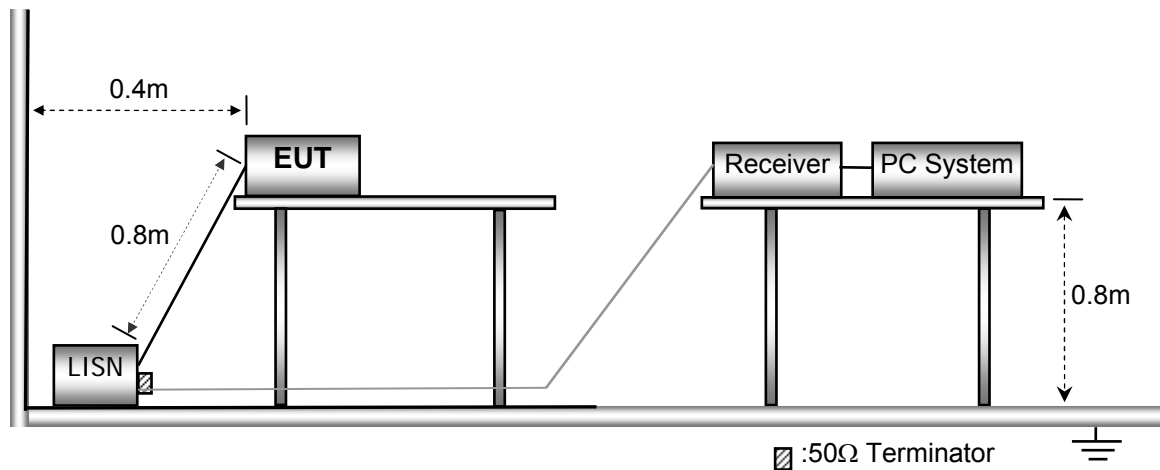



6.3 Test SET-UP (Block Diagram of Configuration)

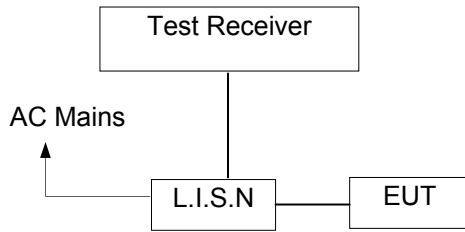

6.4 Measurement Procedure:

1. The EUT was placed on a table, which is 0.8m above ground plane.
2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
3. Repeat above procedures until all frequency measured was complete.

6.5 Conducted Emission Limit

Conducted Emission

Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50

Note:

1. The lower limit shall apply at the transition frequencies
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

6.6 Measurement Description


The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.7 Conducted Emission Test Result

Pass
Please find the following pages.



Line -120V/60Hz:

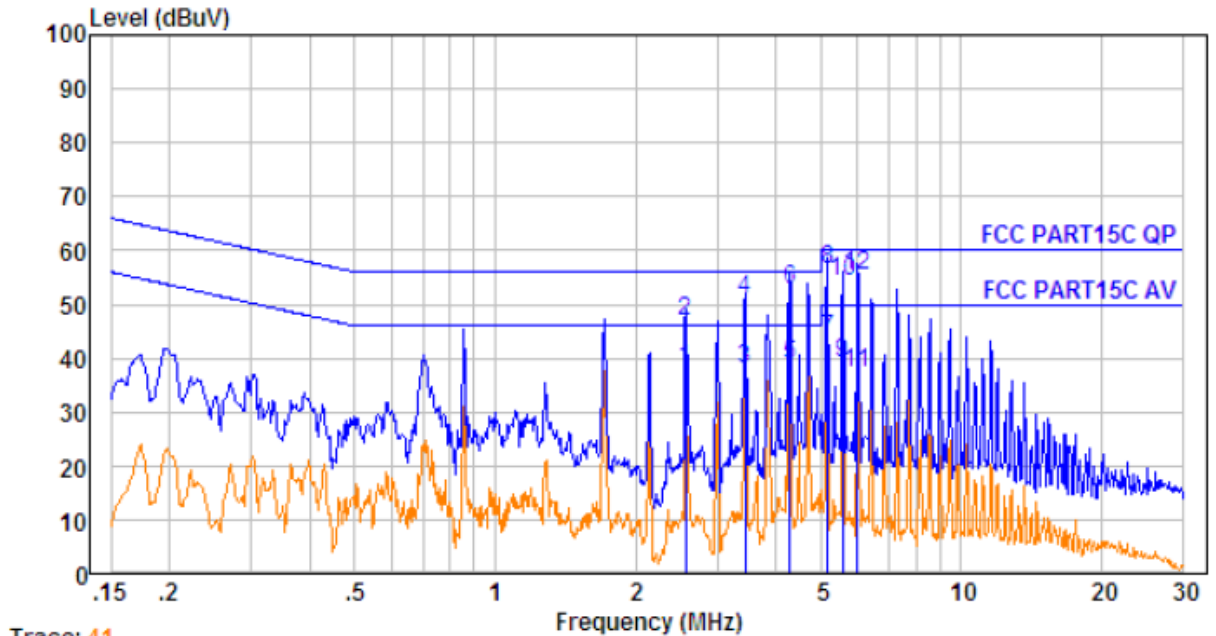


Trace: 41

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	2.567	0.47	0.15	37.42	38.04	46.00	-7.96	Average
2.	2.567	0.47	0.15	46.42	47.04	56.00	-8.96	QP
3.	3.436	0.47	0.15	37.27	37.89	46.00	-8.11	Average
4.	3.436	0.47	0.15	50.27	50.89	56.00	-5.11	QP
5.	4.292	0.48	0.15	38.13	38.76	46.00	-7.24	Average
6.	4.292	0.48	0.15	52.13	52.76	56.00	-3.24	QP
7.	5.166	0.51	0.15	42.88	43.54	50.00	-6.46	Average
8.	5.166	0.51	0.15	55.88	56.54	60.00	-3.46	QP
9.	5.564	0.52	0.15	38.47	39.14	50.00	-10.86	Average
10.	5.564	0.52	0.15	53.47	54.14	60.00	-5.86	QP
11.	5.993	0.53	0.15	36.71	37.39	50.00	-12.61	Average
12.	5.993	0.53	0.15	54.71	55.39	60.00	-4.61	QP



Neutral -120V/60Hz:

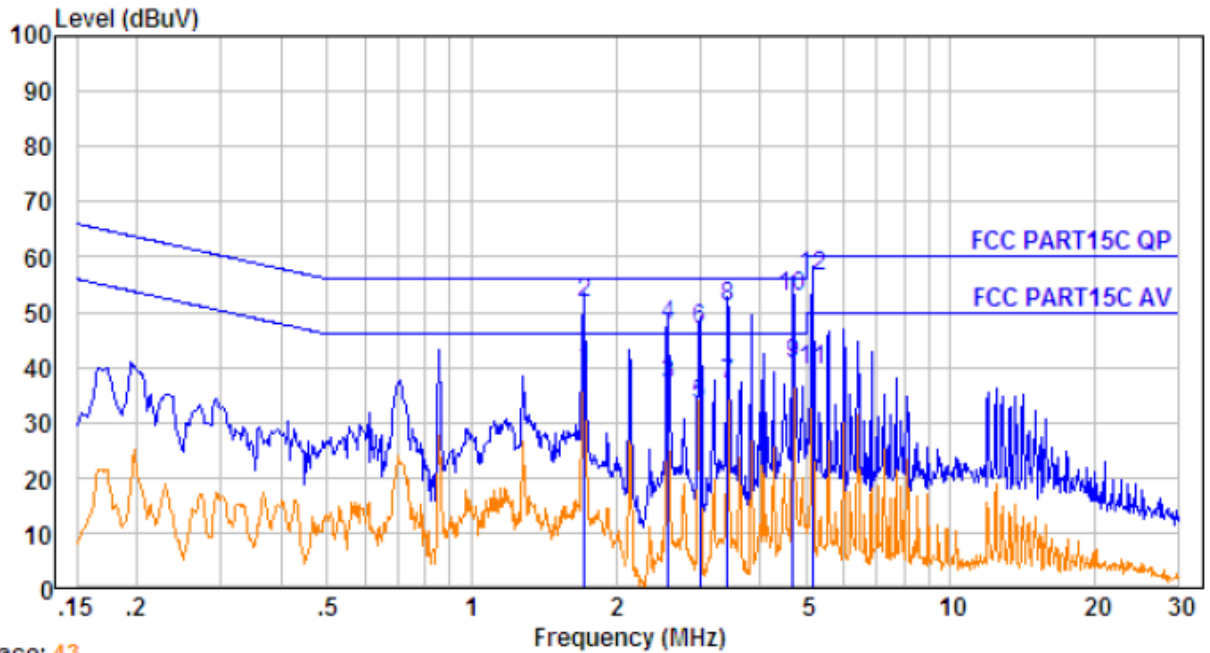


Trace: 43

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	1.725	0.47	0.36	38.83	39.66	46.00	-6.34	Average
2.	1.725	0.47	0.36	50.83	51.66	56.00	-4.34	QP
3.	2.581	0.47	0.34	35.97	36.78	46.00	-9.22	Average
4.	2.581	0.47	0.34	46.97	47.78	56.00	-8.22	QP
5.	2.993	0.47	0.33	32.23	33.03	46.00	-12.97	Average
6.	2.993	0.47	0.33	46.23	47.03	56.00	-8.97	QP
7.	3.417	0.47	0.32	36.05	36.84	46.00	-9.16	Average
8.	3.417	0.47	0.32	50.05	50.84	56.00	-5.16	QP
9.	4.696	0.49	0.31	39.82	40.62	46.00	-5.38	Average
10.	4.696	0.49	0.31	51.82	52.62	56.00	-3.38	QP
11.	5.166	0.51	0.31	38.51	39.33	50.00	-10.67	Average
12.	5.166	0.51	0.31	55.51	56.33	60.00	-3.67	QP




Line -240V/60Hz:

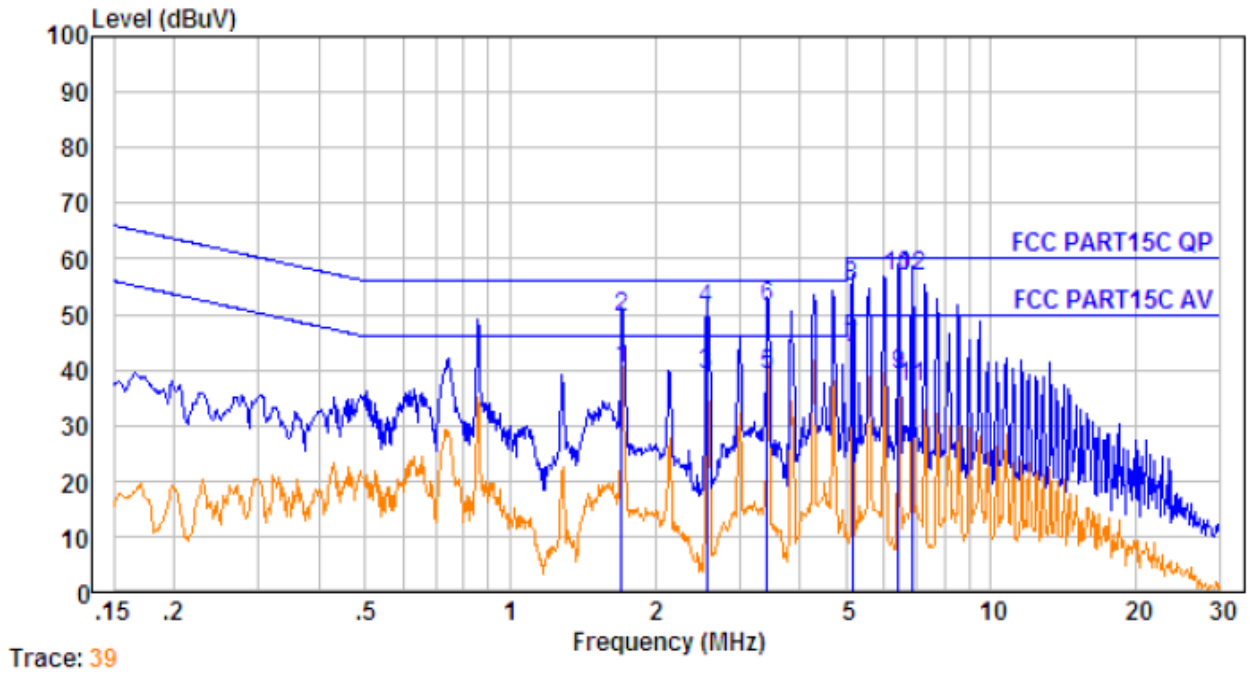

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	1.707	0.47	0.15	39.69	40.31	46.00	-5.69	Average
2.	1.707	0.47	0.15	48.69	49.31	56.00	-6.69	QP
3.	2.567	0.47	0.15	38.39	39.01	46.00	-6.99	Average
4.	2.567	0.47	0.15	50.39	51.01	56.00	-4.99	QP
5.	3.417	0.47	0.15	38.64	39.26	46.00	-6.74	Average
6.	3.417	0.47	0.15	50.64	51.26	56.00	-4.74	QP
7.	5.139	0.51	0.15	43.38	44.04	50.00	-5.96	Average
8.	5.139	0.51	0.15	54.38	55.04	60.00	-4.96	QP
9.	6.420	0.54	0.15	38.26	38.95	50.00	-11.05	Average
10.	6.420	0.54	0.15	56.26	56.95	60.00	-3.05	QP
11.	6.878	0.55	0.15	36.03	36.73	50.00	-13.27	Average
12.	6.878	0.55	0.15	56.03	56.73	60.00	-3.27	QP



Neutral -240V/60Hz:

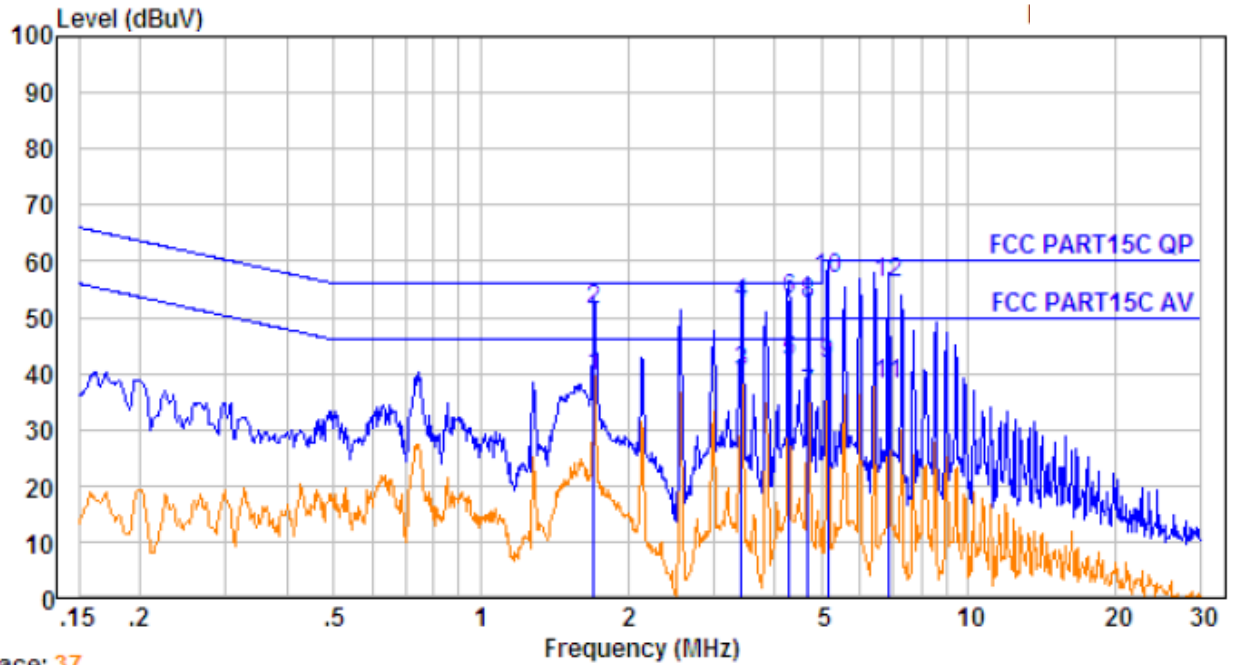

Trace: 37

No.	Freq MHz	Cable Loss dB	AMN Factor dB	Receiver Reading dBuV	Emission Level dBuV	Limit dBuV	Over Limit dB	Remark
1.	1.707	0.47	0.36	38.50	39.33	46.00	-6.67	Average
2.	1.707	0.47	0.36	50.50	51.33	56.00	-4.67	QP
3.	3.417	0.47	0.32	39.49	40.28	46.00	-5.72	Average
4.	3.417	0.47	0.32	51.49	52.28	56.00	-3.72	QP
5.	4.292	0.48	0.31	41.30	42.09	46.00	-3.91	Average
6.	4.292	0.48	0.31	52.20	52.99	56.00	-3.01	QP
7.	4.696	0.49	0.31	35.43	36.23	46.00	-9.77	Average
8.	4.696	0.49	0.31	51.43	52.23	56.00	-3.77	QP
9.	5.139	0.51	0.31	40.98	41.80	50.00	-8.20	Average
10.	5.139	0.51	0.31	55.98	56.80	60.00	-3.20	QP
11.	6.841	0.55	0.31	37.15	38.01	50.00	-11.99	Average
12.	6.841	0.55	0.31	55.15	56.01	60.00	-3.99	QP



7 Radiated Spurious Emissions

Test Requirement: : FCC CFR47 Part 15 Section 15.209 & 15.247
 Test Method: : ANSI C63.10:2013
 Test Result: : PASS
 Measurement Distance: : 3m
 Limit: : See the follow table

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	$2400/F(\text{kHz})$	300	$10000 * 2400/F(\text{kHz})$	$20\log^{(2400/F(\text{kHz}))} + 80$
0.490 ~ 1.705	$24000/F(\text{kHz})$	30	$100 * 24000/F(\text{kHz})$	$20\log^{(24000/F(\text{kHz}))} + 40$
1.705 ~ 30	30	30	$100 * 30$	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$


7.1 EUT Operation

Operating Environment :
 Temperature: : 23.5 °C
 Humidity: : 51.1 % RH
 Atmospheric Pressure: : 101.2kPa
 EUT Operation : : Refer to section 3.3
 Test Voltage : : AC 120V/60Hz


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site


The test setup for emission measurement below 30MHz.

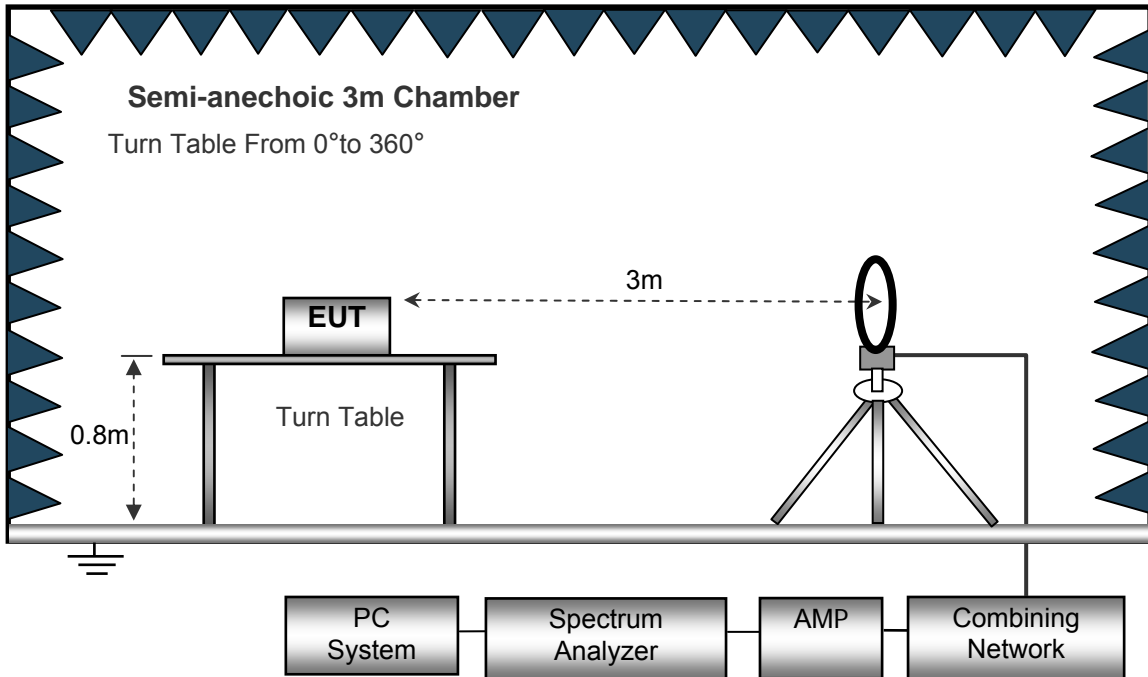

The test setup for emission measurement from 30 MHz to 1 GHz.

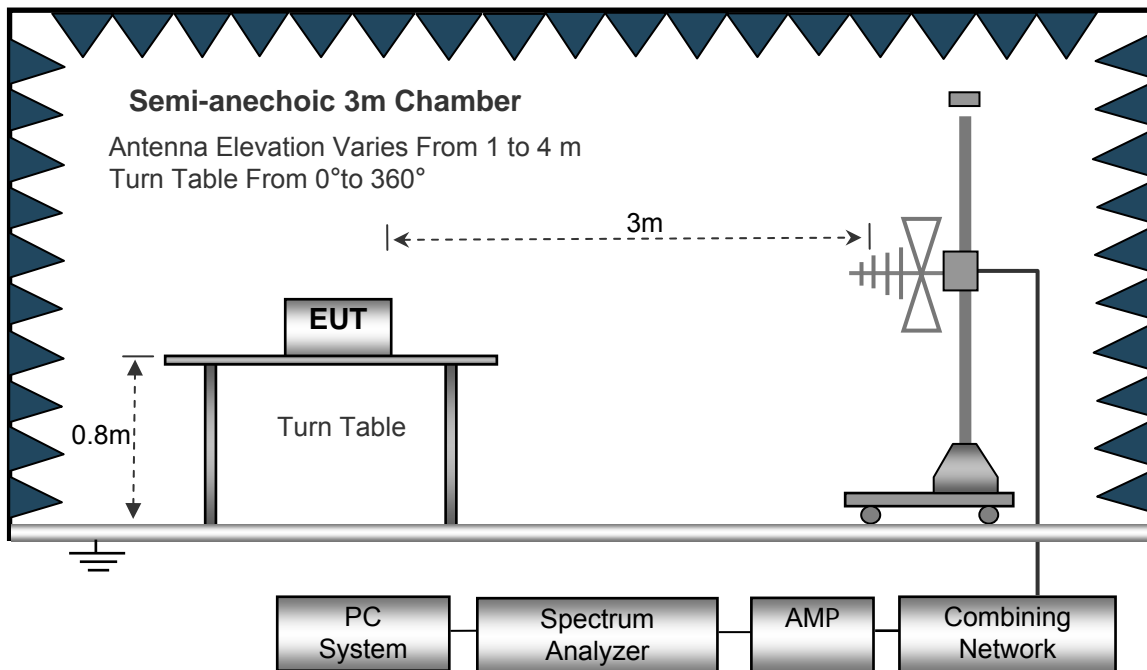

The test setup for emission measurement above 1 GHz.

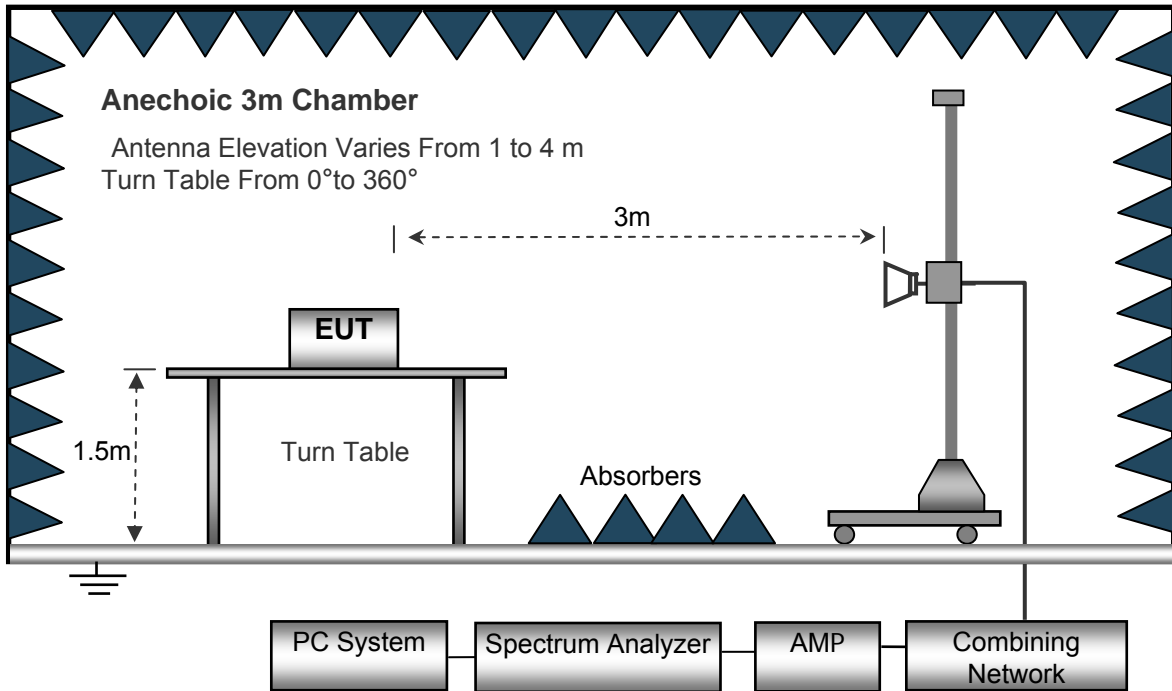

7.3 Spectrum Analyzer Setup

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



7.4 Test Procedure

1. The testing follows the guidelines in Spurious Radiated Emissions of ANSI C63.10-2013.
2. Below 1000MHz, The EUT was placed on a turn table which is 0.8m above ground plane. And above 1000MHz, The EUT was placed on a styrofoam table which is 1.5m above ground plane.
3. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (From 1m to 4m) and turntable (from 0 degree to 360 degree) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Final measurement (Above 1GHz): The frequency range will be divided into different sub ranges depending of the frequency range of the used horn antenna. The EMI Receiver set to peak and average mode and a resolution bandwidth of 1MHz. The measurement will be performed in horizontal and vertical polarization of the measuring antenna and while rotating the EUT in its vertical axis in the range of 0 degree to 360 degree in order to have the antenna inside the cone of radiation.
7. Test Procedure of measurement (For Above 1GHz):
 - 1) Monitor the frequency range at horizontal polarization and move the antenna over all sides of the EUT(if necessary move the EUT to another orthogonal axis).
 - 2) Change the antenna polarization and repeat 1) with vertical polarization.
 - 3) Make a hardcopy of the spectrum.
 - 4) Measure the frequency of the detected emissions with a lower span and resolution bandwidth to increase the accuracy and note the frequency value.
 - 5) Change the analyser mode to Clear/ Write and found the cone of emission.
 - 6) Rotate and move the EUT, so that the measuring distance can be enlarged to 3m and the antenna will be still inside the cone of emission.
 - 7) Measure the level of the detected frequency with the correct resolution bandwidth, with the antenna polarization and azimuth and the peak and average detector, which causes the maximum emission.
 - 8) Repeat steps 1) to 7) for the next antenna spot if the EUT is larger than the antenna beamwidth.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.



PRECISE TESTING

Report No.: PTCHX07170921001E-FC01

7.5 Summary of Test Results

Test Frequency: Below 30MHz


The measurements were more than 20 dB below the limit and not reported.

Test Frequency: 30MHz ~ 1GHz

Remark: only the worst data(GFSK modulation mode) were reported.




Test plot for Horizontal: GFSK(2402MHz)

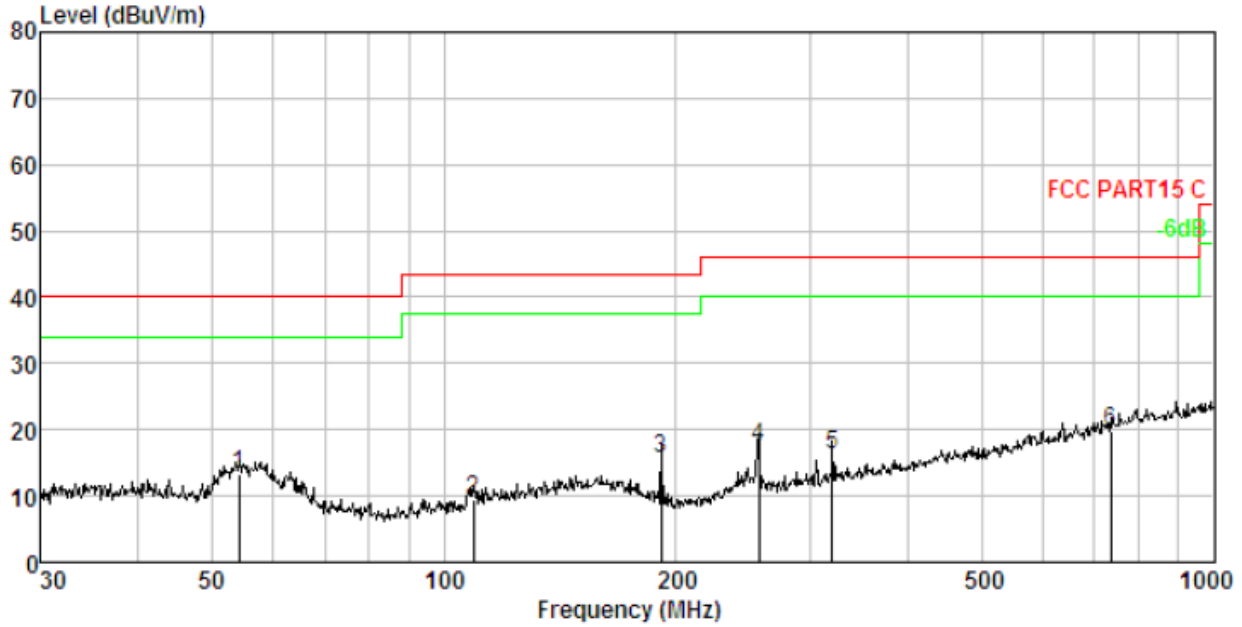

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBUV	Preamp Factor dB	Emission Level dBUV/m	Limit dBUV/m	Over Limit dB	Remark
1.	54.261	1.59	11.95	29.99	30.18	13.35	40.00	-26.65	QP
2.	109.412	2.23	11.02	26.54	30.42	9.37	43.50	-34.13	QP
3.	191.745	2.73	10.97	32.68	30.62	15.76	43.50	-27.74	QP
4.	256.521	3.00	12.06	33.06	30.72	17.40	46.00	-28.60	QP
5.	319.937	3.20	13.65	30.28	30.79	16.34	46.00	-29.66	QP
6.	734.491	3.95	20.89	26.07	31.08	19.83	46.00	-26.17	QP




Test plot for Vertical: GFSK(2402MHz)

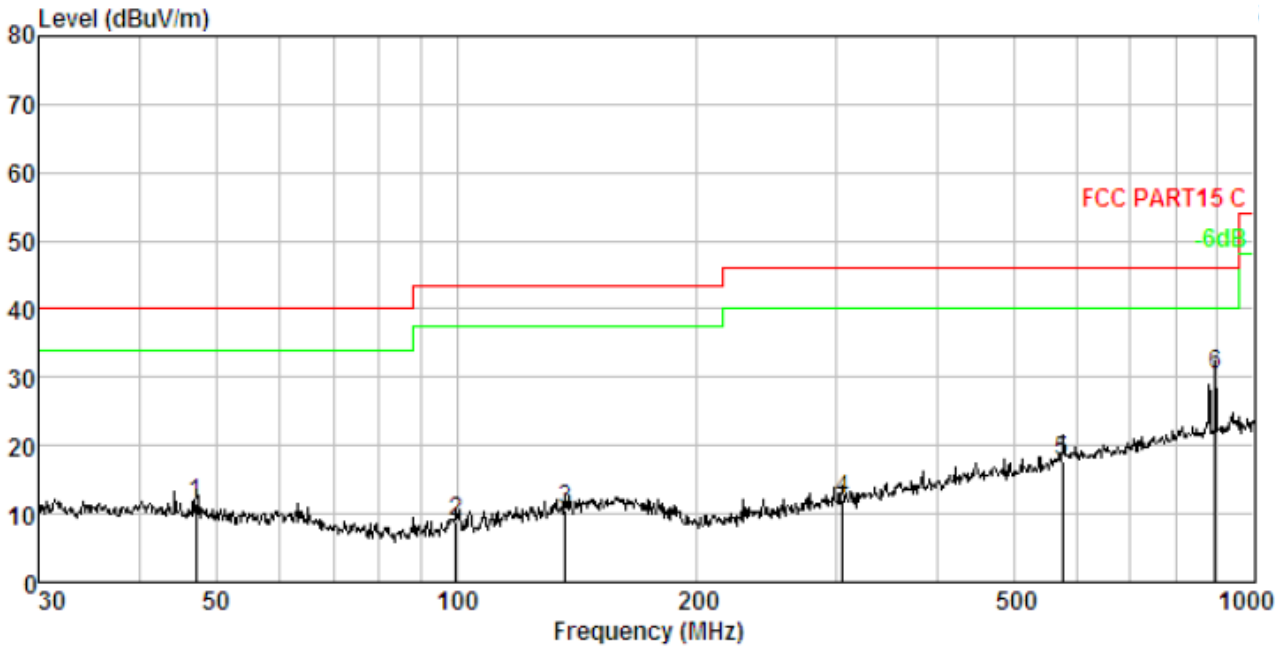

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	47.160	1.46	12.81	27.47	30.13	11.61	40.00	-28.39	QP
2.	99.878	2.14	10.23	26.73	30.39	8.71	43.50	-34.79	QP
3.	136.939	2.43	13.14	25.61	30.50	10.68	43.50	-32.82	QP
4.	304.610	3.15	13.30	26.57	30.78	12.24	46.00	-33.76	QP
5.	574.626	3.73	18.50	26.60	31.00	17.83	46.00	-28.17	QP
6.	893.857	4.13	22.45	35.08	31.15	30.51	46.00	-15.49	QP




Test plot for Horizontal: GFSK(2441MHz)

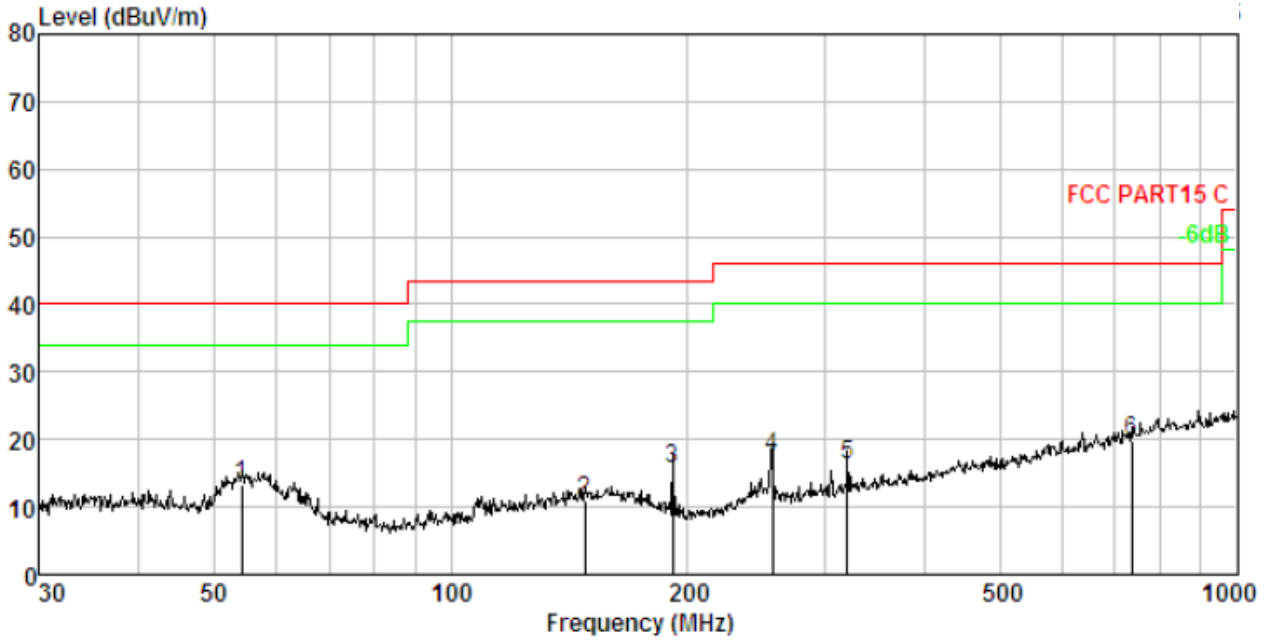

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	54.261	1.59	11.95	29.99	30.18	13.35	40.00	-26.65	QP
2.	147.921	2.50	13.79	25.15	30.53	10.91	43.50	-32.59	QP
3.	191.745	2.73	10.97	32.68	30.62	15.76	43.50	-27.74	QP
4.	256.521	3.00	12.06	33.06	30.72	17.40	46.00	-28.60	QP
5.	319.937	3.20	13.65	30.28	30.79	16.34	46.00	-29.66	QP
6.	734.491	3.95	20.89	26.07	31.08	19.83	46.00	-26.17	QP




Test plot for Vertical: GFSK(2441MHz)

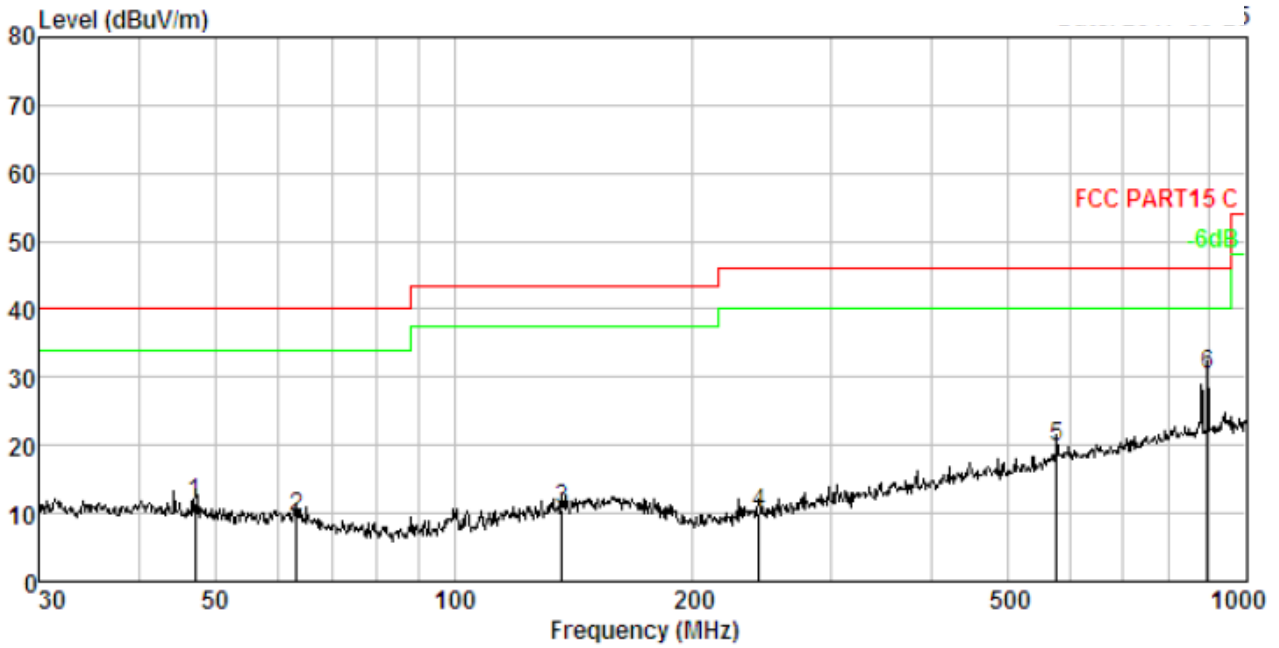

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	47.160	1.46	12.81	27.47	30.13	11.61	40.00	-28.39	QP
2.	63.313	1.73	11.95	26.08	30.23	9.53	40.00	-30.47	QP
3.	136.939	2.43	13.14	25.61	30.50	10.68	43.50	-32.82	QP
4.	242.525	2.95	11.76	26.09	30.70	10.10	46.00	-35.90	QP
5.	576.644	3.73	18.55	28.41	31.00	19.69	46.00	-26.31	QP
6.	893.857	4.13	22.45	35.08	31.15	30.51	46.00	-15.49	QP




Test plot for Horizontal: GFSK(2480MHz)

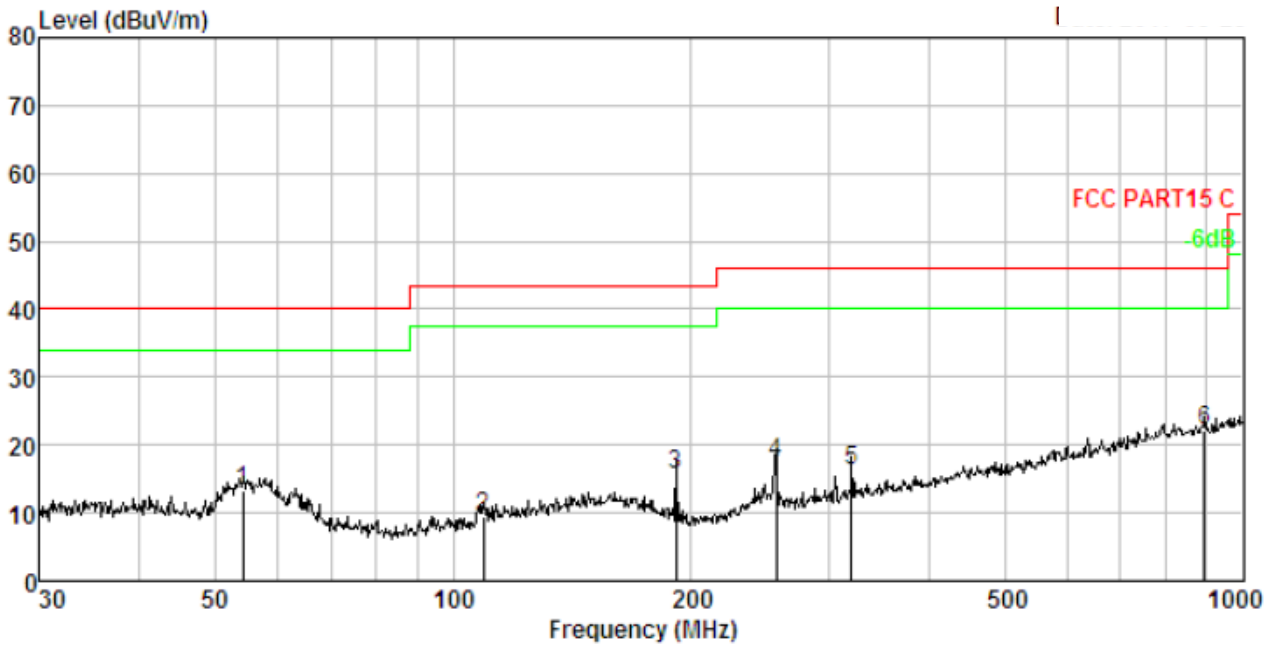

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBuV	Preamp Factor dB	Emission Level dBuV/m	Limit dBuV/m	Over Limit dB	Remark
1.	54.261	1.59	11.95	29.99	30.18	13.35	40.00	-26.65	QP
2.	109.412	2.23	11.02	26.54	30.42	9.37	43.50	-34.13	QP
3.	191.745	2.73	10.97	32.68	30.62	15.76	43.50	-27.74	QP
4.	256.521	3.00	12.06	33.06	30.72	17.40	46.00	-28.60	QP
5.	319.937	3.20	13.65	30.28	30.79	16.34	46.00	-29.66	QP
6.	893.857	4.13	22.45	26.84	31.15	22.27	46.00	-23.73	QP



Test plot for Vertical: GFSK(2480MHz)

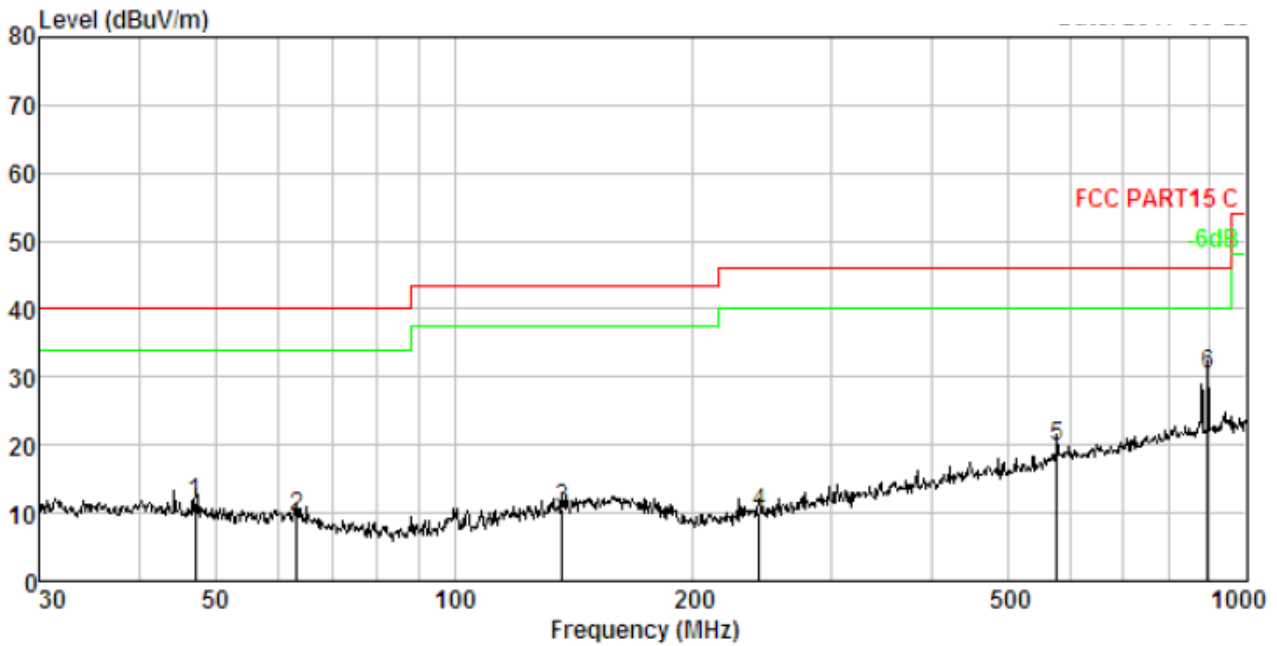

No.	Freq MHz	Cable Loss dB	ANT Factor dB/m	Receiver Reading dBUV	Preamp Factor dB	Emission Level dBUV/m	Limit dBUV/m	Over Limit dB	Remark
1.	47.160	1.46	12.81	27.47	30.13	11.61	40.00	-28.39	QP
2.	63.313	1.73	11.95	26.08	30.23	9.53	40.00	-30.47	QP
3.	136.939	2.43	13.14	25.61	30.50	10.68	43.50	-32.82	QP
4.	242.525	2.95	11.76	26.09	30.70	10.10	46.00	-35.90	QP
5.	576.644	3.73	18.55	28.41	31.00	19.69	46.00	-26.31	QP
6.	893.857	4.13	22.45	35.08	31.15	30.51	46.00	-15.49	QP



Test Frequency: Above 1000MHz~10th Harmonics:

GFSK Low Channel (2402MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4804	30.22	AV	V	28.76	10.22	19.75	49.45	54	-4.55
4804	28.45	AV	H	28.76	10.22	19.75	47.68	54	-6.32
4804	29.74	PK	V	28.76	10.22	19.75	48.97	74	-25.03
4804	31.04	PK	H	28.76	10.22	19.75	50.27	74	-23.73
17799	30.26	AV	V	26.96	11.46	25.41	43.27	54	-10.73
17799	29.46	AV	H	26.96	11.46	25.41	42.47	54	-11.53
17799	28.76	PK	V	26.96	11.46	25.41	41.77	74	-32.23
17799	31.26	PK	H	26.96	11.46	25.41	44.27	74	-29.73

GFSK Low Channel (2441MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882	30.22	AV	V	17.25	10.11	18.62	38.96	54	-15.04
4882	31.42	AV	H	17.25	10.11	18.62	40.16	54	-13.84
4882	29.42	PK	V	17.25	10.11	18.62	38.16	74	-35.84
4882	28.01	PK	H	17.25	10.11	18.62	36.75	74	-37.25
17796	29.33	AV	V	18.42	15.26	26.85	36.16	54	-17.84
17796	31.26	AV	H	18.42	15.26	26.85	38.09	54	-15.91
17796	32.06	PK	V	18.42	15.26	26.85	38.89	74	-35.11
17796	33.25	PK	H	18.42	15.26	26.85	40.08	74	-33.92

GFSK High Channel (2480MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4960	28.44	AV	V	21.43	9.43	15.29	44.01	54	-9.99
4960	29.04	AV	H	21.43	9.43	15.29	44.61	54	-9.39
4960	30.12	PK	V	21.43	9.43	15.29	45.69	74	-28.31
4960	31.66	PK	H	21.43	9.43	15.29	47.23	74	-26.77
17809	27.49	AV	V	28.76	10.22	30.46	36.01	54	-17.99
17809	28.69	AV	H	28.76	10.22	30.46	37.21	54	-16.79
17809	31.26	PK	V	28.76	10.22	30.46	39.78	74	-34.22
17809	30.49	PK	H	28.76	10.22	30.46	39.01	74	-34.99

 π /4-DQPSK Low Channel (2402MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4804	29.44	AV	V	27.42	9.43	18.46	47.83	54	-6.17
4804	27.13	AV	H	27.42	9.43	18.46	45.52	54	-8.48
4804	28.06	PK	V	27.42	9.43	18.46	46.45	74	-27.55
4804	30.44	PK	H	27.42	9.43	18.46	48.83	74	-25.17
17746	31.23	AV	V	25.64	10.22	29.24	37.85	54	-16.15
17746	28.49	AV	H	25.64	10.22	29.24	35.11	54	-18.89
17746	27.06	PK	V	25.64	10.22	29.24	33.68	74	-40.32
17746	31.22	PK	H	25.64	10.22	29.24	37.84	74	-36.16

 π /4-DQPSK Low Channel (2441MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882	29.42	AV	V	16.85	9.43	19.42	36.28	54	-17.72
4882	27.44	AV	H	16.85	9.43	19.42	34.3	54	-19.7
4882	26.96	PK	V	16.85	9.43	19.42	33.82	74	-40.18
4882	27.12	PK	H	16.85	9.43	19.42	33.98	74	-40.02
17648	27.43	AV	V	20.43	10.46	28.76	29.56	54	-24.44
17648	30.22	AV	H	20.43	10.46	28.76	32.35	54	-21.65
17648	31.46	PK	V	20.43	10.46	28.76	33.59	74	-40.41
17648	31.29	PK	H	20.43	10.46	28.76	33.42	74	-40.58

 π /4-DQPSK High Channel (2480MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4960	29.66	AV	V	20.22	10.16	17.42	42.62	54	-11.38
4960	28.41	AV	H	20.22	10.16	17.42	41.37	54	-12.63
4960	27.29	PK	V	20.22	10.16	17.42	40.25	74	-33.75
4960	30.15	PK	H	20.22	10.16	17.42	43.11	74	-30.89
17766	31.26	AV	V	30.69	14.29	30.26	45.98	54	-8.02
17766	29.55	AV	H	30.69	14.29	30.26	44.27	54	-9.73
17766	27.49	PK	V	30.69	14.29	30.26	42.21	74	-31.79
17766	28.49	PK	H	30.69	14.29	30.26	43.21	74	-30.79



8DPSK Low Channel (2402MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4804	28.92	AV	V	22.15	8.76	14.25	45.58	54	-8.42
4804	26.15	AV	H	22.15	8.76	14.25	42.81	54	-11.19
4804	29.33	PK	V	22.15	8.76	14.25	45.99	74	-28.01
4804	31.24	PK	H	22.15	8.76	14.25	47.9	74	-26.1
17642	30.29	AV	V	28.46	9.83	31.26	37.32	54	-16.68
17642	27.42	AV	H	28.46	9.83	31.26	34.45	54	-19.55
17642	26.91	PK	V	28.46	9.83	31.26	33.94	74	-40.06
17642	30.26	PK	H	28.46	9.83	31.26	37.29	74	-36.71

8DPSK Low Channel (2441MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4882	27.33	AV	V	15.72	10.55	20.22	33.38	54	-20.62
4882	26.18	AV	H	15.72	10.55	20.22	32.23	54	-21.77
4882	25	PK	V	15.72	10.55	20.22	31.05	74	-42.95
4882	29.36	PK	H	15.72	10.55	20.22	35.41	74	-38.59
17655	28.42	AV	V	19.33	11.06	32.46	26.35	54	-27.65
17655	31.26	AV	H	19.33	11.06	32.46	29.19	54	-24.81
17655	30.26	PK	V	19.33	11.06	32.46	28.19	74	-45.81
17655	29.42	PK	H	19.33	11.06	32.46	27.35	74	-46.65

8DPSK High Channel (2480MHz)

Frequency (MHz)	S.A Reading (dBuV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
4960	30.22	AV	V	18.73	9.26	16.49	41.72	54	-12.28
4960	29.41	AV	H	18.73	9.26	16.49	40.91	54	-13.09
4960	28.62	PK	V	18.73	9.26	16.49	40.12	74	-33.88
4960	31.06	PK	H	18.73	9.26	16.49	42.56	74	-31.44
17589	28.46	AV	V	28.43	15.22	31.29	40.82	54	-13.18
17589	29.04	AV	H	28.43	15.22	31.29	41.4	54	-12.6
17589	30.18	PK	V	28.43	15.22	31.29	42.54	74	-31.46
17589	29.63	PK	H	28.43	15.22	31.29	41.99	74	-32.01

Note: 1. The testing has been conformed to $10 \times 2480\text{MHz} = 24800\text{MHz}$.

- All other emissions more than 30dB below the limit.
- Factor = Antenna Factor + Cable Loss – Pre-amplifier.
Emission Level = Reading + Factor
Margin = Emission Level - Limit



8 CONDUCTED SPURIOUS AND BAND EDGE EMISSION

8.1 REQUIREMENT

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.


8.2 TEST PROCEDURE

For Conducted Test

1. The transmitter output is connected to a spectrum analyzer. The resolution bandwidth is set to 100KHz. The video bandwidth is set to 300KHz.
2. The spectrum from 30MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

EMI Test Receiver	Setting
Attenuation	Auto
RBW	100KHz
VBW	300KHz
Detector	Peak
Trace	Max hold

8.3 TEST SETUP

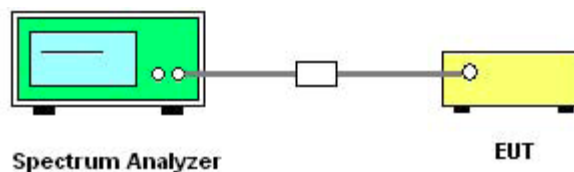

8.4 EUT OPERATION CONDITIONS


The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.



8.5 TEST RESULTS


Conducted Spurious

GFSK
Low Channel

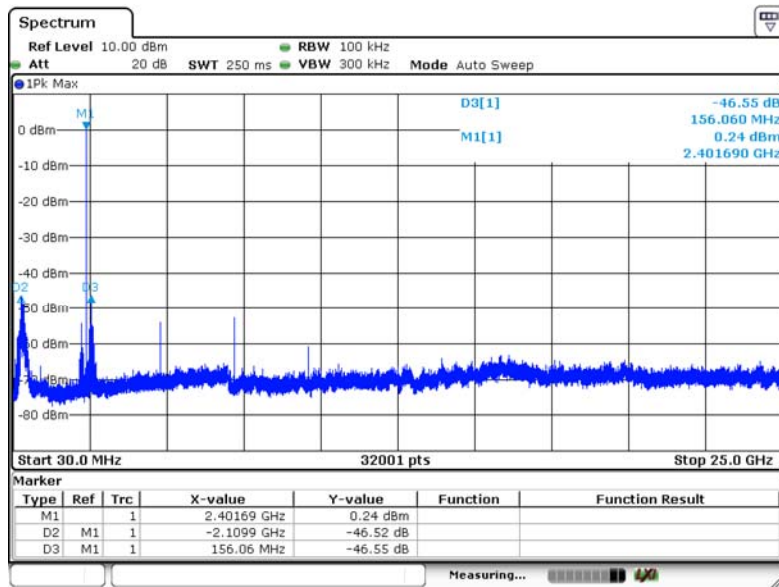




Middle Channel

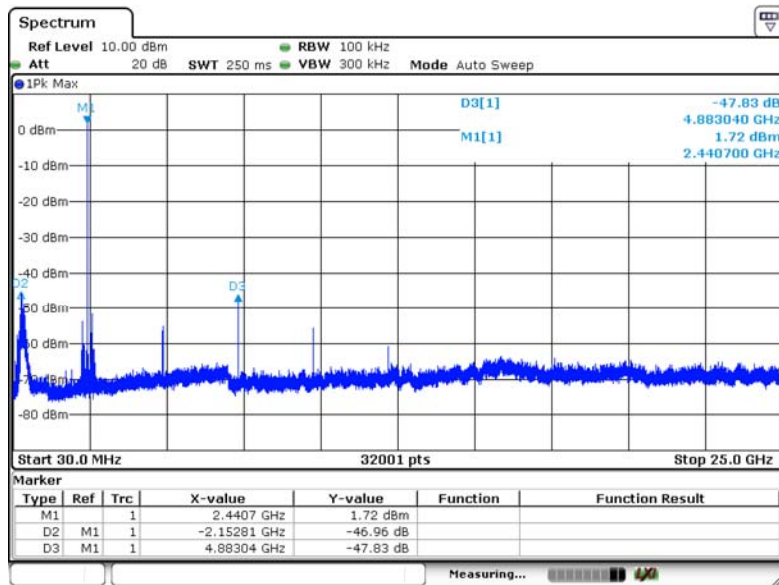


High Channel

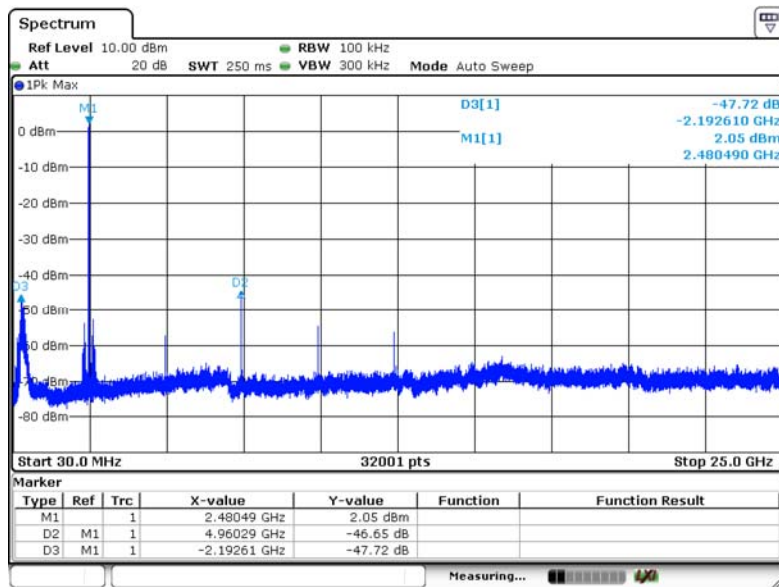




$\pi/4$ -DQPSK

Low Channel

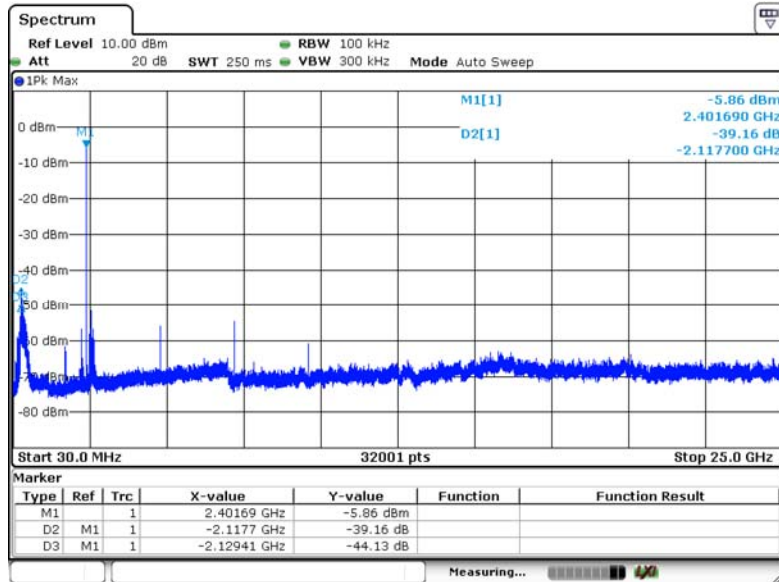


Middle Channel

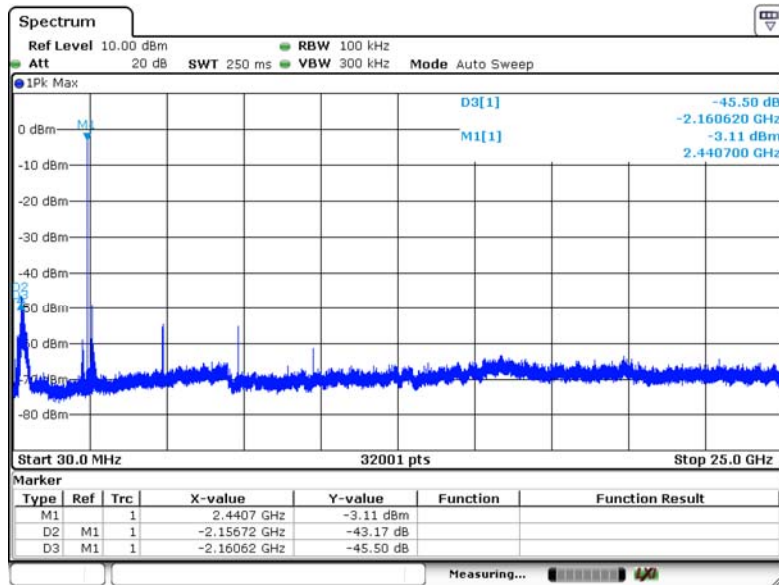




High Channel

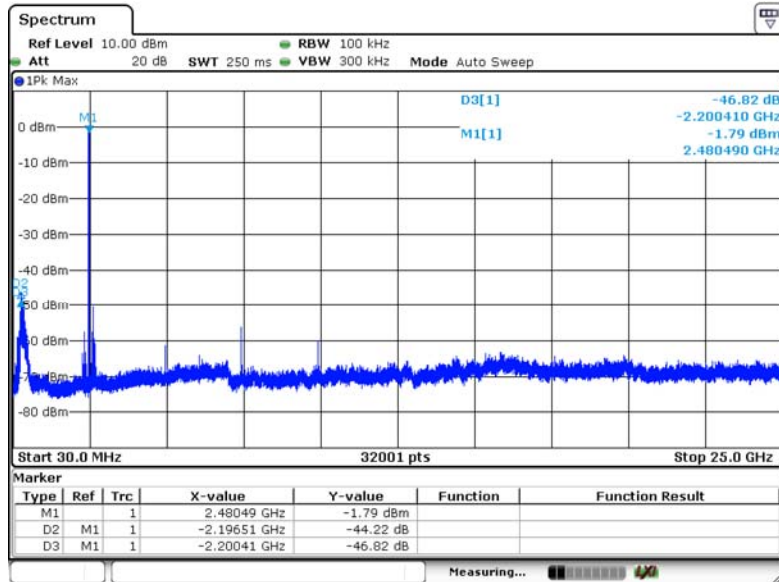


8DPSK

Low Channel

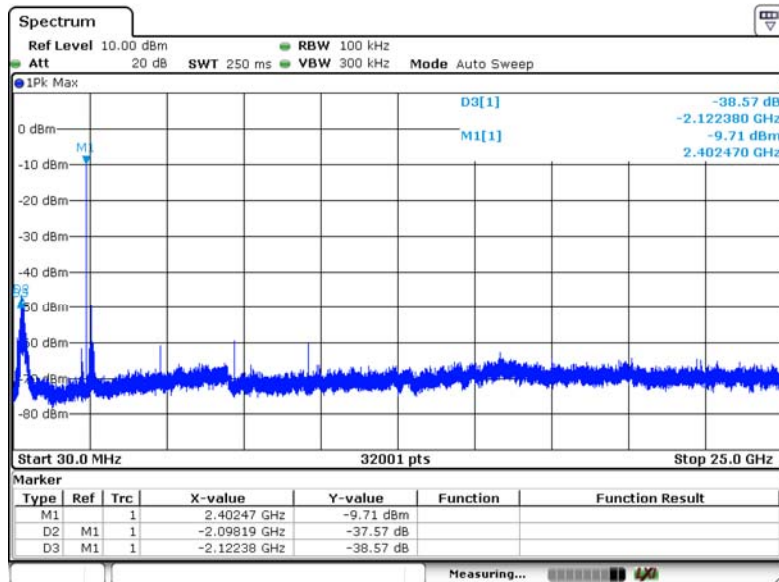




Middle Channel

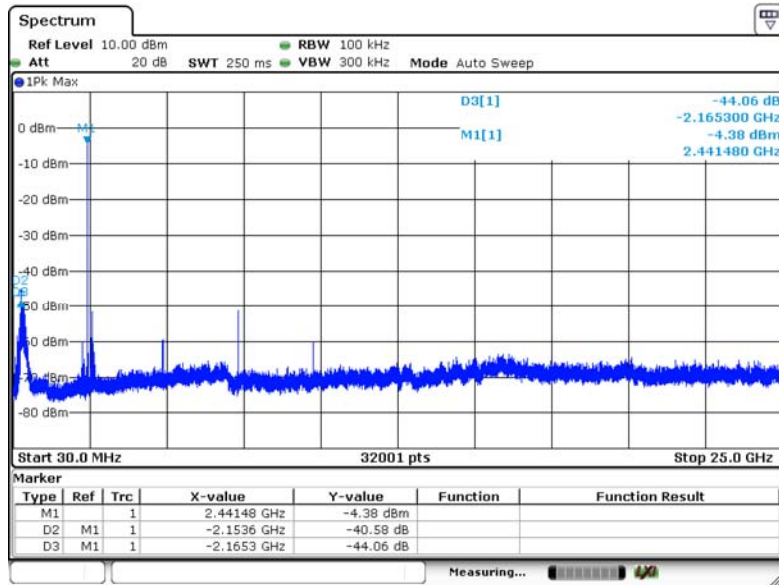

High Channel

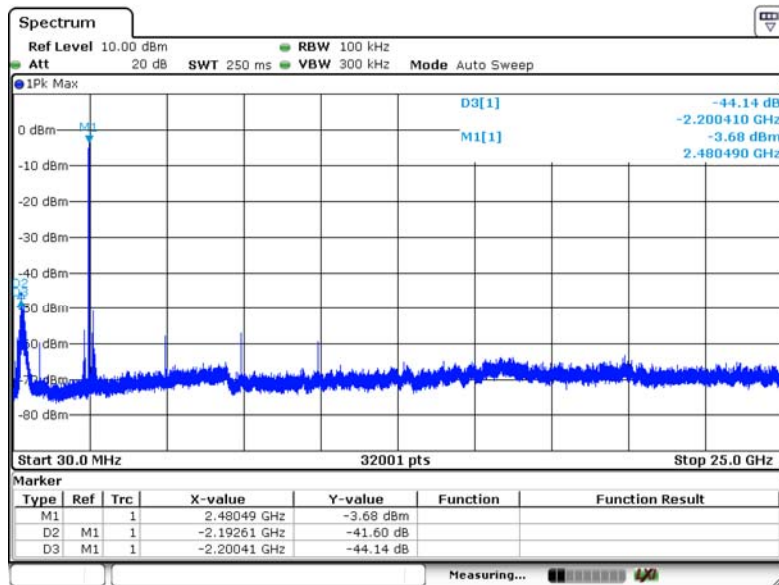



Conducted Band Edge

For Non-Hopping Mode:



Frequency(MHz)	Modulation	Peak Power Output (dBm)	Emission Read Value (dBm)	Result of Band edge (dBc)	Band Edge Limit (dBc)
2399.99	GFSK	-0.06	-40.6	40.54	>20dBc
2399.98	pi/4-DQPSK	-1.08	-41.09	40.01	>20dBc
2399.98	8DPSK	-1.1	-41.83	40.73	>20dBc
2483.98	GFSK	-1.19	-57.72	56.53	>20dBc
2484.00	pi/4-DQPSK	-3.38	-57.19	53.81	>20dBc
2484.01	8DPSK	-3.36	-56.90	53.54	>20dBc

Test Plot:

Please refer to the following pages.





GFSK

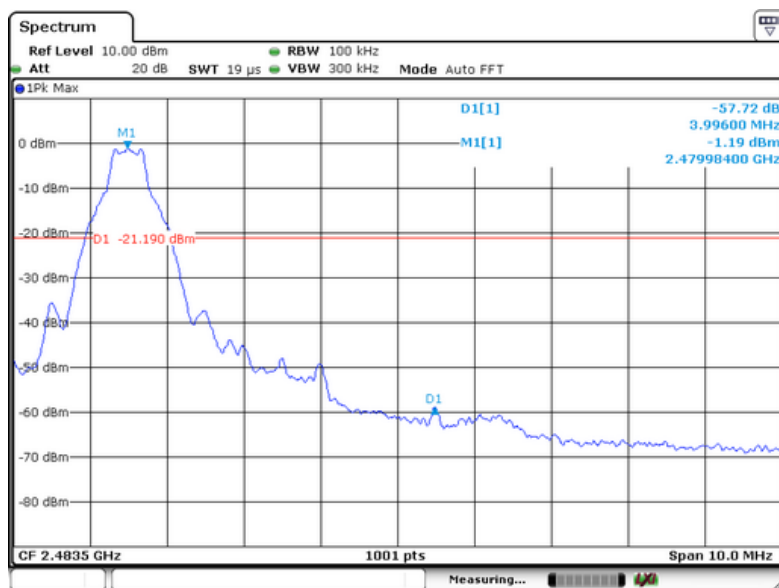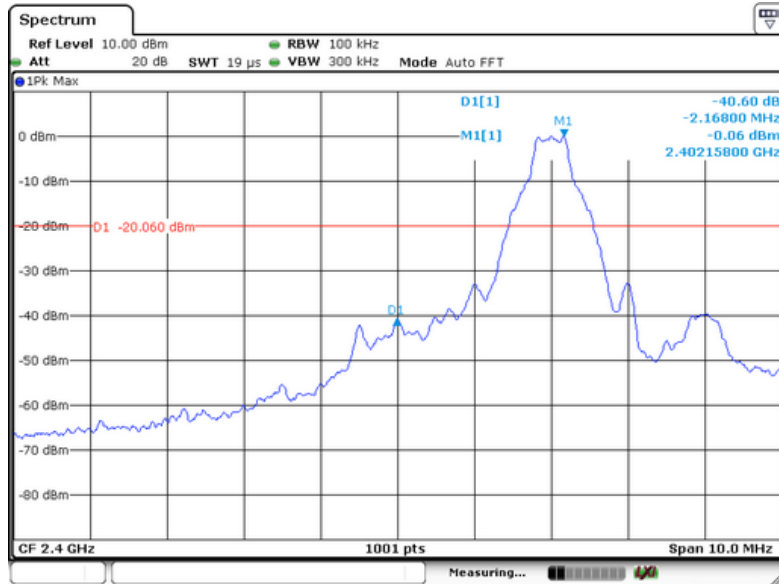





$\pi/4$ -DQPSK

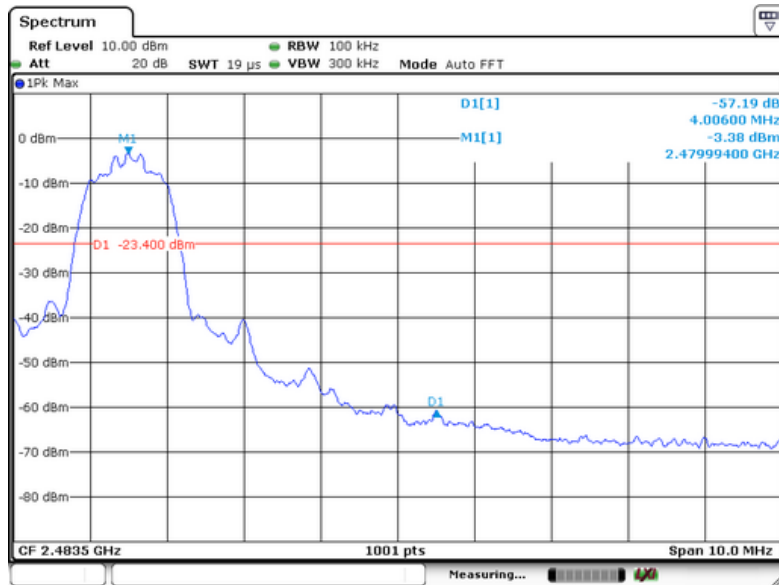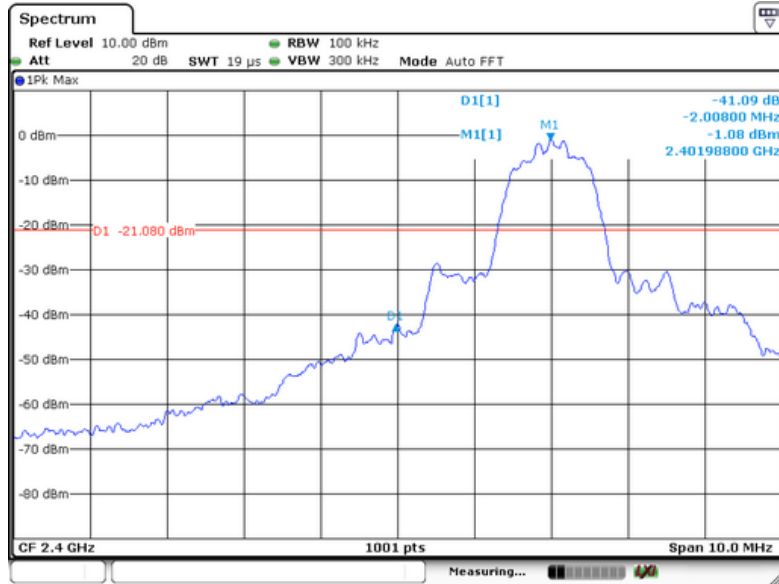



8DPSK

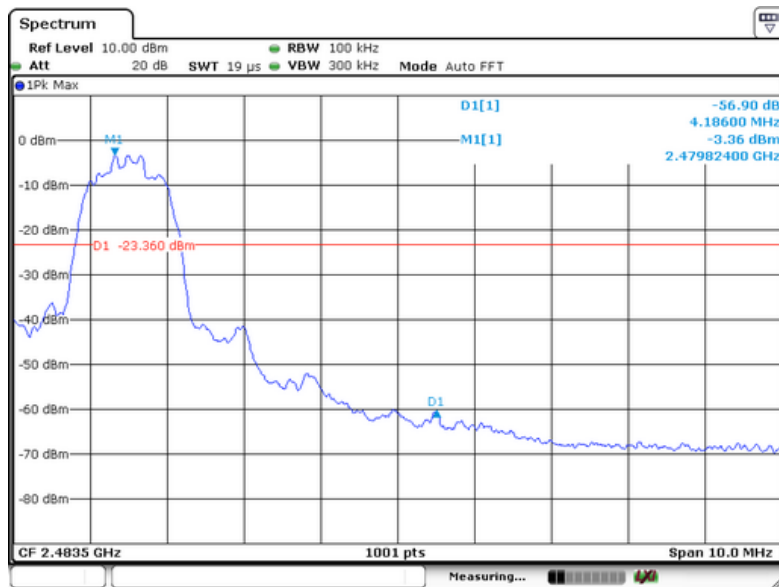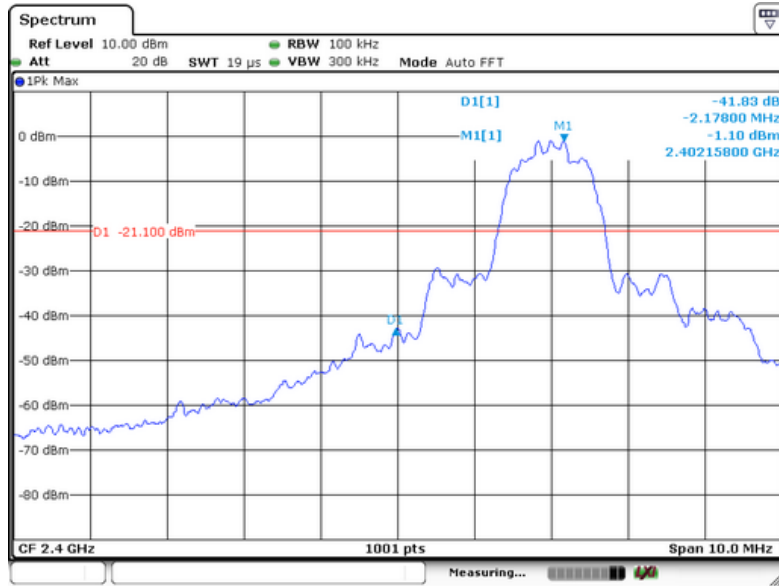



For Hopping Mode:



Frequency(MHz)	Modulation	Peak Power Output (dBm)	Emission Read Value (dBm)	Result of Band edge (dBc)	Band Edge Limit (dBc)
2399.98	GFSK	-0.09	-41.69	41.6	>20dBc
2399.98	pi/4-DQPSK	-1.10	-41.73	40.63	>20dBc
2399.99	8DPSK	-1.13	-42.51	41.38	>20dBc
2486.96	GFSK	-1.23	-60.83	59.6	>20dBc
2483.51	pi/4-DQPSK	-3.40	-57.82	54.42	>20dBc
2484.31	8DPSK	-3.46	-59.29	55.83	>20dBc

Test Plot:

Please refer to the following pages.





GFSK

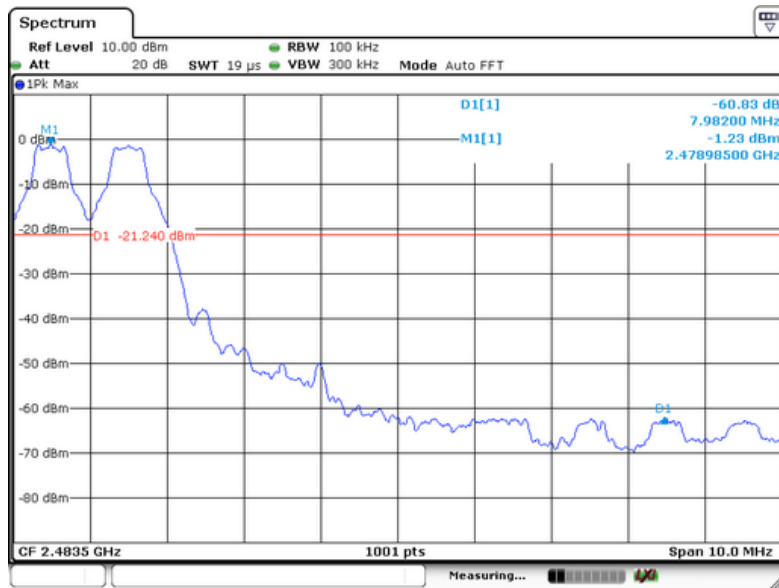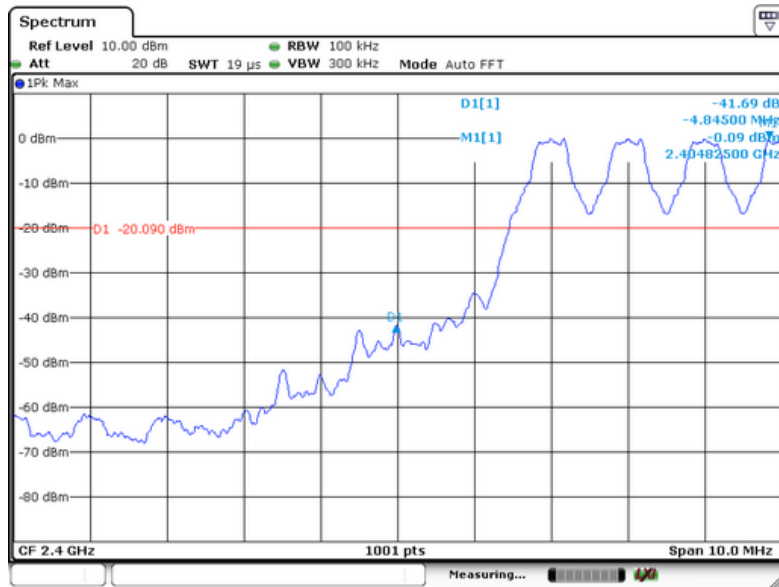





$\pi/4$ -DQPSK

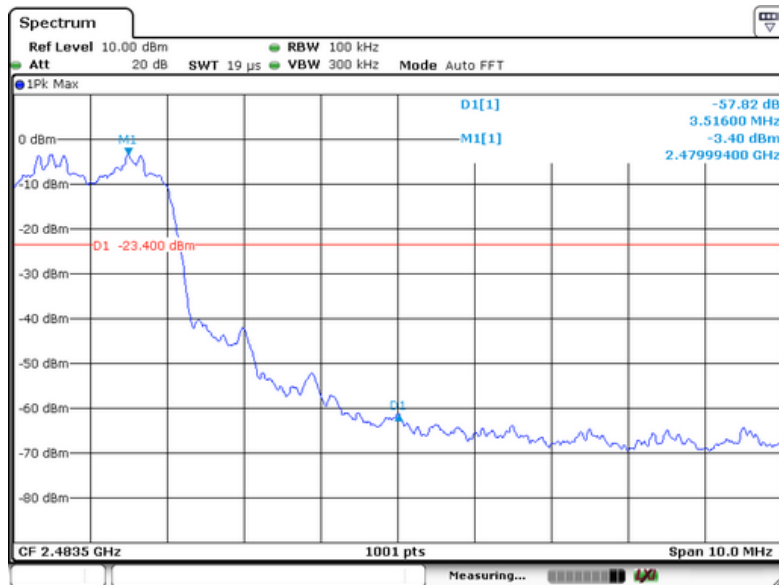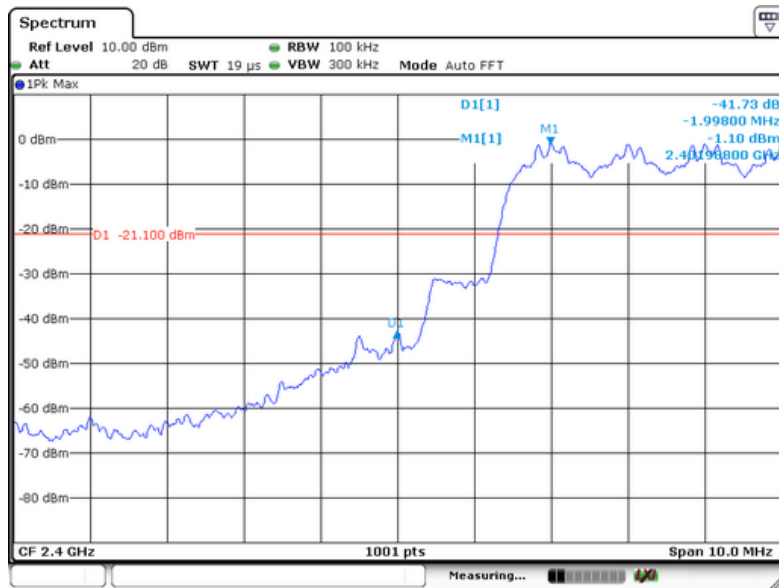



8DPSK

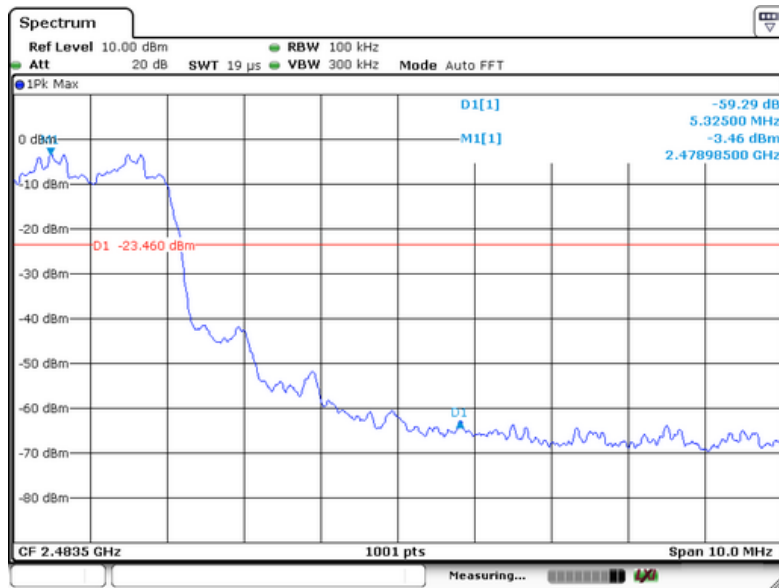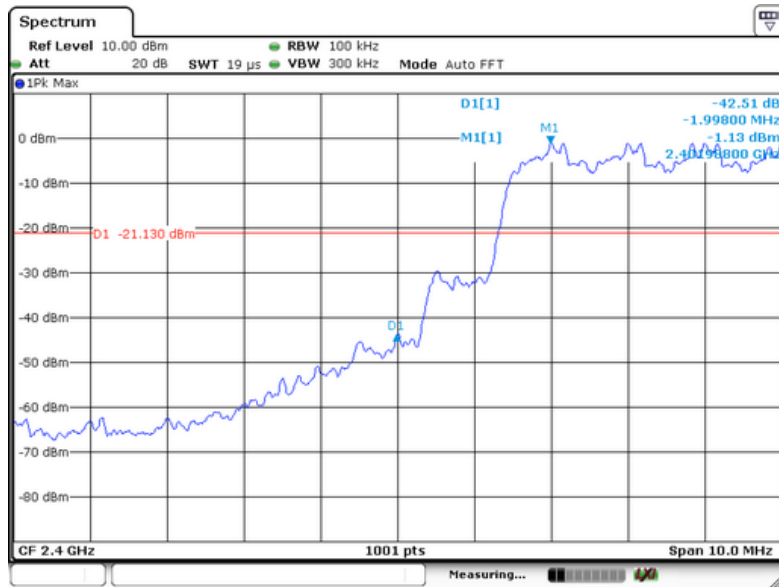



9 20 dB Bandwidth Measurement

Test Requirement : FCC CFR47 Part 15 Section 15.247
Test Method : ANSI C63.10:2013
Test Mode : Refer to section 3.3



9.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 30kHz, VBW = 100kHz

9.2 Test Result

Test Mode: CH00 / CH39 / CH78 (GFSK/(1Mbps)Mode)



Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
00	2402	818
39	2441	818
78	2480	821

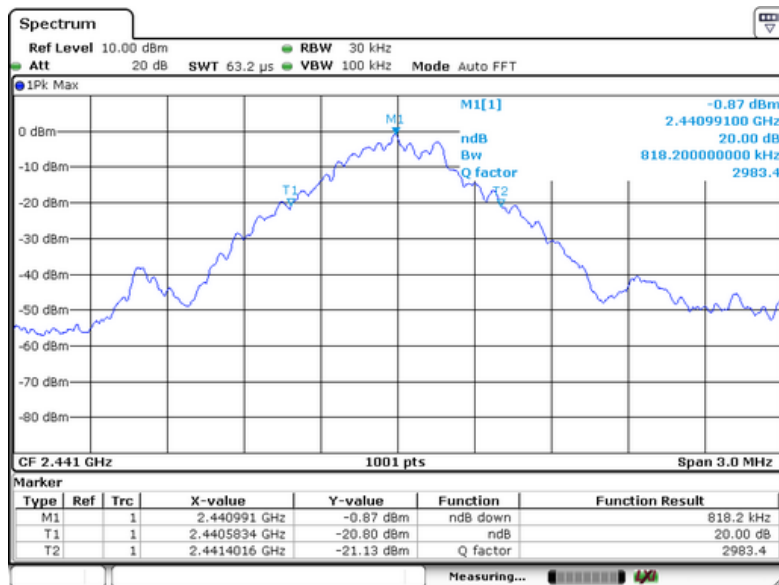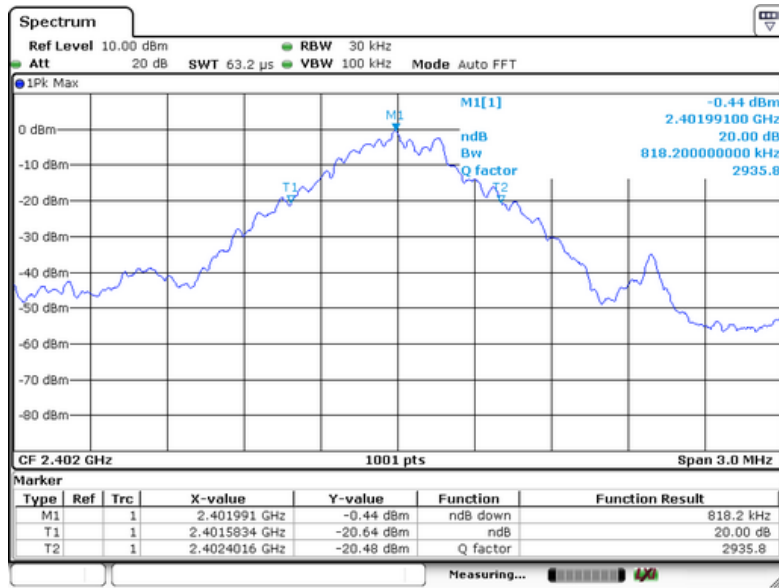


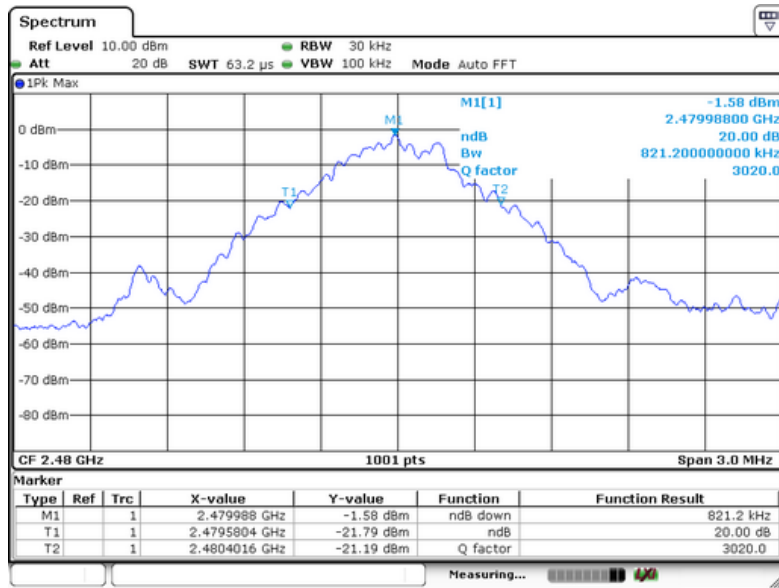

Test Mode: CH00 / CH39 / CH78 (Π/4-DQPSK /(2Mbps)Mode)



Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
00	2402	1234
39	2441	1258
78	2480	1237

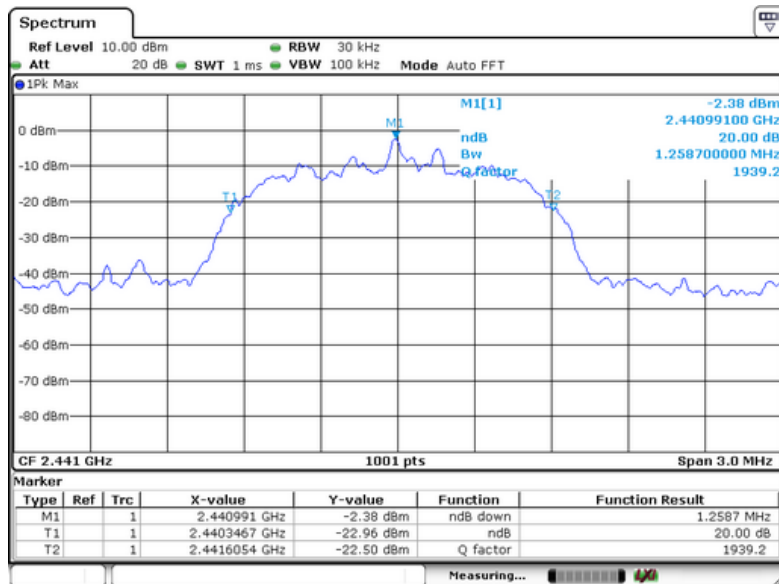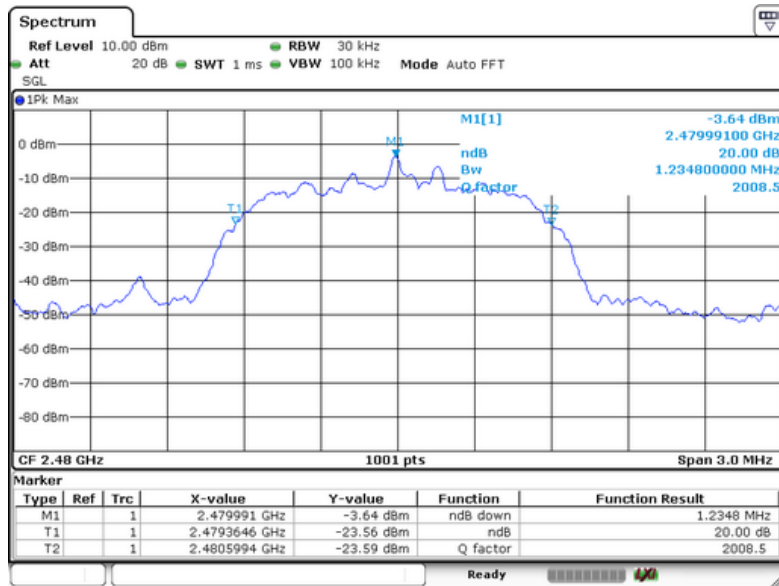


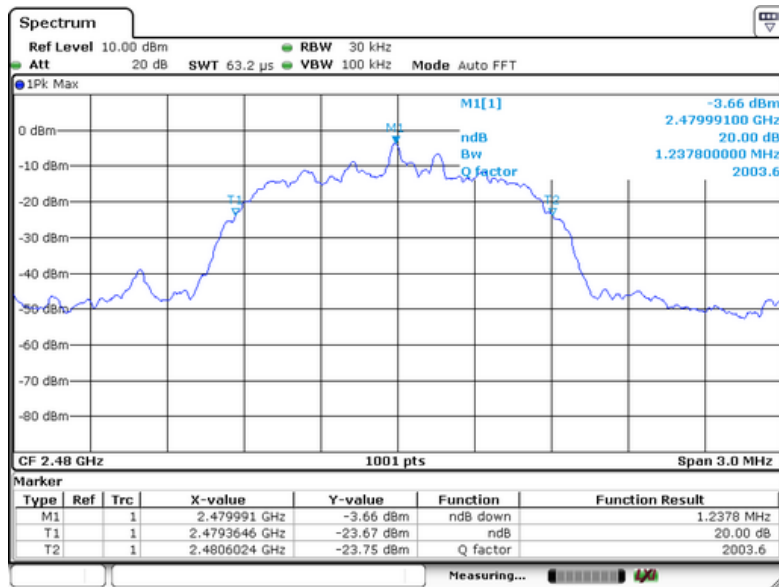

Test Mode: CH00 / CH39 / CH78 (8DPSK(3Mbps)Mode)

Channel number	Channel frequency (MHz)	20dB Down BW(kHz)
00	2402	1213
39	2441	1216
78	2480	1252

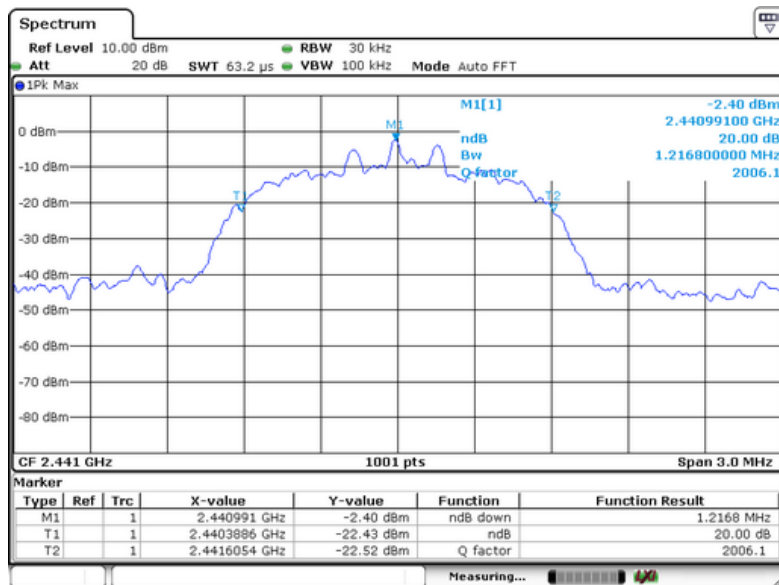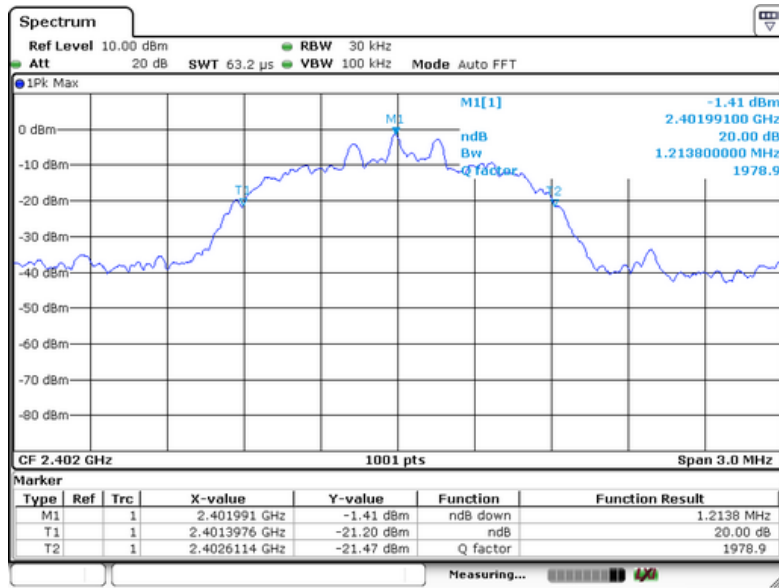

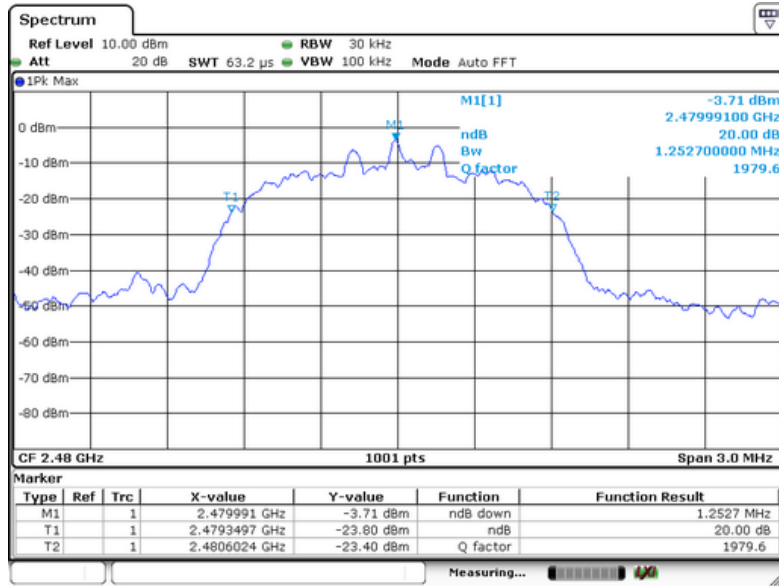



10 Maximum Peak Output Power

Test Requirement : FCC CFR47 Part 15 Section 15.247

Test Method : ANSI C63.10:2013

Test Limit : Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt (30dBm). For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

Refer to the result "Number of Hopping Frequency" of this document. The 0.125watts (20.97 dBm) limit applies.



Test Mode : Refer to section 3.3


10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyser: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.



10.2 Test Result


GFSK(1Mbps)					
Test Channel	Frequency	Conducted Output Peak Power	Conducted Output Peak Power	LIMIT	Pass/Fail
	(MHz)	(dBm)	(mW)	(mW)	
CH00	2402	0.03	1.007	1000	Pass
CH39	2441	-0.49	0.893	1000	Pass
CH78	2480	-1.17	0.764	1000	Pass

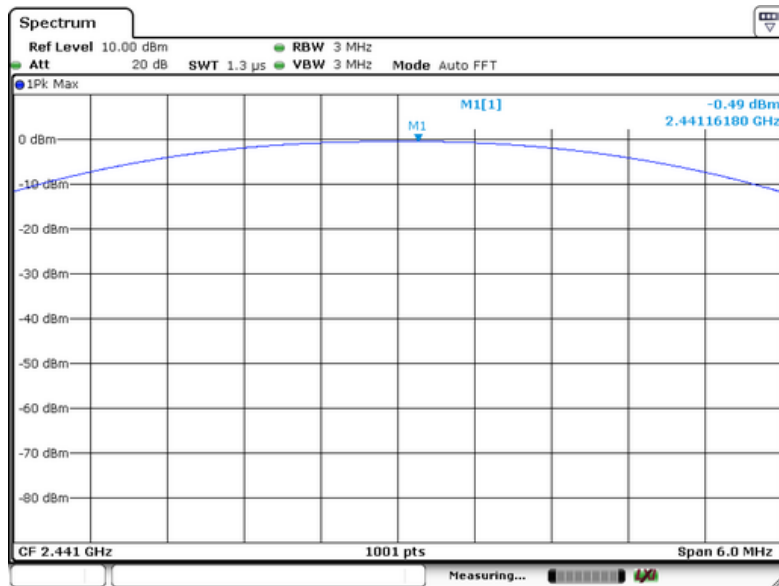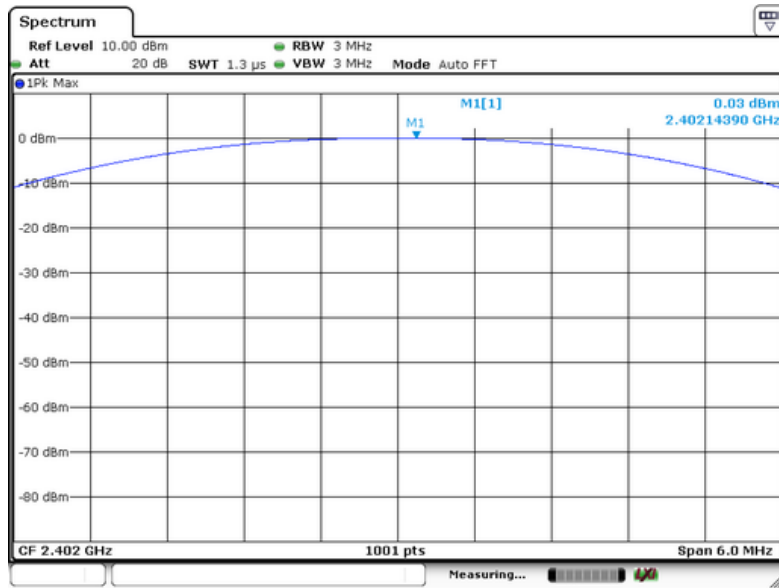


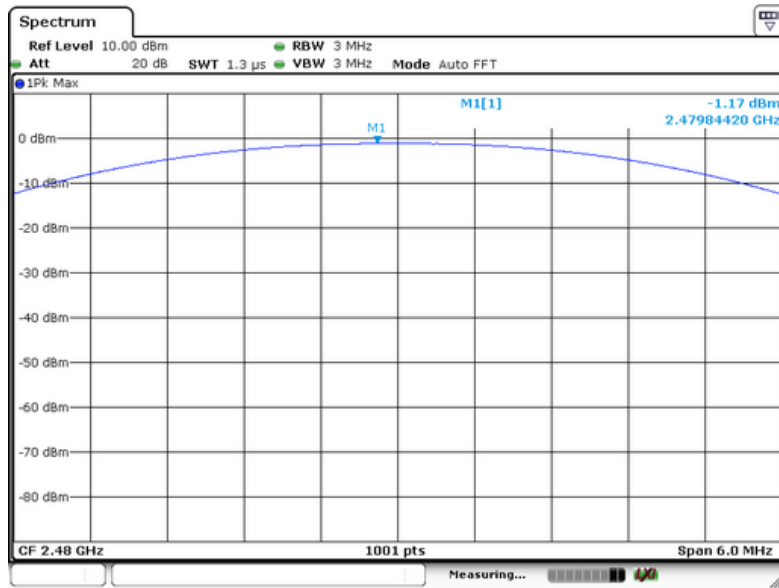



π/4QPSK(2Mbps)					
Test Channel	Frequency	Conducted Output Peak Power	Conducted Output Peak Power	LIMIT	Pass/Fail
	(MHz)	(dBm)	(mW)	(mW)	
CH00	2402	-0.63	0.865	125	Pass
CH39	2441	-1.58	0.695	125	Pass
CH78	2480	-2.65	0.543	125	Pass

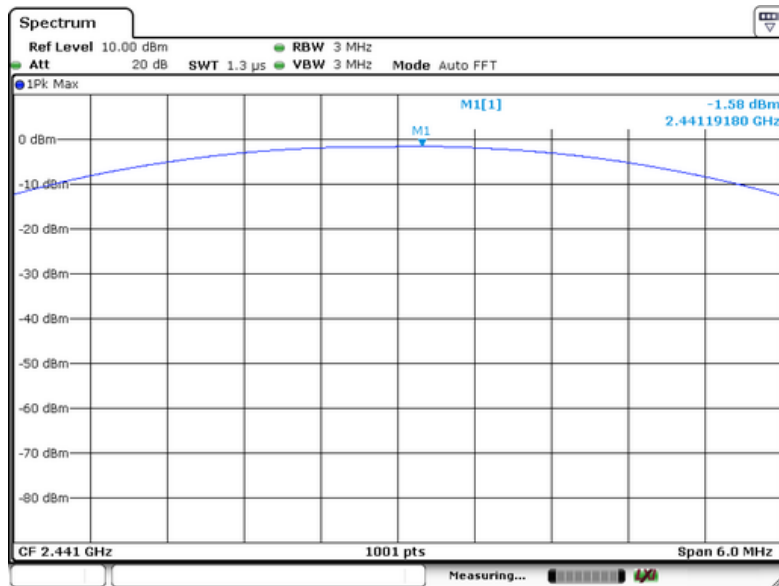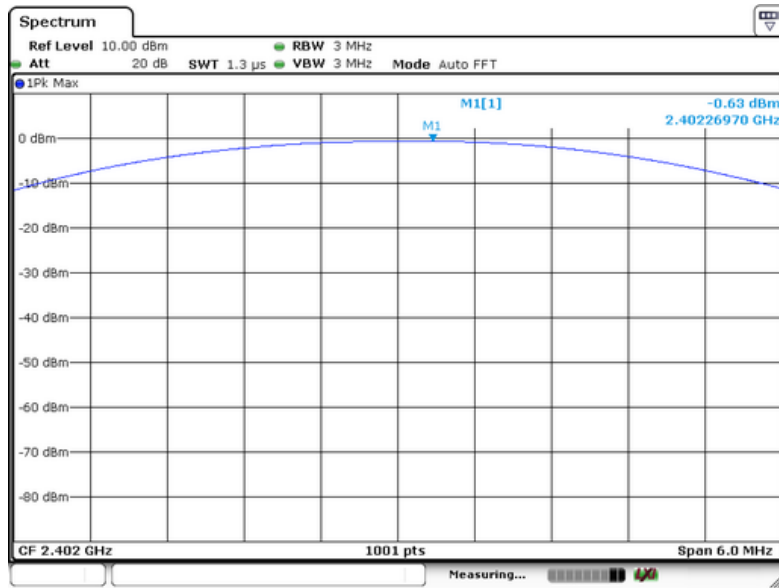

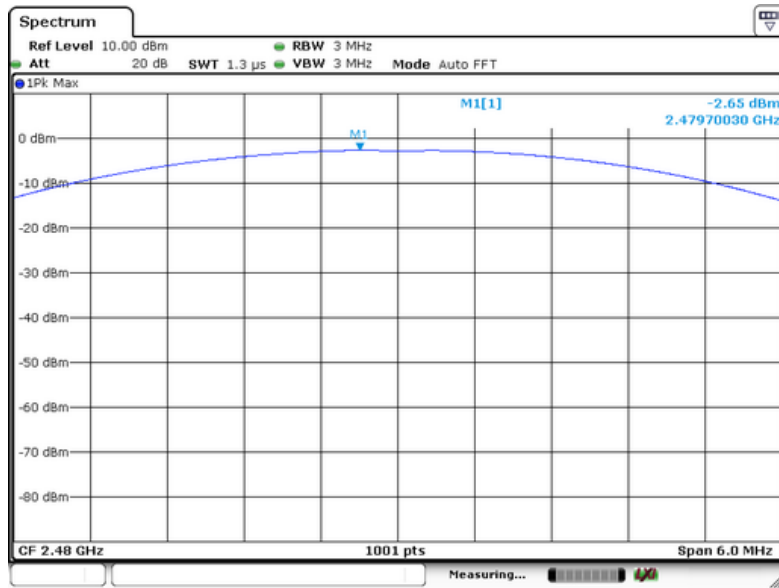

8DPSK(3Mbps)					
Test Channel	Frequency	Conducted Output Peak Power	Conducted Output Peak Power	LIMIT	Pass/Fail
	(MHz)	(dBm)	(mW)	(mW)	
CH00	2402	-0.54	0.883	125	Pass
CH39	2441	-1.41	0.723	125	Pass
CH78	2480	-2.4	0.575	125	Pass

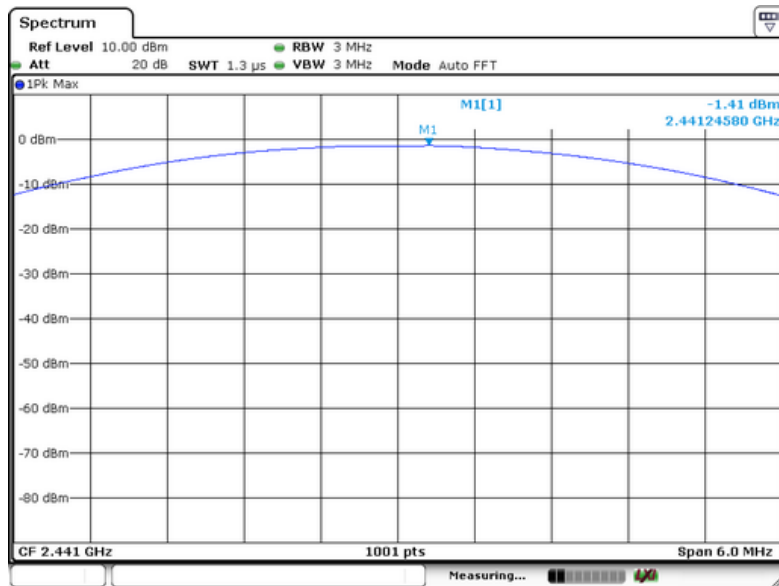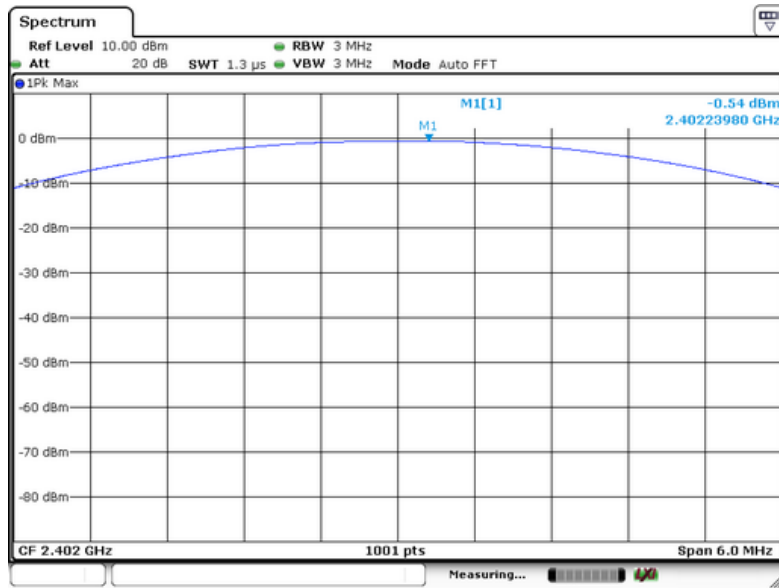

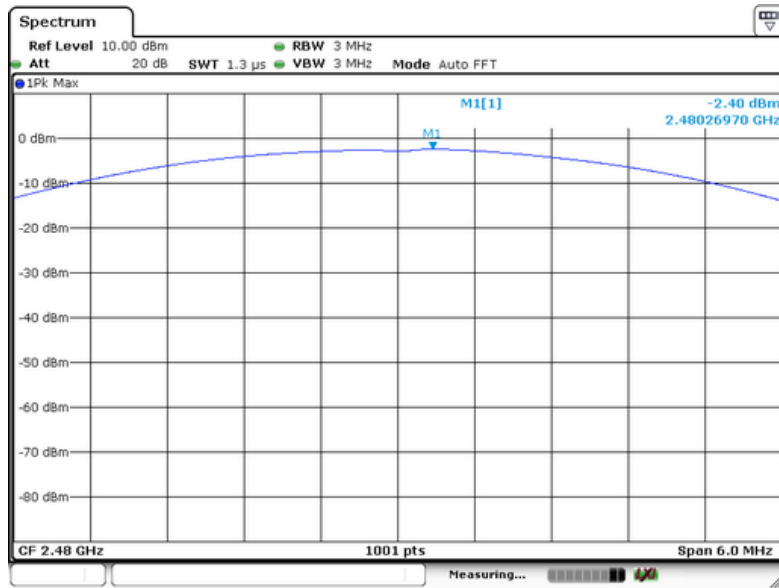



11 Hopping Channel Separation

Test Requirement	: FCC CFR47 Part 15 Section 15.247
Test Method	: ANSI C63.10:2013
Test Limit	: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.
Test Mode	: Hopping

11.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 30KHz. VBW = 100KHz , Span = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section Submit this plot.





11.2 Test Result

Test Mode:	CH00 / CH39 / CH78 (GFSK(1Mbps) Mode)
------------	---------------------------------------

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
00	2402	1001	>818
39	2441	1001	>818
78	2480	1001	>821

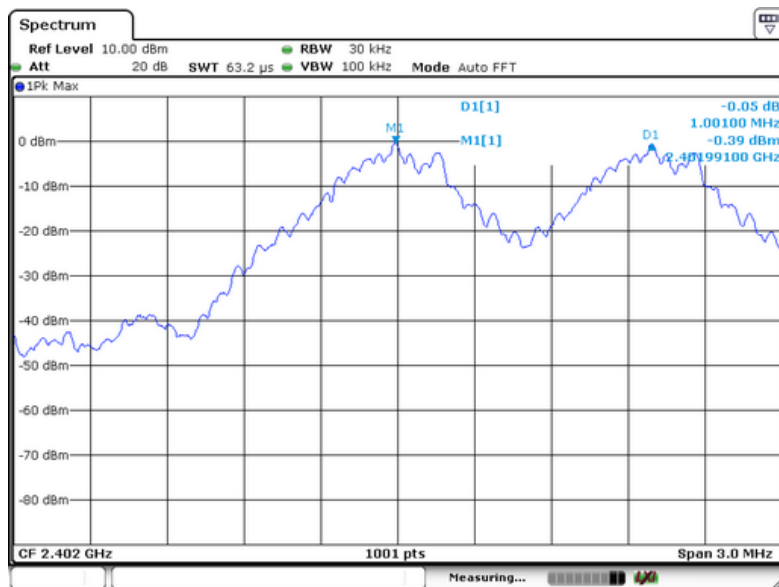


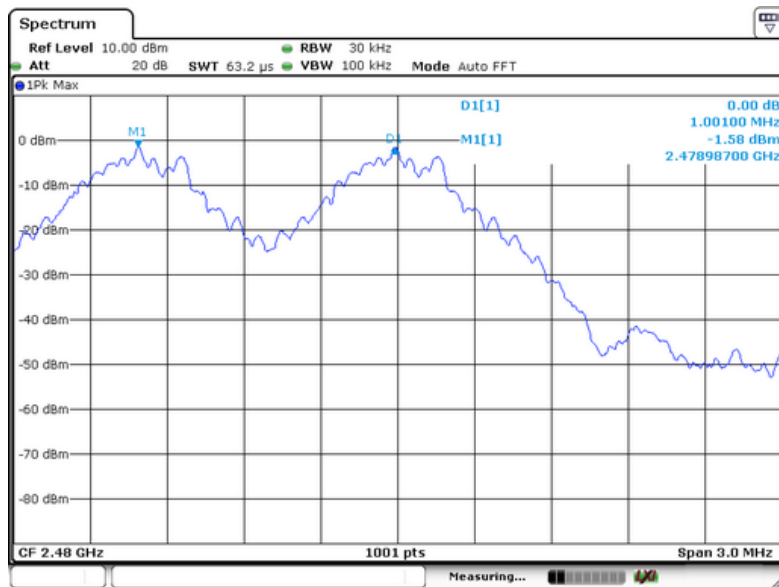
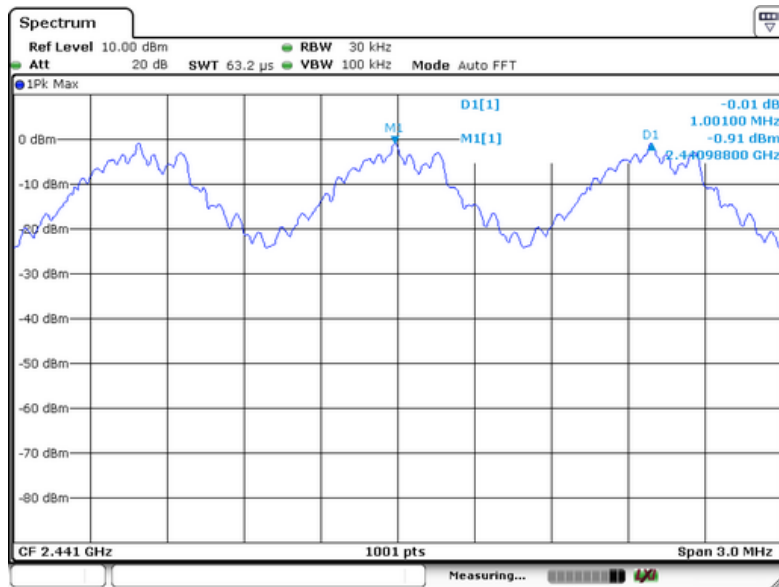




Test Mode:	CH00 / CH39 / CH78 ($\pi/4$ -DQPSK(2Mbps) Mode)
------------	--

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
00	2402	1001	>832
39	2441	1001	>838
78	2480	1001	>822

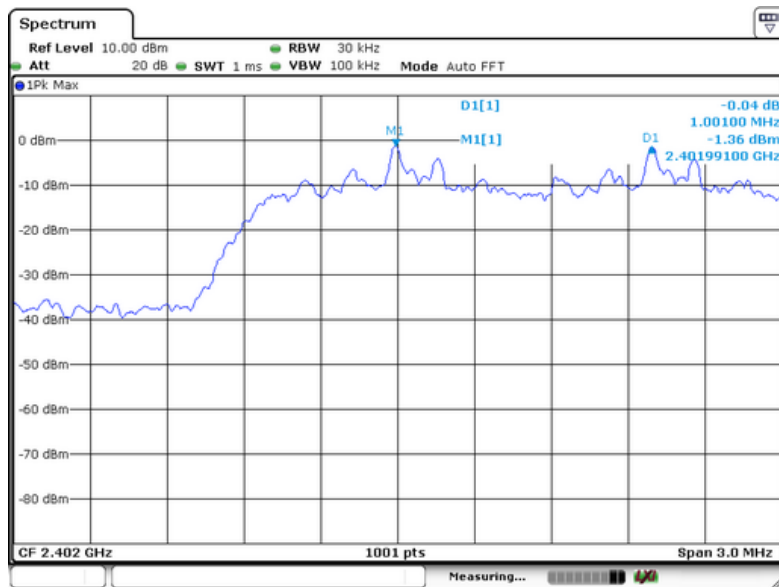


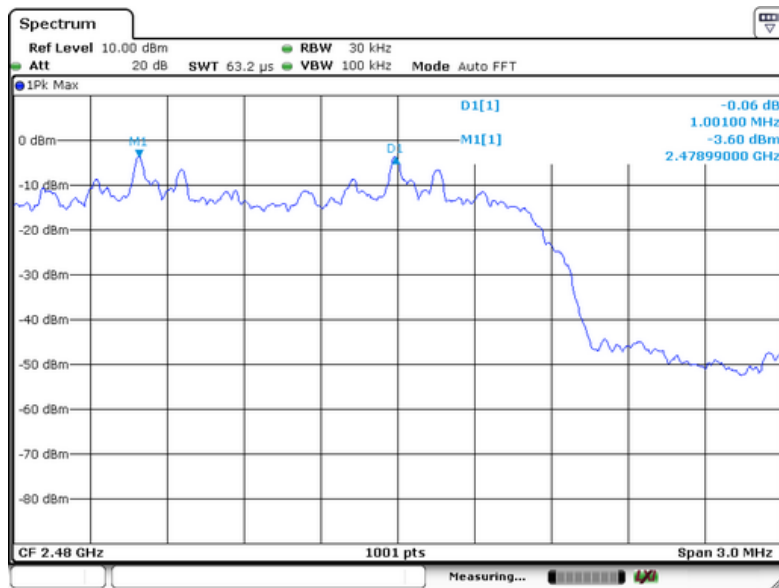
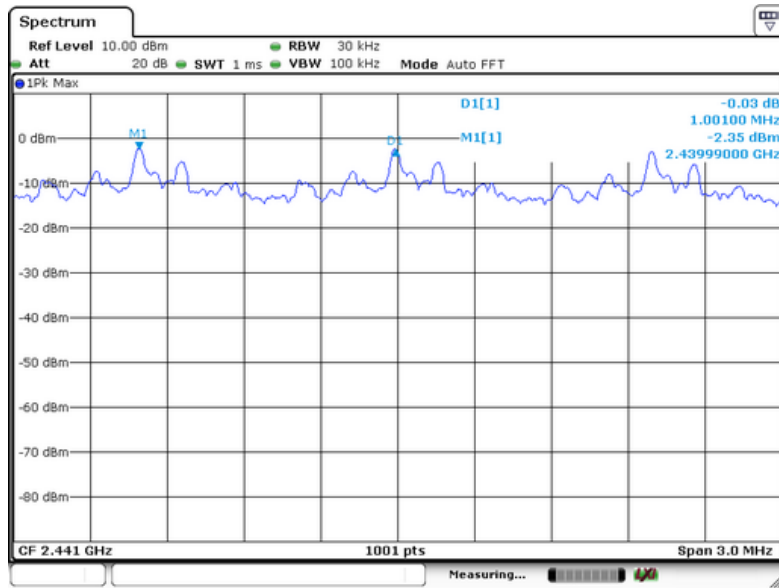




Test Mode:	CH00 / CH39 / CH78 (8DPSK(3Mbps)Mode)
------------	---------------------------------------

Channel number	Channel frequency (MHz)	Separation Read Value (kHz)	Separation Limit 2/3 20dB Down BW(kHz)
00	2402	1001	>808
39	2441	1001	>810
78	2480	1001	>834

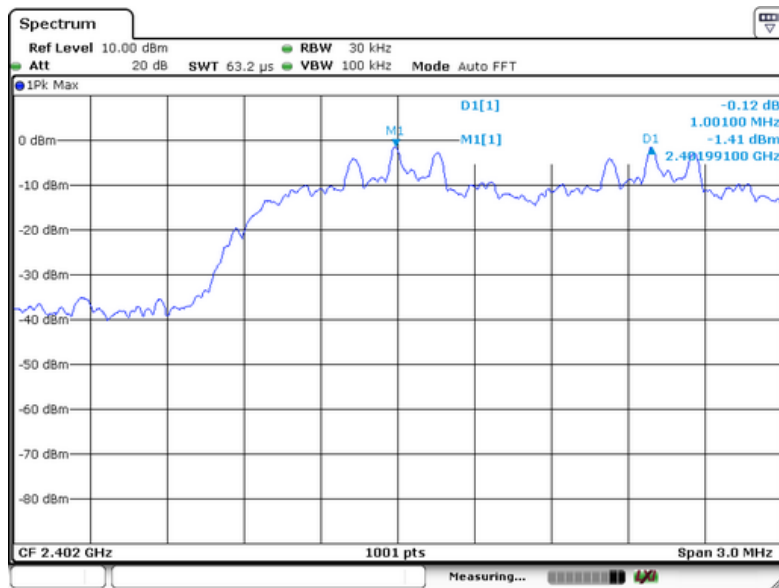

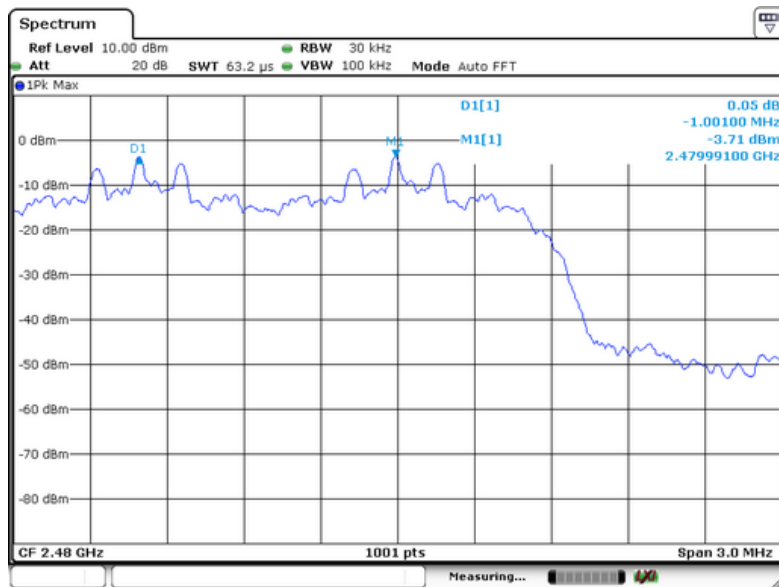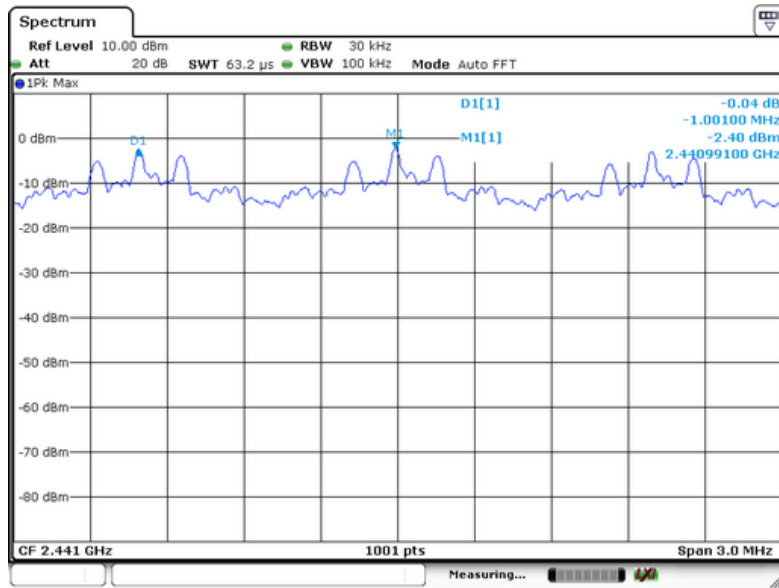



12 Number of Hopping Frequency


- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
- Test Mode : Hopping(GFSK)

12.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW = 300KHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Start Frequency = 2.4GHz, Stop Frequency = 2.483GHz. Sweep=auto;

12.2 Test Result

Channel Number	Limit
79	≥15

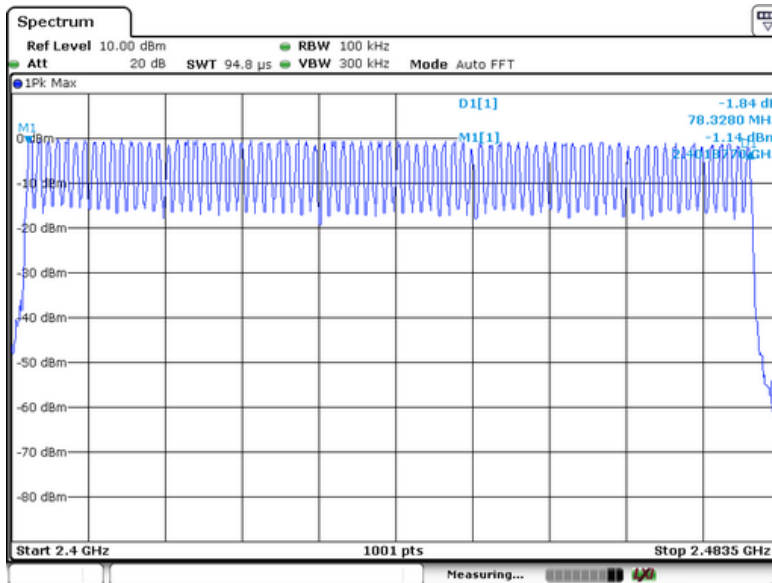



13 Dwell Time

- Test Requirement : FCC CFR47 Part 15 Section 15.247
- Test Method : ANSI C63.10:2013
- Test Limit : Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.
- Test Mode : The worst case(GFSK) was recorded



13.1 Test Procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set spectrum analyzer span = 0. Centred on a hopping channel;
3. Set RBW = 1MHz and VBW = 1MHz.Sweep = as necessary to capture the entire dwell time per hopping channel. Set the EUT for DH5, DH3 and DH1 packet transmitting.
4. Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

13.2 Test Result

Test Mode:	GFSK(1Mbps) –DH1/DH3/DH5
------------	--------------------------

Mode	Number of transmission in a 31.6(79 Hopping*0.4)	Length of transmissions time(msec)	Result (msec)	Limit (msec)
DH1	$1600/(2*79) \times 31.6 = 320$	0.420	134.40	400
DH3	$1600/(4*79) \times 31.6 =160$	1.677	268.32	400
DH5	$1600/(6*79) \times 31.6 =106.67$	2.920	311.47	400

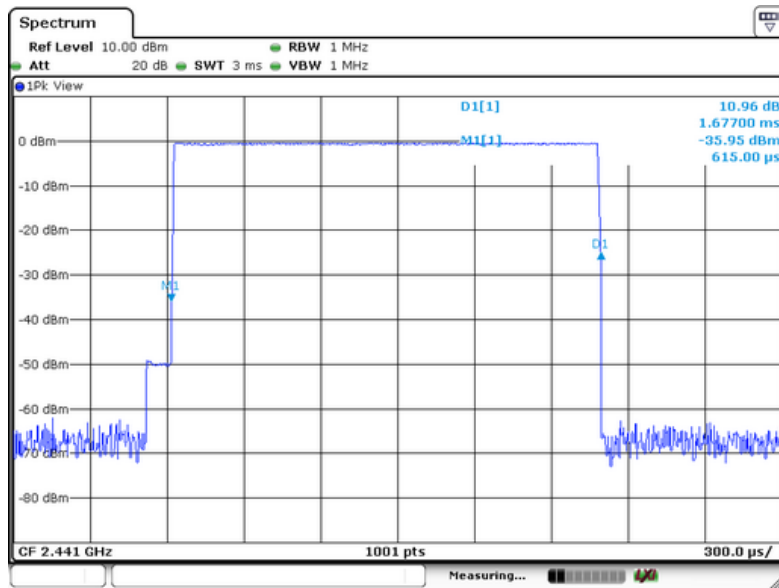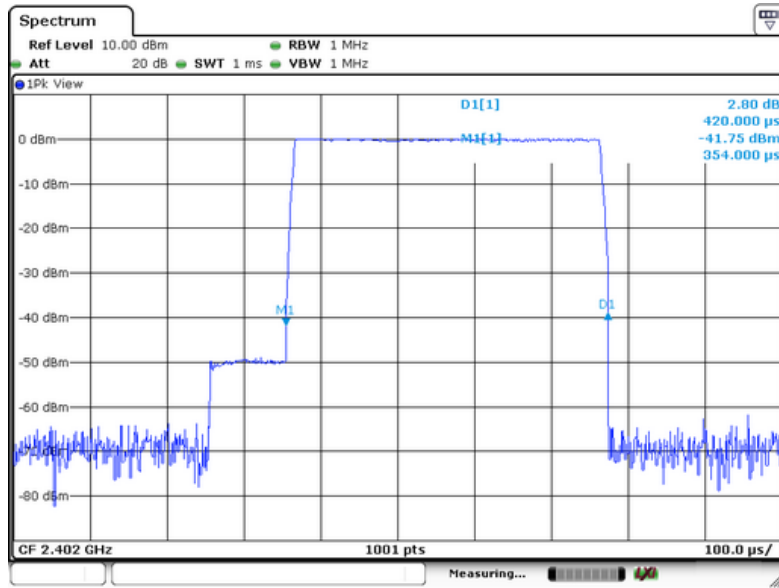

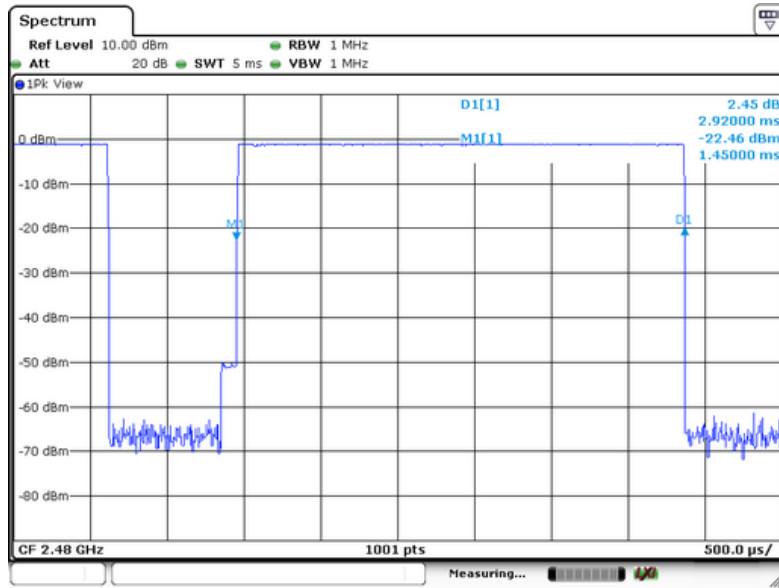



14 Antenna Requirement

According to the FCC part15.203, a transmitter can only be sold or operated with antennas with which it was approved. This product has an internal PCB Antenna, it meet the requirement of this section.



15 TEST PHOTOS













16 EUT PHOTOS





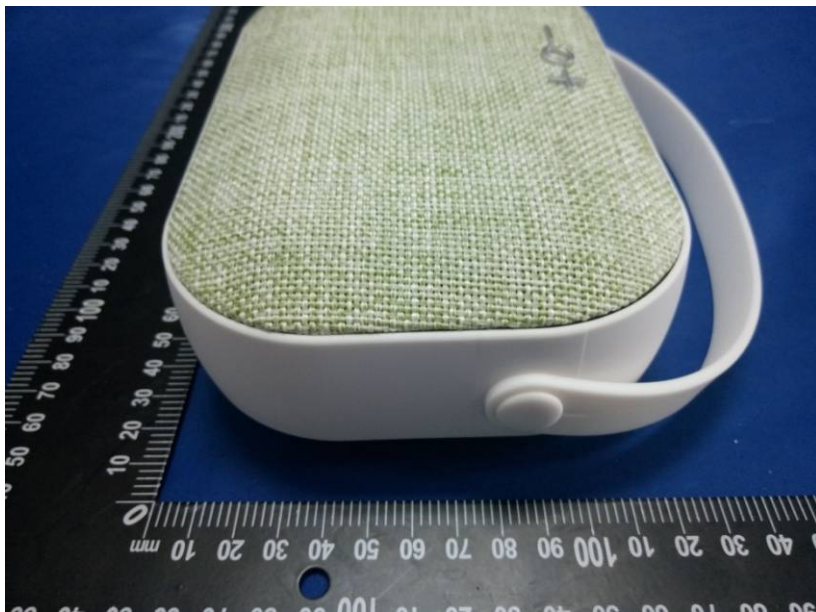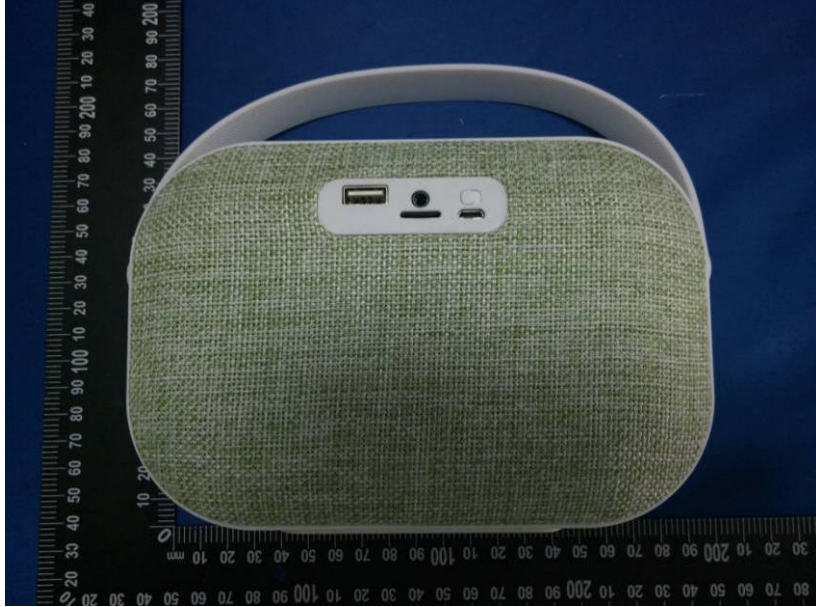


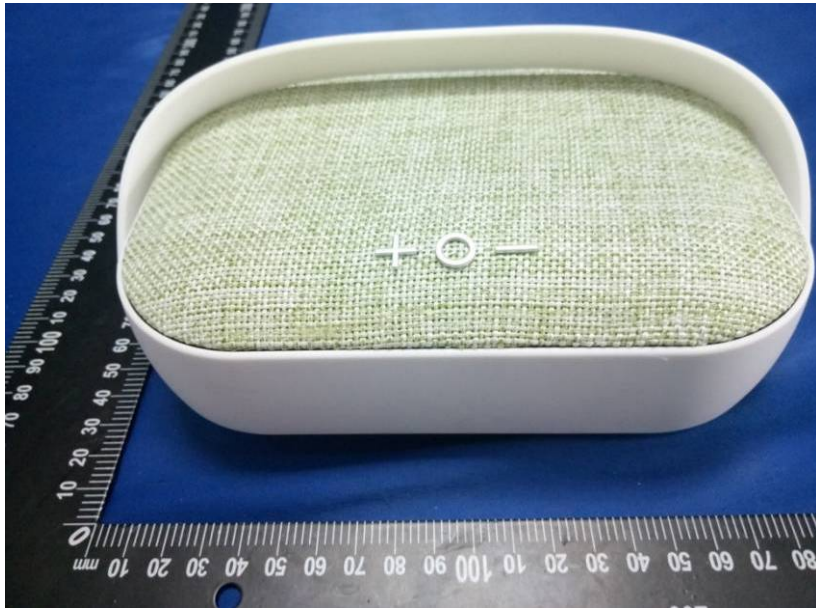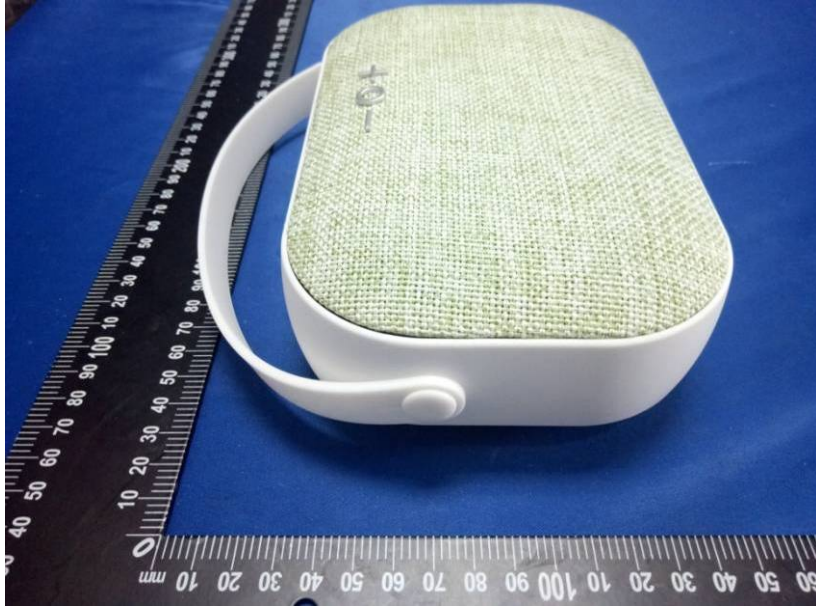

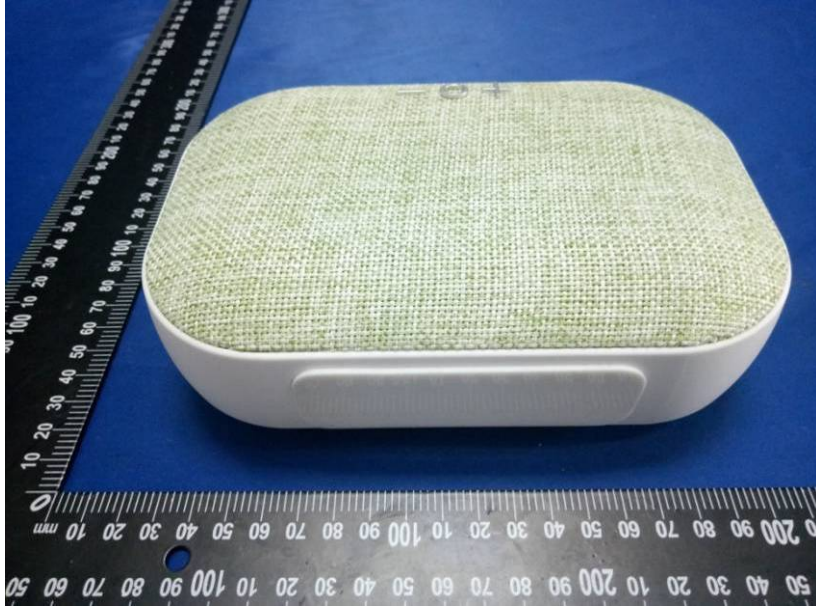

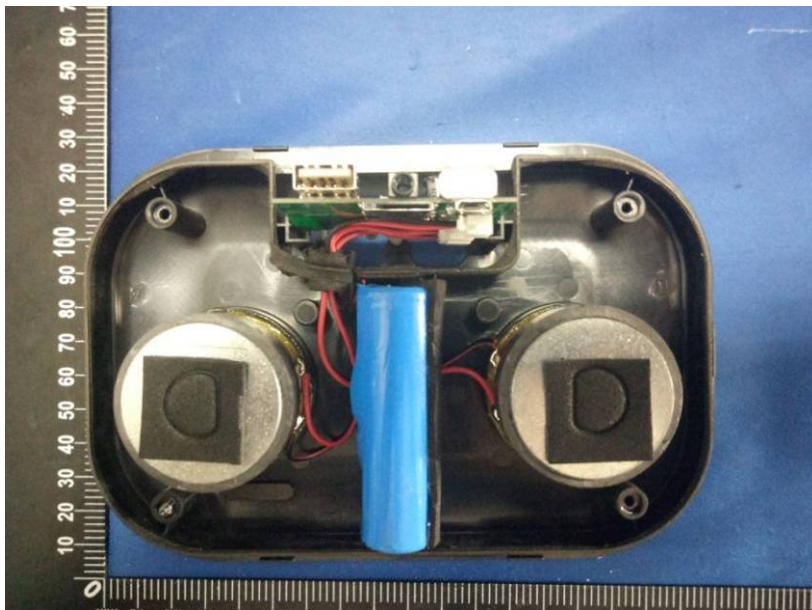

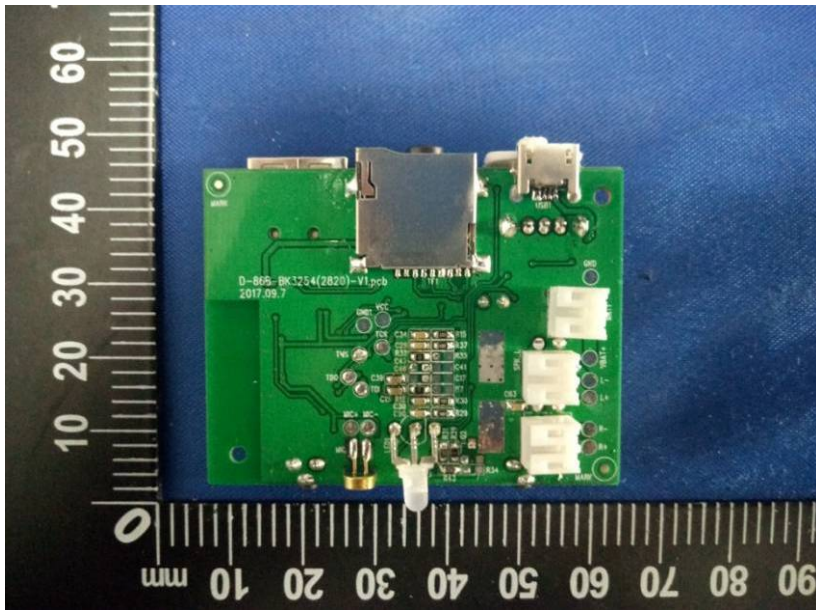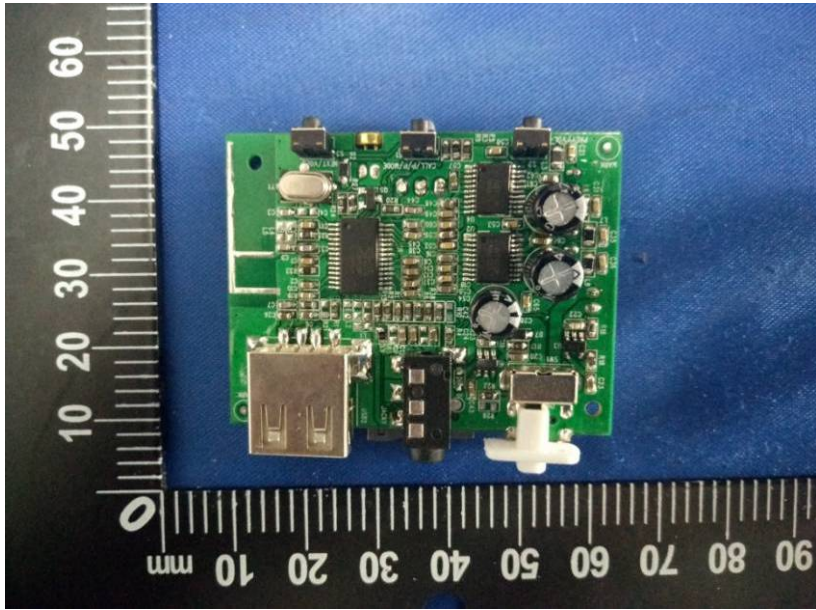

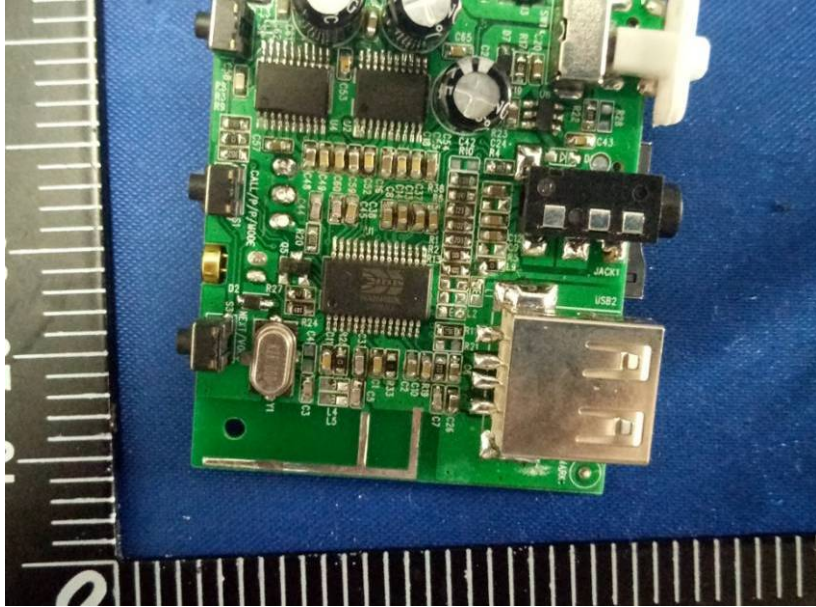

*****THE END REPORT*****