

Report No.: SZEM160400278102

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Nanshan

District, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594

Email: ee.shenzhen@sgs.com Page: 1 of 88

FCC REPORT

Application No: SZEM1604002781CR

Applicant: Sichuan Changhong Network Technologies Co.,Ltd.

Product Name: Network Set-Top Box

Model No.(EUT): IHO-2000 I
Trade Mark: YUPPTV

FCC ID: 2AIFQIHO-2000I

Standards: 47 CFR Part 15, Subpart C (2015)

Date of Receipt: 2016-05-03

Date of Test: 2016-05-10 to 2016-05-17

Date of Issue: 2016-05-31

Test Result: PASS *

. * In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Jack Zhang EMC Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.



Report No.: SZEM160400278102

Page: 2 of 88

2 Version

Revision Record							
Version Chapter Date Modifier Remark							
00		2016-05-31		Original			

Authorized for issue by:		
Tested By	(Bill Chen) /Project Engineer	2016-05-17 Date
Prepared By	Joyce Shi (Joyce Shi) /Clerk	2016-05-31 Date
Checked By	EYIC Fu (Eric Fu) /Reviewer	2016-05-31 Date



Report No.: SZEM160400278102

Page: 3 of 88

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15, Subpart C Section 15.203/15.247 (c)	ANSI C63.10 2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15, Subpart C Section 15.207	ANSI C63.10 2013 6.2.2	PASS
Conducted Peak Output Power	47 CFR Part 15, Subpart C Section 15.247 (b)(3)	ANSI C63.10 2013 11.9.1	PASS
6dB Occupied Bandwidth	47 CFR Part 15, Subpart C Section 15.247 (a)(2)	ANSI C63.10 2013 11.8	PASS
Power Spectral Density	47 CFR Part 15, Subpart C Section 15.247 (e)	ANSI C63.10 2013 11.10.2	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013 11.13	PASS
RF Conducted Spurious Emissions	47 CFR Part 15, Subpart C Section 15.247(d)	ANSI C63.10 2013 11.11	PASS
Radiated Spurious Emissions	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013 11.12	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15, Subpart C Section 15.205/15.209	ANSI C63.10 2013 11.12	PASS



Report No.: SZEM160400278102

Page: 4 of 88

4 Contents

			Page
1	COV	ER PAGE	1
2	VED	SION	2
_	VEN	31011	
3	TES	T SUMMARY	3
4	CON	TENTS	1
7	CON	ILLINI O	
5	GEN	ERAL INFORMATION	5
	5.1	CLIENT INFORMATION	5
	5.2	GENERAL DESCRIPTION OF EUT	5
	5.3	TEST ENVIRONMENT AND MODE	7
	5.4	DESCRIPTION OF SUPPORT UNITS	7
	5.5	TEST LOCATION	7
	5.6	TEST FACILITY	8
	5.7	DEVIATION FROM STANDARDS	8
	5.8	ABNORMALITIES FROM STANDARD CONDITIONS	8
	5.9	OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
	5.10	EQUIPMENT LIST	9
6	TES	T RESULTS AND MEASUREMENT DATA	12
	6.1	ANTENNA REQUIREMENT	12
	6.2	CONDUCTED EMISSIONS	
	6.3	CONDUCTED PEAK OUTPUT POWER	
	6.4	6DB Occupy Bandwidth	
	6.5	Power Spectral Density	
	6.6	BAND-EDGE FOR RF CONDUCTED EMISSIONS	
	6.7	RF CONDUCTED SPURIOUS EMISSIONS	
	6.8	RADIATED SPURIOUS EMISSIONS	
	6.8.1		
	6.8.2		
	6.9	RESTRICTED BANDS AROUND FUNDAMENTAL FREQUENCY	
7	PHC	TOGRAPHS - EUT TEST SETUP	87
-	7.1	CONDUCTED EMISSION	
	7.1 7.2	RADIATED EMISSION	
	7.2 7.3	RADIATED SPURIOUS EMISSION	
	_		
8	PHO	TOGRAPHS - EUT CONSTRUCTIONAL DETAILS	88



Report No.: SZEM160400278102

Page: 5 of 88

5 General Information

5.1 Client Information

Applicant:	Sichuan Changhong Network Technologies Co.,Ltd.				
Address of Applicant:	Science and Technology Park, Mianyang City, Sichuan Province, China				

5.2 General Description of EUT

Product Name:	Network Set-Top Box
Model No.:	IHO-2000 I
Trade Mark:	YUPPTV
Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK)
	IEEE for 802.11g : OFDM(64QAM, 16QAM, QPSK, BPSK)
	IEEE for 802.11n(HT20): OFDM (64QAM, 16QAM, QPSK,BPSK)
Antenna Type:	Chip
Antenna Gain:	3dBi
EUT Power Supply	Adapter:
	MODEL:GSCU1000S012V18N
	INPUT:AC 90-270V 50/60Hz 0.5A MAX
	OUTPUT:DC 12V 1A
	3V DC (1.5V x 2 "AAA" Size Batteries) for remote control



Report No.: SZEM160400278102

Page: 6 of 88

Operation Frequency each of channel(802.11b/g/n HT20)								
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency	
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz	
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz	
3	2422MHz	6	2437MHz	9	2452MHz			

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

For 802.11b/g/n (HT20):

Channel	Frequency
The Lowest channel	2412MHz
The Middle channel	2437MHz
The Highest channel	2462MHz



Report No.: SZEM160400278102

Page: 7 of 88

5.3 Test Environment and Mode

Operating Environment:	Operating Environment:					
Temperature:	25.0 °C					
Humidity:	55 % RH					
Atmospheric Pressure:	1015 mbar					
Test mode:						
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all					
	kind of data rate.					

5.4 Description of Support Units

The EUT has been tested independent unit.

5.5 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen Branch E&E Lab,

No. 1 Workshop, M-10, Middle Section, Science & Technology Park, Shenzhen, Guangdong, China. 518057.

Tel: +86 755 2601 2053 Fax: +86 755 2671 0594

No tests were sub-contracted.



Report No.: SZEM160400278102

Page: 8 of 88

5.6 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

•CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

· A2LA (Certificate No. 3816.01)

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory is accredited by the American Association for Laboratory Accreditation(A2LA). Certificate No. 3816.01.

VCCI

The 10m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: G-823, R-4188, T-1153 and C-2383 respectively.

• FCC – Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration No.: 556682.

Industry Canada (IC)

Two 3m Semi-anechoic chambers and the 10m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab have been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1, 4620C-2, 4620C-3.

5.7 Deviation from Standards

None.

5.8 Abnormalities from Standard Conditions

None.

5.9 Other Information Requested by the Customer

None.



Report No.: SZEM160400278102

Page: 9 of 88

5.10Equipment List

	Conducted Emission								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)			
1	Shielding Room	ZhongYu Electron	GB-88	SEM001-06	2016-05-13	2017-05-13			
2	LISN	Rohde & Schwarz	ENV216	SEM007-01	2015-10-09	2016-10-09			
3	LISN	ETS- LINDGREN	3816/2	SEM007-02	2016-04-25	2017-04-25			
4	8 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T8- 02	EMC0120	2015-08-30	2016-08-30			
5	4 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T4- 02	EMC0121	2015-08-30	2016-08-30			
6	2 Line ISN	Fischer Custom Communication s Inc.	FCC- TLISN-T2- 02	EMC0122	2015-08-30	2016-08-30			
7	EMI Test Receiver	Rohde & Schwarz	ESCI	SEM004-02	2016-04-25	2017-04-25			
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09			



Report No.: SZEM160400278102

Page: 10 of 88

	RE in Chamber								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)			
1	3m Semi-Anechoic Chamber	ETS- LINDGREN	N/A	SEM001-01	2016-05-13	2017-05-13			
2	EMI Test Receiver	Agilent Technologies	N9038A	SEM004-05	2015-09-16	2016-09-16			
3	BiConiLog Antenna (26-3000MHz)	ETS- LINDGREN	3142C	SEM003-01	2014-11-01	2017-11-01			
4	Double-ridged horn (1-18GHz)	ETS- LINDGREN	3117	SEM003-11	2015-10-17	2018-10-17			
5	Horn Antenna (18-26GHz)	ETS- LINDGREN	3160	SEM003-12	2014-11-24	2017-11-24			
6	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEM005-01	2016-04-25	2017-04-25			
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A			
8	DC Power Supply	Zhao Xin	RXN-305D	SEM011-02	2015-10-09	2016-10-09			
9	Loop Antenna	Beijing Daze	ZN30401	SEM003-09	2015-05-13	2018-05-13			

	RE in Chamber								
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal. date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)			
1	3m Semi-Anechoic Chamber	AUDIX	N/A	SEM001-02	2016-05-13	2017-05-13			
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEM004-04	2016-04-25	2017-04-25			
3	BiConiLog Antenna (26-3000MHz)	ETS-Lindgren	3142C	SEM003-02	2014-11-15	2017-11-15			
4	Amplifier (0.1-1300MHz)	HP	8447D	SEM005-02	2015-10-09	2016-10-09			
5	Horn Antenna (1-18GHz)	Rohde & Schwarz	HF907	SEM003-07	2015-06-14	2018-06-14			
6	Low Noise Amplifier	Black Diamond Series	BDLNA- 0118- 352810	SEM005-05	2015-10-09	2016-10-09			
7	Band filter	Amindeon	Asi 3314	SEM023-01	N/A	N/A			



Report No.: SZEM160400278102

Page: 11 of 88

	RF connected test							
Item	Test Equipment	uipment Manufacturer Model No. Inventory No		Inventory No.	Cal. date	Cal.Due date		
	- oot =qa.pot			miromeory no.	(yyyy-mm-dd)	(yyyy-mm-dd)		
1	DC Power Supply	ZhaoXin	RXN-305D	SEM011-02	2015-10-09	2016-10-09		
2	Spectrum Analyzer	Rohde &	FSP	SEM004-06	2015-10-17	2016-10-17		
	Opectrum Anaryzon	Schwarz	1 01	1 01 9210004 00		2010 10 17		
3	Signal Generator	Rohde &	SML03	SEM006-02	2016-04-25	2017-04-25		
3	Signal Generalor	Schwarz	SIVILOS	3LIVI000-02	2010-04-23	2017-04-23		
	Power Meter	Rohde &	NRVS	SEM014-02	2015-10-09	2016-10-09		
4	Fower Meter	Schwarz	INTIVO	3EIVIU14-02	2015-10-09	2010-10-09		



Report No.: SZEM160400278102

Page: 12 of 88

6 Test results and Measurement Data

6.1 Antenna Requirement

Standard requirement: 47 CFR Part 15C Section 15.203 /247(c)


15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

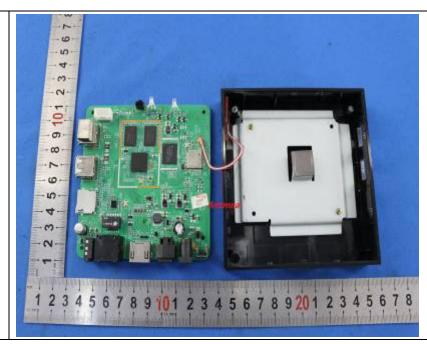

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is 3dBi.



Report No.: SZEM160400278102

Page: 13 of 88


6.2 Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.207			
Test Method:	ANSI C63.10: 2013 6.2.2			
Test Frequency Range:	150kHz to 30MHz			
Limit:	Francisco (MIII-)	Limit (d	lBuV)	
	Frequency range (MHz)	Quasi-peak	Average	
	0.15-0.5	66 to 56*	56 to 46*	
	0.5-5	56	46	
	5-30	60	50	
	* Decreases with the logarithm	n of the frequency.		
Test Procedure:	* Decreases with the logarithm of the frequency. 1) The mains terminal disturbance voltage test was conducted in a shielded room. 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50Ω/50μH + 5Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded. 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane, 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2. 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.			5Ω ound es to he EUT
				of 2.



Report No.: SZEM160400278102

Page: 14 of 88

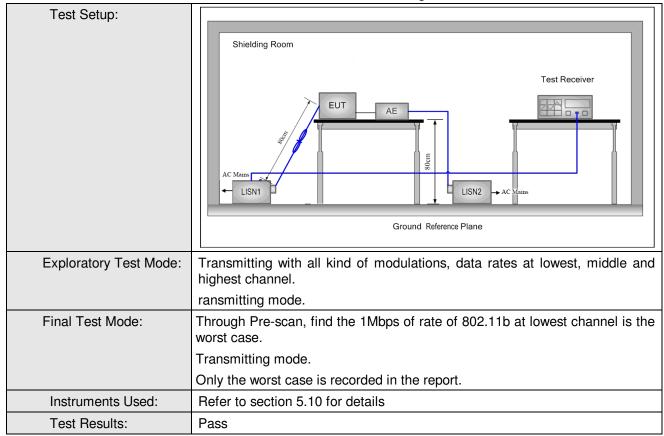



Report No.: SZEM160400278102


Page: 15 of 88

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Live Line:

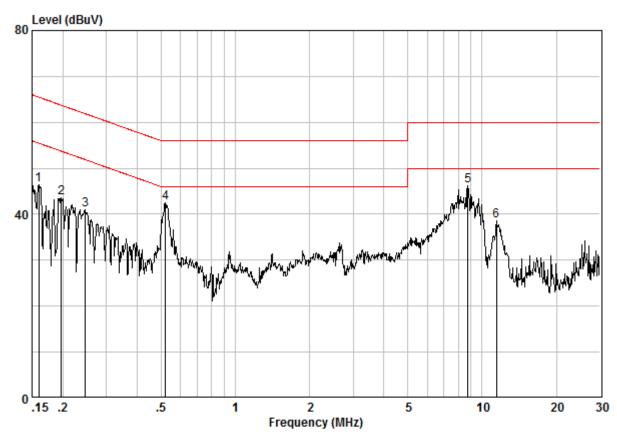

Site : Shielding Room Condition : CE LINE Job No, : 2781CR Test Mode : TX


	Freq	Cable Loss 1		Read Level		Limit Line		Remark
	MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1	0.15985	0.02	9.60	36.76	46.38	55.47	-9.10	Peak
2	0.19758	0.02	9.60	33.92	43.54	53.71	-10.17	Peak
3	0.24682	0.02	9.60	31.30	40.92	51.86	-10.94	Peak
4 @	0.52099	0.01	9.59	32.91	42.51	46.00	-3.49	Peak
5 @	8.776	0.01	9.70	36.52	46.23	50.00	-3.77	Peak
6	11.438	0.01	9.73	28.83	38.56	50.00	-11.44	Peak



Report No.: SZEM160400278102

Page: 16 of 88

Neutral Line:

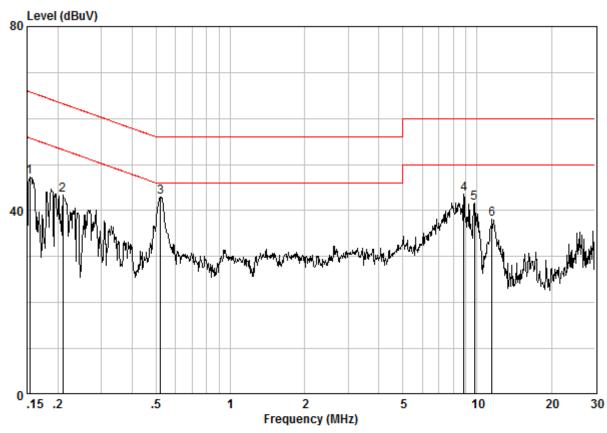

Site : Shielding Room Condition : CE NEUTRAL Job No, : 2781CR Test Mode : TX

		E	Cable				Limit		D1-
		rreq	ross	Factor	revel	revel	Line	Limit	Kemark
		MHz	dB	dB	dBuV	dBuV	dBuV	dB	
1		0.15403	0.02	9.62	37.61	47.24	55.78	-8.54	Peak
2		0.20944	0.02	9.62	33.79	43.42	53.23	-9.80	Peak
3	@	0.52099	0.01	9.63	33.26	42.90	46.00	-3.10	Peak
4	@	8.822	0.01	9.77	33.78	43.56	50.00	-6.44	Peak
5		9.757	0.01	9.79	31.81	41.60	50.00	-8.40	Peak
6		11.498	0.01	9.83	28.39	38.23	50.00	-11.77	Peak

Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level = Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEM160400278102

Page: 17 of 88

6.3 Conducted Peak Output Power

Test Requirement:	47 CFR Part 15C Section 15.247 (b)(3)		
Test Method:	ANSI C63.10 2013 11.9.1		
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane		
	Remark:		
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 5.10 for details		
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates		
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;		
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20)		
Limit:	30dBm		
Test Results:	Pass		



Report No.: SZEM160400278102

Page: 18 of 88

Pre-scan under all rate at lowest channel 1									
Mode	802.11b								
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps					
Power (dBm)	18.91	18.88	18.86	18.83					
Mode				802	2.11g				
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
Power (dBm)	22	21.97	21.94	21.92	21.89	21.86	21.83	21.81	
Mode	802.11n(HT20)								
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps	
Power (dBm)	21.28	21.26	21.23	21.21	21.19	21.15	21.13	21.10	

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20.



Report No.: SZEM160400278102

Page: 19 of 88

Measurement Data

Sarcincii Data			
	802.11b mod	de	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	18.92	30.00	Pass
Middle	18.56	30.00	Pass
Highest	18.27	30.00	Pass
	802.11g mod	de	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	22.00	30.00	Pass
Middle	21.78	30.00	Pass
Highest	21.48	30.00	Pass
	802.11n(HT20)r	mode	
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	21.28	30.00	Pass
Middle	21.11	30.00	Pass
Highest	20.66	30.00	Pass



Report No.: SZEM160400278102


Page: 20 of 88

Test plot as follows:

Test mode: 802.11b Test channel: Lowest





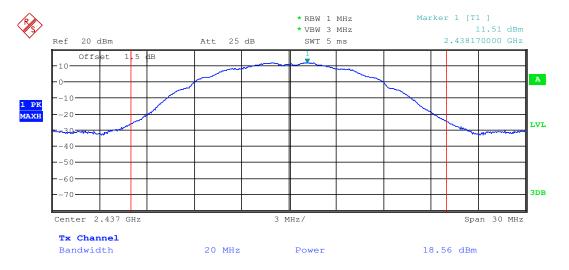





Report No.: SZEM160400278102

Page: 21 of 88

Test mode: 802.11b Test channel: Highest

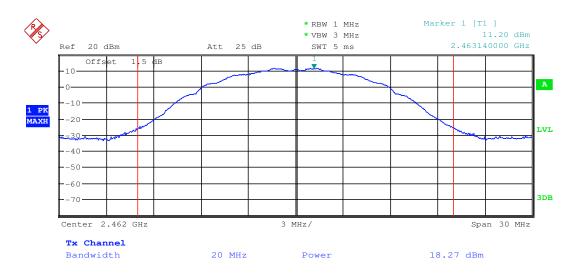









Report No.: SZEM160400278102

Page: 22 of 88

Test mode: 802.11g Test channel: Middle

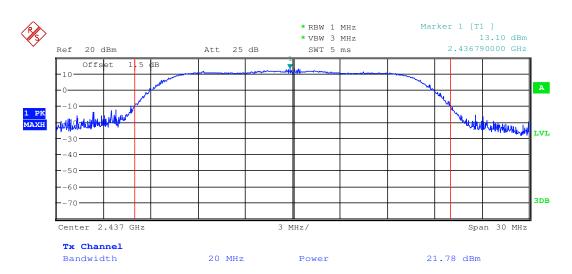



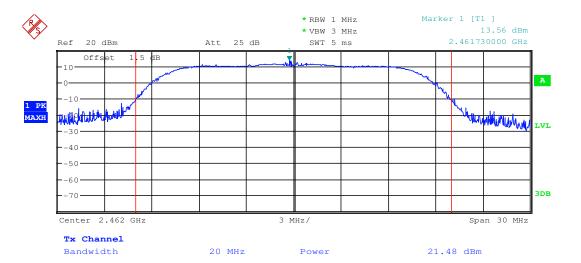





Report No.: SZEM160400278102

Page: 23 of 88

Test mode: 802.11n(HT20) Test channel: Lowest

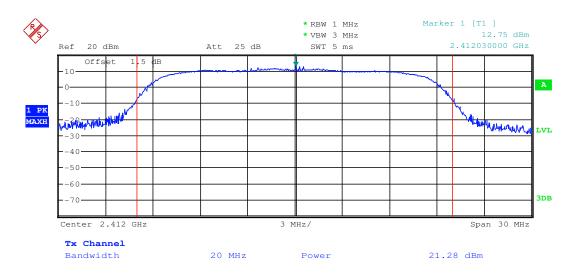



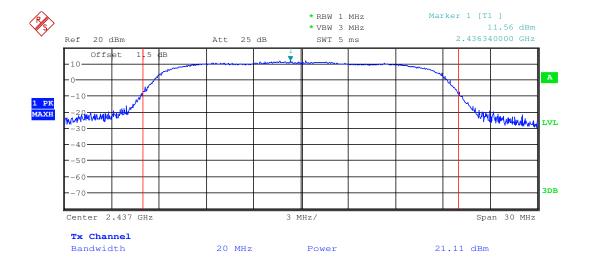




Report No.: SZEM160400278102

Page: 24 of 88



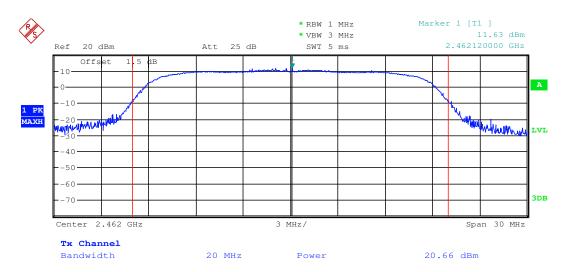




Report No.: SZEM160400278102

Page: 25 of 88

6.4 6dB Occupy Bandwidth

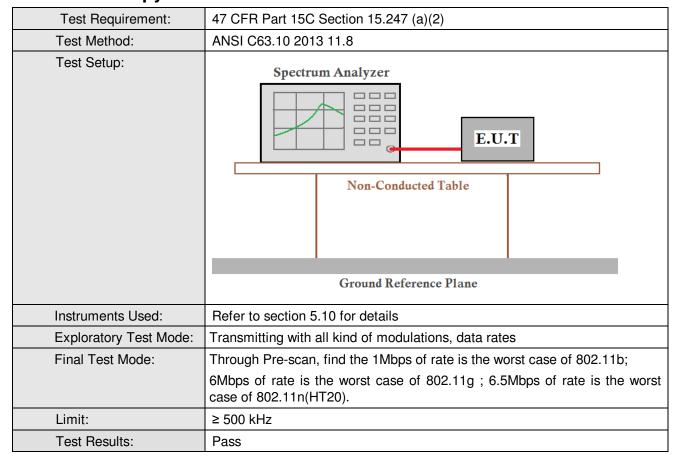



Report No.: SZEM160400278102

Page: 26 of 88

Measurement Data

Measurement Data								
	802.11b mode							
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result					
Lowest	8.13	≥500	Pass					
Middle	8.10	≥500	Pass					
Highest	8.13	≥500	Pass					
	802.11g mode							
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result					
Lowest	15.36	≥500	Pass					
Middle	15.36	≥500	Pass					
Highest	15.18	≥500	Pass					
	802.11n(HT20) mode							
Test channel	6dB Occupy Bandwidth (MHz)	Limit (kHz)	Result					
Lowest	15.51	≥500	Pass					
Middle	15.18	≥500	Pass					
Highest	15.18	≥500	Pass					




Report No.: SZEM160400278102


Page: 27 of 88

Test plot as follows:

Test mode:	802.11b	Test channel:	Lowest
1 CSt IIIOGC.	002.110	i Col Charlici.	LOWCSI

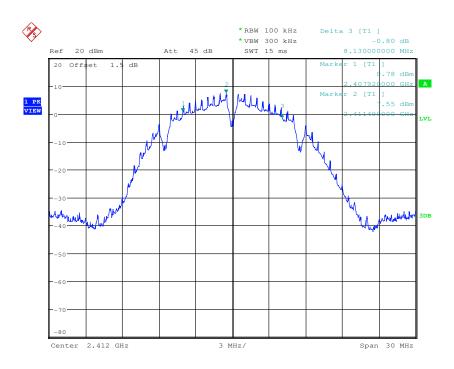



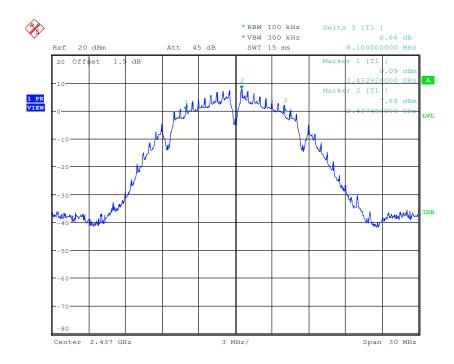






Report No.: SZEM160400278102

Page: 28 of 88

Test mode: 802.11b Test channel: Highest

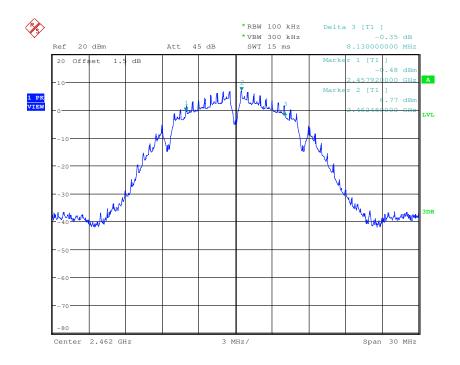



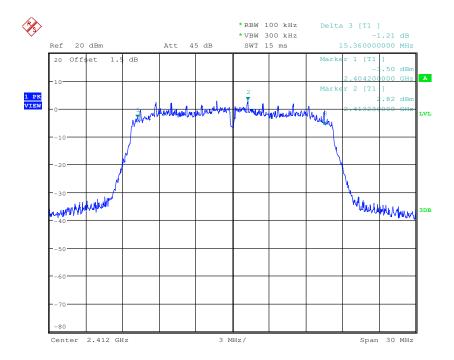





Report No.: SZEM160400278102

Page: 29 of 88

Test mode: 802.11g Test channel: Middle

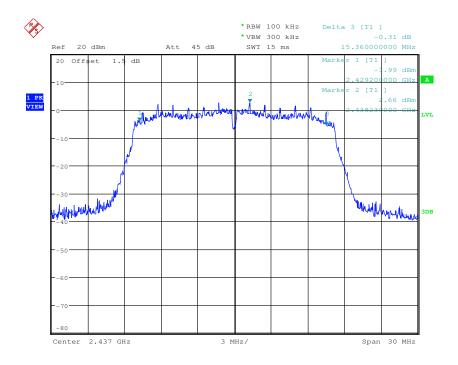



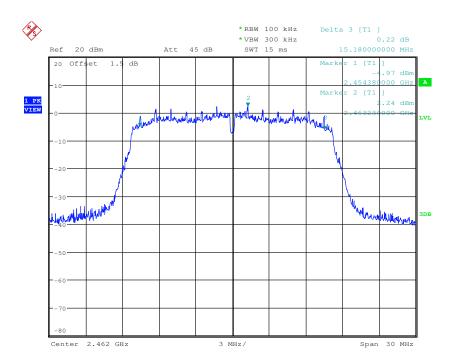





Report No.: SZEM160400278102

Page: 30 of 88

Test mode: 802.11n(HT20) Test channel: Lowest

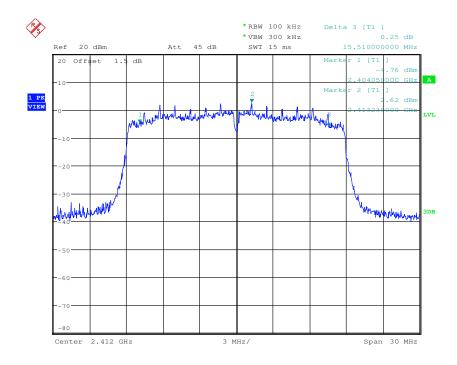



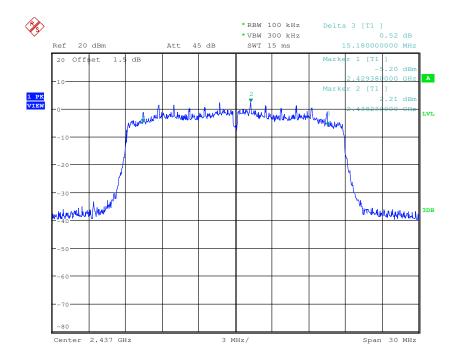




Report No.: SZEM160400278102

Page: 31 of 88

Test mode: 802.11n(HT20) Test channel: Highest

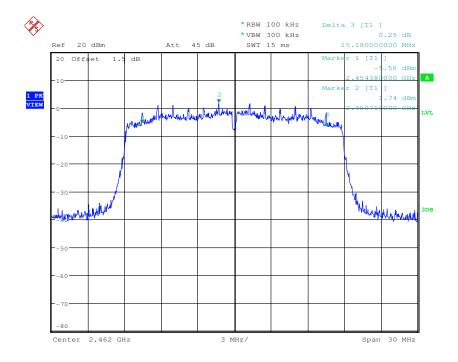



Report No.: SZEM160400278102

Page: 32 of 88

6.5 Power Spectral Density

Test Requirement:	47 CFR Part 15C Section 15.247 (e)			
Test Method:	ANSI C63.10 2013 11.10.2			
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane			
	Remark:			
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.			
Test Instruments:	Refer to section 5.10 for details			
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates			
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;			
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).			
Limit:	≤8.00dBm/3kHz			
Test Results:	Pass			



Report No.: SZEM160400278102

Page: 33 of 88

Measurement Data

weasurement bata								
	802.11b mode							
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result					
Lowest	-7.37	≤8.00	Pass					
Middle	-7.22	≤8.00	Pass					
Highest	-7.82	≤8.00	Pass					
	802.11g mode							
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result					
Lowest	-11.31	≤8.00	Pass					
Middle	-10.80	≤8.00	Pass					
Highest	-11.77	≤8.00	Pass					
	802.11n(HT20) mode							
Test channel	Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result					
Lowest	-11.77	≤8.00	Pass					
Middle	-11.51	≤8.00	Pass					
Highest	-11.65	≤8.00	Pass					




Report No.: SZEM160400278102

Page: 34 of 88

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

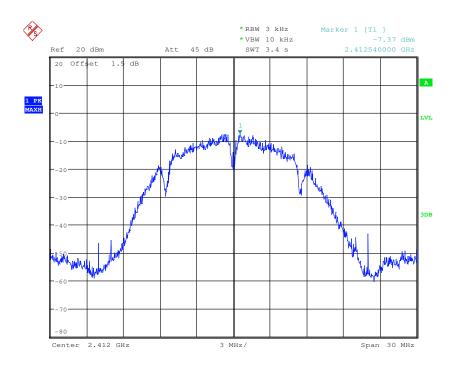

Test mode: 802.11b Test channel: Middle







Report No.: SZEM160400278102

Page: 35 of 88

Test mode: 802.11b Test channel: Highest

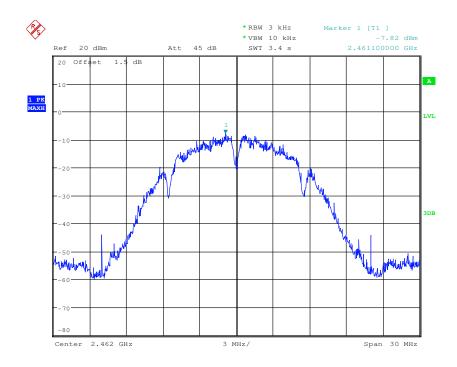




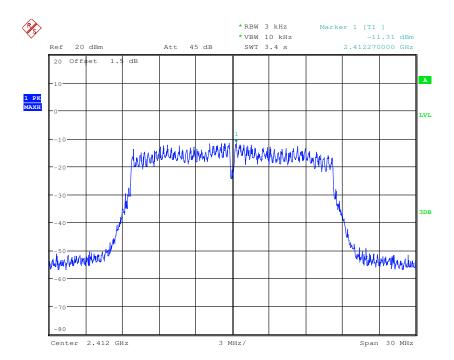




Report No.: SZEM160400278102

Page: 36 of 88

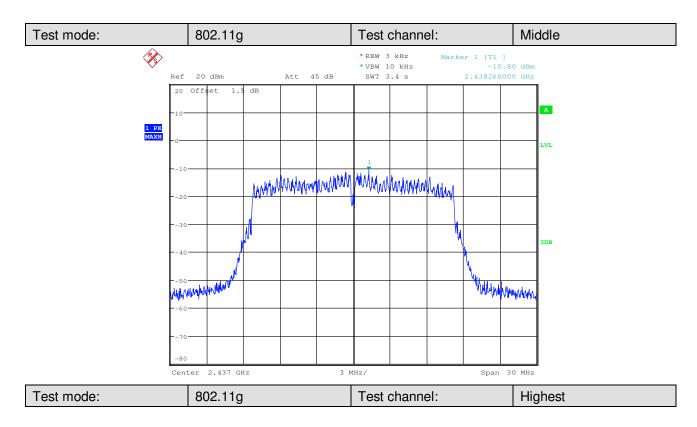

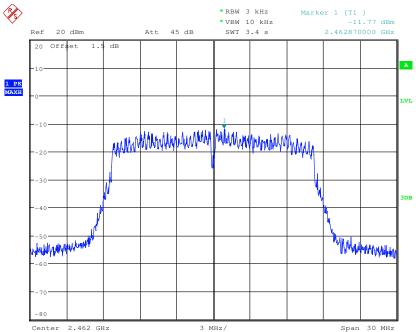





Report No.: SZEM160400278102

Page: 37 of 88

Test mode: 802.11n(HT20) Test channel: Lowest

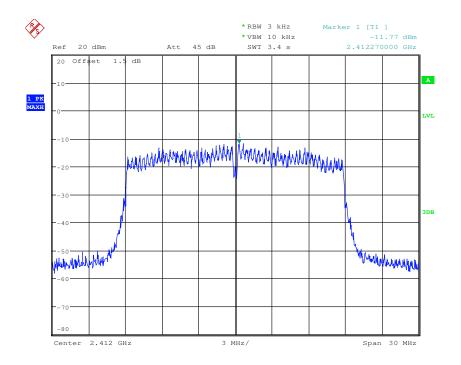



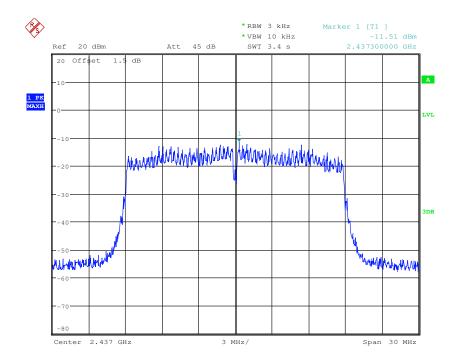




Report No.: SZEM160400278102

Page: 38 of 88

Test mode: 802.11n(HT20) Test channel: Highest

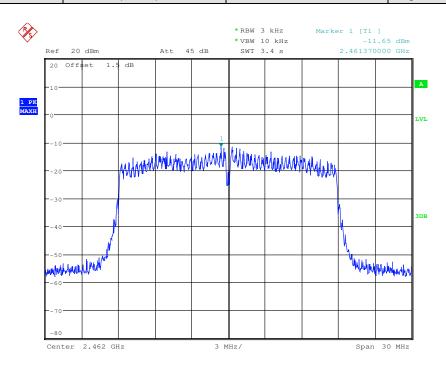



Report No.: SZEM160400278102

Page: 39 of 88

6.6 Band-edge for RF Conducted Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)						
Test Method:	ANSI C63.10 2013 11.13						
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates						
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;						
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread						
	spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Instruments Used:	Refer to section 5.10 for details						
Test Results:	Pass						





Report No.: SZEM160400278102


Page: 40 of 88

Test plot as follows:

Test mode: 802.11b Test channel: Lowest

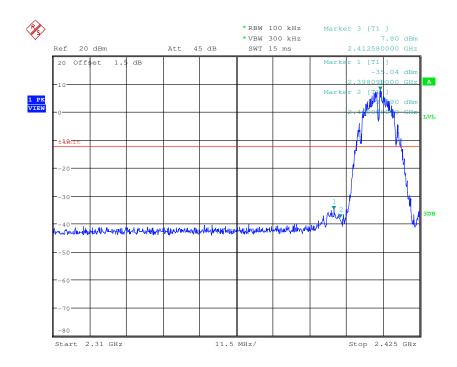



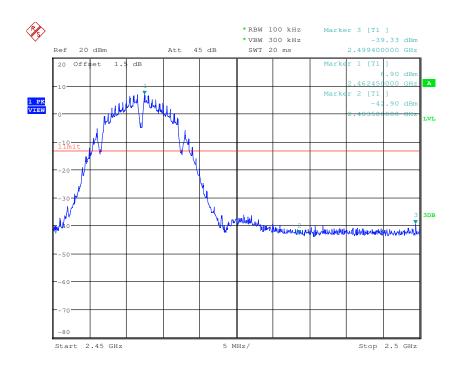





Report No.: SZEM160400278102

Page: 41 of 88

Test mode: 802.11g Test channel: Lowest

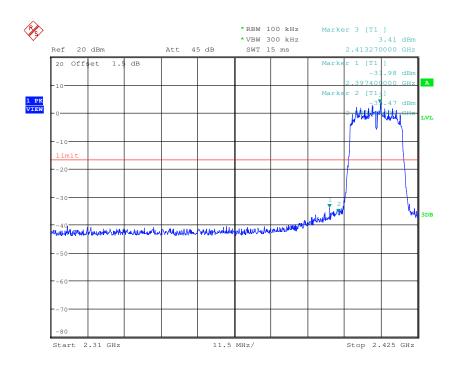



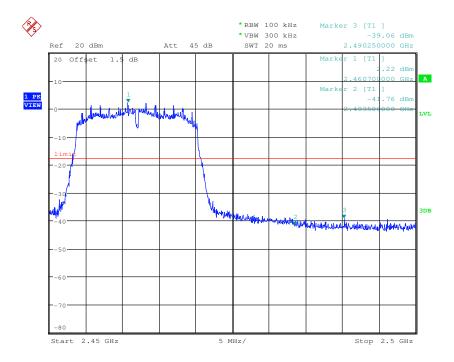






Report No.: SZEM160400278102

Page: 42 of 88

Test mode: 802.11n(HT20) Test channel: Lowest

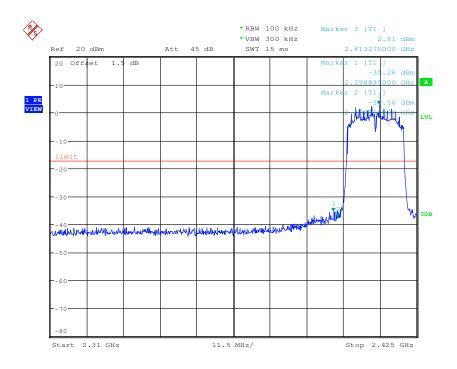



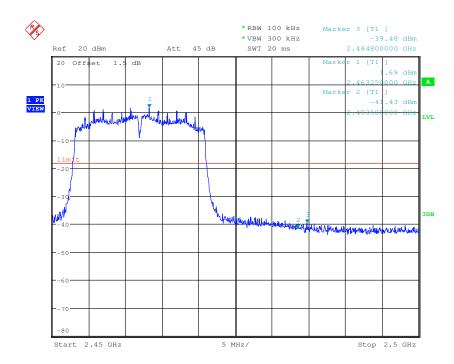



Report No.: SZEM160400278102

Page: 43 of 88

6.7 RF Conducted Spurious Emissions

Test Requirement:	47 CFR Part 15C Section 15.247 (d)
Test Method:	ANSI C63.10 2013 11.11
Test Setup:	Spectrum Analyzer E.U.T Non-Conducted Table Ground Reference Plane Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates
Final Test Mode:	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20).
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass





Report No.: SZEM160400278102

Page: 44 of 88

Test plot as follows:


Test mode: 802.11b Test channel: Lowest

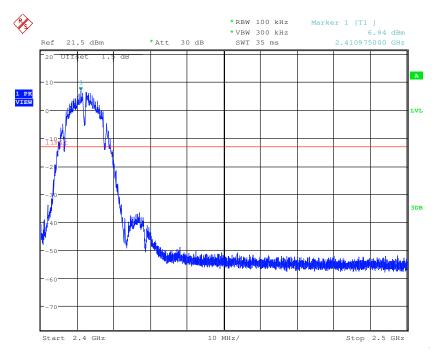

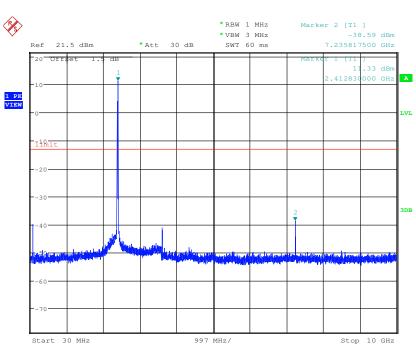




Report No.: SZEM160400278102

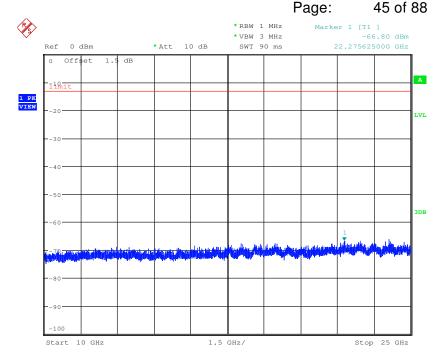





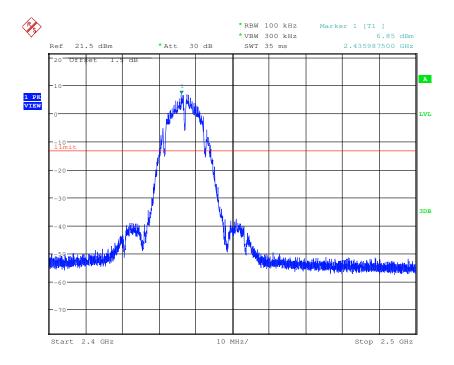



Report No.: SZEM160400278102

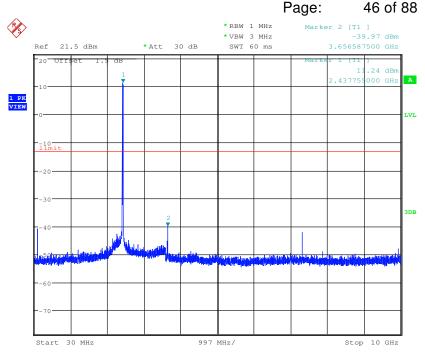

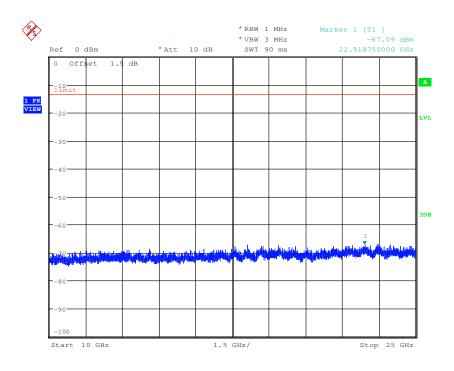





Report No.: SZEM160400278102

Page: 47 of 88


Test mode: 802.11b Test channel: Highest

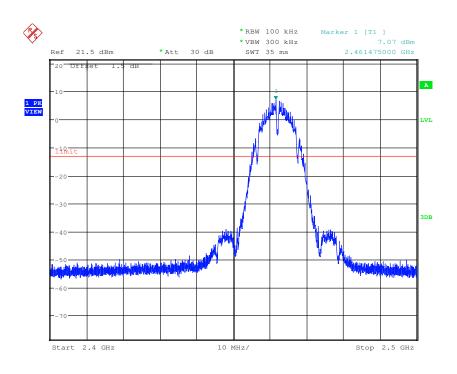

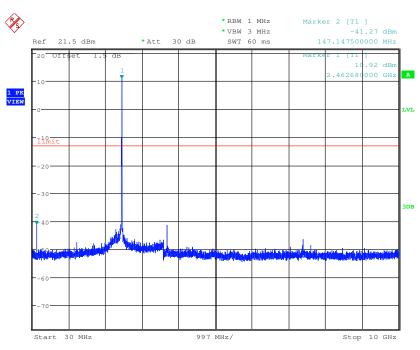




Report No.: SZEM160400278102

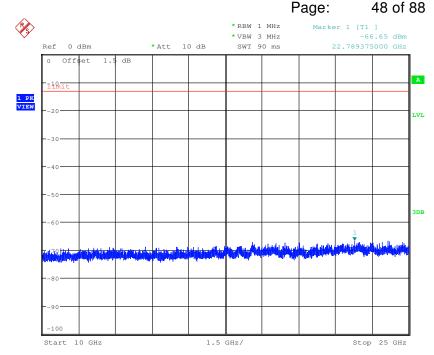





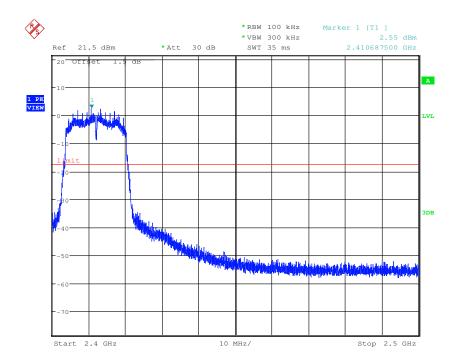



Report No.: SZEM160400278102

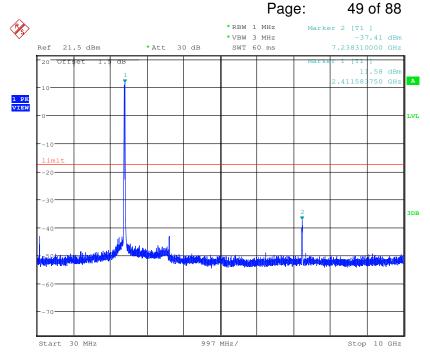

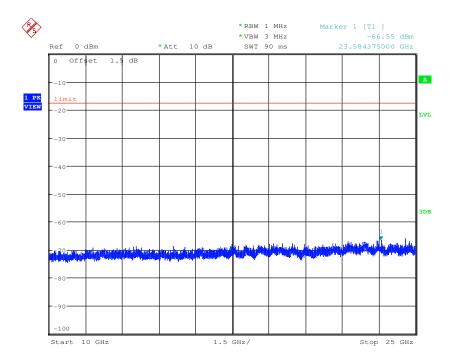





Report No.: SZEM160400278102

Page: 50 of 88

Test mode: 802.11g Test channel: Middle

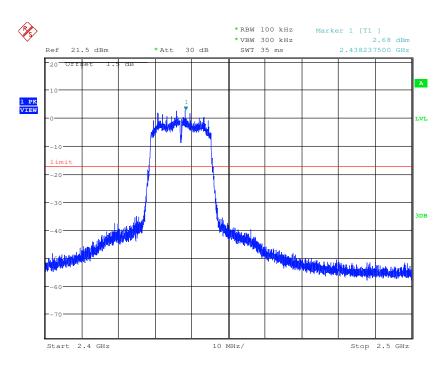


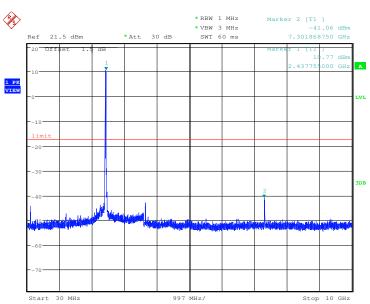



Report No.: SZEM160400278102



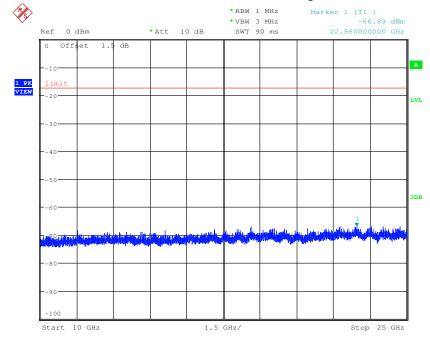





Report No.: SZEM160400278102

Page: 52 of 88


Test mode: 802.11g Test channel: Highest

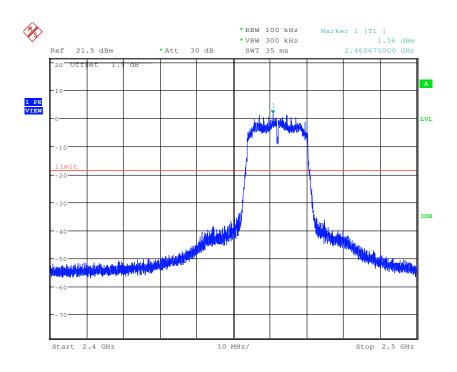

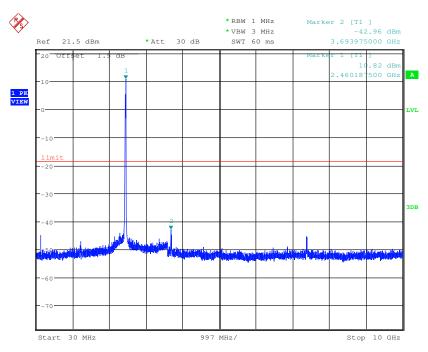




Report No.: SZEM160400278102

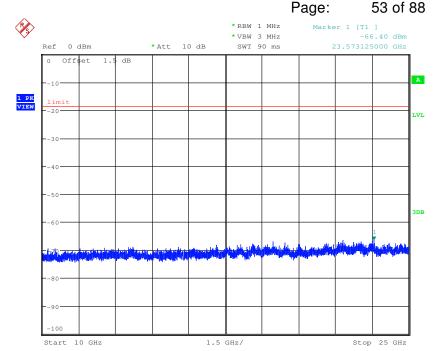





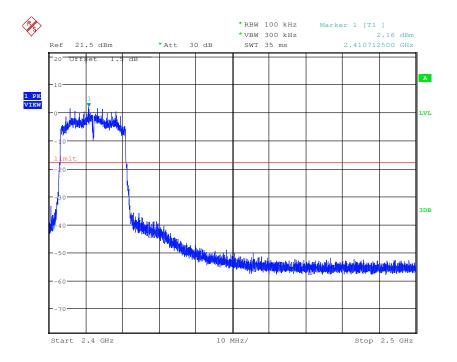



Report No.: SZEM160400278102

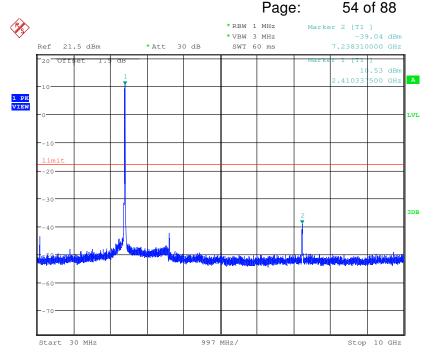

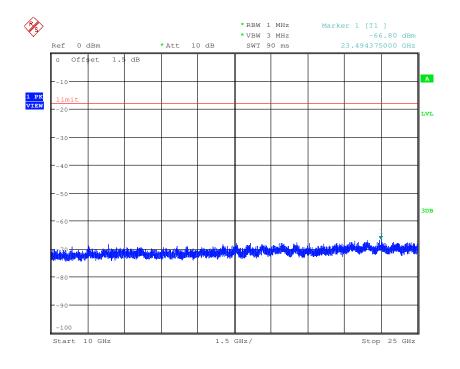





Report No.: SZEM160400278102

Page: 55 of 88

Test mode: 802.11n(HT20) Test channel: Middle

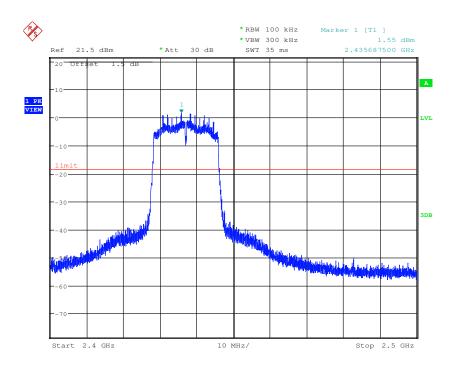


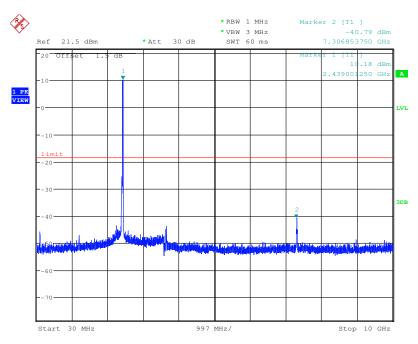



Report No.: SZEM160400278102

Page: 56 of 88

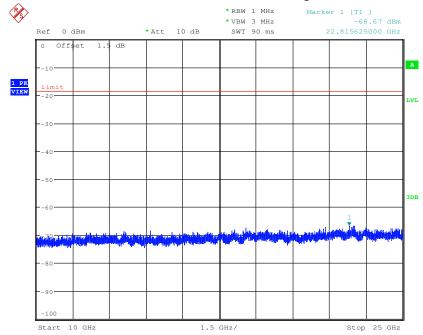





Report No.: SZEM160400278102

Page: 57 of 88

Test mode: 802.11n(HT20) Test channel: Highest

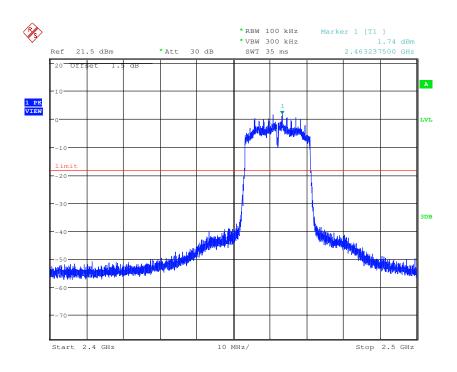


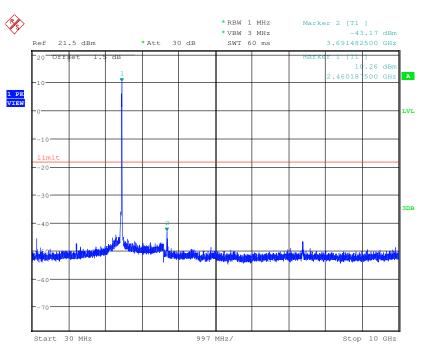



Report No.: SZEM160400278102

Page: 58 of 88

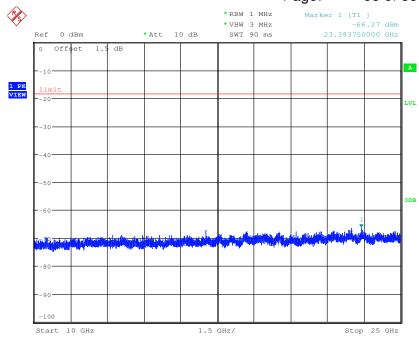

Remark:

Use 100kHz RBW to determine the relative limit in the band 2.4GHz to 2.5GHz, and Use 1MHz RBW to measure spurious emissions in the band 30MHz to 10GHz and 10GHz to 25GHz. The sweep points set to 30001.



Report No.: SZEM160400278102

Page: 59 of 88

6.8 Radiated Spurious Emissions


Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2013 11.12								
Test Site:	Measurement Distance: 3m (Semi-Anechoic Chamber)								
Receiver Setup:	Frequency	Detector	RBW	VBW	Remark				
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak				
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average				
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak				
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak				
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average				
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak				
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak				
	Above 1GHz	Peak	1MHz	3MHz	Peak				
	Above IGHZ	Peak	1MHz	10Hz	Average				
Limit:	Frequency	Field strength (microvolt/meter)	Limit (dBuV/m)	Remark	Measurement distance (m)				
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300				
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30				
	1.705MHz-30MHz	30	-	-	30				
	30MHz-88MHz	100	40.0	Quasi-peak	3				
	88MHz-216MHz	150	43.5	Quasi-peak	3				
	216MHz-960MHz	200	46.0	Quasi-peak	3				
	960MHz-1GHz	500	54.0	Quasi-peak	3				
	Above 1GHz	500	54.0	Average	3				
	Note: 15.35(b), Unless of	herwise specified,	the limit on	peak radio fre	equency				
	emissions is 20dB		-	_					
	applicable to the peak	equipment under	test. This p	eak limit app	olies to the total				
	emission level rad	ated by the device	Э.						



Report No.: SZEM160400278102

Page: 60 of 88

Test Setup:

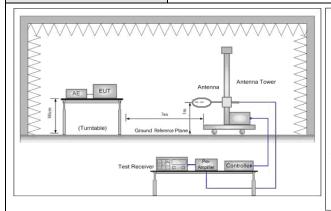

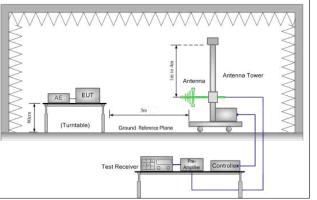


Figure 1. Below 30MHz

Figure 2. 30MHz to 1GHz

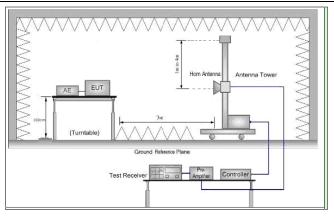


Figure 3. Above 1 GHz

Test Procedure:

- a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation
- c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters(for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.



Report No.: SZEM160400278102

Page: 61 of 88

	.
	g. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.
	h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel
	i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
	j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
	Transmitting mode
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case
	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case
	of 802.11n(HT20).
	For below 1GHz, through Pre-scan, find the 1Mbps of rate of 802.11b at lowest channel is the worst case.
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass




Report No.: SZEM160400278102

Page: 62 of 88

6.8.1 Radiated emission below 1GHz

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

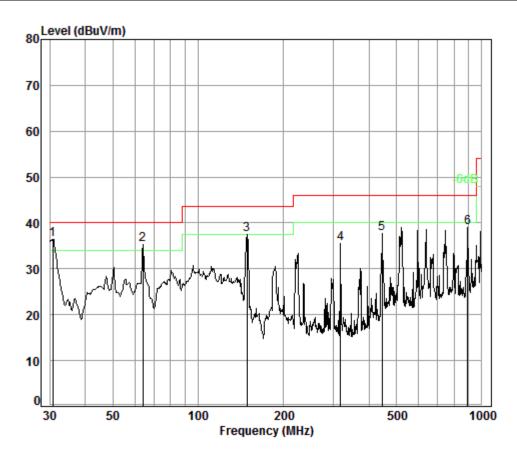

Condition: 3m Vertical

Job No. : 2781CR


Test mode: TX


	Freq	Cable Loss		Preamp Factor				Over Limit
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 pp	30.75	0.60	18.51	27.35	44.60	36.36	40.00	-3.64
2	63.98	0.80	7.07	27.26	54.70	35.31	40.00	-4.69
3	148.44	1.31	9.16	26.91	54.02	37.58	43.50	-5.92
4	317.70	1.96	14.46	26.54	45.73	35.61	46.00	-10.39
5	444.85	2.39	16.78	27.42	46.04	37.79	46.00	-8.21
6	890.73	3.56	23.05	26.82	39.28	39.07	46.00	-6.93



Report No.: SZEM160400278102

Page: 63 of 88



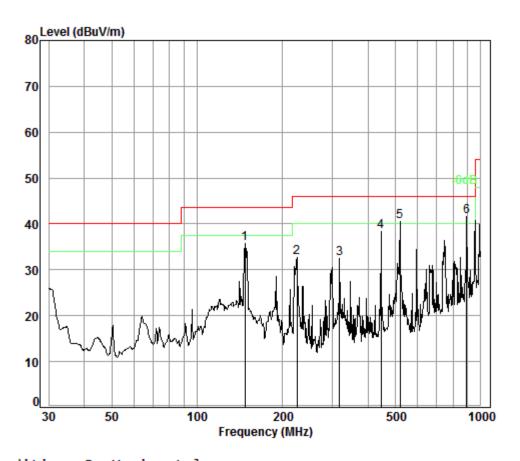

Condition: 3m Horizontal

Job No. : 2781CR

Test mode: TX

	Freq			Preamp Factor				Over Limit
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1	147.40	1.31	9.07	26.92	52.26	35.72	43.50	-7.78
2	225.31	1.55	11.41	26.61	46.34	32.69	46.00	-13.31
3	317.70	1.96	14.46	26.54	42.60	32.48	46.00	-13.52
4	444.85	2.39	16.78	27.42	46.65	38.40	46.00	-7.60
5	519.06	2.62	18.21	27.67	47.45	40.61	46.00	-5.39
6 pp	890.73	3.56	23.05	26.82	41.93	41.72	46.00	-4.28



Report No.: SZEM160400278102

Page: 64 of 88

6.8.2 Transmitter emission above 1GHz

Test mode: 802.11b Test channel: Lowest Remark: Peak

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3770.567	32.78	7.73	38.47	45.10	47.14	74	-26.86	Vertical
4824.000	34.12	8.90	38.75	49.05	53.32	74	-20.68	Vertical
5999.562	34.70	10.56	38.96	45.62	51.92	74	-22.08	Vertical
7236.000	35.58	10.69	37.63	42.43	51.07	74	-22.93	Vertical
9648.000	37.10	12.52	36.29	35.21	48.54	74	-25.46	Vertical
12603.270	37.90	14.44	37.75	38.18	52.77	74	-21.23	Vertical
3610.398	32.14	7.67	38.41	45.52	46.92	74	-27.08	Horizontal
4824.000	34.12	8.90	38.75	49.49	53.76	74	-20.24	Horizontal
5982.226	34.66	10.51	38.96	45.08	51.29	74	-22.71	Horizontal
7236.000	35.58	10.69	37.63	41.16	49.80	74	-24.20	Horizontal
9648.000	37.10	12.52	36.29	35.58	48.91	74	-25.09	Horizontal
12639.790	37.92	14.55	37.79	38.95	53.63	74	-20.37	Horizontal

Test mode:	802.1	1b	Test cha	annel:	Middle Remark:		Peak	
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3652.432	32.31	7.69	38.43	45.54	47.11	74	-26.89	Vertical
4874.000	34.17	8.97	38.76	49.24	53.62	74	-20.38	Vertical
6069.413	34.74	10.47	38.87	44.87	51.21	74	-22.79	Vertical
7311.000	35.54	10.72	37.59	44.11	52.78	74	-21.22	Vertical
9748.000	37.10	12.58	36.16	38.73	52.25	74	-21.75	Vertical
12530.530	37.83	14.24	37.68	39.12	53.51	74	-20.49	Vertical
3694.956	32.49	7.70	38.44	44.12	45.87	74	-28.13	Horizontal
4874.000	34.17	8.97	38.76	48.41	52.79	74	-21.21	Horizontal
5999.562	34.70	10.56	38.96	45.26	51.56	74	-22.44	Horizontal
7311.000	35.54	10.72	37.59	44.24	52.91	74	-21.09	Horizontal
9748.000	37.10	12.58	36.16	38.54	52.06	74	-21.94	Horizontal
12603.270	37.90	14.44	37.75	38.67	53.26	74	-20.74	Horizontal



Report No.: SZEM160400278102

Page: 65 of 88

Test mode: 802.11		11b	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3770.567	32.78	7.73	38.47	44.86	46.90	74	-27.10	Vertical
4924.000	34.22	9.04	38.77	48.62	53.11	74	-20.89	Vertical
5999.562	34.70	10.56	38.96	45.54	51.84	74	-22.16	Vertical
7386.000	35.51	10.75	37.56	43.75	52.45	74	-21.55	Vertical
9848.000	37.15	12.63	36.03	39.57	53.32	74	-20.68	Vertical
12566.850	37.87	14.34	37.72	38.18	52.67	74	-21.33	Vertical
3825.521	32.93	7.75	38.49	44.68	46.87	74	-27.13	Horizontal
4924.000	34.22	9.04	38.77	47.75	52.24	74	-21.76	Horizontal
6034.386	34.72	10.52	38.91	45.66	51.99	74	-22.01	Horizontal
7386.000	35.51	10.75	37.56	43.80	52.50	74	-21.50	Horizontal
9848.000	37.15	12.63	36.03	39.50	53.25	74	-20.75	Horizontal
12566.850	37.87	14.34	37.72	37.68	52.17	74	-21.83	Horizontal

Test mode:	802.	2.11g Test channel: Lowest Remark:		annel:	Remark	:	Peak	
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3825.521	32.93	7.75	38.49	45.31	47.50	74	-26.50	Vertical
4824.000	34.12	8.90	38.75	47.50	51.77	74	-22.23	Vertical
6104.642	34.75	10.42	38.82	45.35	51.70	74	-22.30	Vertical
7236.000	35.58	10.69	37.63	42.76	51.40	74	-22.60	Vertical
9648.000	37.10	12.52	36.29	36.74	50.07	74	-23.93	Vertical
12530.530	37.83	14.24	37.68	38.54	52.93	74	-21.07	Vertical
3803.444	32.90	7.74	38.49	45.59	47.74	74	-26.26	Horizontal
4824.000	34.12	8.90	38.75	46.23	50.50	74	-23.50	Horizontal
5879.252	34.40	10.22	38.94	45.98	51.66	74	-22.34	Horizontal
7236.000	35.58	10.69	37.63	42.01	50.65	74	-23.35	Horizontal
9648.000	37.10	12.52	36.29	34.92	48.25	74	-25.75	Horizontal
12639.790	37.92	14.55	37.79	38.85	53.53	74	-20.47	Horizontal



Report No.: SZEM160400278102

Page: 66 of 88

Test mode: 802.11g Test channel: Middle Remark: Peak

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3847.726	32.95	7.76	38.50	44.76	46.97	74	-27.03	Vertical
4874.000	34.17	8.97	38.76	46.57	50.95	74	-23.05	Vertical
6087.002	34.74	10.45	38.85	45.34	51.68	74	-22.32	Vertical
7311.000	35.54	10.72	37.59	42.97	51.64	74	-22.36	Vertical
9748.000	37.10	12.58	36.16	38.90	52.42	74	-21.58	Vertical
12603.270	37.90	14.44	37.75	38.80	53.39	74	-20.61	Vertical
3903.804	33.01	7.78	38.52	45.69	47.96	74	-26.04	Horizontal
4874.000	34.17	8.97	38.76	45.55	49.93	74	-24.07	Horizontal
6104.642	34.75	10.42	38.82	45.78	52.13	74	-21.87	Horizontal
7311.000	35.54	10.72	37.59	41.56	50.23	74	-23.77	Horizontal
9748.000	37.10	12.58	36.16	40.18	53.70	74	-20.30	Horizontal
12566.850	37.87	14.34	37.72	38.80	53.29	74	-20.71	Horizontal

Test mode:	80	2.11g	Test ch	annel:	Highest	Remark	:	Peak
Frequency (MHz)	Antenr factors (dB/m	s loss	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3792.453	32.87	7.74	38.48	45.21	47.34	74	-26.66	Vertical
4924.000	34.22	9.04	38.77	46.73	51.22	74	-22.78	Vertical
6087.002	34.74	10.45	38.85	45.02	51.36	74	-22.64	Vertical
7386.000	35.51	10.75	37.56	40.20	48.90	74	-25.10	Vertical
9848.000	37.15	12.63	36.03	38.79	52.54	74	-21.46	Vertical
12530.530	37.83	14.24	37.68	38.88	53.27	74	-20.73	Vertical
3858.877	32.96	7.76	38.51	45.07	47.28	74	-26.72	Horizontal
4924.000	34.22	9.04	38.77	45.94	50.43	74	-23.57	Horizontal
6104.642	34.75	10.42	38.82	45.79	52.14	74	-21.86	Horizontal
7386.000	35.51	10.75	37.56	39.72	48.42	74	-25.58	Horizontal
9848.000	37.15	12.63	36.03	39.65	53.40	74	-20.60	Horizontal
12603.270	37.90	14.44	37.75	37.87	52.46	74	-21.54	Horizontal



Report No.: SZEM160400278102

Page: 67 of 88

Test mode:	802.11n(HT20)	Test channel:	Lowest	Remark:	Peak
	\ \ - /				

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3770.567	32.78	7.73	38.47	45.55	47.59	74	-26.41	Vertical
4824.000	34.12	8.90	38.75	45.22	49.49	74	-24.51	Vertical
6087.002	34.74	10.45	38.85	46.14	52.48	74	-21.52	Vertical
7236.000	35.58	10.69	37.63	45.06	53.70	74	-20.30	Vertical
9648.000	37.10	12.52	36.29	34.63	47.96	74	-26.04	Vertical
12566.850	37.87	14.34	37.72	38.42	52.91	74	-21.09	Vertical
3803.444	32.90	7.74	38.49	44.84	46.99	74	-27.01	Horizontal
4824.000	34.12	8.90	38.75	46.35	50.62	74	-23.38	Horizontal
5999.562	34.70	10.56	38.96	45.93	52.23	74	-21.77	Horizontal
7236.000	35.58	10.69	37.63	41.65	50.29	74	-23.71	Horizontal
9648.000	37.10	12.52	36.29	33.99	47.32	74	-26.68	Horizontal
12676.420	37.94	14.65	37.82	38.05	52.82	74	-21.18	Horizontal

Test mode:	802.11n(HT20)	Test channel:	Middle	Remark:	Peak
------------	---------------	---------------	--------	---------	------

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3814.467	32.91	7.75	38.49	45.44	47.61	74	-26.39	Vertical
4874.000	34.17	8.97	38.76	45.61	49.99	74	-24.01	Vertical
6051.874	34.73	10.49	38.89	44.91	51.24	74	-22.76	Vertical
7311.000	35.54	10.72	37.59	44.56	53.23	74	-20.77	Vertical
9748.000	37.10	12.58	36.16	39.30	52.82	74	-21.18	Vertical
12603.270	37.90	14.44	37.75	38.56	53.15	74	-20.85	Vertical
3803.444	32.90	7.74	38.49	45.09	47.24	74	-26.76	Horizontal
4874.000	34.17	8.97	38.76	45.33	49.71	74	-24.29	Horizontal
6104.642	34.75	10.42	38.82	44.89	51.24	74	-22.76	Horizontal
7311.000	35.54	10.72	37.59	44.32	52.99	74	-21.01	Horizontal
9748.000	37.10	12.58	36.16	39.24	52.76	74	-21.24	Horizontal
12676.420	37.94	14.65	37.82	39.02	53.79	74	-20.21	Horizontal



Report No.: SZEM160400278102

Page: 68 of 88

Test mode:	802.1	1n(HT20)	Test ch	annel:	Highest	Remark	:	Peak
		<u> </u>						
Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
3803.444	32.90	7.74	38.49	44.80	46.95	74	-27.05	Vertical
4924.000	34.22	9.04	38.77	47.08	51.57	74	-22.43	Vertical
5999.562	34.70	10.56	38.96	45.67	51.97	74	-22.03	Vertical
7386.000	35.51	10.75	37.56	44.86	53.56	74	-20.44	Vertical
9848.000	37.15	12.63	36.03	39.39	53.14	74	-20.86	Vertical
12676.420	37.94	14.65	37.82	38.20	52.97	74	-21.03	Vertical
3814.467	32.91	7.75	38.49	44.51	46.68	74	-27.32	Horizontal
4924.000	34.22	9.04	38.77	46.62	51.11	74	-22.89	Horizontal
6016.949	34.71	10.54	38.94	44.75	51.06	74	-22.94	Horizontal
7386.000	35.51	10.75	37.56	41.16	49.86	74	-24.14	Horizontal
9848.000	37.15	12.63	36.03	39.21	52.96	74	-21.04	Horizontal
12603.270	37.90	14.44	37.75	38.37	52.96	74	-21.04	Horizontal

Remark:

- 1) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:
 - Final Test Level = Receiver Reading + Antenna Factor + Cable Factor Preamplifier Factor
- 2) Scan from 9kHz to 25GHz, The disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.
- 3) As shown in this section, for frequencies above 1GHz, the field strength limits are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. So, only the peak measurements were shown in the report.




Report No.: SZEM160400278102

Page: 69 of 88

6.9 Restricted bands around fundamental frequency

Test Requirement:	47 CFR Part 15C Section 15.209 and 15.205								
Test Method:	ANSI C63.10 2013 11.12	ANSI C63.10 2013 11.12							
Test Site:	Measurement Distance: 3r	n (Semi-Anechoic Chambe	er)						
Limit:	Frequency	Limit (dBuV/m @3m)	Remark						
	30MHz-88MHz	40.0	Quasi-peak Value						
	88MHz-216MHz	43.5	Quasi-peak Value						
	216MHz-960MHz	46.0	Quasi-peak Value						
	960MHz-1GHz	54.0	Quasi-peak Value						
	Above 1011=	54.0	Average Value						
	Above 1GHz	74.0	Peak Value						
Test Setup:									

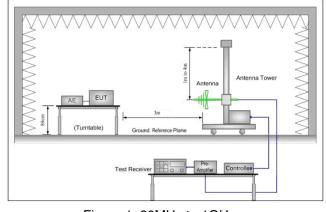

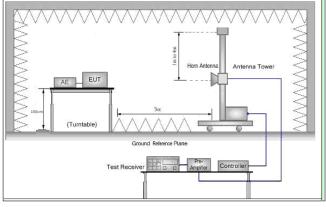


Figure 1. 30MHz to 1GHz

Figure 2. Above 1 GHz



Report No.: SZEM160400278102

Page: 70 of 88

Test Procedure:	a. For below 1GHz, the EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	b. For above 1GHz, the EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
	c. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
	d. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
	e. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
	f. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
	g. Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel
	h. Test the EUT in the lowest channel , the Highest channel
	i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, And found the X axis positioning which it is worse case.
	j. Repeat above procedures until all frequencies measured was complete.
Exploratory Test Mode:	Transmitting with all kind of modulations, data rates.
	Transmitting mode
Final Test Mode:	Pretest the EUT at Transmitting mode, found the Transmitting mode which it is worse case
	Through Pre-scan, find the 1Mbps of rate is the worst case of 802.11b;
	6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20)
	Only the worst case is recorded in the report.
Instruments Used:	Refer to section 5.10 for details
Test Results:	Pass
-	




Report No.: SZEM160400278102

Page: 71 of 88

Test plot as follows:

Worse case mode: 802.11b Test channel: Lowest Remark: Peak Vertical

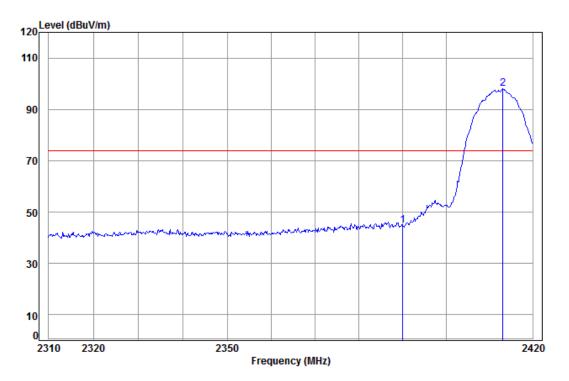

Condition: 3m Vertical

Job No: : 2781CR

Mode: : 2412 Band edge

: B


Cable Ant Preamp Limit 0ver Read Limit Remark Freq Loss Factor Factor Level Level Line MHz dB dB/m dBuV dBuV/m dBuV/m 38.11 48.99 2390.00 5.34 28.57 44.79 74.00 -29.21 2 pp 2413.14 5.36 28.66 38.11 102.09 98.00 74.00 24.00



Report No.: SZEM160400278102

Page: 72 of 88

Worse case mode: 802.11b Test channel: Lowest Remark: Peak Horizontal

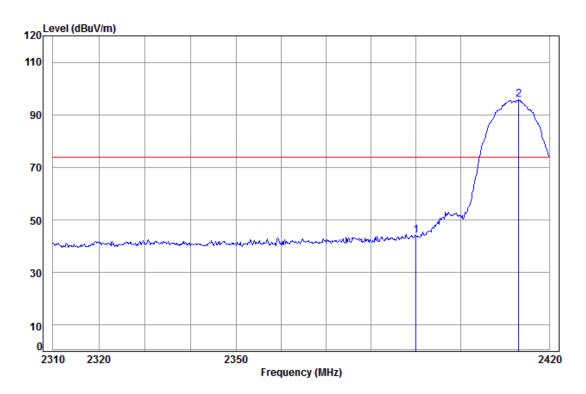

Condition: 3m Horizontal

Job No: : 2781CR

Mode: : 2412 Band edge

: B


Cable Ant Preamp Read Limit 0ver Level Freq Loss Factor Factor Limit Remark Level Line dBuV dBuV/m dBuV/m MHz dB dB dB/m 1 2390.00 5.34 28.57 38.11 48.49 44.29 74.00 -29.71 2413.14 5.36 28.66 38.11 99.76 95.67 74.00 21.67



Report No.: SZEM160400278102

Page: 73 of 88

Worse case mode: 802.11b Test channel: Highest Remark: Peak Vertical

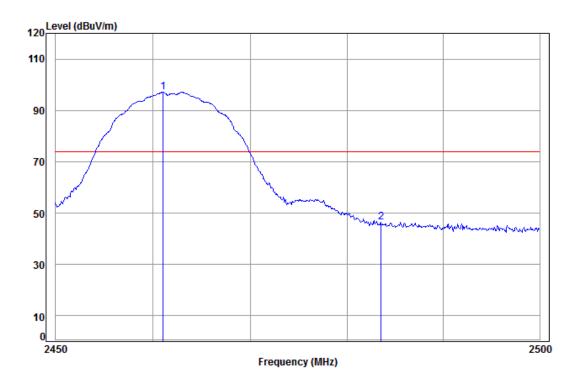

Condition: 3m Vertical Job No: : 2781CR

Mode: : 2462 Band edge

: B


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Line Limit Remark Level Level MHz dB dB/m dB dBuV dBuV/m dBuV/m 2461.01 5.39 28.88 38.12 100.91 97.06 74.00 23.06 1 pp 2483.50 5.41 28.98 38.12 50.14 46.41 74.00 -27.59



Report No.: SZEM160400278102

Page: 74 of 88

Worse case mode: 802.11g Test channel: Highest Remark: Peak Horizontal

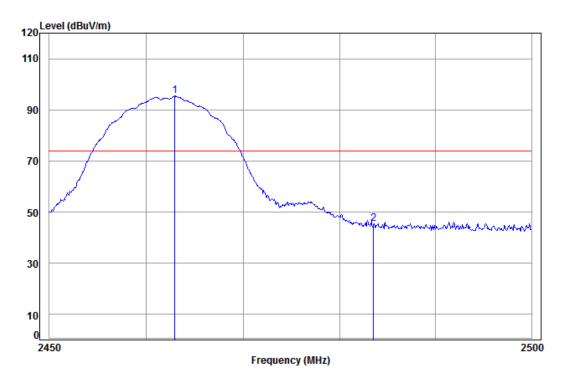

Condition: 3m Horizontal

Job No: : 2781CR

Mode: : 2462 Band edge

: B


	Freq			Preamp Factor					
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	 _
	2462.90 2483.50								



Report No.: SZEM160400278102

Page: 75 of 88

Worse case mode: 802.11g Test channel: Lowest Remark: Peak Vertical

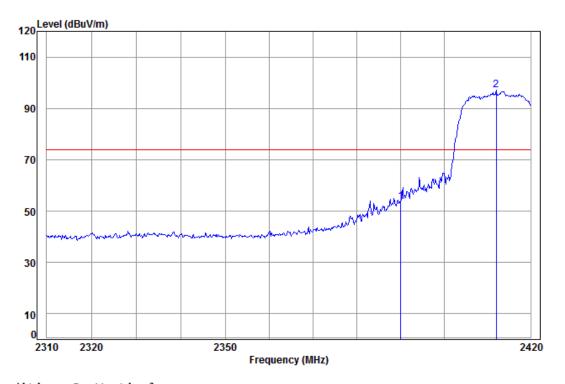

Condition: 3m Vertical

Job No: : 2781CR

Mode: : 2412 Band edge

: G


Cable Ant Preamp Limit 0ver Read Limit Remark Freq Loss Factor Factor Level Level Line MHz dB dB/m dBuV dBuV/m dBuV/m 2390.00 5.34 28.57 38.11 57.75 53.55 74.00 -20.45 2 pp 2412.02 5.35 28.66 38.11 101.18 97.08 74.00 23.08



Report No.: SZEM160400278102

Page: 76 of 88

Worse case mode: 802.11g Test channel: Lowest Remark: Peak Horizontal

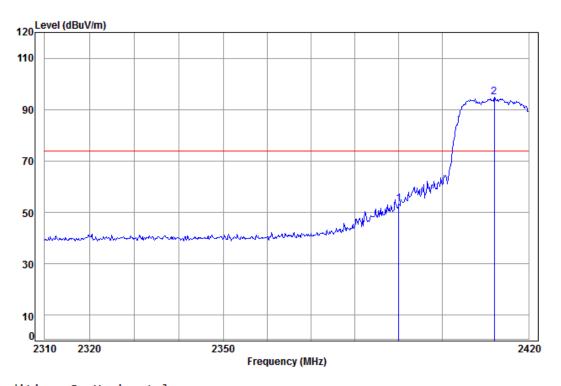

Condition: 3m Horizontal

Job No: : 2781CR

Mode: : 2412 Band edge

: G


	Freq			Preamp Factor					Remark
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
	2390.00								



Report No.: SZEM160400278102

Page: 77 of 88

802.11g Test channel: Highest Remark: Peak Vertical Worse case mode:

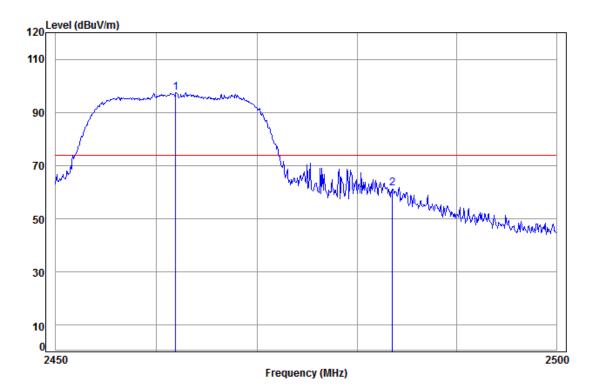

Condition: 3m Vertical

Job No: : 2781CR

: 2462 Band edge Mode:


	. 4	Cabla	Λnt	Dnoamn	Pood		Limit	Oven		
	Freq								Remark	
_	<u> </u>									
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2461.91	5.39	28.89	38.12	101.25	97.41	74.00	23.41		
2	2483.50	5.41	28.98	38.12	65.30	61.57	74.00	-12.43		



Report No.: SZEM160400278102

Page: 78 of 88

Worse case mode: 802.11g Test channel: Highest Remark: Peak Horizontal

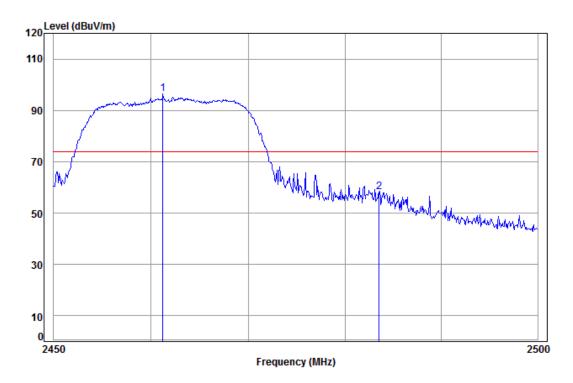

Condition: 3m Horizontal

Job No: : 2781CR

Mode: : 2462 Band edge

: G


Cable Ant Preamp Limit 0ver Read Limit Remark Freq Loss Factor Factor Level Level Line MHz dB dB/m dBuV dBuV/m dBuV/m 2461.21 5.39 28.88 38.12 100.18 96.33 74.00 22.33 1 pp 2483.50 5.41 28.98 38.12 61.85 58.12 74.00 -15.88



Report No.: SZEM160400278102

Page: 79 of 88

Worse case mode: 802.11g Test channel: Highest Remark: Average Vertical

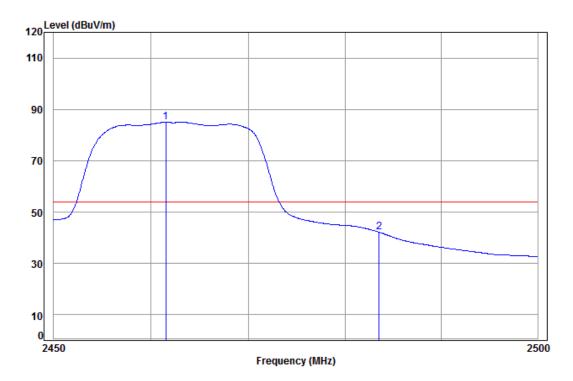

Condition: 3m Vertical

Job No: : 2781CR

Mode: : 2462 Band edge

: G


Cable Ant Preamp Limit 0ver Read Limit Remark Freq Loss Factor Factor Level Level Line MHz dB dB/m dBuV dBuV/m dBuV/m 2461.51 5.39 28.88 38.12 88.87 85.02 54.00 31.02 1 pp 2483.50 5.41 28.98 38.12 45.90 42.17 54.00 -11.83



Report No.: SZEM160400278102

Page: 80 of 88

Worse case mode: 802.11g Test channel: Highest Remark: Average Horizontal

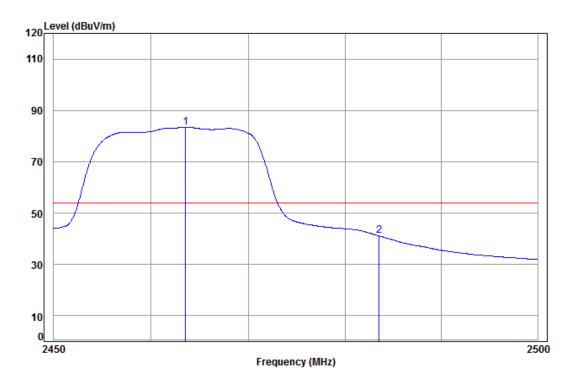

Condition: 3m Horizontal

Job No: : 2781CR

Mode: : 2462 Band edge

: G


Cable Ant Preamp Limit 0ver Read Limit Remark Freq Loss Factor Factor Level Level Line MHz dB dB/m dBuV dBuV/m dBuV/m 2463.55 5.39 28.89 38.12 87.31 83.47 54.00 29.47 1 pp 2483.50 5.41 28.98 38.12 44.87 41.14 54.00 -12.86



Report No.: SZEM160400278102

Page: 81 of 88

Worse case mode: 802.11n(HT20) Test channel: Lowest Remark: Peak Vertical

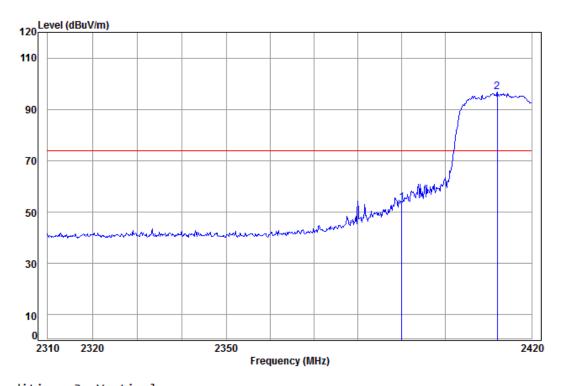

Condition: 3m Vertical

Job No: : 2781CR

Mode: : 2412 Band edge

: N20


Cable Ant Preamp Limit 0ver Read Limit Remark Freq Loss Factor Factor Level Level Line MHz dB dB/m dBuV dBuV/m dBuV/m 2390.00 5.34 28.57 38.11 57.75 53.55 74.00 -20.45 2 pp 2412.02 5.35 28.66 38.11 100.89 96.79 74.00 22.79



Report No.: SZEM160400278102

Page: 82 of 88

Worse case mode: 802.11n(HT20) Test channel: Lowest Remark: Peak Horizontal

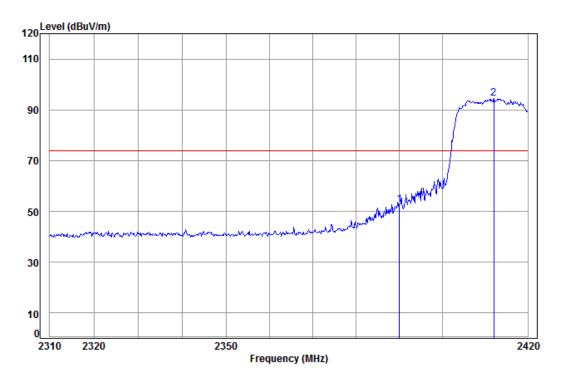

Condition: 3m Horizontal

Job No: : 2781CR

Mode: : 2412 Band edge

: N20


Cable Ant Preamp Read Limit 0ver Freq Loss Factor Factor Level Level Line Limit Remark dB dB/m dBuV dBuV/m dBuV/m 2390.00 5.34 28.57 38.11 56.74 52.54 74.00 -21.46 2412.02 5.35 28.66 38.11 98.67 94.57 74.00 20.57



Report No.: SZEM160400278102

Page: 83 of 88

Worse case mode: 802.11n(HT20) Test channel: Highest Remark: Peak Vertical

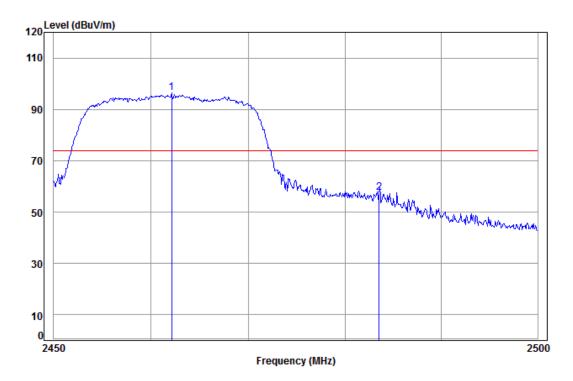

Condition: 3m Vertical

Job No: : 2781CR

Mode: : 2462 Band edge

: N20


Cable Ant Preamp Limit 0ver Read Limit Remark Freq Loss Factor Factor Level Level Line MHz dB dB/m dBuV dBuV/m dBuV/m 2462.11 5.39 28.89 38.12 100.18 96.34 74.00 22.34 1 pp 2483.50 5.41 28.98 38.12 61.12 57.39 74.00 -16.61



Report No.: SZEM160400278102

Page: 84 of 88

Worse case mode: 802.11n(HT20) Test channel: Highest Remark: Peak Horizontal

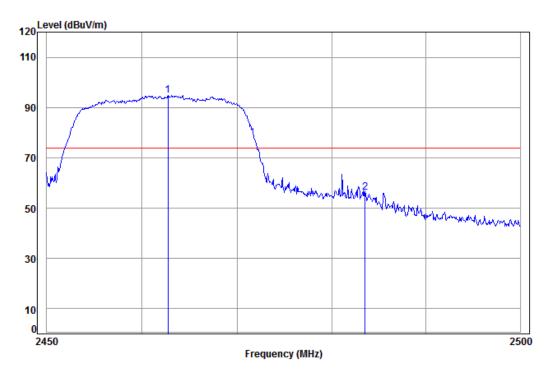

Condition: 3m Horizontal

Job No: : 2781CR

1

Mode: : 2462 Band edge

: N20


	Freq			Preamp Factor					Remark
-	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
рр	2462.70 2483.50								



Report No.: SZEM160400278102

Page: 85 of 88

Worse case mode: 802.11n(HT20) Test channel: Highest Remark: Average Vertical

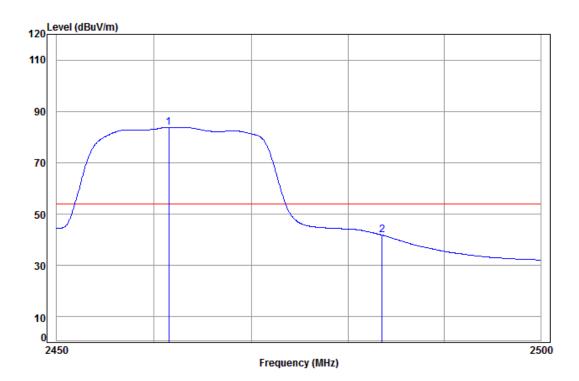

Condition: 3m Vertical

Job No: : 2781CR

Mode: : 2462 Band edge

: N20


Cable Ant Preamp Limit 0ver Read Limit Remark Freq Loss Factor Factor Level Level Line MHz dB dB/m dBuV dBuV/m dBuV/m 2461.51 5.39 28.88 38.12 87.68 83.83 54.00 29.83 1 pp 2483.50 5.41 28.98 38.12 45.59 41.86 54.00 -12.14



Report No.: SZEM160400278102

Page: 86 of 88

Worse case mode: | 802.11n(HT20) | Test channel: | Highest | Remark: | Average | Horizontal

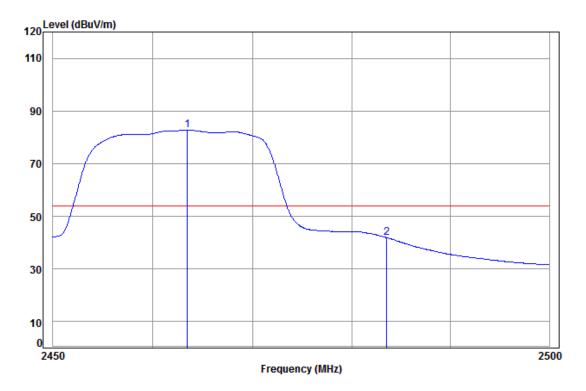

Condition: 3m Horizontal

Job No: : 2781CR

Mode: : 2462 Band edge

: N20

	Freq			Preamp Factor					Remark	
	MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		_
pp	2463.45 2483.50									

Note:

1 2

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor



Report No.: SZEM160400278102

Page: 87 of 88


7 Photographs - EUT Test Setup

Test model No.: IHO-2000 I

7.1 Conducted Emission



7.2 Radiated Emission

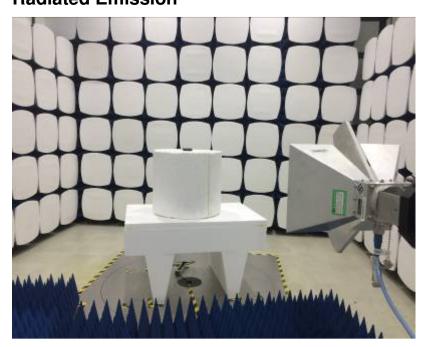



Report No.: SZEM160400278102

Page: 88 of 88

7.3 Radiated Spurious Emission



8 Photographs - EUT Constructional Details

Refer to Appendix A - Photographs of EUT Constructional Details for SZEM1604002781CR.