


Attachment 4

➤ Test Result of co-location

30MHz-1GHz Spurious

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	WCDMA_B2+BT	Humidity (%RH)	55.0

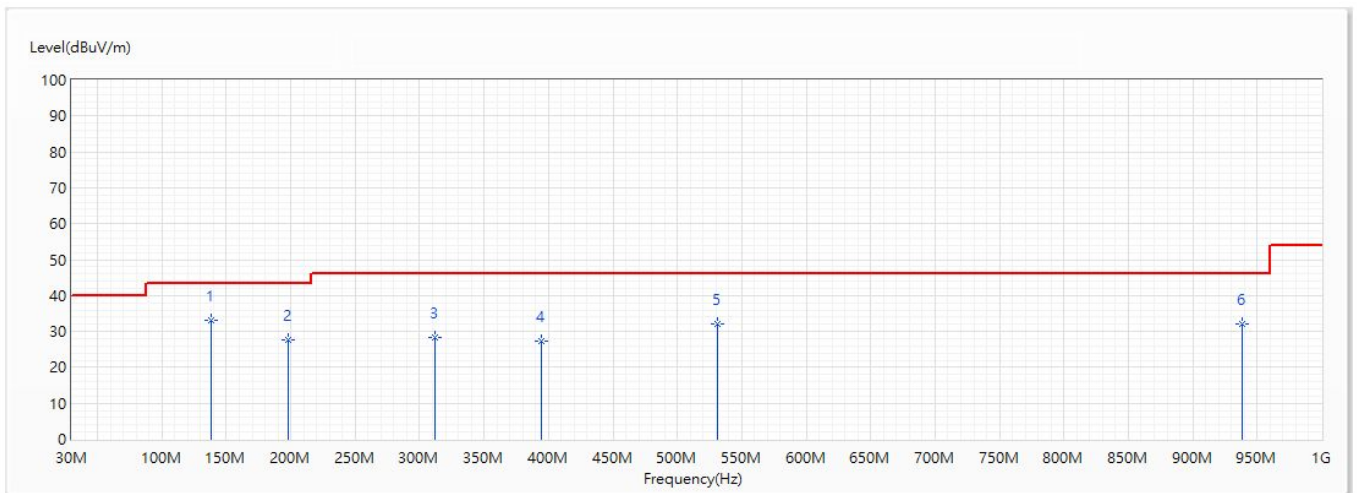


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	137.791	32.94	43.50	-10.56	35.18	-2.24	QP
2	198.295	27.57	43.50	-15.93	31.80	-4.23	QP
3	312.028	28.42	46.00	-17.58	28.45	-0.03	QP
4	393.993	27.23	46.00	-18.77	24.58	2.65	QP
5	531.126	32.07	46.00	-13.93	26.99	5.08	QP
6	938.405	32.16	46.00	-13.84	21.99	10.17	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	WCDMA_B2+BT	Humidity (%RH)	55.0

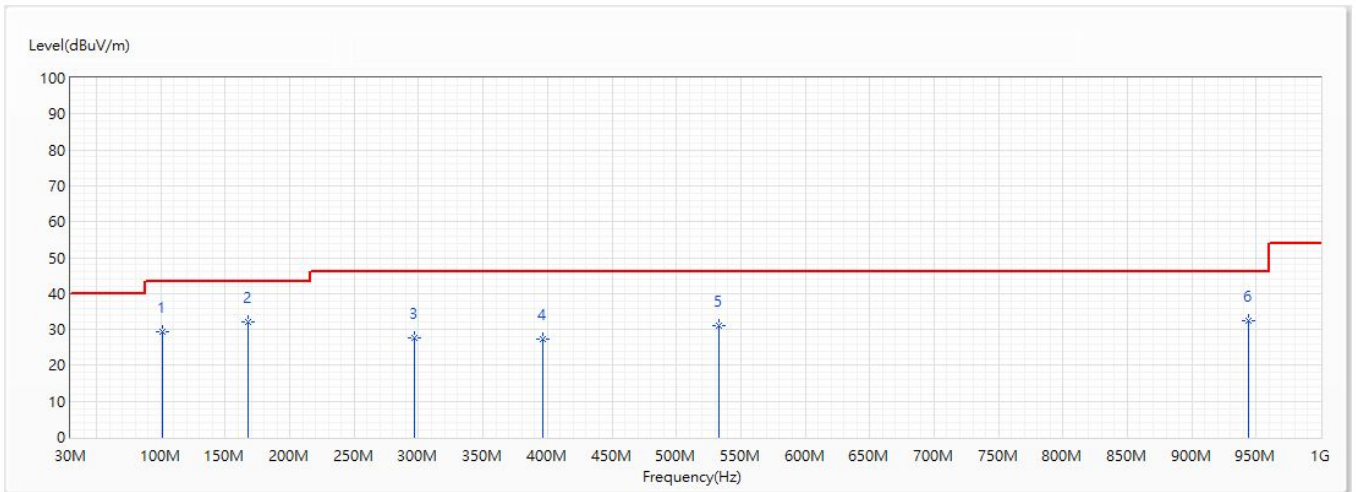


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	100.931	29.33	43.50	-14.17	33.09	-3.76	QP
* 2	167.983	32.23	43.50	-11.27	36.27	-4.04	QP
3	296.993	27.71	46.00	-18.29	28.19	-0.48	QP
4	396.054	27.16	46.00	-18.84	24.43	2.73	QP
5	533.188	31.03	46.00	-14.97	25.92	5.11	QP
6	943.861	32.32	46.00	-13.68	22.07	10.25	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	WCDMA_B2+2.4G WIFI	Humidity (%RH)	55.0

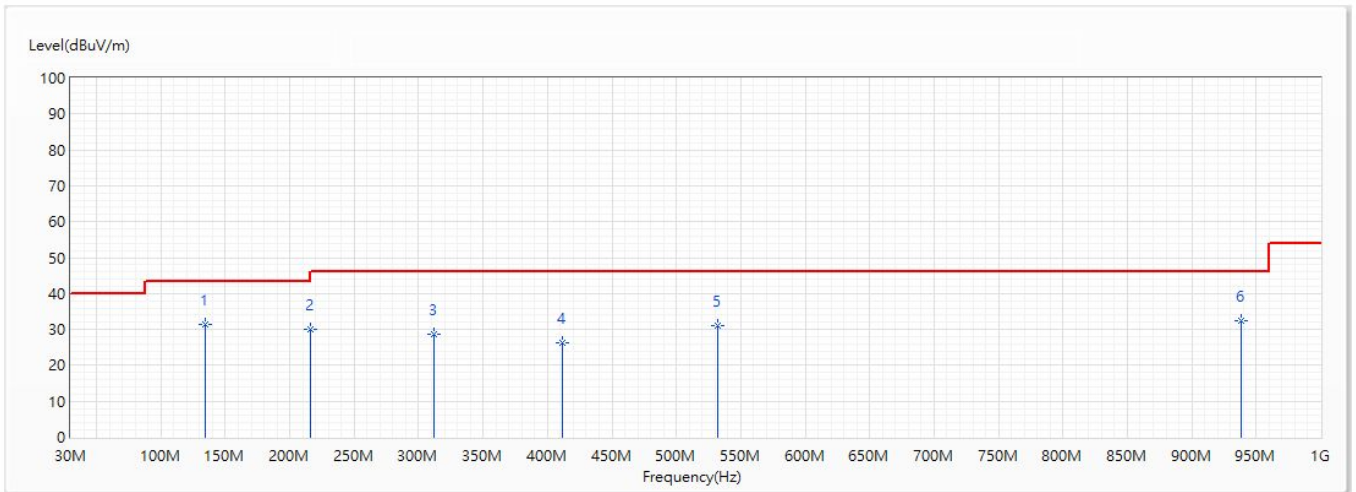


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	134.518	31.35	43.50	-12.15	33.49	-2.14	QP
2	215.876	29.93	43.50	-13.57	33.20	-3.27	QP
3	312.028	28.51	46.00	-17.49	28.54	-0.03	QP
4	411.695	26.42	46.00	-19.58	23.35	3.07	QP
5	532.218	30.97	46.00	-15.03	25.87	5.10	QP
6	938.163	32.43	46.00	-13.57	22.27	10.16	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	WCDMA_B2+2.4G WIFI	Humidity (%RH)	55.0

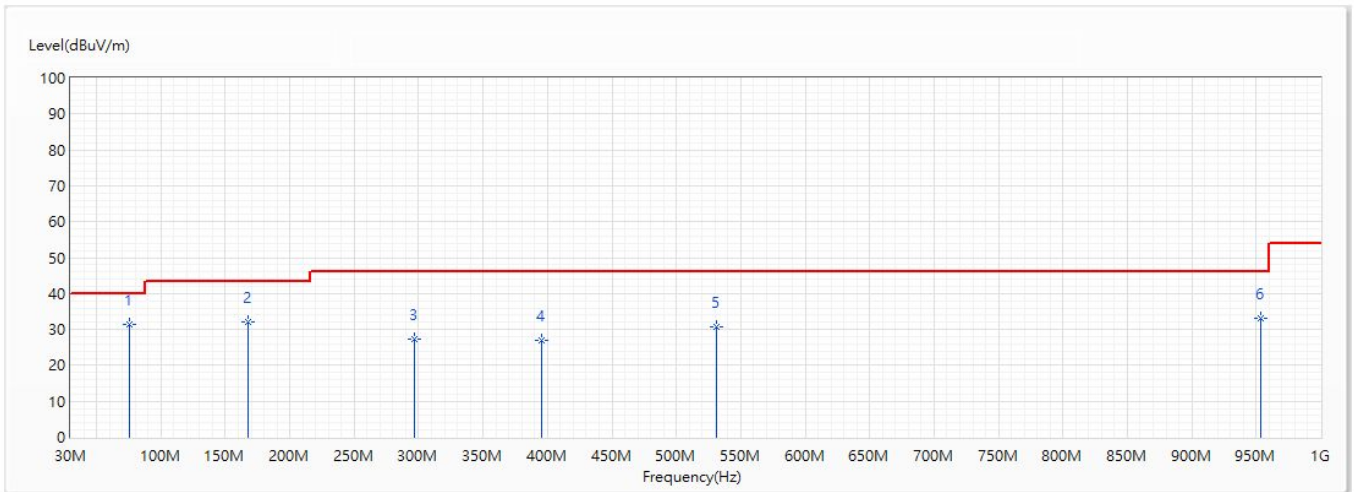


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	75.711	31.56	40.00	-8.44	39.20	-7.64	QP
2	167.983	32.01	43.50	-11.49	36.05	-4.04	QP
3	296.993	27.17	46.00	-18.83	27.65	-0.48	QP
4	395.448	26.81	46.00	-19.19	24.10	2.71	QP
5	531.49	30.82	46.00	-15.18	25.74	5.08	QP
6	953.198	33.21	46.00	-12.79	22.81	10.40	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	WCDMA_B2+5G WIFI	Humidity (%RH)	55.0

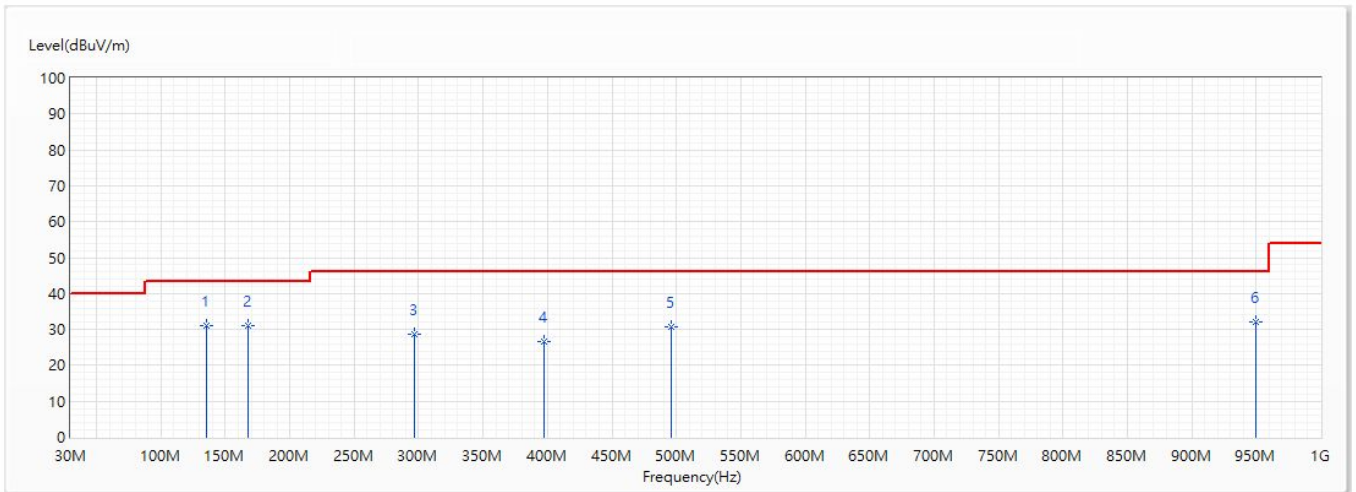


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	135.488	31.07	43.50	-12.43	33.23	-2.16	QP
2	167.983	30.98	43.50	-12.52	35.02	-4.04	QP
3	297.114	28.70	46.00	-17.30	29.18	-0.48	QP
4	397.388	26.73	46.00	-19.27	23.96	2.77	QP
5	495.6	30.75	46.00	-15.25	26.15	4.60	QP
6	950.045	32.20	46.00	-13.80	21.86	10.34	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	WCDMA_B2+5G WIFI	Humidity (%RH)	55.0

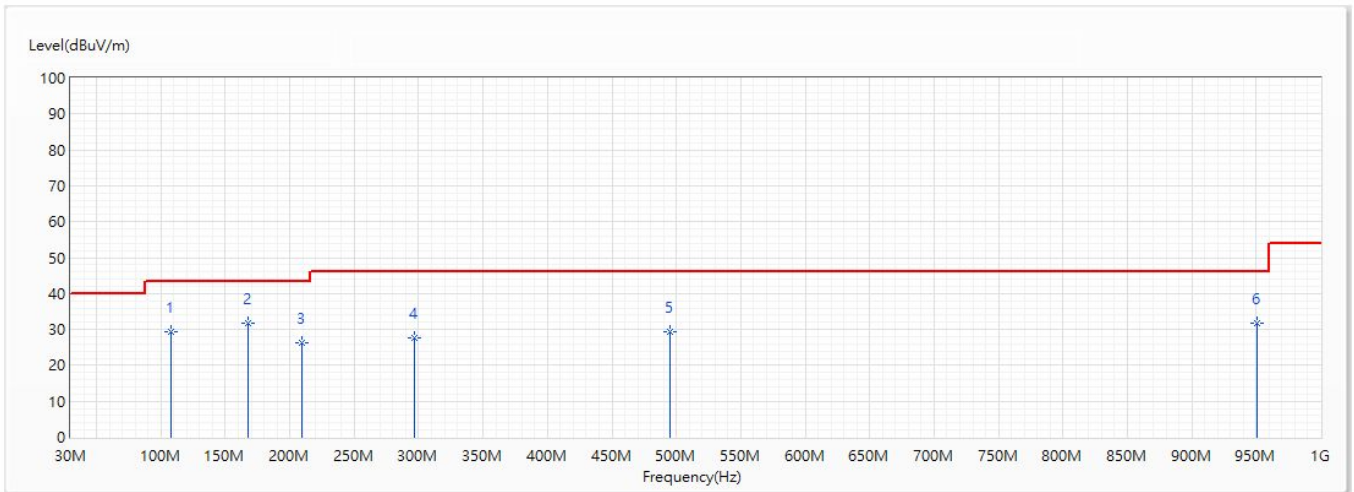


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	107.843	29.26	43.50	-14.24	32.22	-2.96	QP
* 2	167.983	31.83	43.50	-11.67	35.87	-4.04	QP
3	209.693	26.23	43.50	-17.27	29.85	-3.62	QP
4	296.993	27.68	46.00	-18.32	28.16	-0.48	QP
5	495.115	29.42	46.00	-16.58	24.83	4.59	QP
6	950.894	31.90	46.00	-14.10	21.55	10.35	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	LTE_B2+BT	Humidity (%RH)	55.0

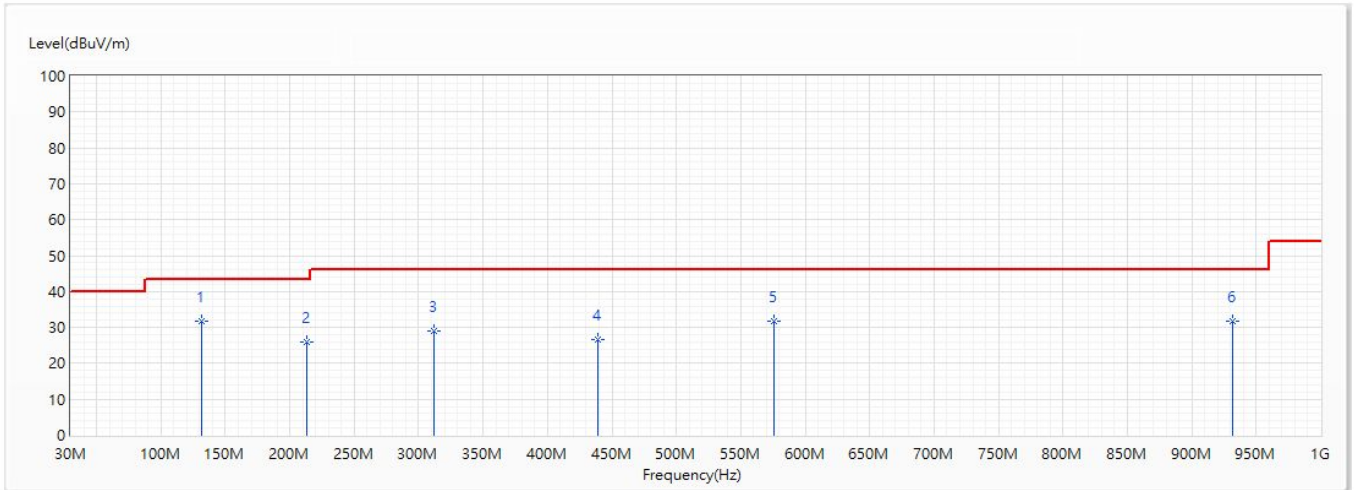


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	131.971	31.87	43.50	-11.63	33.94	-2.07	QP
2	213.451	25.82	43.50	-17.68	29.23	-3.41	QP
3	312.028	29.00	46.00	-17.00	29.03	-0.03	QP
4	438.855	26.72	46.00	-19.28	23.15	3.57	QP
5	575.989	31.68	46.00	-14.32	26.01	5.67	QP
6	931.736	31.84	46.00	-14.16	21.79	10.05	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	LTE_B2+BT	Humidity (%RH)	55.0

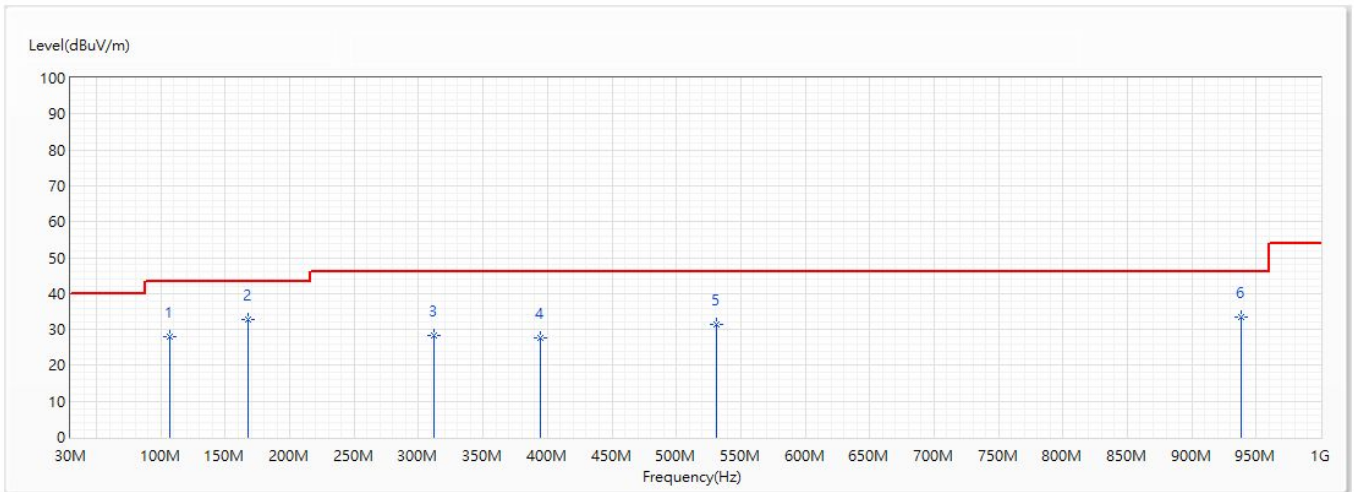


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	106.63	28.04	43.50	-15.46	31.12	-3.08	QP
* 2	167.983	32.60	43.50	-10.90	36.64	-4.04	QP
3	312.028	28.48	46.00	-17.52	28.51	-0.03	QP
4	394.114	27.73	46.00	-18.27	25.07	2.66	QP
5	531.126	31.32	46.00	-14.68	26.24	5.08	QP
6	938.163	33.36	46.00	-12.64	23.20	10.16	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	LTE_B2+2.4G WIFI	Humidity (%RH)	55.0

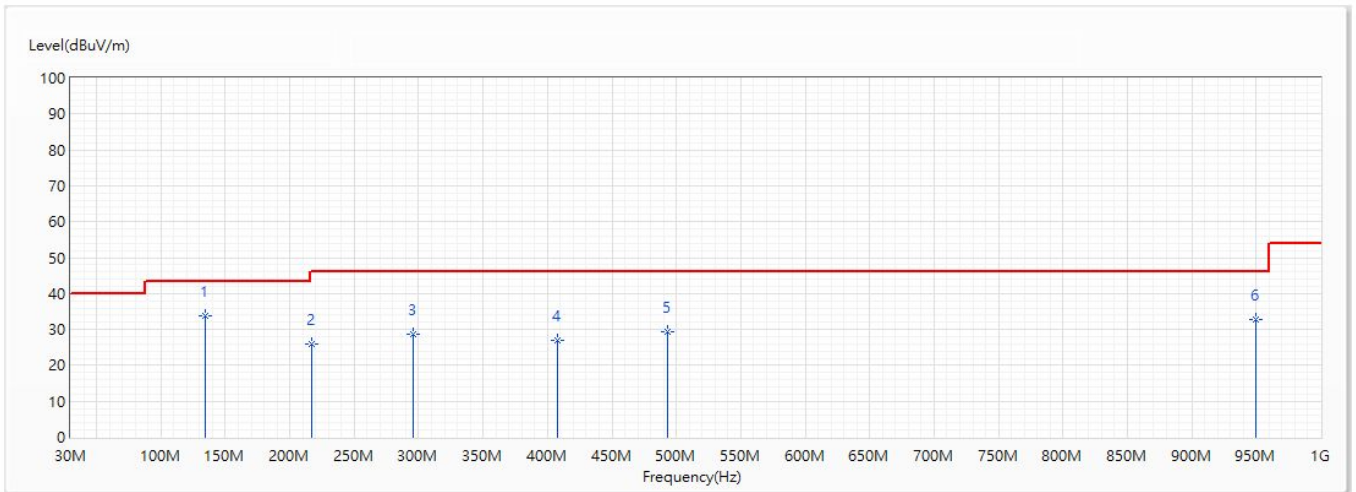


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	134.396	33.77	43.50	-9.73	35.90	-2.13	QP
2	216.846	26.10	46.00	-19.90	29.31	-3.21	QP
3	295.659	28.73	46.00	-17.27	29.24	-0.51	QP
4	408.058	26.83	46.00	-19.17	23.83	3.00	QP
5	492.811	29.43	46.00	-16.57	24.89	4.54	QP
6	949.318	32.62	46.00	-13.38	22.29	10.33	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	LTE_B2+2.4G WIFI	Humidity (%RH)	55.0

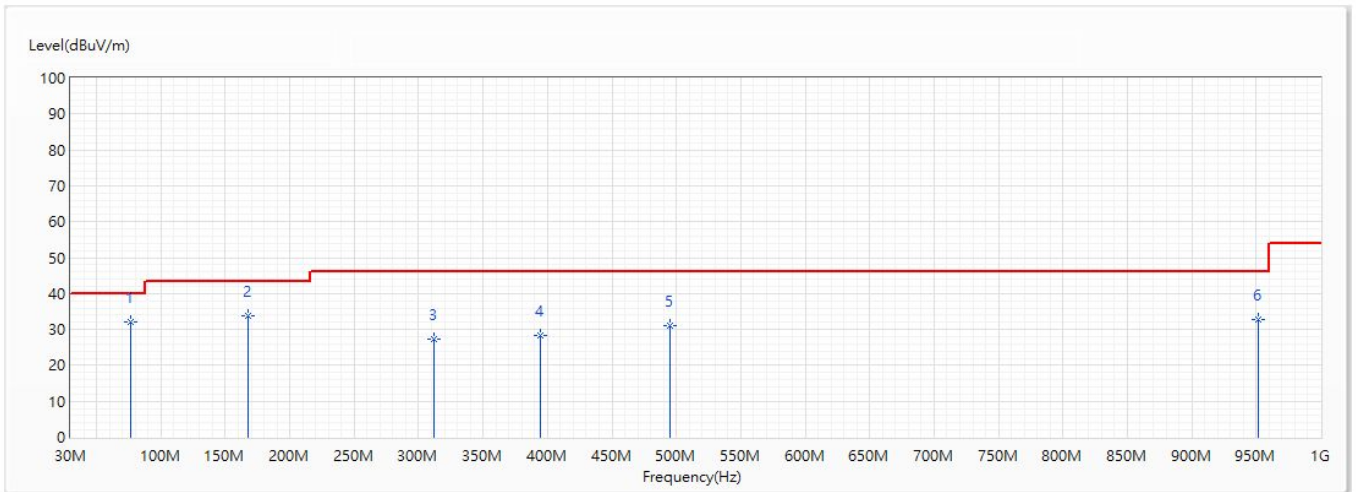


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	76.803	31.96	40.00	-8.04	39.49	-7.53	QP
2	167.983	33.72	43.50	-9.78	37.76	-4.04	QP
3	312.028	27.25	46.00	-18.75	27.28	-0.03	QP
4	393.993	28.19	46.00	-17.81	25.54	2.65	QP
5	495.358	31.13	46.00	-14.87	26.54	4.59	QP
6	951.136	32.64	46.00	-13.36	22.29	10.35	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	LTE_B2+5G WIFI	Humidity (%RH)	55.0

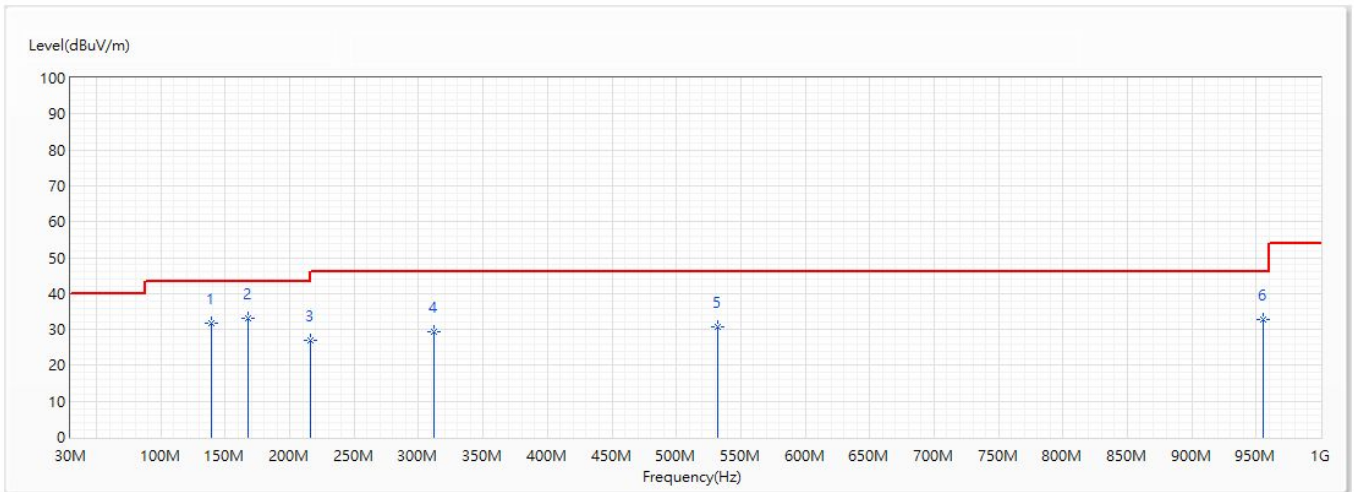


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	139.368	31.73	43.50	-11.77	34.02	-2.29	QP
* 2	167.983	33.04	43.50	-10.46	37.08	-4.04	QP
3	215.998	27.03	43.50	-16.47	30.30	-3.27	QP
4	312.028	29.44	46.00	-16.56	29.47	-0.03	QP
5	532.46	30.66	46.00	-15.34	25.56	5.10	QP
6	955.38	32.75	46.00	-13.25	22.32	10.43	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	LTE_B2+5G WIFI	Humidity (%RH)	55.0

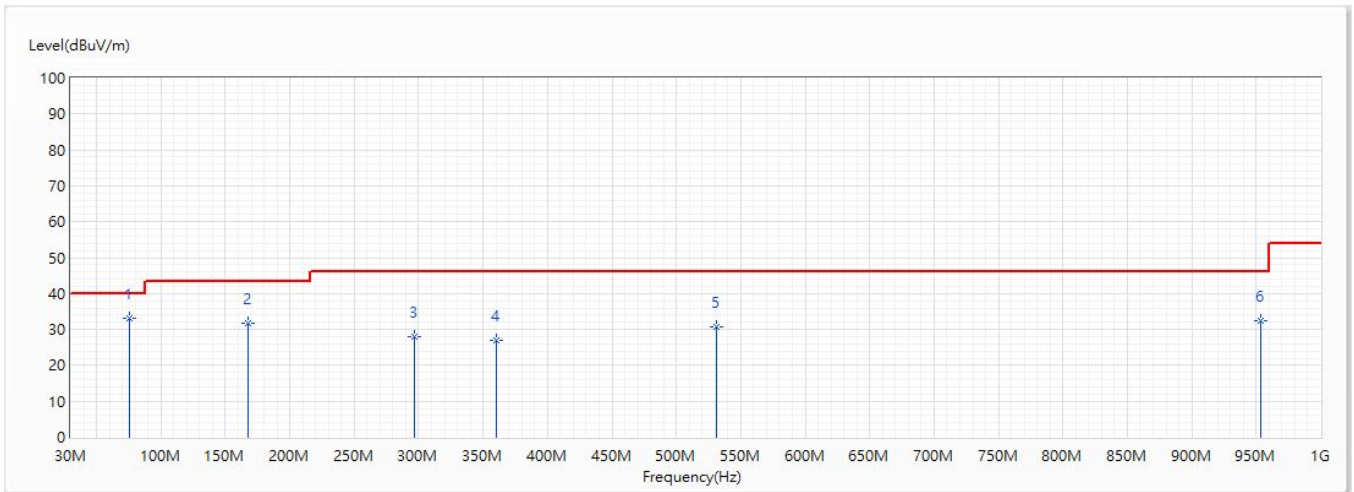


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	75.711	33.10	40.00	-6.90	40.74	-7.64	QP
2	167.983	31.78	43.50	-11.72	35.82	-4.04	QP
3	296.993	28.05	46.00	-17.95	28.53	-0.48	QP
4	360.043	26.82	46.00	-19.18	25.27	1.55	QP
5	531.126	30.79	46.00	-15.21	25.71	5.08	QP
6	953.198	32.44	46.00	-13.56	22.04	10.40	QP

Note:

1. All reading levels is Quasi-Peak value.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor
4. The emission under 30MHz were not included is because their levels are lower than 20dB from limit.

Harmonic & Spurious:

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	WCDMA_B2+BT	Humidity (%RH)	55.0

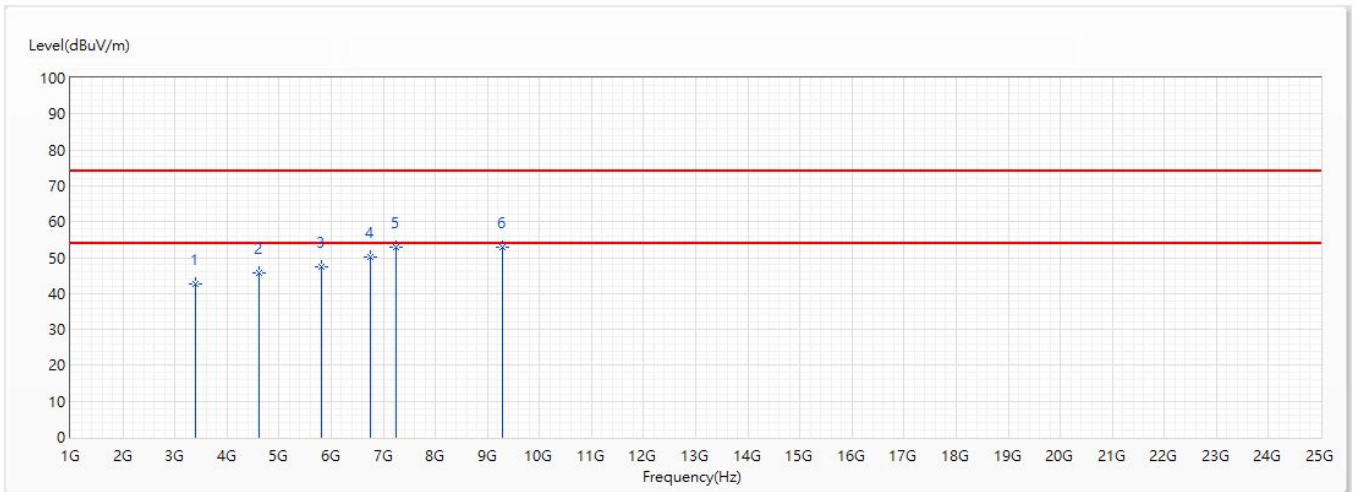


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3397	42.82	74.00	-31.18	59.82	-17.00	PK
2	4606	45.78	74.00	-28.22	57.91	-12.13	PK
3	5815	47.53	74.00	-26.47	56.60	-9.07	PK
4	6757	50.30	74.00	-23.70	55.27	-4.97	PK
* 5	7240	52.92	74.00	-21.08	56.03	-3.11	PK
6	9280	52.85	74.00	-21.15	52.37	0.48	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	WCDMA_B2+BT	Humidity (%RH)	55.0

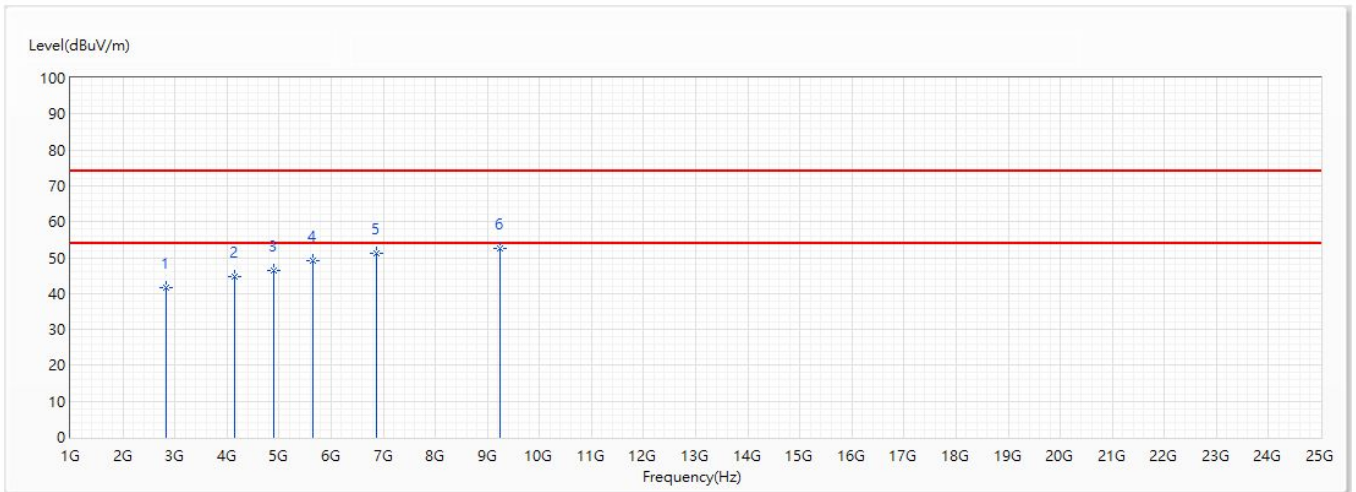


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2830	41.58	74.00	-32.42	59.92	-18.34	PK
2	4147	44.68	74.00	-29.32	58.97	-14.29	PK
3	4894	46.54	74.00	-27.46	57.78	-11.24	PK
4	5641	49.26	74.00	-24.74	58.74	-9.48	PK
5	6874	51.20	74.00	-22.80	55.72	-4.52	PK
* 6	9253	52.72	74.00	-21.28	52.31	0.41	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	WCDMA_B2+2.4G WIFI	Humidity (%RH)	55.0

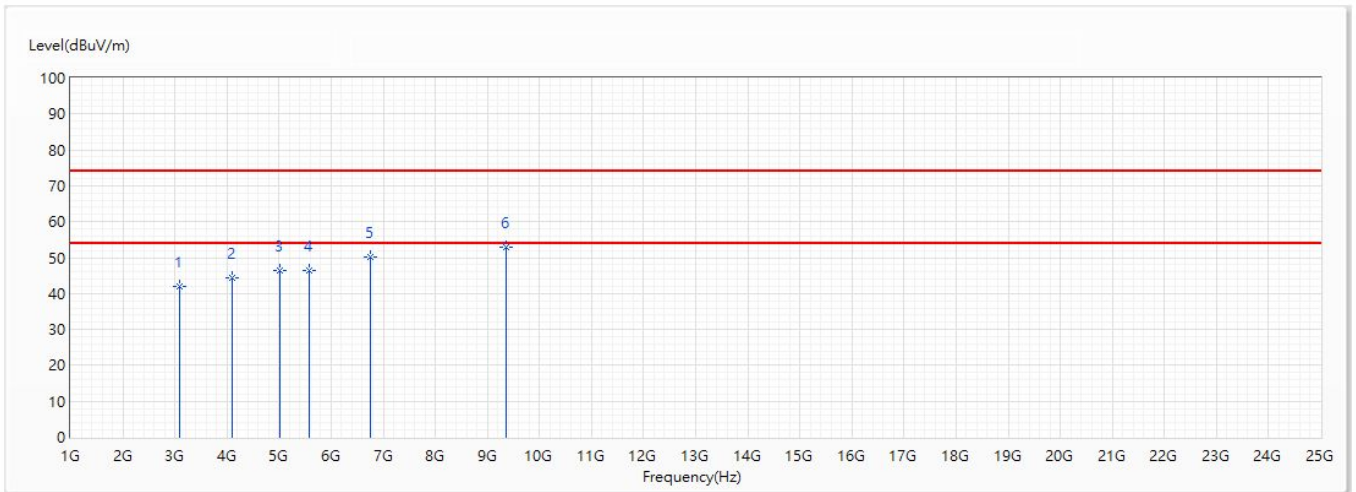


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3082	41.84	74.00	-32.16	59.34	-17.50	PK
2	4108	44.38	74.00	-29.62	58.85	-14.47	PK
3	5008	46.42	74.00	-27.58	57.47	-11.05	PK
4	5572	46.53	74.00	-27.47	56.14	-9.61	PK
5	6754	50.21	74.00	-23.79	55.19	-4.98	PK
* 6	9352	52.84	74.00	-21.16	52.23	0.61	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	WCDMA_B2+2.4G WIFI	Humidity (%RH)	55.0

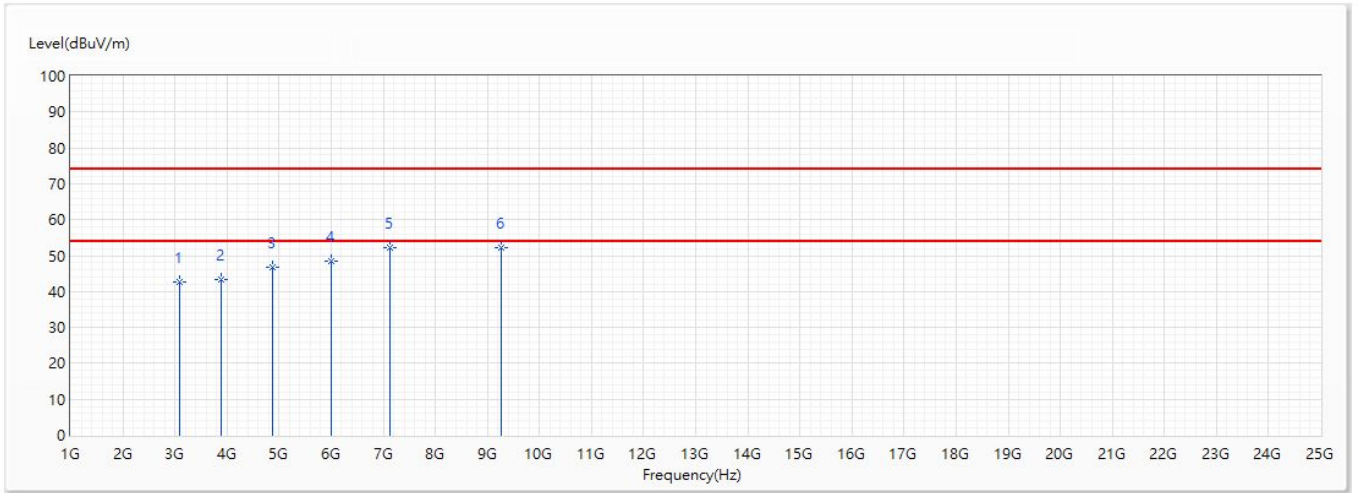


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3097	42.51	74.00	-31.49	59.98	-17.47	PK
2	3898	43.39	74.00	-30.61	58.66	-15.27	PK
3	4873	46.77	74.00	-27.23	58.08	-11.31	PK
4	5998	48.56	74.00	-25.44	57.37	-8.81	PK
5	7138	52.27	74.00	-21.73	55.75	-3.48	PK
* 6	9268	52.31	74.00	-21.69	51.86	0.45	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	WCDMA_B2+5G WIFI	Humidity (%RH)	55.0

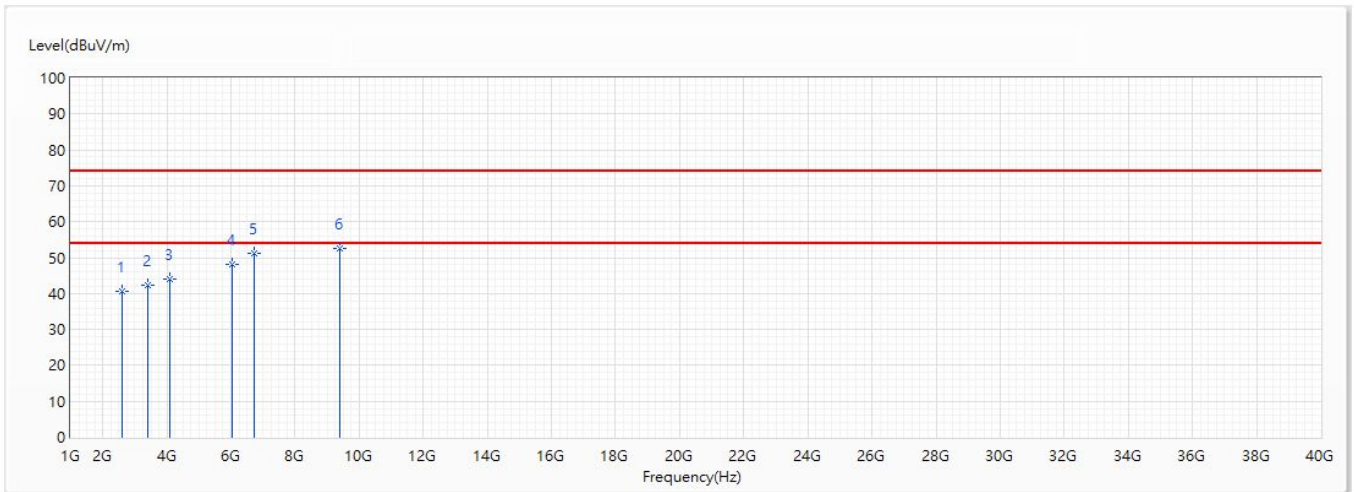


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2608.75	40.61	74.00	-33.39	59.94	-19.33	PK
2	3388.75	42.19	74.00	-31.81	59.20	-17.01	PK
3	4081	43.98	74.00	-30.02	58.59	-14.61	PK
4	6040.75	47.97	74.00	-26.03	56.57	-8.60	PK
5	6737.875	51.34	74.00	-22.66	56.38	-5.04	PK
* 6	9380.125	52.55	74.00	-21.45	51.90	0.65	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	WCDMA_B2+5G WIFI	Humidity (%RH)	55.0

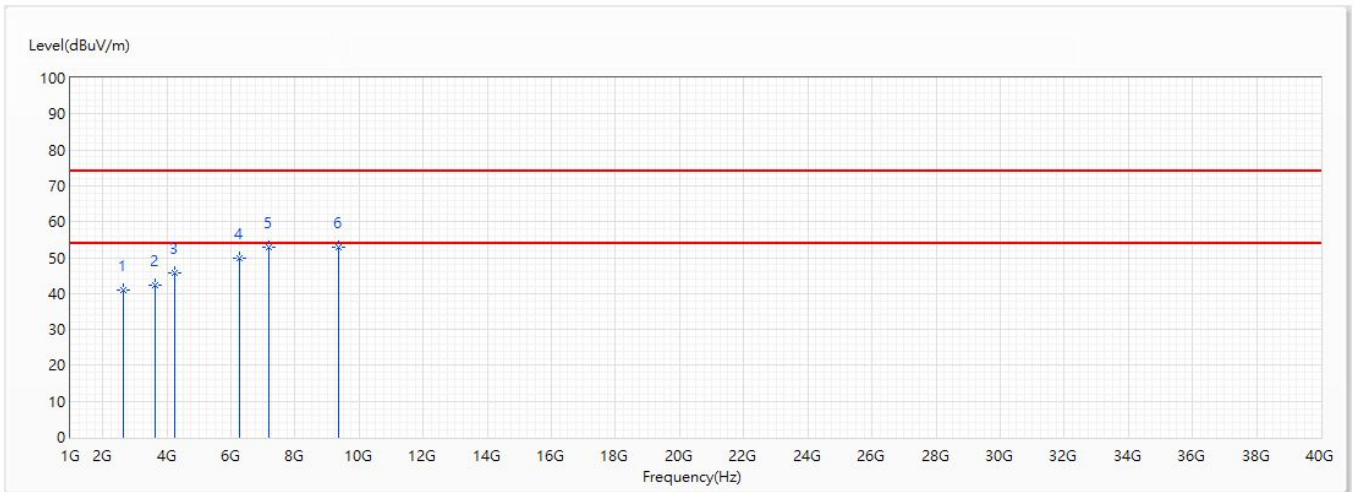


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2652.625	41.05	74.00	-32.95	60.19	-19.14	PK
2	3652	42.16	74.00	-31.84	58.31	-16.15	PK
3	4256.5	45.58	74.00	-28.42	59.37	-13.79	PK
4	6279.625	49.84	74.00	-24.16	57.03	-7.19	PK
5	7181.5	52.83	74.00	-21.17	56.13	-3.30	PK
* 6	9375.25	52.90	74.00	-21.10	52.25	0.65	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	LTE_B2+BT	Humidity (%RH)	55.0

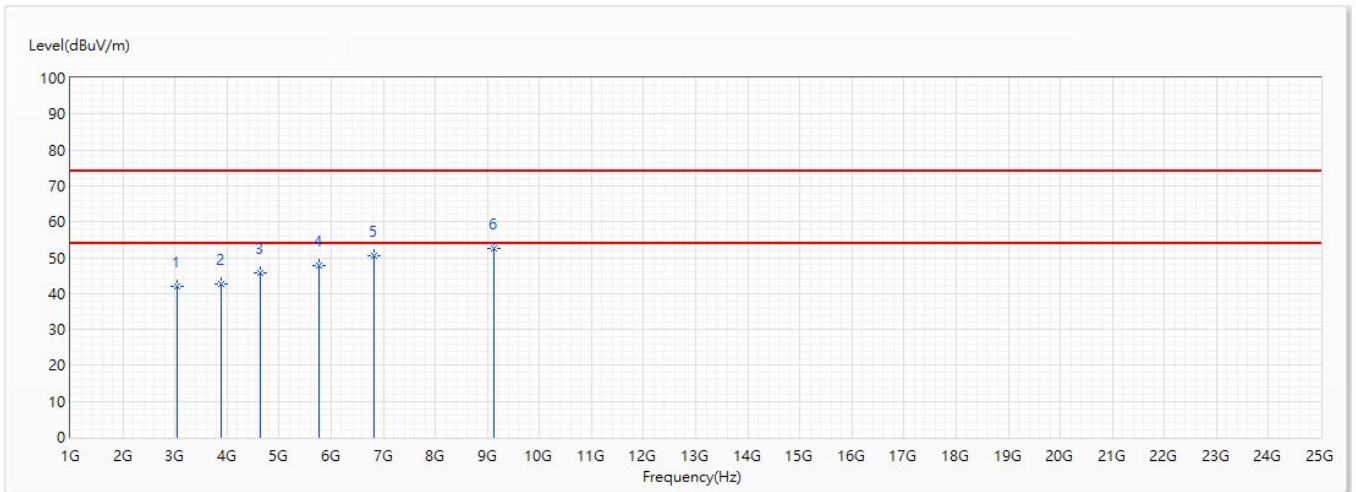


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3040	42.11	74.00	-31.89	59.69	-17.58	PK
2	3898	42.72	74.00	-31.28	57.99	-15.27	PK
3	4645	45.89	74.00	-28.11	57.92	-12.03	PK
4	5773	47.87	74.00	-26.13	57.06	-9.19	PK
5	6829	50.54	74.00	-23.46	55.24	-4.70	PK
* 6	9130	52.72	74.00	-21.28	52.75	-0.03	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	LTE_B2+BT	Humidity (%RH)	55.0

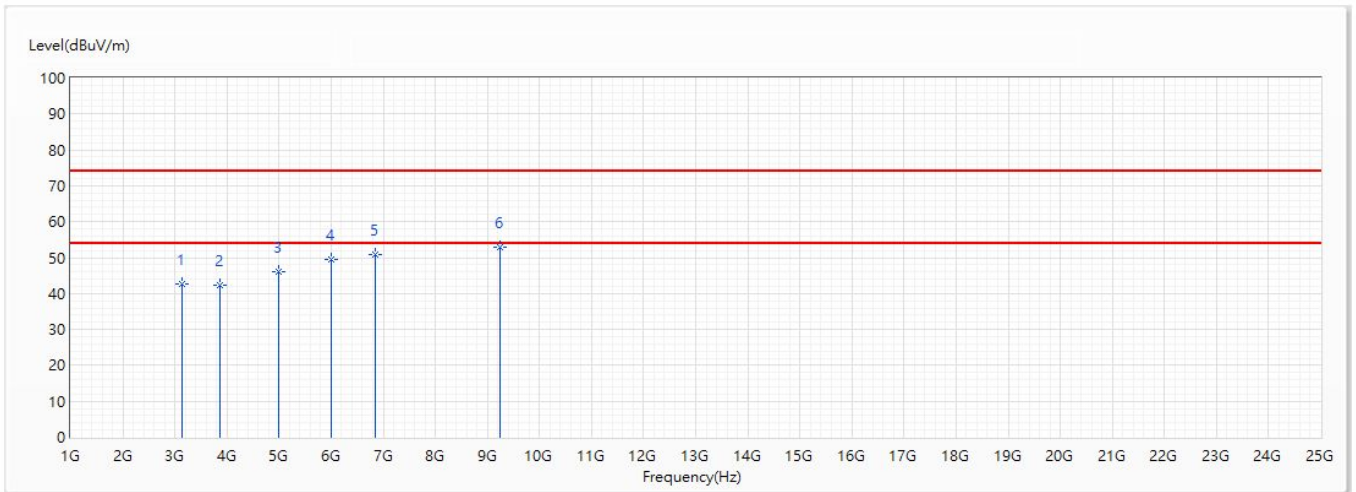


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3133	42.82	74.00	-31.18	60.24	-17.42	PK
2	3868	42.38	74.00	-31.62	57.76	-15.38	PK
3	4990	46.05	74.00	-27.95	57.13	-11.08	PK
4	5992	49.50	74.00	-24.50	58.32	-8.82	PK
5	6856	50.92	74.00	-23.08	55.52	-4.60	PK
* 6	9253	52.75	74.00	-21.25	52.34	0.41	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	LTE_B2+2.4G WIFI	Humidity (%RH)	55.0

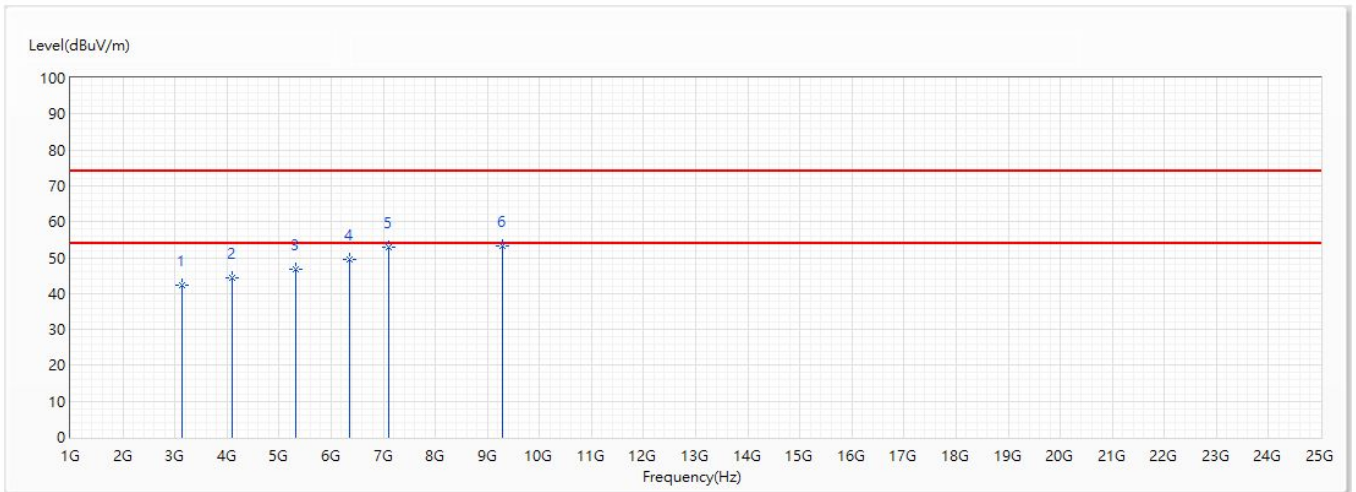


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3145	42.35	74.00	-31.65	59.75	-17.40	PK
2	4099	44.29	74.00	-29.71	58.80	-14.51	PK
3	5323	46.89	74.00	-27.11	57.22	-10.33	PK
4	6349	49.32	74.00	-24.68	56.02	-6.70	PK
5	7111	52.78	74.00	-21.22	56.37	-3.59	PK
* 6	9292	53.13	74.00	-20.87	52.63	0.50	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	LTE_B2+2.4G WIFI	Humidity (%RH)	55.0

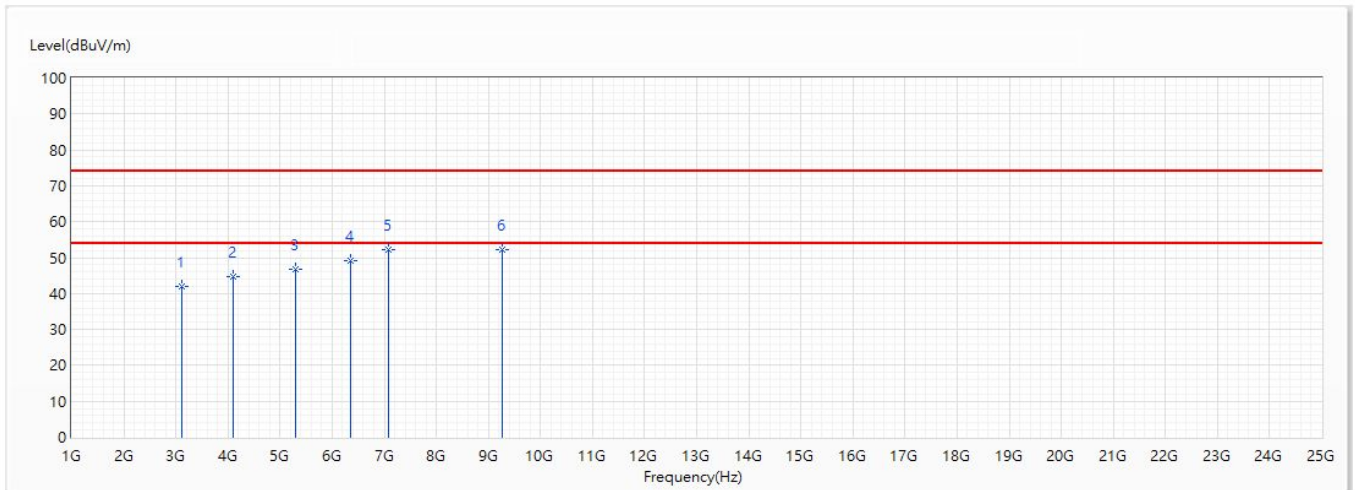


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	3115	41.97	74.00	-32.03	59.42	-17.45	PK
2	4093	44.61	74.00	-29.39	59.16	-14.55	PK
3	5308	46.80	74.00	-27.20	57.19	-10.39	PK
4	6355	49.17	74.00	-24.83	55.82	-6.65	PK
* 5	7093	52.38	74.00	-21.62	56.04	-3.66	PK
6	9259	52.36	74.00	-21.64	51.94	0.42	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	LTE_B2+5G WIFI	Humidity (%RH)	55.0

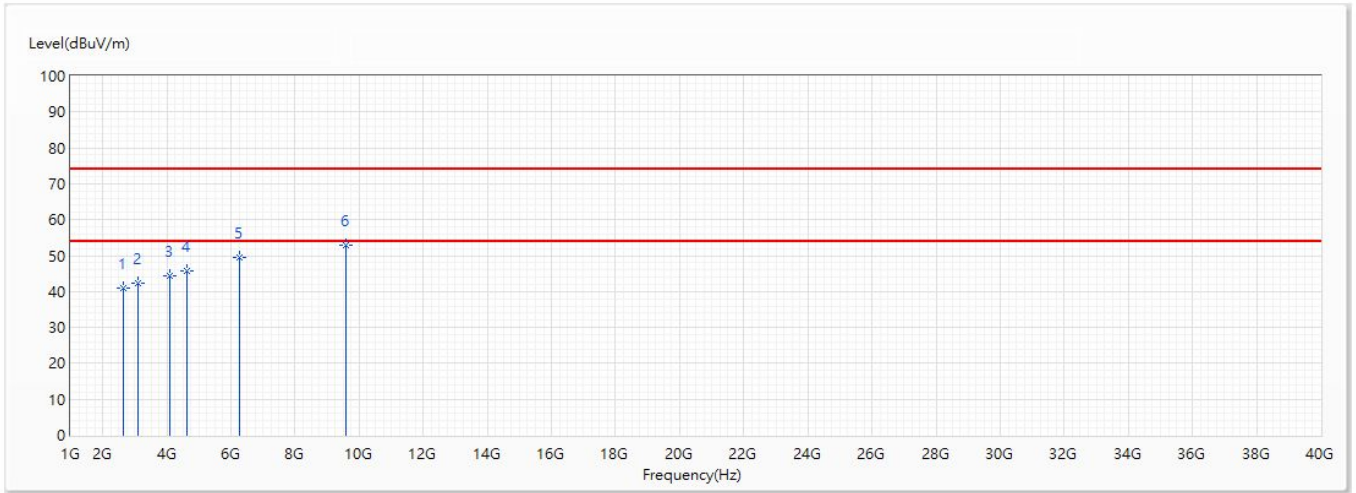


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2657.5	40.81	74.00	-33.19	59.92	-19.11	PK
2	3101.125	42.45	74.00	-31.55	59.91	-17.46	PK
3	4105.375	44.21	74.00	-29.79	58.69	-14.48	PK
4	4627	45.84	74.00	-28.16	57.91	-12.07	PK
5	6260.125	49.46	74.00	-24.54	56.77	-7.31	PK
* 6	9584.875	52.98	74.00	-21.02	52.12	0.86	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.

Model No	VG54-NA	Site	CB2-H
Test Voltage	DC 12V	Test Date	2020/7/15
Test Mode	Transmit mode	Engineer	Lion
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	LTE_B2+5G WIFI	Humidity (%RH)	55.0

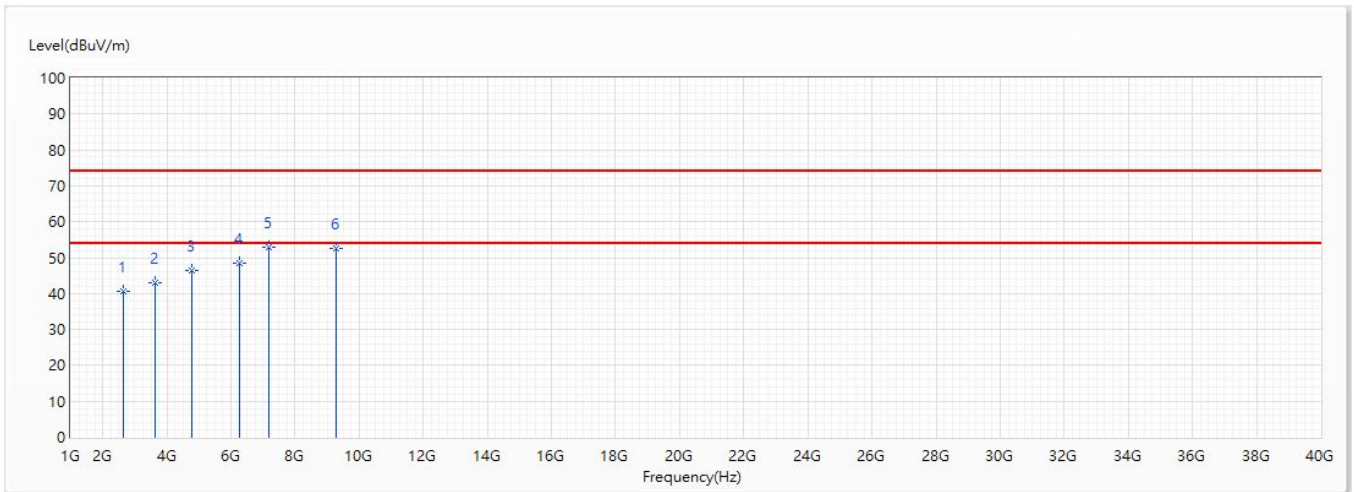

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	2657.5	40.66	74.00	-33.34	59.77	-19.11	PK
2	3632.5	43.04	74.00	-30.96	59.28	-16.24	PK
3	4787.875	46.29	74.00	-27.71	57.88	-11.59	PK
4	6250.375	48.53	74.00	-25.47	55.90	-7.37	PK
* 5	7191.25	53.06	74.00	-20.94	56.32	-3.26	PK
6	9297.25	52.56	74.00	-21.44	52.03	0.53	PK

Note:

1. All reading levels is PEAK value.
2. “ * ”, means this data is the worst value.
3. Emission Level= Reading Level + Correct Factor.