


# FCC Test Report

**FCC ID** : 2AIHD1041  
**Equipment** : HW-IG41  
**Model No.** : 010-1041  
**Brand Name** : Samsara  
**Applicant** : Samsara Networks Inc.  
**Address** : 1990 Alameda Street, San Francisco, CA  
94103, United States  
**Standard** : 47 CFR FCC Part 15.247  
**Received Date** : Sep. 01, 2020  
**Tested Date** : Sep. 16 ~ Sep. 30, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

  
Along Chen / Assistant Manager

Approved by:

  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List .....	7
1.3	Test Setup Chart .....	7
1.4	Test Equipment List and Calibration Data.....	9
1.5	Test Standards .....	10
1.6	Reference Guidance .....	10
1.7	Deviation from Test Standard and Measurement Procedure.....	10
1.8	Measurement Uncertainty .....	10
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>11</b>
2.1	Testing Facility .....	11
2.2	The Worst Test Modes and Channel Details .....	11
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>12</b>
3.1	Conducted Emissions.....	12
3.2	6dB and Occupied Bandwidth.....	15
3.3	RF Output Power.....	19
3.4	Power Spectral Density .....	22
3.5	Emissions in Restricted Frequency Bands.....	25
3.6	Emissions in non-restricted Frequency Bands.....	43
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>46</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR090103AE	Rev. 01	Initial issue	Oct. 20, 2020

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	AC Power Line Conducted Emissions	[dBuV]: 0.853MHz 36.36 (Margin -9.64dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 125.11MHz 42.12 (Margin -1.38dB) - QP	Pass
15.247(b)(3)	Maximum Output Power	Power [dBm]: 9.28	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Freq. (MHz)	Channel Number	Data Rate
2400-2483.5	V5.0 LE	2402-2480	0-39 [40]	1 Mbps
Note 1: Bluetooth LE (Low energy) uses GFSK modulation.				

### 1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Ant. gain with cable loss (dBi)	Ant. gain (dBi)	Cable loss (dB)
1	Individual antenna (OA-DB-05-0205-C5R-SE)	Dipole	RP-SMA PLUG	2.2	2.2	-
2	Array antenna (OS-PENTA-014-01-SA)	PIFA	RP-SMA PLUG	2.7	4.8	2.1

Note: The antenna assembly includes Array antenna and Individual antenna.

### 1.1.3 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	24Vdc from DC power
--------------------------	---------------------

Note: The above power supply is not bundled in market.

### 1.1.4 Accessories

N/A

### 1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
37	2402	9	2422	18	2442	28	2462
0	2404	10	2424	19	2444	29	2464
1	2406	38	2426	20	2446	30	2466
2	2408	11	2428	21	2448	31	2468
3	2410	12	2430	22	2450	32	2470
4	2412	13	2432	23	2452	33	2472
5	2414	14	2434	24	2454	34	2474
6	2416	15	2436	25	2456	35	2476
7	2418	16	2438	26	2458	36	2478
8	2420	17	2440	27	2460	39	2480

### 1.1.6 Test Tool and Duty Cycle

Test Tool	Putty command, V0.6	
Duty Cycle and Duty Factor	Duty Cycle (%)	Duty Factor (dB)
	69.72%	1.57


### 1.1.7 Power Index of Test Tool

Modulation Mode	Test Frequency (MHz)		
	2402	2440	2480
BT LE-1Mbps	Default	Default	Default


## 1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Remarks
1	Notebook	DELL	Latitude E5400	DoC	---
2	USB Flash	Kingston	DTSE9	---	---
3	USB Flash	Kingston	DTSE9	---	---
4	RJ45 Load	ICC	---	---	---
5	DC power	MEAN WELL	SDR-75-24	---	Provided by applicant.

## 1.3 Test Setup Chart

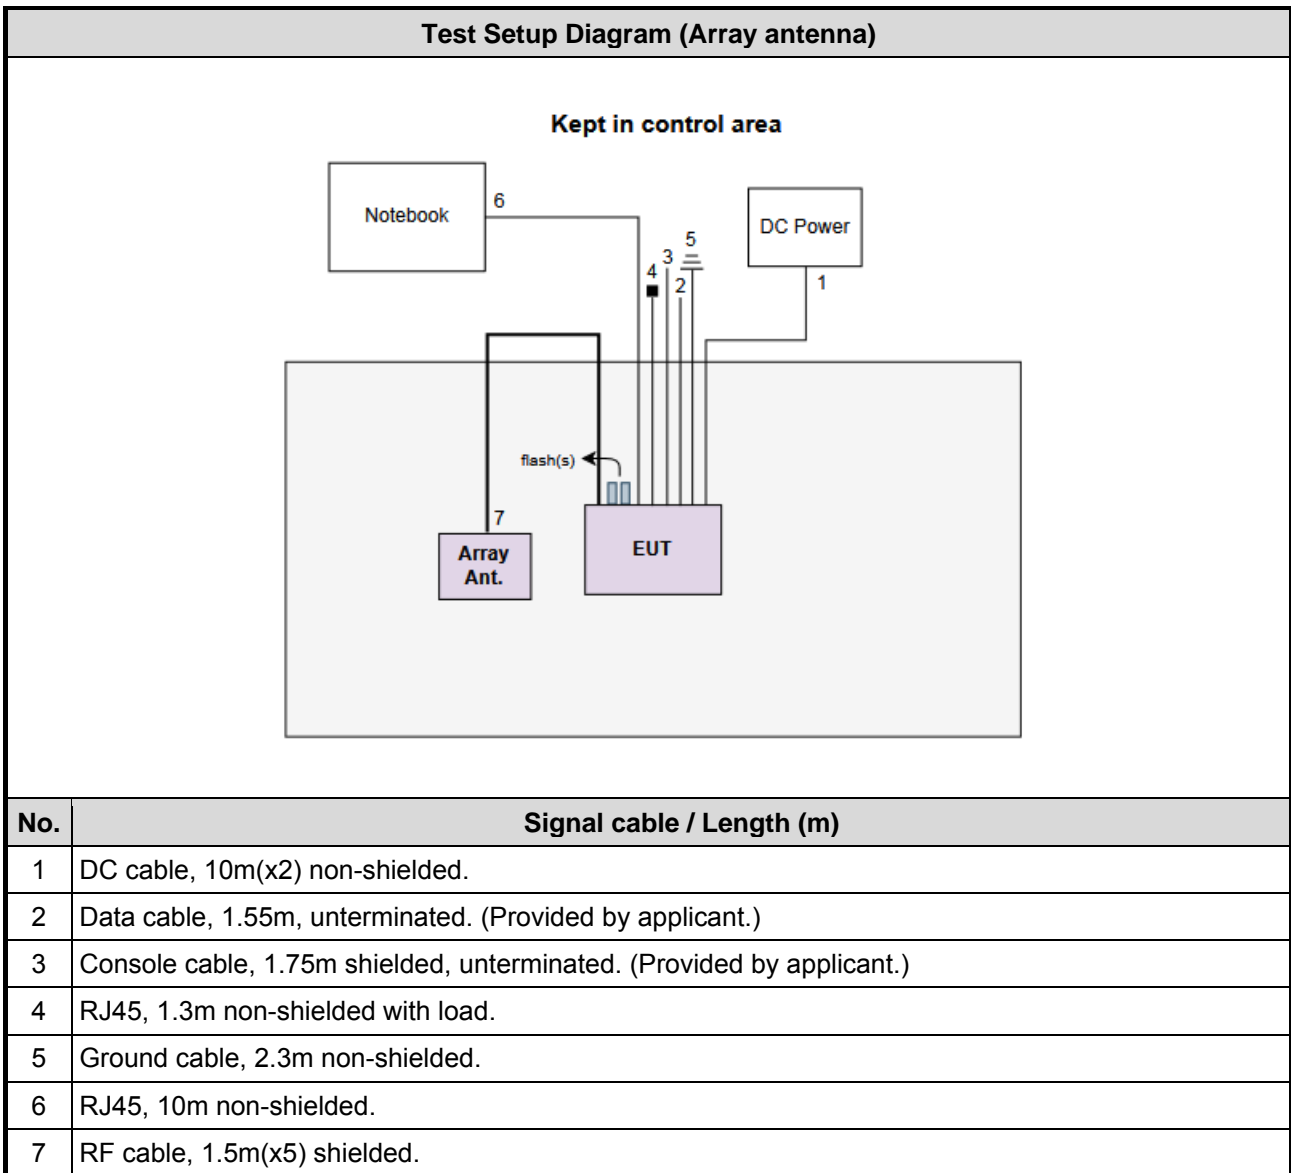

### Test Setup Diagram (Individual antenna)

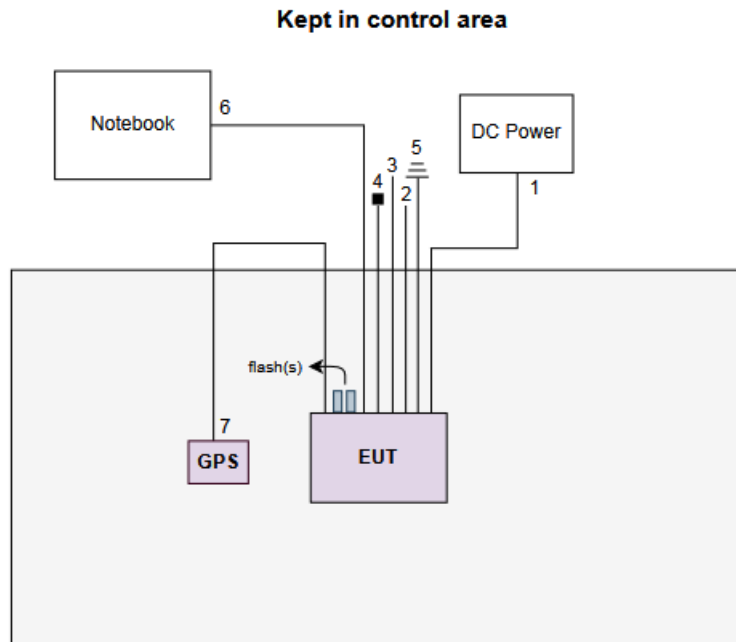

No.	Signal cable / Length (m)
1	DC cable, 10m(x2) non-shielded.
2	Data cable, 1.55m, unterminated. (Provided by applicant.)
3	Console cable, 1.75m shielded, unterminated. (Provided by applicant.)
4	RJ45, 1.3m non-shielded with load.
5	Ground cable, 2.3m non-shielded.
6	RJ45, 10m non-shielded.
7	RF cable, 1.5m shielded.



## 1.4 Test Equipment List and Calibration Data

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Sep. 30, 2020				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101658	Dec. 12, 2019	Dec. 11, 2020
LISN	R&S	ENV216	101579	Mar. 12, 2020	Mar. 11, 2021
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Oct. 22, 2019	Oct. 21, 2020
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber 3 / (03CH03-WS)				
<b>Tested Date</b>	Sep. 16 ~ Sep. 25, 2020				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101499	Jan. 09, 2020	Jan. 08, 2021
Receiver	R&S	ESR3	101657	Feb. 14, 2020	Feb. 13, 2021
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 29, 2020	Apr. 28, 2021
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 27, 2019	Dec. 26, 2020
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 15, 2019	Nov. 14, 2020
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 13, 2019	Nov. 12, 2020
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 07, 2019	Oct. 06, 2020
Preamplifier	EMC	EMC02325	980187	Aug. 05, 2020	Aug. 04, 2021
Preamplifier	Agilent	83017A	MY39501309	Sep. 02, 2020	Sep. 01, 2021
Preamplifier	EMC	EMC184045B	980192	Jul. 21, 2020	Jul. 20, 2021
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 27, 2019	Sep. 26, 2020
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 27, 2019	Sep. 26, 2020
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Sep. 27, 2019	Sep. 26, 2020
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 27, 2019	Sep. 26, 2020
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 27, 2019	Sep. 26, 2020
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 27, 2019	Sep. 26, 2020
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	RF Conducted				
<b>Test Site</b>	(TH01-WS)				
<b>Tested Date</b>	Sep. 29, 2020				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	R&S	FSV40	101063	Apr. 30, 2020	Apr. 29, 2021
Power Meter	Anritsu	ML2495A	1241002	Oct. 23, 2019	Oct. 22, 2020
Power Sensor	Anritsu	MA2411B	1207366	Oct. 23, 2019	Oct. 22, 2020
Measurement Software	ICC	SENSE-15247_FS	V5.10.7	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Test Standards

47 CFR FCC Part 15.247  
ANSI C63.10-2013

## 1.6 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

## 1.7 Deviation from Test Standard and Measurement Procedure

None

## 1.8 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ )).

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 34.130$ Hz
Conducted power	$\pm 0.808$ dB
Power density	$\pm 0.583$ dB
Conducted emission	$\pm 2.715$ dB
AC conducted emission	$\pm 2.92$ dB
Radiated emission $\leq 1$ GHz	$\pm 3.96$ dB
Radiated emission $> 1$ GHz	$\pm 4.51$ dB

## 2 Test Configuration

### 2.1 Testing Facility

<b>Test Laboratory</b>	International Certification Corp.
<b>Test Site</b>	CO01-WS, TH01-WS
<b>Address of Test Site</b>	No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.
<b>Test Site</b>	03CH03-WS
<b>Address of Test Site</b>	No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807A
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate	Test Configuration
AC Power Line Conducted Emissions	BT LE	2440	1Mbps	1
Radiated Emissions ≤ 1GHz	BT LE	2440	1Mbps	1, 2
Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	1, 2
Maximum Output Power 6dB bandwidth Power spectral density Radiated Emissions > 1GHz	BT LE	2402, 2440, 2480	1Mbps	1

**NOTE:**

1. The antenna assembly includes Array antenna and Individual antenna.
  - Individual antenna without antenna cable.
  - Array antenna with antenna cable and need to be assessed with 3 orientations placed on the table for the radiated emission measurement- X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.
2. Test configurations are listed as below:
  - 1) Configuration 1: Array antenna with antenna cable, Z-plane
  - 2) Configuration 2: Individual antenna

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz


#### 3.1.3 Test Setup

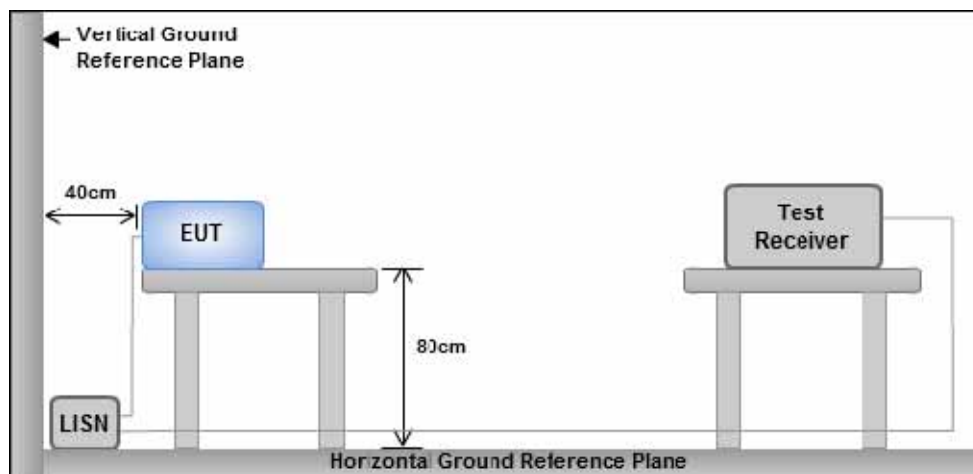

**Note 1. Support units were connected to second LISN**


**2. Ccth of LISNs (LISNs) are 80 cm from EUT and at least 80 cm from other units and other metal planes**

### 3.1.4 Test Result of Conducted Emissions
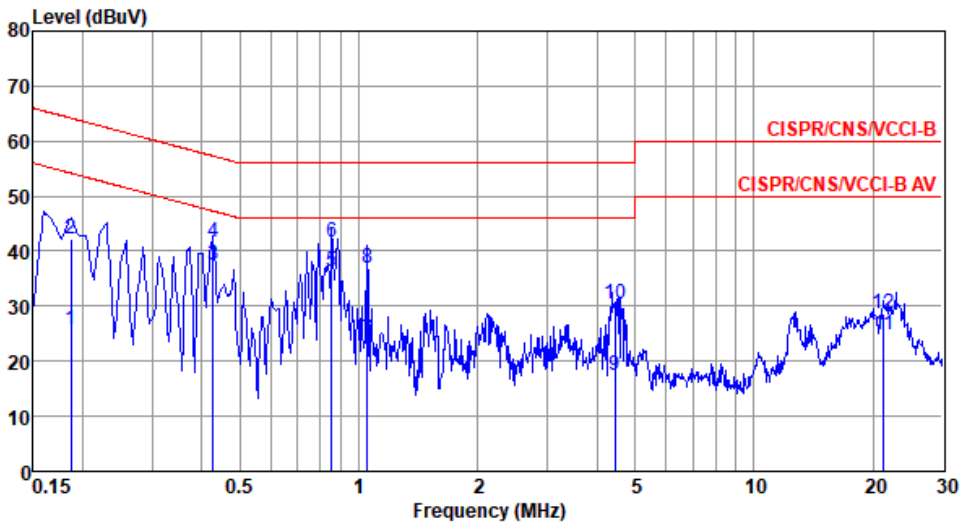
<b>Modulation Mode</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2440																																																																																																																														
<b>Power Phase</b>	Line																																																																																																																																
<p>Test by : Alex Tsai      Temperature: 22°C      Humidity: 56%</p>																																																																																																																																	
																																																																																																																																	
<table border="1"> <thead> <tr> <th></th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Over</th> <th>Read</th> <th>LISN</th> <th>cable</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV</th> <th>dBuV</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th>dB</th> <th></th> </tr> </thead> <tbody> <tr><td>1</td><td>0.186</td><td>25.68</td><td>54.20</td><td>-28.52</td><td>15.81</td><td>9.63</td><td>0.06</td><td>Average</td></tr> <tr><td>2</td><td>0.186</td><td>42.28</td><td>64.20</td><td>-21.92</td><td>32.41</td><td>9.63</td><td>0.06</td><td>QP</td></tr> <tr><td>3</td><td>0.428</td><td>37.37</td><td>47.29</td><td>-9.92</td><td>27.40</td><td>9.63</td><td>0.08</td><td>Average</td></tr> <tr><td>4</td><td>0.428</td><td>41.50</td><td>57.29</td><td>-15.79</td><td>31.53</td><td>9.63</td><td>0.08</td><td>QP</td></tr> <tr><td>5*</td><td>0.853</td><td>36.36</td><td>46.00</td><td>-9.64</td><td>26.31</td><td>9.63</td><td>0.11</td><td>Average</td></tr> <tr><td>6</td><td>0.853</td><td>41.68</td><td>56.00</td><td>-14.32</td><td>31.63</td><td>9.63</td><td>0.11</td><td>QP</td></tr> <tr><td>7</td><td>1.049</td><td>23.87</td><td>46.00</td><td>-22.13</td><td>13.80</td><td>9.63</td><td>0.12</td><td>Average</td></tr> <tr><td>8</td><td>1.049</td><td>36.87</td><td>56.00</td><td>-19.13</td><td>26.80</td><td>9.63</td><td>0.12</td><td>QP</td></tr> <tr><td>9</td><td>4.454</td><td>17.41</td><td>46.00</td><td>-28.59</td><td>7.09</td><td>9.65</td><td>0.30</td><td>Average</td></tr> <tr><td>10</td><td>4.454</td><td>30.54</td><td>56.00</td><td>-25.46</td><td>20.22</td><td>9.65</td><td>0.30</td><td>QP</td></tr> <tr><td>11</td><td>21.260</td><td>24.80</td><td>50.00</td><td>-25.20</td><td>13.79</td><td>9.70</td><td>0.67</td><td>Average</td></tr> <tr><td>12</td><td>21.260</td><td>28.78</td><td>60.00</td><td>-31.22</td><td>17.77</td><td>9.70</td><td>0.67</td><td>QP</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	LISN	cable	Remark		MHz	dBuV	dBuV	dB	dBuV	dB	dB		1	0.186	25.68	54.20	-28.52	15.81	9.63	0.06	Average	2	0.186	42.28	64.20	-21.92	32.41	9.63	0.06	QP	3	0.428	37.37	47.29	-9.92	27.40	9.63	0.08	Average	4	0.428	41.50	57.29	-15.79	31.53	9.63	0.08	QP	5*	0.853	36.36	46.00	-9.64	26.31	9.63	0.11	Average	6	0.853	41.68	56.00	-14.32	31.63	9.63	0.11	QP	7	1.049	23.87	46.00	-22.13	13.80	9.63	0.12	Average	8	1.049	36.87	56.00	-19.13	26.80	9.63	0.12	QP	9	4.454	17.41	46.00	-28.59	7.09	9.65	0.30	Average	10	4.454	30.54	56.00	-25.46	20.22	9.65	0.30	QP	11	21.260	24.80	50.00	-25.20	13.79	9.70	0.67	Average	12	21.260	28.78	60.00	-31.22	17.77	9.70	0.67	QP
	Freq	Level	Limit	Over	Read	LISN	cable	Remark																																																																																																																									
	MHz	dBuV	dBuV	dB	dBuV	dB	dB																																																																																																																										
1	0.186	25.68	54.20	-28.52	15.81	9.63	0.06	Average																																																																																																																									
2	0.186	42.28	64.20	-21.92	32.41	9.63	0.06	QP																																																																																																																									
3	0.428	37.37	47.29	-9.92	27.40	9.63	0.08	Average																																																																																																																									
4	0.428	41.50	57.29	-15.79	31.53	9.63	0.08	QP																																																																																																																									
5*	0.853	36.36	46.00	-9.64	26.31	9.63	0.11	Average																																																																																																																									
6	0.853	41.68	56.00	-14.32	31.63	9.63	0.11	QP																																																																																																																									
7	1.049	23.87	46.00	-22.13	13.80	9.63	0.12	Average																																																																																																																									
8	1.049	36.87	56.00	-19.13	26.80	9.63	0.12	QP																																																																																																																									
9	4.454	17.41	46.00	-28.59	7.09	9.65	0.30	Average																																																																																																																									
10	4.454	30.54	56.00	-25.46	20.22	9.65	0.30	QP																																																																																																																									
11	21.260	24.80	50.00	-25.20	13.79	9.70	0.67	Average																																																																																																																									
12	21.260	28.78	60.00	-31.22	17.77	9.70	0.67	QP																																																																																																																									
<p>Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).            Note 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).</p>																																																																																																																																	

<b>Modulation Mode</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2440
<b>Power Phase</b>	Neutral		

Test by : Alex Tsai      Temperature: 22°C      Humidity: 56%

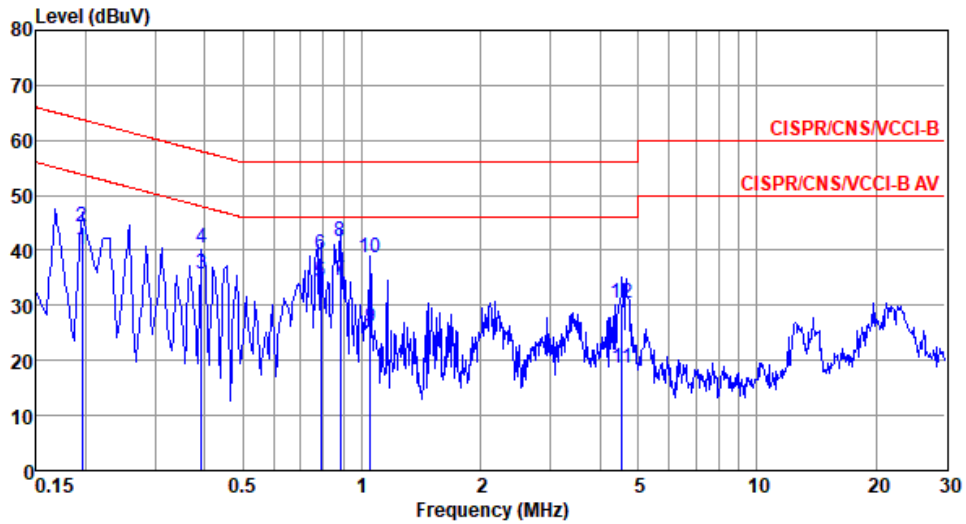

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.195	40.09	53.80	-13.71	30.23	9.65	0.06	Average
2	0.195	44.31	63.80	-19.49	34.45	9.65	0.06	QP
3	0.393	35.71	47.99	-12.28	25.81	9.65	0.08	Average
4	0.393	40.32	57.99	-17.67	30.42	9.65	0.08	QP
5	0.788	34.28	46.00	-11.72	24.33	9.65	0.11	Average
6	0.788	39.24	56.00	-16.76	29.29	9.65	0.11	QP
7*	0.880	34.42	46.00	-11.58	24.46	9.65	0.11	Average
8	0.880	41.68	56.00	-14.32	31.72	9.65	0.11	QP
9	1.049	25.91	46.00	-20.09	15.94	9.65	0.12	Average
10	1.049	38.77	56.00	-17.23	28.80	9.65	0.12	QP
11	4.549	18.55	46.00	-27.45	8.30	9.68	0.30	Average
12	4.549	30.52	56.00	-25.48	20.27	9.68	0.30	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 6dB and Occupied Bandwidth

### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

### 3.2.2 Test Procedures


#### 6dB Bandwidth

1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
2. Detector = Peak, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

#### Occupied Bandwidth

1. Set resolution bandwidth (RBW) = 1% ~ 5 % of OBW, Video bandwidth = 3 x RBW
2. Detector = Sample, Trace mode = max hold.
3. Sweep = auto couple, Allow the trace to stabilize.
4. Use the OBW measurement function of spectrum analyzer to measure the occupied bandwidth.

### 3.2.3 Test Setup



### 3.2.4 Test Result of 6dB and Occupied Bandwidth

<b>Ambient Condition</b>	22°C / 67%	<b>Tested By</b>	Brad Wu
--------------------------	------------	------------------	---------

#### Summary

Mode	Max-N dB (Hz)	Max-OBW (Hz)	ITU-Code	Min-N dB (Hz)	Min-OBW (Hz)
2.4-2.4835GHz	-	-	-	-	-
BT-LE(1Mbps)	673.913k	1.056M	1M06F1D	663.043k	1.054M

**Max-N dB** = Maximum 6dB down bandwidth; **Max-OBW** = Maximum 99% occupied bandwidth;  
**Min-N dB** = Minimum 6dB down bandwidth; **Min-OBW** = Minimum 99% occupied bandwidth;

#### Result


Mode	Result	Limit (Hz)	Port 1-N dB (Hz)	Port 1-OBW (Hz)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	500k	663.043k	1.054M
2440MHz	Pass	500k	666.667k	1.056M
2480MHz	Pass	500k	673.913k	1.054M

**Port X-N dB** = Port X 6dB down bandwidth; **Port X-OBW** = Port X 99% occupied bandwidth;




### BT-LE(1Mbps)

2402MHz

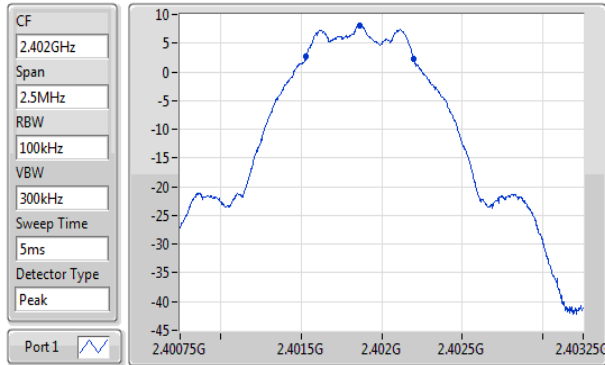


6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
663.043k	2.401533G	2.402196G	1.054M	2.401352G	2.402405G	500k	1

### EBW-DTS

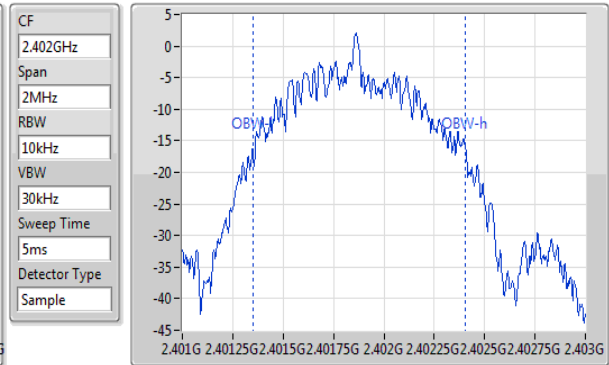


### BT-LE(1Mbps)

2440MHz

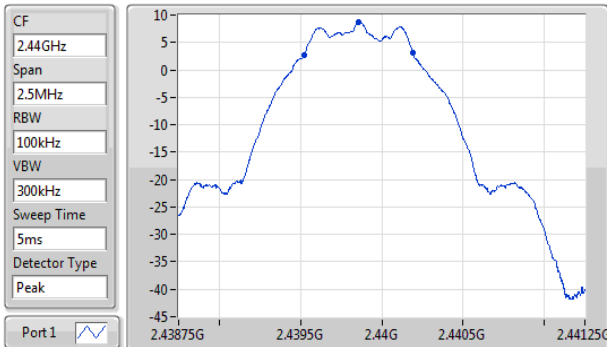



6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
666.667k	2.439525G	2.440192G	1.056M	2.439346G	2.440402G	500k	1

### EBW-DTS

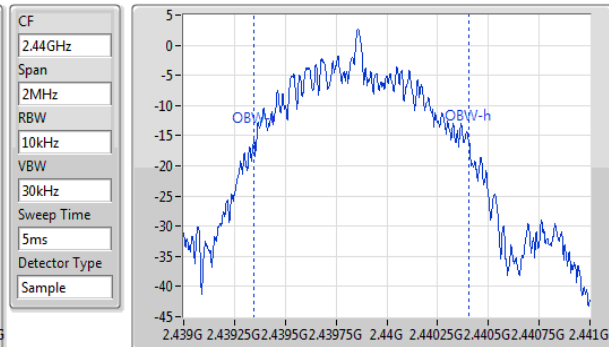

### BT-LE(1Mbps)

2480MHz

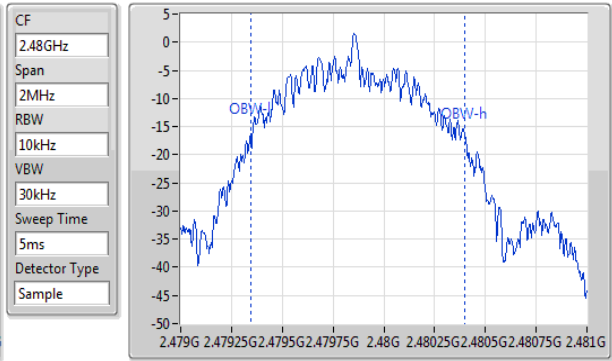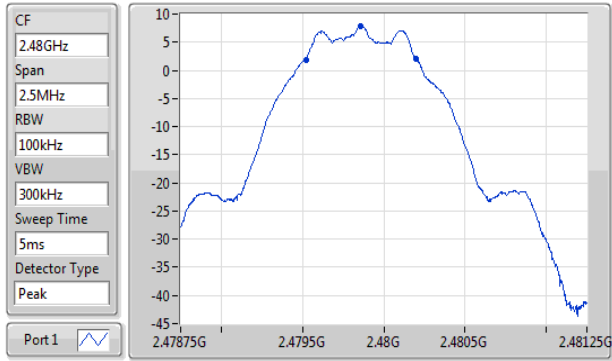

6dB(Hz)	Fl-6dB(Hz)	Fh-6dB(Hz)	OBW(Hz)	Fl-OBW(Hz)	Fh-OBW(Hz)	Limit(Hz)	Port
673.913k	2.479525G	2.480199G	1.054M	2.479346G	2.480399G	500k	1

### 3.3 RF Output Power

#### 3.3.1 Limit of RF Output Power


Conducted power shall not exceed 1Watt.

Antenna gain  $\leq 6\text{dBi}$ , no any corresponding reduction is in output power limit.

#### 3.3.2 Test Procedures

A broadband RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

#### 3.3.3 Test Setup



### 3.3.4 Test Result of Maximum Output Power

<b>Ambient Condition</b>	22°C / 67%	<b>Tested By</b>	Brad Wu
--------------------------	------------	------------------	---------

#### Summary of Peak Conducted Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	9.28	0.00847

#### Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.70	8.88	30.00
2440MHz	Pass	2.70	9.28	30.00
2480MHz	Pass	2.70	8.59	30.00

### Summary of Conducted (Average) Output Power

Mode	Power (dBm)	Power (W)
2.4-2.4835GHz	-	-
BT-LE(1Mbps)	9.12	0.00817

### Result

Mode	Result	Gain (dBi)	Power (dBm)	Power Limit (dBm)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.70	8.68	-
2440MHz	Pass	2.70	9.12	-
2480MHz	Pass	2.70	8.37	-

Note: Average power is for reference only.

## 3.4 Power Spectral Density


### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

### 3.4.2 Test Procedures

1. Set the RBW = 3 kHz, VBW = 10 kHz.
2. Detector = Peak, Sweep time = auto couple.
3. Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

### 3.4.3 Test Setup



### 3.4.4 Test Result of Power Spectral Density

<b>Ambient Condition</b>	22°C / 67%	<b>Tested By</b>	Brad Wu
--------------------------	------------	------------------	---------

#### Summary

Mode	PD (dBm/RBW)
2.4-2.4835GHz	-
BT-LE(1Mbps)	-5.55

RBW=3kHz

#### Result


Mode	Result	Gain (dBi)	PD (dBm/RBW)	PD Limit (dBm/RBW)
BT-LE(1Mbps)	-	-	-	-
2402MHz	Pass	2.70	-6.05	8.00
2440MHz	Pass	2.70	-5.55	8.00
2480MHz	Pass	2.70	-6.64	8.00

RBW=3kHz

### BT-LE(1Mbps)

PSD

#### 2402MHz

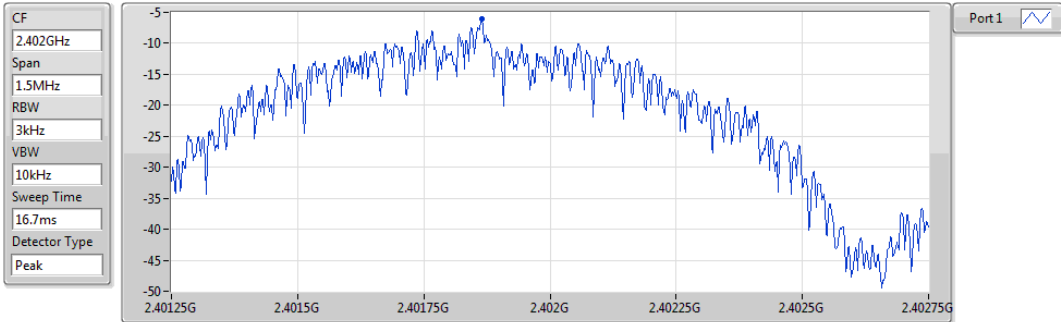


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.05	-6.05	-6.05

### BT-LE(1Mbps)

PSD

#### 2440MHz

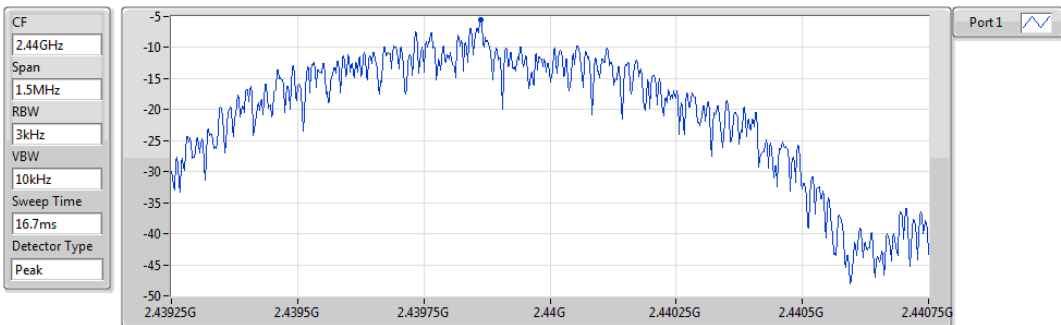


Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-5.55	-5.55	-5.55

### BT-LE(1Mbps)

PSD

#### 2480MHz

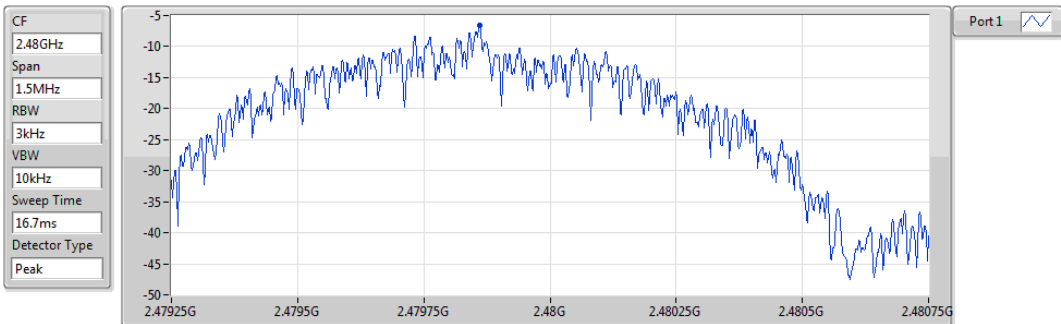

Sum	PD	Port 1
(dBm/RBW)	(dBm/RBW)	(dBm/RBW)
-6.64	-6.64	-6.64



## 3.5 Emissions in Restricted Frequency Bands

### 3.5.1 Limit of Emissions in Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.5.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.5.3 Test Setup

#### Radiated Emissions below 1 GHz

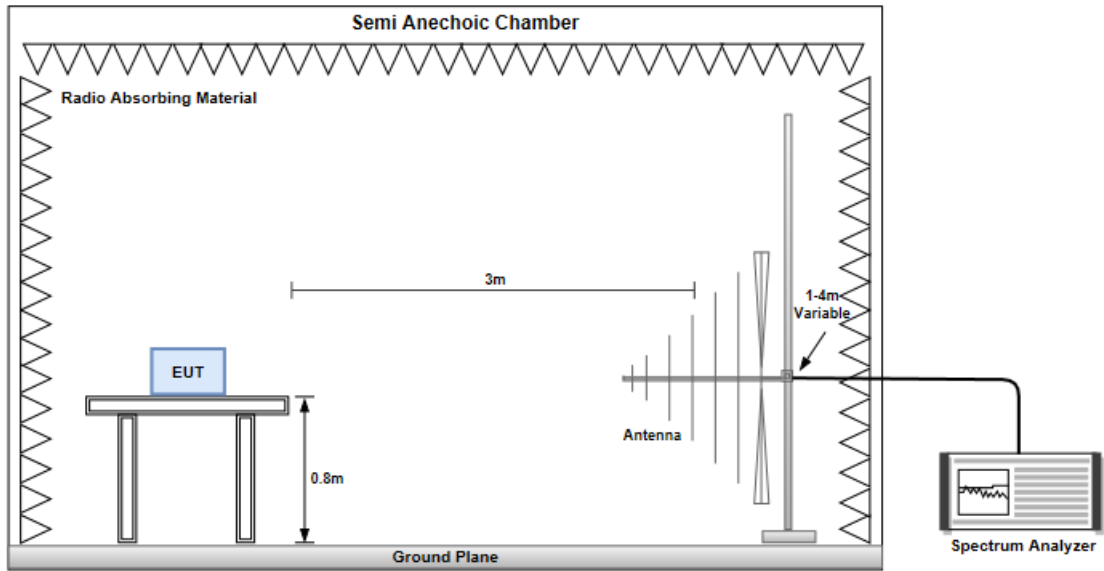


#### Radiated Emissions above 1 GHz

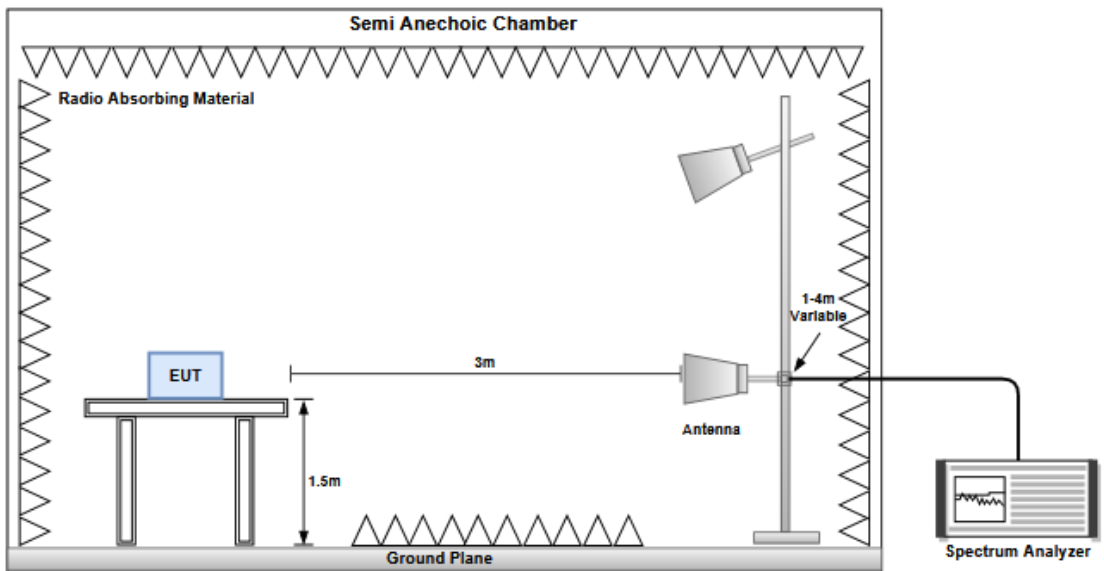


### Configuration 1: Array antenna with antenna cable, Z-plane

#### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

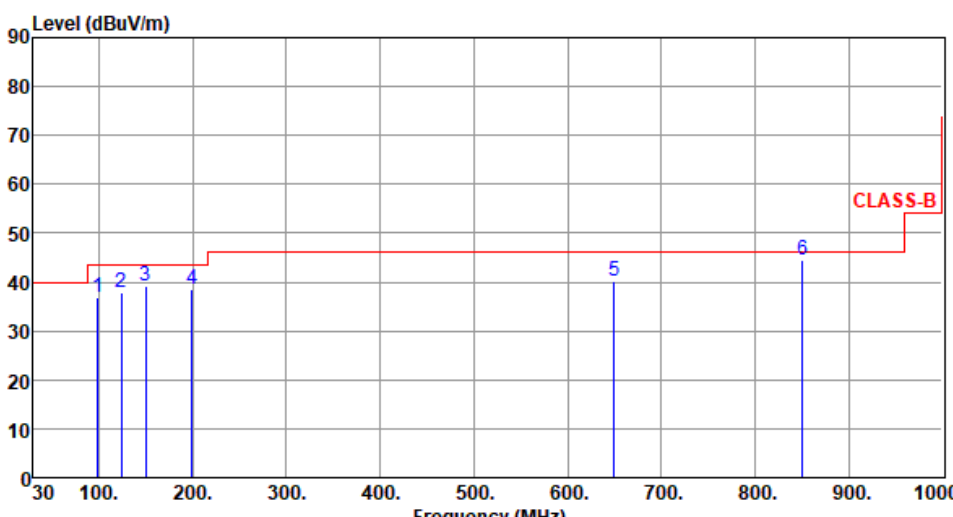Modulation	BT LE-1Mbps	Test Freq. (MHz)	2440																																																																																																																																			
Polarization	Horizontal																																																																																																																																					
Test By :BRAD WU		Temperature(°C):22	Humidity(%):64																																																																																																																																			
																																																																																																																																						
	<table border="1"> <thead> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> </tr> </thead> <tbody> <tr> <td>98.61</td> <td>124.11</td> <td>149.53</td> <td>199.61</td> <td>649.79</td> <td>850.25</td> </tr> <tr> <td>36.79</td> <td>37.84</td> <td>39.21</td> <td>38.64</td> <td>40.35</td> <td>44.45</td> </tr> <tr> <td>43.50</td> <td>43.50</td> <td>43.50</td> <td>43.50</td> <td>46.00</td> <td>46.00</td> </tr> <tr> <td>-6.71</td> <td>-5.66</td> <td>-4.29</td> <td>-4.86</td> <td>-5.65</td> <td>-1.55</td> </tr> <tr> <td>50.99</td> <td>48.80</td> <td>48.31</td> <td>51.02</td> <td>39.92</td> <td>41.06</td> </tr> <tr> <td>-14.20</td> <td>-10.96</td> <td>-9.10</td> <td>-12.38</td> <td>0.43</td> <td>3.39</td> </tr> <tr> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>Peak</td> <td>QP</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>100</td> </tr> <tr> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>---</td> <td>140</td> </tr> </tbody> </table>	1	2	3	4	5	6	98.61	124.11	149.53	199.61	649.79	850.25	36.79	37.84	39.21	38.64	40.35	44.45	43.50	43.50	43.50	43.50	46.00	46.00	-6.71	-5.66	-4.29	-4.86	-5.65	-1.55	50.99	48.80	48.31	51.02	39.92	41.06	-14.20	-10.96	-9.10	-12.38	0.43	3.39	Peak	Peak	Peak	Peak	Peak	QP	---	---	---	---	---	100	---	---	---	---	---	140	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>98.61</td> <td>36.79</td> <td>43.50</td> <td>-6.71</td> <td>50.99</td> <td>-14.20</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>124.11</td> <td>37.84</td> <td>43.50</td> <td>-5.66</td> <td>48.80</td> <td>-10.96</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>149.53</td> <td>39.21</td> <td>43.50</td> <td>-4.29</td> <td>48.31</td> <td>-9.10</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>199.61</td> <td>38.64</td> <td>43.50</td> <td>-4.86</td> <td>51.02</td> <td>-12.38</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>649.79</td> <td>40.35</td> <td>46.00</td> <td>-5.65</td> <td>39.92</td> <td>0.43</td> <td>Peak</td> <td>---</td> <td>---</td> </tr> <tr> <td>850.25</td> <td>44.45</td> <td>46.00</td> <td>-1.55</td> <td>41.06</td> <td>3.39</td> <td>QP</td> <td>100</td> <td>140</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				98.61	36.79	43.50	-6.71	50.99	-14.20	Peak	---	---	124.11	37.84	43.50	-5.66	48.80	-10.96	Peak	---	---	149.53	39.21	43.50	-4.29	48.31	-9.10	Peak	---	---	199.61	38.64	43.50	-4.86	51.02	-12.38	Peak	---	---	649.79	40.35	46.00	-5.65	39.92	0.43	Peak	---	---	850.25	44.45	46.00	-1.55	41.06	3.39	QP	100	140
1	2	3	4	5	6																																																																																																																																	
98.61	124.11	149.53	199.61	649.79	850.25																																																																																																																																	
36.79	37.84	39.21	38.64	40.35	44.45																																																																																																																																	
43.50	43.50	43.50	43.50	46.00	46.00																																																																																																																																	
-6.71	-5.66	-4.29	-4.86	-5.65	-1.55																																																																																																																																	
50.99	48.80	48.31	51.02	39.92	41.06																																																																																																																																	
-14.20	-10.96	-9.10	-12.38	0.43	3.39																																																																																																																																	
Peak	Peak	Peak	Peak	Peak	QP																																																																																																																																	
---	---	---	---	---	100																																																																																																																																	
---	---	---	---	---	140																																																																																																																																	
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																																																																																																	
98.61	36.79	43.50	-6.71	50.99	-14.20	Peak	---	---																																																																																																																														
124.11	37.84	43.50	-5.66	48.80	-10.96	Peak	---	---																																																																																																																														
149.53	39.21	43.50	-4.29	48.31	-9.10	Peak	---	---																																																																																																																														
199.61	38.64	43.50	-4.86	51.02	-12.38	Peak	---	---																																																																																																																														
649.79	40.35	46.00	-5.65	39.92	0.43	Peak	---	---																																																																																																																														
850.25	44.45	46.00	-1.55	41.06	3.39	QP	100	140																																																																																																																														
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																																																																																						

<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Vertical		

Test By :BRAD WU      Temperature(°C):22      Humidity(%):64

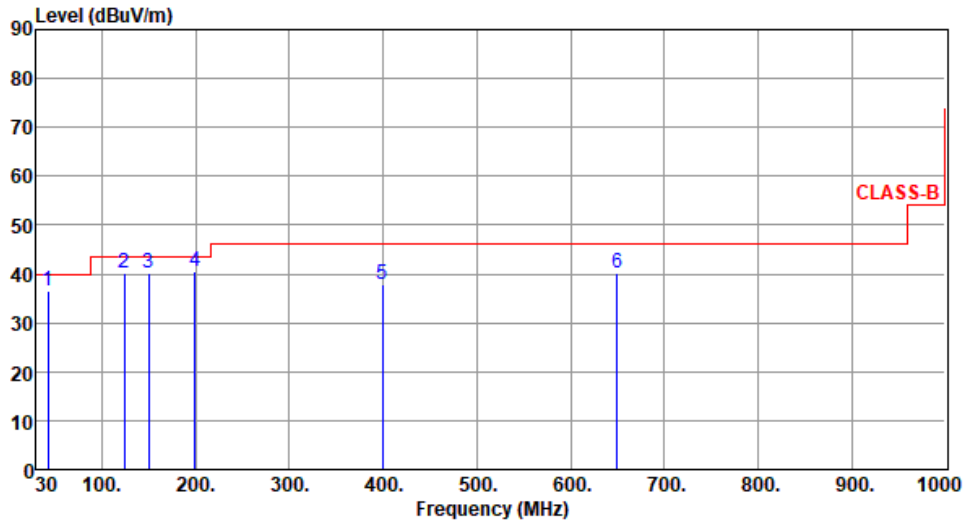

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	42.58	36.64	40.00	-3.36	45.48	-8.84	Peak	---	---
2	124.13	40.22	43.50	-3.28	51.18	-10.96	Peak	---	---
3	149.50	40.06	43.50	-3.44	49.16	-9.10	Peak	---	---
4	199.61	40.59	43.50	-2.91	52.97	-12.38	QP	100	115
5	399.61	37.84	46.00	-8.16	43.72	-5.88	Peak	---	---
6	649.79	40.09	46.00	-5.91	39.66	0.43	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)
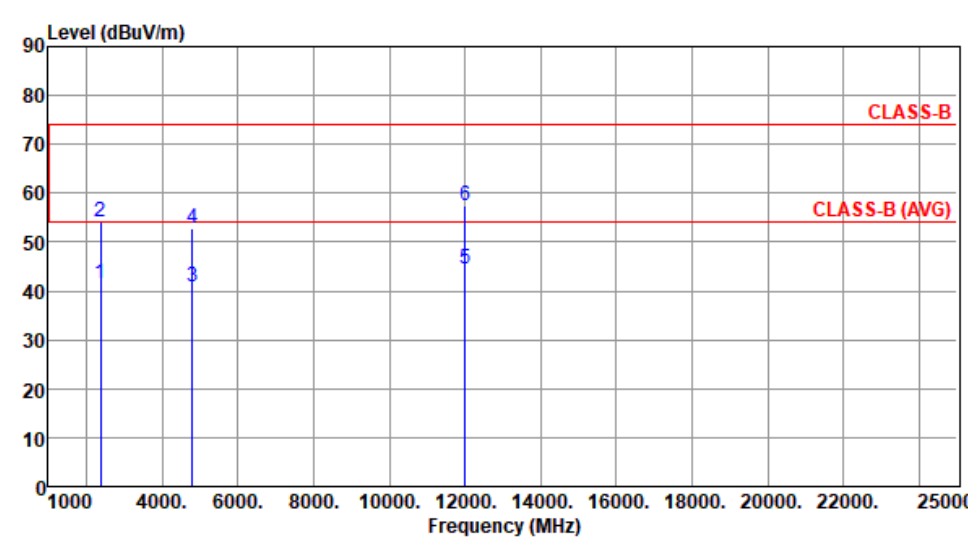
<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2402						
<b>Polarization</b>	Horizontal								
Test By :BRAD WU      Temperature(°C):23      Humidity(%):64									
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (1000 to 25000). Two horizontal red lines represent limits: CLASS-B at approximately 74 dBuV/m and CLASS-B (AVG) at approximately 54 dBuV/m. Six data points are shown as vertical blue lines with labels 1 through 6. Point 1 is at 2390 MHz (41.36 dBuV/m), point 2 at 2390 MHz (54.12 dBuV/m), point 3 at 4804 MHz (40.97 dBuV/m), point 4 at 4804 MHz (52.72 dBuV/m), point 5 at 12010 MHz (44.59 dBuV/m), and point 6 at 12010 MHz (57.47 dBuV/m).</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.36	54.00	-12.64	43.67	-2.31	Average	100	345
2	2390.00	54.12	74.00	-19.88	56.43	-2.31	Peak	100	345
3	4804.00	40.97	54.00	-13.03	36.51	4.46	Average	100	33
4	4804.00	52.72	74.00	-21.28	48.26	4.46	Peak	100	33
5	12010.00	44.59	54.00	-9.41	30.82	13.77	Average	111	44
6	12010.00	57.47	74.00	-16.53	43.70	13.77	Peak	111	44
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)  *Factor includes antenna factor , cable loss and amplifier gain  Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

Test By :BRAD WU      Temperature(°C):23      Humidity(%) :64

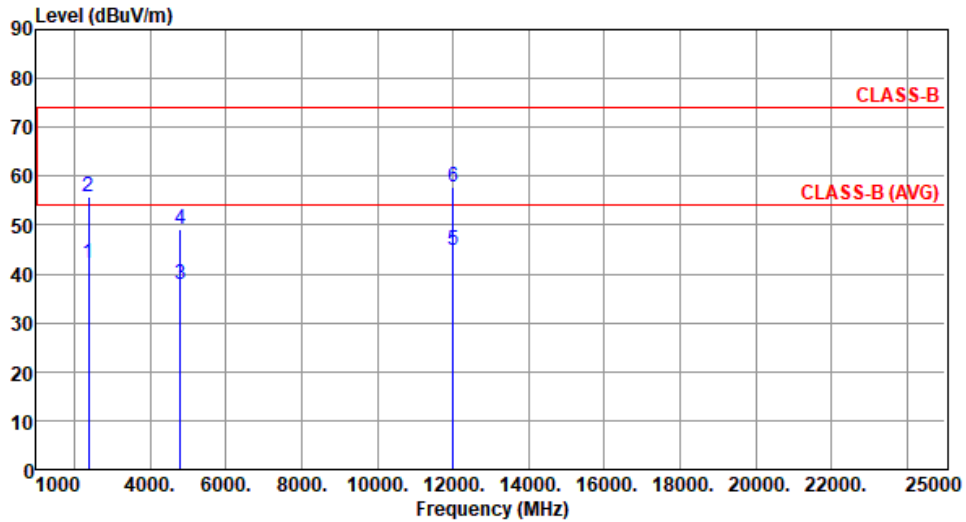

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.23	54.00	-11.77	44.54	-2.31	Average	296	2
2	2390.00	55.93	74.00	-18.07	58.24	-2.31	Peak	296	2
3	4804.00	37.95	54.00	-16.05	33.49	4.46	Average	115	321
4	4804.00	49.22	74.00	-24.78	44.76	4.46	Peak	115	321
5	12010.00	44.74	54.00	-9.26	30.97	13.77	Average	100	55
6	12010.00	57.63	74.00	-16.37	43.86	13.77	Peak	100	55


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Horizontal		

Test By :BRAD WU      Temperature(°C):23      Humidity(%) :64

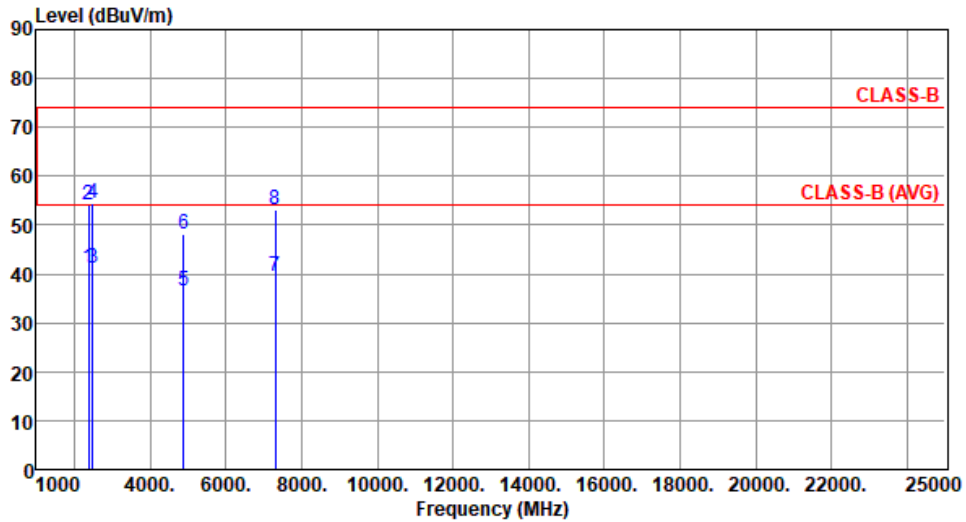

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.26	54.00	-12.74	43.57	-2.31	Average	100	346
2	2390.00	54.09	74.00	-19.91	56.40	-2.31	Peak	100	346
3	2483.50	41.34	54.00	-12.66	43.62	-2.28	Average	100	346
4	2483.50	54.56	74.00	-19.44	56.84	-2.28	Peak	100	346
5	4880.00	36.47	54.00	-17.53	31.97	4.50	Average	100	125
6	4880.00	48.12	74.00	-25.88	43.62	4.50	Peak	100	125
7	7320.00	39.62	54.00	-14.38	29.96	9.66	Average	100	48
8	7320.00	53.20	74.00	-20.80	43.54	9.66	Peak	100	48


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Vertical		

Test By :BRAD WU      Temperature(°C):23      Humidity(%):64

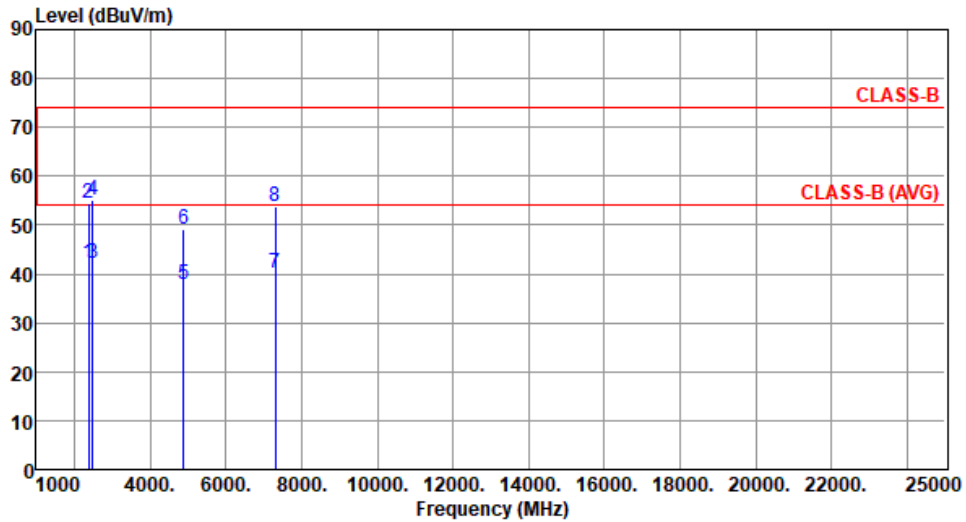

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	42.22	54.00	-11.78	44.53	-2.31	Average	280	4
2	2390.00	54.40	74.00	-19.60	56.71	-2.31	Peak	280	4
3	2483.50	42.17	54.00	-11.83	44.45	-2.28	Average	280	4
4	2483.50	55.14	74.00	-18.86	57.42	-2.28	Peak	280	4
5	4880.00	37.87	54.00	-16.13	33.37	4.50	Average	116	324
6	4880.00	49.10	74.00	-24.90	44.60	4.50	Peak	116	324
7	7320.00	40.22	54.00	-13.78	30.56	9.66	Average	100	88
8	7320.00	53.91	74.00	-20.09	44.25	9.66	Peak	100	88

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal		

Test By :BRAD WU      Temperature(°C):23      Humidity(%) :64

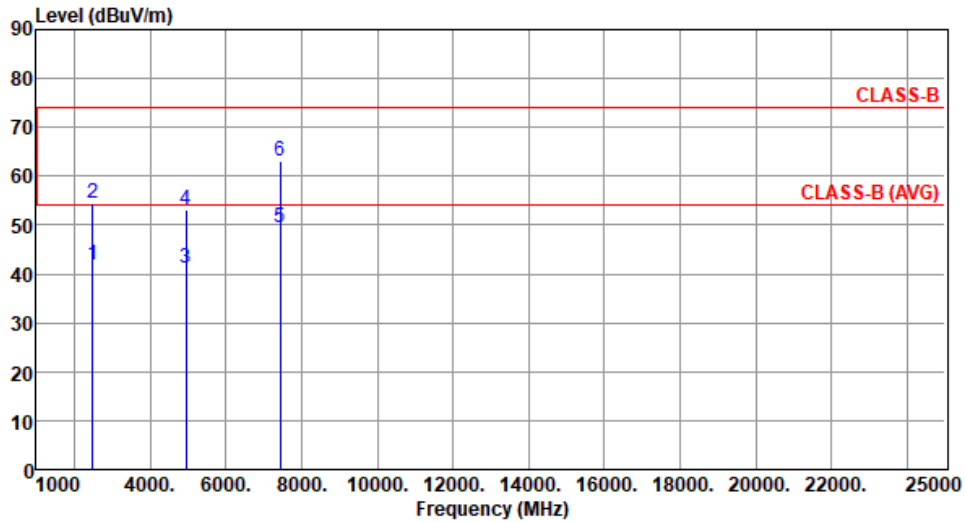

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	41.74	54.00	-12.26	44.02	-2.28	Average	100	342
2	2483.50	54.37	74.00	-19.63	56.65	-2.28	Peak	100	342
3	4960.00	41.25	54.00	-12.75	36.51	4.74	Average	100	133
4	4960.00	52.99	74.00	-21.01	48.25	4.74	Peak	100	133
5	7440.00	49.39	54.00	-4.61	39.81	9.58	Average	100	55
6	7440.00	62.94	74.00	-11.06	53.36	9.58	Peak	100	55


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical		

Test By :BRAD WU      Temperature(°C):23      Humidity(%):64

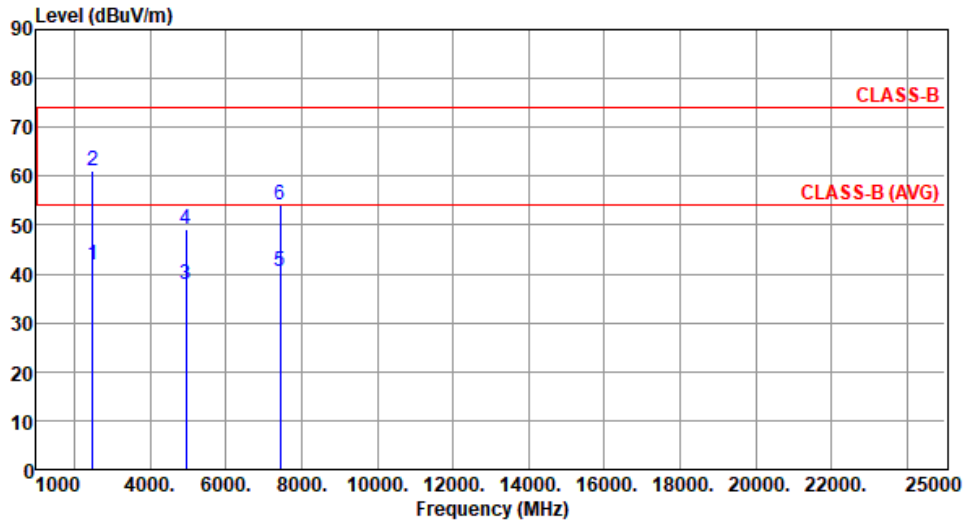

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	41.78	54.00	-12.22	44.06	-2.28	Average	277	9
2	2483.50	61.05	74.00	-12.95	63.33	-2.28	Peak	277	9
3	4960.00	37.94	54.00	-16.06	33.20	4.74	Average	115	321
4	4960.00	49.25	74.00	-24.75	44.51	4.74	Peak	115	321
5	7440.00	40.38	54.00	-13.62	30.80	9.58	Average	100	91
6	7440.00	54.26	74.00	-19.74	44.68	9.58	Peak	100	91

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

## Configuration 2: Individual antenna


### 3.5.6 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	BT LE-1Mbps	Test Freq. (MHz)	2402						
Polarization	Horizontal								
Test By : BRAD WU		Temperature(°C): 22	Humidity(%): 64						
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	98.75	34.23	43.50	-9.27	48.43	-14.20	Peak	---	---
2	125.11	42.12	43.50	-1.38	52.99	-10.87	QP	159	267
3	199.61	35.78	43.50	-7.72	48.16	-12.38	Peak	---	---
4	299.58	35.76	46.00	-10.24	44.41	-8.65	Peak	---	---
5	600.42	37.54	46.00	-8.46	38.41	-0.87	Peak	---	---
6	850.59	40.85	46.00	-5.15	37.45	3.40	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

Test By :BRAD WU      Temperature(°C):22      Humidity(%):64

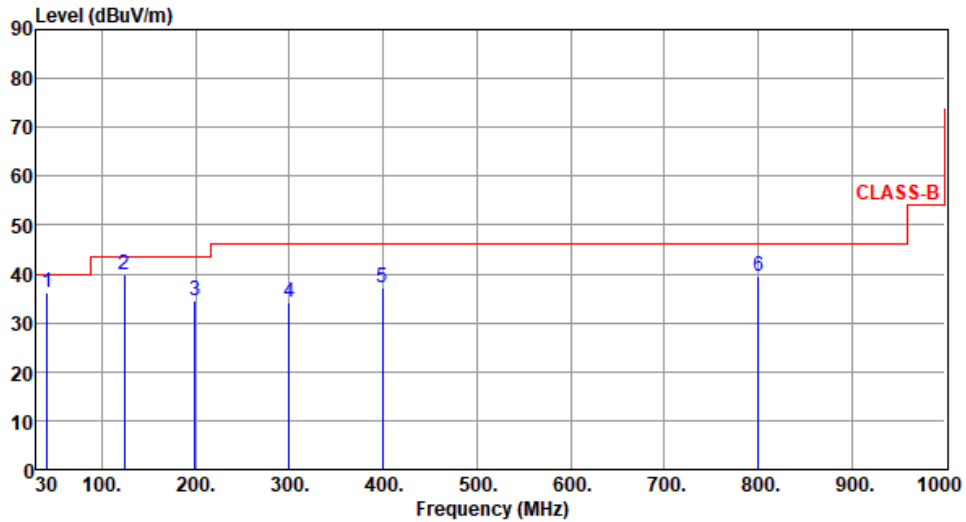

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	41.54	36.23	40.00	-3.77	45.19	-8.96	Peak	---	---
2	124.15	39.78	43.50	-3.72	50.74	-10.96	Peak	---	---
3	199.61	34.48	43.50	-9.02	46.86	-12.38	Peak	---	---
4	299.55	34.16	46.00	-11.84	42.81	-8.65	Peak	---	---
5	399.67	37.24	46.00	-8.76	43.11	-5.87	Peak	---	---
6	800.22	39.47	46.00	-6.53	36.67	2.80	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.


### 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz)
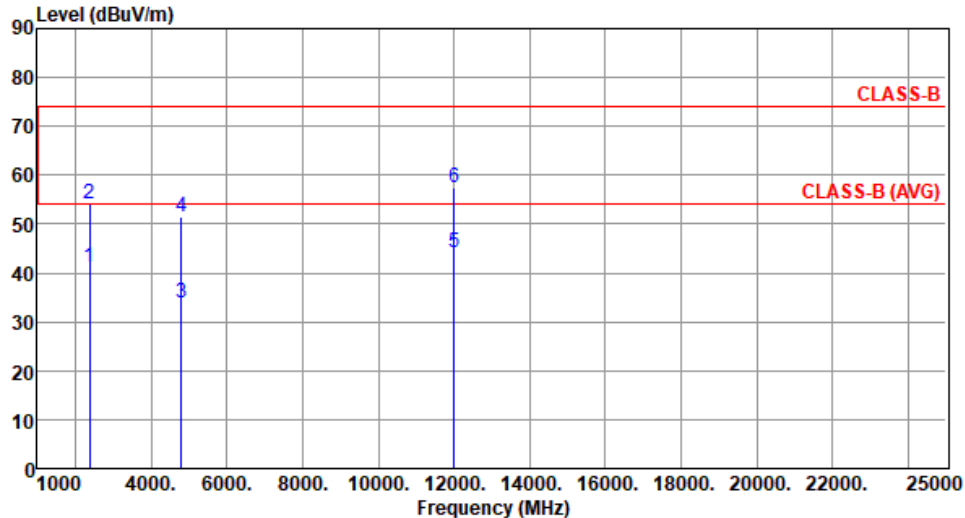
<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2402						
<b>Polarization</b>	Horizontal								
Test By :BRAD WU      Temperature(°C):23      Humidity(%):64									
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.12	54.00	-12.88	43.43	-2.31	Average	100	58
2	2390.00	54.06	74.00	-19.94	56.37	-2.31	Peak	100	58
3	4804.00	33.82	54.00	-20.18	29.36	4.46	Average	100	56
4	4804.00	51.61	74.00	-22.39	47.15	4.46	Peak	100	56
5	12010.00	44.20	54.00	-9.80	30.43	13.77	Average	100	47
6	12010.00	57.47	74.00	-16.53	43.70	13.77	Peak	100	47

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2402
<b>Polarization</b>	Vertical		

Test By :BRAD WU      Temperature(°C):23      Humidity(%):64

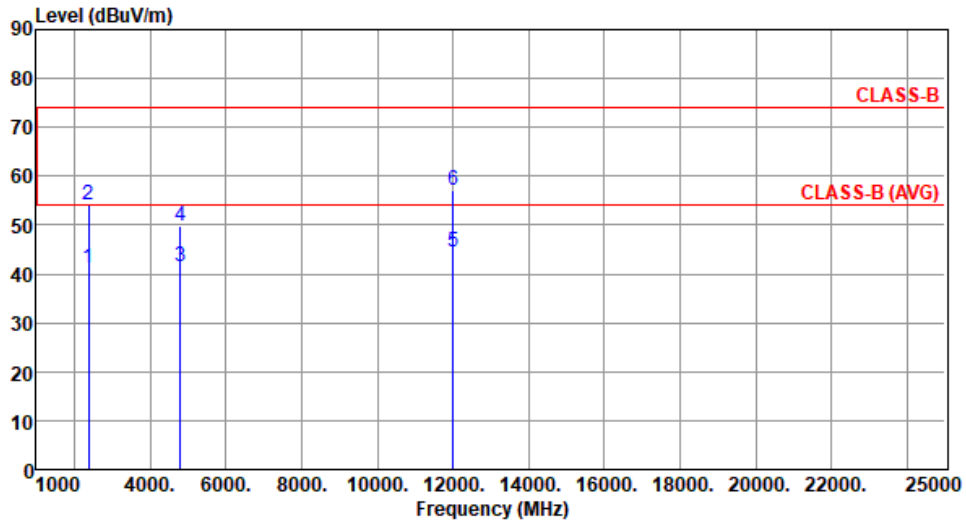

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.21	54.00	-12.79	43.52	-2.31	Average	186	2
2	2390.00	54.19	74.00	-19.81	56.50	-2.31	Peak	186	2
3	4804.00	41.57	54.00	-12.43	37.11	4.46	Average	119	9
4	4804.00	49.81	74.00	-24.19	45.35	4.46	Peak	119	9
5	12010.00	44.62	54.00	-9.38	30.85	13.77	Average	100	55
6	12010.00	57.03	74.00	-16.97	43.26	13.77	Peak	100	55


Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Horizontal		

Test By :BRAD WU      Temperature(°C):23      Humidity(%) :64

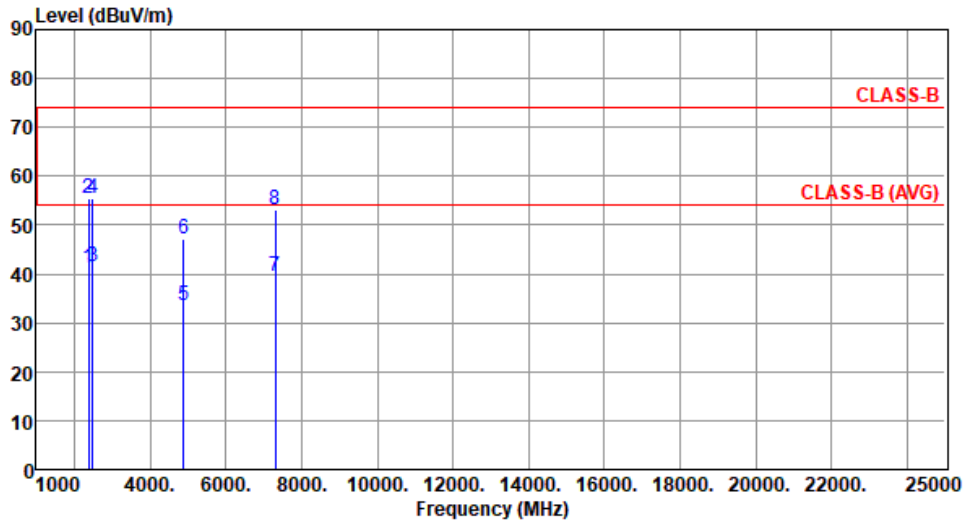

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.32	54.00	-12.68	43.63	-2.31	Average	100	60
2	2390.00	55.33	74.00	-18.67	57.64	-2.31	Peak	100	60
3	2483.50	41.38	54.00	-12.62	43.66	-2.28	Average	100	60
4	2483.50	55.56	74.00	-18.44	57.84	-2.28	Peak	100	60
5	4880.00	33.67	54.00	-20.33	29.17	4.50	Average	100	31
6	4880.00	47.02	74.00	-26.98	42.52	4.50	Peak	100	31
7	7320.00	39.57	54.00	-14.43	29.91	9.66	Average	100	54
8	7320.00	53.22	74.00	-20.78	43.56	9.66	Peak	100	54


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2440
<b>Polarization</b>	Vertical		

Test By :BRAD WU      Temperature(°C):23      Humidity(%):64

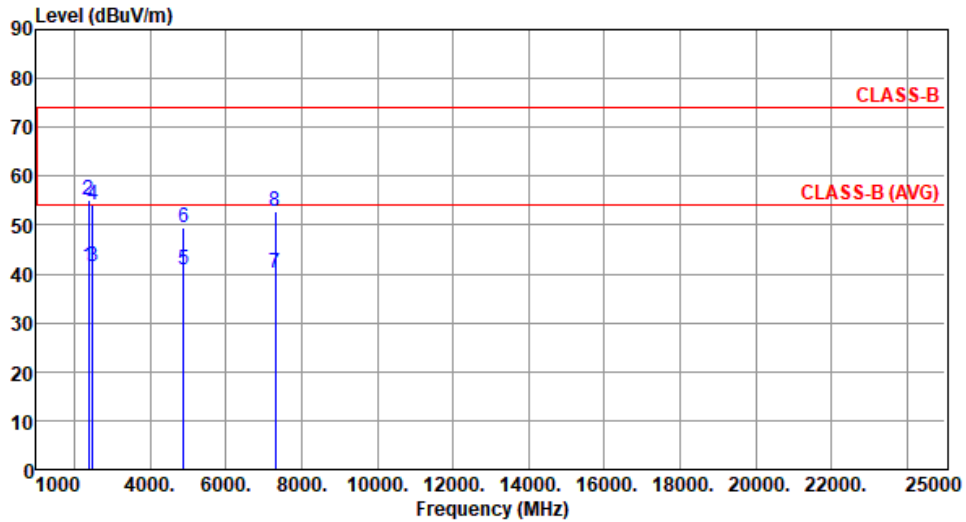

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	41.50	54.00	-12.50	43.81	-2.31	Average	183	51
2	2390.00	55.26	74.00	-18.74	57.57	-2.31	Peak	183	51
3	2483.50	41.53	54.00	-12.47	43.81	-2.28	Average	183	51
4	2483.50	54.07	74.00	-19.93	56.35	-2.28	Peak	183	51
5	4880.00	40.95	54.00	-13.05	36.45	4.50	Average	117	3
6	4880.00	49.49	74.00	-24.51	44.99	4.50	Peak	117	3
7	7320.00	40.04	54.00	-13.96	30.38	9.66	Average	100	15
8	7320.00	52.87	74.00	-21.13	43.21	9.66	Peak	100	15

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Horizontal		

Test By :BRAD WU      Temperature(°C):23      Humidity(%):64

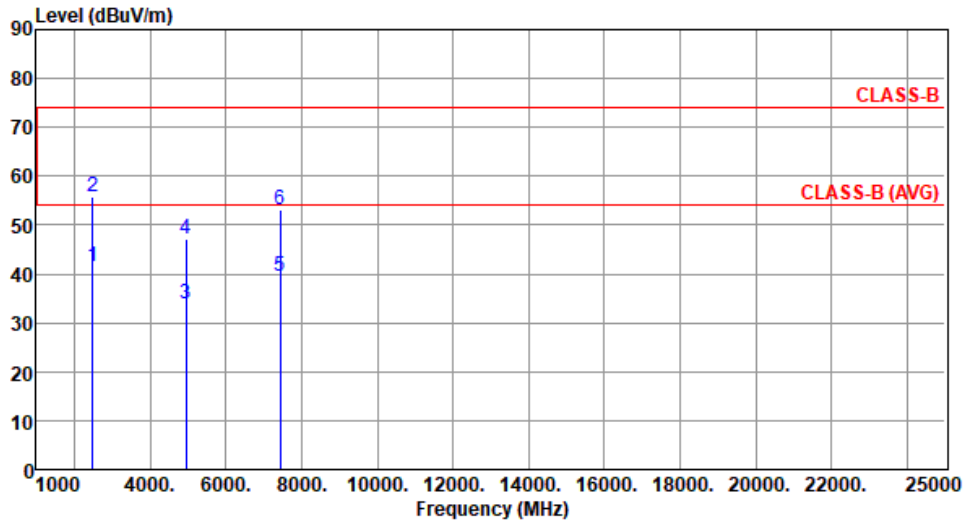

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	41.59	54.00	-12.41	43.87	-2.28	Average	100	68
2	2483.50	55.68	74.00	-18.32	57.96	-2.28	Peak	100	68
3	4960.00	33.82	54.00	-20.18	29.08	4.74	Average	100	36
4	4960.00	47.25	74.00	-26.75	42.51	4.74	Peak	100	36
5	7440.00	39.61	54.00	-14.39	30.03	9.58	Average	100	44
6	7440.00	53.26	74.00	-20.74	43.68	9.58	Peak	100	44


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

<b>Modulation</b>	BT LE-1Mbps	<b>Test Freq. (MHz)</b>	2480
<b>Polarization</b>	Vertical		

Test By :BRAD WU      Temperature(°C):23      Humidity(%):64

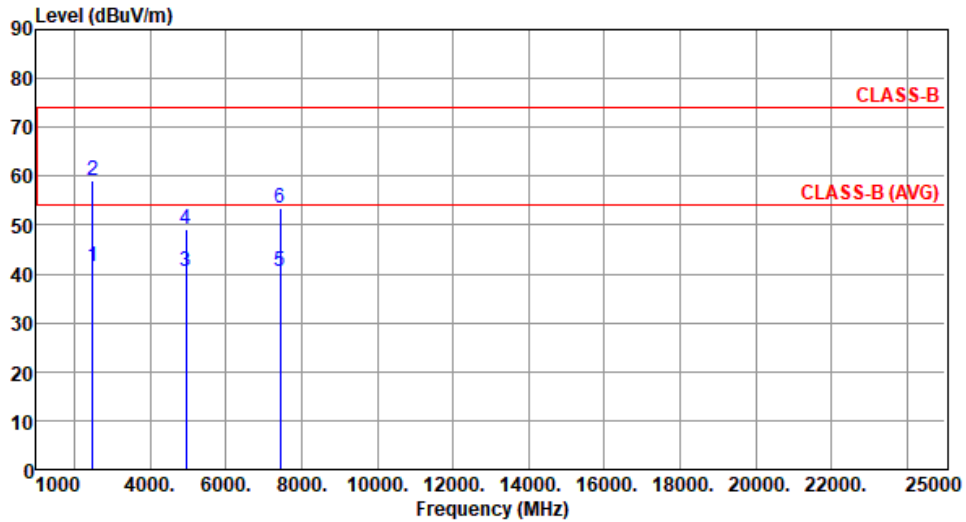

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2483.50	41.62	54.00	-12.38	43.90	-2.28	Average	182	49
2	2483.50	59.20	74.00	-14.80	61.48	-2.28	Peak	182	49
3	4960.00	40.66	54.00	-13.34	35.92	4.74	Average	116	5
4	4960.00	49.10	74.00	-24.90	44.36	4.74	Peak	116	5
5	7440.00	40.50	54.00	-13.50	30.92	9.58	Average	100	55
6	7440.00	53.39	74.00	-20.61	43.81	9.58	Peak	100	55

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

## 3.6 Emissions in non-restricted Frequency Bands

### 3.6.1 Emissions in non-restricted frequency bands limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.6.2 Test Procedures


#### Reference level measurement

1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Use the peak marker function to determine the maximum PSD level

#### Emission level measurement


1. Set RBW=100kHz, VBW = 300kHz , Detector = Peak, Sweep time = Auto
2. Trace = max hold , Allow Trace to fully stabilize
3. Scan Frequency range is up to 25GHz
4. Use the peak marker function to determine the maximum amplitude level

### 3.6.3 Test Setup



### 3.6.4 Test Result of Emissions in non-restricted Frequency Bands


Ambient Condition	22°C / 67%	Tested By	Brad Wu
-------------------	------------	-----------	---------

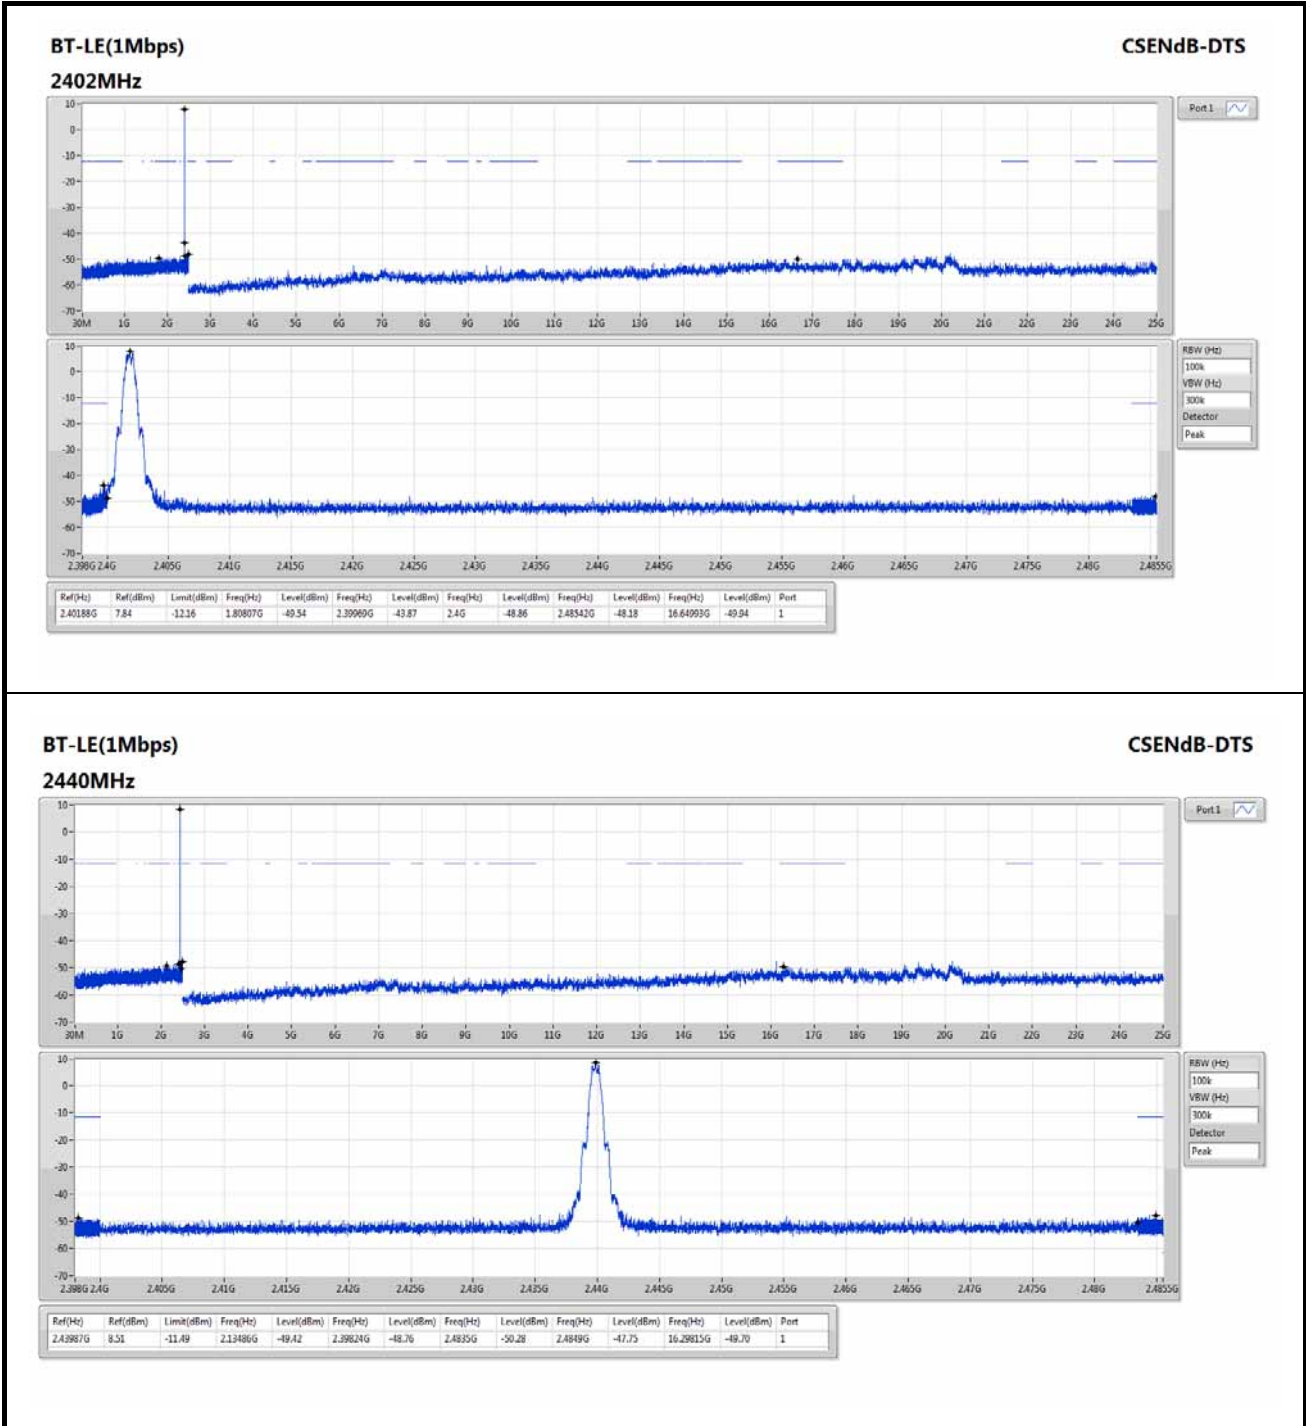

BT-LE(1Mbps)

CSEndB-DTS

2480MHz

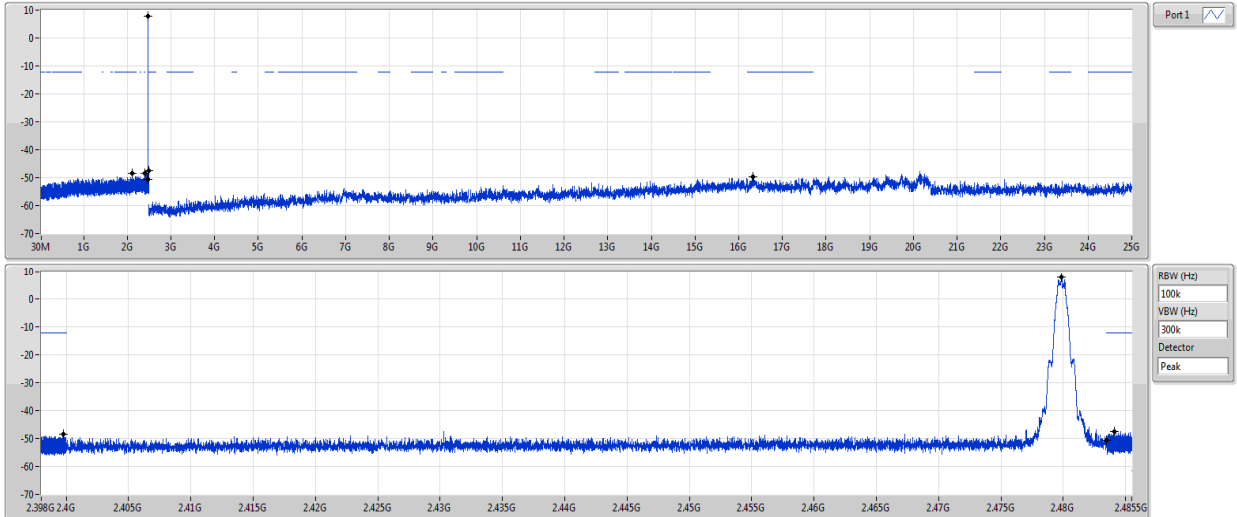

Ref(Hz)	Ref(dBm)	Limit(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Freq(Hz)	Level(dBm)	Port
247986G	7.78	-12.22	2.11118G	-48.44	2.39976G	-48.48	2.4835G	-50.75	2.48408G	-47.43	16.33473G	-49.63	1

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: [ICC\\_Service@icertifi.com.tw](mailto:ICC_Service@icertifi.com.tw)

==END==