


# TEST REPORT

Reference No. .... : WTD16S0549502E  
FCC ID..... : 2A1IF-06787PG  
Applicant ..... : Superior Communications DBA PureGear  
Address ..... : 5082 4th Street Irwindale California USA  
Manufacturer ..... : Superior Communications DBA PureGear  
Address ..... : 5082 4th Street Irwindale California USA  
Product Name ..... : PureBoom Bluetooth Earbuds  
Model No. .... : 06787PG  
Brand. .... :   
Standards ..... : FCC CFR47 Part 15 Section 15.247:2015  
Date of Receipt sample .... : May. 04, 2016  
Date of Test ..... : May. 05 – 07, 2016  
Date of Issue ..... : May. 11, 2016  
Test Result ..... : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China  
Tel :+86-755-83551033  
Fax:+86-755-83552400

Compiled by:

*Lake Xie*

Lake Xie / Test Engineer

Approved by:



*Philo Zhong*

Philo Zhong / Manager

## 2 Test Summary

Test Items	Test Requirement	Result
Conduct Emission	15.207	PASS
Spurious Radiated Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge	15.247(d) 15.205(a)	PASS
20dB Bandwidth	15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

### 3 Contents

	<b>Page</b>
<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 TEST SUMMARY</b> .....	<b>2</b>
<b>3 CONTENTS</b> .....	<b>3</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1 GENERAL DESCRIPTION OF E.U.T. ....	5
4.2 DETAILS OF E.U.T. ....	5
4.3 CHANNEL LIST .....	5
4.4 TEST MODE .....	6
4.5 TEST FACILITY .....	6
<b>5 EQUIPMENT USED DURING TEST</b> .....	<b>7</b>
5.1 EQUIPMENTS LIST .....	7
5.2 MEASUREMENT UNCERTAINTY .....	7
5.3 TEST EQUIPMENT CALIBRATION .....	8
<b>6 CONDUCTED EMISSION</b> .....	<b>9</b>
6.1 E.U.T. OPERATION .....	9
6.2 EUT SETUP .....	9
6.3 CONDUCTED EMISSION TEST RESULT .....	10
<b>7 RADIATED EMISSIONS</b> .....	<b>12</b>
7.1 EUT OPERATION.....	12
7.2 TEST SETUP .....	12
7.3 SPECTRUM ANALYZER SETUP .....	14
7.4 TEST PROCEDURE .....	14
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION .....	15
7.6 SUMMARY OF TEST RESULTS .....	16
<b>8 BAND EDGE MEASUREMENT</b> .....	<b>19</b>
8.1 TEST PROCEDURE .....	19
8.2 TEST RESULT: .....	20
<b>9 20 DB BANDWIDTH MEASUREMENT</b> .....	<b>26</b>
9.1 TEST PROCEDURE: .....	26
9.2 TEST RESULT: .....	26
<b>10 MAXIMUM PEAK OUTPUT POWER</b> .....	<b>32</b>
10.1 TEST PROCEDURE:.....	32
10.2 TEST RESULT: .....	32
<b>11 HOPPING CHANNEL SEPARATION</b> .....	<b>38</b>
11.1 TEST PROCEDURE:.....	38
11.2 TEST RESULT: .....	38
<b>12 NUMBER OF HOPPING FREQUENCY</b> .....	<b>44</b>
12.1 TEST PROCEDURE:.....	44
12.2 TEST RESULT: .....	44
<b>13 DWELL TIME</b> .....	<b>46</b>
13.1 TEST PROCEDURE:.....	46
13.2 TEST RESULT: .....	46
<b>14 ANTENNA REQUIREMENT</b> .....	<b>53</b>

<b>15</b>	<b>RF EXPOSURE</b> .....	<b>54</b>
15.1	REQUIREMENTS.....	54
15.2	THE PROCEDURES / LIMIT.....	54
15.3	MPE CALCULATION METHOD .....	55
<b>16</b>	<b>PHOTOGRAPHS – TEST SETUP</b> .....	<b>56</b>
16.1	CONDUCTED EMISSIONS .....	56
16.2	RADIATED EMISSIONS .....	56
<b>17</b>	<b>PHOTOGRAPHS – CONSTRUCTIONAL DETAILS</b> .....	<b>58</b>
17.1	EUT – APPEARANCE VIEW .....	58
17.2	EUT – OPEN VIEW.....	62

## 4 General Information

### 4.1 General Description of E.U.T.

<b>Product Name</b>	: PureBoom Bluetooth Earbuds
<b>Model No.</b>	:06787PG
<b>Model Description</b>	: N/A
<b>Operation Frequency</b>	: 2402-2480MHz, 79(EDR) Channels in total
<b>The Lowest Oscillator</b>	: 26MHz
<b>Antenna Gain</b>	: 0dBi
<b>Type of Modulation</b>	: GFSK, Pi/4DQPSK, 8DPSK
<b>Antenna installation</b>	: PCB Printed Antenna

### 4.2 Details of E.U.T.

<b>Technical Data</b>	:DC 3.7V, 60mAh
-----------------------	-----------------

### 4.3 Channel List

Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)	Channel No.	Frequency (MHz)
1	2402	2	2403	3	2404	4	2405
5	2406	6	2407	7	2408	8	2409
9	2410	10	2411	11	2412	12	2413
13	2414	14	2415	15	2416	16	2417
17	2418	18	2419	19	2420	20	2421
21	2422	22	2423	23	2424	24	2425
25	2426	26	2427	27	2428	28	2429
29	2430	30	2431	31	2432	32	2433
33	2434	34	2435	35	2436	36	2437
37	2438	38	2439	39	2440	40	2441
41	2442	42	2443	43	2444	44	2445
45	2446	46	2447	47	2448	48	2449
49	2450	50	2451	51	2452	52	2453
53	2454	54	2455	55	2456	56	2457
57	2458	58	2459	59	2460	60	2461
61	2462	62	2463	63	2464	64	2465
65	2466	66	2467	67	2468	68	2469
69	2470	70	2471	71	2472	72	2473
73	2474	74	2475	75	2476	76	2477
77	2478	78	2479	79	2480	-	-

#### 4.4 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

Table 1 Tests Carried Out Under FCC part 15.247

Bluetooth mode	Test mode	Low channel	Middle channel	High channel
EDR	Transmitting	2402MHz	2441MHz	2480MHz

Table 2 Tests Carried Out Under FCC part 15.207 and 15.209

Test Item	Test Mode
Radiated Emissions	Communication
Conducted Emissions	Communication

#### 4.5 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A-1**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A-1, October 15, 2015

- **FCC Test Site 1#– Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory ` has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.

- **FCC Test Site 2#– Registration No.: 328995**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory ` has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

## 5 Equipment Used during Test

### 5.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.14,2015	Sep.13,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.18,2016	Apr.17,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.14,2015	Sep.13,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.18,2016	Apr.17,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.18,2016	Apr.17,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.16,2016	Mar.15,2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.09,2016	Apr.08,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.14,2015	Sep.13,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.14,2015	Sep.13,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.14,2015	Sep.13,2016
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.14,2015	Sep.13,2016
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.14,2015	Sep.13,2016
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	Sep.14,2015	Sep.13,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.14,2015	Sep.13,2016

### 5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB

Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

### 5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.



## 6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB $\mu$ V between 0.15MHz & 0.5MHz 56 dB $\mu$ V between 0.5MHz & 5MHz 60 dB $\mu$ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

### 6.1 E.U.T. Operation

#### Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar

#### EUT Operation:


The test was performance on bluetooth linking mode, the test data shown in the report.

The EUT was tested according to ANSI C63.10. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

### 6.2 EUT Setup


The EUT was placed on the test table in shielding room.

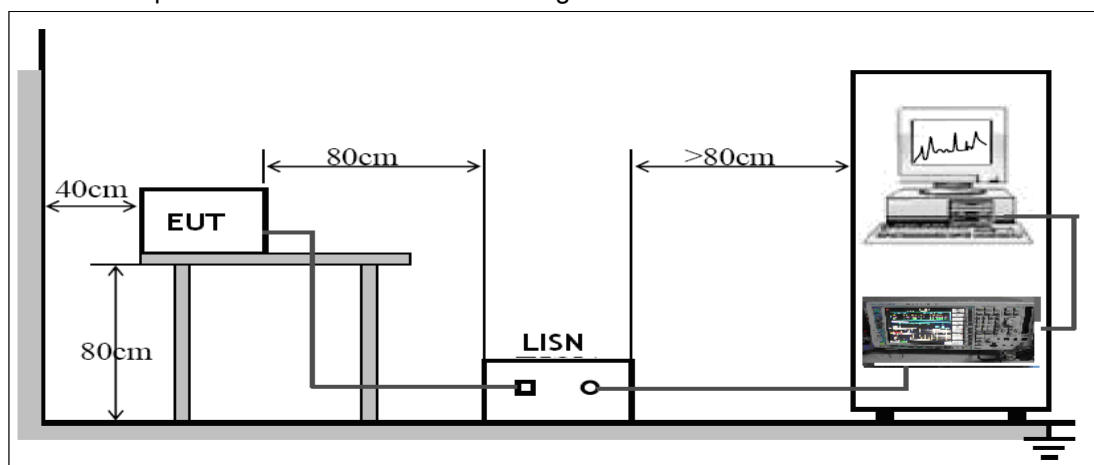

### 6.3 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

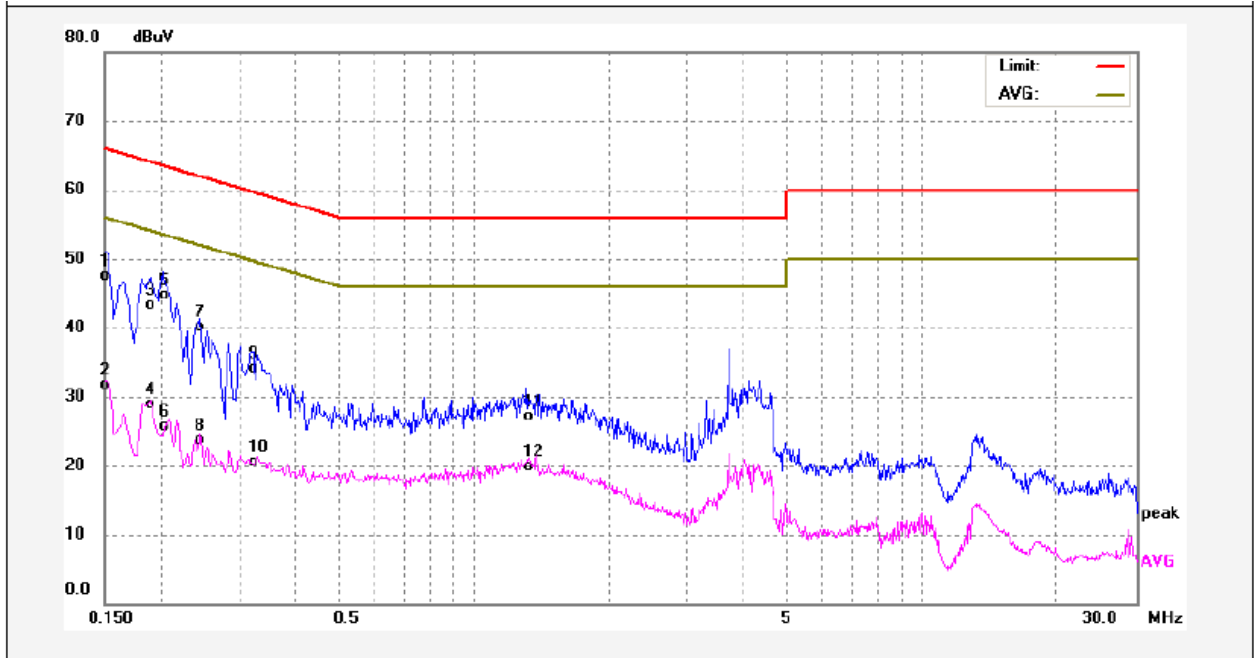

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	37.27	10.29	47.56	65.99	-18.43	QP	
2	0.1500	21.50	10.29	31.79	55.99	-24.20	AVG	
3	0.1900	33.04	10.27	43.31	64.03	-20.72	QP	
4	0.1900	18.61	10.27	28.88	54.03	-25.15	AVG	
5	0.2020	34.47	10.26	44.73	63.52	-18.79	QP	
6	0.2020	15.51	10.26	25.77	53.52	-27.75	AVG	
7	0.2460	29.89	10.26	40.15	61.89	-21.74	QP	
8	0.2460	13.48	10.26	23.74	51.89	-28.15	AVG	
9	0.3220	23.89	10.28	34.17	59.65	-25.48	QP	
10	0.3220	10.23	10.28	20.51	49.65	-29.14	AVG	
11	1.3099	16.76	10.42	27.18	56.00	-28.82	QP	
12	1.3099	9.42	10.42	19.84	46.00	-26.16	AVG	

Neutral line:

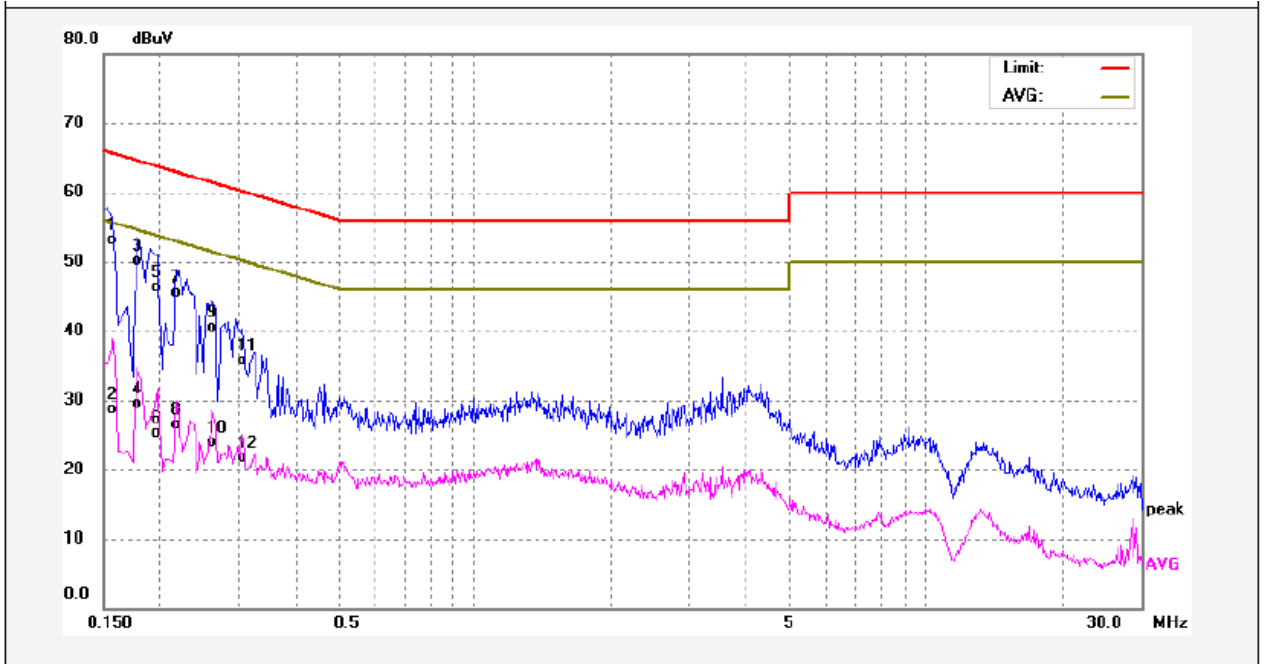

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1580	42.92	10.28	53.20	65.56	-12.36	QP	
2	0.1580	18.39	10.28	28.67	55.56	-26.89	AVG	
3	0.1780	39.77	10.27	50.04	64.57	-14.53	QP	
4	0.1780	19.19	10.27	29.46	54.57	-25.11	AVG	
5	0.1980	36.04	10.26	46.30	63.69	-17.39	QP	
6	0.1980	15.10	10.26	25.36	53.69	-28.33	AVG	
7	0.2180	35.28	10.26	45.54	62.89	-17.35	QP	
8	0.2180	16.30	10.26	26.56	52.89	-26.33	AVG	
9	0.2620	30.21	10.26	40.47	61.36	-20.89	QP	
10	0.2620	13.62	10.26	23.88	51.36	-27.48	AVG	
11	0.3060	25.45	10.28	35.73	60.08	-24.35	QP	
12	0.3060	11.37	10.28	21.65	50.08	-28.43	AVG	

## 7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

### 7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


### 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

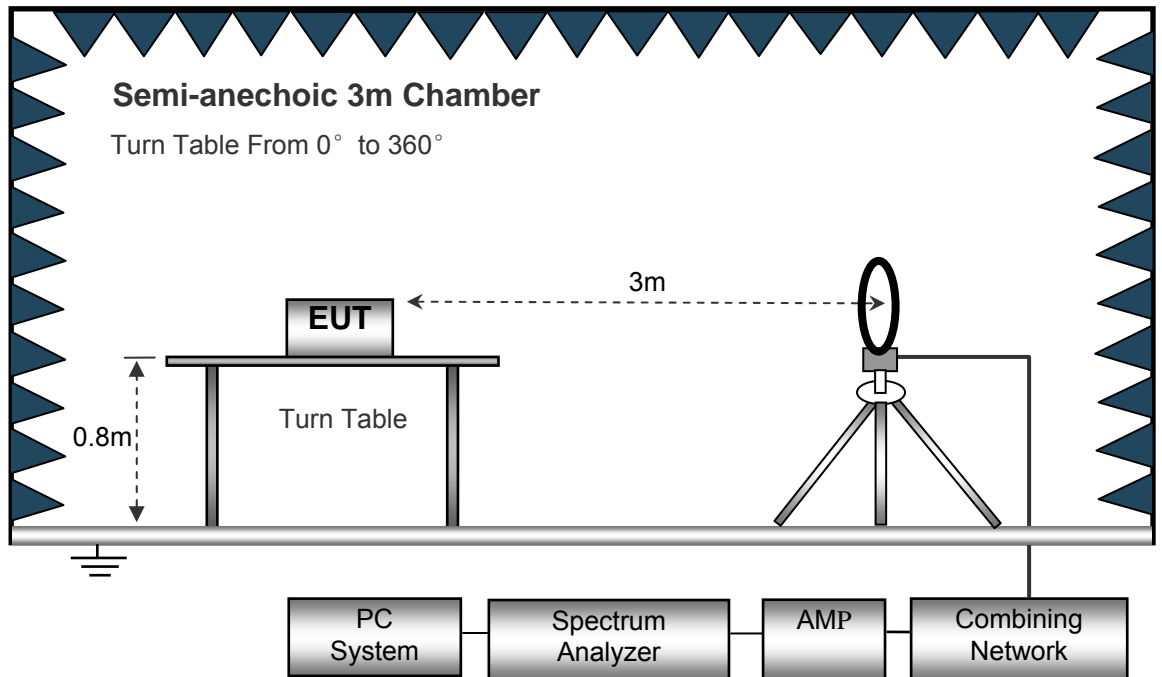

The test setup for emission measurement from 30 MHz to 1 GHz.

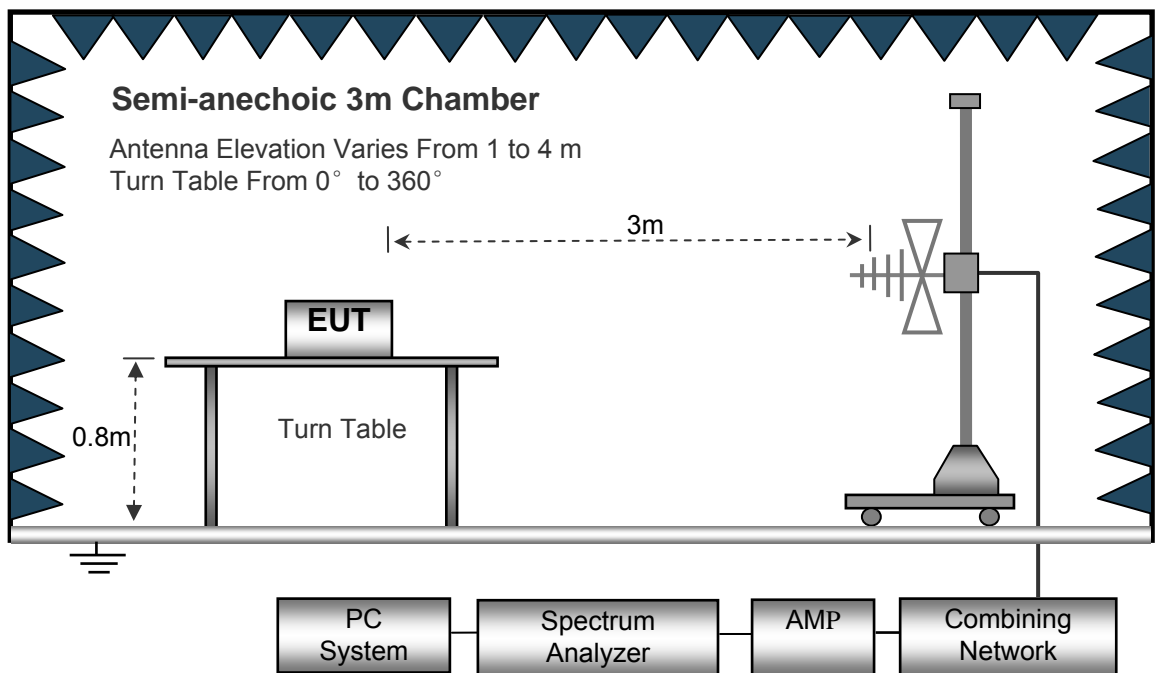

The test setup for emission measurement above 1 GHz.

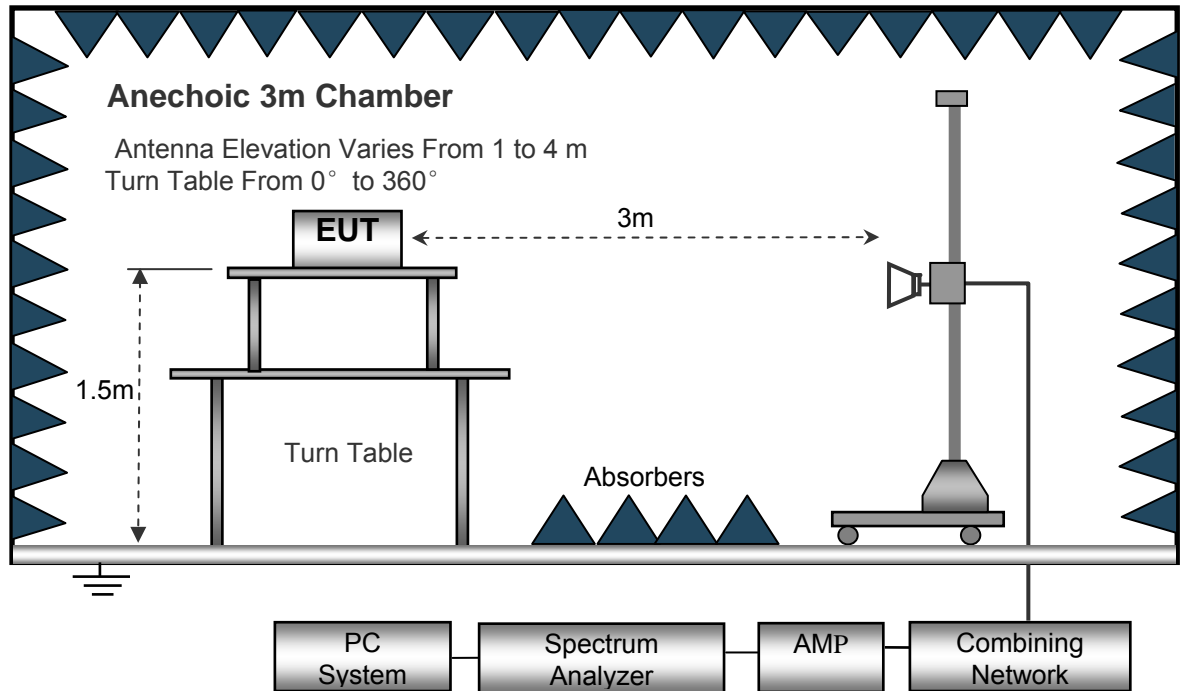

### 7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth..... 10kHz  
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth..... 10Hz

### 7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.

3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high –pass filter is used druing radiated emissions above 1GHz measurement.

## 7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

## 7.6 Summary of Test Results

### Test Frequency :26MHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

### Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Low Channel 2402MHz									
176.02	20.35	QP	202	1.4	H	10.12	30.47	43.53	-13.06
176.02	19.94	QP	346	1.5	V	10.12	30.06	43.53	-13.47
4804.00	53.85	PK	293	1.9	V	-1.03	52.82	74.00	-21.18
4804.00	40.24	Ave	293	1.9	V	-1.03	39.21	54.00	-14.79
7206.00	51.15	PK	284	1.0	H	1.23	52.38	74.00	-21.62
7206.00	42.11	Ave	284	1.0	H	1.23	43.34	54.00	-10.66
2314.47	45.81	PK	75	1.9	V	-14.02	31.79	74.00	-42.21
2314.47	39.29	Ave	75	1.9	V	-14.02	25.27	54.00	-28.73
2380.55	43.15	PK	198	1.4	H	-13.54	29.61	74.00	-44.39
2380.55	37.15	Ave	198	1.4	H	-13.54	23.61	54.00	-30.39
2484.41	43.61	PK	104	1.9	V	-13.98	29.63	74.00	-44.37
2484.41	37.25	Ave	104	1.9	V	-13.98	23.27	54.00	-30.73



Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK Center Channel 2441MHz									
176.02	22.38	QP	108	1.3	H	9.23	31.61	43.53	-11.92
176.02	18.90	QP	112	1.9	V	9.23	28.13	43.53	-15.40
4882.00	51.73	PK	320	1.8	V	-0.59	51.14	74.00	-22.86
4882.00	42.34	Ave	320	1.8	V	-0.59	41.75	54.00	-12.25
7323.00	54.38	PK	216	1.7	H	2.03	56.41	74.00	-17.59
7323.00	40.39	Ave	216	1.7	H	2.03	42.42	54.00	-11.58
2313.75	46.28	PK	206	1.6	V	-13.59	32.69	74.00	-41.31
2313.75	39.00	Ave	206	1.6	V	-13.59	25.41	54.00	-28.59
2365.08	44.32	PK	263	1.0	H	-13.22	31.10	74.00	-42.90
2365.08	36.06	Ave	263	1.0	H	-13.22	22.84	54.00	-31.16
2485.87	42.06	PK	137	2.0	V	-13.06	29.00	74.00	-45.00
2485.87	37.64	Ave	137	2.0	V	-13.06	24.58	54.00	-29.42

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
GFSK High Channel 2480MHz									
176.02	22.04	QP	36	1.1	H	10.38	32.42	43.53	-11.11
176.02	19.89	QP	320	1.7	V	10.38	30.27	43.53	-13.26
4960.00	51.90	PK	182	1.6	V	-0.26	51.64	74.00	-22.36
4960.00	41.45	Ave	182	1.6	V	-0.26	41.19	54.00	-12.81
7440.00	54.51	PK	113	1.8	H	3.01	57.52	74.00	-16.48
7440.00	44.41	Ave	113	1.8	H	3.01	47.42	54.00	-6.58
2349.07	46.93	PK	50	1.5	V	-13.56	33.37	74.00	-40.63
2349.07	37.58	Ave	50	1.5	V	-13.56	24.02	54.00	-29.98
2373.56	42.81	PK	263	1.7	H	-13.33	29.48	74.00	-44.52
2373.56	36.72	Ave	263	1.7	H	-13.33	23.39	54.00	-30.61
2499.35	44.36	PK	48	1.6	V	-13.25	31.11	74.00	-42.89
2499.35	37.47	Ave	48	1.6	V	-13.25	24.22	54.00	-29.78

## 8 Band Edge Measurement

Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	ANSI C63.10:2013
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz

### 8.1 Test Procedure


1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Measurement Distance is 3m
3. Detector:
  - For Peak value:  
RBW = 1 MHz for  $f \geq 1$  GHz  
VBW  $\geq$  RBW; Sweep = auto  
Detector function = peak  
Trace = max hold
  - For AVG value:  
RBW = 1 MHz for  $f \geq 1$  GHz  
VBW = 10Hz; Sweep = auto  
Detector function = AVG  
Trace = max hold
- 4.continuous transmitting

### 8.2 Test Result:


Test plots

EDR mode


GFSK Transmitting Band edge-left side

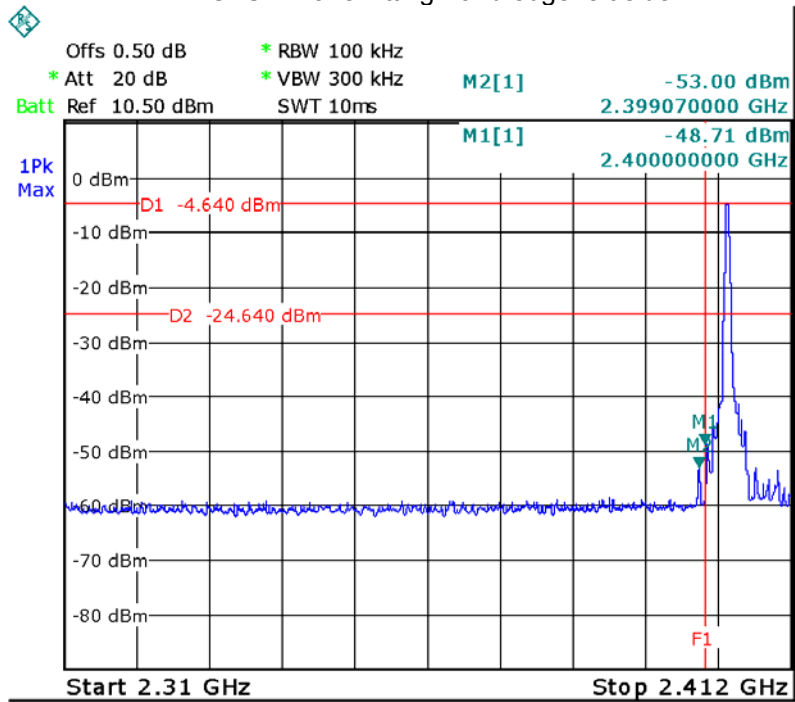


GFSK Hopping Band edge-left side

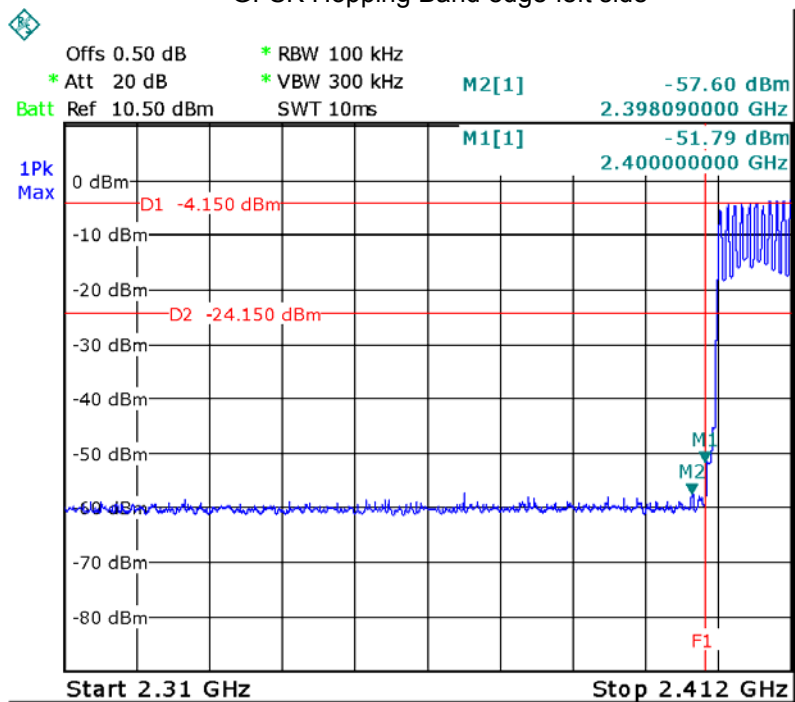


GFSK Transmitting Band edge-right side

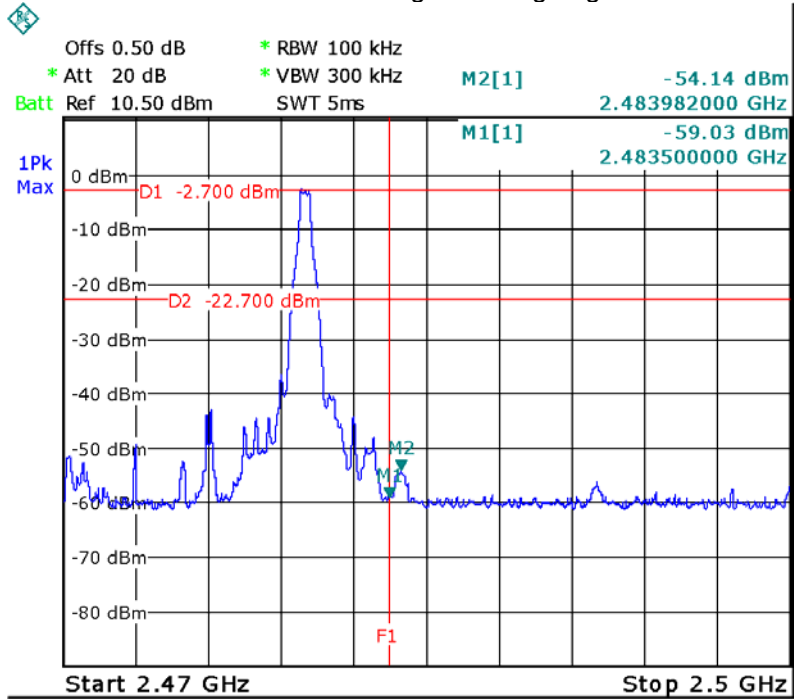


GFSK Hopping Band edge-right side

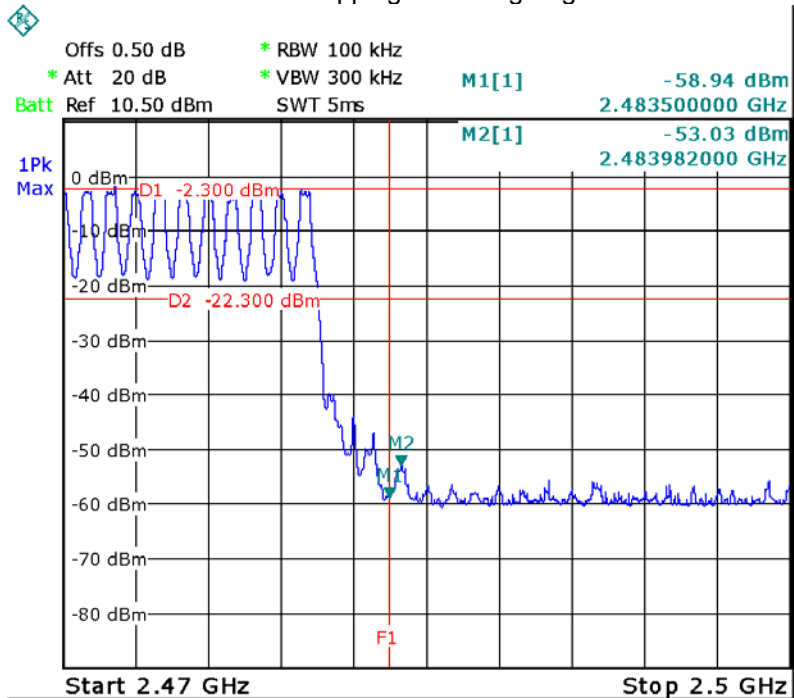


Pi/4 DQPSK Transmitting Band edge-left side

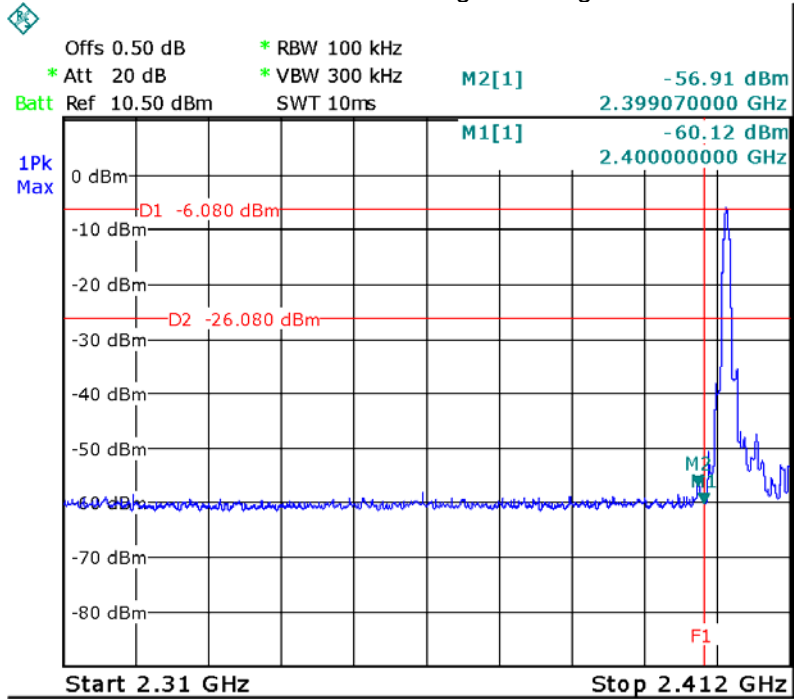


Pi/4 DQPSK Hopping Band edge-left side

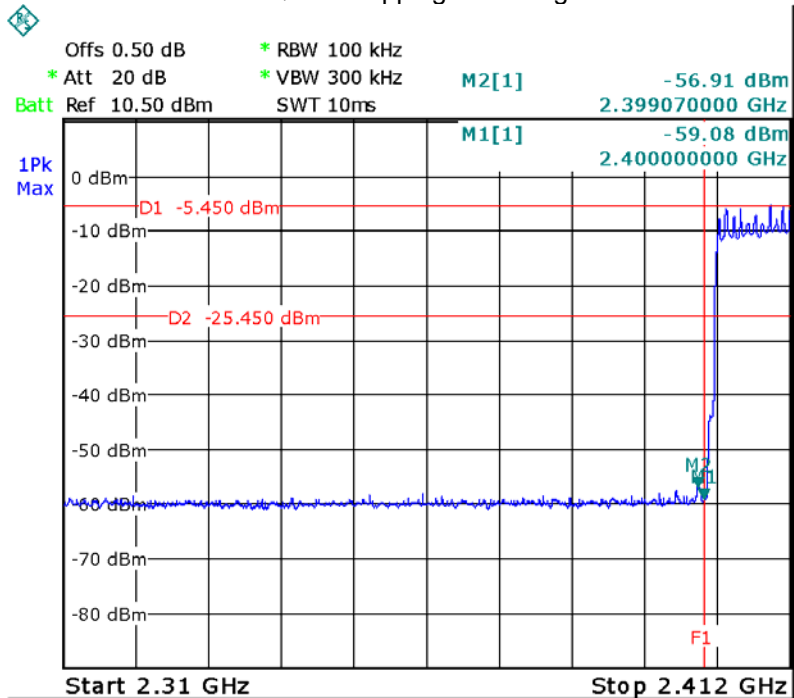


Pi/4 DQPSK Transmitting Band edge-right side

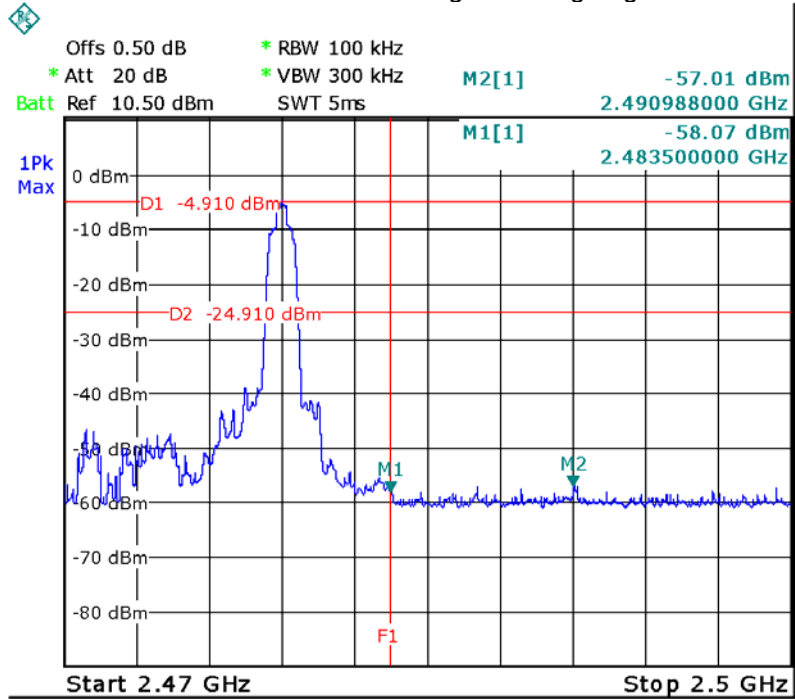


Pi/4 DQPSK Hopping Band edge-right side

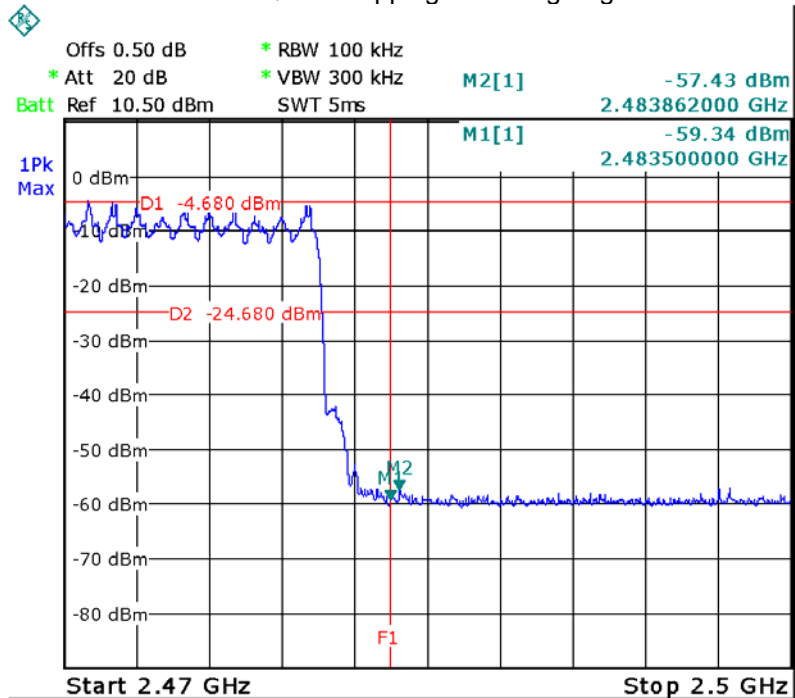

### 8DPSK Transmitting Band edge-left side

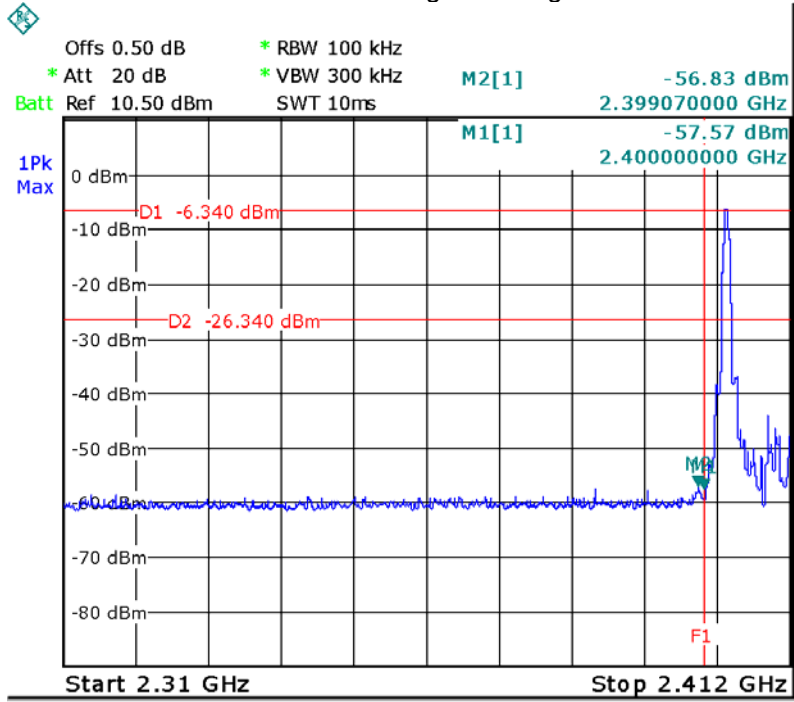


### 8DPSK Hopping Band edge-left side

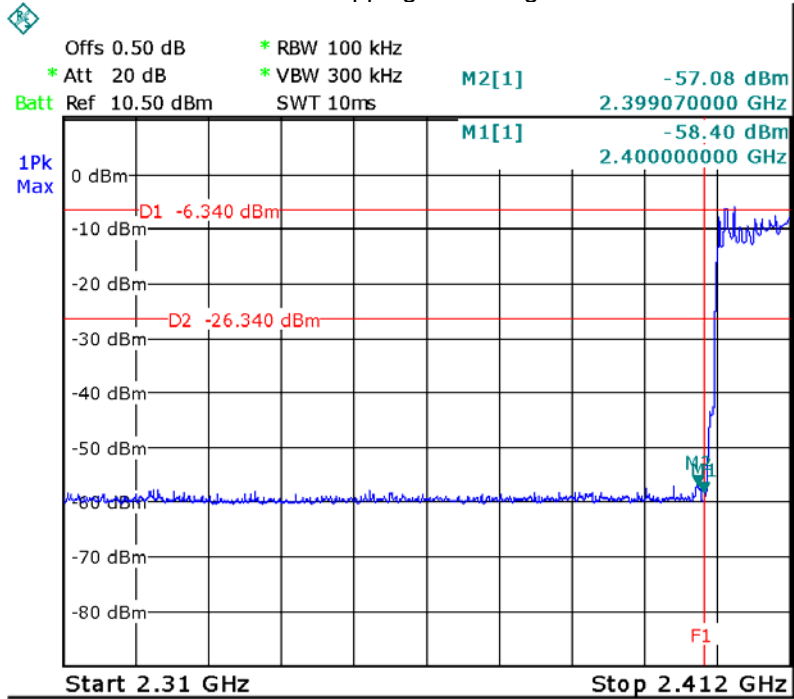




8DPSK Transmitting Band edge-right side

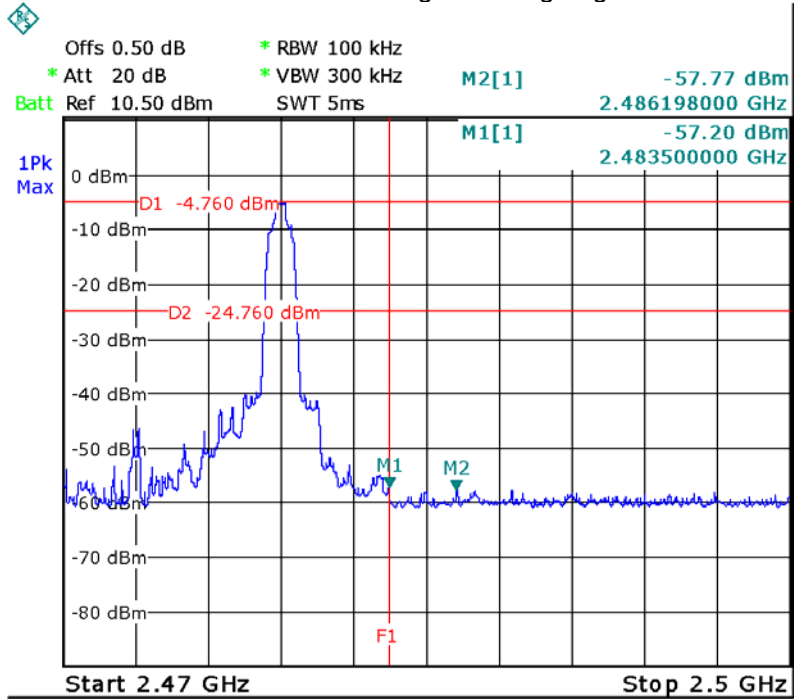

8DPSK Hopping Band edge-right side

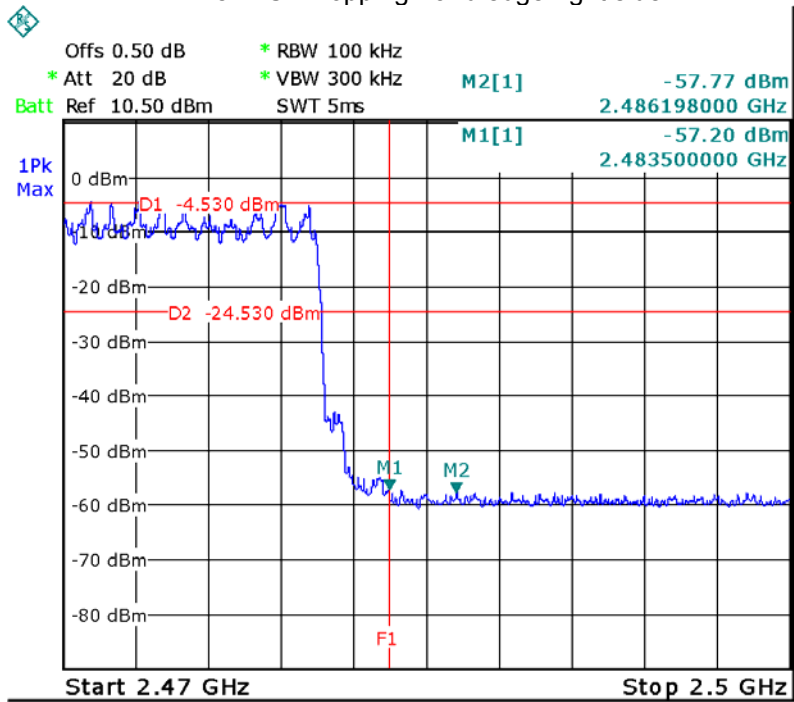

## 9 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247  
 Test Method: ANSI C63.10:2013  
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.

### 9.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 100kHz


### 9.2 Test Result:

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Lower	0.922
	Middle	0.922
	Upper	0.922
Pi/4DQPSK	Lower	1.216
	Middle	1.216
	Upper	1.246
8DPSK	Lower	1.226
	Middle	1.222
	Upper	1.226


Test result plot as follows:


Modulation:GFSK

Lower Channel

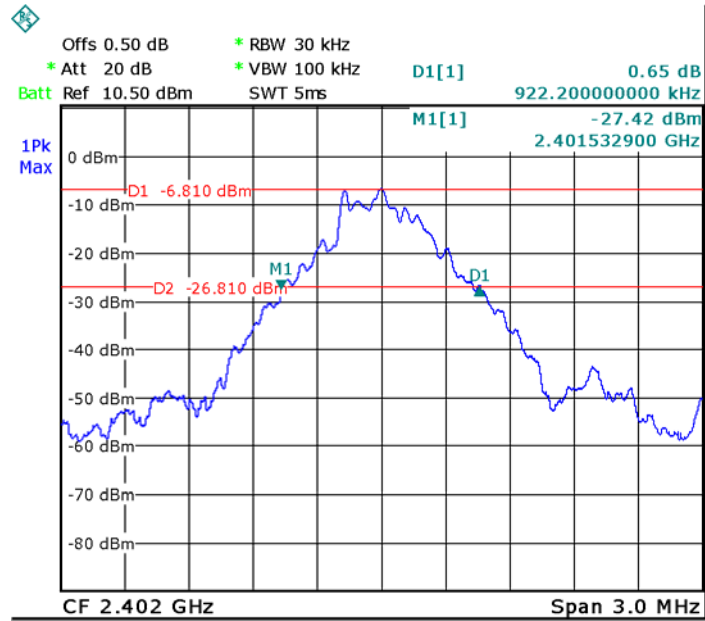


Middle Channel

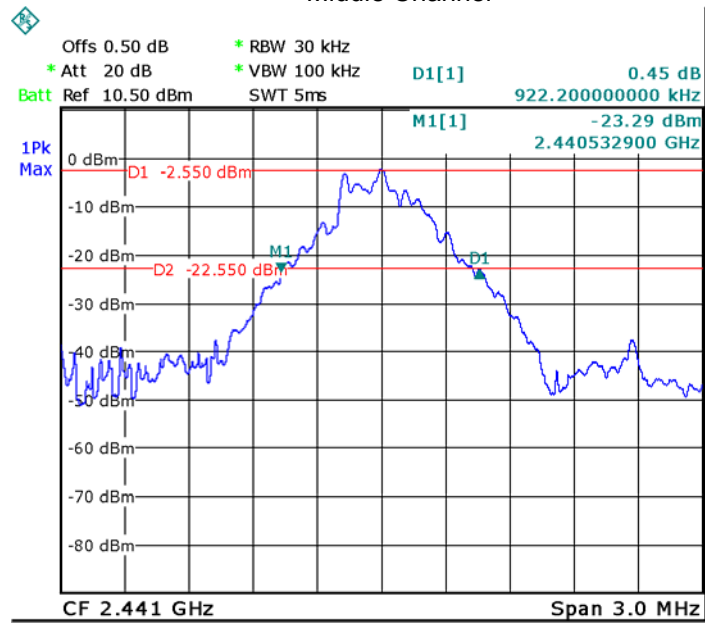


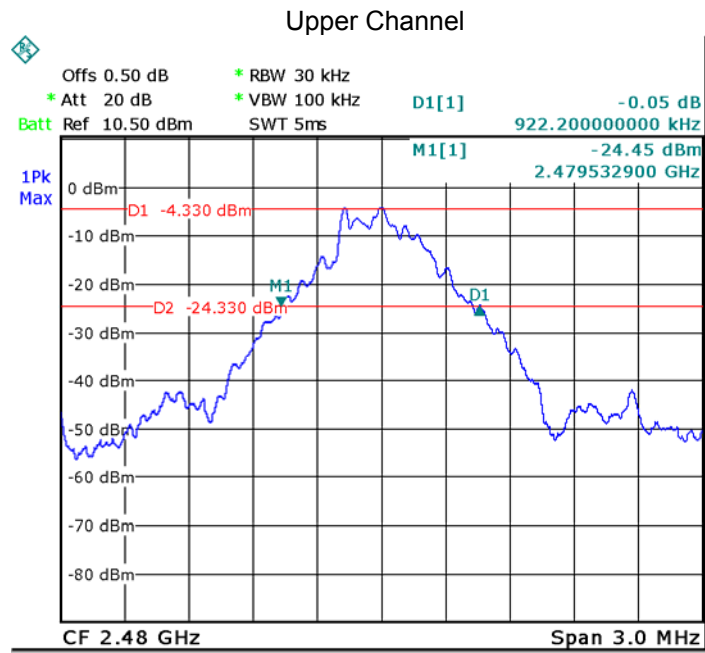


### Modulation: Pi/4DQPSK

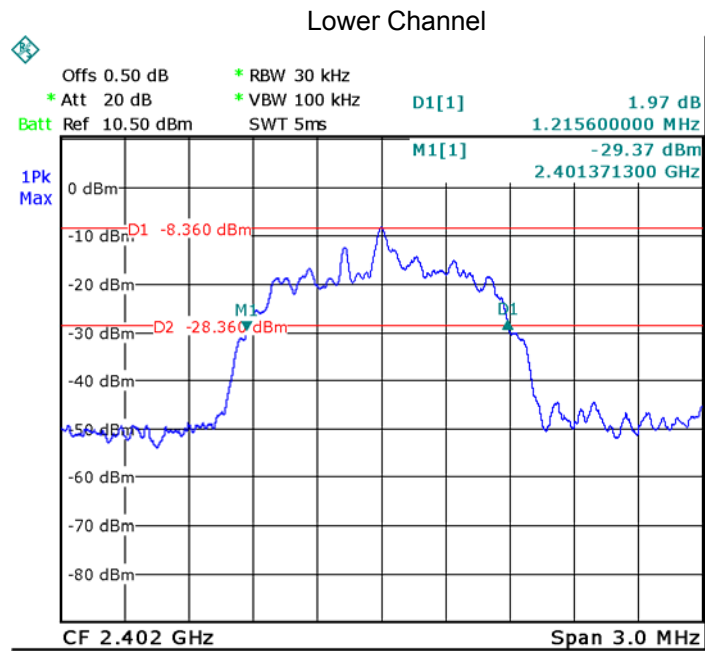

### Middle Channel

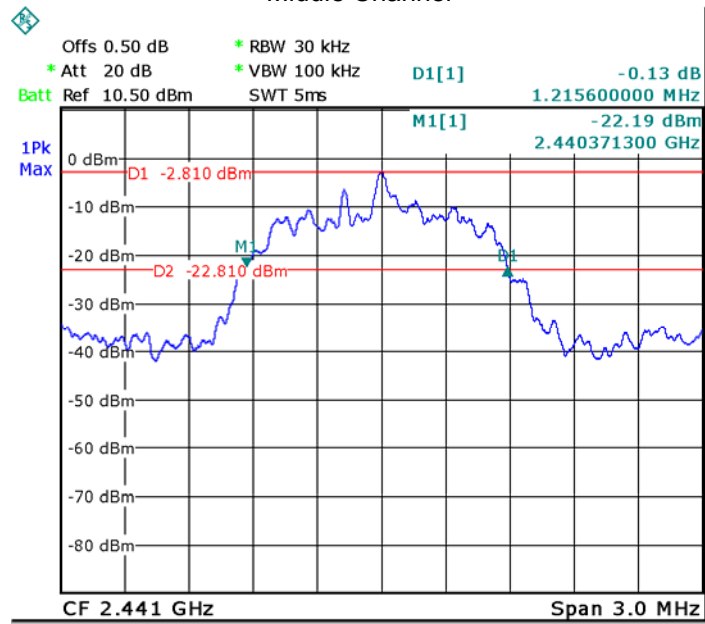


### Upper Channel

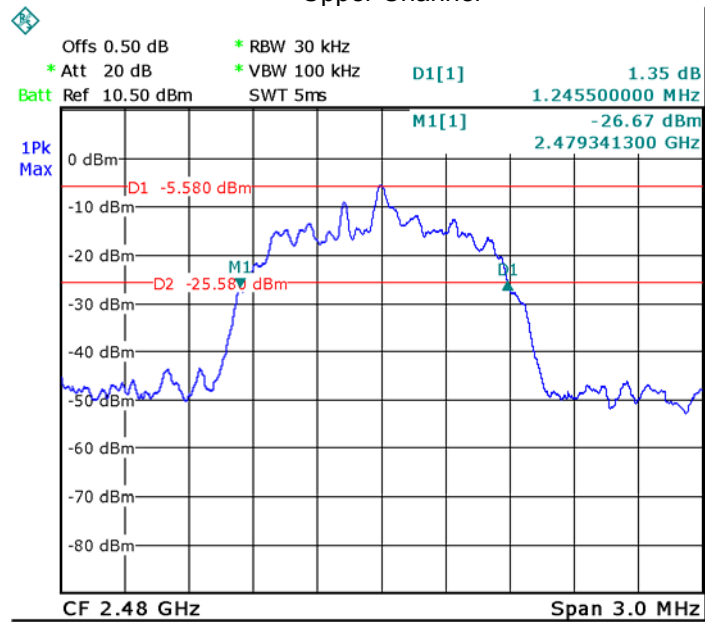



Modulation: 8DPSK

Lower Channel

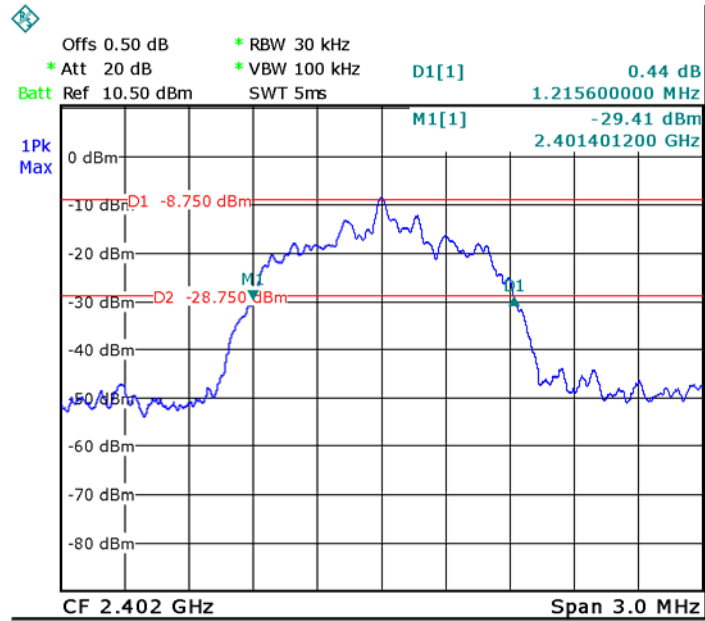

Middle Channel

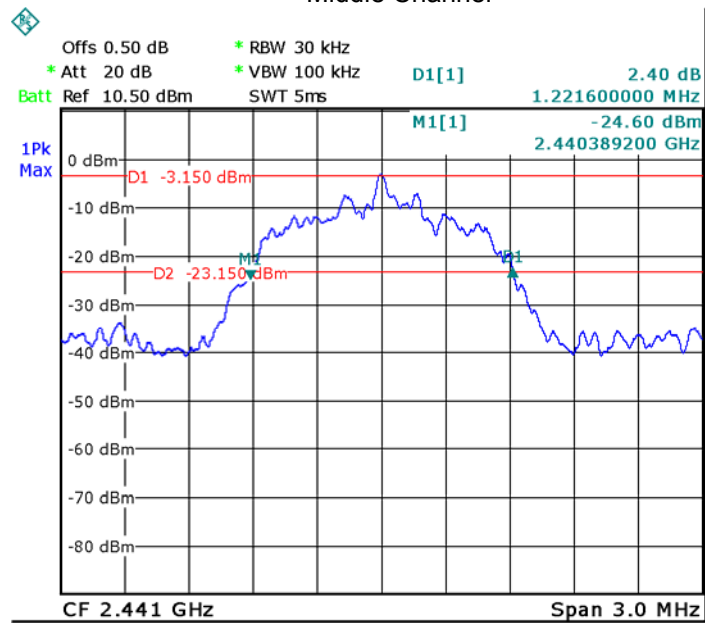

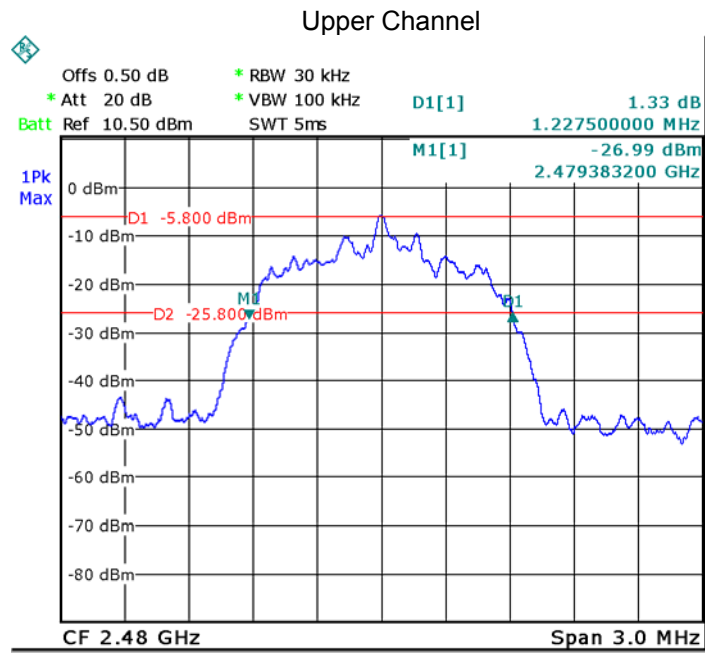

## 10 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

### 10.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3 MHz. VBW =3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.

### 10.2 Test Result:


Test Mode	Data Rate	Peak Power(dBm)			Limit (dBm)
		CH00	CH39	CH78	
GFSK	1Mbps	-5.14	-1.51	-2.50	20.97
4*π4DQPSK	2Mbps	-6.10	-1.54	-3.43	20.97
8DPSK	3Mbps	-5.88	-1.33	-3.24	20.97

Test result plot as follows:





Modulation:GFSK

Lower Channel

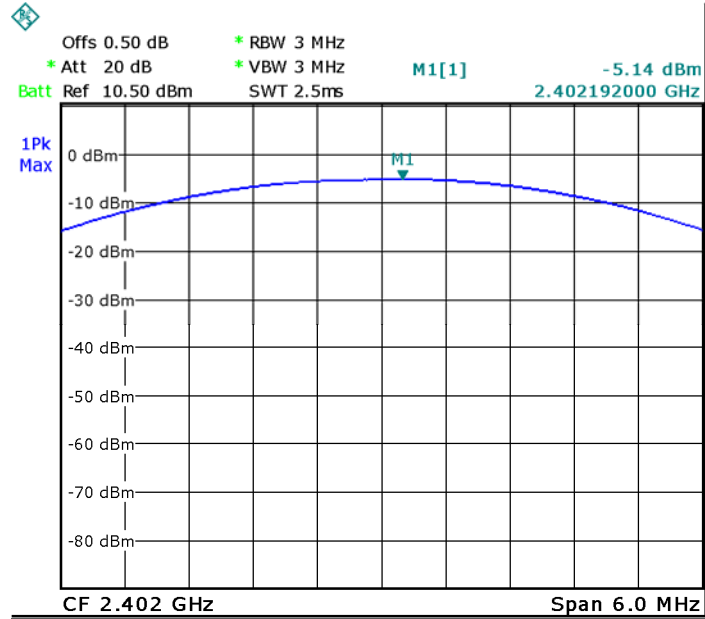




Middle Channel

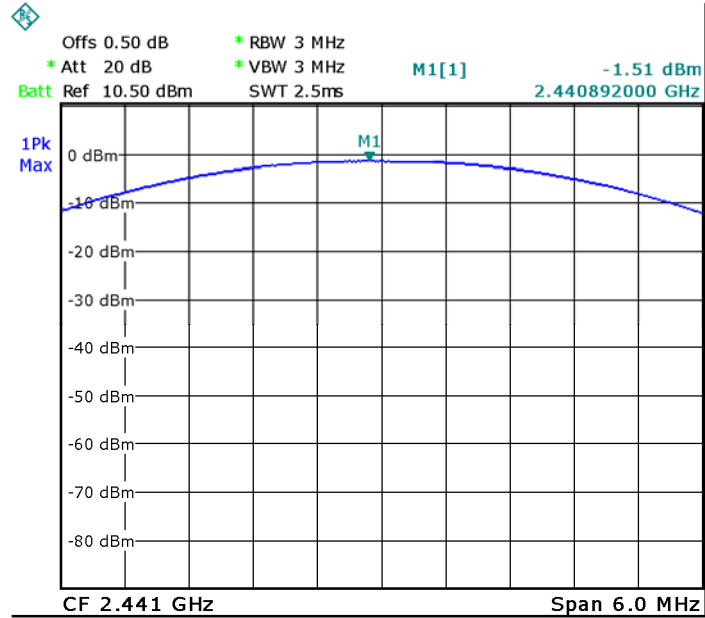

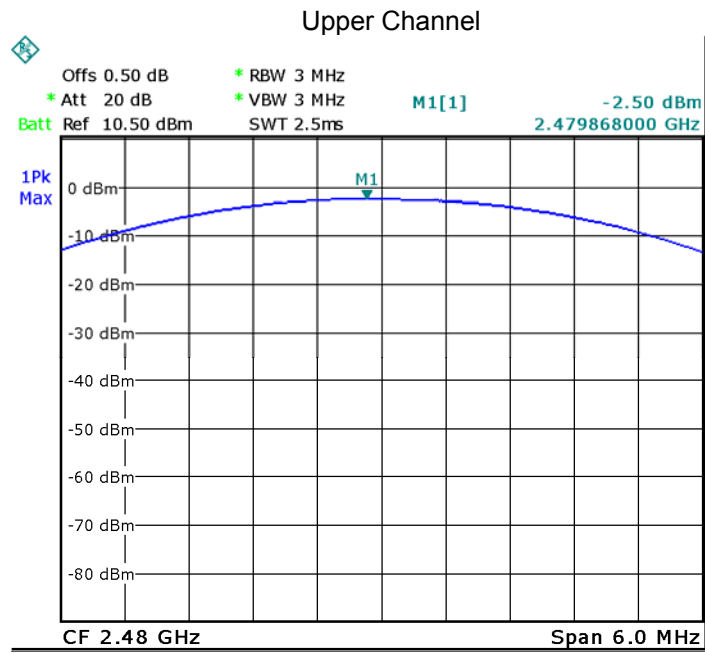


### Modulation: Pi/4DQPSK

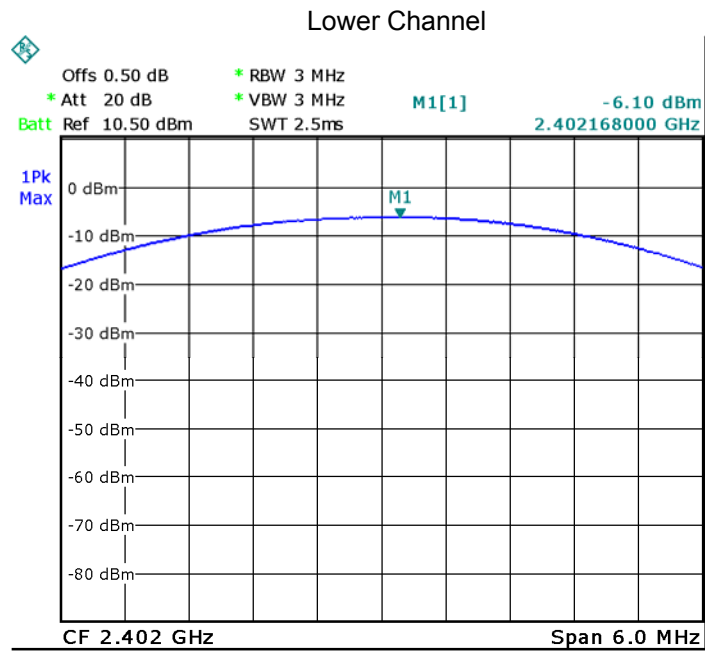

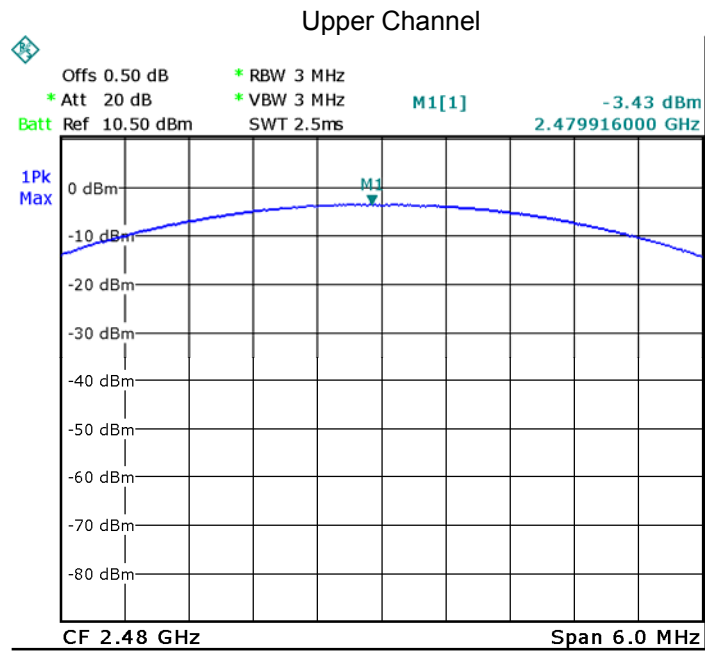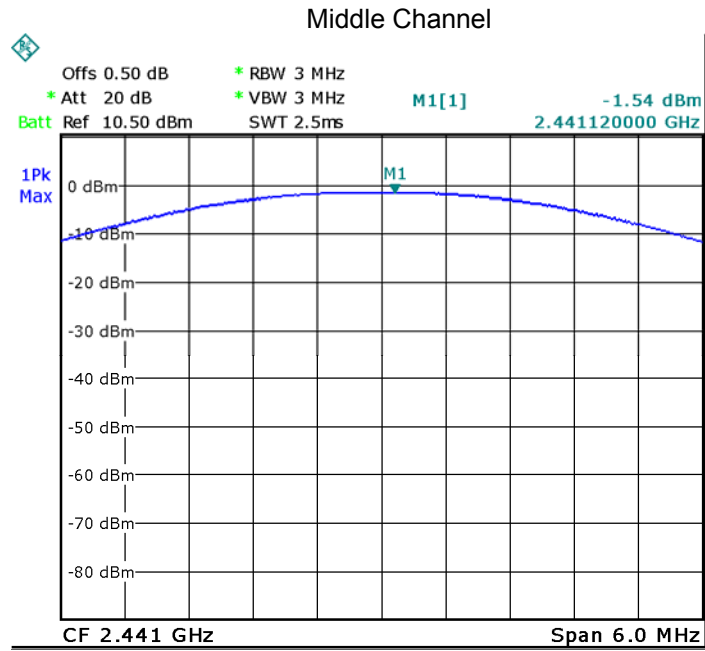



Modulation: 8DPSK

Lower Channel

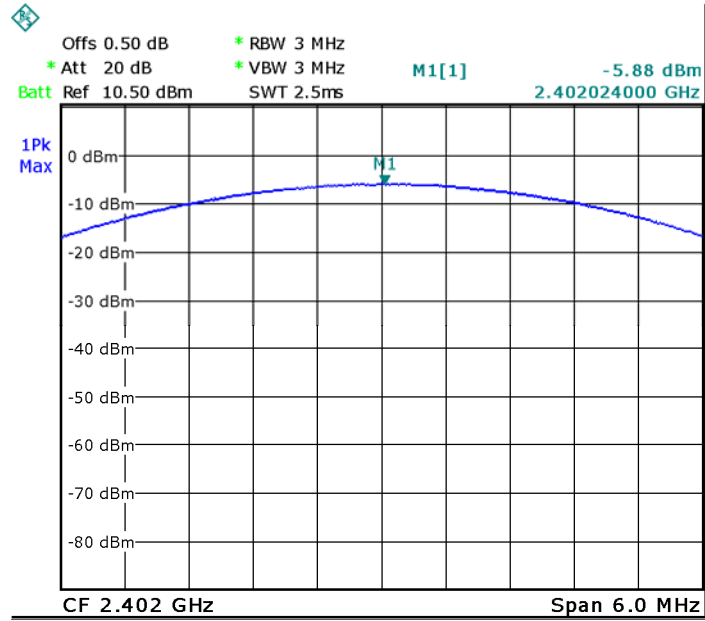

Middle Channel

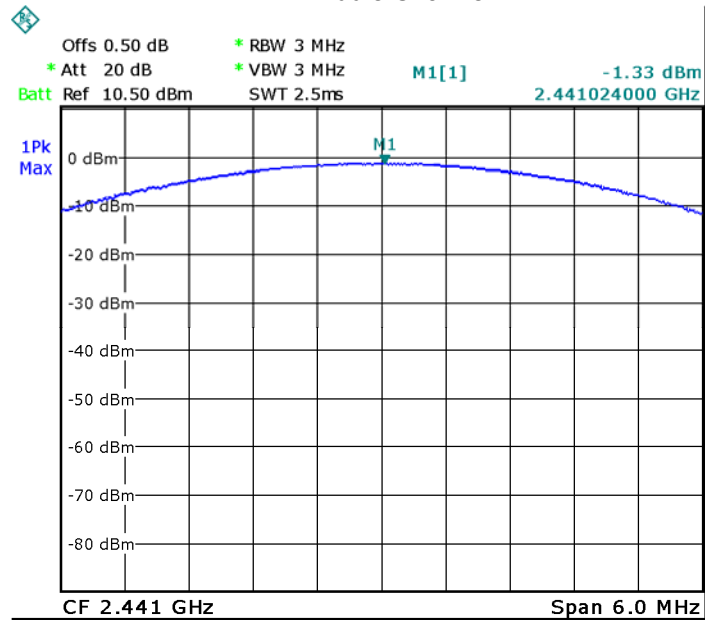

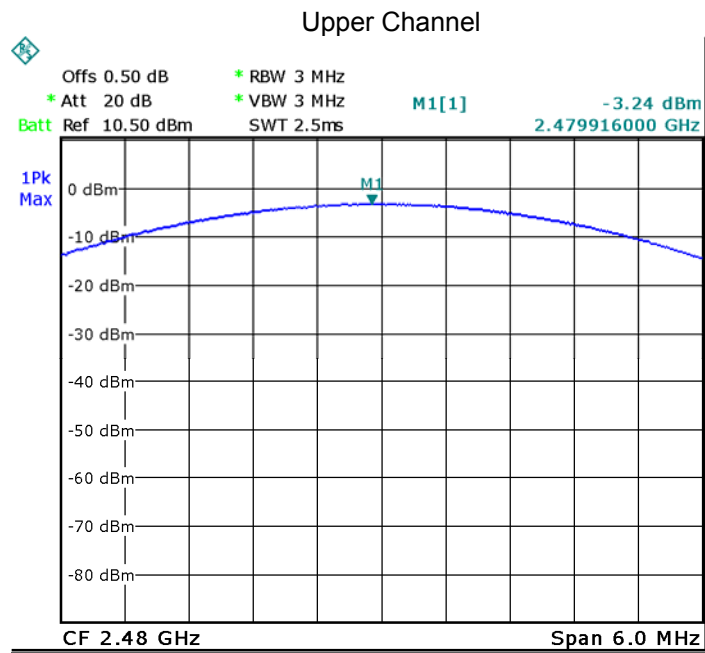

## 11 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: ANSI C63.10:2013

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.

Test Mode: Test in hopping transmitting operating mode.

### 11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW = 100KHz , Span = 6MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section  
Submit this plot.


### 11.2 Test Result:

Modulation	Test Channel	Separation (MHz)
GFSK	Lower	1.000
	Middle	1.000
	Upper	1.000
Pi/4DQPSK	Lower	1.000
	Middle	1.000
	Upper	1.000
8DPSK	Lower	1.000
	Middle	1.000
	Upper	1.000


Test result plot as follows:

Modulation:GFSK


Lower Channel

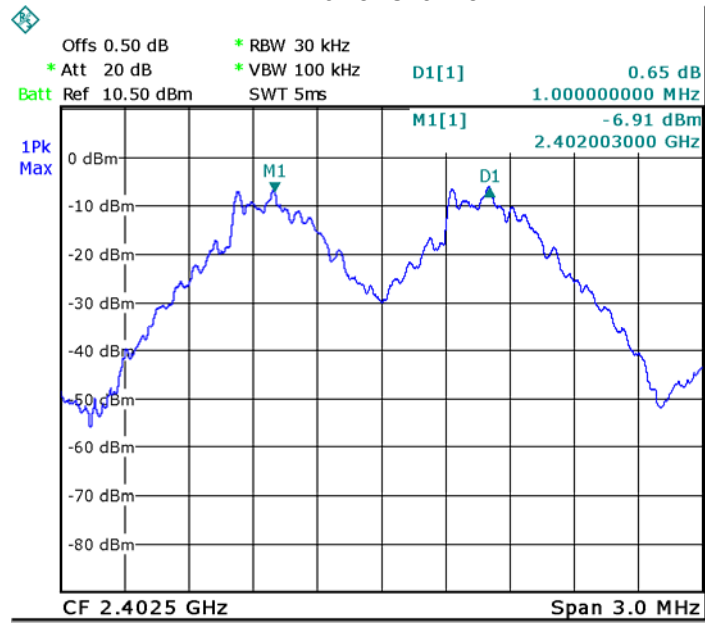

Middle Channel

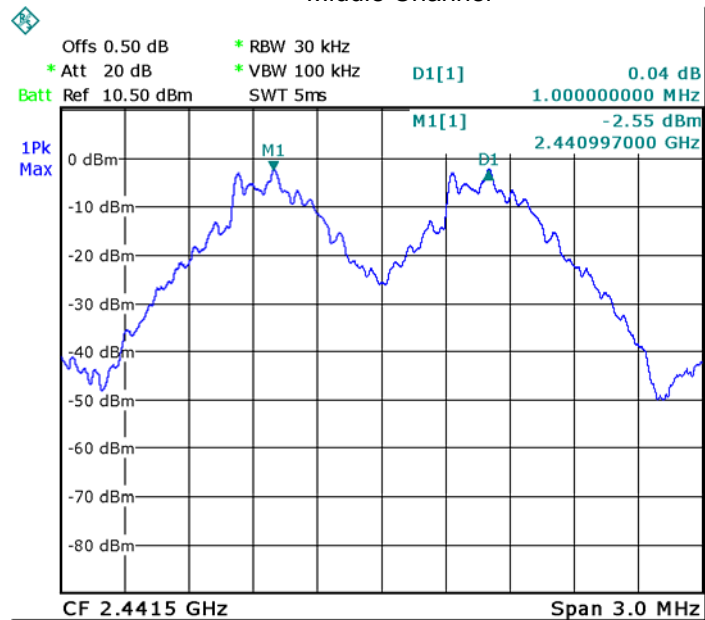


### Upper Channel


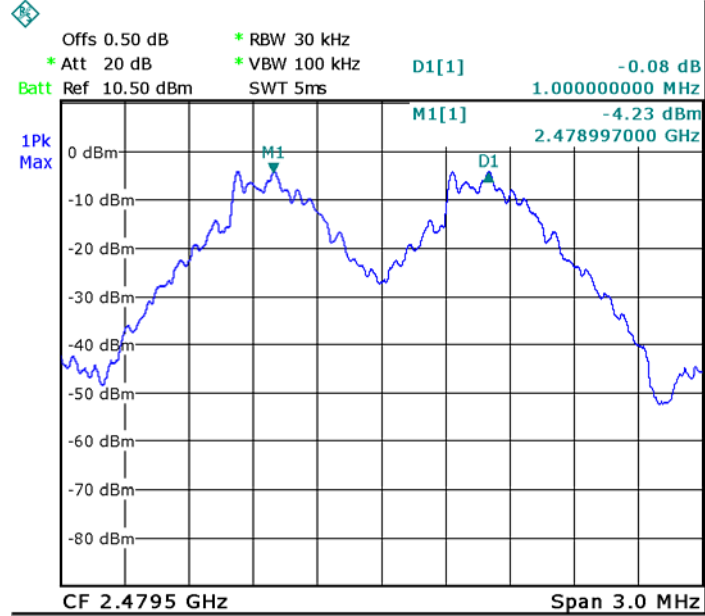


### Modulation: Pi/4DQPSK

### Lower Channel

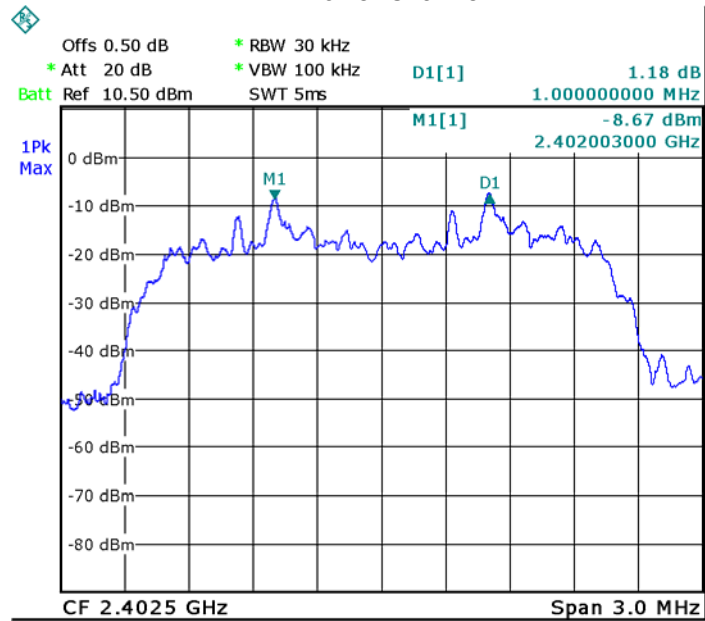




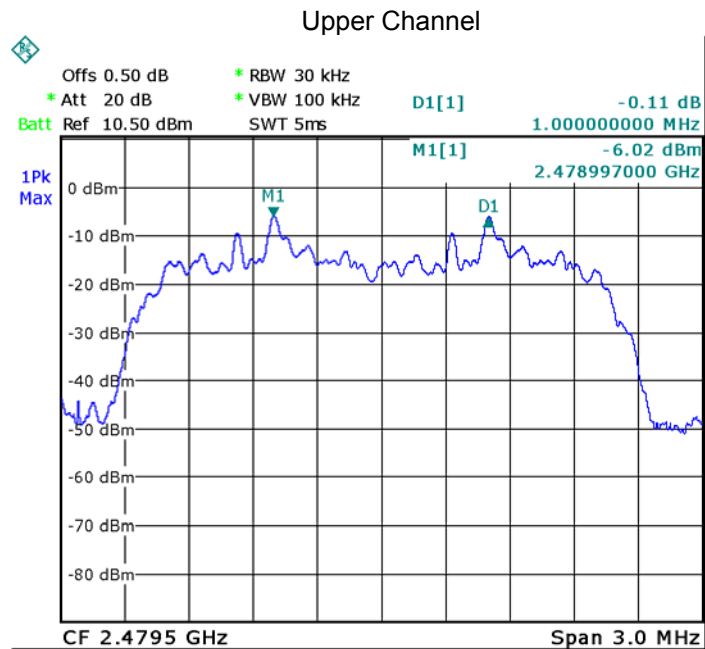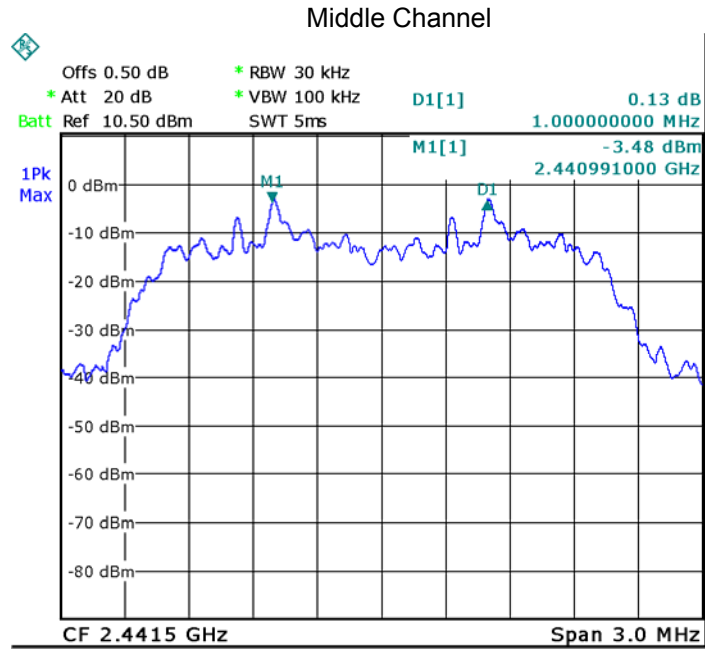



Modulation: 8DPSK

Lower Channel

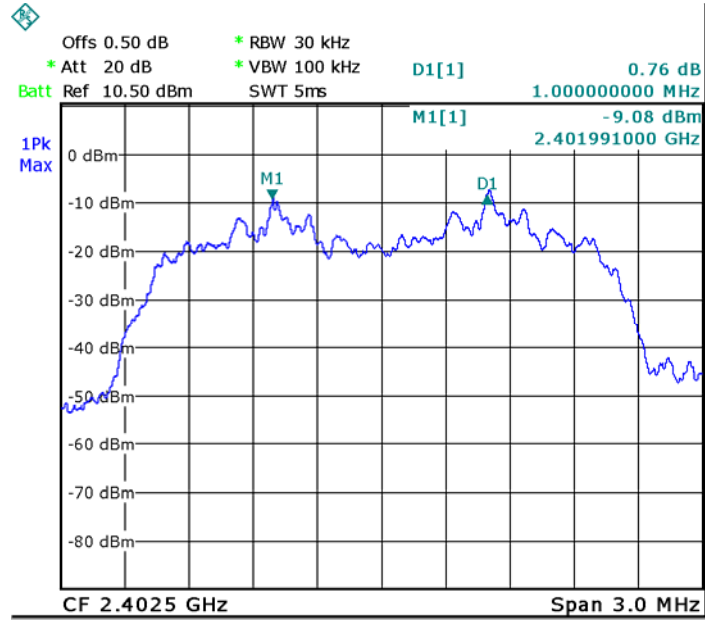

Middle Channel

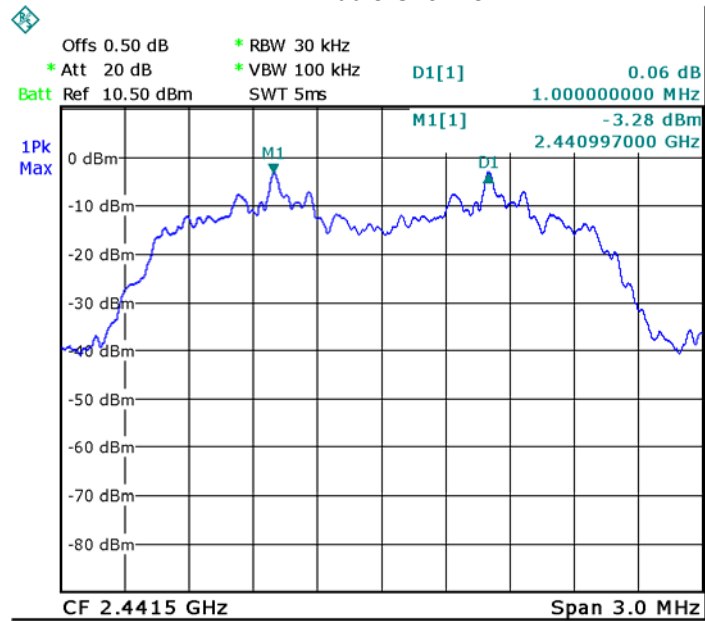

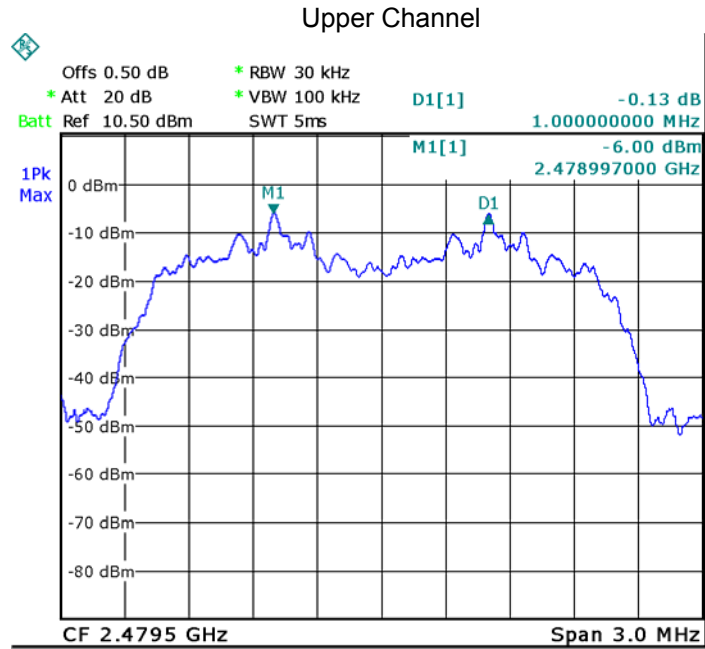

## 12 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

### 12.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 1MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Centre Frequency = 2.441GHz, Span = 86MHz. Sweep=auto;

### 12.2 Test Result:


Total Channels are 79 Channels.

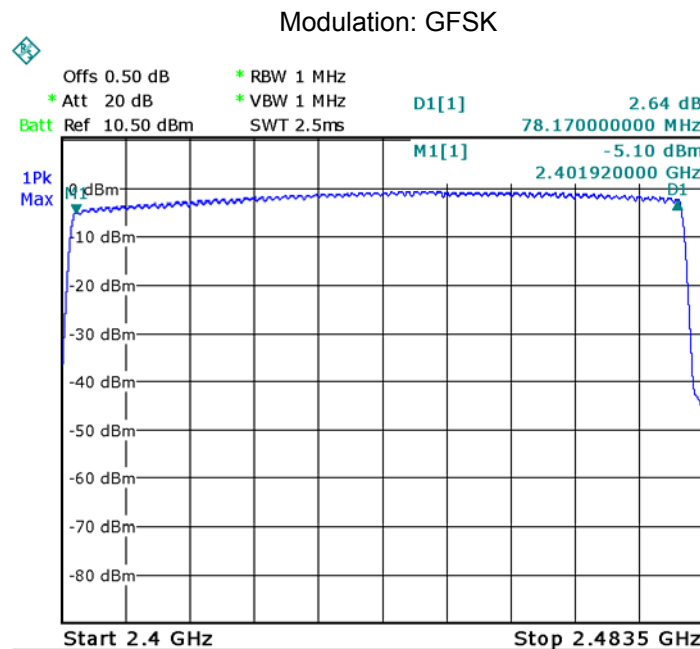

Modulation: Pi/4DQPSK

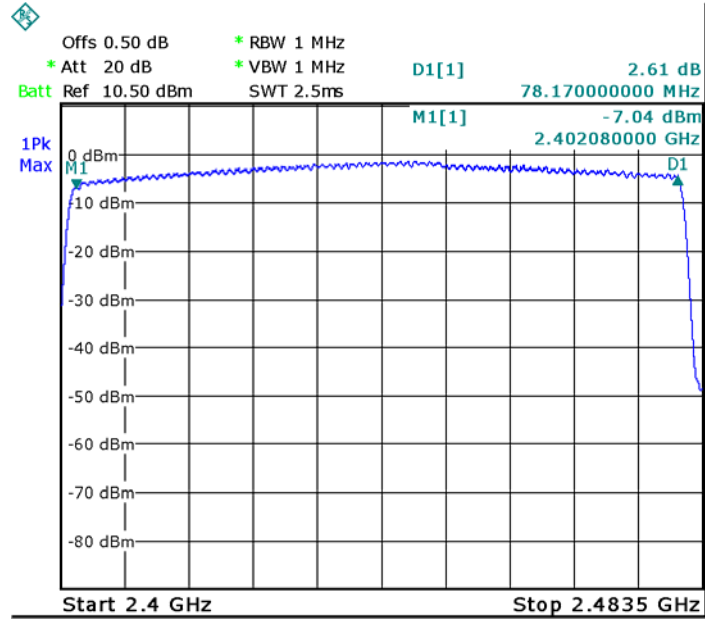

Modulation: 8DPSK

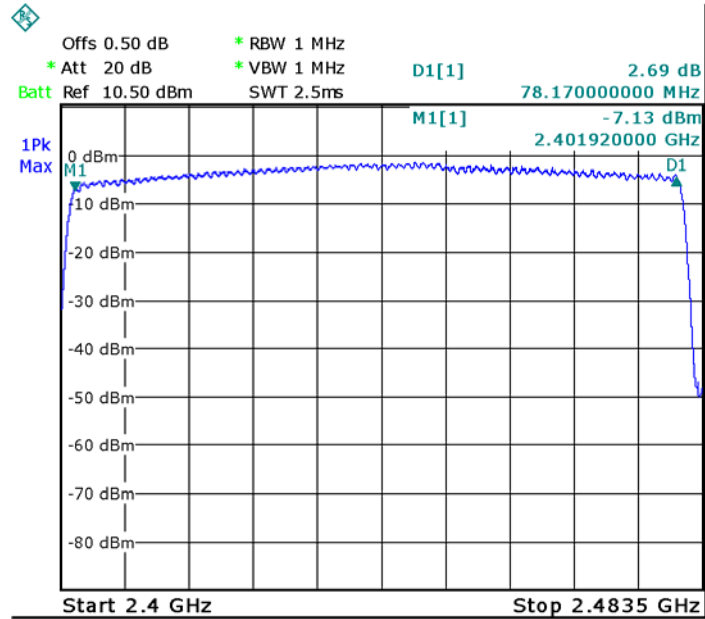

## 13 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	ANSI C63.10:2013
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

### 13.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centred on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 1MHz. Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

### 13.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period:  $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum 1600 / 79 / 6 hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum 1600 / 79 / 4 hops per second in each channel (3 time slots RX, 1 time slot TX).

DH1 Packet permit maximum 1600 / 79 / 2 hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:


Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH1	$1600/79/2*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.

Modulation	Data Packet	Channel	pulse time(ms)	Dwell Time(s)	Limits(s)
GFSK	DH5	Low	2.880	0.307	0.4
		middle	2.880	0.307	0.4
		High	2.880	0.307	0.4
Pi/4DQPSK	DH5	Low	2.880	0.307	0.4
		middle	2.880	0.307	0.4
		High	2.880	0.307	0.4
8DPSK	DH5	Low	2.880	0.307	0.4
		middle	2.880	0.307	0.4
		High	2.880	0.307	0.4

Modulation:GFSK


Data Packet:

DH5.Lower channel

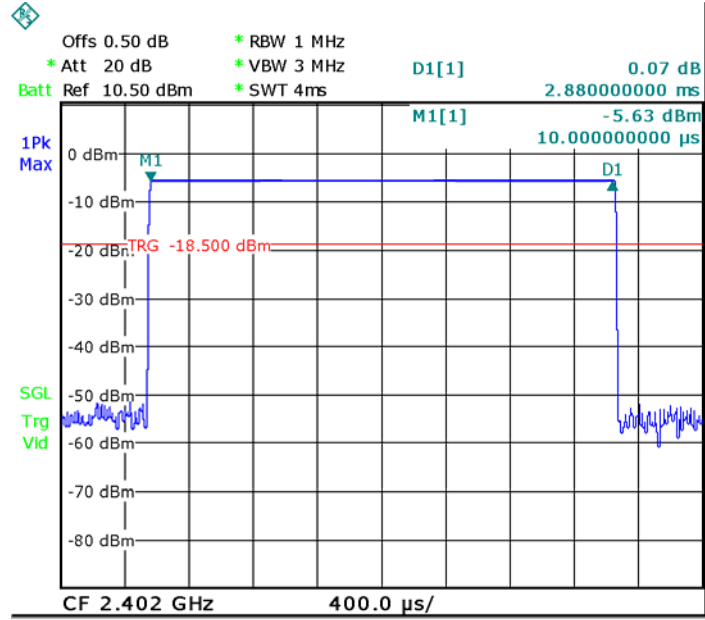


Data Packet:

DH5.Middle channel

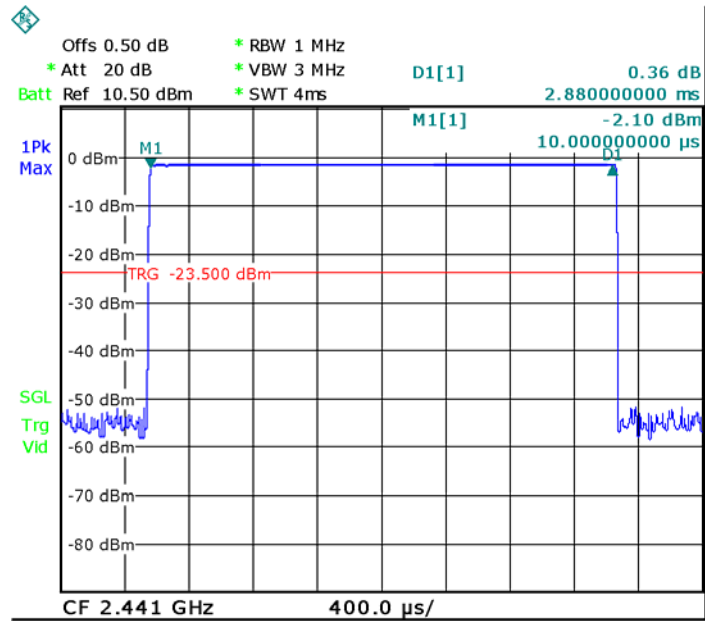





Data Packet:  
DH5,Upper channel

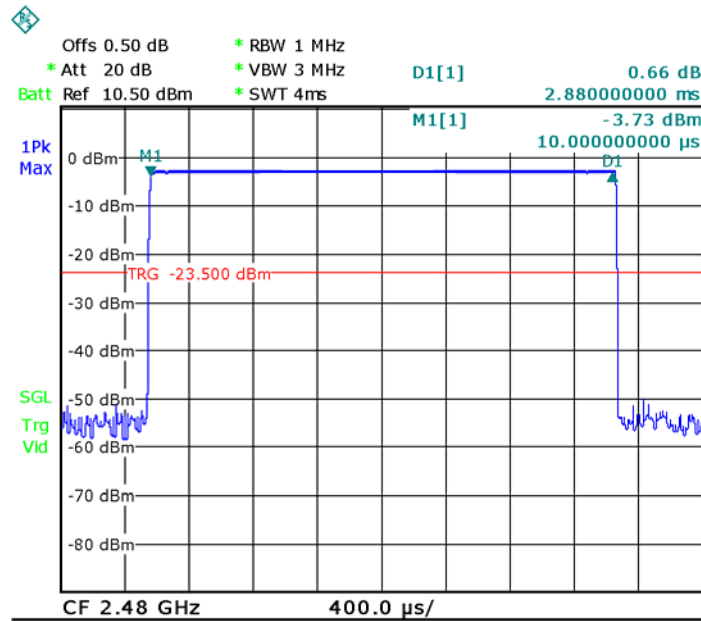


Pi/4DQPSK  
Data Packet:  
DH5,Lower channel

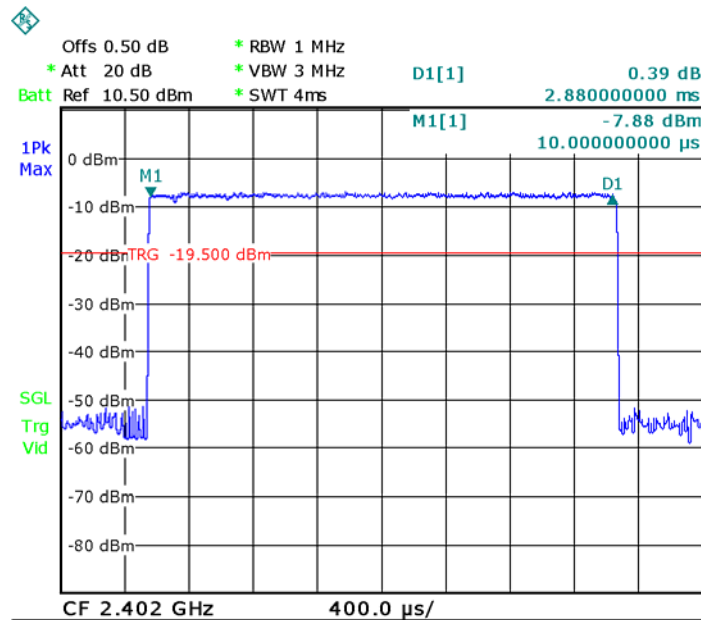


Data Packet:  
DH5,Middle channel

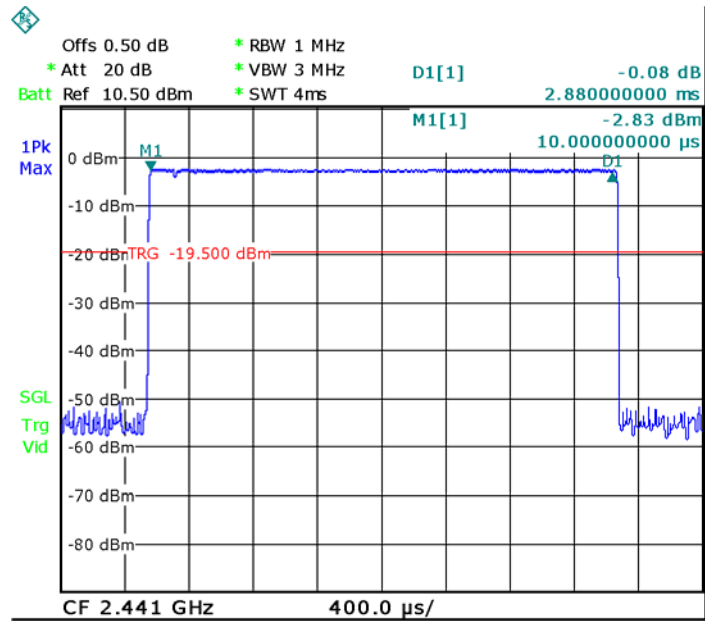


Data Packet:  
DH5,Upper channel

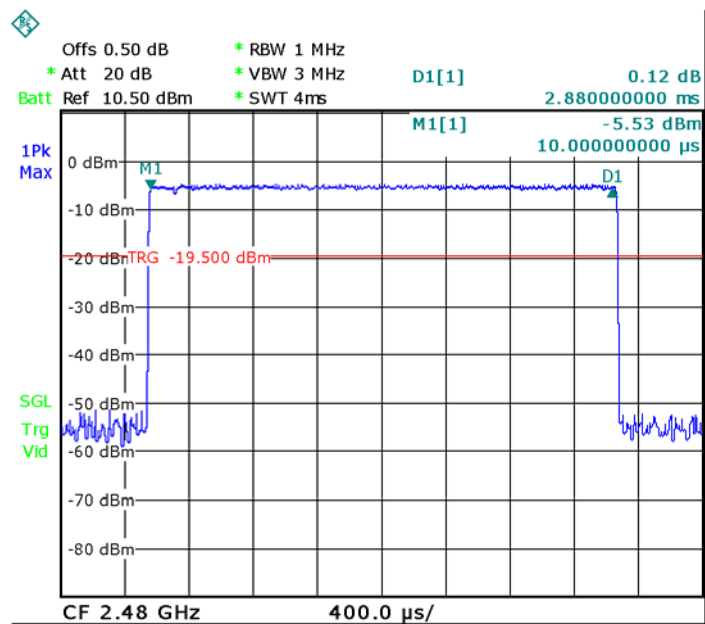


8DPSK  
Data Packet:  
DH5,Lower channel

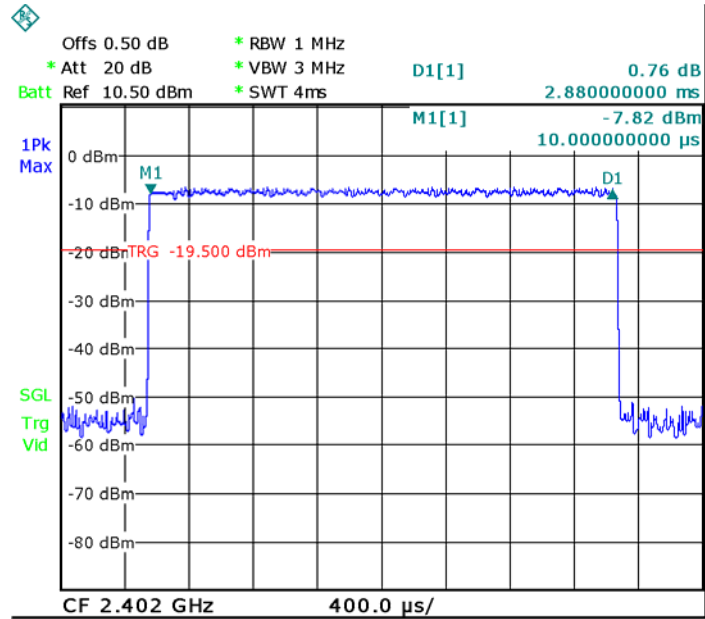

Data Packet:  
DH5,Middle channel

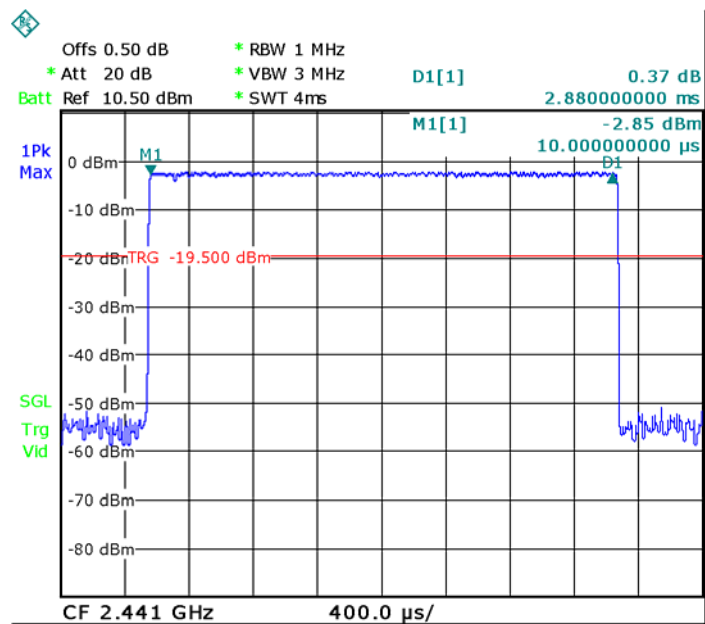

Data Packet:  
DH5,Upper channel

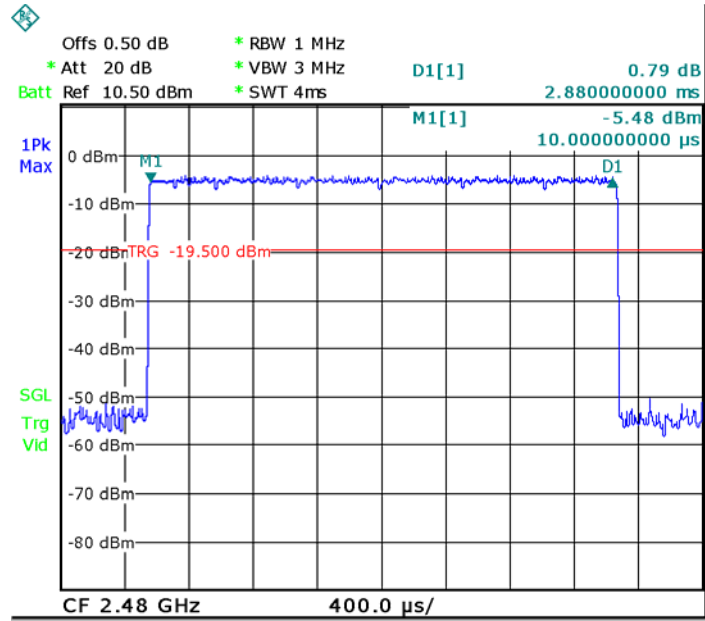

## 14 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfill the requirement of this section.

## 15 RF Exposure

Test Requirement: FCC Part 1.1307  
 Evaluation Method: FCC Part 2.1091

### 15.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.05 m normally can be maintained between the user and the device.

### 15.2 The procedures / limit

#### (A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

#### (B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> ,  H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; \*Plane-wave equivalent power density

### 15.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

**E** = Electric field (V/m)

**P** = Peak RF output power (W)

**G** = EUT Antenna numeric gain (numeric)

**d** = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance,  $d=0.05\text{m}$ , as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm <sup>2</sup> )	Limit of Power Density (mW/cm <sup>2</sup> )
0.00	1.000	-1.33	0.60	0.295	1


## 16 Photographs – Test Setup

### 16.1 Conducted Emissions




### 16.2 Radiated Emissions

Below 30MHz

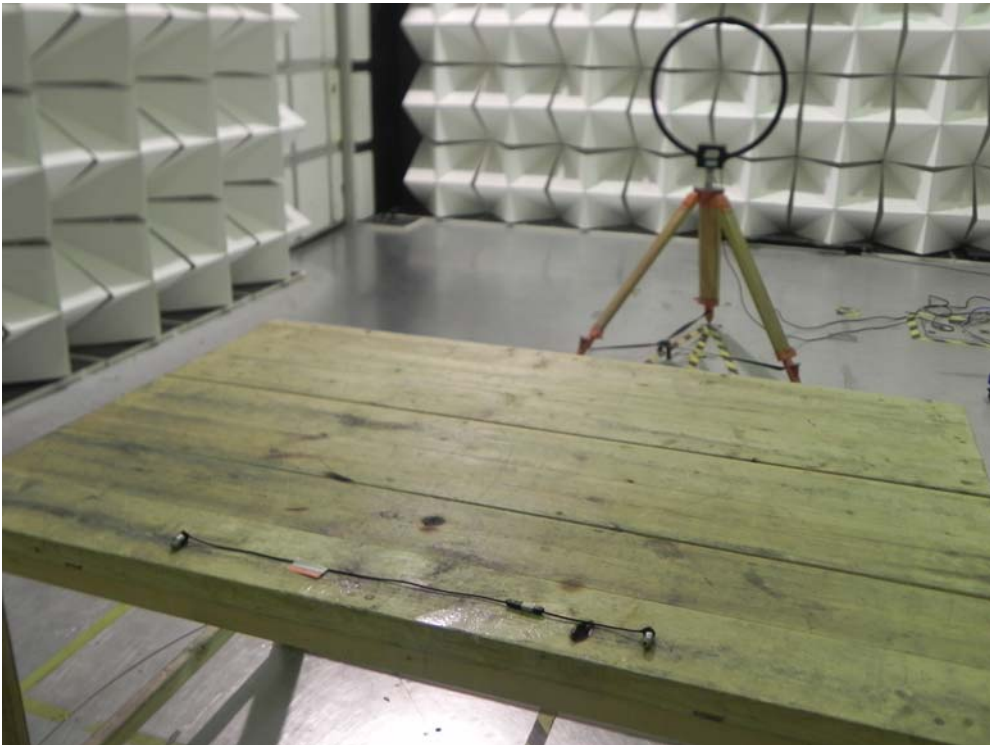



30MHz~1000MHz

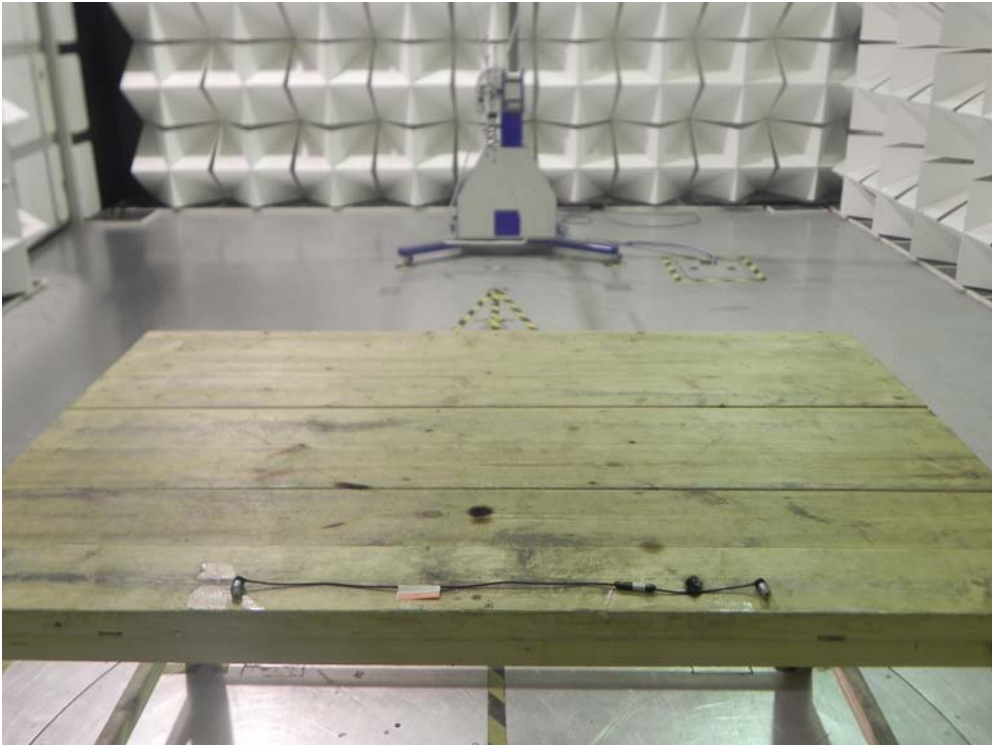



Above 1GHz



# 17 Photographs – Constructional Details

## 17.1 EUT – Appearance View





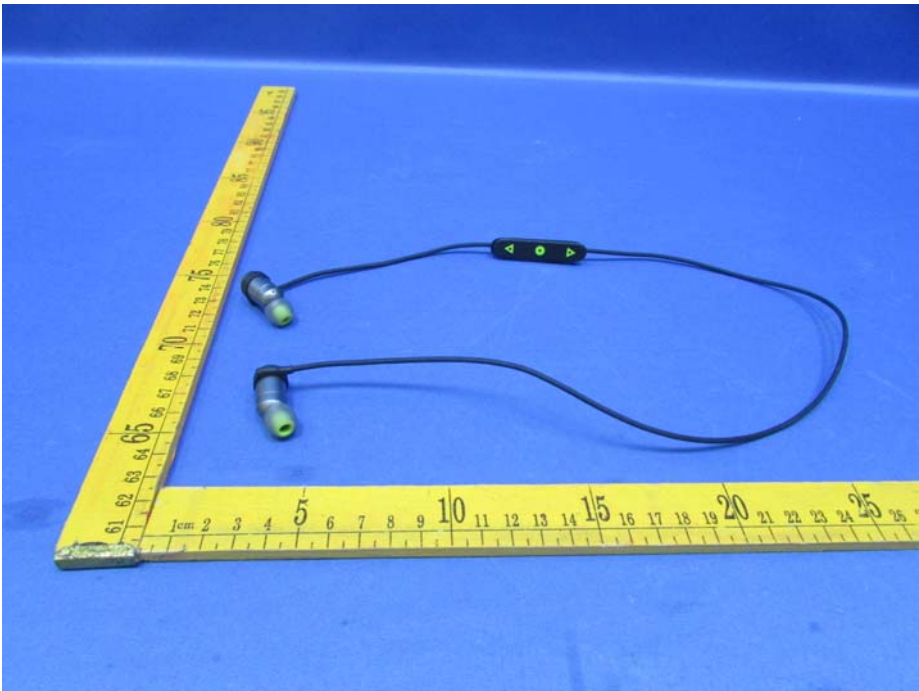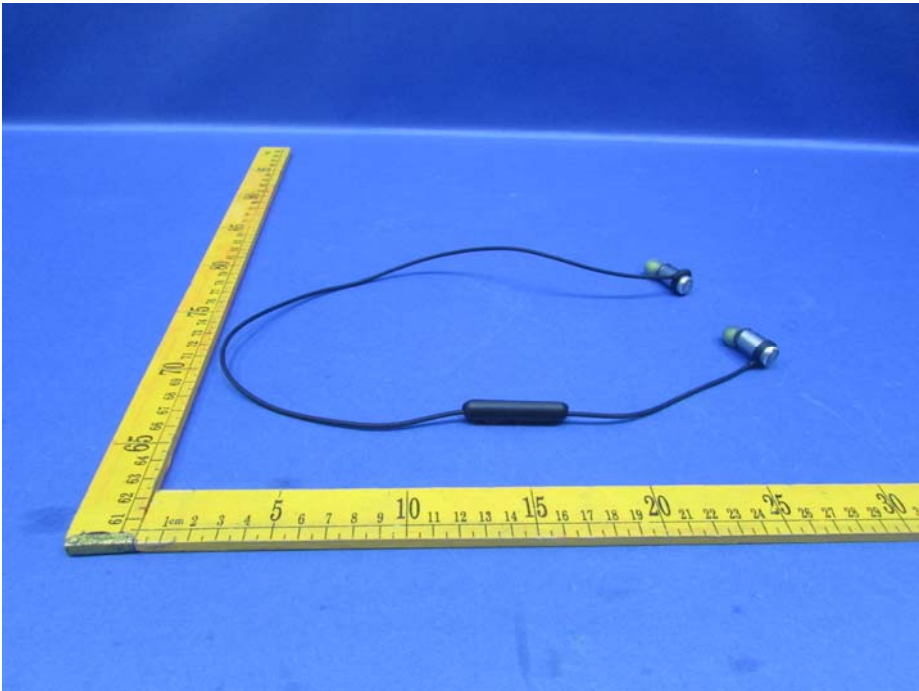






17.2 EUT – Open View

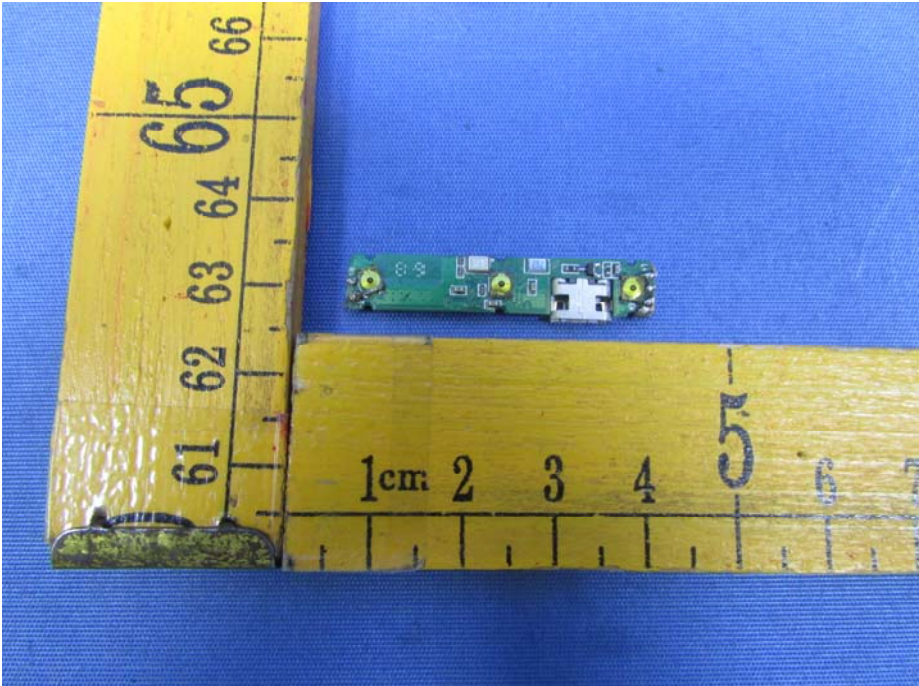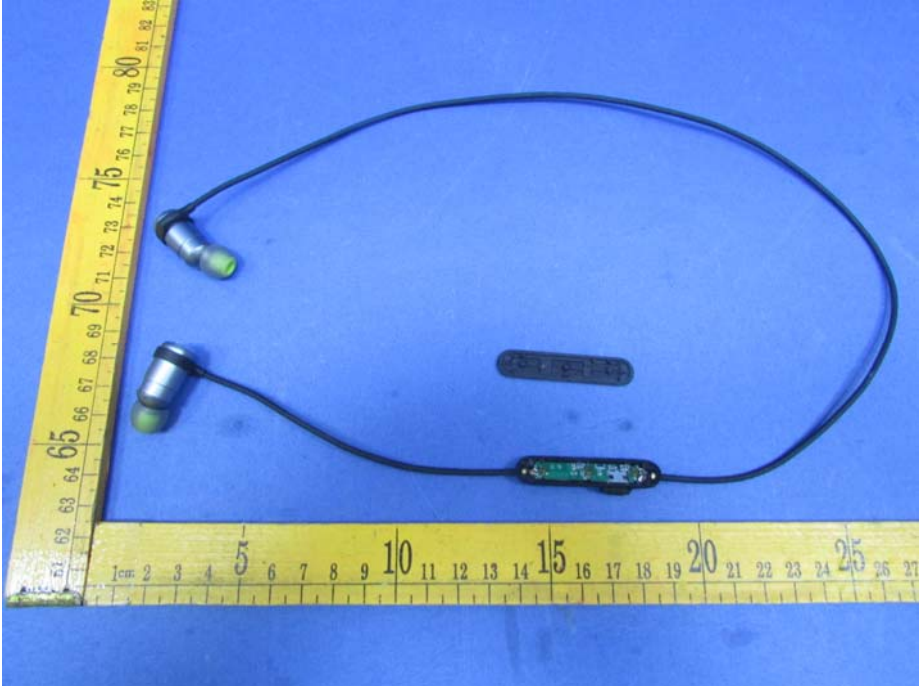

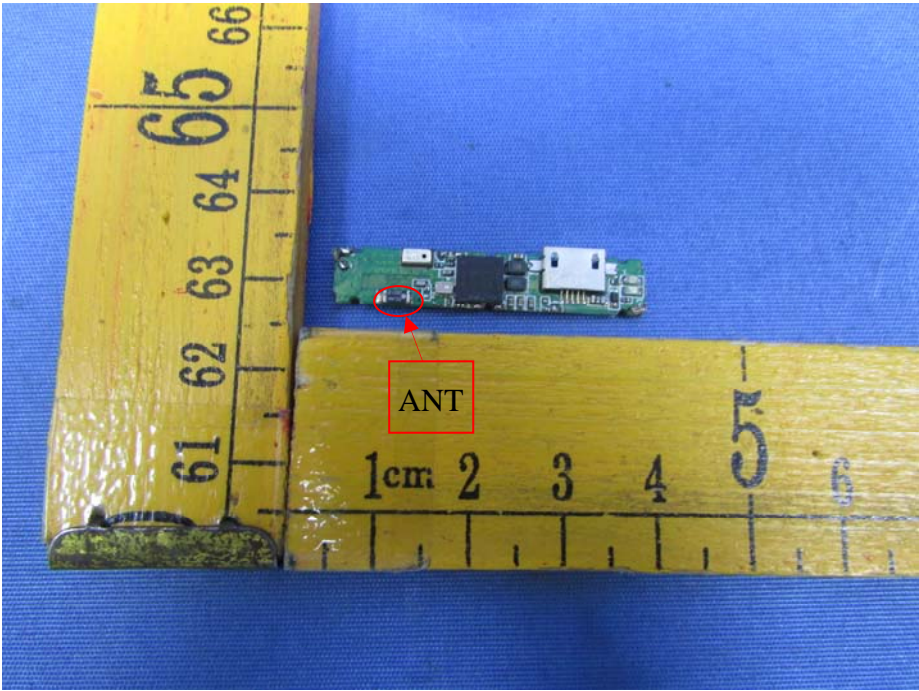



====End of Report====