

VivaLnk, Inc.

TEST REPORT FOR

**Fever Scout Patch
Model: VV-200**

Tested To The Following Standard:

FCC Part 15 Subpart C Section

**15.247
(DTS 2400-2483.5 MHz)**

Report No.: 98267-21

Date of issue: May 17, 2016



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

TABLE OF CONTENTS

Administrative Information 3

 Test Report Information 3

 Report Authorization 3

 Test Facility Information 4

 Software Versions 4

 Site Registration & Accreditation Information 4

 Summary of Results 5

 Modifications During Testing 5

 Conditions During Testing 5

 Equipment Under Test 6

 General Product Information 6

FCC Part 15 Subpart C 7

 15.247(a)(2) 6dB Bandwidth 7

 15.247(b)(3) Output Power 11

 15.247(e) Power Spectral Density 19

 15.247(d) Radiated Emissions & Band Edge 27

Supplemental Information 54

 Measurement Uncertainty 54

 Emissions Test Details 54

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

VivaLnk, Inc.
4655 Old Ironsides Dr., Mailstop #390
Santa Clara, CA 95054

REPORT PREPARED BY:

Terri Rayle
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

REPRESENTATIVE: George Wang

Project Number: 98267

DATE OF EQUIPMENT RECEIPT:

April 12, 2016

DATE(S) OF TESTING:

April 12-21 and May 10, 2016

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
1120 Fulton Place
Fremont, CA 94539

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.02

Site Registration & Accreditation Information

Location	CB #	TAIWAN	CANADA	FCC	JAPAN
Fremont	US0082	SL2-IN-E-1148R	3082B-1	958979	A-0149

SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart C - 15.247 (DTS)

Test Procedure	Description	Modifications	Results
15.247(a)(2)	6dB Bandwidth	NA	Pass
15.247(b)(3)	Output Power	NA	Pass
15.247(e)	Power Spectral Density	NA	Pass
15.247(d)	RF Conducted Emissions & Band Edge	NA	NA1
15.247(d)	Radiated Emissions & Band Edge	NA	Pass
15.207	AC Conducted Emissions	NA	NA1

NA = Not Applicable

NA1 = Not applicable because the EUT is operated by an internal battery.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions
No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions
None

EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 3

Equipment Tested:

Device	Manufacturer	Model #	S/N
Fever Scout Patch	VivaLnk, Inc.	VV-200	4E

Support Equipment:

Device	Manufacturer	Model #	S/N
None			

General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	BLE 4.0
Operating Frequency Range:	2400MHz to 2483.5MHz
Modulation Type(s):	GFSK
Maximum Duty Cycle:	25%
Number of TX Chains:	40
Antenna Type(s) and Gain:	0dBi
Beamforming Type:	NA
Antenna Connection Type:	Integral
Nominal Input Voltage:	3.0VDC
Software used for Test:	VBLET version 2.5.3

FCC Part 15 Subpart C

15.247(a)(2) 6dB Bandwidth


Test Setup/Conditions			
Test Location:	Fremont Lab C3	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2013), KDB 558074 v03r05 section 8	Test Date(s):	5/10/2016
Configuration:	3		
Test Setup:	The EUT is placed on a non-conducted table. The EUT is operated by batteries 3.0VDC. The EUT is set in continuously transmitting as intended. RBW=100kHz VBW=300kHz		

Environmental Conditions			
Temperature (°C)	23.2	Relative Humidity (%):	43


Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02113	Horn Antenna	EMC Test Systems	3115	2/3/2015	2/3/2017
P01210	Cable	Andrews	FSJ1P-50A-4A	1/15/2015	1/15/2017
03302	Cable	Astrolab	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
03471	Spectrum Analyzer	Agilent	E4440A	1/4/2016	1/4/2018

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
2402	1	GFSK	695.625	≥500	Pass
2426	1	GFSK	660.734	≥500	Pass
2480	1	GFSK	681.601	≥500	Pass


Plots

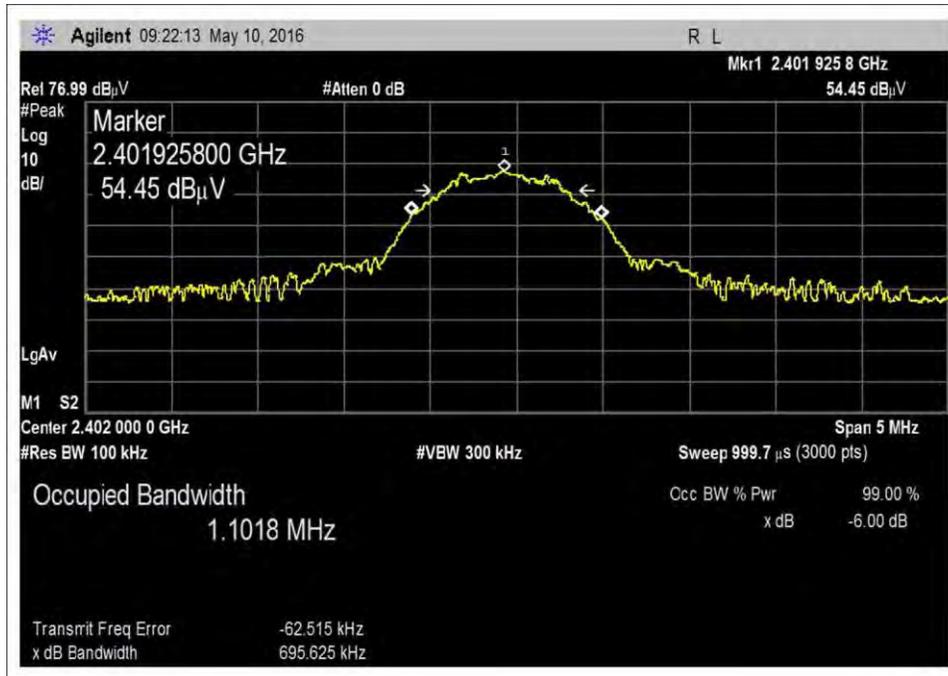

Low Channel

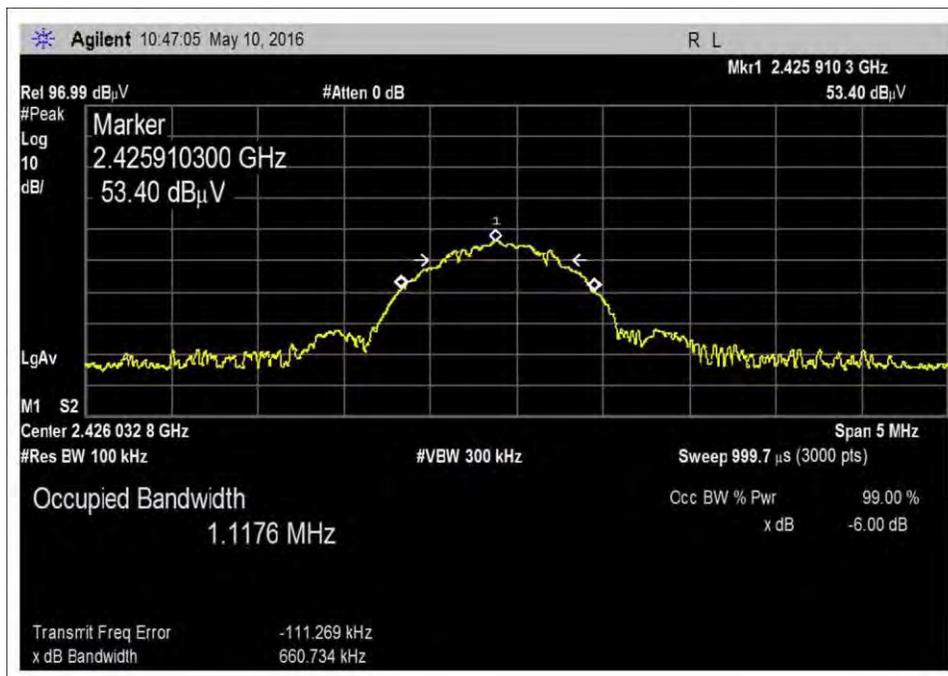


Middle Channel

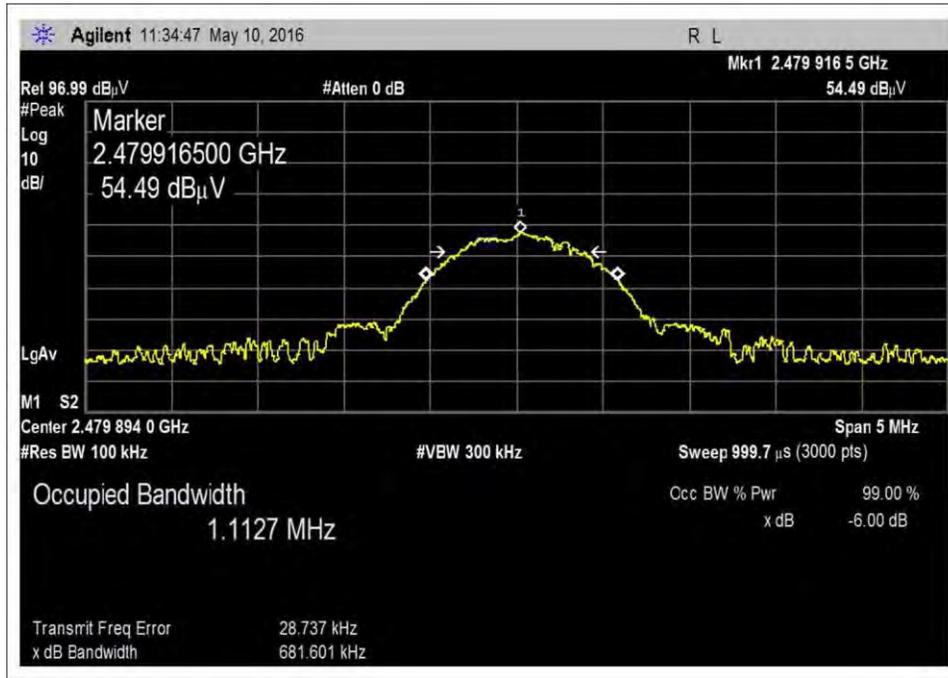

High Channel

Test Setup Photos

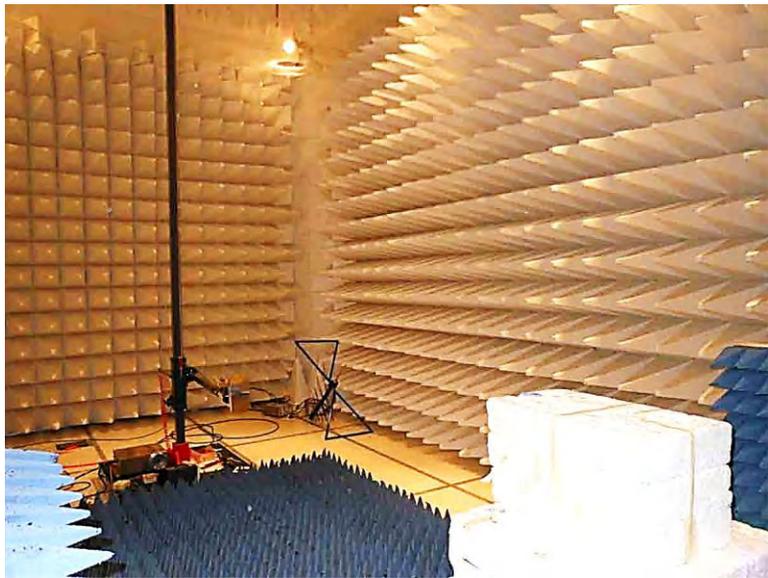

15.247(b)(3) Output Power

Test Data Summary - Voltage Variations

This equipment is battery powered. Power output tests were performed using a fresh battery.

Power Output Test Data Summary - Radiated Measurement

Measurement Option: RBW > DTS Bandwidth

Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Field Strength (dBuV/m @3m)	Calculated (dBm)	Limit (dBm)	Results
2402 Horizontal	GFSK	0	85.1	-10.129	≤30	Pass
2402 Vertical	GFSK	0	76.8	-18.429	≤30	Pass
2426 Horizontal	GFSK	0	83.9	-11.329	≤30	Pass
2426 Vertical	GFSK	0	75.0	-20.229	≤30	Pass
2480 Horizontal	GFSK	0	85.6	-9.629	≤30	Pass
2480 Vertical	GFSK	0	74.8	-20.429	≤30	Pass

For fixed point-to-point antennas, the limit is calculated in accordance with 15.247(c)(1): $Limit = 30 - Roundup\left(\frac{G-6}{3}\right)$

For directional beamforming antennas, the limit is calculated in accordance with 15.247(c)(2) and KDB 662911.

Conducted RF output power calculated in accordance with ANSI C63.10.

$$P(W) = \frac{(E \cdot d)^2}{30 G}$$

Or equivalently, in logarithmic form:

$$P(dBm) = E(dBuV/m) + 20LOG(d) - G - 104.77$$

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: **VivaLnk, Inc.**
 Specification: **15.247(b) Power Output (2400-2483.5 MHz DTS)**
 Work Order #: **98267** Date: 5/10/2016
 Test Type: **Radiated Scan** Time: 11:46:09
 Tested By: Hieu Song Nguyenpham Sequence#: 50
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			

Test Conditions / Notes:

Fundamental
 Application: VBLET version 2.5.3
 Temperature: 21.3°C
 Humidity: 42 %
 Atmospheric Pressure: 101.9 kPa
 Highest Generation Frequency: 2.48GHz
 Method: ANSI C 63.10 2013 and KDB 558074 v03r05 section 9.1.1
 Transmitting Frequencies: 2402, 2426 and 2480MHz
 RBW=3MHz
 VBW=8MHz
 The EUT is placed on a non-conducted table. The EUT is operated by batteries at 3.0VDC.
 The EUT is set in continuously transmitting as intended.
 X- axis is the worst orthogonal

VivaLnk, Inc WO#: 98267 Sequence#: 50 Date: 5/10/2016
 15.247(b) Power Output (2400-2483.5 MHz DTS) Test Distance: 3 Meters

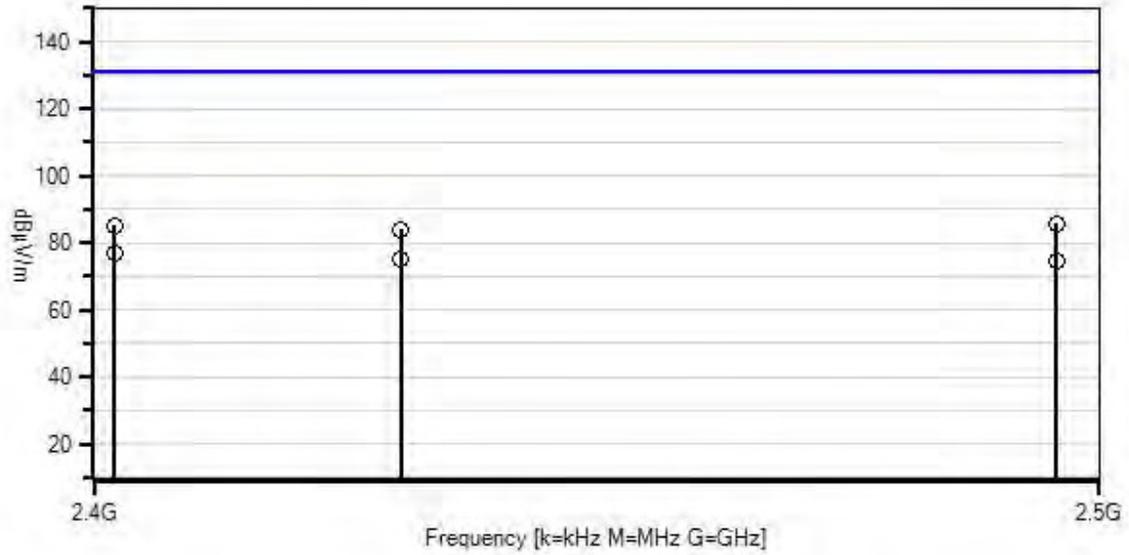

- Readings
 - × QP Readings
 - ▼ Ambient
 - 1 - 15.247(b) Power Output (2400-2483.5 MHz DTS)
 - Peak Readings
 - * Average Readings
- Software Version: 5.03.02

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K- 29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN03471	Spectrum Analyzer	E4440A	1/4/2016	1/4/2018


Measurement Data:

Reading listed by margin.


Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	2479.852M	55.4	+26.3	+1.3	+2.6	+0.0	85.6	131.2	-45.6	Horiz
2	2401.732M	55.2	+26.0	+1.3	+2.6	+0.0	85.1	131.2	-46.1	Horiz
3	2425.246M	53.9	+26.1	+1.3	+2.6	+0.0	83.9	131.2	-47.3	Horiz
4	2401.732M	46.9	+26.0	+1.3	+2.6	+0.0	76.8	131.2	-54.4	Vert
5	2425.246M	45.0	+26.1	+1.3	+2.6	+0.0	75.0	131.2	-56.2	Vert
6	2479.852M	44.6	+26.3	+1.3	+2.6	+0.0	74.8	131.2	-56.4	Vert


Plots

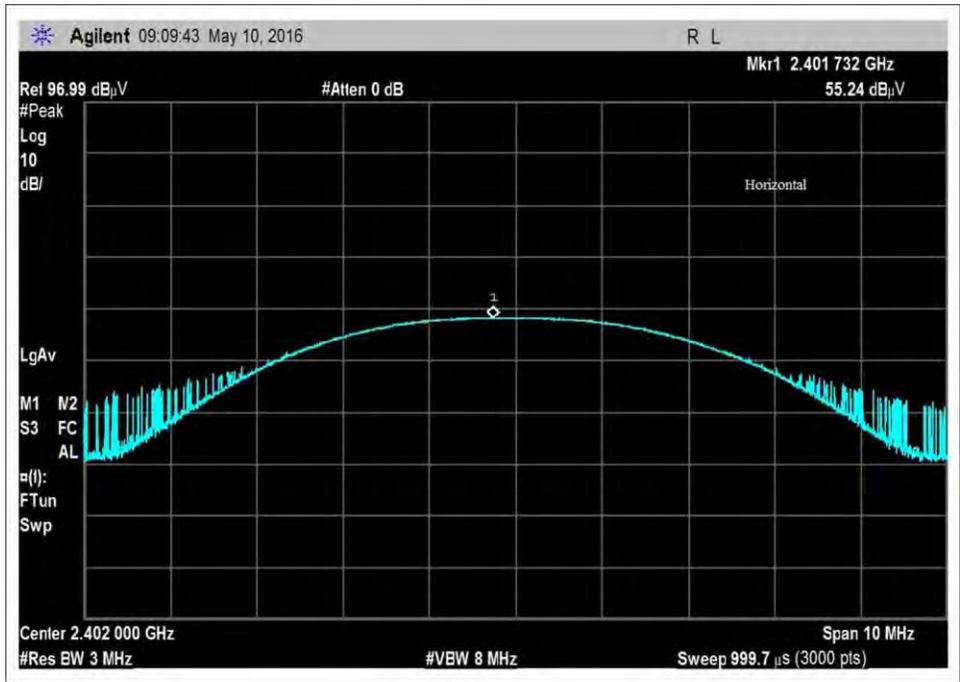


Low Channel, Horizontal Polarity

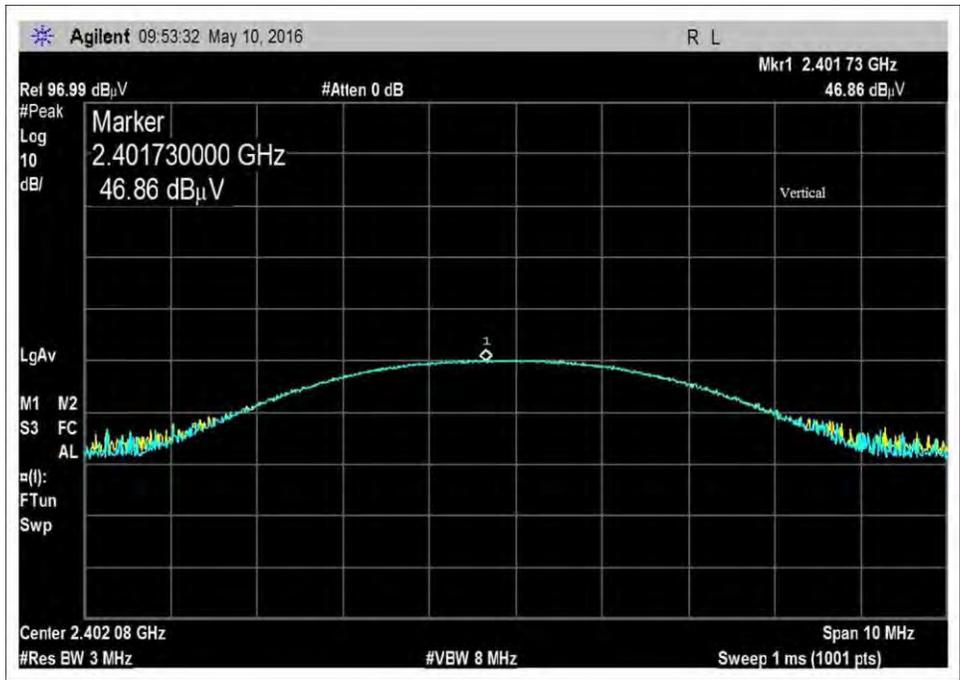


Low Channel, Vertical Polarity

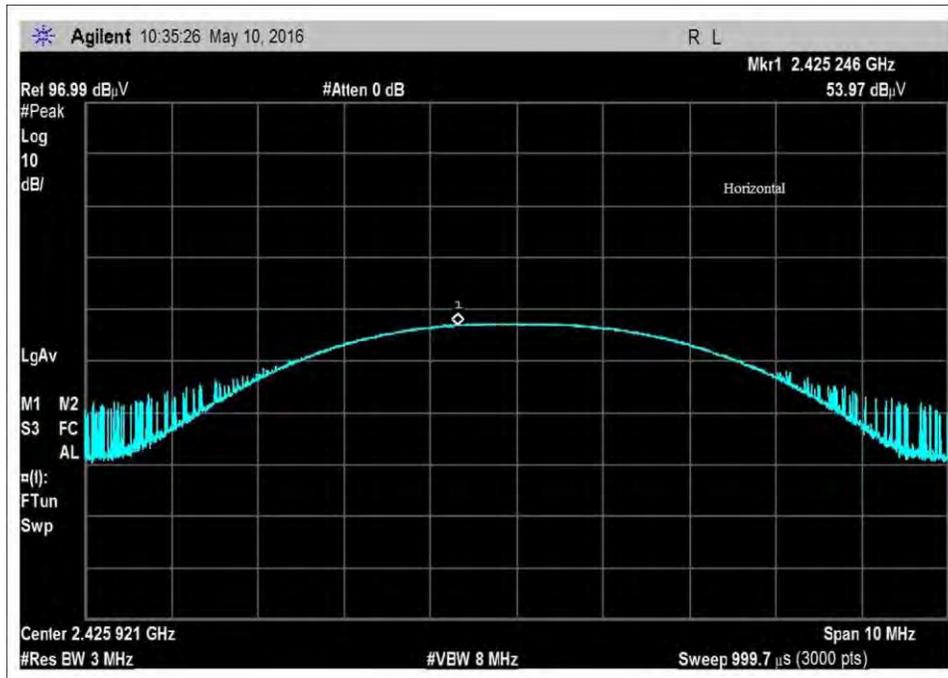


Middle Channel, Horizontal Polarity

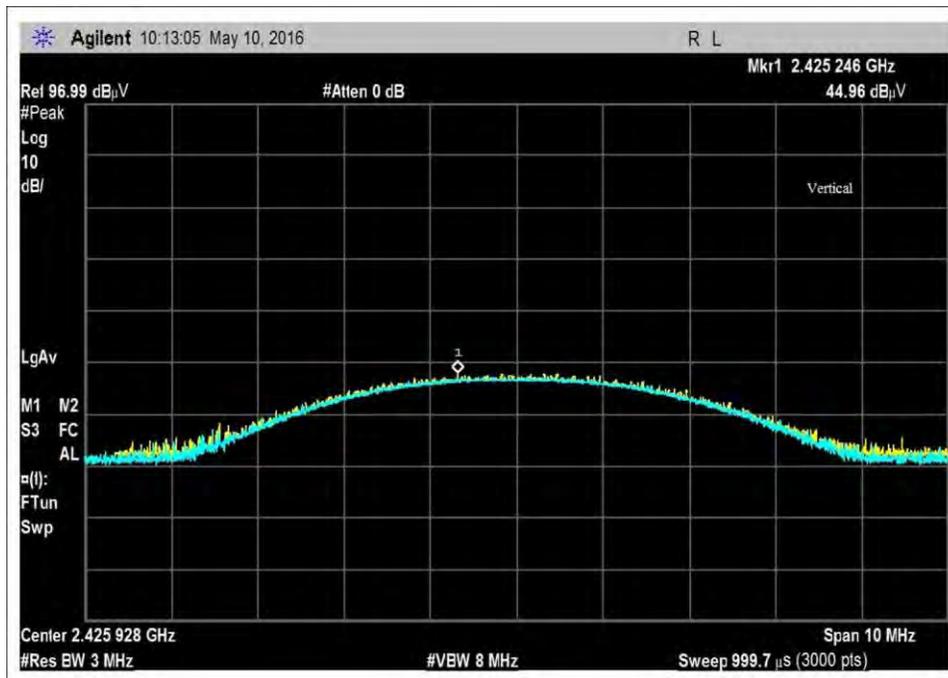

Middle Channel, Vertical Polarity

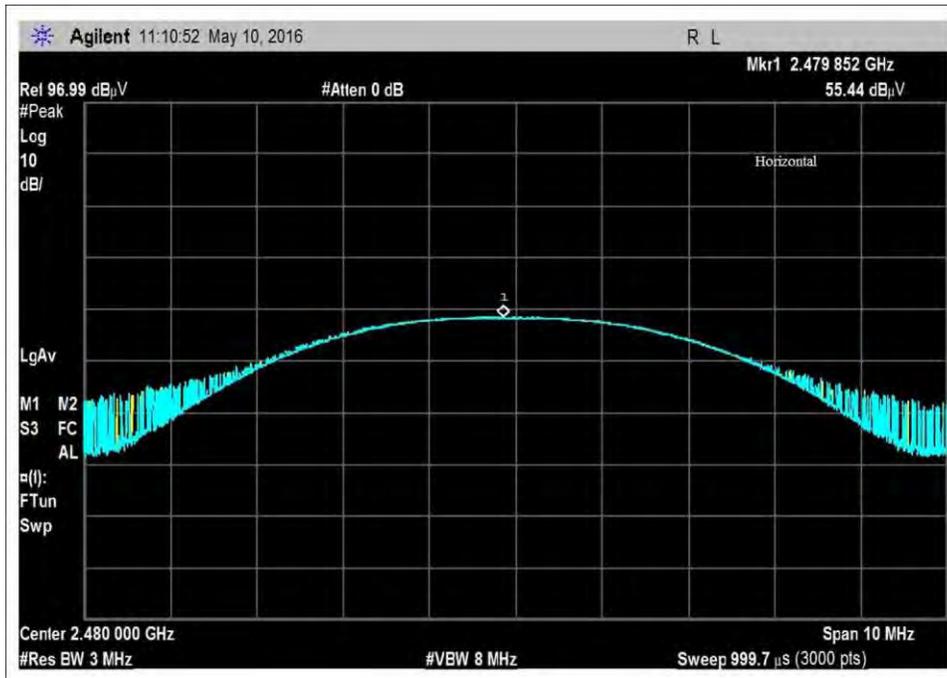


High Channel, Horizontal Polarity

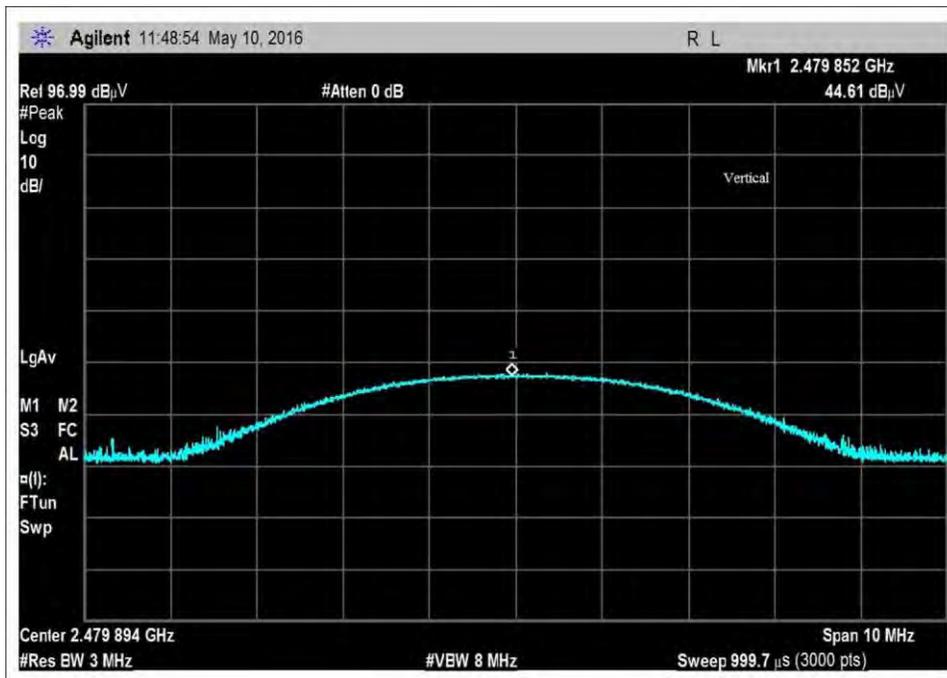

High Channel, Vertical Polarity

Test Setup Photos

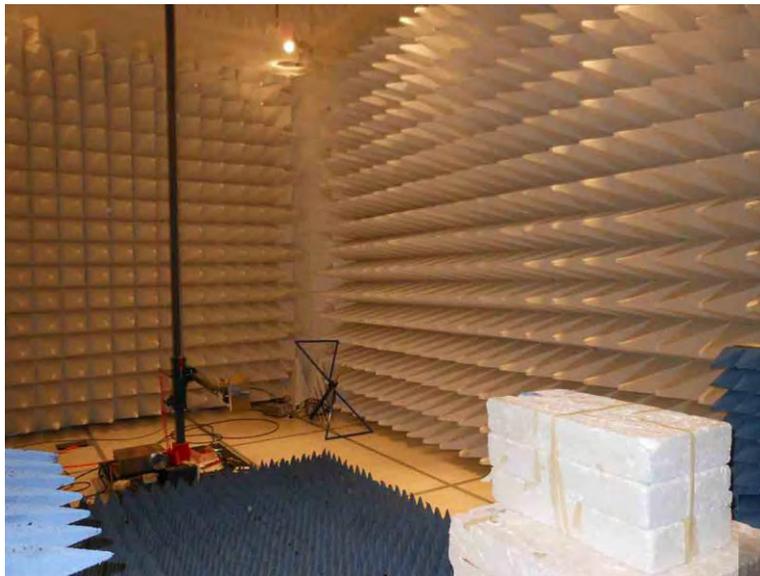

15.247(e) Power Spectral Density

PSD Test Data Summary - Radiated Measurement						
Measurement Method: PKPSD						
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Field Strength (dBuV/m @3m)	Calculated (dBm/3kHz)	Limit (dBm/3kHz)	Results
2402 Horizontal	GFSK	0	71.7	-23.529	≤8	Pass
2402 Vertical	GFSK	0	62.5	-32.729	≤8	Pass
2426 Horizontal	GFSK	0	72.5	-22.729	≤8	Pass
2426 Vertical	GFSK	0	61.6	-33.629	≤8	Pass
2480 Horizontal	GFSK	0	70.3	-24.929	≤8	Pass
2480 Vertical	GFSK	0	59.2	-36.029	≤8	Pass

Conducted RF output power calculated in accordance with ANSI C63.10.

$$P(W) = \frac{(E \cdot d)^2}{30 G}$$

Or equivalently, in logarithmic form:

$$P(dBm) = E(dBuV/m) + 20LOG(d) - G - 104.77$$

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: **VivaLnk, Inc.**
 Specification: **15.247(e) Peak Power Spectral Density (2400-2483.5 MHz DTS)**
 Work Order #: **98267** Date: 5/10/2016
 Test Type: **Radiated Scan** Time: 11:49:24
 Tested By: Hieu Song Nguyenpham Sequence#: 51
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			

Test Conditions / Notes:

Power Spectral Density

Application: VBLET version 2.5.3
 Temperature: 21.3°C
 Humidity: 42 %
 Atmospheric Pressure: 101.9 kPa


Highest Generation Frequency: 2.48GHz
 Method: ANSI C 63.10 2013 and KDB 558074 v03r05 section 10.2
 Transmitting Frequencies: 2402, 2426 and 2480MHz

RBW=3kHz
 VBW=10kHz

The EUT is placed on a non-conducted table. The EUT is operated by an internal battery at 3.0VDC.
 The EUT is set in continuously transmitting as intended.

X- axis is the worst orthogonal

VivaLnk, Inc W/O#: 98267 Sequence#: 51 Date: 5/10/2016
 15.247(e) Peak Power Spectral Density (2400-2483.5 MHz DTS) Test Distance: 3 Meters

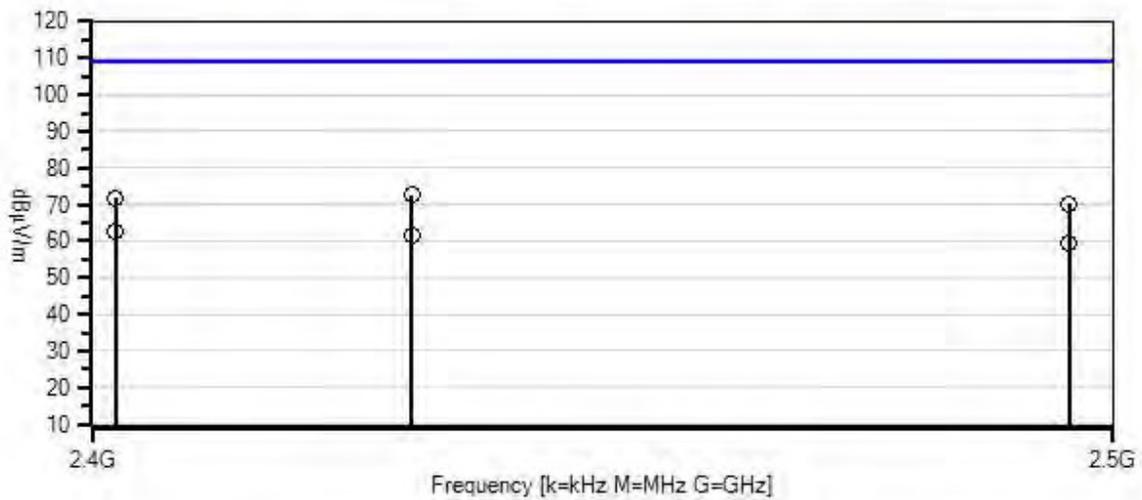

- Readings
- Peak Readings
- × QP Readings
- * Average Readings
- ▼ Ambient
- Software Version: 5.03.02
- 1 - 15.247(e) Peak Power Spectral Density (2400-2483.5 MHz DTS)

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN03471	Spectrum Analyzer	E4440A	1/4/2016	1/4/2018


Measurement Data:

Reading listed by margin.


Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	Dist Table dB	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	2425.878M	42.5	+26.1	+1.3	+2.6	+0.0	72.5	109.2	-36.7	Horiz
2	2401.895M	41.8	+26.0	+1.3	+2.6	+0.0	71.7	109.2	-37.5	Horiz
3	2479.856M	40.1	+26.3	+1.3	+2.6	+0.0	70.3	109.2	-38.9	Horiz
4	2401.895M	32.6	+26.0	+1.3	+2.6	+0.0	62.5	109.2	-46.7	Vert
5	2425.877M	31.6	+26.1	+1.3	+2.6	+0.0	61.6	109.2	-47.6	Vert
6	2479.856M	29.0	+26.3	+1.3	+2.6	+0.0	59.2	109.2	-50.0	Vert


Plots

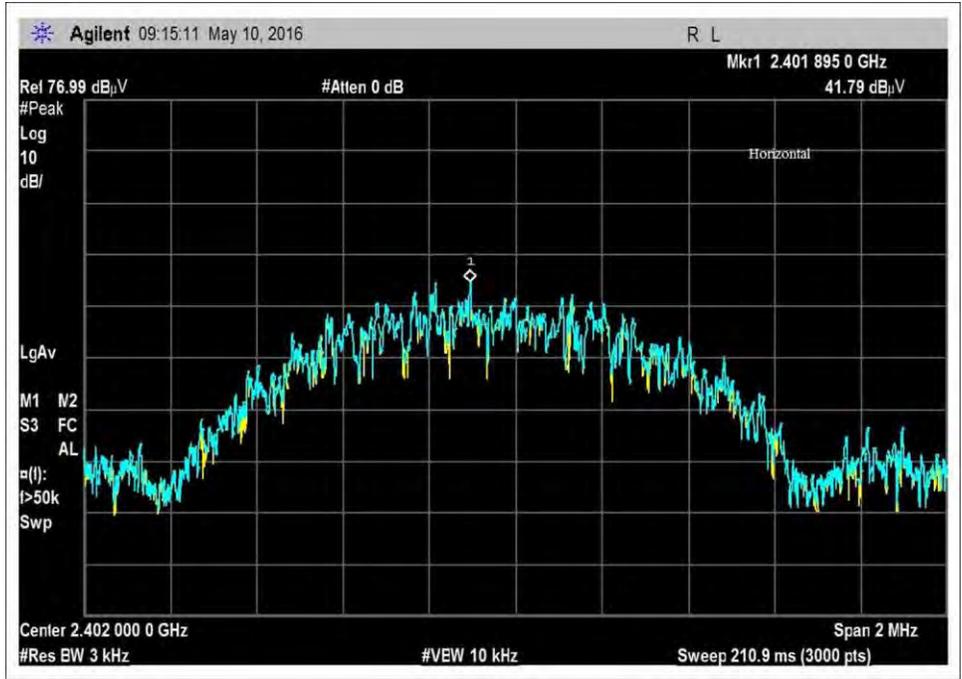


Low Channel, Horizontal Polarity

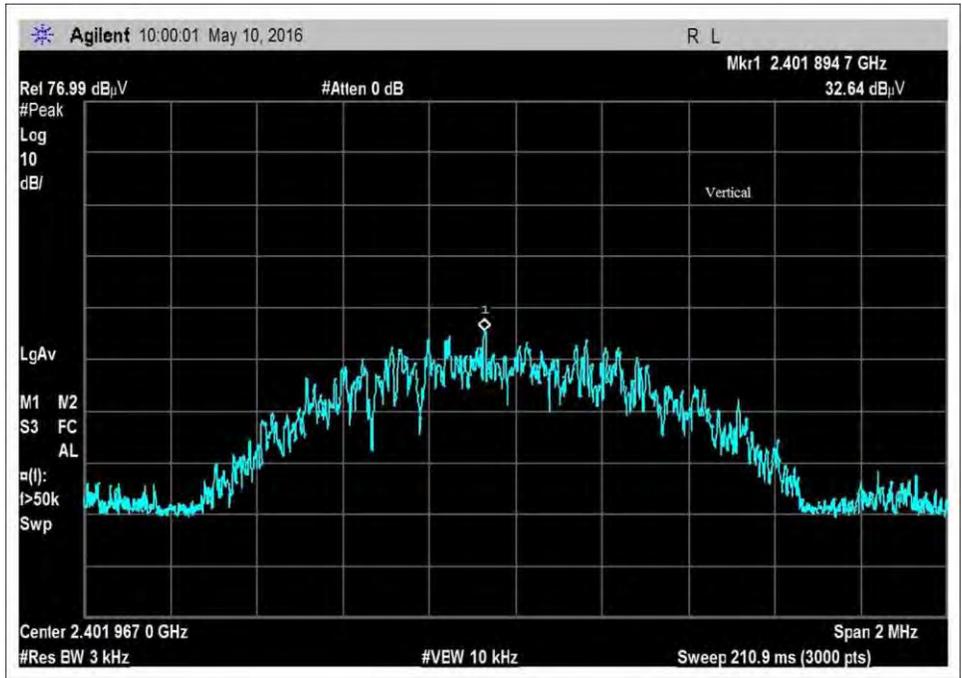


Low Channel, Vertical Polarity

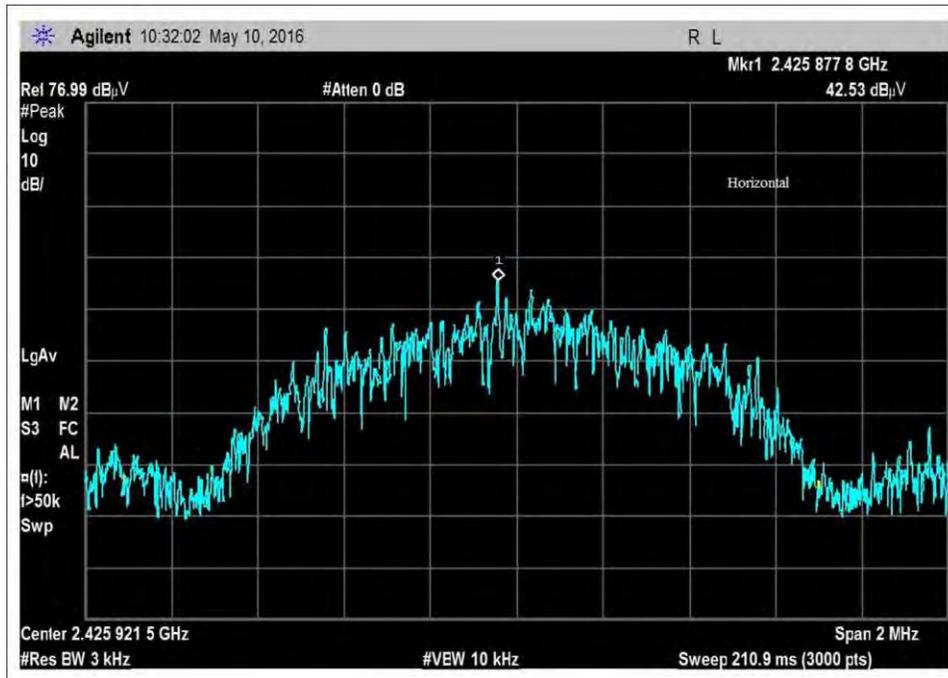


Middle Channel, Horizontal Polarity

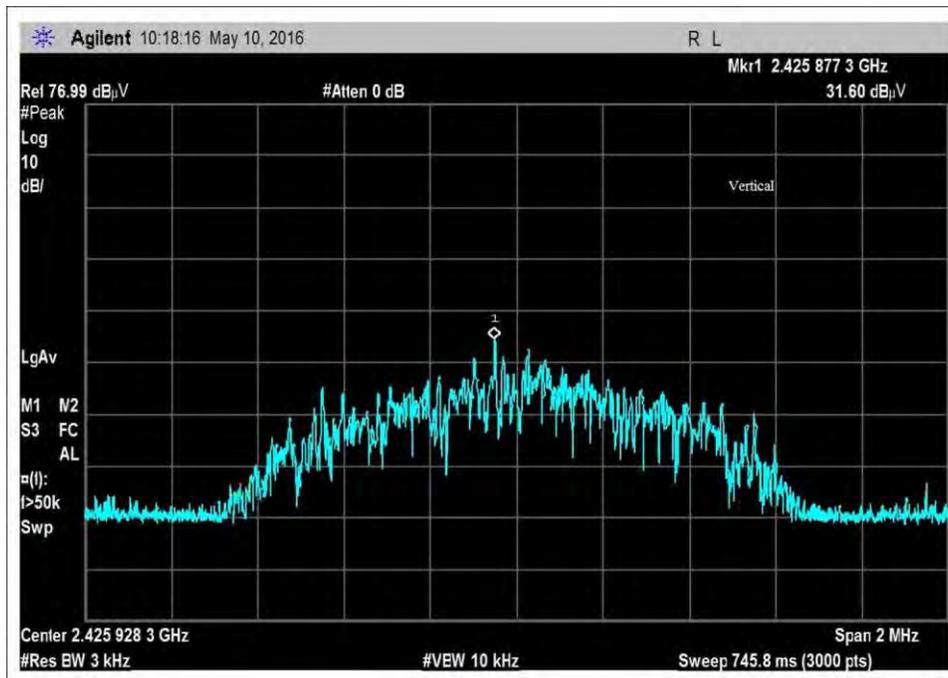

Middle Channel, Vertical Polarity

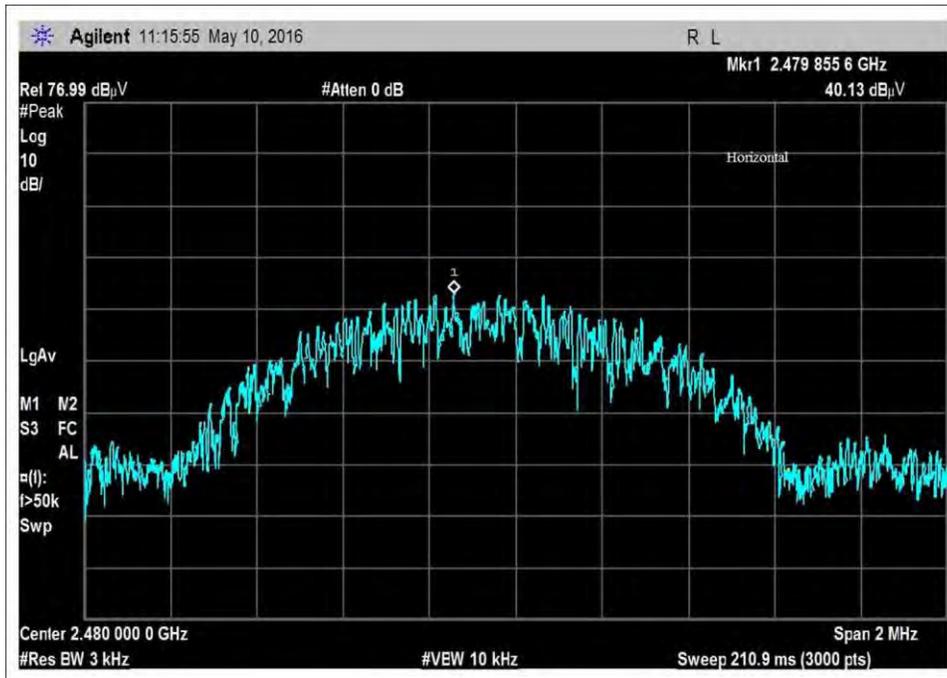


High Channel, Horizontal Polarity

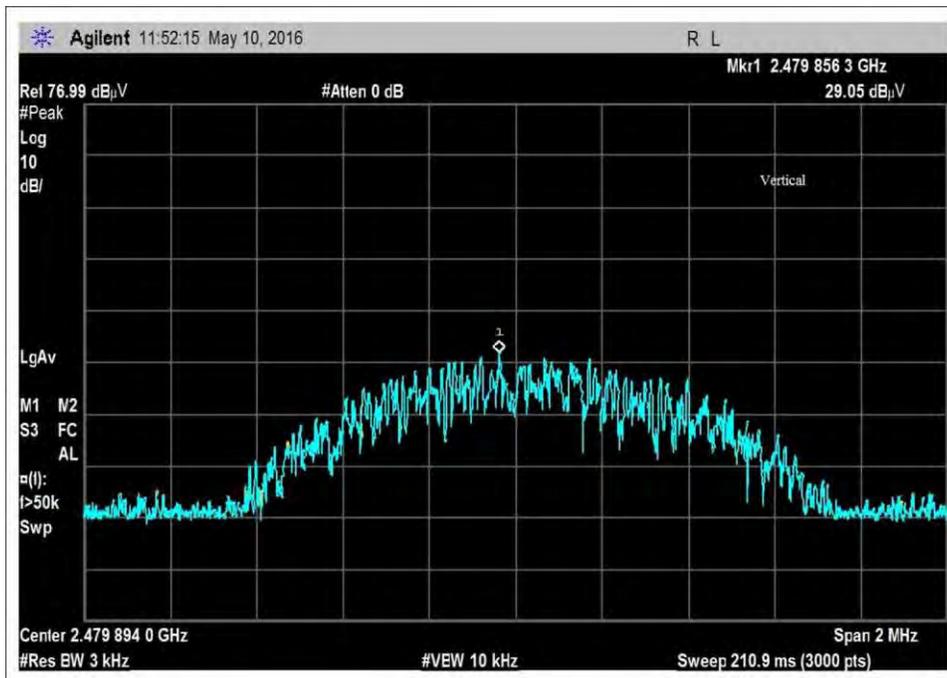

High Channel, Vertical Polarity

Test Setup Photos

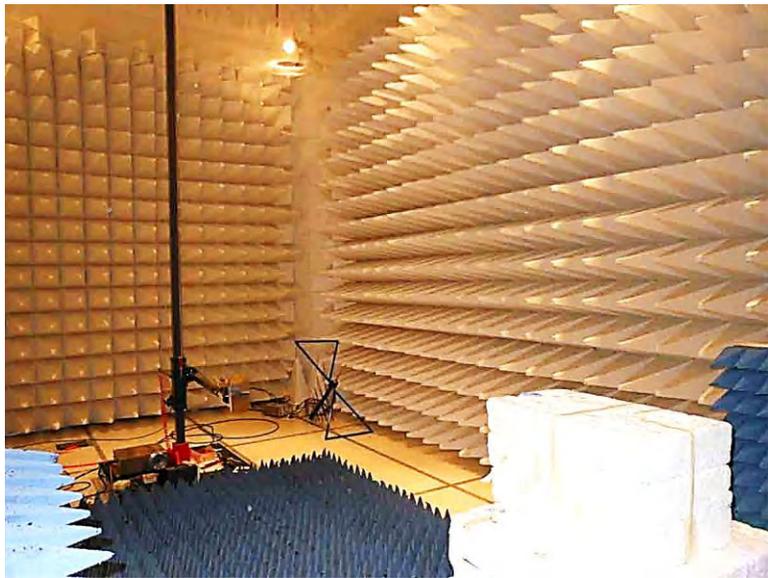

15.247(d) Radiated Emissions & Band Edge

Test Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: **VivaLnk, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **98267** Date: 4/12/2016
 Test Type: **Radiated Scan** Time: 19:01:00
 Tested By: Hieu Song Nguyenpham Sequence#: 38
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			

Test Conditions / Notes:

Radiated Spurious Emission
 Frequency Range: 9kHz to 1000MHz

Application: VBLET version 2.5.3
 Temperature: 20.3°C
 Humidity: 45 %
 Atmospheric Pressure: 101.9 kPa

Highest Generation Frequency: 2.48GHz
 Method: ANSI C 63.10 2013 and KDB 558074 v03r05 section 12.2.7
 Transmitting Frequencies: 2402, 2426 and 2480MHz


9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz;
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz;
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz,
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz.

The EUT is placed on a non-conducted table. The EUT is operated by batteries at 3.0VDC.
 The EUT is set in continuously transmitting as intended.

Low Channel

X-axis is the worst orthogonal

VivaLnk, Inc WO#: 98267 Sequence#: 38 Date: 4/12/2016
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

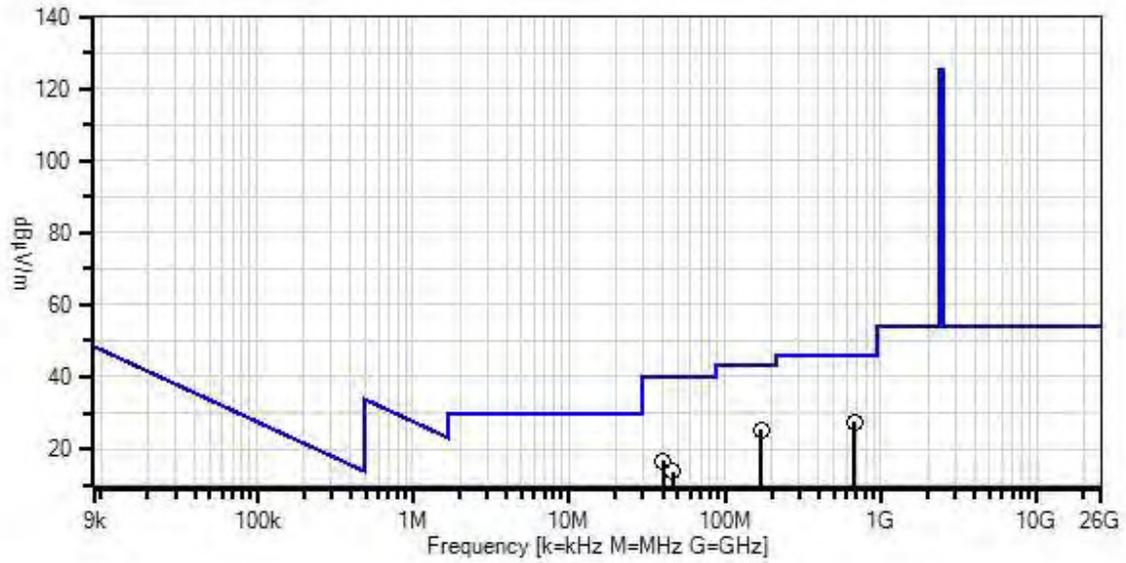

- Readings
 - × QP Readings
 - ▼ Ambient
 - Peak Readings
 - * Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions
- Software Version: 5.03.02

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN00852	Biconilog Antenna	CBL 6111C	11/24/2014	11/24/2016
T2	AN00971A	Preamp	8447D	2/5/2016	2/5/2018
	AN00432	Loop Antenna	6502	5/8/2015	5/8/2017
T3	ANP00880	Cable	RG214U	6/13/2014	6/13/2016
T4	ANP01187	Cable	CNT-195	12/30/2014	12/30/2016
T5	ANP06691	Cable	PE3062-180	8/8/2014	8/8/2016
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 T5 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	170.879M	41.1	+9.7 +0.5	-27.5	+1.2	+0.2	+0.0	25.2	43.5	-18.3	Horiz
2	680.650M	30.7	+20.3 +1.2	-28.2	+2.7	+0.7	+0.0	27.4	46.0	-18.6	Horiz
3	40.400M	30.3	+13.5 +0.2	-28.0	+0.5	+0.1	+0.0	16.6	40.0	-23.4	Vert
4	46.300M	29.8	+10.8 +0.2	-27.9	+0.6	+0.1	+0.0	13.6	40.0	-26.4	Vert

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: **VivaLnk, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **98267** Date: 4/12/2016
 Test Type: **Radiated Scan** Time: 13:52:26
 Tested By: Hieu Song Nguyenpham Sequence#: 29
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			

Test Conditions / Notes:

Radiated Spurious Emission
 Frequency Range: 1000MHz to 25000MHz

Application: VBLET version 2.5.3
 Temperature: 20.3°C
 Humidity: 45 %
 Atmospheric Pressure: 101.9 kPa


Highest Generation Frequency: 2.48GHz
 Method: ANSI C 63.10 2013 and KDB 558074 v03r05 section 12.2.7
 Transmitting Frequencies: 2402, 2426 and 2480MHz

9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz;
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz;
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz,
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz.

The EUT is placed on a non-conducted table. The EUT is operated by batteries at 3.0VDC.
 The EUT is set in continuously transmitting as intended.

Low Channel
 X-axis is the worst orthogonal

VivaLnk, Inc WO#: 98267 Sequence#: 29 Date: 4/12/2016
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

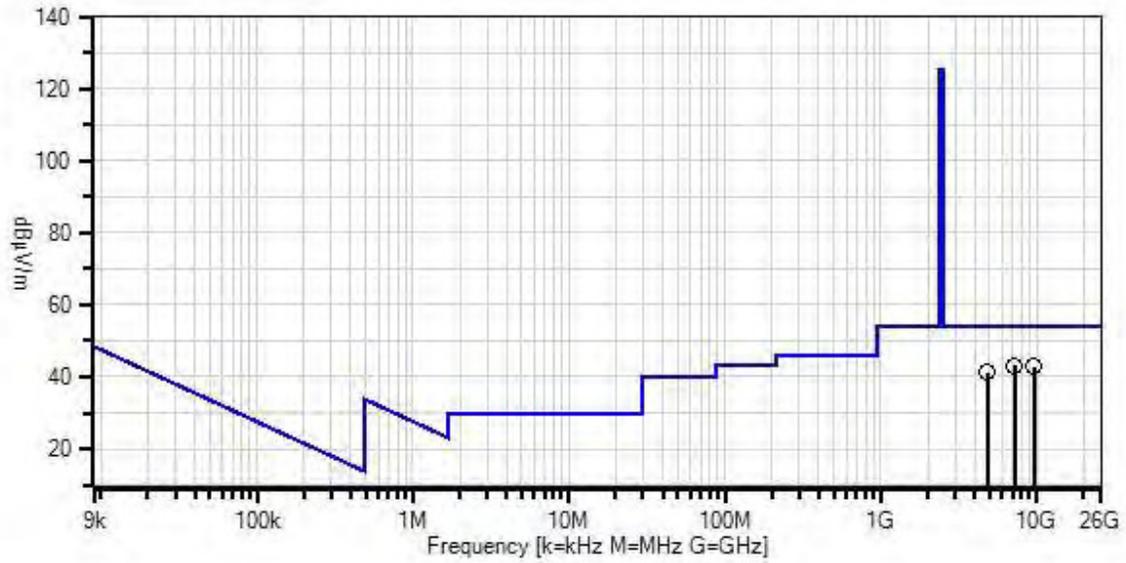

- Readings
 - × QP Readings
 - ▼ Ambient
 - Peak Readings
 - * Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions
- Software Version: 5.03.02

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017
T4	AN03114	Preamp	AMF-7D-00101800-30-10P	4/22/2015	4/22/2017
	AN02694	Horn Antenna-ANSI C63.5 3m	AMFW-5F-18002650-20-10P	5/7/2015	5/7/2017
	ANP00928	Cable	various	1/25/2016	1/25/2018
	ANP00929	Cable	various	1/25/2016	1/25/2018
	ANP06126	Cable	32022-29094K-29094K-168TC	3/18/2015	3/18/2017
	ANP06138	Cable	32022-29094K-29094K-72TC	3/18/2015	3/18/2017
T5	ANP06900	Cable	32022-29094K-29094K-36TC	12/30/2015	12/30/2017
T6	AN03309	High Pass Filter	11SH10-3000/T10000-O/O	1/18/2016	1/18/2018
	AN02693	Active Horn Antenna-ANSI C63.5 3m	AMFW-5F-12001800-20-10P	5/6/2015	5/6/2017

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	7205.445M	58.8	+34.1 +1.0	+2.2 +0.3	+5.0	-58.3	+0.0	43.1	54.0	-10.9	Horiz
2	9606.900M	55.7	+34.8 +1.1	+2.6 +0.3	+5.4	-57.2	+0.0	42.7	54.0	-11.3	Horiz
3	4804.125M	61.6	+30.8 +0.8	+1.8 +0.3	+3.8	-57.8	+0.0	41.3	54.0	-12.7	Horiz

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: **VivaLnk, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **98267** Date: 4/12/2016
 Test Type: **Radiated Scan** Time: 18:42:00
 Tested By: Hieu Song Nguyenpham Sequence#: 35
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			

Test Conditions / Notes:

Radiated Spurious Emission
 Frequency Range: 9kHz to 1000MHz

Application: VBLET version 2.5.3
 Temperature: 20.3°C
 Humidity: 45 %
 Atmospheric Pressure: 101.9 kPa


Highest Generation Frequency: 2.48GHz
 Method: ANSI C 63.10 2013 and KDB 558074 v03r05 section 12.2.7
 Transmitting Frequencies: 2402, 2426 and 2480MHz

9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz;
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz;
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz,
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz.

The EUT is placed on a non-conducted table. The EUT is operated by batteries at 3.0VDC.
 The EUT is set in continuously transmitting as intended.

Middle Channel
 X-axis is the worst orthogonal

VivaLnk, Inc WO#: 98267 Sequence#: 35 Date: 4/12/2016
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

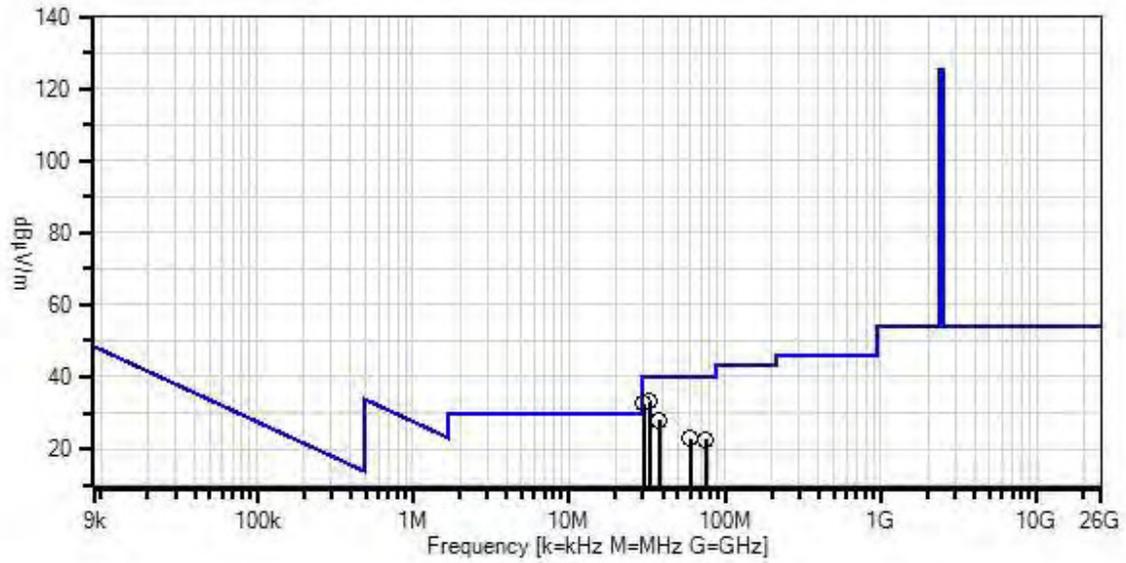

- Readings
 - × QP Readings
 - ▼ Ambient
 - Peak Readings
 - * Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions
- Software Version: 5.03.02

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN00852	Biconilog Antenna	CBL 6111C	11/24/2014	11/24/2016
T2	AN00971A	Preamp	8447D	2/5/2016	2/5/2018
	AN00432	Loop Antenna	6502	5/8/2015	5/8/2017
T3	ANP00880	Cable	RG214U	6/13/2014	6/13/2016
T4	ANP01187	Cable	CNT-195	12/30/2014	12/30/2016
T5	ANP06691	Cable	PE3062-180	8/8/2014	8/8/2016
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 T5 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	33.030M	43.0	+17.4 +0.2	-28.0	+0.5	+0.1	+0.0	33.2	40.0	-6.8	Horiz
2	30.337M	41.3	+18.7 +0.2	-28.0	+0.4	+0.1	+0.0	32.7	40.0	-7.3	Horiz
3	38.080M	40.4	+14.7 +0.2	-28.0	+0.5	+0.1	+0.0	27.9	40.0	-12.1	Horiz
4	59.941M	43.6	+6.2 +0.2	-27.9	+0.6	+0.1	+0.0	22.8	40.0	-17.2	Horiz
5	75.710M	42.3	+7.0 +0.3	-27.8	+0.7	+0.2	+0.0	22.7	40.0	-17.3	Horiz

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: **VivaLnk, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **98267** Date: 4/12/2016
 Test Type: **Radiated Scan** Time: 13:30:12
 Tested By: Hieu Song Nguyenpham Sequence#: 26
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			

Test Conditions / Notes:

Radiated Spurious Emission
 Frequency Range: 1000MHz to 25000MHz

Application: VBLET version 2.5.3
 Temperature: 20.3°C
 Humidity: 45 %
 Atmospheric Pressure: 101.9 kPa


Highest Generation Frequency: 2.48GHz
 Method: ANSI C 63.10 2013 and KDB 558074 v03r05 section 12.2.7
 Transmitting Frequencies: 2402, 2426 and 2480MHz

9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz;
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz;
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz,
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz.

The EUT is placed on a non-conducted table. The EUT is operated by batteries at 3.0VDC.
 The EUT is set in continuously transmitting as intended.

Middle Channel
 X-axis is the worst orthogonal

VivaLnk, Inc WO#: 98267 Sequence#: 26 Date: 4/12/2016
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

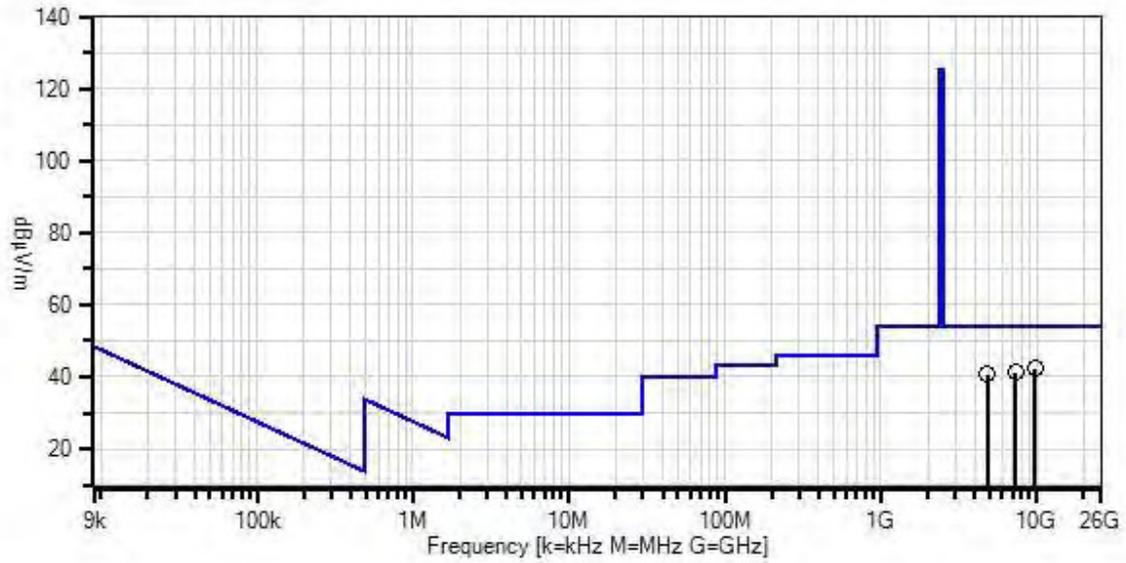

- Readings
 - × QP Readings
 - ▼ Ambient
 - Peak Readings
 - * Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions
- Software Version: 5.03.02

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017
T4	AN03114	Preamp	AMF-7D-00101800-30-10P	4/22/2015	4/22/2017
	AN02694	Horn Antenna-ANSI C63.5 3m	AMFW-5F-18002650-20-10P	5/7/2015	5/7/2017
	ANP00928	Cable	various	1/25/2016	1/25/2018
	ANP00929	Cable	various	1/25/2016	1/25/2018
	ANP06126	Cable	32022-29094K-29094K-168TC	3/18/2015	3/18/2017
	ANP06138	Cable	32022-29094K-29094K-72TC	3/18/2015	3/18/2017
T5	ANP06900	Cable	32022-29094K-29094K-36TC	12/30/2015	12/30/2017
T6	AN03309	High Pass Filter	11SH10-3000/T10000-O/O	1/18/2016	1/18/2018
	AN02693	Active Horn Antenna-ANSI C63.5 3m	AMFW-5F-12001800-20-10P	5/6/2015	5/6/2017

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 T5 dB	T2 T6 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	9698.805M	55.5	+34.9 +1.1	+2.6 +0.3	+5.5	-57.5	+0.0	42.4	54.0	-11.6	Horiz
2	7277.550M	56.8	+34.2 +1.0	+2.3 +0.3	+5.0	-58.3	+0.0	41.3	54.0	-12.7	Horiz
3	4852.300M	60.9	+30.9 +0.8	+1.8 +0.3	+3.8	-57.7	+0.0	40.8	54.0	-13.2	Horiz

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: **VivaLnk, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **98267** Date: 4/12/2016
 Test Type: **Radiated Scan** Time: 18:18:11
 Tested By: Hieu Song Nguyenpham Sequence#: 32
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			

Test Conditions / Notes:

Radiated Spurious Emission
 Frequency Range: 9kHz to 1000MHz

Application: VBLET version 2.5.3
 Temperature: 20.3°C
 Humidity: 45 %
 Atmospheric Pressure: 101.9 kPa


Highest Generation Frequency: 2.48GHz
 Method: ANSI C 63.10 2013 and KDB 558074 v03r05 section 12.2.7
 Transmitting Frequencies: 2402, 2426 and 2480MHz

9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz;
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz;
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz,
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz.

The EUT is placed on a non-conducted table. The EUT is operated by batteries at 3.0VDC.
 The EUT is set in continuously transmitting as intended.

High Channel
 X-axis is the worst orthogonal

VivaLnk, Inc WO#: 98267 Sequence#: 32 Date: 4/12/2016
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

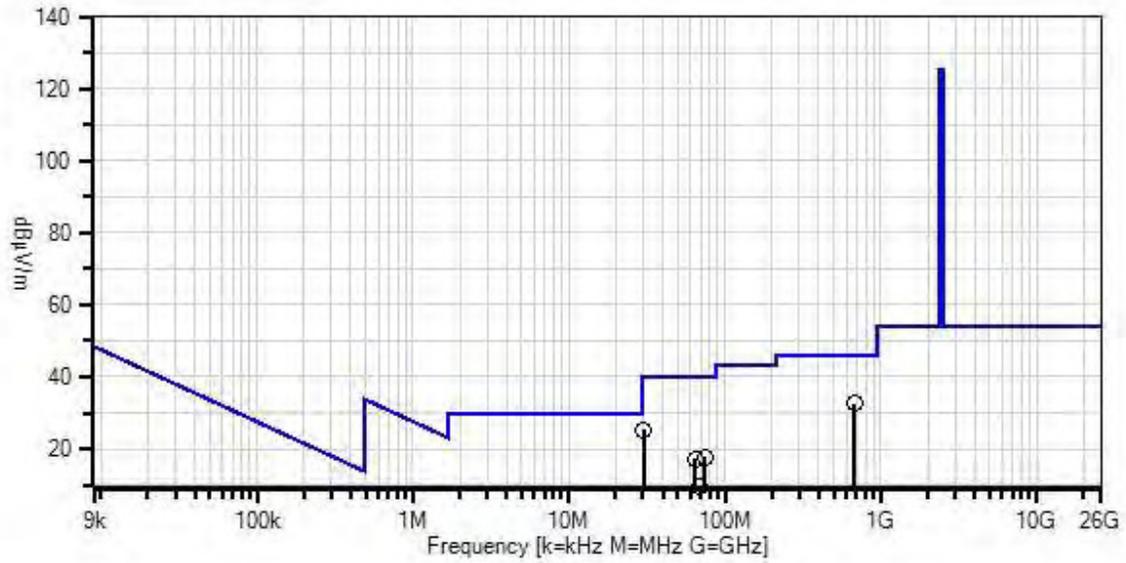

- Readings
 - × QP Readings
 - ▼ Ambient
 - Peak Readings
 - * Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions
- Software Version: 5.03.02

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN00852	Biconilog Antenna	CBL 6111C	11/24/2014	11/24/2016
T2	AN00971A	Preamp	8447D	2/5/2016	2/5/2018
	AN00432	Loop Antenna	6502	5/8/2015	5/8/2017
T3	ANP00880	Cable	RG214U	6/13/2014	6/13/2016
T4	ANP01187	Cable	CNT-195	12/30/2014	12/30/2016
T5	ANP06691	Cable	PE3062-180	8/8/2014	8/8/2016
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB μ V	dB	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	674.812M	35.9	+20.3 +1.2	-28.2	+2.7	+0.7	+0.0	32.6	46.0	-13.4	Horiz
2	30.379M	33.8	+18.7 +0.2	-28.0	+0.4	+0.1	+0.0	25.2	40.0	-14.8	Horiz
3	74.500M	37.4	+6.8 +0.3	-27.7	+0.7	+0.2	+0.0	17.7	40.0	-22.3	Vert
4	64.840M	37.9	+6.2 +0.2	-27.9	+0.7	+0.1	+0.0	17.2	40.0	-22.8	Vert
5	68.340M	30.0	+6.2 +0.3	-27.9	+0.7	+0.1	+0.0	9.4	40.0	-30.6	Horiz

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: **VivaLnk, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **98267** Date: 4/12/2016
 Test Type: **Radiated Scan** Time: 11:57:09
 Tested By: Hieu Song Nguyenpham Sequence#: 23
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			

Test Conditions / Notes:

Radiated Spurious Emission
 Frequency Range: 1000MHz to 25000MHz

Application: VBLET version 2.5.3
 Temperature: 20.3°C
 Humidity: 45 %
 Atmospheric Pressure: 101.9 kPa


Highest Generation Frequency: 2.48GHz
 Method: ANSI C 63.10 2013 and KDB 558074 v03r05 section 12.2.7
 Transmitting Frequencies: 2402, 2426 and 2480MHz

9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz;
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz;
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz,
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz.

The EUT is placed on a non-conducted table. The EUT is operated by batteries at 3.0VDC.
 The EUT is set in continuously transmitting as intended.

High Channel
 X-axis is the worst orthogonal

VivaLnk, Inc WO#: 98267 Sequence#: 23 Date: 4/12/2016
15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

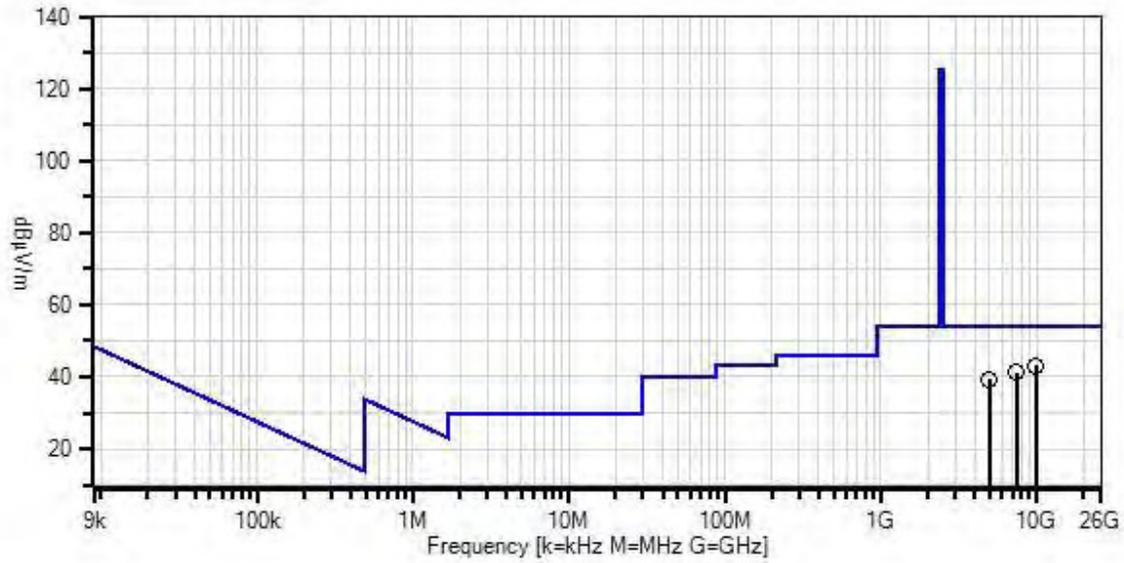

- Readings
- × QP Readings
- ▼ Ambient
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions

- Peak Readings
 - * Average Readings
- Software Version: 5.03.02

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017
T4	AN03114	Preamp	AMF-7D-00101800-30-10P	4/22/2015	4/22/2017
	AN02694	Horn Antenna-ANSI C63.5 3m	AMFW-5F-18002650-20-10P	5/7/2015	5/7/2017
	ANP00928	Cable	various	1/25/2016	1/25/2018
	ANP00929	Cable	various	1/25/2016	1/25/2018
	ANP06126	Cable	32022-29094K-29094K-168TC	3/18/2015	3/18/2017
	ANP06138	Cable	32022-29094K-29094K-72TC	3/18/2015	3/18/2017
T5	ANP06900	Cable	32022-29094K-29094K-36TC	12/30/2015	12/30/2017
T6	AN03309	High Pass Filter	11SH10-3000/T10000-O/O	1/18/2016	1/18/2018
	AN02693	Active Horn Antenna-ANSI C63.5 3m	AMFW-5F-12001800-20-10P	5/6/2015	5/6/2017

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 T5 dB	T2 T6 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	9919.473M	56.1	+35.0 +1.1	+2.6 +0.4	+5.7	-57.7	+0.0	43.2	54.0	-10.8	Horiz
2	7439.398M	56.4	+34.4 +1.0	+2.3 +0.3	+5.1	-58.2	+0.0	41.3	54.0	-12.7	Horiz
3	4959.548M	58.9	+31.1 +0.8	+1.8 +0.3	+3.8	-57.3	+0.0	39.4	54.0	-14.6	Horiz

Band Edge

Band Edge Summary

Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
2390.0	GFSK	Integral	43.2	<54	Pass
2483.5	GFSK	Integral	44.0	<54	Pass

Band Edge Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170
 Customer: **VivaLnk, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **98267** Date: 4/21/2016
 Test Type: **Radiated Scan** Time: 15:35:05
 Tested By: Hieu Song Nguyenpham Sequence#: 1
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 3			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 3			



Test Conditions / Notes:



Band Edge
 Application: VBLET version 2.5.3
 Temperature: 20.3°C
 Humidity: 45 %
 Atmospheric Pressure: 101.9 kPa
 Highest Generation Frequency: 2.48GHz
 Method: ANSI C 63.10 2013
 Transmitting Frequencies: 2402, 2426 and 2480MHz
 The EUT is placed on a non-conducted table. The EUT is operated by batteries at 3.0VDC.
 The EUT is set in continuously transmitting as intended.
 X- axis is the worst orthogonal

Test Equipment:


ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN03471	Spectrum Analyzer	E4440A	1/4/2016	1/4/2018

Band Edge Plots

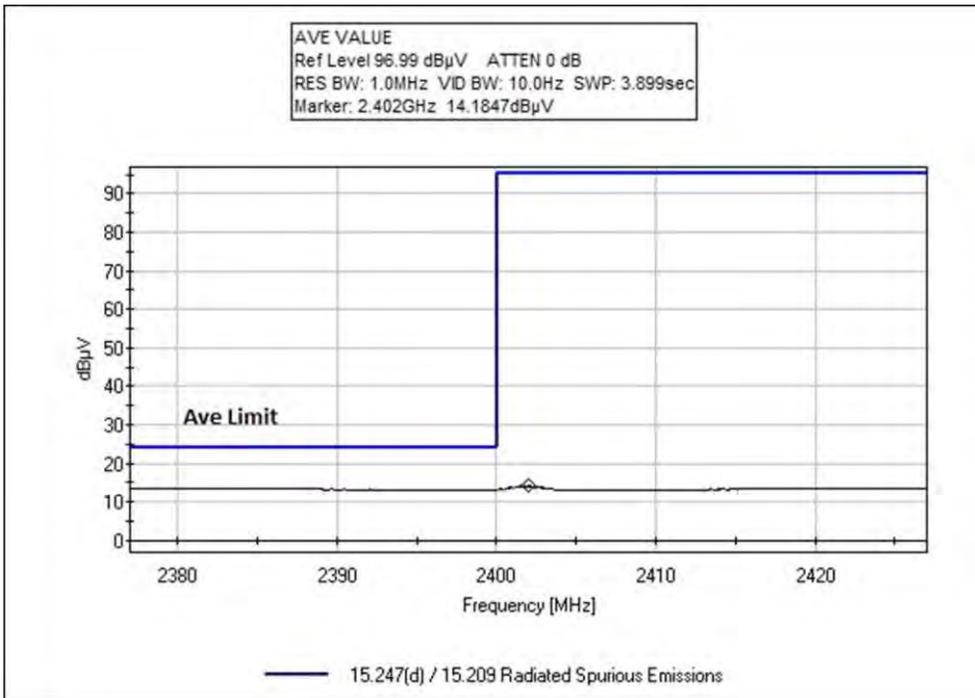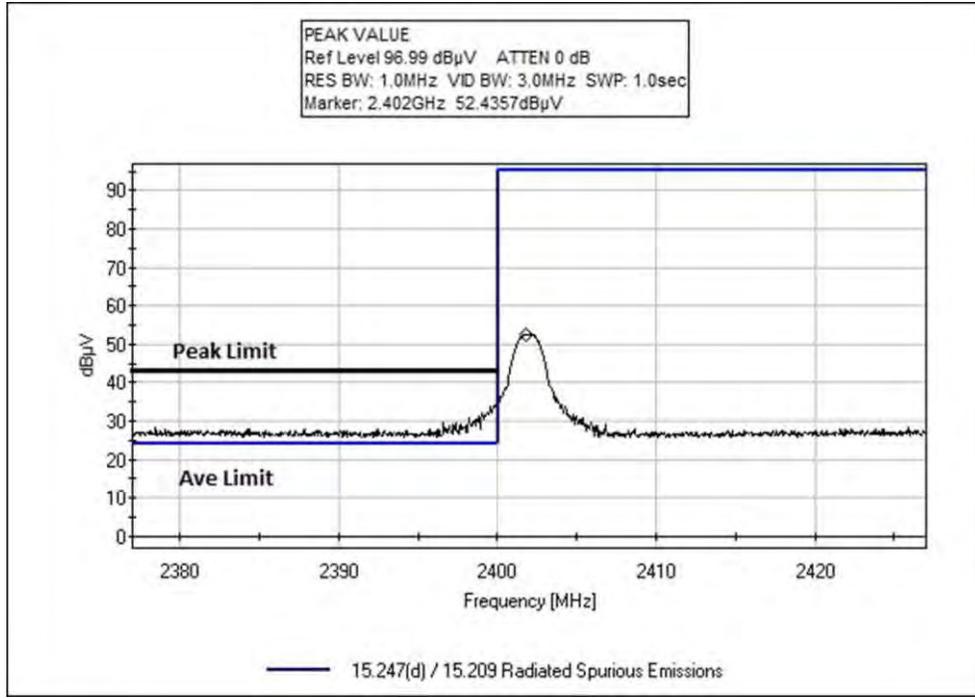

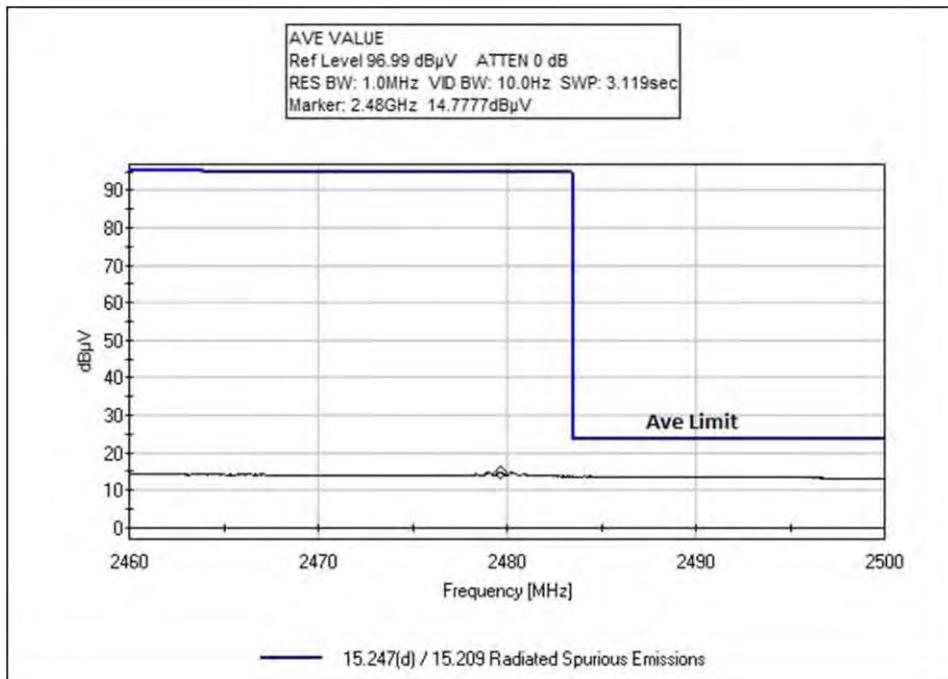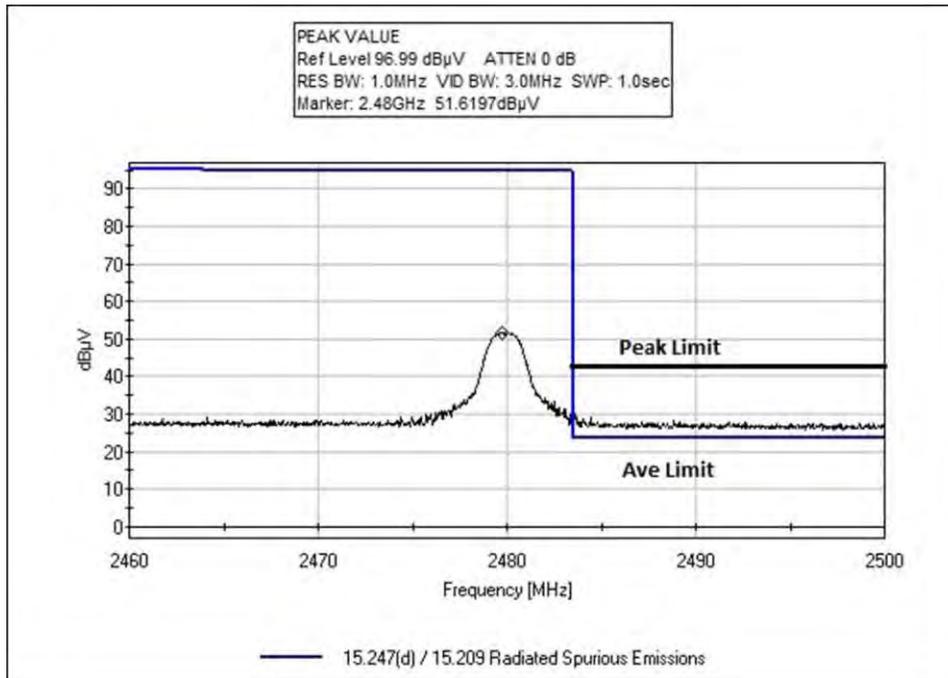


Test Setup Photos

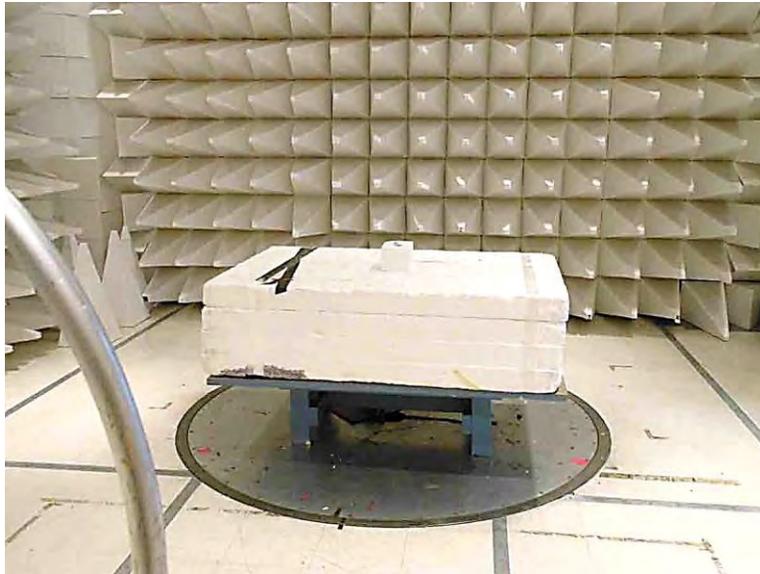


9kHz – 30MHz




9kHz – 30MHz

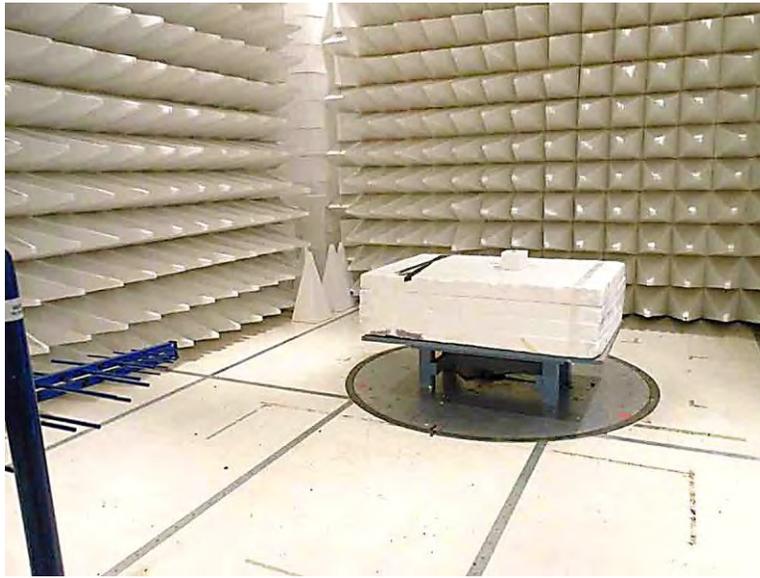


30MHz – 1GHz

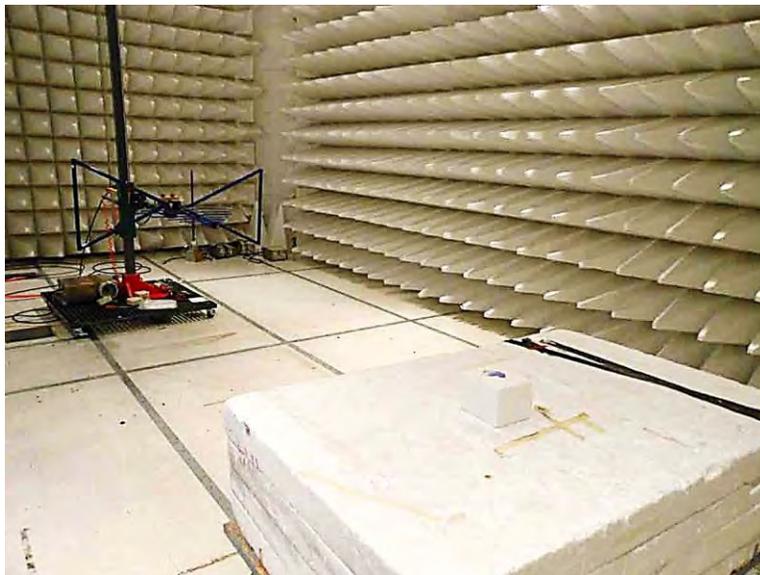


30MHz – 1GHz

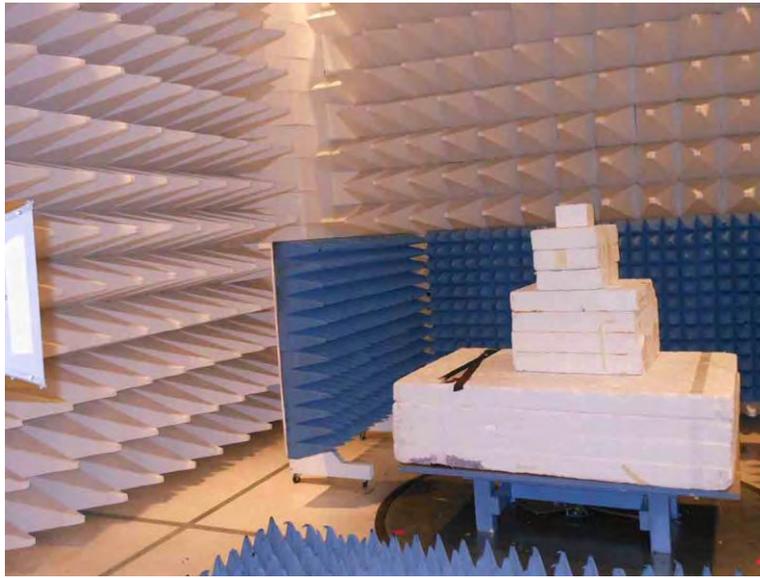

1 – 12GHz

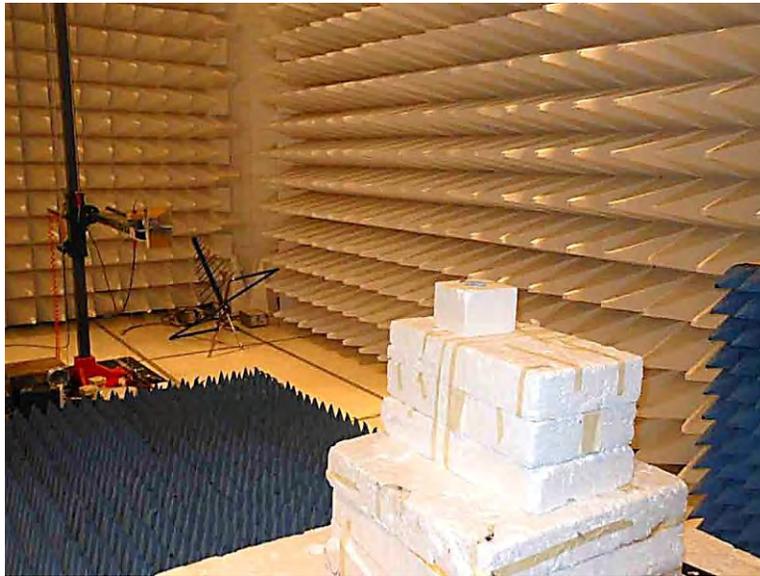

1 – 12GHz

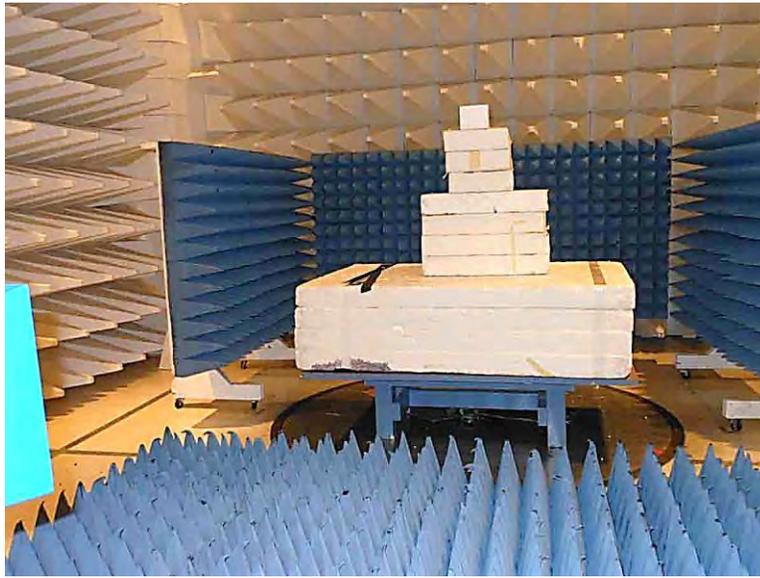


12 – 25GHz



12 – 25GHz



X Axis

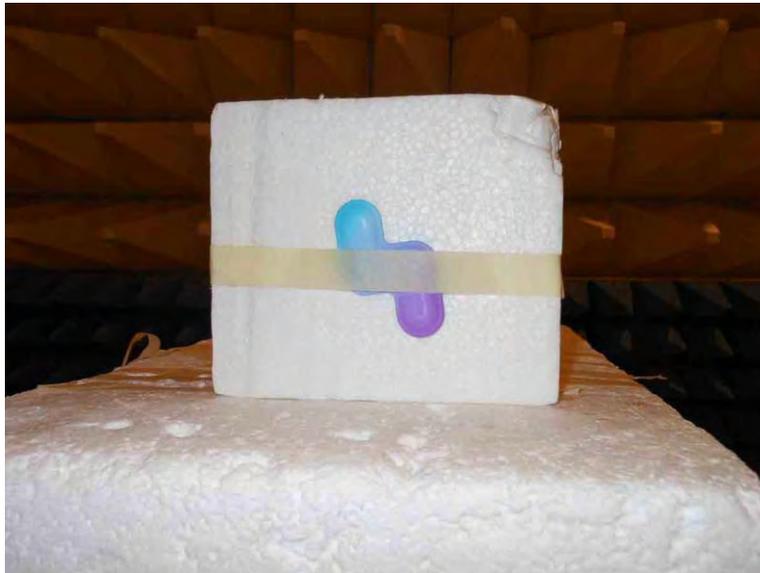

Y Axis



Z Axis

SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dBμV/m, the spectrum analyzer reading in dBμV was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on the limit value subtracting the corrected measured value; a negative margin represents a measurement less than the limit while a positive margin represents a measurement exceeding the limit.

SAMPLE CALCULATIONS		
	Meter reading	(dBμV)
+	Antenna Factor	(dB/m)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dBμV/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.