

# VivaLnk, Inc.

## TEST REPORT FOR

**Fever Scout Charger (Relay)  
Model: VV-200**

**Tested To The Following Standard:**

**FCC Part 15 Subpart C Section**

**15.247  
(DTS 2400-2483.5 MHz)**

**Report No.: 98267-7**

**Date of issue: April 29, 2016**



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

**TABLE OF CONTENTS**

Administrative Information ..... 3

    Test Report Information .....3

    Report Authorization .....3

    Test Facility Information .....4

    Software Versions .....4

    Site Registration & Accreditation Information .....4

    Summary of Results .....5

    Modifications During Testing.....5

    Conditions During Testing.....5

    Equipment Under Test.....6

    General Product Information.....6

FCC Part 15 Subpart C ..... 7

    15.247(a)(2) 6dB Bandwidth.....7

    15.247(b)(3) Output Power .....11

    15.247(e) Power Spectral Density .....19

    15.247(d) Radiated Emissions & Band Edge .....26

Supplemental Information..... 51

    Measurement Uncertainty .....51

    Emissions Test Details.....51

## ADMINISTRATIVE INFORMATION

### Test Report Information

**REPORT PREPARED FOR:**

VivaLnk, Inc.  
4655 Old Ironsides Dr., Mailstop #390  
Santa Clara, CA 95054

**REPORT PREPARED BY:**

Terri Rayle  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

REPRESENTATIVE: George Wang

Project Number: 98267

**DATE OF EQUIPMENT RECEIPT:**

April 12, 2016

**DATE(S) OF TESTING:**

April 12-21, 2016

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



**Steve Behm**  
*Director of Quality Assurance & Engineering Services*  
*CKC Laboratories, Inc.*

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):  
CKC Laboratories, Inc.  
1120 Fulton Place  
Fremont, CA 94539

## Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.02

## Site Registration & Accreditation Information

Location	CB #	TAIWAN	CANADA	FCC	JAPAN
Fremont	US0082	SL2-IN-E-1148R	3082B-1	958979	A-0149

## SUMMARY OF RESULTS

### Standard / Specification: FCC Part 15 Subpart C - 15.247 (DTS)

Test Procedure	Description	Modifications	Results
15.247(a)(2)	6dB Bandwidth	NA	Pass
15.247(b)(3)	Output Power	NA	Pass
15.247(e)	Power Spectral Density	NA	Pass
15.247(d)	RF Conducted Emissions & Band Edge	NA	NA2
15.247(d)	Radiated Emissions & Band Edge	NA	Pass
15.207	AC Conducted Emissions	NA	NA1

NA = Not Applicable

NA1 = Not applicable because the EUT is operated by 3.0VDC batteries.

NA2 = Not applicable because the EUT has an integral antenna.

### Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions
No modifications were made during testing.

**Modifications listed above must be incorporated into all production units.**

### Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions
None

## EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

### Configuration 2

#### *Equipment Tested:*

Device	Manufacturer	Model #	S/N
Fever Scout Charger (Relay)	VivaLnk, Inc.	VV-200	F5

#### *Support Equipment:*

Device	Manufacturer	Model #	S/N
None			

## General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	BLE 4.0
Operating Frequency Range:	2400MHz to 2483.5MHz
Modulation Type(s):	GFSK
Maximum Duty Cycle:	25%
Number of TX Chains:	40
Antenna Type(s) and Gain:	3.3dBi
Beamforming Type:	NA
Antenna Connection Type:	Integral
Nominal Input Voltage:	3.0VDC
Software used for Test:	VBLET version 2.5.3

## FCC Part 15 Subpart C

### 15.247(a)(2) 6dB Bandwidth



Test Setup/Conditions			
Test Location:	Fremont Lab C3	Test Engineer:	Hieu Song Nguyenpham
Test Method:	ANSI C63.10 (2013), KDB 558074 v03r05 Section 8.1	Test Date(s):	4/21/2016
Configuration:	2		
Test Setup:	The EUT is placed on a non-conducted table. The device is operated by an internal battery at 3.0VDC. The EUT is set in continuously transmitting as intended.  RBW=100kHz VBW=300kHz		


Environmental Conditions			
Temperature (°C)	21.3	Relative Humidity (%):	42

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02113	Horn Antenna	EMC Test Systems	3115	2/3/2015	2/3/2017
P01210	Cable	Andrews	FSJ1P-50A-4A	1/15/2015	1/15/2017
03302	Cable	Astrolab	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
03471	Spectrum Analyzer	Agilent	E4440A	1/4/2016	1/4/2018


Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
2402	1	GFSK	681.002	≥500	Pass
2426	1	GFSK	681.071	≥500	Pass
2480	1	GFSK	702.725	≥500	Pass

**Plots**

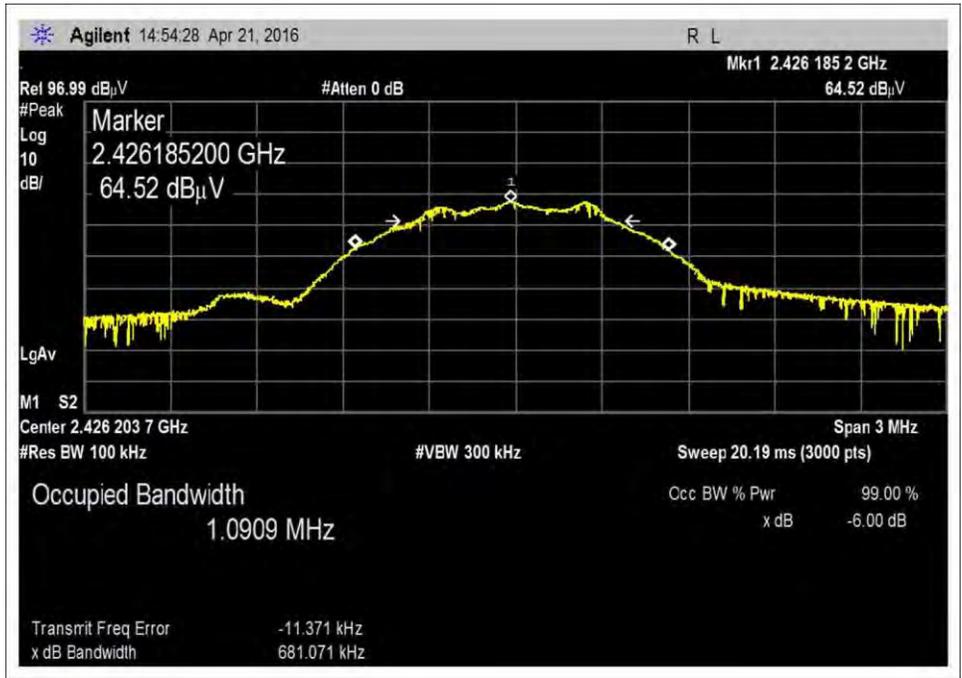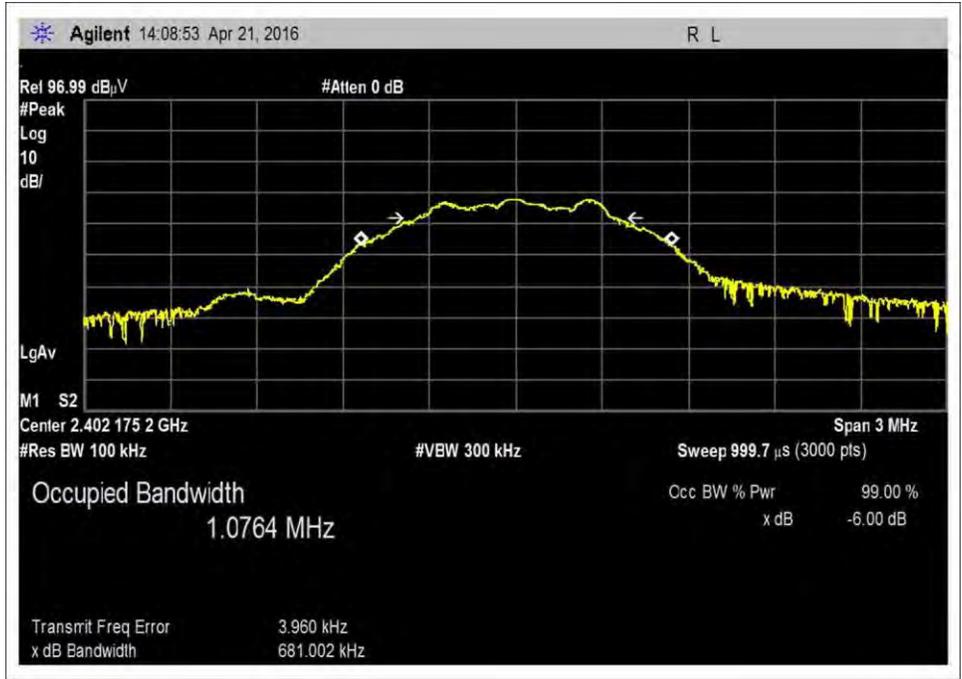

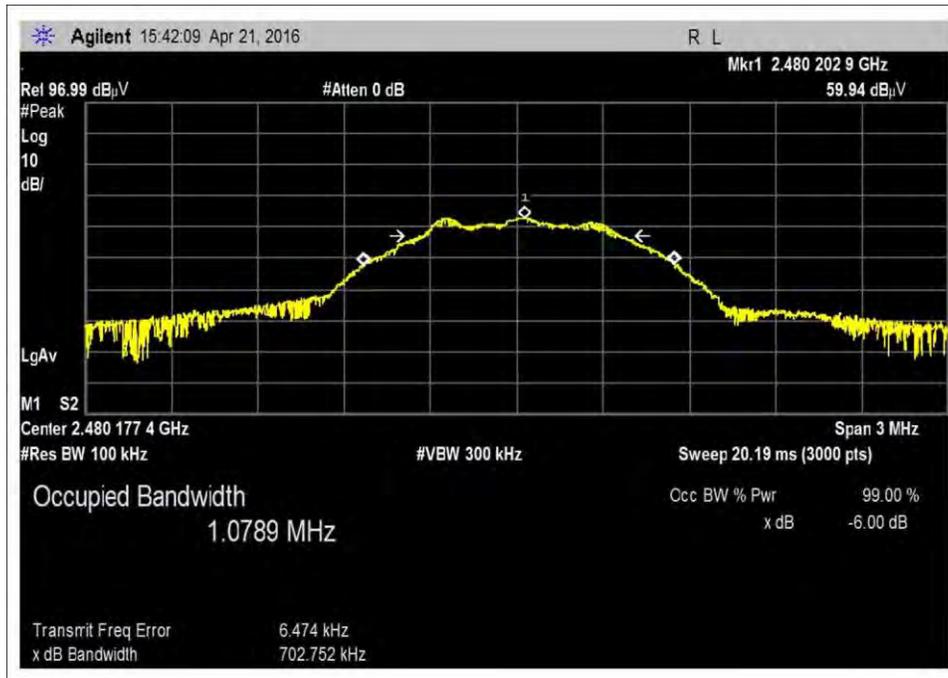

**Test Setup Photos**

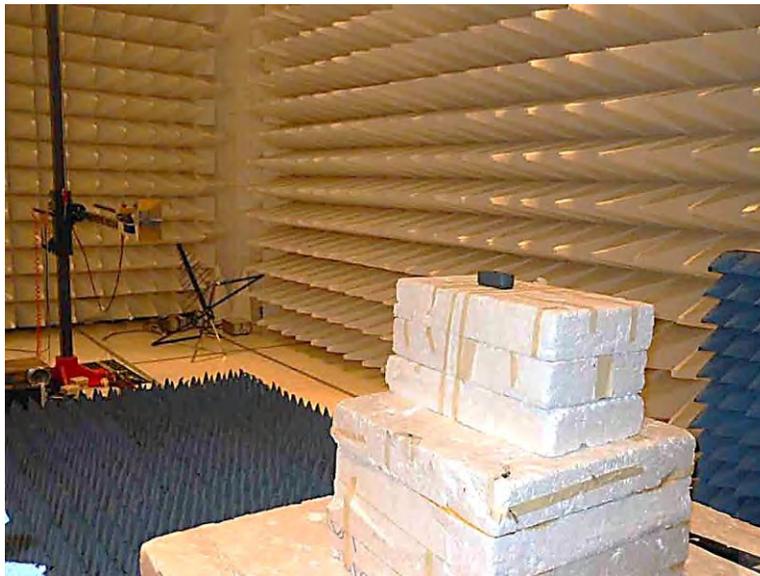

## 15.247(b)(3) Output Power

### Test Data Summary - Voltage Variations

This equipment is battery powered. Power output tests were performed using a fresh battery.

### Power Output Test Data Summary - Radiated Measurement

Measurement Option: RBW > DTS Bandwidth

Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Field Strength (dBuV/m @3m)	Calculated (dBm)	Limit (dBm)	Results
2402 Horizontal	GFSK	3.3	95.4	-3.129	≤ 30	Pass
2402 Vertical	GFSK	3.3	88.3	-10.229	≤ 30	Pass
2426 Horizontal	GFSK	3.3	94.8	-3.729	≤ 30	Pass
2426 Vertical	GFSK	3.3	86.7	-11.829	≤ 30	Pass
2480 Horizontal	GFSK	3.3	90.2	-8.329	≤ 30	Pass
2480 Vertical	GFSK	3.3	83.0	-15.529	≤ 30	Pass

For fixed point-to-point antennas, the limit is calculated in accordance with 15.247(c)(1):  $Limit = 30 - Roundup\left(\frac{G-6}{3}\right)$

For directional beamforming antennas, the limit is calculated in accordance with 15.247(c)(2) and KDB 662911.

Conducted RF output power calculated in accordance with ANSI C63.10.

$$P(W) = \frac{(E \cdot d)^2}{30 G}$$

Or equivalently, in logarithmic form:

$$P(dBm) = E(dBuV/m) + 20LOG(d) - G - 104.77$$

**Test Setup / Conditions / Data**

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **VivaLnk, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **98267** Date: 4/21/2016  
 Test Type: **Radiated Scan** Time: 15:35:05  
 Tested By: Hieu Song Nguyenpham Sequence#: 48  
 Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Test Conditions / Notes:**

Fundamental

Application: VBLET version 2.5.3


Temperature: 21.3° C  
 Humidity: 42 %  
 Atmospheric Pressure: 101.9 kPa

Highest Generating Frequency: 2.48GHz  
 Method: ANSI C 63.10 2013 and KDB 558074 v03r05 section 9.1.1  
 Transmitting Frequencies: 2402, 2426 and 2480MHz

RBW=3MHz  
 VBW=8MHz

The EUT is placed on a non-conducted table. The device is operated by an internal battery at 3.0VDC. The EUT is set in continuously transmitting as intended.

Vivalnk, Inc WO#: 98267 Sequence#: 48 Date: 4/21/2016  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

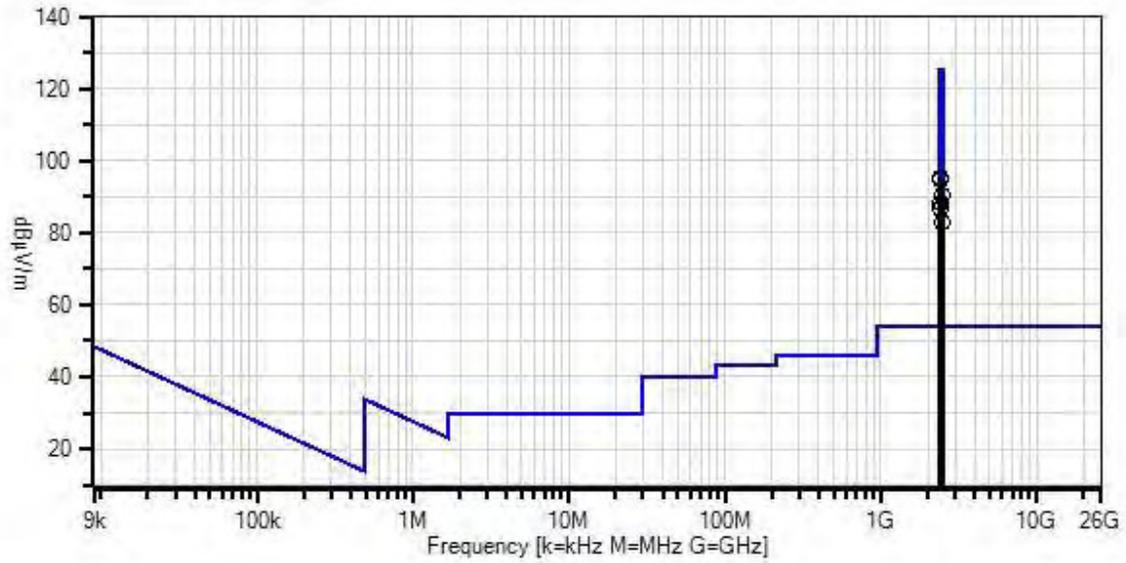

- Readings
  - × QP Readings
  - ▼ Ambient
  - Peak Readings
  - \* Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions
- Software Version: 5.03.02

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN03471	Spectrum Analyzer	E4440A	1/4/2016	1/4/2018


**Measurement Data:**

Reading listed by margin.


Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	2402.188M	65.5	+26.0	+1.3	+2.6	+0.0	95.4	125.2	-29.8	Horiz
2	2426.169M	64.8	+26.1	+1.3	+2.6	+0.0	94.8	125.2	-30.4	Horiz
3	2480.068M	60.0	+26.3	+1.3	+2.6	+0.0	90.2	125.2	-35.0	Horiz
4	2402.188M	58.4	+26.0	+1.3	+2.6	+0.0	88.3	125.2	-36.9	Vert
5	2426.169M	56.7	+26.1	+1.3	+2.6	+0.0	86.7	125.2	-38.5	Vert
6	2480.068M	52.8	+26.3	+1.3	+2.6	+0.0	83.0	125.2	-42.2	Vert


**Plots**

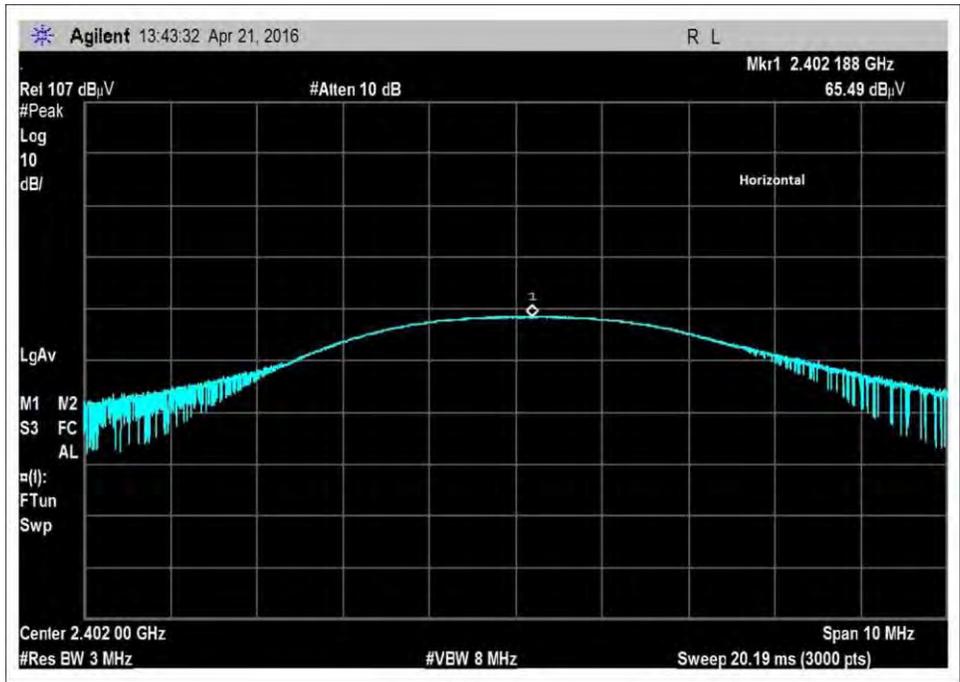


Low Channel, Horizontal Polarity

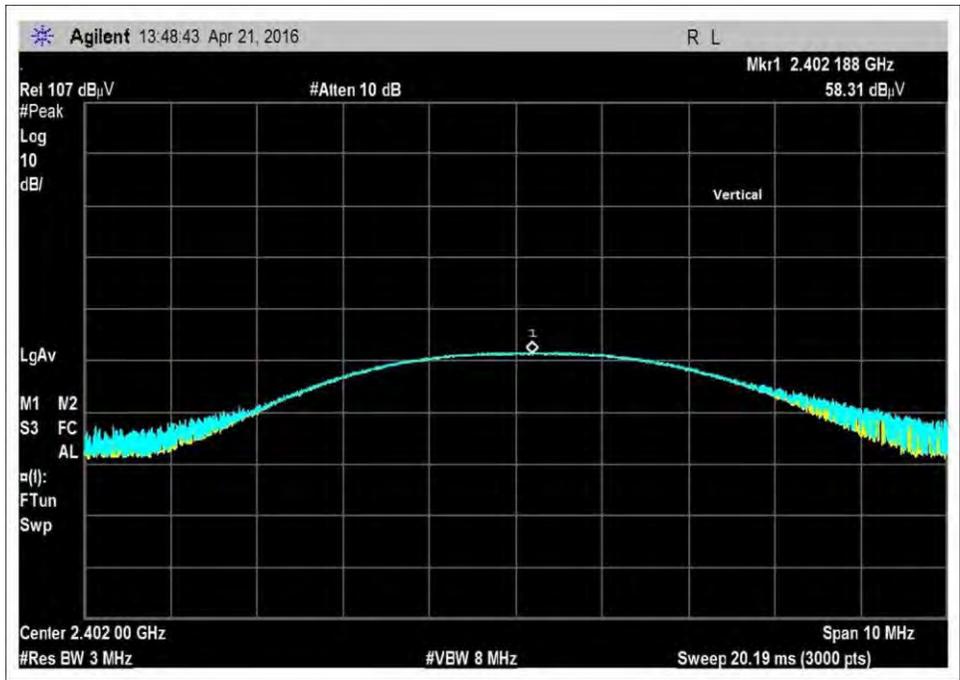


Low Channel, Vertical Polarity

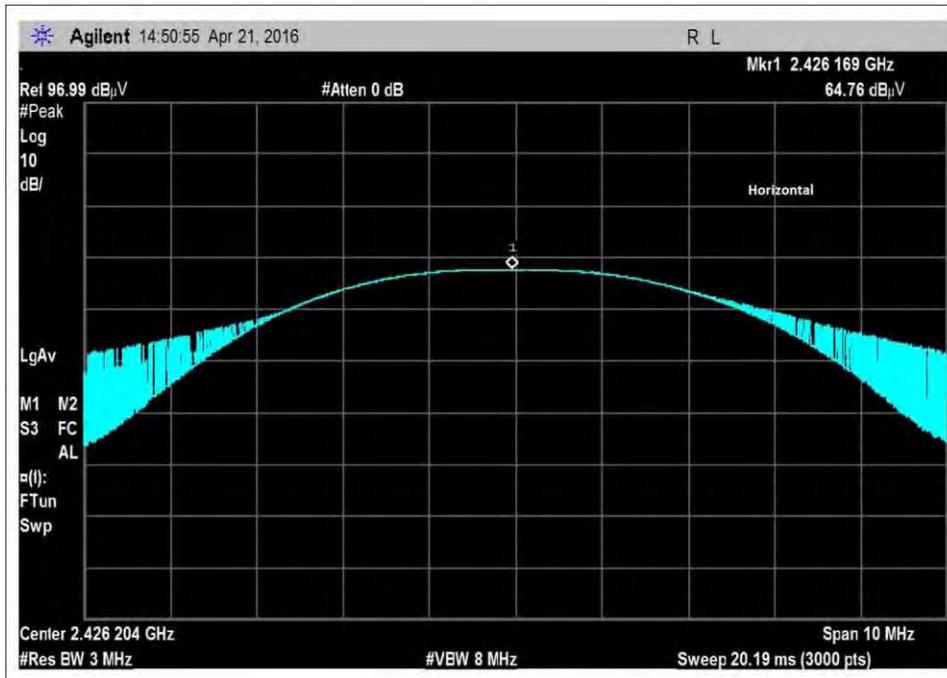


Middle Channel, Horizontal Polarity

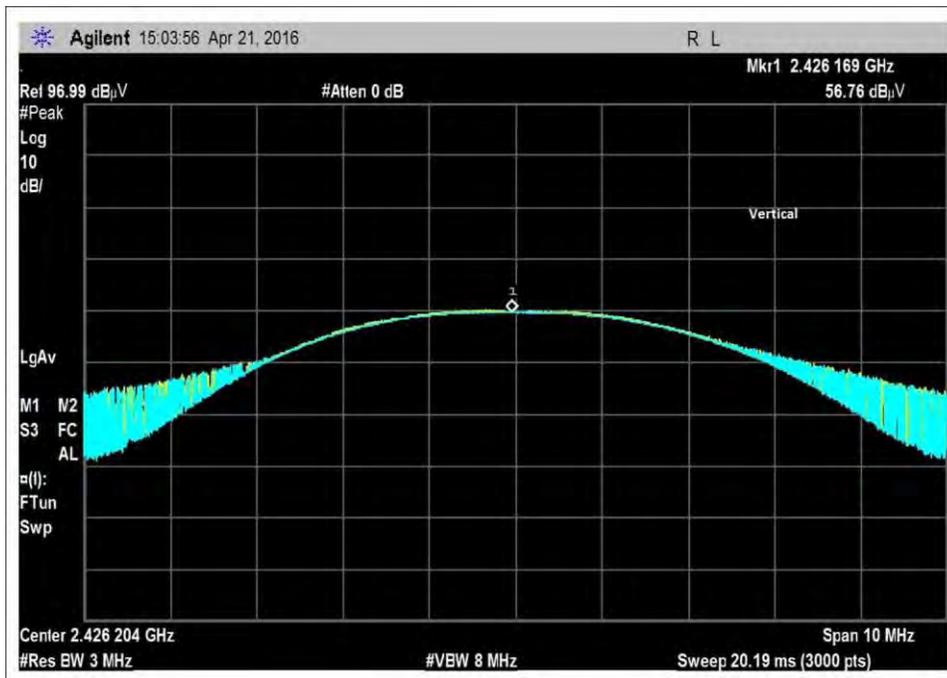

Middle Channel, Vertical Polarity

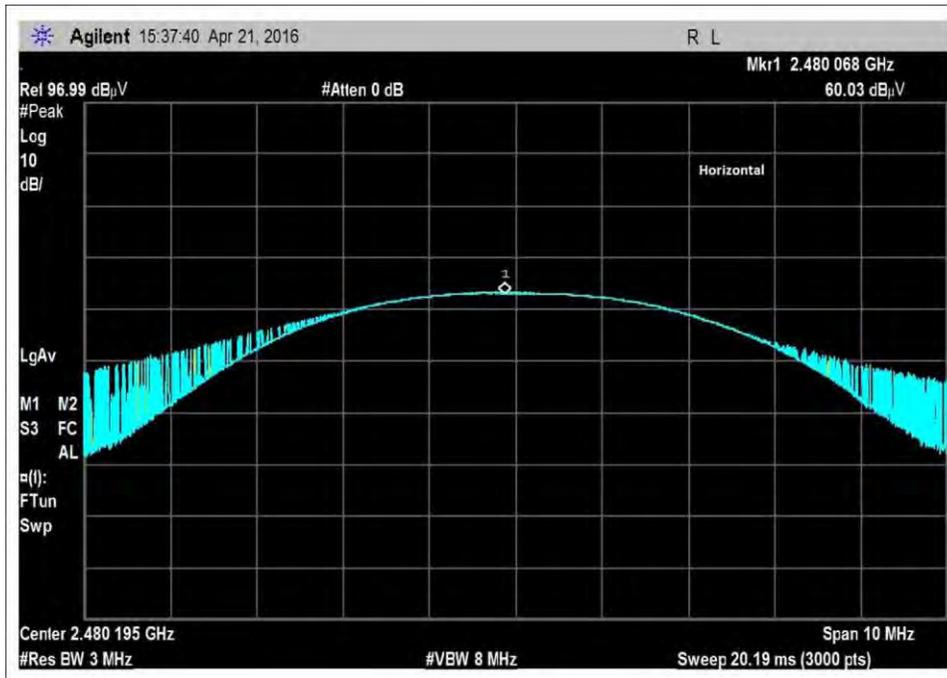

High Channel, Horizontal Polarity

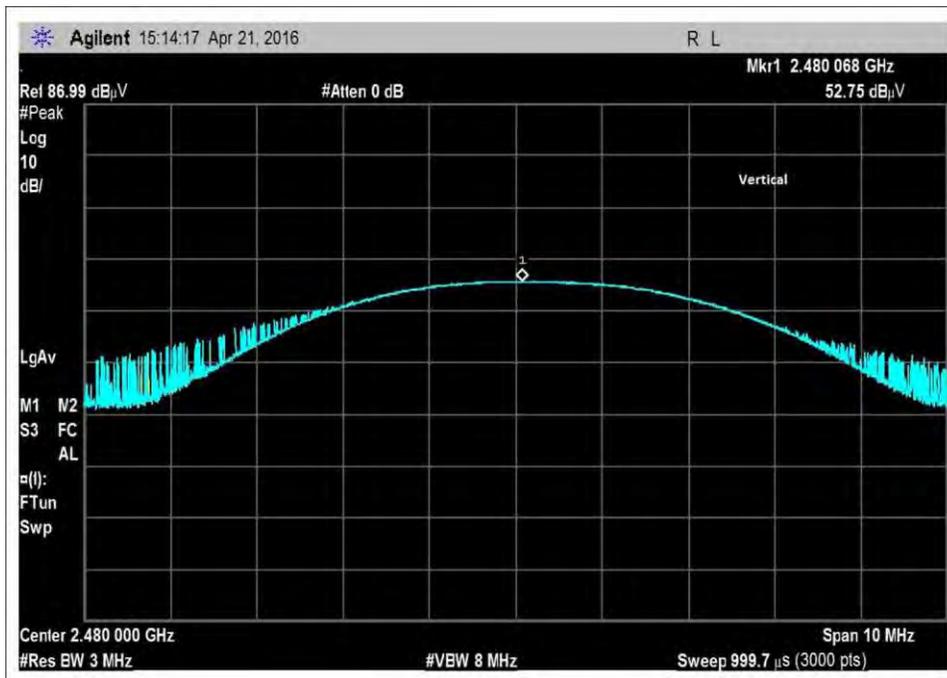

High Channel, Vertical Polarity

**Test Setup Photos**



## 15.247(e) Power Spectral Density

PSD Test Data Summary - Radiated Measurement						
Measurement Method: PKPSD						
Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Field Strength (dBuV/m @3m)	Calculated (dBm/3kHz)	Limit (dBm/3kHz)	Results
2402 Horizontal	GFSK	3.3	80.9	-17.629	≤8	Pass
2402 Vertical	GFSK	3.3	73.4	-25.129	≤8	Pass
2426 Horizontal	GFSK	3.3	80.7	-17.829	≤8	Pass
2426 Vertical	GFSK	3.3	72.6	-25.929	≤8	Pass
2480 Horizontal	GFSK	3.3	75.5	-23.029	≤8	Pass
2480 Vertical	GFSK	3.3	67.7	-30.829	≤8	Pass

Conducted RF output power calculated in accordance with ANSI C63.10.

$$P(W) = \frac{(E \cdot d)^2}{30 G}$$

Or equivalently, in logarithmic form:

$$P(dBm) = E(dBuV/m) + 20LOG(d) - G - 104.77$$

**Test Setup / Conditions / Data**

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **VivaLnk, Inc.**  
 Specification: **15.247(e) Peak Power Spectral Density (2400-2483.5 MHz DTS)**  
 Work Order #: **98267** Date: 4/21/2016  
 Test Type: **Radiated Scan** Time: 15:33:03  
 Tested By: Hieu Song Nguyenpham Sequence#: 49  
 Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 2			


**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Test Conditions / Notes:**

Application: VBLET version 2.5.3  
  
 Temperature: 21.3°C  
 Humidity: 42 %  
 Atmospheric Pressure: 101.9 kPa  
  
 Highest Generating Frequency: 2.48GHz  
 Method: ANSI C 63.10 2013 and KDB 558074 v03r05 section 10.2  
 Transmitting Frequencies: 2402, 2426 and 2480MHz  
 RBW=3kHz  
 VBW=10kHz  
  
 The EUT is placed on a non-conducted table. The device is operated by an internal battery at 3.0VDC. The EUT is set in continuously transmitting as intended.

Vivalink, Inc WO#: 98267 Sequence#: 49 Date: 4/21/2016  
 15.247(e) Peak Power Spectral Density (2400-2483.5 MHz DTS) Test Distance: 3 Meters

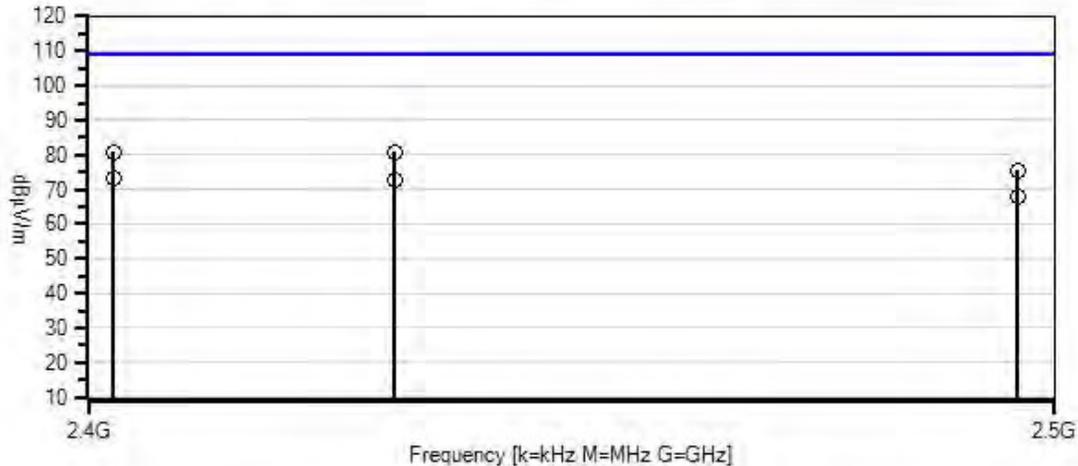

- Readings
- Peak Readings
- × QP Readings
- \* Average Readings
- ▼ Ambient
- Software Version: 5.03.02
- 1 - 15.247(e) Peak Power Spectral Density (2400-2483.5 MHz DTS)

**Test Equipment:**

ID	Asset #/Serial #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN03471	Spectrum Analyzer	E4440A	1/4/2016	1/4/2018


**Measurement Data:**

Reading listed by margin.


Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	2402.137M	51.0	+26.0	+1.3	+2.6	+0.0	80.9	109.2	-28.3	Horiz
2	2426.138M	50.7	+26.1	+1.3	+2.6	+0.0	80.7	109.2	-28.5	Horiz
3	2480.195M	45.3	+26.3	+1.3	+2.6	+0.0	75.5	109.2	-33.7	Horiz
4	2402.137M	43.5	+26.0	+1.3	+2.6	+0.0	73.4	109.2	-35.8	Vert
5	2426.138M	42.6	+26.1	+1.3	+2.6	+0.0	72.6	109.2	-36.6	Vert
6	2480.195M	37.5	+26.3	+1.3	+2.6	+0.0	67.7	109.2	-41.5	Vert


**Plots**

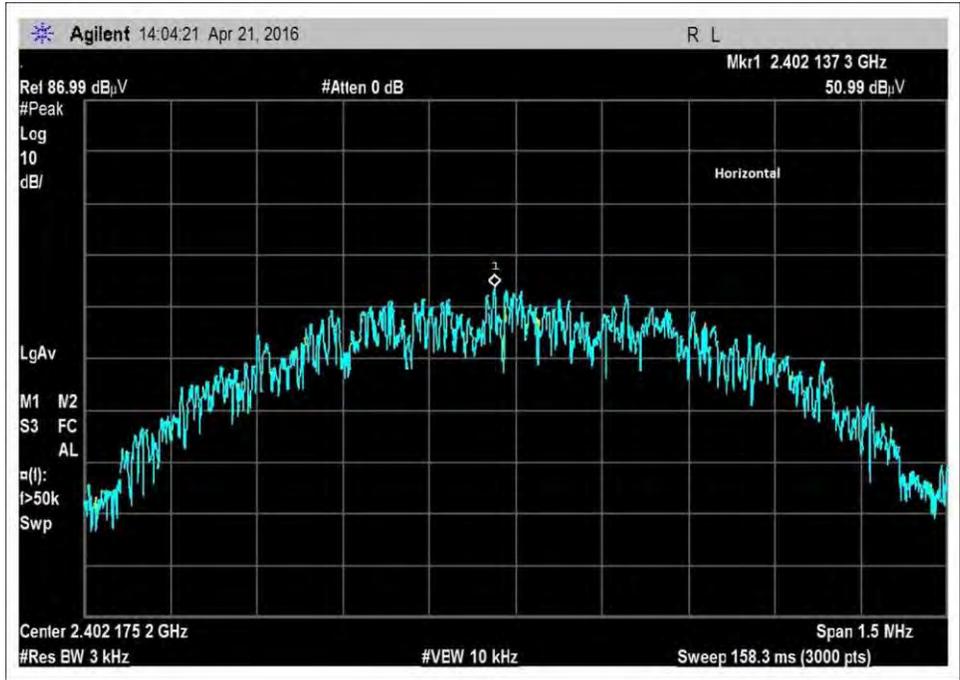


Low Channel, Horizontal Polarity

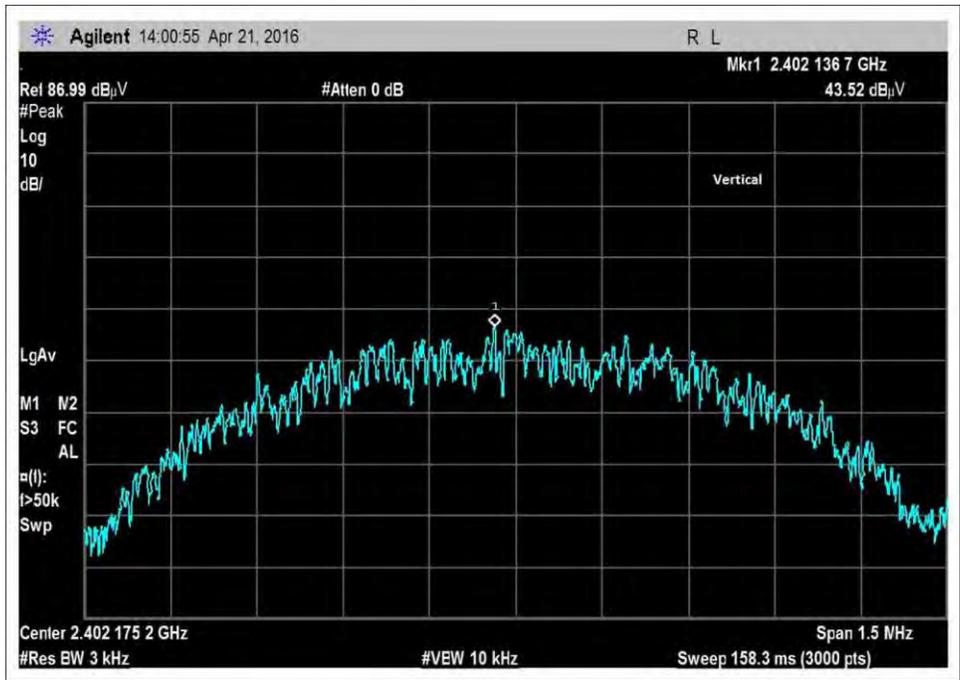


Low Channel, Vertical Polarity

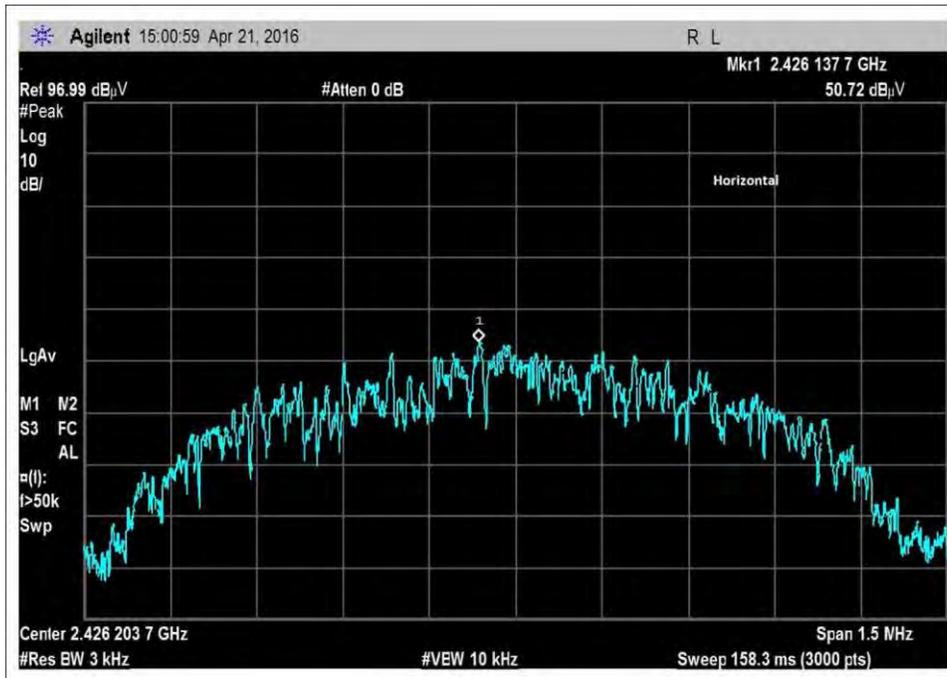


Middle Channel, Horizontal Polarity

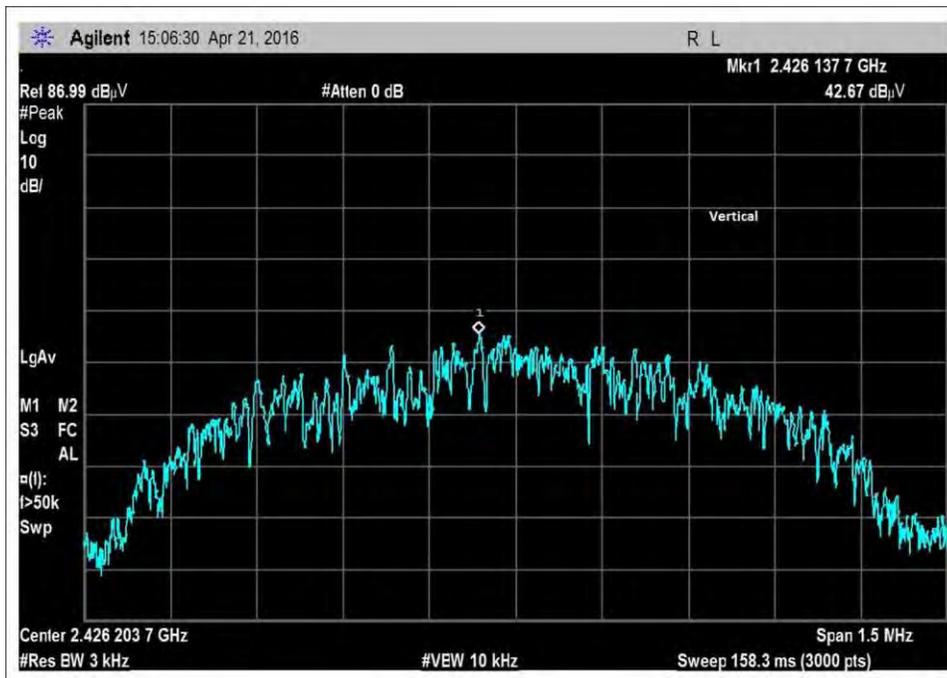

Middle Channel, Vertical Polarity

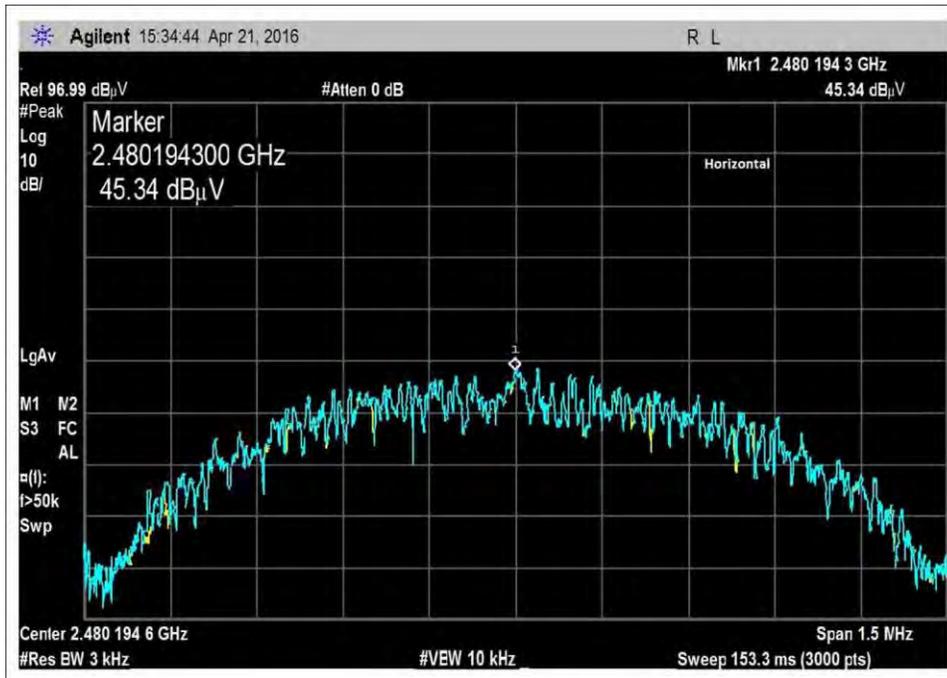


High Channel, Horizontal Polarity

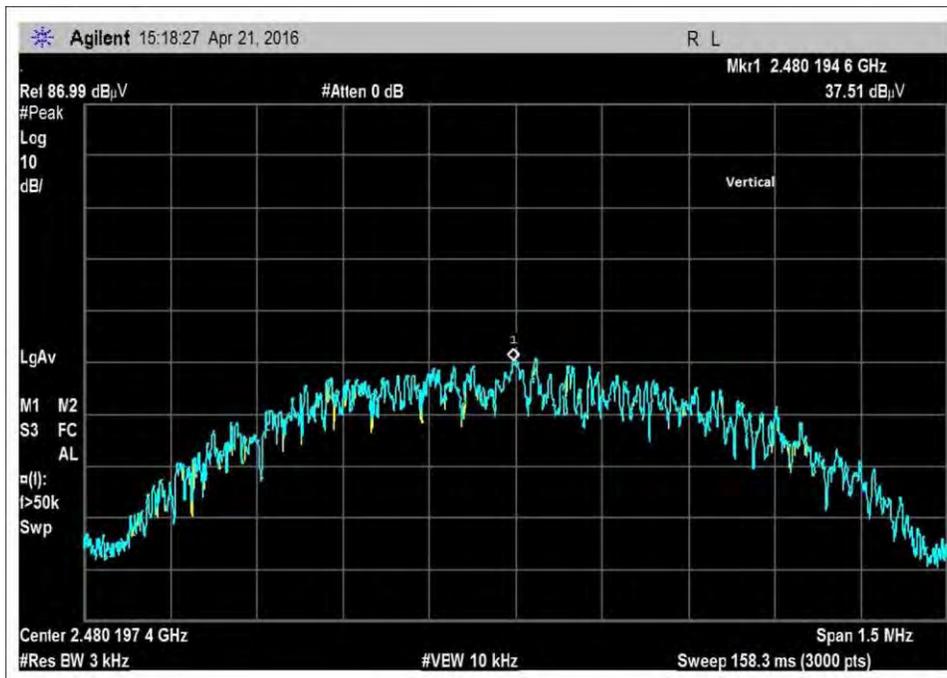

High Channel, Vertical Polarity

**Test Setup Photos**

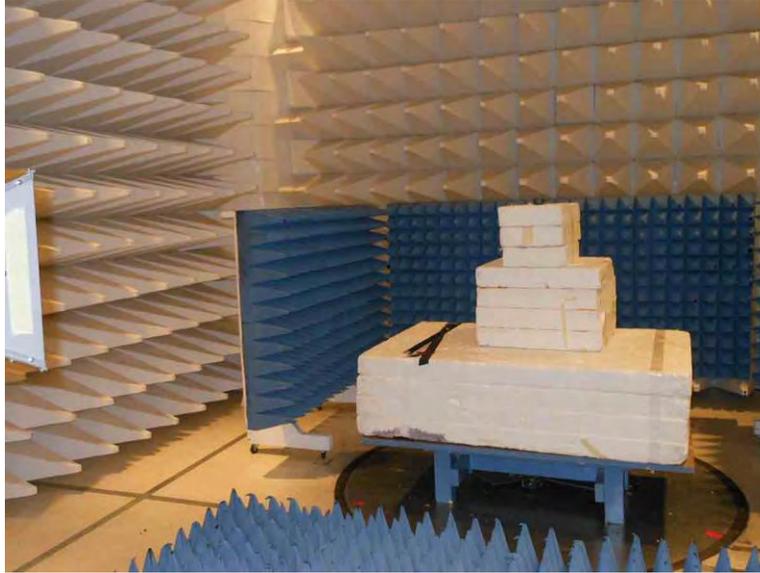

## 15.247(d) Radiated Emissions & Band Edge

### Test Data

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **VivaLnk, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **98267** Date: 4/12/2016  
 Test Type: **Radiated Scan** Time: 19:21:52  
 Tested By: Hieu Song Nguyenpham Sequence#: 41  
 Software: EMITest 5.03.02

#### Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			


#### Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

#### Test Conditions / Notes:

Radiated Spurious Emission  
 Frequency Range: 9kHz to 1000MHz  
  
 Application: VBLET version 2.5.3  
  
 Temperature: 20.3° C  
 Humidity: 45 %  
 Atmospheric Pressure: 101.9 kPa  
  
 Highest Generating Frequency: 2.48GHz  
 Method: ANSI C 63.10 2013  
 Transmitting Frequencies: 2402, 2426 and 2480MHz  
  
 9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz  
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz  
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz  
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz  
  
 The EUT is placed on a non-conducted table. The device is operated by an internal battery at 3.0VDC. The EUT is set in continuously transmitting as intended.  
  
**Low Channel**

Vivalink, Inc WO#: 98267 Sequence#: 41 Date: 4/12/2016  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

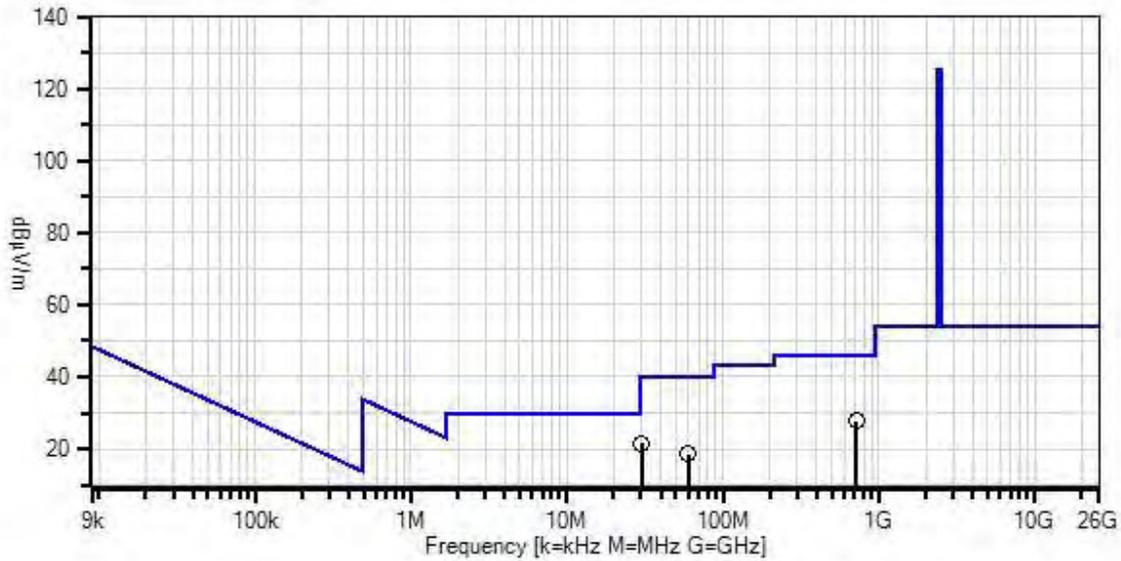

— Readings  
 × QP Readings  
 ▼ Ambient  
 ○ Peak Readings  
 \* Average Readings  
 Software Version: 5.03.02  
 1 - 15.247(d) / 15.209 Radiated Spurious Emissions

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN00852	Biconilog Antenna	CBL 6111C	11/24/2014	11/24/2016
T2	AN00971A	Preamp	8447D	2/5/2016	2/5/2018
	AN00432	Loop Antenna	6502	5/8/2015	5/8/2017
T3	ANP00880	Cable	RG214U	6/13/2014	6/13/2016
T4	ANP01187	Cable	CNT-195	12/30/2014	12/30/2016
T5	ANP06691	Cable	PE3062-180	8/8/2014	8/8/2016
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dBμV	T5				Table	dBμV/m	dBμV/m	dB	Ant
1	718.598M	30.2	+20.8	-28.2	+2.9	+0.7	+0.0	27.6	46.0	-18.4	Horiz
			+1.2								
2	30.337M	30.0	+18.7	-28.0	+0.4	+0.1	+0.0	21.4	40.0	-18.6	Horiz
			+0.2								
3	59.921M	39.5	+6.2	-27.9	+0.6	+0.1	+0.0	18.7	40.0	-21.3	Vert
			+0.2								

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **VivaLnk, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **98267** Date: 4/12/2016  
 Test Type: **Radiated Scan** Time: 10:07:03  
 Tested By: Hieu Song Nguyenpham Sequence#: 14  
 Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Test Conditions / Notes:**

Radiated Spurious Emission  
 Frequency Range: 1000MHz to 25000MHz

Application: VBLET version 2.5.3

Temperature: 20.3° C  
 Humidity: 45 %  
 Atmospheric Pressure: 101.9 kPa


Highest Generating Frequency: 2.48GHz  
 Method: ANSI C 63.10 2013  
 Transmitting Frequencies: 2402, 2426 and 2480MHz

9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz  
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz  
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz  
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz

The EUT is placed on a non-conducted table. The device is operated by an internal battery at 3.0VDC. The EUT is set in continuously transmitting as intended.

**Low Channel**

Vivalink, Inc WO#: 98267 Sequence#: 14 Date: 4/12/2016  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

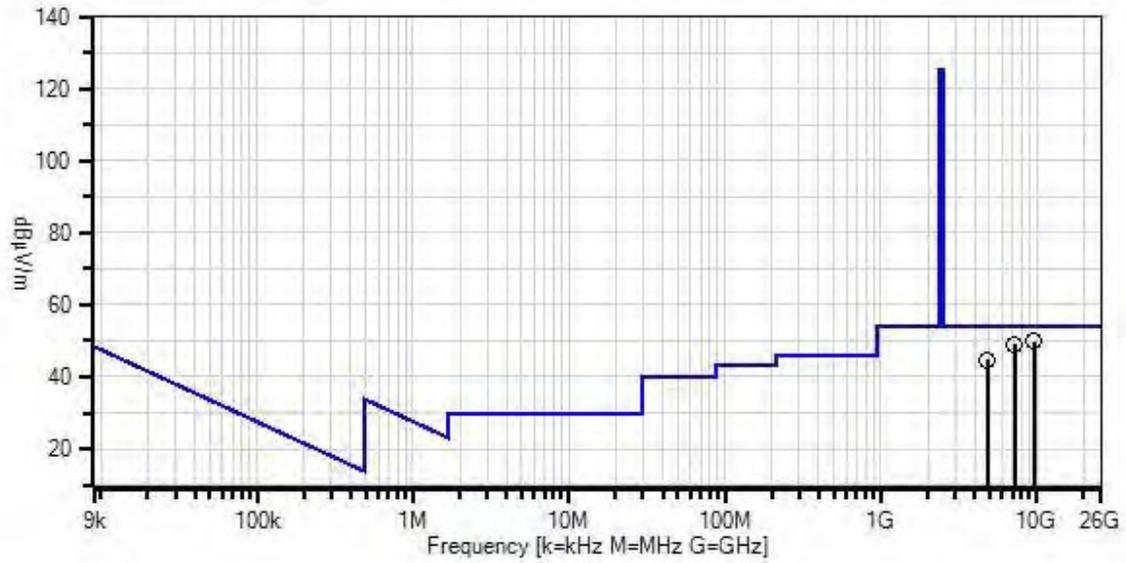

- Readings
  - × QP Readings
  - ▼ Ambient
  - Peak Readings
  - \* Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions
- Software Version: 5.03.02

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017
T4	AN03114	Preamp	AMF-7D-00101800-30-10P	4/22/2015	4/22/2017
	AN02694	Horn Antenna-ANSI C63.5 3m	AMFW-5F-18002650-20-10P	5/7/2015	5/7/2017
	ANP00928	Cable	various	1/25/2016	1/25/2018
	ANP00929	Cable	various	1/25/2016	1/25/2018
	ANP06126	Cable	32022-29094K-29094K-168TC	3/18/2015	3/18/2017
	ANP06138	Cable	32022-29094K-29094K-72TC	3/18/2015	3/18/2017
T5	ANP06900	Cable	32022-29094K-29094K-36TC	12/30/2015	12/30/2017
T6	AN03309	High Pass Filter	11SH10-3000/T10000-O/O	1/18/2016	1/18/2018
	AN02693	Active Horn Antenna-ANSI C63.5 3m	AMFW-5F-12001800-20-10P	5/6/2015	5/6/2017

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 T5 dB	T2 T6 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	9609.603M	62.8	+34.8 +1.1	+2.6 +0.3	+5.4	-57.2	+0.0	49.8	54.0	-4.2	Vert
2	7207.203M	64.8	+34.1 +1.0	+2.2 +0.3	+5.0	-58.3	+0.0	49.1	54.0	-4.9	Vert
3	4803.802M	65.1	+30.8 +0.8	+1.8 +0.3	+3.8	-57.8	+0.0	44.8	54.0	-9.2	Horiz

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **VivaLnk, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **98267** Date: 4/12/2016  
 Test Type: **Radiated Scan** Time: 19:41:14  
 Tested By: Hieu Song Nguyenpham Sequence#: 44  
 Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Test Conditions / Notes:**

Radiated Spurious Emission  
 Frequency Range: 9kHz to 1000MHz

Application: VBLET version 2.5.3

Temperature: 20.3°C  
 Humidity: 45 %  
 Atmospheric Pressure: 101.9 kPa


Highest Generating Frequency: 2.48GHz  
 Method: ANSI C 63.10 2013  
 Transmitting Frequencies: 2402, 2426 and 2480MHz

9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz  
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz  
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz  
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz

The EUT is placed on a non-conducted table. The device is operated by an internal battery at 3.0VDC. The EUT is set in continuously transmitting as intended.

**Middle Channel**

Vivalink, Inc WO#: 98267 Sequence#: 44 Date: 4/12/2016  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

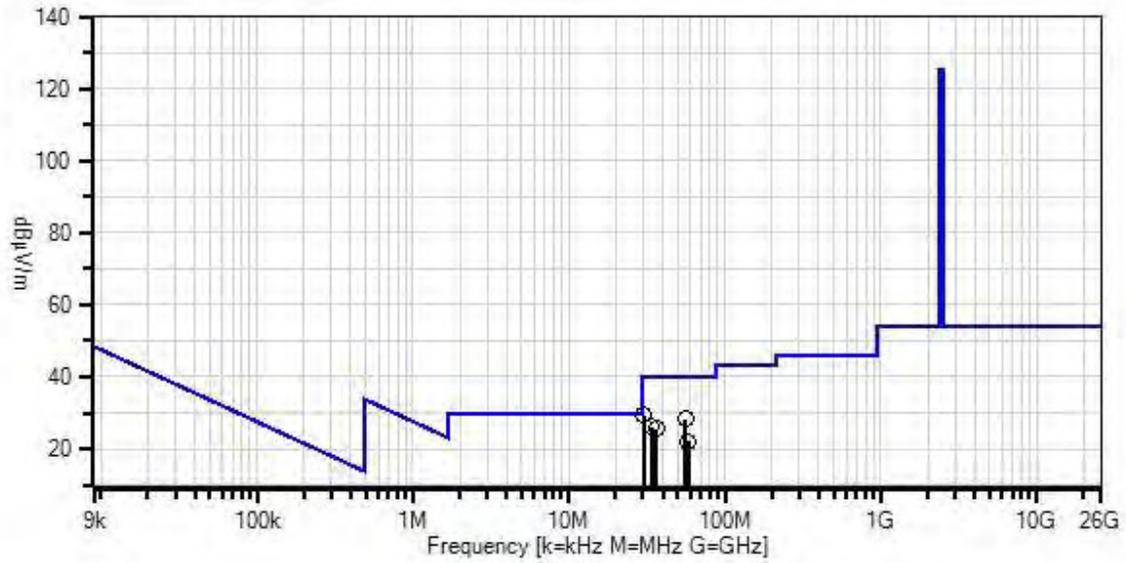

- Readings
  - × QP Readings
  - ▼ Ambient
  - Peak Readings
  - \* Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions
- Software Version: 5.03.02

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN00852	Biconilog Antenna	CBL 6111C	11/24/2014	11/24/2016
T2	AN00971A	Preamp	8447D	2/5/2016	2/5/2018
	AN00432	Loop Antenna	6502	5/8/2015	5/8/2017
T3	ANP00880	Cable	RG214U	6/13/2014	6/13/2016
T4	ANP01187	Cable	CNT-195	12/30/2014	12/30/2016
T5	ANP06691	Cable	PE3062-180	8/8/2014	8/8/2016
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 T5 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	30.253M	37.9	+18.8 +0.2	-28.0	+0.4	+0.1	+0.0	29.4	40.0	-10.6	Horiz
2	55.760M	47.9	+7.4 +0.2	-27.9	+0.6	+0.1	+0.0	28.3	40.0	-11.7	Horiz
3	33.788M	36.2	+17.0 +0.2	-28.0	+0.5	+0.1	+0.0	26.0	40.0	-14.0	Horiz
4	36.271M	36.9	+15.8 +0.2	-28.0	+0.5	+0.1	+0.0	25.5	40.0	-14.5	Horiz
5	58.460M	42.5	+6.6 +0.2	-27.9	+0.6	+0.1	+0.0	22.1	40.0	-17.9	Horiz

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **VivaLnk, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **98267** Date: 4/12/2016  
 Test Type: **Radiated Scan** Time: 10:28:15  
 Tested By: Hieu Song Nguyenpham Sequence#: 17  
 Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Support Equipment:**


Device	Manufacturer	Model #	S/N
Configuration 2			

**Test Conditions / Notes:**

Radiated Spurious Emission  
 Frequency Range: 1000MHz to 25000MHz  
 Application: VBLET version 2.5.3  
 Temperature: 20.3° C  
 Humidity: 45 %  
 Atmospheric Pressure: 101.9 kPa  
 Highest Generating Frequency: 2.48GHz  
 Method: ANSI C 63.10 2013  
 Transmitting Frequencies: 2402, 2426 and 2480MHz  
 9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz  
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz  
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz  
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz  
 The EUT is placed on a non-conducted table. The device is operated by an internal battery at 3.0VDC. The EUT is set in continuously transmitting as intended.

**Middle Channel**

Vivalnk, Inc WO#: 98267 Sequence#: 17 Date: 4/12/2016  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

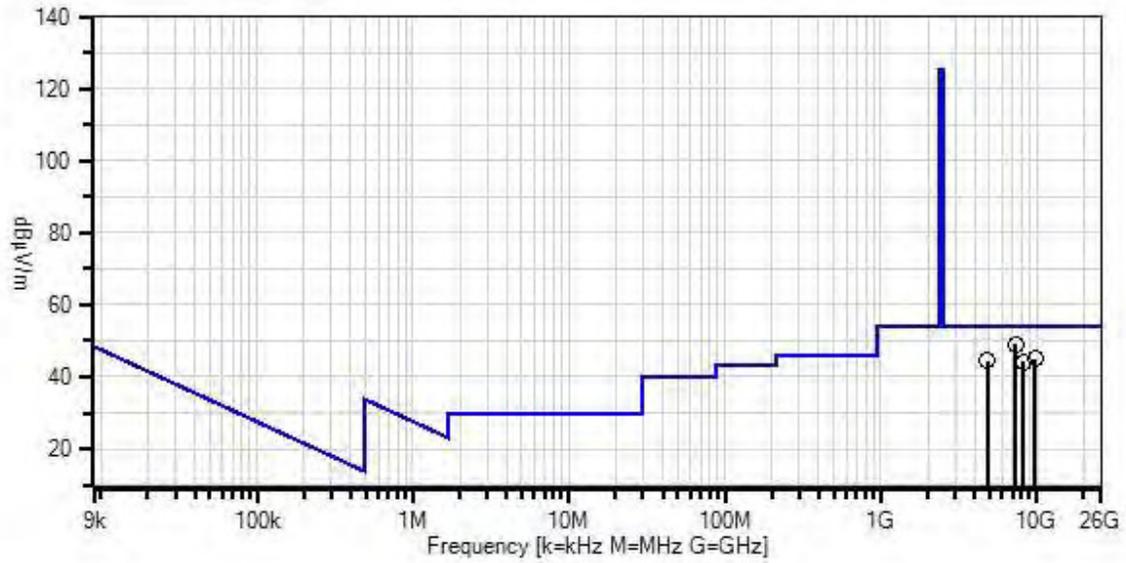

- Readings
  - × QP Readings
  - ▼ Ambient
  - Peak Readings
  - \* Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions
- Software Version: 5.03.02

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017
T4	AN03114	Preamp	AMF-7D-00101800-30-10P	4/22/2015	4/22/2017
	AN02694	Horn Antenna-ANSI C63.5 3m	AMFW-5F-18002650-20-10P	5/7/2015	5/7/2017
	ANP00928	Cable	various	1/25/2016	1/25/2018
	ANP00929	Cable	various	1/25/2016	1/25/2018
	ANP06126	Cable	32022-29094K-29094K-168TC	3/18/2015	3/18/2017
	ANP06138	Cable	32022-29094K-29094K-72TC	3/18/2015	3/18/2017
T5	ANP06900	Cable	32022-29094K-29094K-36TC	12/30/2015	12/30/2017
T6	AN03309	High Pass Filter	11SH10-3000/T10000-O/O	1/18/2016	1/18/2018
	AN02693	Active Horn Antenna-ANSI C63.5 3m	AMFW-5F-12001800-20-10P	5/6/2015	5/6/2017

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	7277.435M	64.6	+34.2 +1.0	+2.3 +0.3	+5.0	-58.3	+0.0	49.1	54.0	-4.9	Horiz
2	9704.889M	58.2	+34.9 +1.1	+2.6 +0.3	+5.5	-57.5	+0.0	45.1	54.0	-8.9	Vert
3	4852.444M	64.6	+30.9 +0.8	+1.8 +0.3	+3.8	-57.7	+0.0	44.5	54.0	-9.5	Horiz
4	8204.445M	56.4	+35.7 +1.0	+2.4 +0.3	+5.2	-56.8	+0.0	44.2	54.0	-9.8	Vert

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **VivaLnk, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **98267** Date: 4/12/2016  
 Test Type: **Radiated Scan** Time: 20:08:27  
 Tested By: Hieu Song Nguyenpham Sequence#: 47  
 Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 2			


**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Test Conditions / Notes:**

Radiated Spurious Emission  
 Frequency Range: 9kHz to 1000MHz  
 Application: VBLET version 2.5.3  
 Temperature: 20.3° C  
 Humidity: 45 %  
 Atmospheric Pressure: 101.9 kPa  
 Highest Generating Frequency: 2.48GHz  
 Method: ANSI C 63.10 2013  
 Transmitting Frequencies: 2402, 2426 and 2480MHz  
 9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz  
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz  
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz  
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz  
 The EUT is placed on a non-conducted table. The device is operated by an internal battery at 3.0VDC. The EUT is set in continuously transmitting as intended.  
**High Channel**

Vivalink, Inc WO#: 98267 Sequence#: 47 Date: 4/12/2016  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

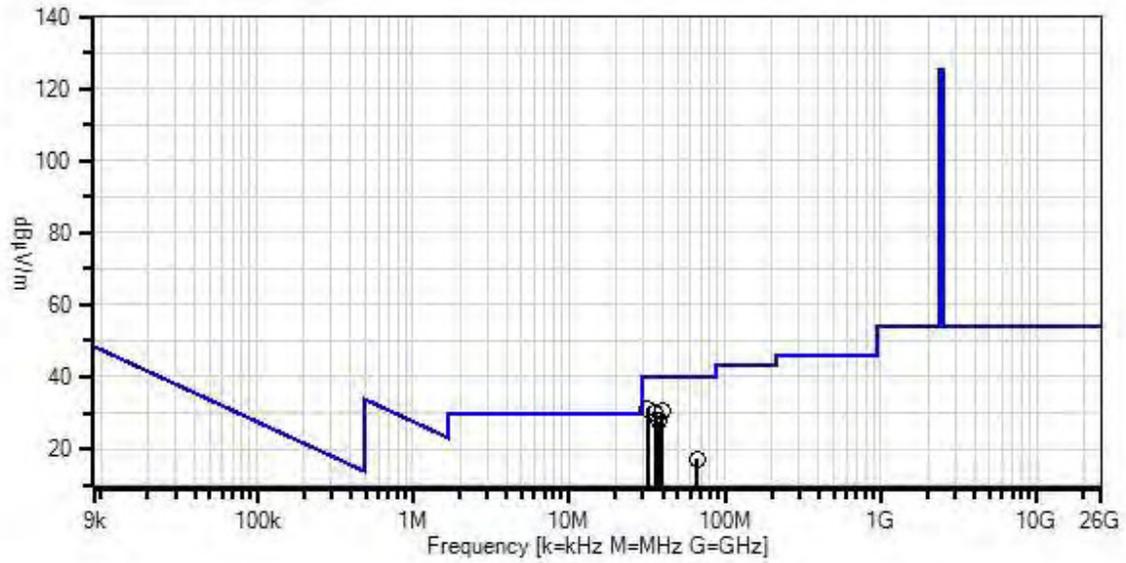

- Readings
  - × QP Readings
  - ▼ Ambient
  - Peak Readings
  - \* Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions
- Software Version: 5.03.02

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN00852	Biconilog Antenna	CBL 6111C	11/24/2014	11/24/2016
T2	AN00971A	Preamp	8447D	2/5/2016	2/5/2018
	AN00432	Loop Antenna	6502	5/8/2015	5/8/2017
T3	ANP00880	Cable	RG214U	6/13/2014	6/13/2016
T4	ANP01187	Cable	CNT-195	12/30/2014	12/30/2016
T5	ANP06691	Cable	PE3062-180	8/8/2014	8/8/2016
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB $\mu$ V	dB	dB	dB	dB	Table	dB $\mu$ V/m	dB $\mu$ V/m	dB	Ant
1	31.810M	40.4	+18.0 +0.2	-28.0	+0.5	+0.1	+0.0	31.2	40.0	-8.8	Horiz
2	39.950M	43.8	+13.7 +0.2	-28.0	+0.5	+0.1	+0.0	30.3	40.0	-9.7	Horiz
3	35.723M	41.2	+16.1 +0.2	-28.0	+0.5	+0.1	+0.0	30.1	40.0	-9.9	Horiz
4	37.575M	40.0	+15.0 +0.2	-28.0	+0.5	+0.1	+0.0	27.8	40.0	-12.2	Horiz
5	66.150M	38.0	+6.2 +0.2	-27.9	+0.7	+0.1	+0.0	17.3	40.0	-22.7	Horiz

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **VivaLnk, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **98267** Date: 4/12/2016  
 Test Type: **Radiated Scan** Time: 10:45:10  
 Tested By: Hieu Song Nguyenpham Sequence#: 20  
 Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 2			


**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Test Conditions / Notes:**

Radiated Spurious Emission  
 Frequency Range: 1000MHz to 25000MHz  
 Application: VBLET version 2.5.3  
 Temperature: 20.3° C  
 Humidity: 45 %  
 Atmospheric Pressure: 101.9 kPa  
 Highest Generating Frequency: 2.48GHz  
 Method: ANSI C 63.10 2013  
 Transmitting Frequencies: 2402, 2426 and 2480MHz  
 9 kHz -150 kHz; RBW=200 Hz,VBW=200 Hz  
 150 kHz-30 MHz; RBW=9 kHz,VBW=9 kHz  
 30 MHz-1000 MHz; RBW=120 kHz,VBW=120 kHz  
 1000 MHz-25000MHz; RBW=1 MHz,VBW=1 MHz  
 The EUT is placed on a non-conducted table. The device is operated by an internal battery at 3.0VDC. The EUT is set in continuously transmitting as intended.  
**High Channel**

Vivalnk, Inc WO#: 98267 Sequence#: 20 Date: 4/12/2016  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters

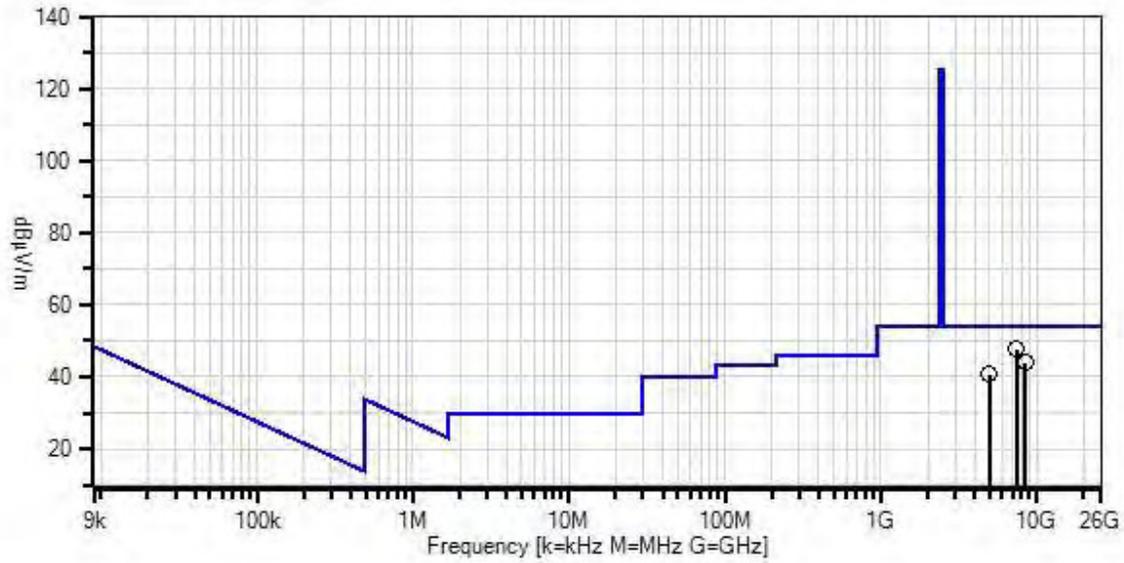

- Readings
  - × QP Readings
  - ▼ Ambient
  - Peak Readings
  - \* Average Readings
- 1 - 15.247(d) / 15.209 Radiated Spurious Emissions
- Software Version: 5.03.02

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN02660	Spectrum Analyzer	E4446A	7/9/2015	7/9/2017
T4	AN03114	Preamp	AMF-7D-00101800-30-10P	4/22/2015	4/22/2017
	AN02694	Horn Antenna-ANSI C63.5 3m	AMFW-5F-18002650-20-10P	5/7/2015	5/7/2017
	ANP00928	Cable	various	1/25/2016	1/25/2018
	ANP00929	Cable	various	1/25/2016	1/25/2018
	ANP06126	Cable	32022-29094K-29094K-168TC	3/18/2015	3/18/2017
	ANP06138	Cable	32022-29094K-29094K-72TC	3/18/2015	3/18/2017
T5	ANP06900	Cable	32022-29094K-29094K-36TC	12/30/2015	12/30/2017
T6	AN03309	High Pass Filter	11SH10-3000/T10000-O/O	1/18/2016	1/18/2018
	AN02693	Active Horn Antenna-ANSI C63.5 3m	AMFW-5F-12001800-20-10P	5/6/2015	5/6/2017

**Measurement Data:**

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB $\mu$ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB $\mu$ V/m	Spec dB $\mu$ V/m	Margin dB	Polar Ant
1	7441.463M	62.8	+34.4 +1.0	+2.3 +0.3	+5.1	-58.2	+0.0	47.7	54.0	-6.3	Vert
2	8488.796M	55.2	+36.1 +1.0	+2.4 +0.3	+5.2	-56.3	+0.0	43.9	54.0	-10.1	Vert
3	4960.491M	60.2	+31.1 +0.8	+1.8 +0.3	+3.8	-57.3	+0.0	40.7	54.0	-13.3	Horiz

**Band Edge**

**Band Edge Summary**

Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
2390.0	GFSK	3.3	43.1	<54	Pass
2483.5	GFSK	3.3	43.9	<54	Pass

**Band Edge Test Setup / Conditions / Data**

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place • Fremont, CA 94539 • (510) 249-1170  
 Customer: **VivaLnk Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **98267** Date: 4/21/2016  
 Test Type: **Radiated Scan** Time: 15:35:05  
 Tested By: Hieu Song Nguyenpham Sequence#: 48  
 Software: EMITest 5.03.02

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 2			

**Test Conditions / Notes:**

Band Edge  
 Application: VBLET version 2.5.3  
 Temperature: 21.3° C  
 Humidity: 42 %  
 Atmospheric Pressure: 101.9 kPa  
 Highest Generating Frequency: 2.48GHz  
 Method: ANSI C 63.10 2013  
 Transmitting Frequencies: 2402, 2426 and 2480MHz  
 The EUT is placed on a non-conducted table. The device is operated by an internal battery at 3.0VDC. The EUT is set in continuously transmitting as intended.

Vivalink WO#: 98267 Sequence#: 48 Date: 4/21/2016  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters



— Readings  
 × QP Readings  
 ▼ Ambient  
 ○ Peak Readings  
 \* Average Readings  
 Software Version: 5.03.02

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02113	Horn Antenna	3115	2/3/2015	2/3/2017
T2	AN03302	Cable	32026-29094K-29094K-72TC	1/29/2016	1/29/2018
T3	ANP01210	Cable	FSJ1P-50A-4A	1/15/2015	1/15/2017
	AN03471	Spectrum Analyzer	E4440A	1/4/2016	1/4/2018



**Measurement Data:**



Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dBμV	T1 dB	T2 dB	T3 dB	Dist Table	Corr dBμV/m	Spec dBμV/m	Margin dB	Polar Ant
1	2402.188M	65.5	+26.0	+1.3	+2.6	+0.0	95.4	125.2	-29.8	Horiz
2	2426.169M	64.8	+26.1	+1.3	+2.6	+0.0	94.8	125.2	-30.4	Horiz
3	2480.068M	60.0	+26.3	+1.3	+2.6	+0.0	90.2	125.2	-35.0	Horiz
4	2402.188M	58.4	+26.0	+1.3	+2.6	+0.0	88.3	125.2	-36.9	Vert
5	2426.169M	56.7	+26.1	+1.3	+2.6	+0.0	86.7	125.2	-38.5	Vert
6	2480.068M	52.8	+26.3	+1.3	+2.6	+0.0	83.0	125.2	-42.2	Vert

## Band Edge Plots

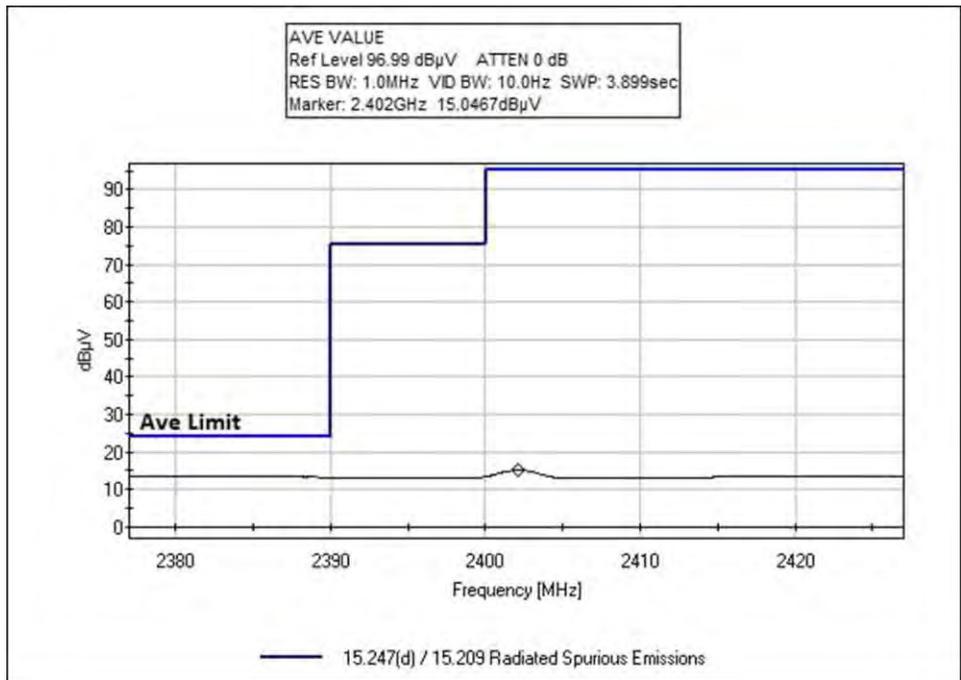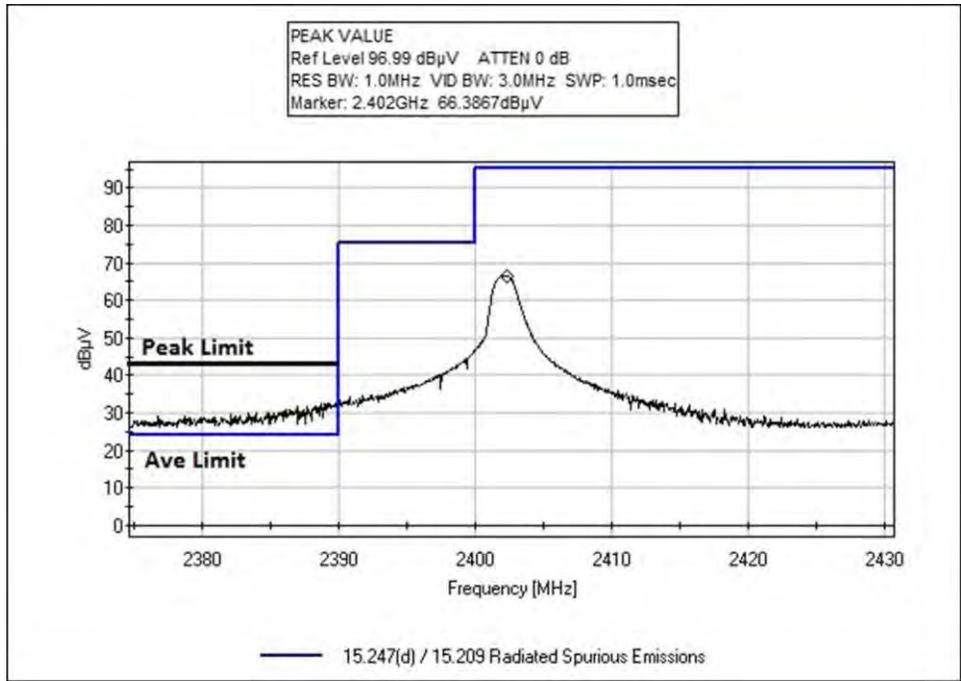

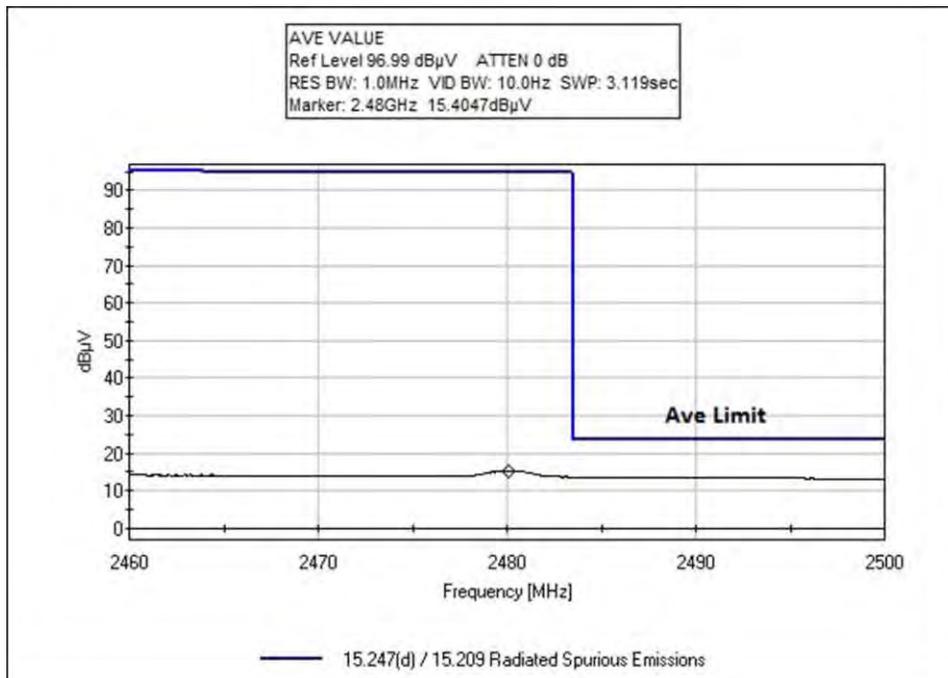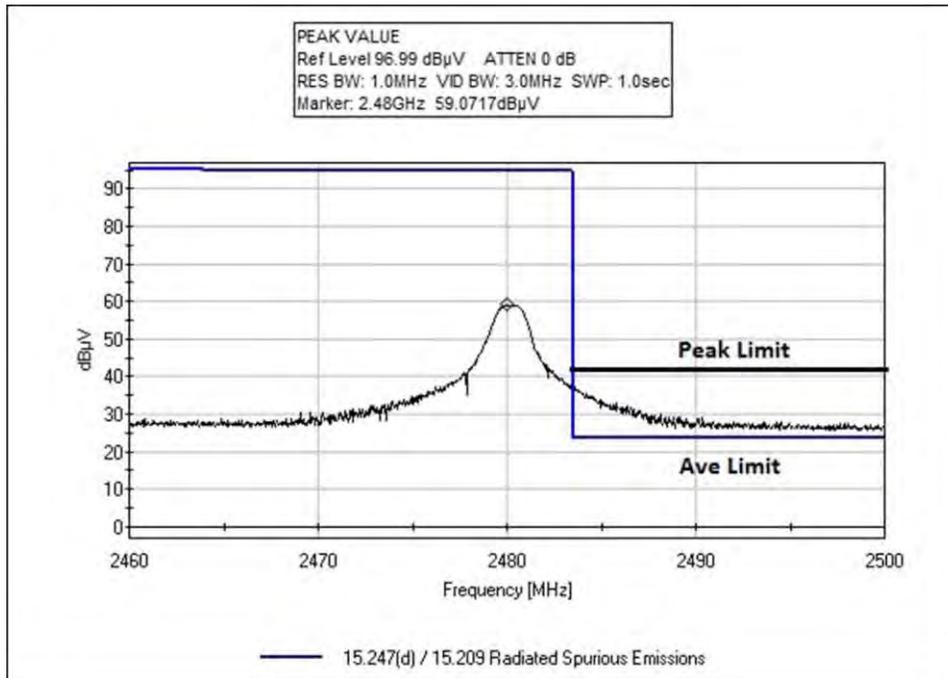


**Test Setup Photos**




9kHz – 30MHz




9kHz – 30MHz

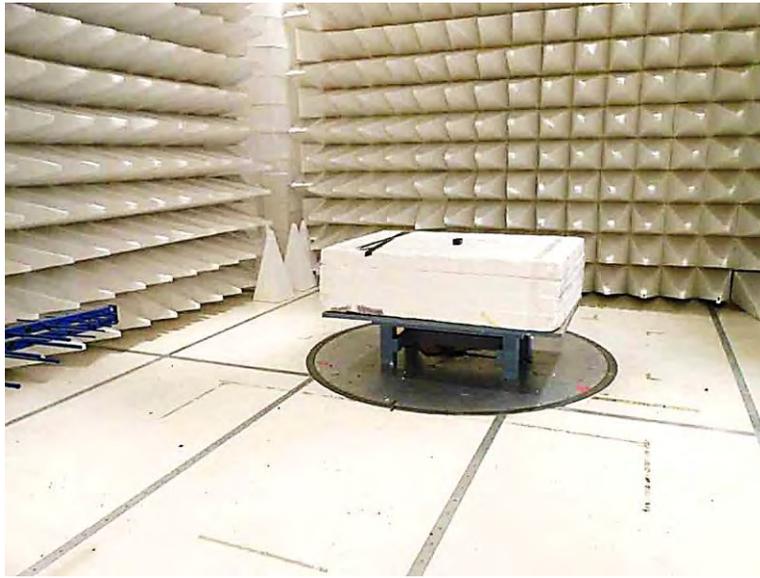

30MHz -1GHz

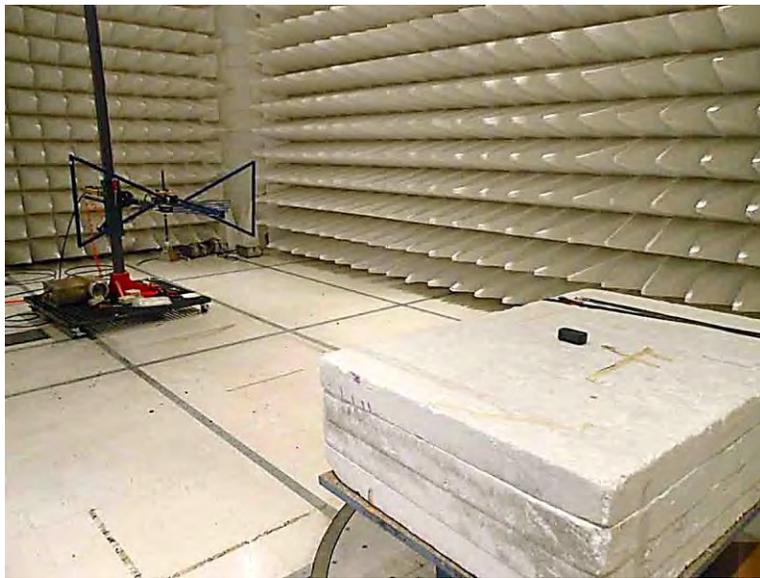


30MHz - 1GHz

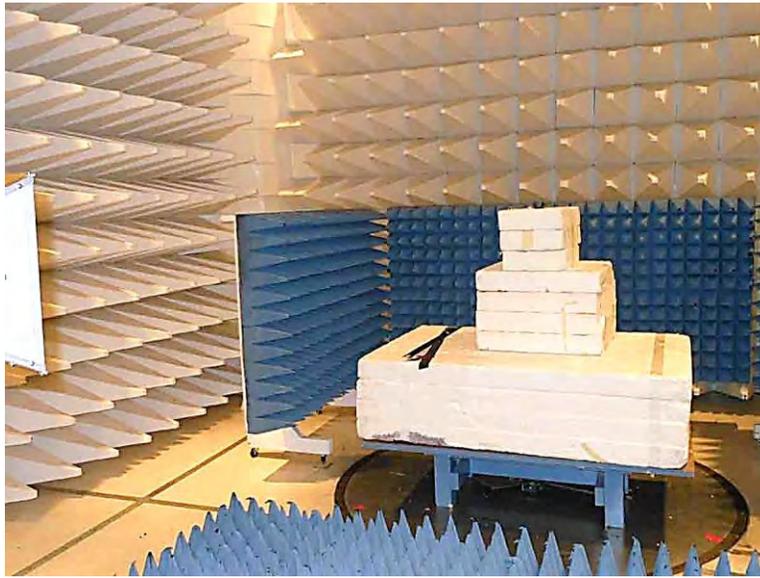

1 – 12GHz



1 – 12GHz

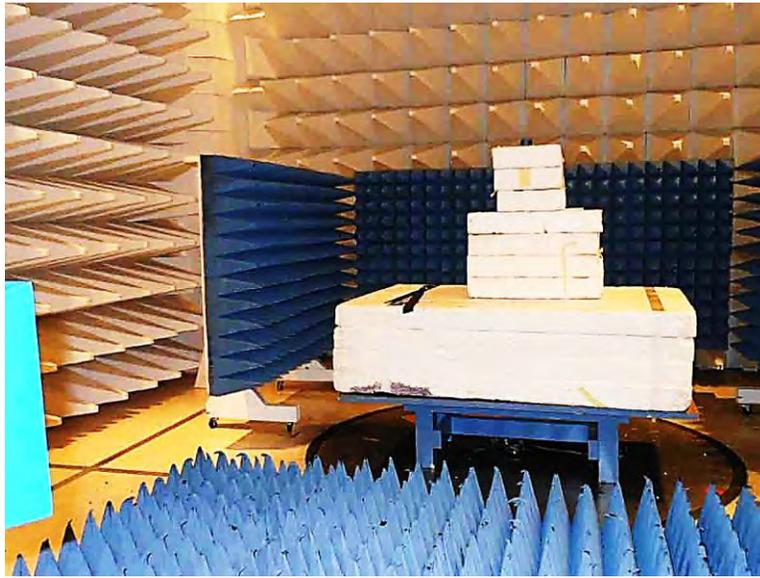

12 – 25GHz



12 – 25GHz

# SUPPLEMENTAL INFORMATION

## Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

## Emissions Test Details

**TESTING PARAMETERS**

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

**CORRECTION FACTORS**

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dBμV/m, the spectrum analyzer reading in dBμV was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on the limit value subtracting the corrected measured value; a negative margin represents a measurement less than the limit while a positive margin represents a measurement exceeding the limit.

SAMPLE CALCULATIONS		
	Meter reading	(dBμV)
+	Antenna Factor	(dB/m)
+	Cable Loss	(dB)
-	Distance Correction	(dB)
-	Preamplifier Gain	(dB)
=	Corrected Reading	(dBμV/m)

**TEST INSTRUMENTATION AND ANALYZER SETTINGS**

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

<b>MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE</b>			
<b>TEST</b>	<b>BEGINNING FREQUENCY</b>	<b>ENDING FREQUENCY</b>	<b>BANDWIDTH SETTING</b>
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

**SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS**

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

**Peak**

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

**Quasi-Peak**

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

**Average**

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.