



America

**Choose certainty.
Add value.**

Report On

Radio Frequency Exposure Evaluation of the
Piper Networks, Inc.
Piper Sensor

EN 62311 January 2008
Title 47 Subpart J §2.1091 and KDB 447498 D01

Report No. SD72120112-0916D

February 2017



REPORT ON Radio Frequency Exposure Testing of the
Piper Networks, Inc.
Piper Sensor

TEST REPORT NUMBER SD72120112-0916D

PREPARED FOR Piper Networks, Inc.
3655 Nobel Drive, Suite 120
San Diego, CA 92122

CONTACT PERSON Robert Hanczor
619-248-2002
robert@pipernetworks.com

A handwritten signature in black ink, appearing to read 'Nikolay Shtin', written over a horizontal line.

PREPARED BY Nikolay Shtin
Name
Authorized Signatory
Title: EMC/Wireless Test Engineer

A handwritten signature in blue ink, appearing to read 'Ferdinand S. Custodio', written over a horizontal line.

APPROVED BY Ferdinand S. Custodio
Name
Authorized Signatory
Title: EMC/Senior Wireless Test Engineer

DATED February 23, 2017



Revision History

SD72120112-0916D Piper Networks, Inc. Piper Sensor SG1001					
DATE	OLD REVISION	NEW REVISION	REASON	PAGES AFFECTED	APPROVED BY
02/23/17	Initial Release				Ferdinand S. Custodio



CONTENTS

Section	Page No
1	REPORT SUMMARY 5
1.1	Introduction 6
1.2	Brief Summary of Results 7
1.3	Product Information 8
1.4	General RF Exposure Policies for Equipment Authorization (Title 47 Subpart J §2.1091 and KDB 447498 D01)..... 10
1.5	Deviations from the Standard..... 13
1.6	Modification Record 13
1.7	test methodology..... 13
1.8	Test Facility Location..... 13
1.9	Test Facility Registration 13
2	TEST DETAILS 15
2.1	Generic Procedure for assessment of equipment 16
2.2	Exposure from sources with multiple frequencies 20
3	ACCREDITATION, DISCLAIMERS AND COPYRIGHT 23
3.1	Accreditation, Disclaimers and Copyright..... 24



SECTION 1

REPORT SUMMARY

Radio Frequency Exposure Testing of the
Piper Networks, Inc.
SG1001



1.1 INTRODUCTION

The information contained in this report is intended to show verification of the Piper Networks, Inc. Piper Sensor to the requirements of EN 62311 January 2008, Title 47 Subpart J §2.1091 and KDB 447498 D01.

Objective	To verify compliance of the Equipment Under Test (EUT) with regards to radio frequency exposure hazard as defined under the test specification (EN 62311 January 2008).
Manufacturer	Piper Networks, Inc.
Model Number(s)	SG1001
FCC ID	2AIK7-SG1001
Number of Samples Tested	1
Test Specification/Issue/Date	<ul style="list-style-type: none">• EN 62311 January 2008 Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz - 300 GHz)• FCC Part 2 Subchapter J §2.1091 (October 1, 2016).• KDB 447498 D01 General RF Exposure Guidance v05r02 October 23, 2015 (RF Exposure Procedures and Equipment Authorization Policies for Mobile and Portable Devices)
Name of Engineer(s)	Nikolay Shtin
Related Document(s)	<ul style="list-style-type: none">• FCC Part 1 Subchapter I §1.1310 (October 1, 2016).• SD72120112-0916B Piper Networks FCC Part 15.247 WLAN Test Report (February 2017). Issued by TÜV SÜD America, San Diego.• SD72120112-0916A Piper Networks FCC IC Part 15.247 BT LE Test Report (February 2017). Issued by TÜV SÜD America, San Diego.• EN 62311 January 2008. Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz – 300 GHz) (IEC 62311:2007, modified)• ICNIRP guidelines for limiting exposure to time-varying electric, magnetic and electromagnetic fields (up to 300 GHz) as published in: Health Physics 74(4):494-522;1998.



1.2 BRIEF SUMMARY OF RESULTS

A brief summary of the tests carried out in accordance with EN 62311 January 2008 and Title 47 Subpart J §2.1091 and KDB 447498 D01 is shown below.

Section	Spec Clause	Test Description	Result	Comments/Base Standard
2.1	7.2	Generic Procedure for assessment of equipment	Compliant	EN 62311 January 2008 (methods) and Title 47 Subpart J §2.1091 and KDB 447498 D01
2.2	-	Exposure from sources with multiple frequencies	Compliant	Title 47 Subpart J §2.1091 and KDB 447498 D01

1.3 PRODUCT INFORMATION

1.3.1 EUT General Description

The Equipment Under Test (EUT) was a Piper Networks, Inc. Piper Sensor Piper Sensor as shown in the photograph below. The EUT contains Wi-Fi (b/g/n @2.4GHZ) and BT LE transmitters.



Equipment Under Test



1.3.2 EUT General Description

EUT Description	Piper Sensor
Model Name	Piper Sensor
Model Number(s)	SG1001
Serial Number	90004024
Capability	802.11 b/g/n WLAN and BT LE
Rated Voltage	48VDC from PoE Ethernet Switch

Output RF Power (WLAN)	28.06 dBm EIRP (@ 2462 MHz)
Frequency Range	2412-2462 MHz
Antenna Type	Ceiling Mount Directional Antenna
Antenna Manufacturer	N/A
Antenna gain	12 dBi
Output RF Power (BT LE)	18.56 dBm EIRP (@ 2480 MHz)
Frequency Range	2402 – 2480MHz
Antenna Type	Ceiling Mount Directional Antenna
Antenna Manufacturer	N/A
Antenna gain	12 dBi

- Primary Unit (EUT)
- Production
 - Pre-Production
 - Engineering



1.4 GENERAL RF EXPOSURE POLICIES FOR EQUIPMENT AUTHORIZATION (TITLE 47 SUBPART J §2.1091 AND KDB 447498 D01)

1) The RF exposure requirements for devices operating in mobile and portable exposure conditions are different. When both exposure conditions apply to a device, compliance is determined according to the rules and policies established for both exposure conditions. Equipment authorization for devices that are categorically excluded from routine RF exposure evaluation according to §2.1091(c) and §2.1093(c), when filed directly with the FCC, are generally not required to include RF exposure test results to demonstrate compliance. In some cases, the FCC may require RF exposure testing or analysis to be performed with respect to the conditions stated in §1.1307(c) and (d).

2) Standalone and simultaneous transmission use conditions for mobile and portable exposure conditions must be determined according to the host platform and product operating configuration requirements. Transmitters approved only for use in standalone operations cannot be used in simultaneous transmission operations without further evaluation; this may be through test exclusion provisions or specific equipment approval. Except for transmitters that cannot operate in standalone configurations, when SAR measurement is required for simultaneous transmission conditions approval for standalone use is required for each individual transmitter. For devices that do not support standalone transmission, there is no measured or estimated standalone SAR result to determine simultaneous transmission SAR test exclusion. The enhanced zoom scan measurement and volume scan post-processing procedures in KDB 865664 are required to determine SAR compliance. When transmitters are approved for use in dedicated host or product configurations, according to the specific standalone and simultaneous transmission conditions tested for compliance, additional approvals are normally required for the transmitters to be used in other host and product configurations.

3) Transmitter modules must be approved according to one of the following host platform exposure conditions, with respect to the product configurations tested or evaluated for equipment approval for incorporation in qualified host products. The approved host platform exposure condition(s) must be identified on the grant of equipment certification. When transmitter modules are incorporated in host devices that qualify for RF exposure test exclusion and no other testing or equipment approval is required, the standalone and simultaneous transmission configurations and test exclusion conditions must be fully documented in the grantee's records according to Class I permissive change requirements

a) **Mobile exposure host** platform evaluation procedures can only be applied if all transmitters in the host devices support mobile exposure conditions. Transmitters and modules approved only for use in the mobile exposure host platform cannot operate in hosts and product configurations that require standalone or simultaneous transmission operations in portable exposure conditions. The portable exposure host platform or the mixed mobile and portable exposure platform is required to support portable exposure conditions in qualified host configurations.

b) **Portable exposure host** platform evaluation procedures can only be applied if all transmitters in the host devices support portable exposure conditions. Transmitters and modules approved for use in the portable exposure host platform may be used for standalone operations in mobile exposure host platforms, without further equipment approval, only when the same identical transmitter and antenna required for portable exposure conditions are used.

c) **The mixed mobile and portable exposure host platform** enables host devices to incorporate transmitters in qualified mobile and portable exposure conditions, for standalone and simultaneous transmission operations, by applying the published RF exposure KDB procedures required for the host product to address RF exposure compliance. Transmitters and modules approved for use in mixed mobile and portable exposure host platform may be used for standalone and simultaneous transmission operations in mobile and/or portable exposure conditions according to the approved operating configurations and exposure conditions in



qualified host configurations supported by the test results and exclusion conditions. When the mobile exposure simultaneous transmission test exclusion in section 7.2 applies, a transmitter or module approved for use in the portable exposure host platform may be used for simultaneous transmission operations in the mixed mobile and portable exposure host platform according to Class I permissive change requirements without further equipment approval. When tests are required to support additional antenna or host configurations, the results must be sufficiently conservative to demonstrate compliance for all standalone and simultaneous transmission operations required by the hosts and product configurations through subsequent Class II permissive changes.

4) Transmitters operating in consumer products must satisfy the general population exposure limits required for either mobile or portable RF exposure conditions as appropriate. The test configurations used to qualify for test exclusion or used for compliance testing must be sufficiently conservative for all required operations to demonstrate compliance. The devices and accessories should be tested for normal use without requiring specific user intervention to maintain compliance. All device operating instructions and installation requirements must be supported by the test configurations and results. It is unacceptable to apply instructions as a substitute for providing test data. Caution statements or warning labels are only acceptable for alerting users to avoid exposures in certain unintended use conditions that are not required for normal operations.

5) Occupational exposure limits only apply to “work-related” use conditions. Users must be “fully aware of” and be able to “exercise control over” their exposure to qualify for the higher occupational exposure limits. Occupational exposure limits do not apply to consumer devices and radio services supporting public networks and Part 15 unlicensed operations. When devices are authorized in accordance with the general population exposure limits, additional equipment approval is not required to satisfy occupational exposure requirements. Mandatory RF exposure training is required for workers to qualify for occupational exposure limits. When it can be demonstrated that users are required to adhere to the training instructions and are able to mitigate compliance concerns by applying the instructions, detailed training instructions incorporated in manuals, in conjunction with conspicuous permanent labeling on the device, may be considered as acceptable training to qualify workers to operate a device according to occupational exposure limits. The training information must be included in the equipment authorization application.

6) As required by §§ 2.1033(b)(3) and 2.1033(c)(3), users and installers shall be furnished with the required operating and installation instructions. These are reviewed for acceptance during equipment approval. The applicable instructions must be provided to installers, integrators and end users to ensure proper installation and operation of the devices for meeting compliance.

a) The instructions required for standalone products and modular transmitters are generally different due to varying host configurations; therefore, these must be considered differently to ensure RF exposure compliance for both standalone and simultaneous transmission operations. User instructions must be sufficient for the typical consumers, who are generally unskilled, to install and operate the equipment to ensure RF exposure compliance. The acceptable host platform configurations and exposure conditions approved for a modular transmitter, including any restrictions, must be fully described in the equipment approval and required OEM integration instructions.

b) When professional installation, OEM integration or assembly by a third-party is expected, the installation instructions and assembly requirements approved for equipment approval must be provided to the integrators to clearly identify the specific requirements necessary to maintain RF exposure compliance. The grantee of a transmitter, typically the manufacturer, is responsible for ensuring installers and integrators have a clear understanding of the compliance requirements by



including the required instructions and documentation with the product and, if necessary, to provide further support to fulfill grantee responsibilities for ensuring compliance. The integrators must be fully informed of their obligations and verify the resolution of any issues and concerns with each transmitter manufacturer or grantee. For transmitter modules, the different disclosures required for the entire supply chain to ensure compliance, including grantees of individual transmitters, host manufacturers and OEM/ODM integrators, and the end users, must be fully documented during equipment approval.



1.5 DEVIATIONS FROM THE STANDARD

No deviations from the applicable test standards or test plan were made during testing.

1.6 MODIFICATION RECORD

Description of Modification	Modification Fitted By	Date Modification Fitted
Serial Number 90004024		
N/A	-	-

The table above details modifications made to the EUT during the test programme. The modifications incorporated during each test (if relevant) are recorded on the appropriate test pages.

1.7 TEST METHODOLOGY

All calculations contained in this report were conducted with EN 62311 January 2008. Assessment of electronic and electrical equipment related to human exposure restrictions for electromagnetic fields (0 Hz – 300 GHz) (IEC 62311:2007, modified), Title 47 Subpart J §2.1091 and KDB 447498 D01 (Mobile and Portable Devices RF Exposure Procedures and Equipment Authorization Policies).

1.8 TEST FACILITY LOCATION

1.8.1 TÜV SÜD America Inc. (Mira Mesa)

10040 Mesa Rim Road, San Diego, CA 92121-2912 (32.901268,-117.177681). Phone: 858 678 1400 FAX: 858-546 0364

1.8.2 TÜV SÜD America Inc. (Rancho Bernardo)

16936 Via Del Campo, San Diego, CA 92127-1708 (33.018644,-117.092409). Phone: 858 942 5542 Fax: 858 546 0364.

1.9 TEST FACILITY REGISTRATION

1.9.1 FCC – Registration No.: US1146

TUV SUD America Inc. (San Diego), is an accredited test facility with the site description report on file and has met all the requirements specified in §2.948 of the FCC rules. The acceptance letter from the FCC is maintained in our files and the Registration is US1146.



1.9.2 Innovation, Science and Economic Development Canada Registration No.: 3067A

The 10m Semi-anechoic chamber of TÜV SÜD America Inc. (San Diego) has been registered by Certification and Engineering Bureau of Innovation, Science and Economic Development Canada for radio equipment testing with Registration No. 3067A.



SECTION 2

TEST DETAILS


Radio Frequency Exposure Evaluation of the
Piper Networks, Inc.
SG1001

2.1 GENERIC PROCEDURE FOR ASSESSMENT OF EQUIPMENT

2.1.1 Specification Reference

Section 7.2 of EN 62311 January 2008 also covering Title 47 Subpart J §2.1091 and KDB 447498 D01

2.1.2 Assessment Flowchart

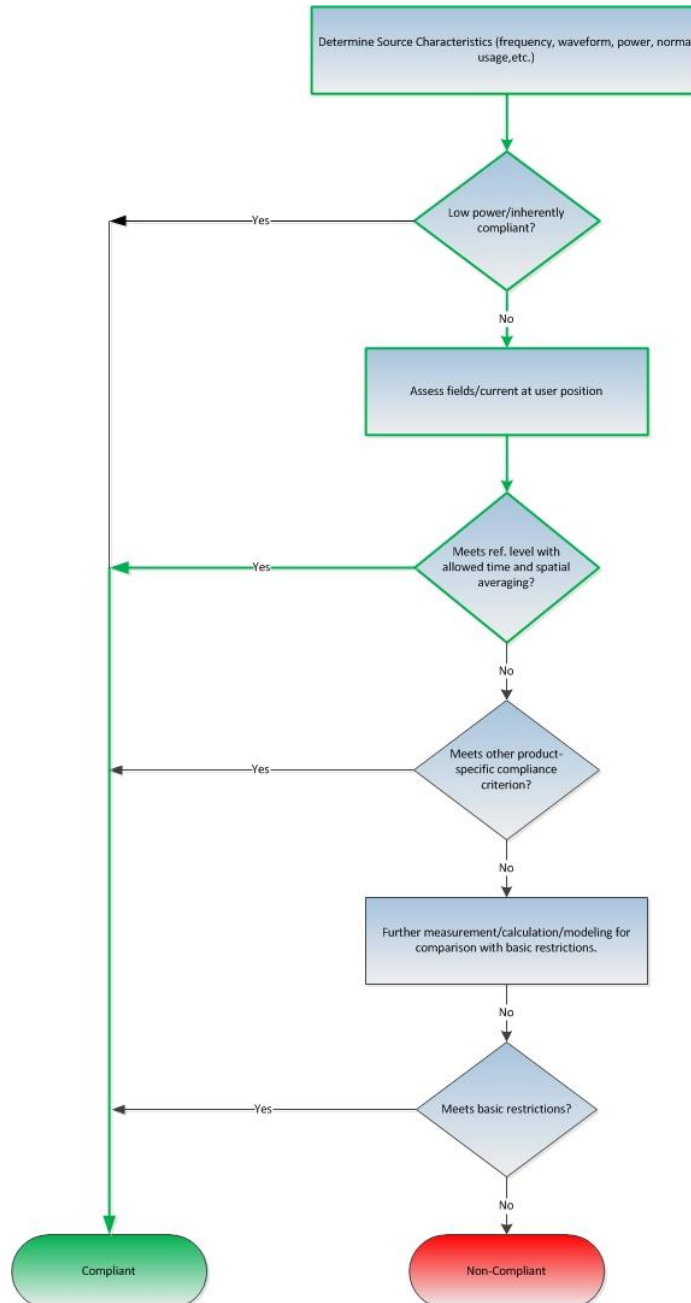



2.1.3 Assessment Method

E and H measurement. Near or far field. Direct measurement for comparison with reference levels or as input for more detailed assessment. See Annex F of EN 62311 January 2008 for reference.

2.1.4 Assessment Procedure

Verification is based from power levels and declared antenna gains (for multi co-located transmitters type EUT) detailed in this test report and are taken from the following test report(s):

Test Report	Radio Standard	Issued by:
SD72120112-0916A	FCC Part 15.247 (2016-10)	TÜV SÜD America Inc. 10040 Mesa Rim Road, San Diego, CA 92121-2912 (February 22, 2017)
SD72120112-0916B	FCC Part 15.247 (2016-10)	TÜV SÜD America Inc. 10040 Mesa Rim Road, San Diego, CA 92121-2912 (February 22, 2017)

Equation for predicting RF field is from Section 8.3.2 of EN 50383:2002. The model where the formula was derived is applicable in the far-field region and over-estimates in the radiating near-field region:

$$S = \frac{PG}{4\pi r^2}$$

Where: S=the power flux
 P=input power of the antenna
 G=antenna gain relative to an isotropic antenna
 r=distance from the antenna to the point of investigation

2.1.5 Limits

Limits used is from Table 7 of ICNIRP guidelines for limiting exposure to time-varying electric, magnetic and electromagnetic fields (up to 300 GHz) as published in: Health Physics 74(4):494-522;1998.

Frequency Range (MHz)	E-field strength (V/m)	H-field strength (A/m)	B-Field (µT)	Equivalent plane wave power density S_{eq} (W/m ²)
400-2000	$1.375 f^{1/2}$	$0.0037 f^{1/2}$	$0.0046 f^{1/2}$	$f/200$
2000-300000	61	0.16	0.2	10

Only the relevant frequency range presented. f as indicated in the frequency range column.



Limits for General Population/Uncontrolled Exposure (Title 47 Subpart J §2.1091 and KDB 447498 D01 referring to limits under §1.1310)

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Electric Field Strength (H) (A/m)	Power Density (S) (mW/cm ²)	Averaging Time [E] ² , [H] ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500	-	-	f/1500	30
1500-100,000	-	-	1.0	30

*f = frequency in MHz *Plane-wave equivalent power density*

NOTE : The averaging time for General Population/Uncontrolled exposure to fixed transmitters is not applicable for mobile and portable transmitters. See 47 CFR §§2.1091 and 2.1093 on source-based time-averaging requirements for mobile and portable transmitters.

2.1.6 Equipment Under Test and Modification State

Serial No: 90004024/ See individual test report for details (see Section 2.1.4 for details)

2.1.7 Date of Test/Initial of test personnel who performed the test

See individual test report for details (see Section 2.1.4 for details)

2.1.8 Test Equipment Used

See individual test report for details (see Section 2.1.4 for details).

2.1.9 Environmental Conditions/ Test Location

See individual test report for details (see Section 2.1.4 for details).

2.1.10 Measurement Uncertainty

See individual test report for details (see Section 2.1.4 for details).

2.1.11 Test Results for WLAN

The maximum reported EIRP RF power is 28.06 dBm. This is high channel (2462 MHz) in 802.11g mode. This is converted to 0.640 watt in order use the formula under Section 2.1.4. Limit used is 10 W/m². Data rate and power setting is set to worst case configuration which is programmed to the test software provided by the client. EUT is a mobile device. User separation with the EUT is restricted @ 20 cm



Frequency (MHz)	Radio Mode	Antenna Conducted Port Power (dBm)	Antenna Conducted Port Power (Watts)	Antenna Gain (dBi)
2462	802.11g	16.06	0.040	12.0

Using the formula under Section 2.1.4, we get the following:

$$S = \frac{PG}{4\pi r^2}$$

$$S = \frac{(0.040)(15.849 \text{ numeric antenna gain})}{4\pi(0.2 \text{ meters})^2}$$

$$S = \frac{0.6339}{0.5027}$$

Therefore: $S = 1.261 \text{ W/m}^2$ (Complies with 10 W/m² limit)

2.1.12 Test Results for BT LE

The maximum reported Conducted Peak RF power as reported is 6.56 dBm. This is high channel (2480 MHz). This is converted to 0.00453 watt in order use the formula under Section 2.1.4. Limit used is 10 W/m². EUT is a mobile device. User separation with the EUT is restricted @ 20 cm

Frequency (MHz)	Radio Mode	Antenna Conducted Port Power (dBm)	Antenna Conducted Port Power (Watts)	Antenna Gain (dBi)
2480	BT LE	6.56	0.00453	12.0

Using the formula under Section 2.1.4, we get the following:

$$S = \frac{PG}{4\pi r^2}$$

$$S = \frac{(0.00453)(15.849 \text{ numeric antenna gain})}{4\pi(0.2 \text{ meters})^2}$$

$$S = \frac{0.0718}{0.5027}$$

Therefore: $S = 0.1428 \text{ W/m}^2$ (Complies with 10 W/m² limit)



2.2 EXPOSURE FROM SOURCES WITH MULTIPLE FREQUENCIES

2.2.1 Specification Reference

Annex IV of Council recommendation 1999/519/EC (limits) and EN 62311 January 2008 (methods) and Title 47 Subpart J §2.1091 and KDB 447498 D01.

When the evaluation has to account for simultaneous transmissions from co-located devices. Each individual transmitter are evaluated separately. The sum of the individual ratios of measured/calculated value to the basic restriction/reference level has to be < 1.

The FCC's MPE limits vary with frequency. Therefore, in mixed or broadband RF fields where several sources and frequencies are involved, the fraction of the recommended limit (in terms of power density or square of the electric or magnetic field strength) incurred within each frequency interval should be determined, and the sum of all fractional contributions should not exceed 1.0, or 100% in terms of percentage.

2.2.2 Limit Applicable

Title 47 Subpart J §2.1091 and KDB 447498 D01

2.2.3 MPE Assessment Procedure

Verification is based from power levels and declared antenna gains (for multi co-located transmitters type EUT) detailed in this test report and are taken from the following test report(s):

Test Report	Radio Standard	Issued by:
SD72120112-0916A	FCC Part 15.247 (2016-10)	TÜV SÜD America Inc. 10040 Mesa Rim Road, San Diego, CA 92121-2912 (February 22, 2017)
SD72120112-0916B	FCC Part 15.247 (2016-10)	TÜV SÜD America Inc. 10040 Mesa Rim Road, San Diego, CA 92121-2912 (February 22, 2017)

Equation for predicting RF field is then performed. The equation is from Section 8.3.2 of EN 50383:2002. The model where the formula was derived is applicable in the far-field region and over-estimates in the radiating near-field region:

$$S = \frac{PG}{4\pi r^2}$$

Where: S=the power flux
 P=input power of the antenna
 G=antenna gain relative to an isotropic antenna
 r=distance from the antenna to the point of investigation



2.2.4 Equipment Under Test and Modification State

Serial No: 90004024 / See individual test report for details (see Section 2.1.4 for details)

2.2.5 Date of Test/Initial of test personnel who performed the test

See individual test report for details (see Section 2.2.3 for details)

2.2.6 Test Equipment Used

See individual test report for details (see Section 2.2.3 for details).

2.2.7 Environmental Conditions/ Test Location

See individual test report for details (see Section 2.2.3 for details).

2.2.8 Measurement Uncertainty

See individual test report for details (see Section 2.2.3 for details).

2.2.9 MPE Calculation for BT LE

EUT is a mobile device. User separation with the EUT is restricted @ 20 cm.

Maximum peak output power at antenna input terminal:	6.56	(dBm)
Maximum peak output power at antenna input terminal:	4.53	(mW)
Antenna gain (typical):	12.0	(dBi)
Maximum antenna gain:	15.849	(numeric)
Prediction distance:	20	(cm)
Source Based Time Average Duty Cycle:	100	(%)
Prediction frequency:	2480	(MHz)
MPE limit for uncontrolled exposure at prediction frequency:	1.0	(mW/cm ²)
Power density at prediction frequency:	0.01428	(mW/cm ²)
Power density at prediction frequency:	0.143	(W/m ²)
Margin of Compliance:	18.45	(dB)

2.2.10 MPE Calculation for WLAN

EUT is a mobile device. User separation with the EUT is restricted @ 20 cm.

Maximum peak output power at antenna input terminal:	16.06	(dBm)
Maximum peak output power at antenna input terminal:	40.36	(mW)
Antenna gain (typical):	12.0	(dBi)
Maximum antenna gain:	15.849	(numeric)
Prediction distance:	20	(cm)



Source Based Time Average Duty Cycle:	100	(%)
Prediction frequency:	2462	(MHz)
MPE limit for uncontrolled exposure at prediction frequency:	1.0	(mW/cm ²)
Power density at prediction frequency:	0.12727	(mW/cm ²)
Power density at prediction frequency:	1.273	(W/m ²)
Margin of Compliance:	8.95	(dB)

2.2.11 Test Results

Annex IV of Council recommendation 1999/519/EC				
Transmitter	MPE (mW/cm ²)	Evaluation Distance (cm)	Limit (mW/cm ²)	MPE ratio (MPE/Limit)
BT LE	0.01428	20	1.0	0.01428
WLAN (WiFi)	0.12727	20	1.0	0.12727
Sum of the ratios (should be <1.0)				0.14155



SECTION 3

ACCREDITATION, DISCLAIMERS AND COPYRIGHT



3.1 ACCREDITATION, DISCLAIMERS AND COPYRIGHT

TÜV SÜD America Inc.'s reports apply only to the specific sample tested under stated test conditions. It is the manufacturer's responsibility to assure the continued compliance of production units of this model. TÜV SÜD America, Inc. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV SÜD America, Inc.'s issued reports.

This report is the confidential property of the client. As a mutual protection to our clients, the public and TÜV SÜD America, Inc., extracts from the test report shall not be reproduced, except in full without TÜV SÜD America, Inc.'s written approval.

This report must not be used to claim product certification, approval, or endorsement by A2LA, NIST, or any agency of the federal government.

TÜV SÜD America, Inc. and its professional staff hold government and professional organization certifications for AAMI, ACIL, AEA, ANSI, IEEE, A2LA, NIST and VCCI.



A2LA Cert. No. 2955.13

