



FCC TEST REPORT

FCC PART 15 SUBPART C 15.239

Test report
On Behalf of
VTIN TECHNOLOGY Co., Limited
For
Bluetooth FM Transmitter
Model No.: BH268A

FCC ID: 2AIL4-BH268A

Prepared for : VTIN TECHNOLOGY Co., Limited
Unit D,16/F, One Capital Place, 18 Luard Road Wan Chai, HongKong ,China

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai
Street, Bao'an District, Shenzhen City, China

Date of Test: Aug. 20, 2018 ~ Aug. 28, 2018

Date of Report: Aug. 28, 2018

Report Number: HUAKE180827901E



TEST RESULT CERTIFICATION

Applicant's name: VTIN TECHNOLOGY Co., Limited
 Address: Unit D,16/F, One Capital Place, 18 Luard Road Wan Chai, HongKong ,China
Manufacture's Name: VTIN TECHNOLOGY Co., Limited
 Address: Unit D,16/F, One Capital Place, 18 Luard Road Wan Chai, HongKong ,China

Product description

Trade Mark: VTIN
 Product name.....: VTIN TECHNOLOGY Co., Limited
 Model and/or type reference ...: BH268A
Standards.....: FCC Rules and Regulations Part 15 Subpart C Section 15.239
 ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test:
 Date (s) of performance of tests: Aug. 20, 2018 ~ Aug. 28, 2018
 Date of Issue: Aug. 28, 2018
 Test Result.....: **Pass**

Testing Engineer : Gary Qian
 (Gary Qian)

Technical Manager : Eden Hu
 (Eden Hu)

Authorized Signatory : Jason Zhou
 (Jason Zhou)



Table of Contents	Page
1 . TEST SUMMARY	4
2 . GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 OPERATION OF EUT DURING TESTING	6
2.3 DESCRIPTION OF TEST SETUP	6
2.4 MEASUREMENT INSTRUMENTS LIST	7
3. RADIATED EMISSION	8
3.1. MEASUREMENT PROCEDURE	8
3.2. TEST SETUP	9
3.3. TEST RESULT FOR FIELD STRENGTH OF FUNDAMENTAL	10
3.4. TEST RESULT FOR FIELD STRENGTH OF BAND EDGE EMISSION	10
3.5. TEST RESULT FOR SPURIOUS EMISSION	11
4. BANDWIDTH	13
4.1. MEASUREMENT PROCEDURE	13
4.2. TEST SETUP	13
4.3. TEST RESULT	14
5. PHOTOGRAPH OF TEST	16



1. TEST SUMMARY

1.1 TEST PROCEDURES AND RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.209	Field Strength of Fundamental and Spurious Emission	Compliant
15.215	Bandwidth	Compliant
15.207	Line Conducted Emission	N/A

NOTE: N/A stands for not applicable. The device is only used in the car, so the conducted emission is not applicable.

1.2 TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park,
Fuhai Street, Bao'an District, Shenzhen City, China

Designation Number: : CN1229

Test Firm Registration Number : 616276

1.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainty

Conducted Emission Expanded Uncertainty = 2.23dB, k=2

Radiated emission expanded uncertainty(9kHz-30MHz) = 3.08dB, k=2

Radiated emission expanded uncertainty(30MHz-1000MHz) = 4.42dB, k=2

Radiated emission expanded uncertainty(Above 1GHz) = 4.06dB, k=2



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Operation Frequency	88.1MHz-107.9MHz
Field Strength(3m)	40.52dBuV/m(AV)@3m
Modulation	FM
Number of channels	199(Channel spacing 100kHz)
Hardware Version	V0.2
Software Version	V1.0
Antenna Designation	Integrated Antenna (Met 15.203 Antenna requirement)
Power Supply	DC12/24V



2.2 OPERATION OF EUT DURING TESTING

NO.	TEST MODE DESCRIPTION
1	Transmitting mode(Low channel)
2	Transmitting mode(Middle channel)
3	Transmitting mode(High channel)

Note:

1. For Radiated Emission, 3axis were chosen for testing for each applicable mode.
2. All the requirements have been tested by modulating the transmitter with a 2.5 kHz tone at a fixed level which set to the manufacturer's maximum rated input to the modulator.

2.3 DESCRIPTION OF TEST SETUP

Operation of EUT during Radiation and Above1GHz Radiation testing:

EUT

**2.4 MEASUREMENT INSTRUMENTS LIST**

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	L.I.S.N. Artificial Mains Network	R&S	ENV216	HKE-002	Dec. 28, 2017	1 Year
2.	Receiver	R&S	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
3.	RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 28, 2017	1 Year
4.	Spectrum analyzer	R&S	FSP40	HKE-025	Dec. 28, 2017	1 Year
5.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
6.	Preamplifier	Schwarzbeck	BBV 9743	HKE-006	Dec. 28, 2017	1 Year
7.	EMI Test Receiver	Rohde & Schwarz	ESCI 7	HKE-010	Dec. 28, 2017	1 Year
8.	Bilog Broadband Antenna	Schwarzbeck	VULB9163	HKE-012	Dec. 28, 2017	1 Year
9.	Loop Antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Dec. 28, 2017	1 Year
10.	Horn Antenna	Schwarzbeck	9120D	HKE-013	Dec. 28, 2017	1 Year
11.	Pre-amplifier	EMCI	EMC05184 5SE	HKE-015	Dec. 28, 2017	1 Year
12.	Pre-amplifier	Agilent	83051A	HKE-016	Dec. 28, 2017	1 Year
13.	EMI Test Software EZ-EMC	Tonscend	JS1120-B Version	HKE-083	Dec. 28, 2017	N/A
14.	Power Sensor	Agilent	E9300A	HKE-086	Dec. 28, 2017	1 Year
15.	Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 28, 2017	1 Year
16.	Signal generator	Agilent	N5182A	HKE-029	Dec. 28, 2017	1 Year
17.	Signal Generator	Agilent	83630A	HKE-028	Dec. 28, 2017	1 Year
18.	Shielded room	Shiel Hong	4*3*3	HKE-039	Dec. 28, 2017	3 Year



3. RADIATED EMISSION

3.1. MEASUREMENT PROCEDURE


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground and opposite the horn antenna. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions below 1GHz, use 120KHz RBW and VBW \geq 3RBW for QP reading.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.
8. Only the worst case is reported.

The following table is the setting of spectrum analyzer and receiver.


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP

3.2. TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

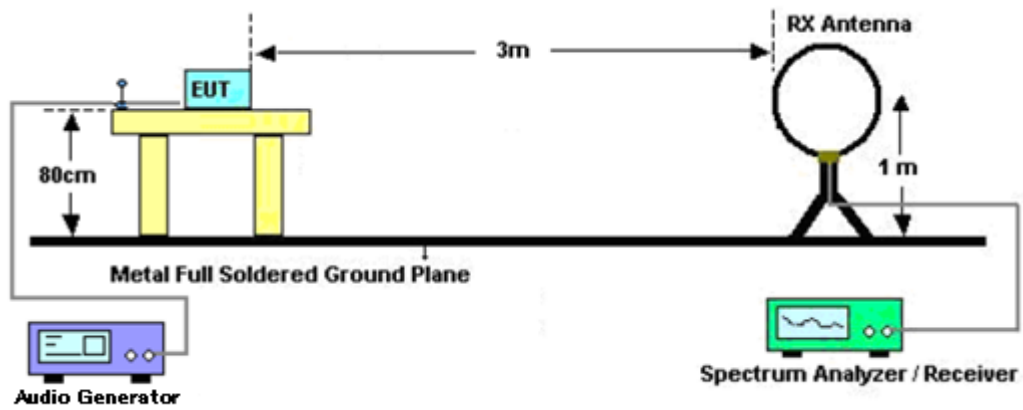

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

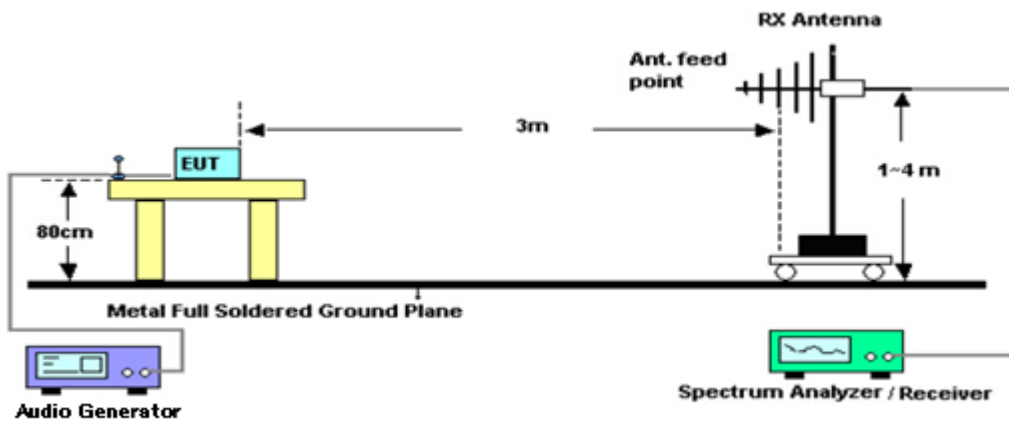

**3.3. TEST RESULT FOR FIELD STRENGTH OF FUNDAMENTAL**

Frequency MHz	Polarization	Level dB(uV/m) PK	Limit dB(uV/m) PK	Margin dB	Pass/Fail	Detector
88.100	H	35.33	67.96	-32.63	Pass	PK
88.100	V	40.52	67.96	-27.44	Pass	PK
98.000	H	36.54	67.96	-31.42	Pass	PK
98.000	V	40.74	67.96	-27.22	Pass	PK
107.900	H	38.77	67.96	-29.19	Pass	PK
107.900	V	41.04	67.96	-26.92	Pass	PK
Frequency MHz	Polarization	Level dB(uV/m) AV	Limit dB(uV/m) AV	Margin dB	Pass/Fail	Detector
88.100	H	34.18	47.96	-13.78	Pass	AV
88.100	V	39.64	47.96	-8.32	Pass	AV
98.000	H	35.12	47.96	-12.84	Pass	AV
98.000	V	40.22	47.96	-7.74	Pass	AV
107.900	H	38.15	47.96	-9.81	Pass	AV
107.900	V	40.52	47.96	-7.44	Pass	AV

3.4. TEST RESULT FOR FIELD STRENGTH OF BAND EDGE EMISSION

Frequency MHz	Polarization	Level dB(uV/m) QP	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Detector
88.000	H	32.45	40.00	-7.55	Pass	QP
88.000	V	33.18	40.00	-6.82	Pass	QP
108.000	H	31.48	43.50	-12.02	Pass	QP
108.000	V	34.52	43.50	-8.98	Pass	QP

Note: The above two frequencies are the worst case for the band edge emission test.




3.5. TEST RESULT FOR SPURIOUS EMISSION

RADIATED EMISSION BELOW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

RADIATED EMISSION BELOW 1GHZ-Horizontal

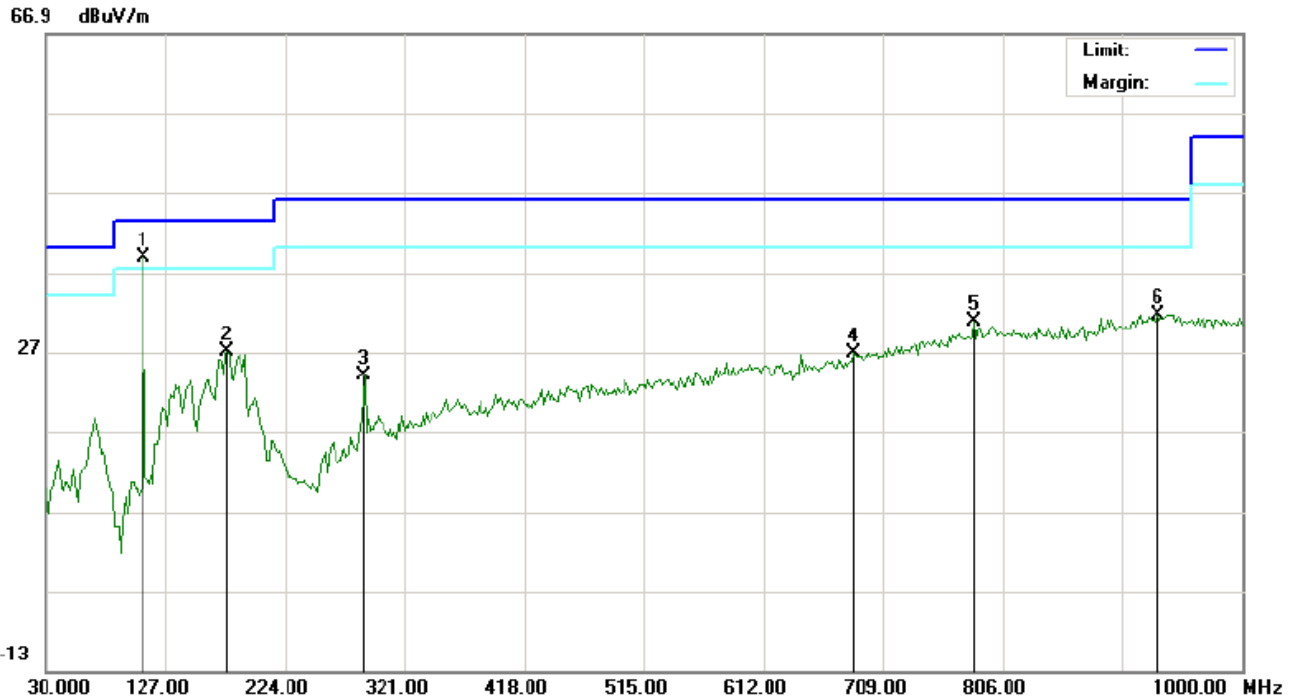


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	109.0067	30.42	8.35	38.77						
2		177.1167	16.01	10.96	26.97	43.50	-16.53	peak			
3		288.6666	10.43	13.48	23.91	46.00	-22.09	peak			
4		684.7500	1.97	24.80	26.77	46.00	-19.23	peak			
5		783.3667	3.76	27.09	30.85	46.00	-15.15	peak			
6		932.1000	2.16	29.50	31.66	46.00	-14.34	peak			

RESULT: PASS



RADIATED EMISSION BELOW 1GHZ-Vertical

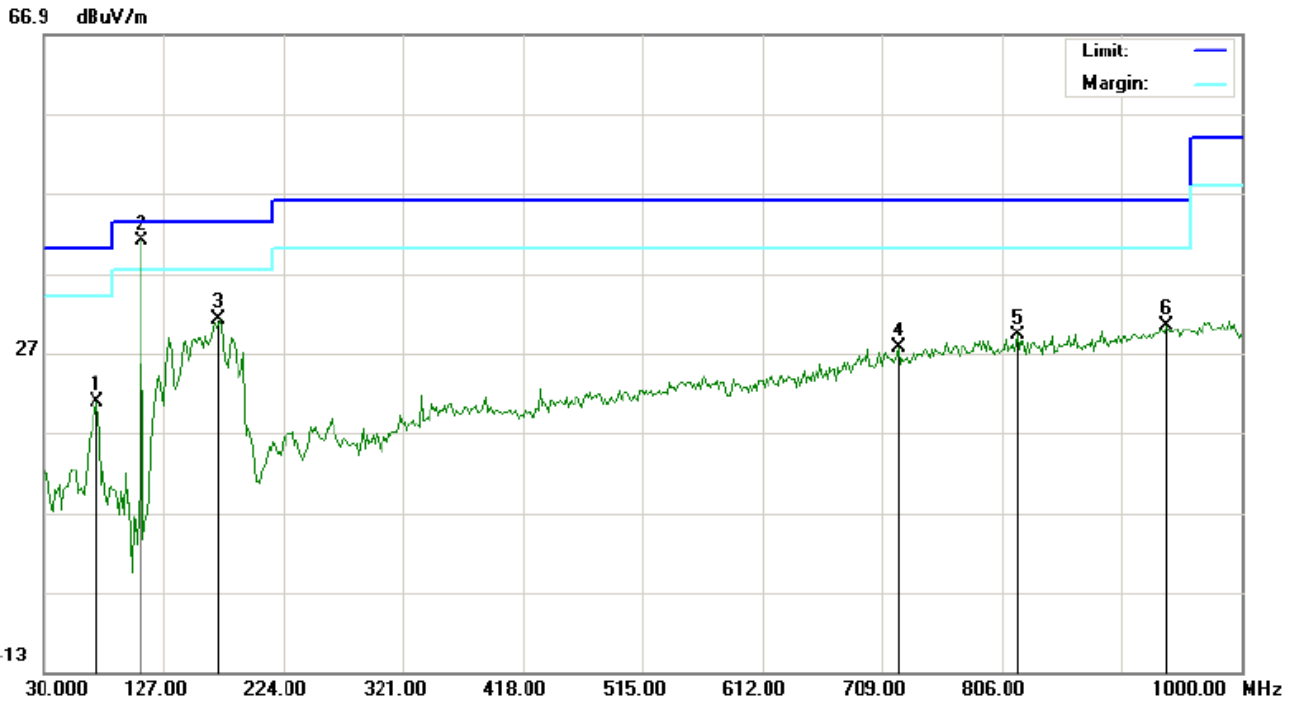

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		73.6500	17.49	3.36	20.85	40.00	-19.15	peak			
2	*	109.0067	39.55	1.49	41.04						
3		172.2666	16.72	14.56	31.28	43.50	-12.22	peak			
4		721.9333	1.75	25.82	27.57	46.00	-18.43	peak			
5		818.9333	1.80	27.32	29.12	46.00	-16.88	peak			
6		940.1833	0.61	29.73	30.34	46.00	-15.66	peak			

RESULT: PASS

Note:

1. Factor=Antenna Factor + Cable loss - Amplifier gain, Margin=Measurement-Limit.
2. The "Factor" value can be calculated automatically by software of measurement system.
3. All test modes had been tested. The High channel is the worst case and recorded in the report.



4. BANDWIDTH

4.1. MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:

Centre frequency = Operation Frequency

RBW=3KHz

VBW=10KHz


Span: 300kHz

Sweep time: Auto

2. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the “N dB down” function of SPA to define the bandwidth.

3. Record the plots and Reported.

4.2. TEST SETUP

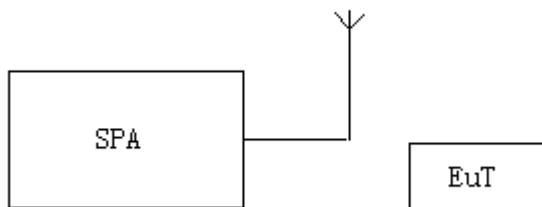




4.3. TEST RESULT


Channel	Channel Frequency(MHz)	-20dB bandwidth (kHz)	Limit(kHz)
Low	88.1	119.9	200
Middle	98.0	119.5	200
High	107.9	119.5	200

TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

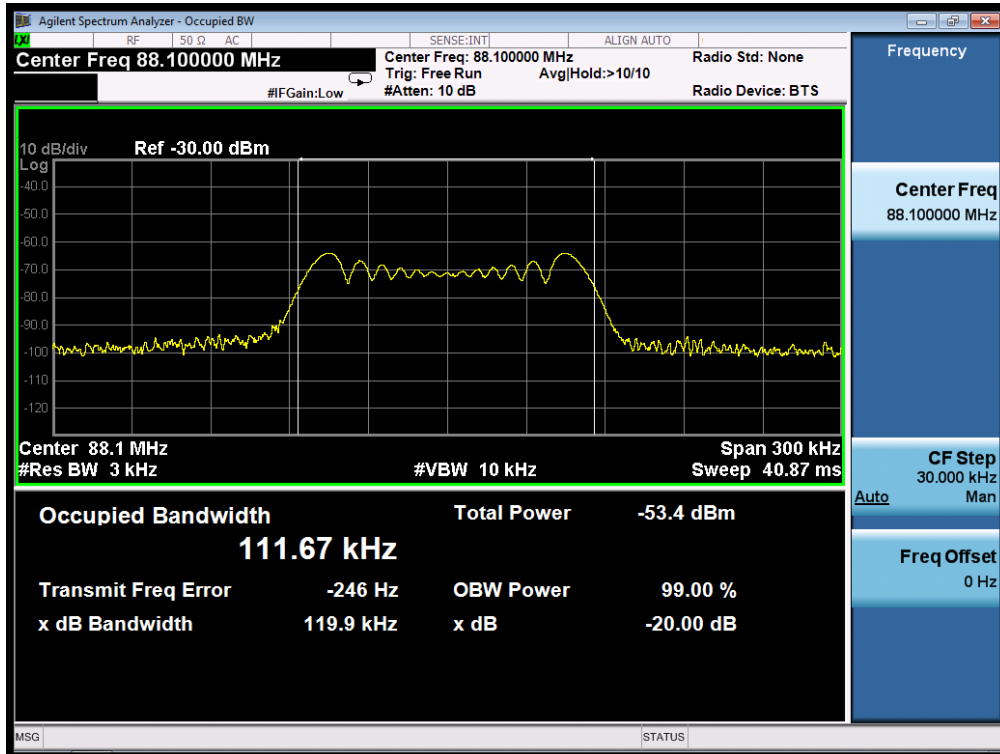




TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

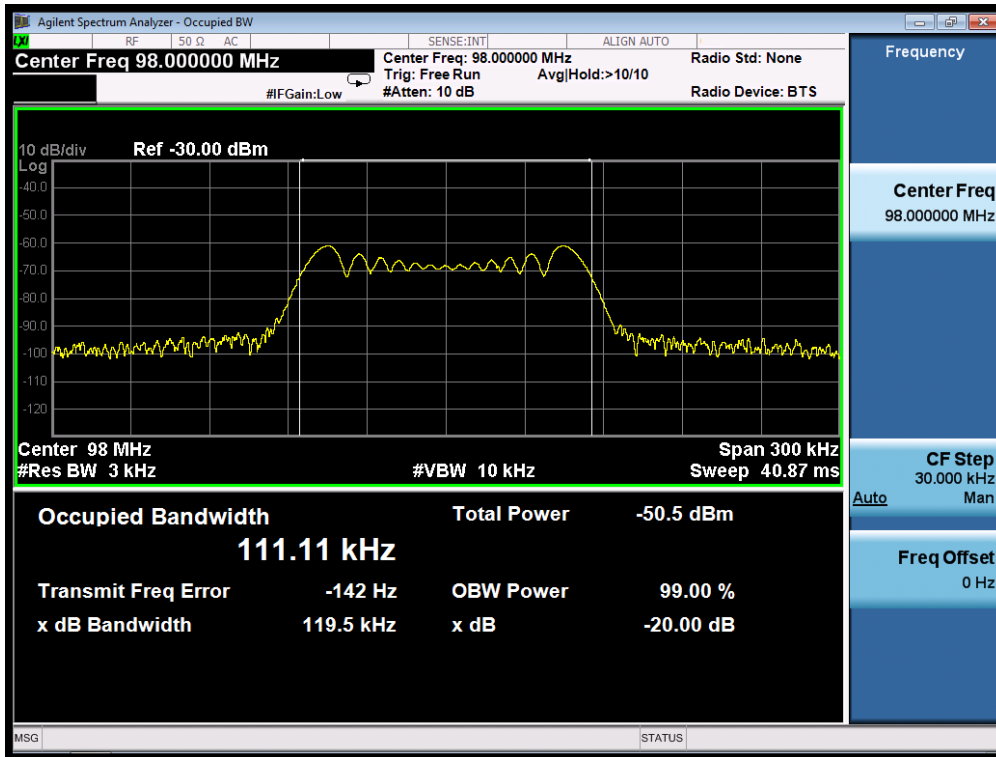

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

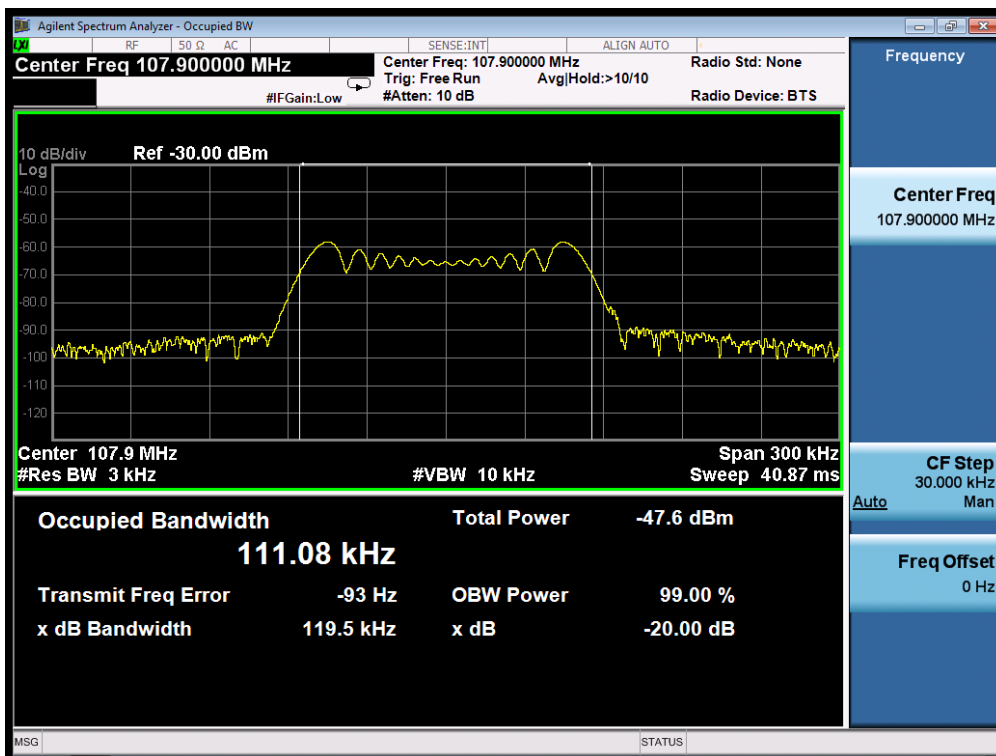

5. PHOTOGRAPH OF TEST

Radiated Emission

