

---

# FCC Test Report

---

Report No.: AGC00697190602FE06

**FCC ID** : 2AIL4-BH378A  
**APPLICATION PURPOSE** : Original Equipment  
**PRODUCT DESIGNATION** : Bluetooth FM Transmitter  
**BRAND NAME** : VICTSING  
**MODEL NAME** : BH378A, BH378B, BH378C  
**CLIENT** : VTIN TECHNOLOGY CO.,LIMITED  
**DATE OF ISSUE** : Sep. 06, 2019  
**STANDARD(S)** : FCC Part 15.239  
**REPORT VERSION** : V1.0

## Attestation of Global Compliance(Shenzhen) Co., Ltd

**CAUTION:**

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



### Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	Sep. 06, 2019	Valid	Original Report



## TABLE OF CONTENTS

<b>1. VERIFICATION OF CONFORMITY .....</b>	<b>4</b>
<b>2. GENERAL INFORMATION .....</b>	<b>5</b>
2.1. PRODUCT DESCRIPTION .....	5
<b>3. MEASUREMENT UNCERTAINTY.....</b>	<b>5</b>
<b>4. DESCRIPTION OF TEST MODES.....</b>	<b>5</b>
<b>5. SYSTEM TEST CONFIGURATION .....</b>	<b>6</b>
5.1. EQUIPMENT USED IN EUT SYSTEM.....	6
5.2. SUMMARY OF TEST RESULTS.....	6
<b>6. TEST FACILITY .....</b>	<b>7</b>
<b>7. RADIATED EMISSION .....</b>	<b>8</b>
7.1. MEASUREMENT PROCEDURE .....	8
7.2. TEST SETUP .....	9
7.3. TEST RESULT FOR FIELD STRENGTH OF FUNDAMENTAL.....	10
8.4. TEST RESULT FOR FIELD STRENGTH OF BAND EDGE EMISSION.....	10
7.5. TEST RESULT FOR SPURIOUS EMISSION.....	11
<b>8. BANDWIDTH.....</b>	<b>13</b>
8.1. MEASUREMENT PROCEDURE .....	13
8.2. TEST SETUP .....	13
8.3. TEST RESULT .....	14
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>16</b>
<b>APPENDIX B: PHOTOGRAPHS OF EUT .....</b>	<b>17</b>

### 1. VERIFICATION OF CONFORMITY

<b>Applicant</b>	VTIN TECHNOLOGY CO.,LIMITED
<b>Address</b>	UNIT D 16/F ONE CAPITAL PLACE 21 LUARD ROAD WAN CHAI HK
<b>Manufacturer</b>	VTIN TECHNOLOGY CO.,LIMITED
<b>Address</b>	UNIT D 16/F ONE CAPITAL PLACE 21 LUARD ROAD WAN CHAI HK
<b>Factory</b>	Dongguan Pinmi Electronic Technology Co., Ltd
<b>Address</b>	2F, E block, Hongda Industrial Park, Shima Community, Tangxia Town, Dongguan City,Guangdong, China
<b>Product Designation</b>	Bluetooth FM Transmitter
<b>Brand Name</b>	VICTSING
<b>Test Model</b>	BH378A
<b>Series Model</b>	BH378B, BH378C
<b>Difference Description</b>	All the same except for the model name and appearance color
<b>Date of test</b>	Jul. 08, 2019 to Sep. 06, 2019
<b>Deviation</b>	None
<b>Condition of Test Sample</b>	Normal
<b>Test Result</b>	Pass
<b>Report Template</b>	AGCRT-US-BR/RF (2013-03-01)

We hereby certify that:

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with radiated emission limits of FCC part 15.239.

Prepared By sky dong  
 Sky Dong  
 (Project Engineer) Sep. 06, 2019

Reviewed By Max Zhang  
 Max Zhang  
 (Reviewer) Sep. 06, 2019

Approved By Forrest Lei  
 Forrest Lei  
 (Authorized Officer) Sep. 06, 2019



## 2. GENERAL INFORMATION

### 2.1. PRODUCT DESCRIPTION

A major technical description of EUT is described as following

<b>Operation Frequency</b>	88.1MHz-107.9MHz
<b>Field Strength(3m)</b>	41.58dBuV/m(PK)@3m
<b>Modulation</b>	FM
<b>Number of channels</b>	199(Channel spacing 100kHz)
<b>Hardware Version</b>	T33-CC3.0-V1.0
<b>Software Version</b>	V1.0
<b>Antenna Designation</b>	Integral Antenna (Met 15.203 Antenna requirement)
<b>Antenna Gain</b>	-0.5dBi
<b>Power Supply</b>	DC 12/24V by car battery

**NOTE:** About the EUT, please refer to User's Manual.

## 3. MEASUREMENT UNCERTAINTY

Conducted measurement: +/- 3.18dB

Radiated measurement: +/- 3.91dB

## 4. DESCRIPTION OF TEST MODES

NO.	TEST MODE DESCRIPTION
1	Transmitting mode(Low channel)
2	Transmitting mode(Middle channel)
3	Transmitting mode(High channel)

Note: 1. For Radiated Emission, 3axis were chosen for testing for each applicable mode.  
2. All the requirements have been tested by modulating the transmitter with a 2.5 kHz tone at a fixed level which set to the manufacturer's maximum rated input to the modulator.  
3. Only the result of the worst case was recorded in the report, if no other cases.



## 5. SYSTEM TEST CONFIGURATION

### 5.1. EQUIPMENT USED IN EUT SYSTEM

Item	Equipment	Model No.	ID or Specification	Remark
1	Bluetooth FM Transmitter	BH378A	2AIL4-BH378A	EUT
2	Smart phone	P8	N/A	A.E
3	U-disk	DataTraveler SE9 16G	N/A	A.E
4	Battery	N300	N/A	A.E
5	TF card	M203	N/A	A.E
6	USB line	2375	1m	A.E

### 5.2. SUMMARY OF TEST RESULTS

FCC RULES	DESCRIPTION OF TEST	RESULT
15.239	Field Strength of Fundamental and Spurious Emission	Compliant
15.215	Bandwidth	Compliant
15.209	Line Conducted Emission	N/A

Note: N/A means it's not applicable to this item.



## 6. TEST FACILITY

<b>TestSite</b>	Attestation of Global Compliance(Shenzhen) Co., Ltd
<b>Location</b>	1-2/F,Building19,JunfengIndustrialPark,ChongqingRoad,HepingCommunity,Fuhai Street,Bao'anDistrict,Shenzhen,Guangdong,China
<b>Designation Number</b>	CN1259
<b>FCC Test Firm Registration Number</b>	975832
<b>A2LA Cert. No.</b>	5054.02
<b>Description</b>	Attestation of Global Compliance(Shenzhen) Co., Ltd is accredited by A2LA

## TEST EQUIPMENT OF RADIATED EMISSION TEST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Due
TEST RECEIVER	R&S	ESCI	10096	Jun. 12, 2019	Jun. 26, 2020
EXA Signal Analyzer	Aglient	N9010A	MY53470504	Dec. 20, 2018	Dec. 19, 2019
2.4GHz Fliter	EM Electronics	2400-2500MHz	N/A	Feb. 27, 2019	Feb. 26, 2020
Attenuator	ZHINAN	E-002	N/A	Aug. 26, 2019	Aug. 25, 2020
Horn antenna	SCHWARZBECK	BBHA 9170	#768	Jun. 12, 2019	Jun. 26, 2020
Active loop antenna (9K-30MHz)	ZHINAN	ZN30900C	18051	Jun. 14, 2018	Jun. 13, 2020
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	00034609	May. 26, 2018	May. 25, 2020
Broadband Preamplifier	ETS LINDGREN	3117PA	00225134	Oct. 25, 2018	Oct. 24, 2019
ANTENNA	SCHWARZBECK	VULB9168	D69250	Sep. 28, 2017	Sep. 27, 2019



## 7. RADIATED EMISSION

### 7.1. MEASUREMENT PROCEDURE

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground and opposite the horn antenna. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions below 1GHz, use 120KHz RBW and VBW>=3RBW for QP reading.
7. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High - Low scan is not required in this case.
8. Only the worst case is reported.

The following table is the setting of spectrum analyzer and receiver.


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RBW 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RBW 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RBW 120KHz for QP






## 7.2.TEST SETUP

Radiated Emission Test-Setup Frequency Below 30MHz

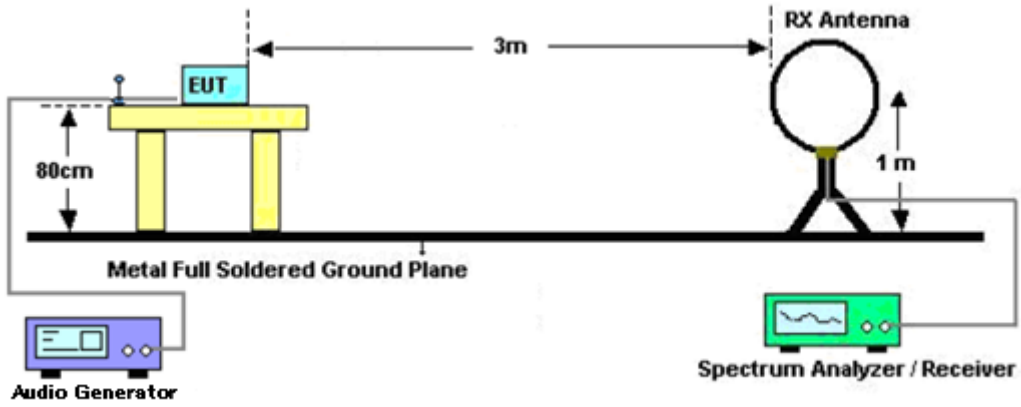

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

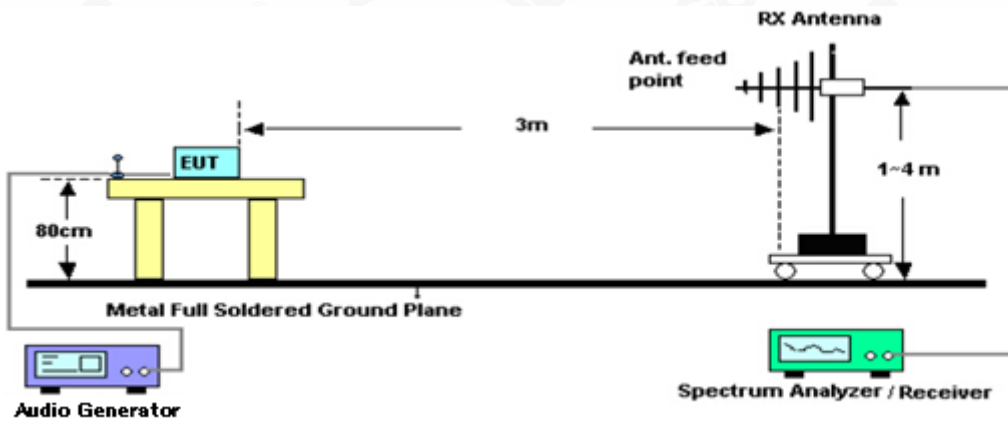

**7.3. TEST RESULT FOR FIELD STRENGTH OF FUNDAMENTAL**

Frequency MHz	Polarization	Level dB(uV/m) PK	Limit dB(uV/m) PK	Margin dB	Pass/Fail	Detector
88.100	H	40.75	67.96	27.21	Pass	PK
88.100	V	30.68	67.96	37.28	Pass	PK
98.000	H	41.58	67.96	26.55	Pass	PK
98.000	V	31.63	67.96	36.33	Pass	PK
107.900	H	40.39	67.96	27.57	Pass	PK
107.900	V	29.28	67.96	38.68	Pass	PK
Frequency MHz	Polarization	Level dB(uV/m) AV	Limit dB(uV/m) AV	Margin dB	Pass/Fail	Detector
88.100	H	40.44	47.96	7.52	Pass	AV
88.100	V	30.41	47.96	17.55	Pass	AV
98.000	H	41.28	47.96	6.68	Pass	AV
98.000	V	30.12	47.96	17.84	Pass	AV
107.900	H	39.57	47.96	8.39	Pass	AV
107.900	V	29.01	47.96	18.95	Pass	AV

**8.4. TEST RESULT FOR FIELD STRENGTH OF BAND EDGE EMISSION**

Frequency MHz	Polarization	Level dB(uV/m) QP	Limit dB(uV/m) QP	Margin dB	Pass/Fail	Detector
88.000	H	33.14	40	6.86	Pass	QP
88.000	V	31.58	40	8.42	Pass	QP
108.000	H	32.78	43.5	10.72	Pass	QP
108.000	V	30.05	43.5	13.45	Pass	QP

Note: The above two frequencies are the worst case for the band edge emission test.




### 7.5. TEST RESULT FOR SPURIOUS EMISSION

#### RADIATED EMISSION BR/EDR OW 30MHz

No emission found between lowest internal used/generated frequencies to 30MHz.

#### RADIATED EMISSION BR/EDR OW 1GHZ-Horizontal

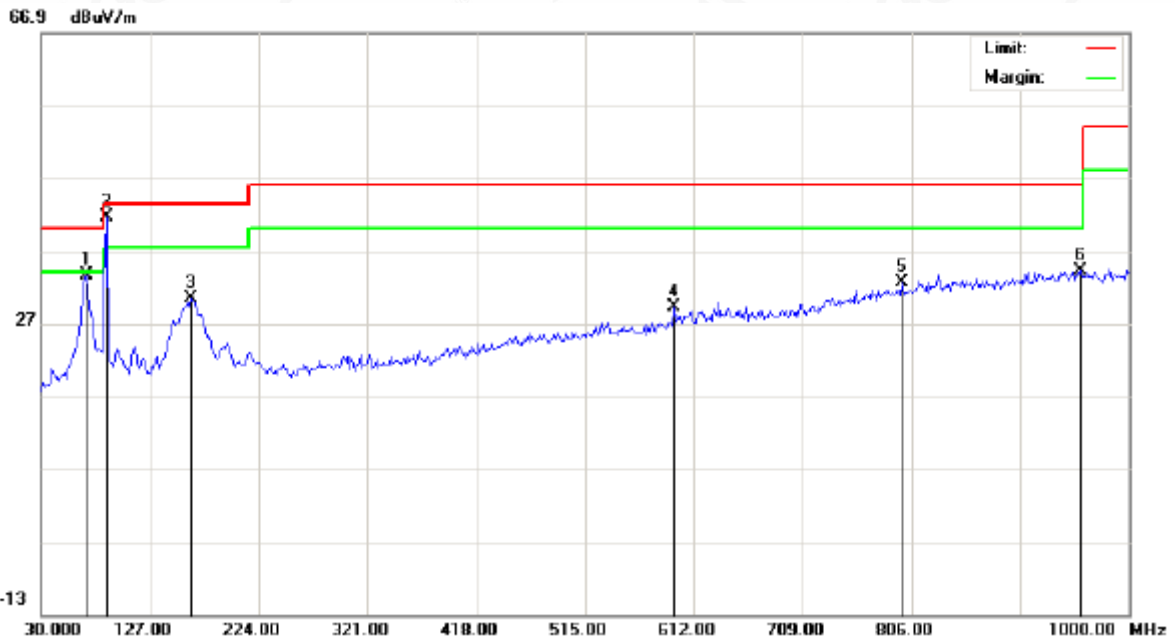


No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1		70.4167	16.67	17.02	33.69	40.00	-6.31	peak			
2	*	88.1000	26.56	14.97	41.53	47.96	-6.43	QP			
3		164.1833	11.61	18.76	30.37	43.50	-13.13	peak			
4		594.2166	2.33	26.84	29.17	46.00	-16.83	peak			
5		797.9166	2.27	30.36	32.63	46.00	-13.37	peak			
6		956.3500	2.09	32.18	34.27	46.00	-11.73	peak			

RESULT: PASS



Attestation of Global Compliance

RADIATED EMISSION BELOW 1GHZ-Vertical

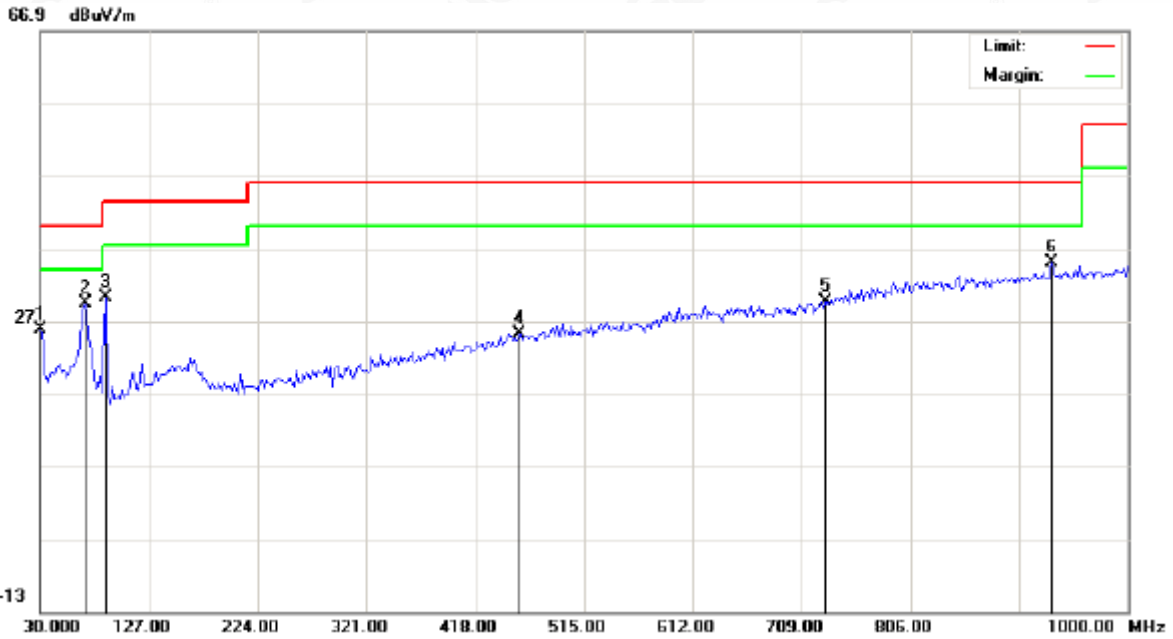

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna	Table	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		Height	Degree	
									cm	degree	
1		30.0000	7.56	18.17	25.73	40.00	-14.27	peak			
2	*	70.4167	12.43	17.02	29.45	40.00	-10.55	peak			
3		88.1000	15.19	14.97	30.16	47.96	-17.8	QP			
4		456.8000	1.17	24.12	25.29	46.00	-20.71	peak			
5		730.0167	0.87	28.83	29.70	46.00	-16.30	peak			
6		932.1000	2.94	31.98	34.92	46.00	-11.08	peak			

**RESULT: PASS**

**Note:** 1. Factor=Antenna Factor+ Cable loss-Amplifier gain, Margin=Measurement-Limit.

2. The "Factor" value can be calculated automatically by software of measurement system.

3. All test modes had been tested. The High channel is the worst case and recorded in the report.



## 8. BANDWIDTH

### 8.1. MEASUREMENT PROCEDURE

1. Set the parameters of SPA as below:

Centrefrequency = Operation Frequency

RBW=3KHz

VBW=10KHz

Span: 300kHz

Sweep time: Auto

For the occupied bandwidth measurements, the input signal shall be a 2.5 kHz tone.


The level of the tone shall be 16 dB higher than that required to produce a frequency deviation of 75 kHz, or 50% of the manufacturer's rated deviation, whichever is less.

Alternatively, in the event that a 16 dB increase cannot be achieved, the level of the tone shall be set to the manufacturer's maximum rated input to the modulator.

2. Set the EUT to continue transmitting mode. Allow the trace to stabilize. Use the "N dB down" function of SPA to define the bandwidth.

3. Record the plots and Reported.


### 8.2. TEST SETUP

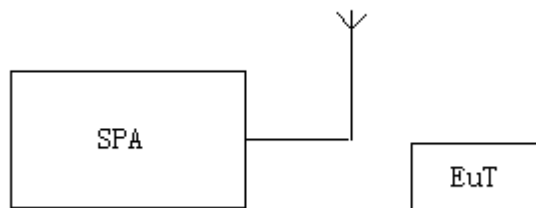


### 8.3. TEST RESULT

Channel	Channel Frequency(MHz)	-20dB bandwidth (kHz)	Limit(kHz)
Low	88.1	124.4	200
Middle	98.0	125.6	200
High	107.9	126.1	200


TEST PLOT OF BANDWIDTH FOR LOW CHANNEL

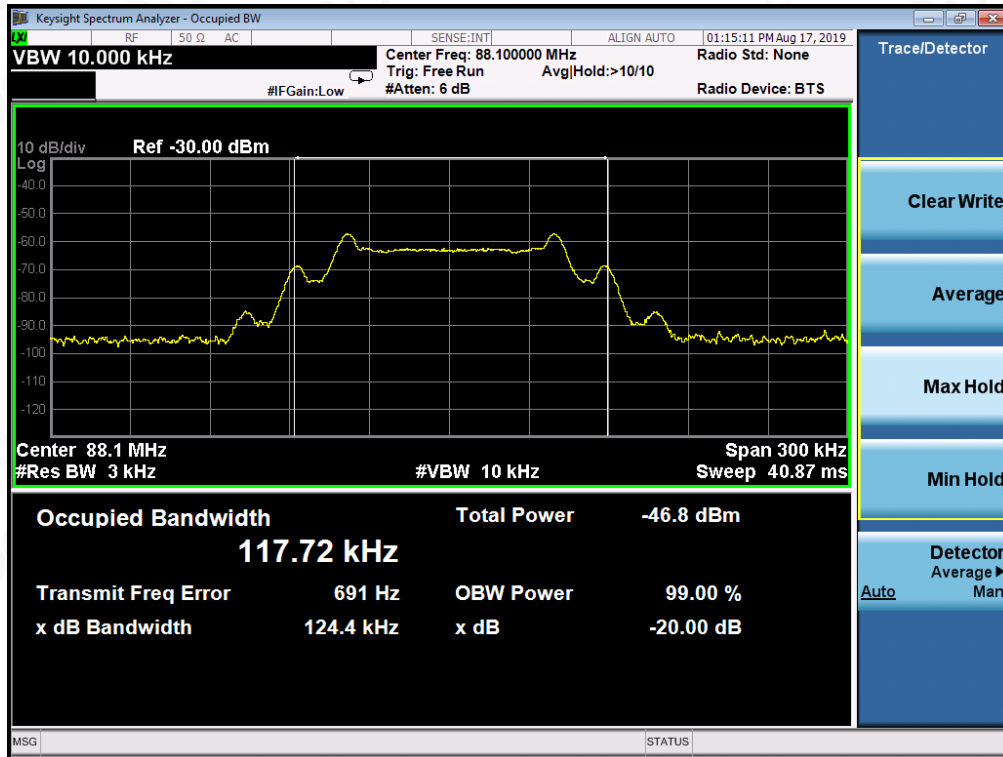


TEST PLOT OF BANDWIDTH FOR MIDDLE CHANNEL

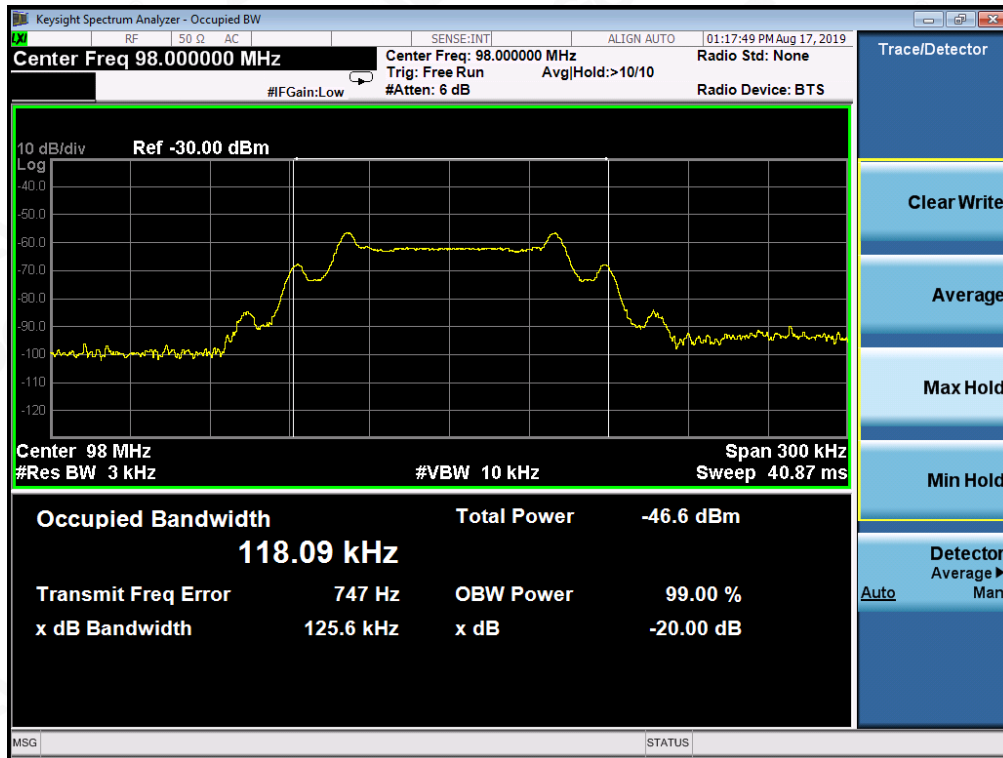

TEST PLOT OF BANDWIDTH FOR HIGH CHANNEL

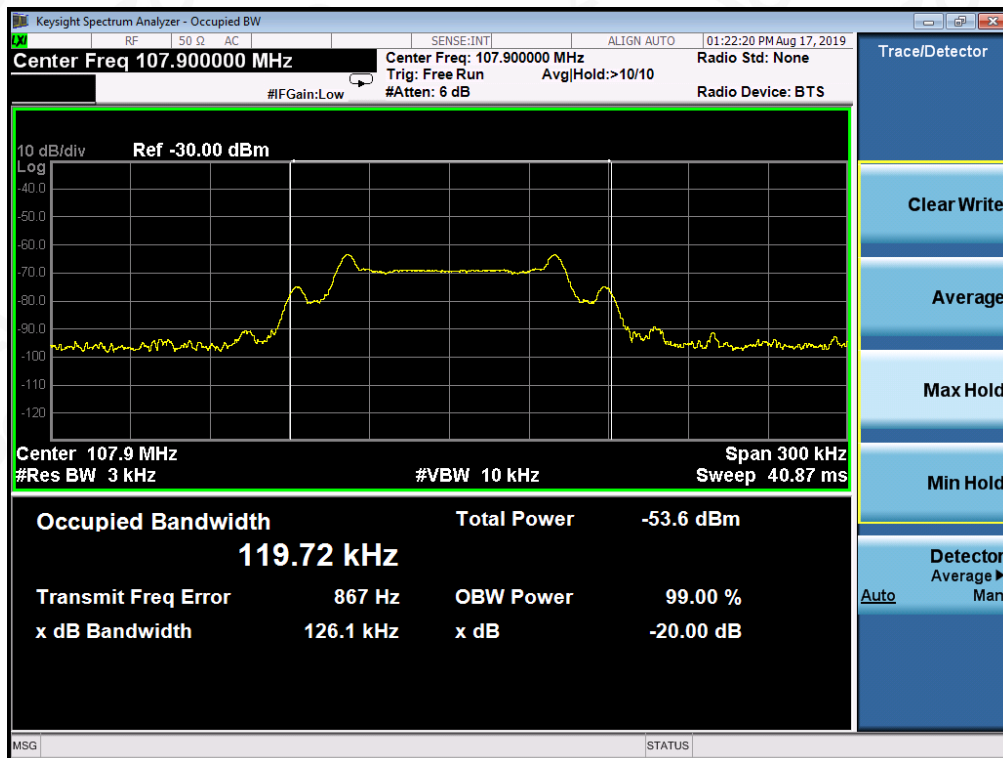

**APPENDIX A: PHOTOGRAPHS OF TEST SETUP**  
RADIATED EMISSION TEST SETUP BELOW 1G

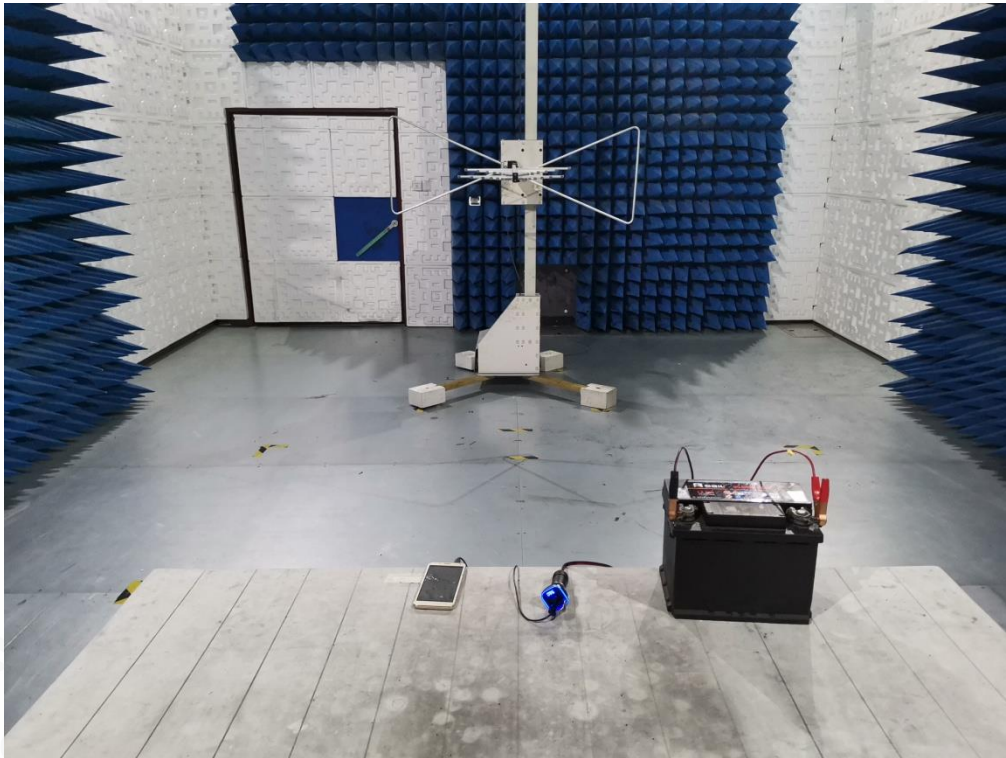



**APPENDIX B: PHOTOGRAPHS OF EUT**

TOP VIEW OF EUT



BOTTOM VIEW OF EUT



FRONT VIEW OF EUT



BACK VIEW OF EUT



LEFT VIEW OF EUT



RIGHT VIEW OF EUT



VIEW OF EUT(PORT)-1




VIEW OF EUT(PORT)-2




OPEN VIEW OF EUT-1




OPEN VIEW OF EUT-2

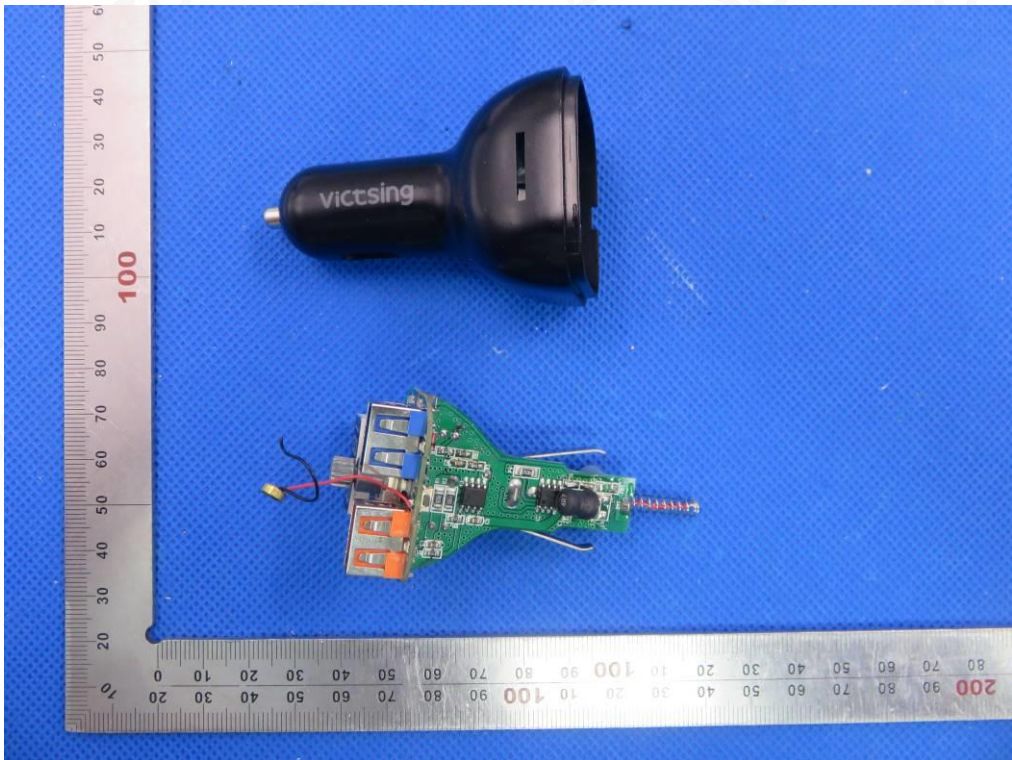


INTERNAL VIEW OF EUT-1

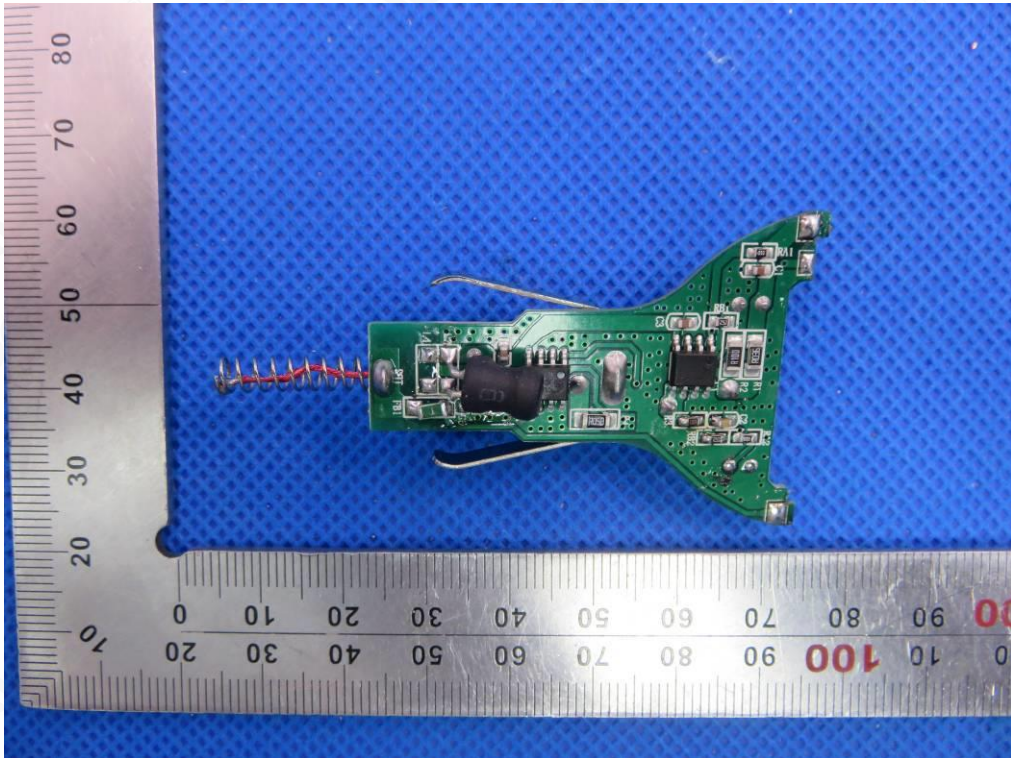


INTERNAL VIEW OF EUT-2

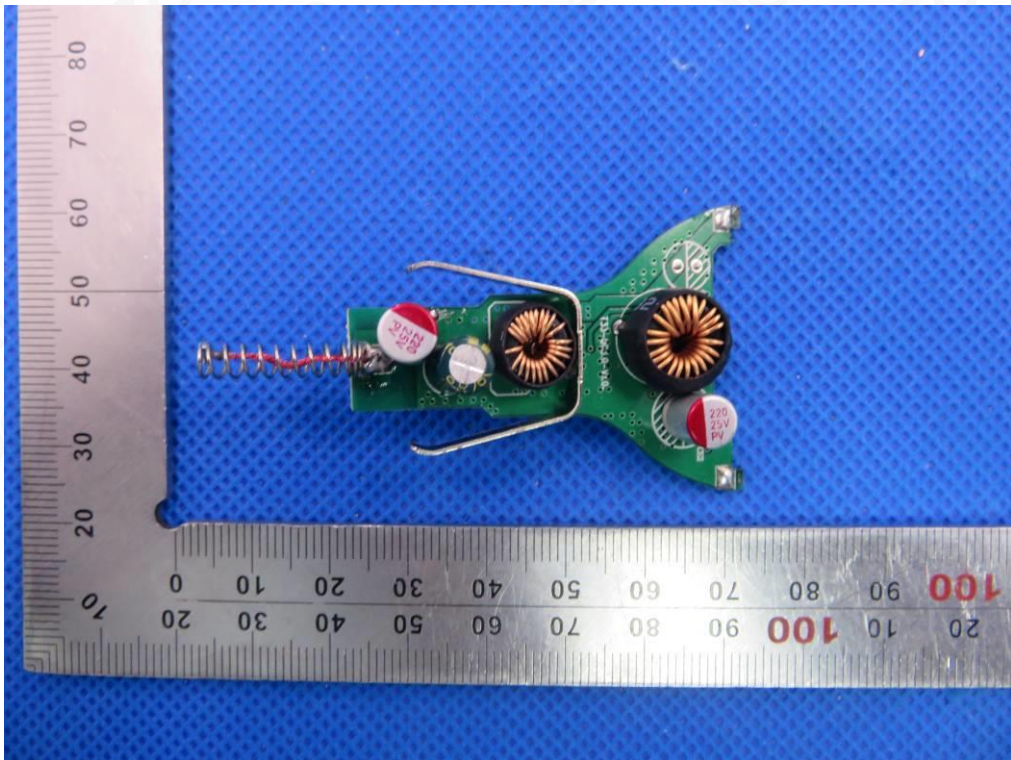


INTERNAL VIEW OF EUT-3

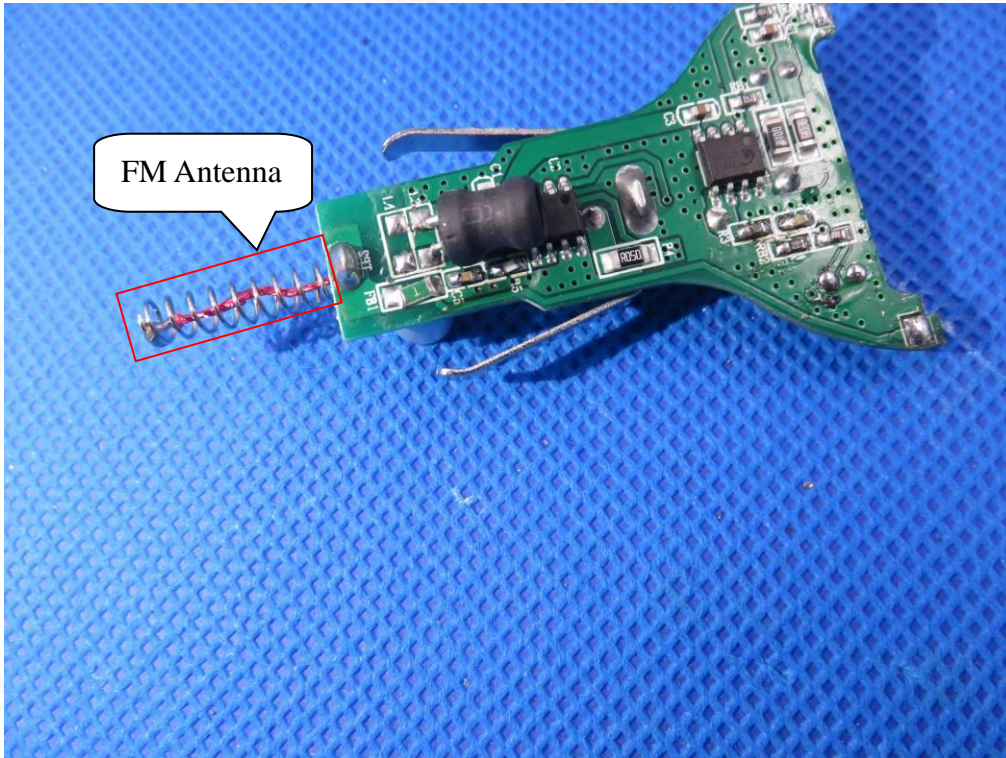


INTERNAL VIEW OF EUT-4

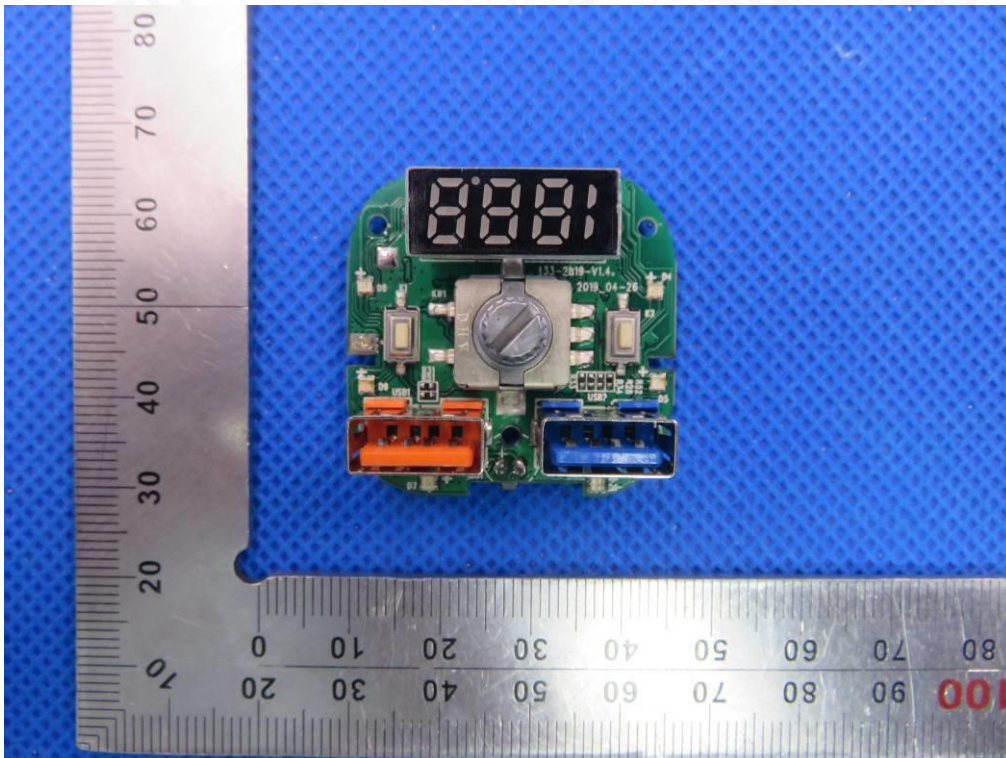

INTERNAL VIEW OF EUT-5

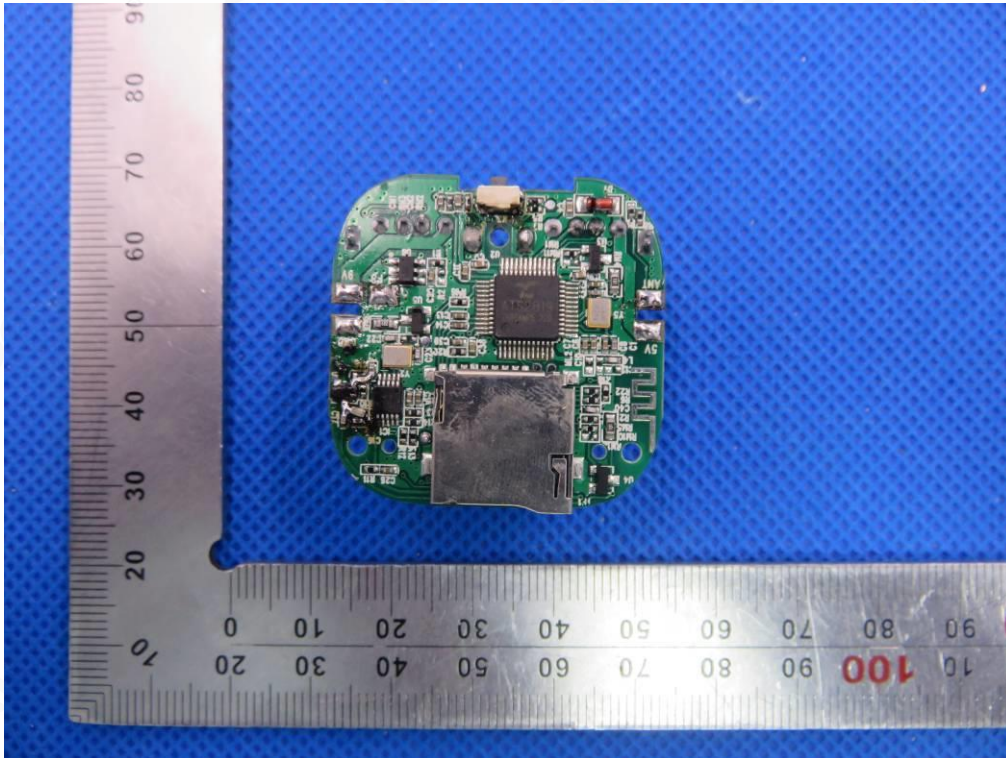


INTERNAL VIEW OF EUT-6

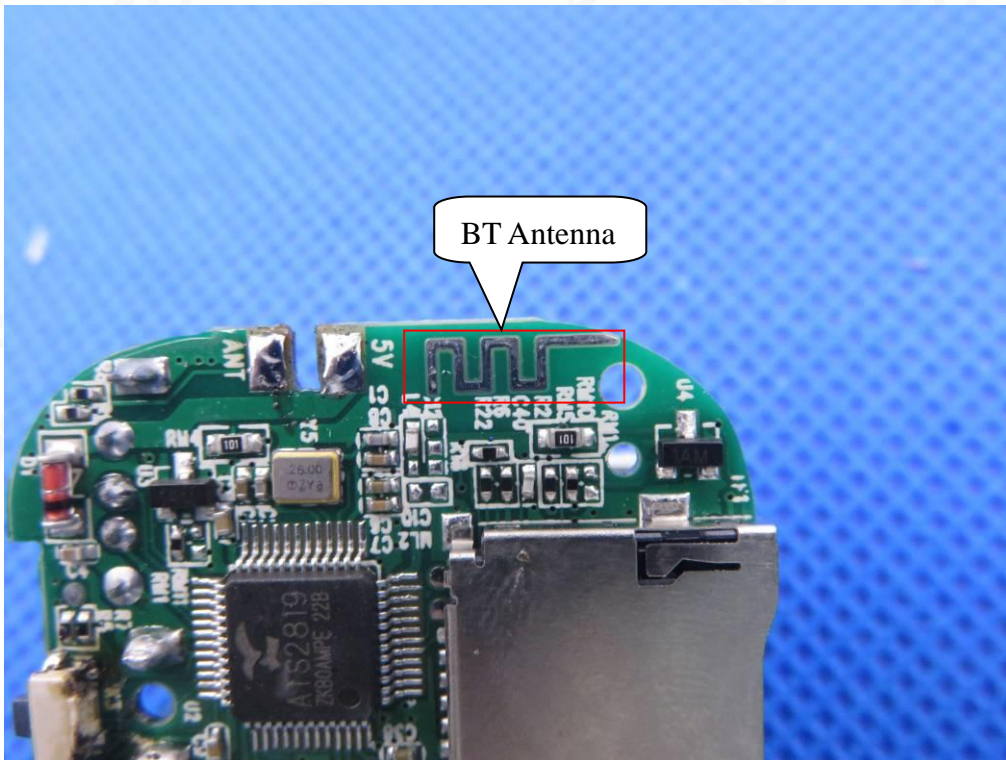



INTERNAL VIEW OF EUT-7

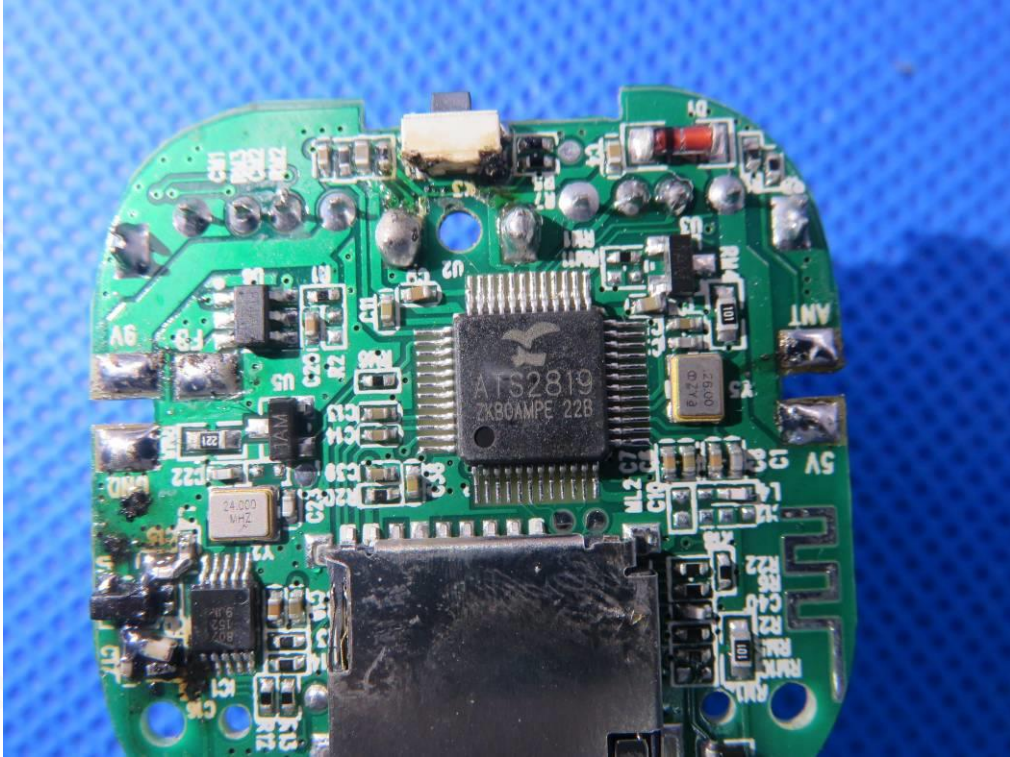

----END OF REPORT----

