

# FCC Part 15C Measurement and Test Report

For

VTIN TECHNOLOGY CO.,LIMITED

UNIT D 16/F ONE CAPITAL PLACE 21 LUARD ROAD WAN CHAI HK

**FCC ID: 2AIL4-PC269A**

**FCC Rule(s):** FCC Part 15.247

**Product Description:** Wireless multimode mouse

**Tested Model:** PC269A

**Report No.:** WTD19X11080512W-1

**Sample Receipt Date:** 2019-11-20

**Tested Date:** 2019-11-20 to 2019-12-13

**Issued Date:** 2019-12-13

**Tested By:** Jack Huang / Engineer

*Jack Huang*

**Reviewed By:** Silin Chen / EMC Manager

*Silin Chen*

**Approved & Authorized By:** Jandy So / PSQ Manager

*Jandy So*

**Prepared By:**

**Shenzhen SEM Test Technology Co., Ltd.**  
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn



Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>4</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
1.2 TEST STANDARDS	6
1.3 TEST METHODOLOGY	6
1.4 TEST FACILITY	6
1.5 EUT SETUP AND TEST MODE	7
1.6 MEASUREMENT UNCERTAINTY	7
1.7 TEST EQUIPMENT LIST AND DETAILS	8
<b>2. SUMMARY OF TEST RESULTS</b>	<b>10</b>
<b>3. RF EXPOSURE</b>	<b>11</b>
3.1 STANDARD APPLICABLE	11
3.2 TEST RESULT	11
<b>4. ANTENNA REQUIREMENT</b>	<b>12</b>
4.1 STANDARD APPLICABLE	12
4.2 EVALUATION INFORMATION	12
<b>5. POWER SPECTRAL DENSITY</b>	<b>13</b>
5.1 STANDARD APPLICABLE	13
5.2 TEST PROCEDURE	13
5.3 SUMMARY OF TEST RESULTS/PLOTS	13
<b>6. DTS BANDWIDTH</b>	<b>15</b>
6.1 STANDARD APPLICABLE	15
6.2 TEST PROCEDURE	15
6.3 SUMMARY OF TEST RESULTS/PLOTS	15
<b>7. RF OUTPUT POWER</b>	<b>17</b>
7.1 STANDARD APPLICABLE	17
7.2 TEST PROCEDURE	17
7.3 SUMMARY OF TEST RESULTS/PLOTS	17
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>19</b>
8.1 STANDARD APPLICABLE	19
8.2 TEST PROCEDURE	19
8.3 CORRECTED AMPLITUDE & MARGIN CALCULATION	20
8.4 SUMMARY OF TEST RESULTS/PLOTS	20
<b>9. OUT OF BAND EMISSIONS</b>	<b>28</b>
9.1 STANDARD APPLICABLE	28
9.2 TEST PROCEDURE	28
9.3 SUMMARY OF TEST RESULTS/PLOTS	29

## Report version

Version No.	Date of issue	Description
Rev.00	2019-12-13	Original
/	/	/

# 1. GENERAL INFORMATION

## 1.1 Product Description for Equipment Under Test (EUT)

### Client Information

Applicant: VTIN TECHNOLOGY CO.,LIMITED  
 Address of applicant: UNIT D 16/F ONE CAPITAL PLACE 21 LUARD ROAD WAN CHAI HK

Manufacturer: Dongguan Couso Technology Co.,Ltd  
 Address of manufacturer: No.26 Minye Road,Tangxia town,Dongguan City,China

General Description of EUT	
Product Name:	Wireless multimode mouse
Brand Name:	/
Model No.:	PC269A
Adding Model(s):	PC269B, PC269C, CS 1 OOG, CS2000G, CS3000G,
	CS3 I OOG, CS3200G, CS3300G, CS3400G, CS3500G,
	CS3600G,CS361 OG, CS3620G, CS3630G, CS3640G,
	CS3650G, CS3660G, CS3670G, CS3680G, CS3690,
	CS3700G, CS371 OG, CS3720G, CS3730G, CS3740G,
	CS3750G, CS3760G, CS3770G, CS3780G, CS3790G,
	CS3800G, CS38 I OG, CS3820G, CS3 830G, CS3840G,
	CS3 850G, CS3 860G, CS3 870G, CS3 880G, CS3890G,
	CS4000G, CS4100G, CS4200G, CS4300G, CS4400G,
	CS4500G, CS4550G, CS4600G, CS4650G, CS4700G,
	CS4800G, CS4900G, CS5000G, CS51 OOG, CS5200G,
	CS5300G, CS5400G, CS5500G, CS5600G, CS5700G,
	CS5800G, CS5900G, CS6000G, CS61 OOG, CS6200G,
	CS6300G, CS6400G, CS6500G, CS6600G, . CS6700G,
	CS6800G, CS6900G, CS7000G, CS7 I OOG, CS7200G,
	CS7300G, CS7400G, CS7500G, CS7600G, CS7700G,
	CS7800G, CS7900G, CS8000G, CS81 OOG, CS8200G,
	S8300G, CS8400G, CS8500G, CS8600G, CS8700G,
	C CS8800G, CS8900G, CS9000G, CS9 J OOG, CS9200G,
	CS9300G, CS9400G, CS9500G, CS9600G, CS9700G,
CS9800G, CS9900G, ex I 00, CX120, CX130, CX140,	
CX150, CX160, CX170, CXI80, CX190, CK410B, CK910B,	
CS91 OOL, CS9200L, CK470TL, CS4570G, CS4380G,	
CK400G, CK410G, CK420G, CK430G, CK440G, CK450G,	
CK455G, CK465G, CK460G, CK470T, CK480G, CK490G,	
CK500G CK51 OG, CK520G, CK530G, CK540G, CK550G,	

	CK560G, CK570G, CK580G, CK590G, CK600G, CK601G, K700G, K710G, K720G, K730G, K740G, K750G, K760G, K770G, K78 OG.90G, CK900G, K910G, CK920G, CK921G, CK923G, CK927G, CK930G, CK940G, CK950G, CK960G, CK970G, CK980G, CK990G, CG I 6G, CM61 OG, CM61 JG, CM612G, CM613G, CM614G, CM615G, CM616G, CM617G, CM618G, CM619G, CM620G, CM621 G, M622G, CM623G, CM624G, CM625G, CM626G, CM627G, M628G, CM629G, CM630G, CM631 G, CM632G, CM633G, CM634G, CM635G, CM636G, CM637G, CM638G, CM639G, CM640G, CM650G, CM660G, CM670G, CM680G, CM690G, CM610B, CM620B, CM630B, CM640B, CM650B, CM660B, CM670B, CM680B, CM690B, CM840B, CM850B, CM860B, CM870B, CM800G, CM810G, CM815G, CM820G, CM830G, CM830B, CM840G, CM850G, CM860G, CM870G, CM880G, CM890G, CM89 I G, CM892G, CM893G, CM894G, CM895G, CM896G, CM897G, CM898G, CM899G, CM898GL, CM800B, CM8 I OB, M8 J 5B, CM820B, CM830B, CM840B, CM850B, CM860B, CM870B, CM880B, CM891B, CM892B, CM893B, CM894B, CM895B, CM896B, CM897B, CM898B, CM899B
Rated Voltage:	Battery: DC1.5V
Power Adapter:	/
Software Version:	V1.1
Hardware Version:	2LP.M880G-2013 V1.1
<p><i>Note: The test data is gathered from a production sample, provided by the manufacturer. The appearance of others models listed in the report is different from main-test model PC269A, but the circuit and the electronic construction do not change, declared by the manufacturer.</i></p>	

<b>Technical Characteristics of EUT</b>	
Bluetooth Version:	V5.0 (BLE mode)
Frequency Range:	2402-2480MHz
RF Output Power:	4.759dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	PCB Antenna
Antenna Gain:	-0.61dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.247:** Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz.

**558074 D01 15.247 Meas Guidance v05r02:** Guidance For Compliance Measurements On Digital Transmission System, Frequency Hopping Spread Spectrum System, And Hybrid System Devices Operating Under Section 15.247 Of The Fcc Rules

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, KDB 558074 D01 15.247 Meas Guidance v05r02.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### Address of the test laboratory

Laboratory: Shenzhen SEM Test Technology Co., Ltd.

Address: 1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road, Bao'an District, Shenzhen, P.R.C. (518101)

### FCC – Registration No.: 125990

Shenzhen SEM Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files. The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### Industry Canada (IC) Registration No.: 11464A

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, with a duty cycle equal to 100%, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low	2402MHz
TM2	Middle	2440MHz
TM3	High	2480MHz

Test Conditions	
Temperature:	22~25 °C
Relative Humidity:	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Notebook	Lenovo	E445	EB12648265

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Power Spectral Density	Conducted	$\pm 1.8\text{dB}$
Conducted Spurious Emission	Conducted	$\pm 2.17\text{dB}$
Conducted Emissions	Conducted	9-150kHz $\pm 3.74\text{dB}$
		0.15-30MHz $\pm 3.34\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2019-04-30	2020-04-29
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2019-04-30	2020-04-29
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2019-04-30	2020-04-29
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2019-04-30	2020-04-29
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2019-04-30	2020-04-29
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2019-05-05	2021-05-04
SEMT-1042	Horn Antenna	ETS	3117	00086197	2019-05-05	2021-05-04
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2019-05-05	2021-05-04
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2019-05-05	2021-05-04
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2019-04-30	2020-04-29
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2019-04-30	2020-04-29
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2019-04-30	2020-04-29
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2019-04-30	2020-04-29
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2019-04-30	2020-04-29
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2019-04-30	2020-04-29
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2019-05-05	2021-05-04
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2019-04-30	2020-04-29
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2019-04-30	2020-04-29
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2019-04-30	2020-04-29
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2019-03-18	2020-03-17
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2019-03-18	2020-03-17
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2019-03-18	2020-03-17
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2019-03-18	2020-03-17
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2019-03-18	2020-03-17



<b>Software List</b>			
<b>Description</b>	<b>Manufacturer</b>	<b>Model</b>	<b>Version</b>
EMI Test Software (Radiated Emission)*	Farad	EZ-EMC	RA-03A1
EMI Test Software (Conducted Emission)*	Farad	EZ-EMC	RA-03A1

\*Remark: indicates software version used in the compliance certification testing

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§2.1093	RF Exposure	Compliant
§15.203; §15.247(b)(4)(i)	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§15.207(a)	Conducted Emission	N/A
§15.247(e)	Power Spectral Density	Compliant
§15.247(a)(2)	DTS Bandwidth	Compliant
§15.247(b)(3)	RF Output Power	Compliant
§15.209(a)	Radiated Emission	Compliant
§15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable. The product is powered by a DC power and has no charging function.

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to §1.1307 and §2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has a PCB antenna, fulfill the requirement of this section.

## 5. Power Spectral Density

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), for digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure




According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.10.2, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.3 Summary of Test Results/Plots

Test Mode	Test Channel	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
GFSK(BLE)	Low	-6.484	8
	Middle	-6.529	8
	High	-6.244	8

Please refer to the following test plots:
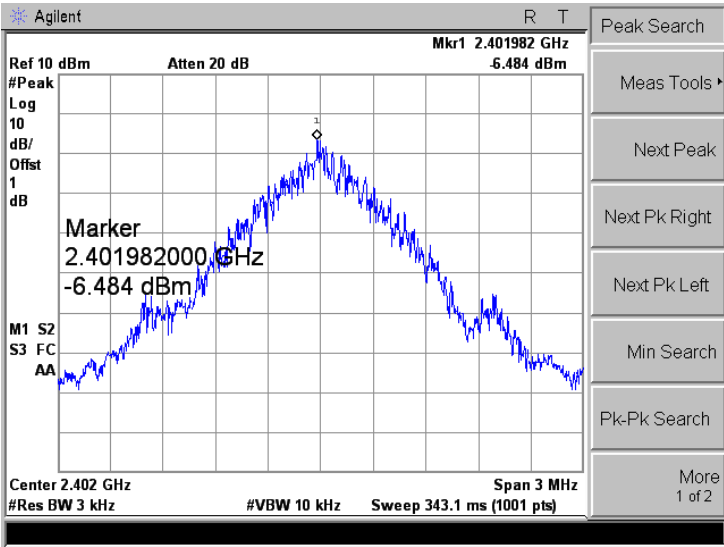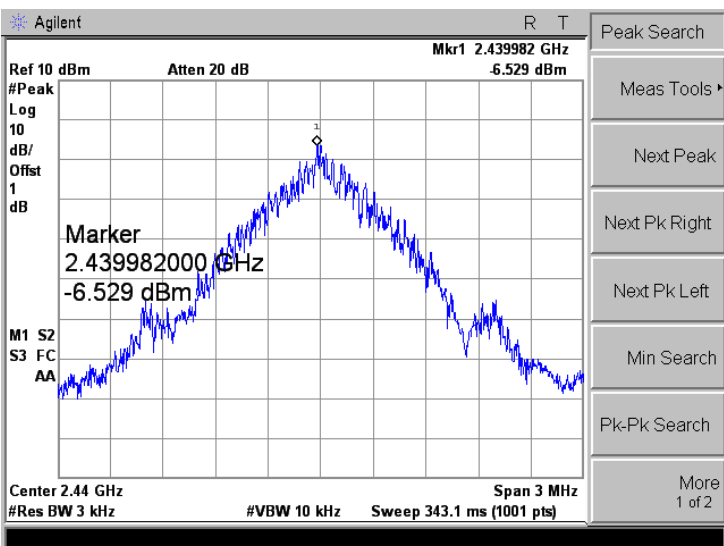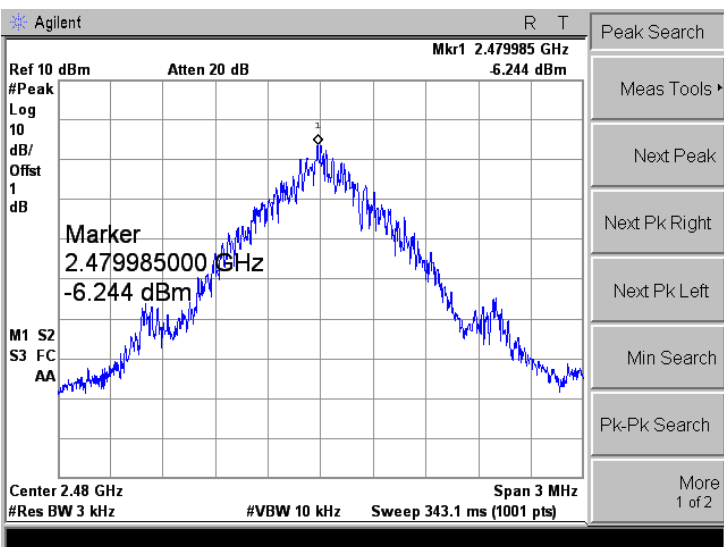
<p>Low</p>	 <p>Agilent R T          Ref 10 dBm Atten 20 dB Mkr1 2.401982 GHz -6.484 dBm          #Peak Log 10 dB/Offst 1 dB          Marker 2.401982000 GHz -6.484 dBm          M1 S2 S3 FC AA          Center 2.402 GHz Span 3 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts)</p>
<p>Middle</p>	 <p>Agilent R T          Ref 10 dBm Atten 20 dB Mkr1 2.439982 GHz -6.529 dBm          #Peak Log 10 dB/Offst 1 dB          Marker 2.439982000 GHz -6.529 dBm          M1 S2 S3 FC AA          Center 2.44 GHz Span 3 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts)</p>
<p>High</p>	 <p>Agilent R T          Ref 10 dBm Atten 20 dB Mkr1 2.479985 GHz -6.244 dBm          #Peak Log 10 dB/Offst 1 dB          Marker 2.479985000 GHz -6.244 dBm          M1 S2 S3 FC AA          Center 2.48 GHz Span 3 MHz          #Res BW 3 kHz #VBW 10 kHz Sweep 343.1 ms (1001 pts)</p>

## 6. DTS Bandwidth

---

### 6.1 Standard Applicable

According to 15.247(a)(2), systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Procedure




According to the KDB 558074 D01 v05r02 Subclause 8.2 and ANSI C63.10-2013 Subclause 11.8.1, the test method of DTS Bandwidth as below:

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Summary of Test Results/Plots

Test Mode	Test Channel	6 dB Bandwidth kHz	Limit kHz
GFSK(BLE)	Low	597.045	$\geq 500$
	Middle	545.021	$\geq 500$
	High	523.274	$\geq 500$

Please refer to the following test plots:
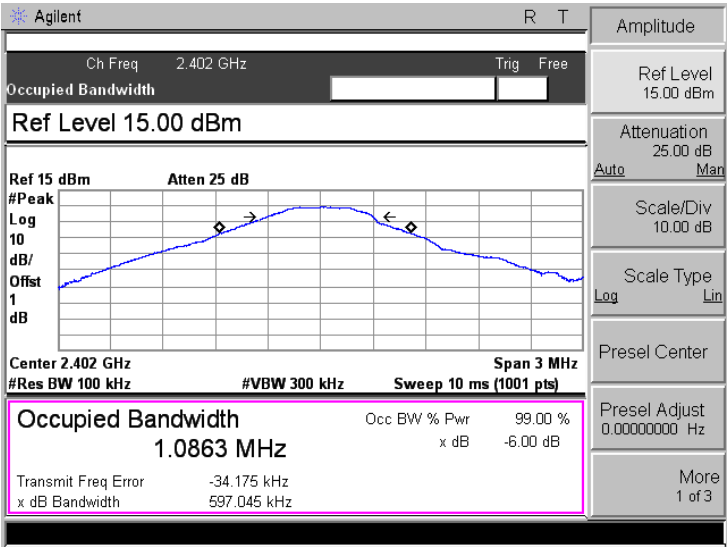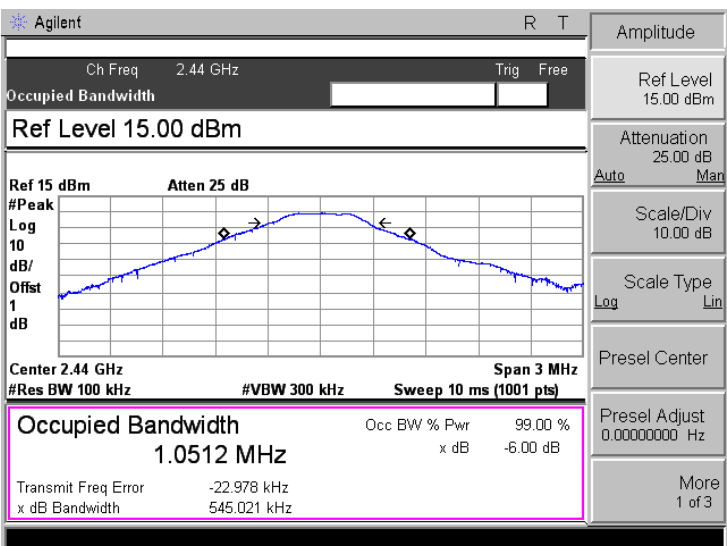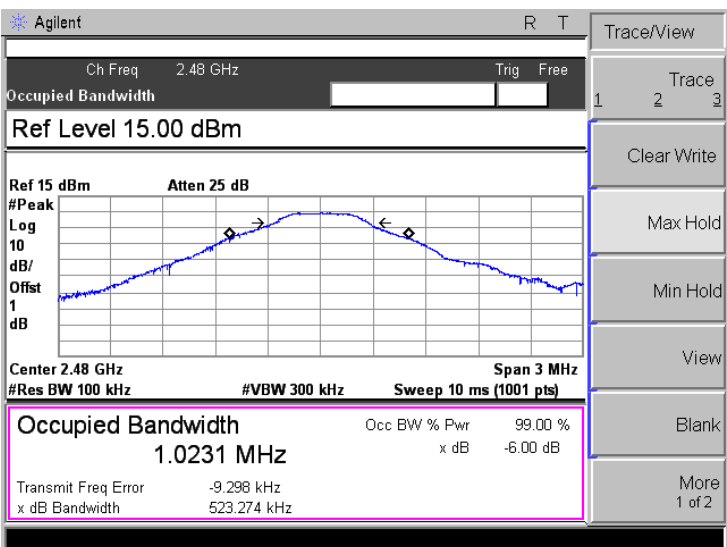
<p style="text-align: center;">Low</p>	 <p>Agilent R T</p> <p>Ch Freq 2.402 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref Level 15.00 dBm</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.402 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 1.0863 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -34.175 kHz x dB Bandwidth 597.045 kHz</p> <p>Amplitude: Ref Level 15.00 dBm, Attenuation 25.00 dB, Scale/Div 10.00 dB, Scale Type Log, Presel Center, Presel Adjust 0.00000000 Hz, More 1 of 3</p>
<p style="text-align: center;">Middle</p>	 <p>Agilent R T</p> <p>Ch Freq 2.44 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref Level 15.00 dBm</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.44 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 1.0512 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -22.978 kHz x dB Bandwidth 545.021 kHz</p> <p>Amplitude: Ref Level 15.00 dBm, Attenuation 25.00 dB, Scale/Div 10.00 dB, Scale Type Log, Presel Center, Presel Adjust 0.00000000 Hz, More 1 of 3</p>
<p style="text-align: center;">High</p>	 <p>Agilent R T</p> <p>Ch Freq 2.48 GHz Trig Free</p> <p>Occupied Bandwidth</p> <p>Ref Level 15.00 dBm</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/Offst 1 dB</p> <p>Center 2.48 GHz Span 3 MHz</p> <p>#Res BW 100 kHz #VBW 300 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> 1.0231 MHz</p> <p>Occ BW % Pwr 99.00 % x dB -6.00 dB</p> <p>Transmit Freq Error -9.298 kHz x dB Bandwidth 523.274 kHz</p> <p>Trace/View: Trace 1 2 3, Clear Write, Max Hold, Min Hold, View, Blank, More 1 of 2</p>



## 7. RF Output Power

### 7.1 Standard Applicable

According to 15.247(b)(3), for systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.




### 7.2 Test Procedure

According to the KDB-558074 D01 v05r02 Subclause 8.3.1.1 and ANSI C63.10-2013 Subclause 11.9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### 7.3 Summary of Test Results/Plots

Test Mode	Test Channel	Reading dBm	Output Power mW	Limit mW
GFSK(BLE)	Low	4.676	2.93	1000
	Middle	4.699	2.95	1000
	High	4.759	2.99	1000
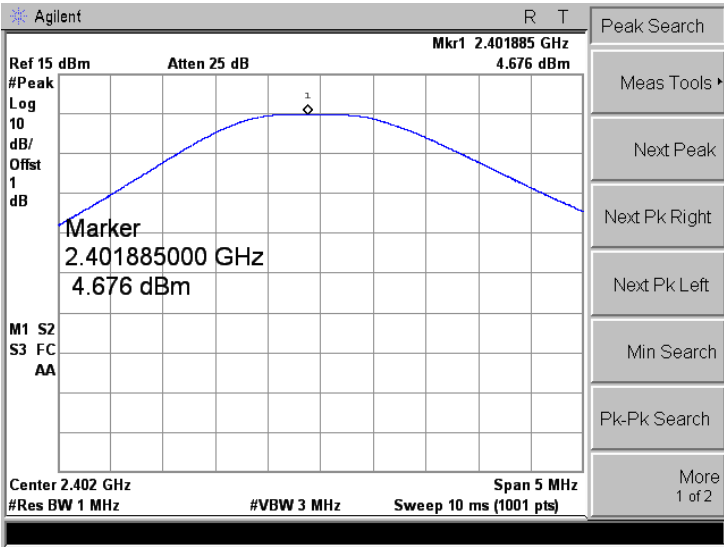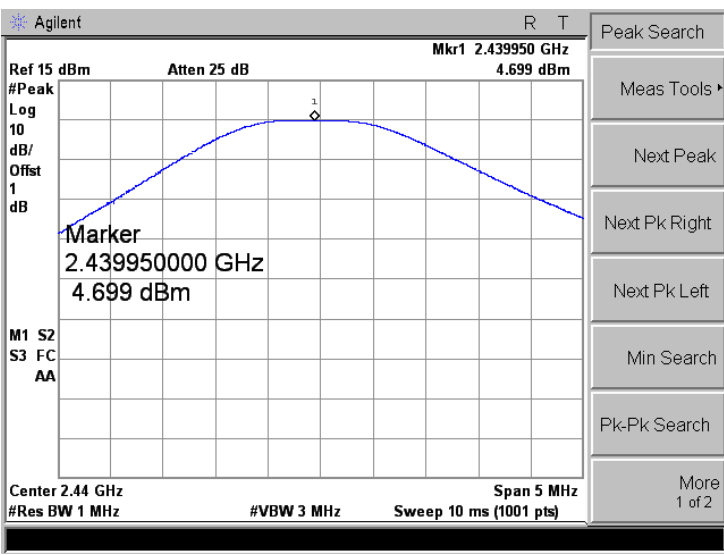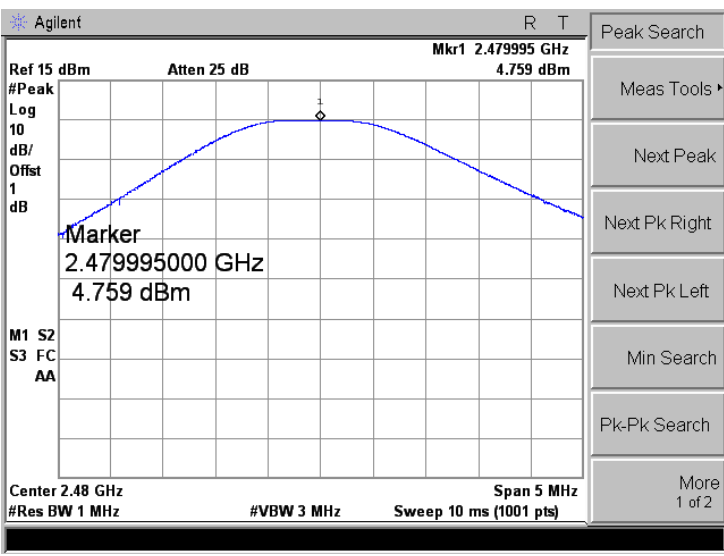
<p>Low</p>	 <p>Agilent R T          Ref 15 dBm Atten 25 dB Mkr1 2.401885 GHz 4.676 dBm          #Peak          Log 10          dB/ Offst 1 dB          Marker          2.401885000 GHz          4.676 dBm          M1 S2          S3 FC          AA          Center 2.402 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)          Peak Search          Meas Tools          Next Peak          Next Pk Right          Next Pk Left          Min Search          Pk-Pk Search          More 1 of 2</p>
<p>Middle</p>	 <p>Agilent R T          Ref 15 dBm Atten 25 dB Mkr1 2.439950 GHz 4.699 dBm          #Peak          Log 10          dB/ Offst 1 dB          Marker          2.439950000 GHz          4.699 dBm          M1 S2          S3 FC          AA          Center 2.44 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)          Peak Search          Meas Tools          Next Peak          Next Pk Right          Next Pk Left          Min Search          Pk-Pk Search          More 1 of 2</p>
<p>High</p>	 <p>Agilent R T          Ref 15 dBm Atten 25 dB Mkr1 2.479995 GHz 4.759 dBm          #Peak          Log 10          dB/ Offst 1 dB          Marker          2.479995000 GHz          4.759 dBm          M1 S2          S3 FC          AA          Center 2.48 GHz Span 5 MHz          #Res BW 1 MHz #VBW 3 MHz Sweep 10 ms (1001 pts)          Peak Search          Meas Tools          Next Peak          Next Pk Right          Next Pk Left          Min Search          Pk-Pk Search          More 1 of 2</p>

## 8. Field Strength of Spurious Emissions

### 8.1 Standard Applicable


According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).


The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 8.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

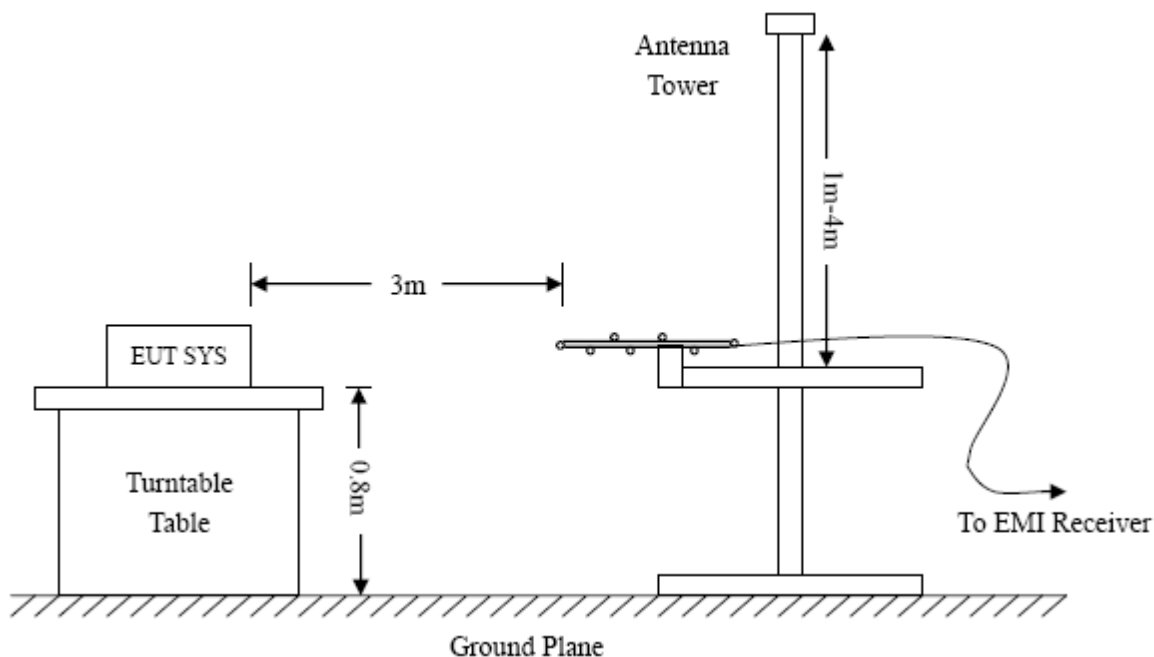

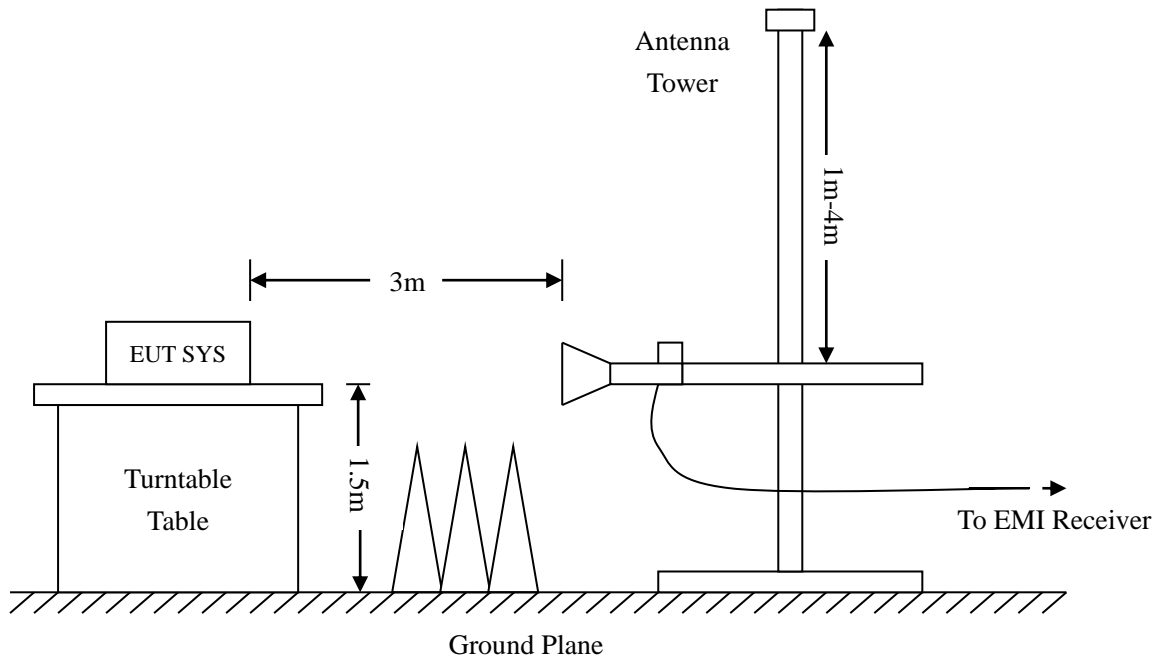

Frequency :9kHz-30MHz

RBW=10KHz,

VBW =30KHz

Sweep time= Auto

Trace = max hold

Detector function = peak

Frequency :30MHz-1GHz

RBW=120KHz,

VBW=300KHz

Sweep time= Auto

Trace = max hold

Detector function = peak, QP

Frequency :Above 1GHz

RBW=1MHz,

VBW=3MHz(Peak), 10Hz(AV)

Sweep time= Auto

Trace = max hold

Detector function = peak, AV

### 8.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

### 8.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


➤ Spurious Emissions Below 1GHz

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

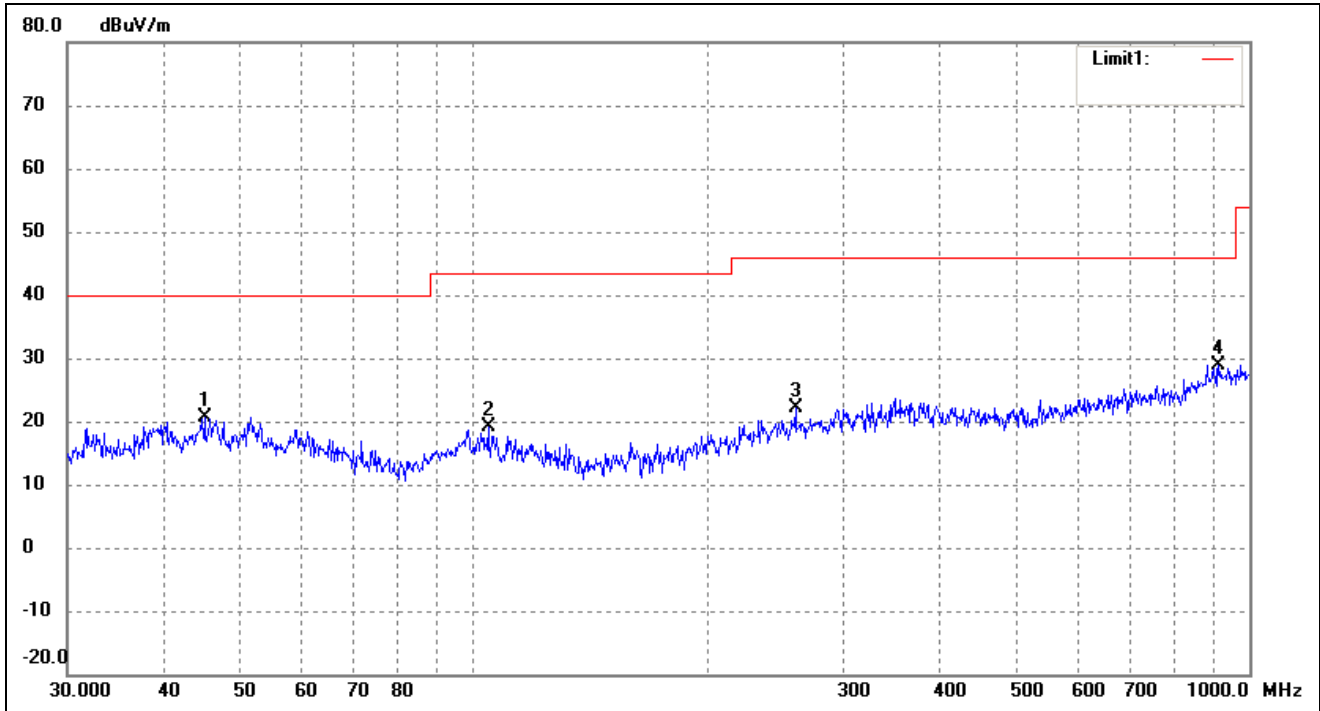


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	45.0583	34.54	-13.93	20.61	40.00	-19.39	263	100	peak
2	104.5361	33.88	-14.86	19.02	43.50	-24.48	92	100	peak
3	260.1444	32.48	-10.28	22.20	46.00	-23.80	53	100	peak
4	912.8620	29.92	-0.99	28.93	46.00	-17.07	208	100	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

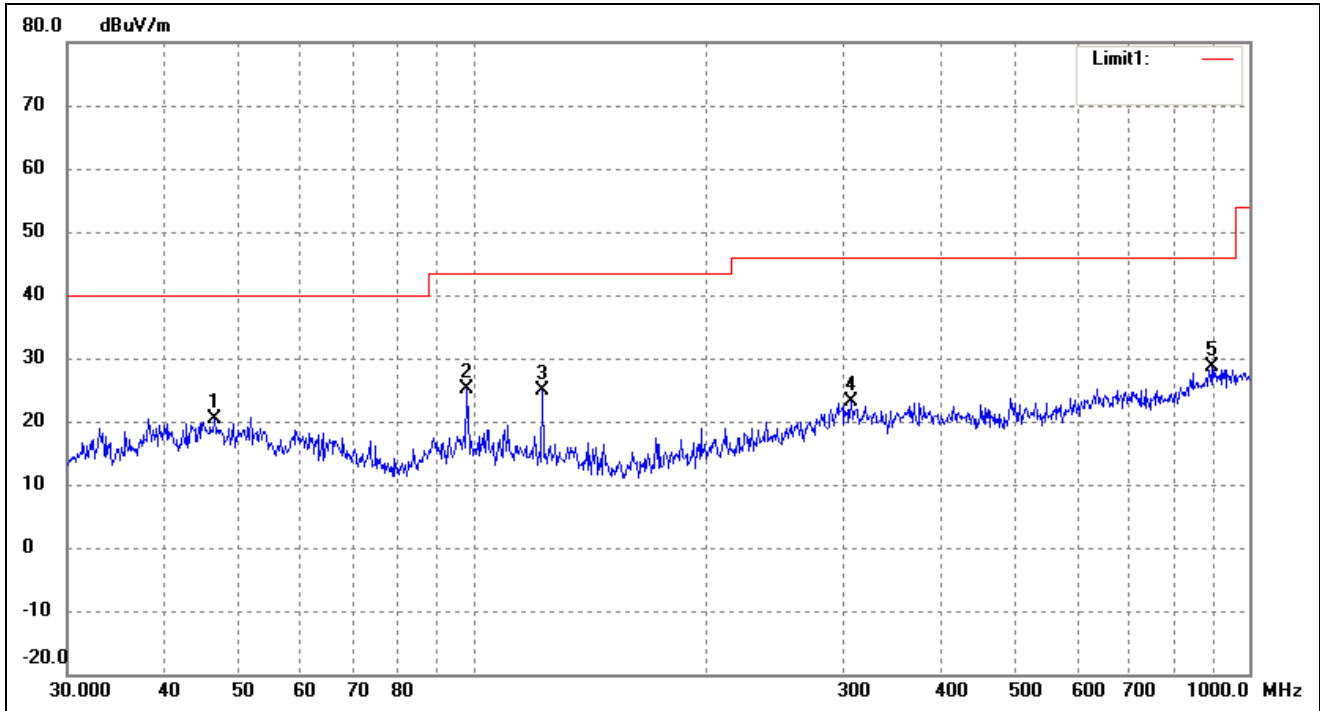


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.5030	34.33	-13.85	20.48	40.00	-19.52	284	100	peak
2	98.1419	40.44	-15.29	25.15	43.50	-18.35	92	100	peak
3	122.8340	41.33	-16.34	24.99	43.50	-18.51	242	100	peak
4	306.7537	31.12	-8.00	23.12	46.00	-22.88	115	100	peak
5	893.8567	30.13	-1.48	28.65	46.00	-17.35	176	100	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

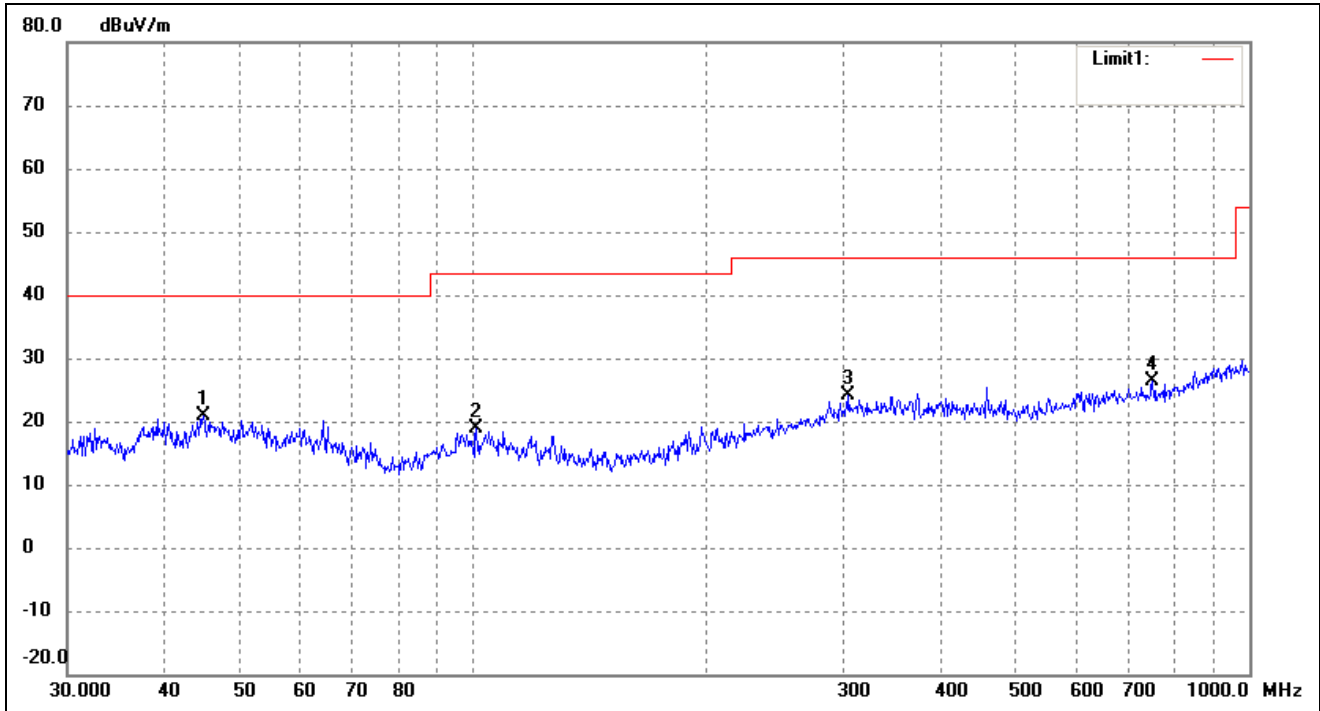

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	44.9006	34.94	-13.94	21.00	40.00	-19.00	268	100	peak
2	100.9340	33.73	-14.91	18.82	43.50	-24.68	95	100	peak
3	304.6100	31.97	-7.95	24.02	46.00	-21.98	188	100	peak
4	750.1083	31.00	-4.61	26.39	46.00	-19.61	105	100	peak


Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

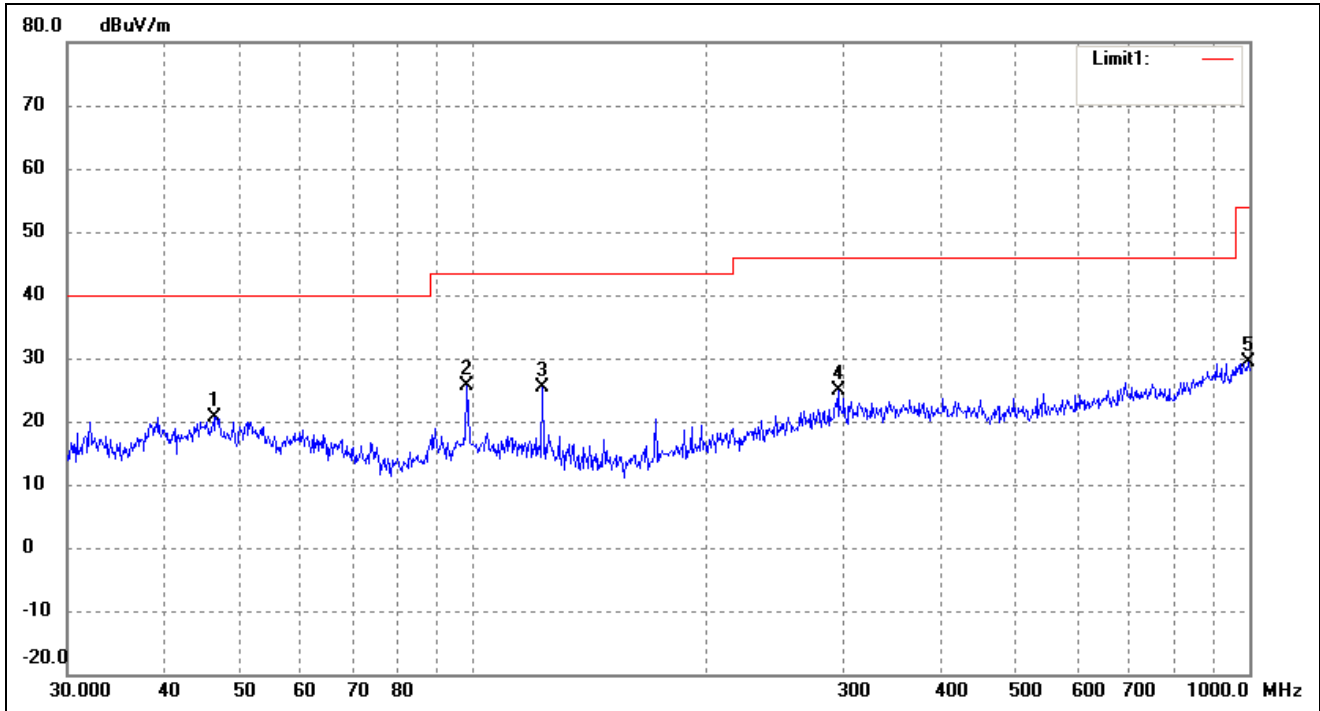

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	46.5030	34.55	-13.85	20.70	40.00	-19.30	154	100	peak
2	98.1419	40.86	-15.29	25.57	43.50	-17.93	247	100	peak
3	122.8340	41.64	-16.34	25.30	43.50	-18.20	62	100	peak
4	295.1469	33.10	-8.24	24.86	46.00	-21.14	312	100	peak
5	996.4996	29.81	-0.48	29.33	54.00	-24.67	99	100	peak




Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

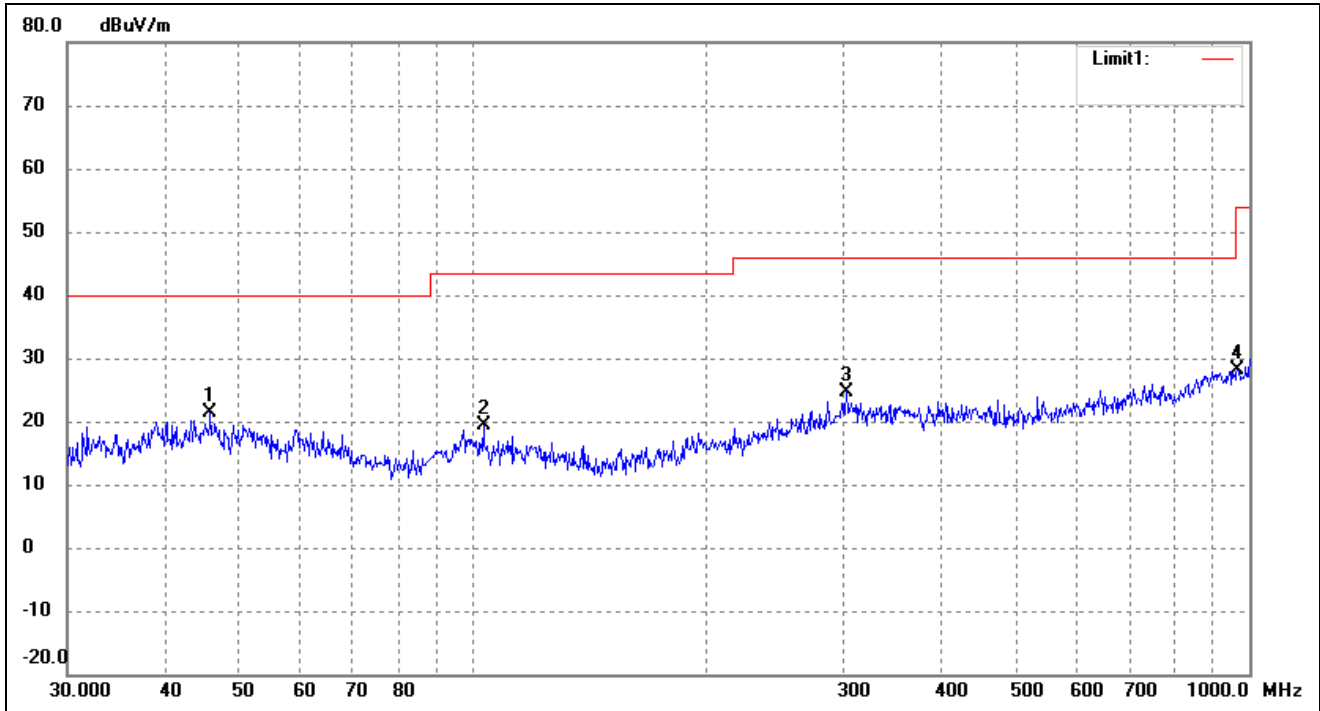

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	45.8553	35.17	-13.88	21.29	40.00	-18.71	228	100	peak
2	103.0800	34.16	-14.88	19.28	43.50	-24.22	187	100	peak
3	302.4812	32.48	-7.89	24.59	46.00	-21.41	148	100	peak
4	965.5421	29.12	-1.02	28.10	54.00	-25.90	131	100	peak

Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

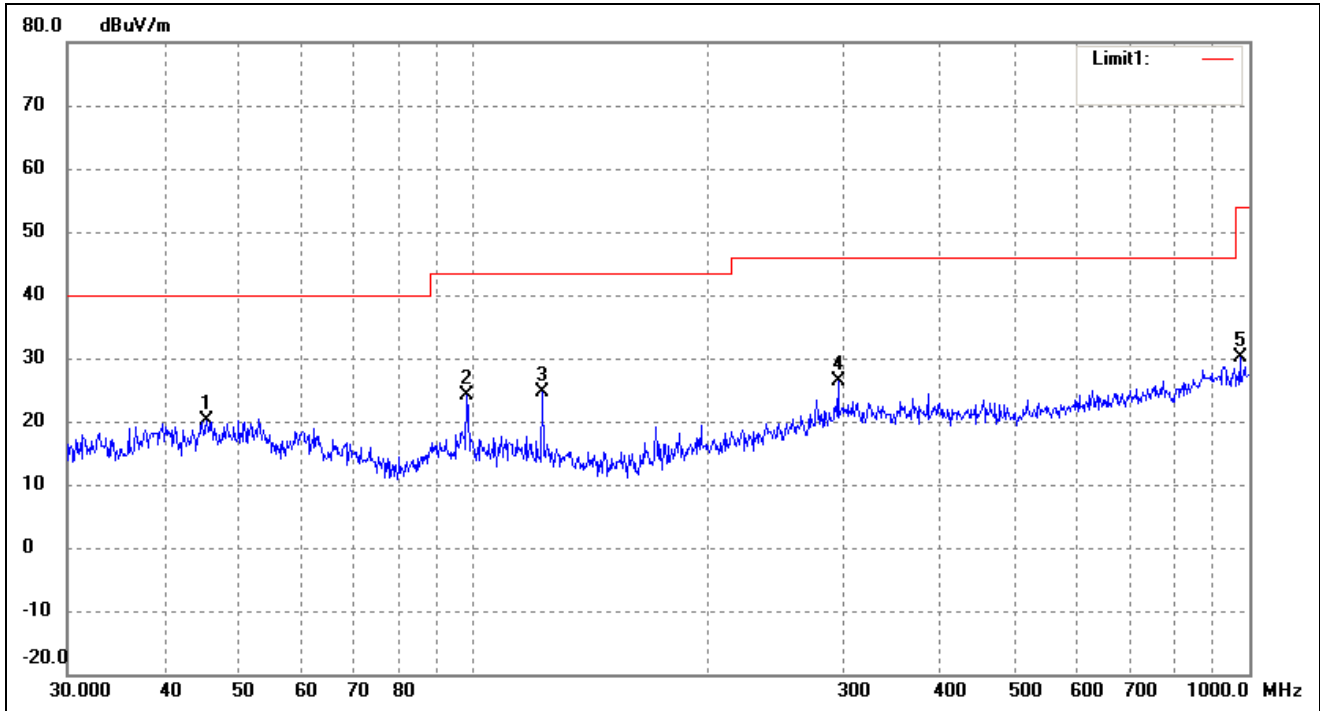

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	45.3755	34.11	-13.91	20.20	40.00	-19.80	296	100	peak
2	98.1419	39.44	-15.29	24.15	43.50	-19.35	191	100	peak
3	122.8340	40.87	-16.34	24.53	43.50	-18.97	59	100	peak
4	295.1469	34.66	-8.24	26.42	46.00	-19.58	242	100	peak
5	972.3374	31.07	-0.96	30.11	54.00	-23.89	188	100	peak

## ➤ Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	60.17	-3.41	56.76	74	-17.24	H	PK
4804	42.39	-3.41	38.98	54	-15.02	H	AV
7206	59.92	-0.42	59.50	74	-14.50	H	PK
7206	41.59	-0.42	41.17	54	-12.83	H	AV
4804	62.42	-3.41	59.01	74	-14.99	V	PK
4804	40.49	-3.41	37.08	54	-16.92	V	AV
7206	57.01	-0.42	56.59	74	-17.41	V	PK
7206	37.24	-0.42	36.82	54	-17.18	V	AV
Middle Channel-2440MHz							
4880	61.81	-3.41	58.40	74	-15.60	H	PK
4880	43.98	-3.41	40.57	54	-13.43	H	AV
7320	59.64	-0.42	59.22	74	-14.78	H	PK
7320	41.47	-0.42	41.05	54	-12.95	H	AV
4880	63.61	-3.41	60.20	74	-13.80	V	PK
4880	40.76	-3.41	37.35	54	-16.65	V	AV
7320	59.33	-0.42	58.91	74	-15.09	V	PK
7320	38.56	-0.42	38.14	54	-15.86	V	AV
High Channel-2480MHz							
4960	60.19	-3.41	56.78	74	-17.22	H	PK
4960	42.55	-3.41	39.14	54	-14.86	H	AV
7440	61.07	-0.42	60.65	74	-13.35	H	PK
7440	42.84	-0.42	42.42	54	-11.58	H	AV
4960	62.46	-3.41	59.05	74	-14.95	V	PK
4960	40.36	-3.41	36.95	54	-17.05	V	AV
7440	57.12	-0.42	56.70	74	-17.30	V	PK
7440	39.69	-0.42	39.27	54	-14.73	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

---

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074 D01 v05r02 Subclause 8.4 and ANSI C63.10-2013 Subclause 11.11, the Emissions in nonrestricted frequency bands test method as follows:

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW  $\geq [3 \times \text{RBW}]$ .
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

According to the KDB 558074 D01 v05r02 Subclause 8.5 and ANSI C63.10-2013 Subclause 11.12, the Emissions in restricted frequency bands test method as follows:

#### A. Radiated emission measurements:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

## B. Antenna-port conducted measurements

Peak emission levels are measured by setting the instrument as follows:

- a) RBW = as specified in Table 9/
- b) VBW  $\geq [3 \times \text{RBW}]$ .
- c) Detector = peak.
- d) Sweep time = auto.
- e) Trace mode = max hold.
- f) Allow sweeps to continue until the trace stabilizes. (Note that the required measurement time may be lengthened for low-duty-cycle applications.)

**Table 9—RBW as a function of frequency**

Frequency	RBW
9 kHz to 150 kHz	200 Hz to 300 Hz
0.15 MHz to 30 MHz	9 kHz to 10 kHz
30 MHz to 1000 MHz	100 kHz to 120 kHz
>1000 MHz	1 MHz


If the peak-detected amplitude can be shown to comply with the average limit, then it is not necessary to perform a separate average measurement.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

## 9.3 Summary of Test Results/Plots


➤ Radiated test

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

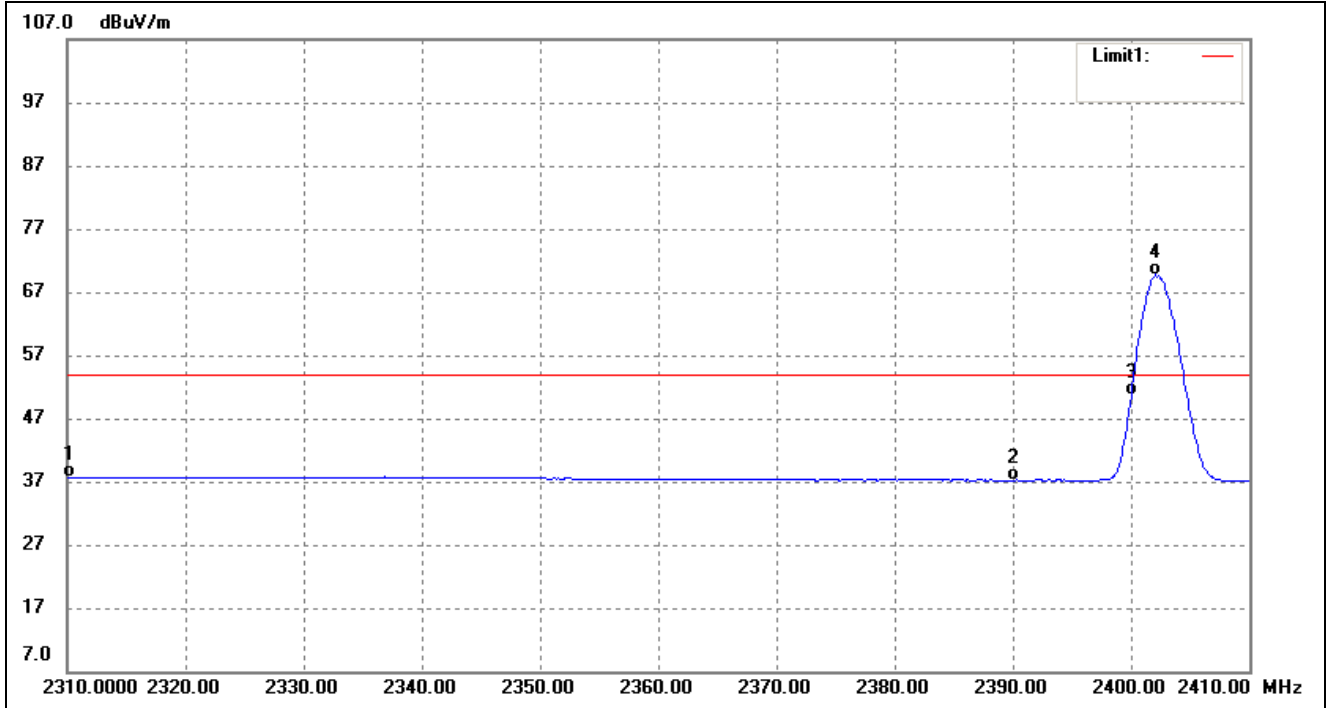

No.	Frequency (MHz)	Reading (dBuV/m)	Correct Factor(dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	47.34	-9.66	37.68	54.00	-16.32	Average Detector
		58.60	-9.66	48.94	74.00	-25.06	Peak Detector
2	2390.000	46.70	-9.50	37.20	54.00	-16.80	Average Detector
		58.21	-9.50	48.71	74.00	-25.29	Peak Detector
3	2400.000	60.12	-9.48	50.64	54.00	-3.36	Average Detector
		78.98	-9.48	69.50	74.00	-4.50	Peak Detector
4	2402.100	79.22	-9.47	69.75	/	/	Average Detector
		90.36	-9.48	80.88	/	/	Peak Detector



Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

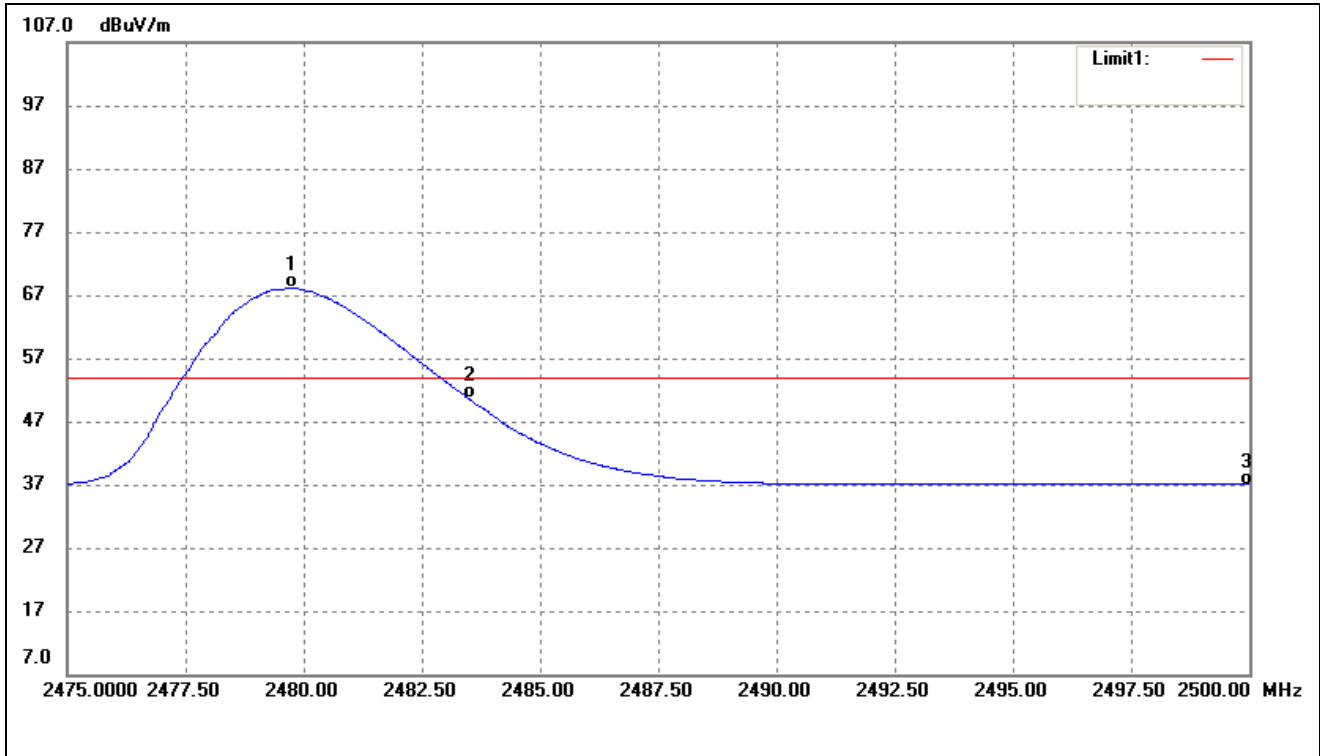

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.750	77.54	-9.32	68.22	/	/	Average Detector
	2480.650	103.09	-9.32	93.77	/	/	Peak Detector
2	2483.500	59.88	-9.31	50.57	54.00	-3.43	Average Detector
	2483.500	74.97	-9.31	65.66	74.00	-8.34	Peak Detector
3	2500.000	46.28	-9.28	37.00	54.00	-17.00	Average Detector
	2500.000	57.45	-9.28	48.17	74.00	-25.83	Peak Detector



➤ Conducted test

Low

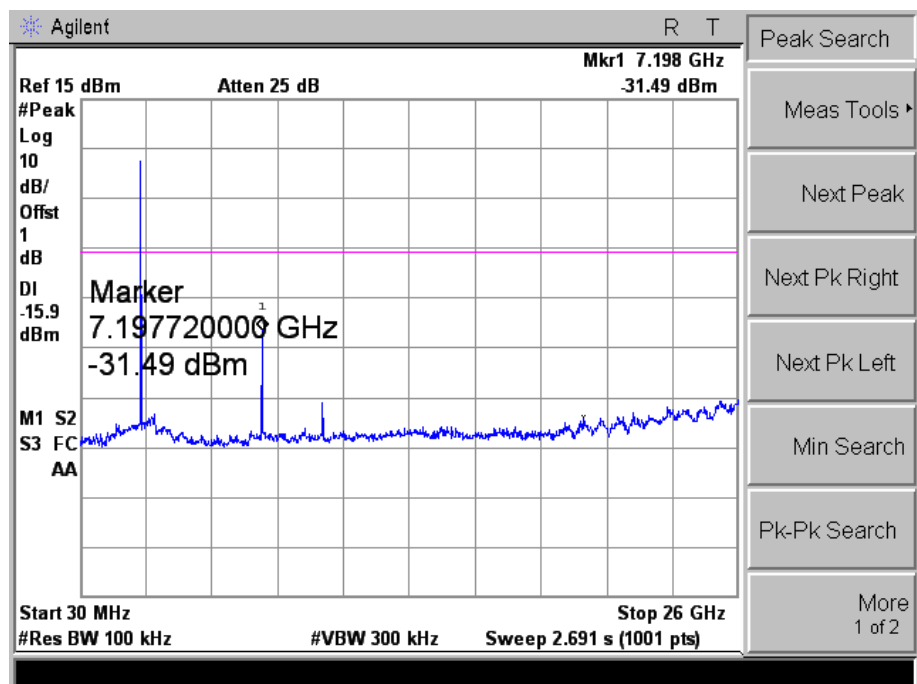
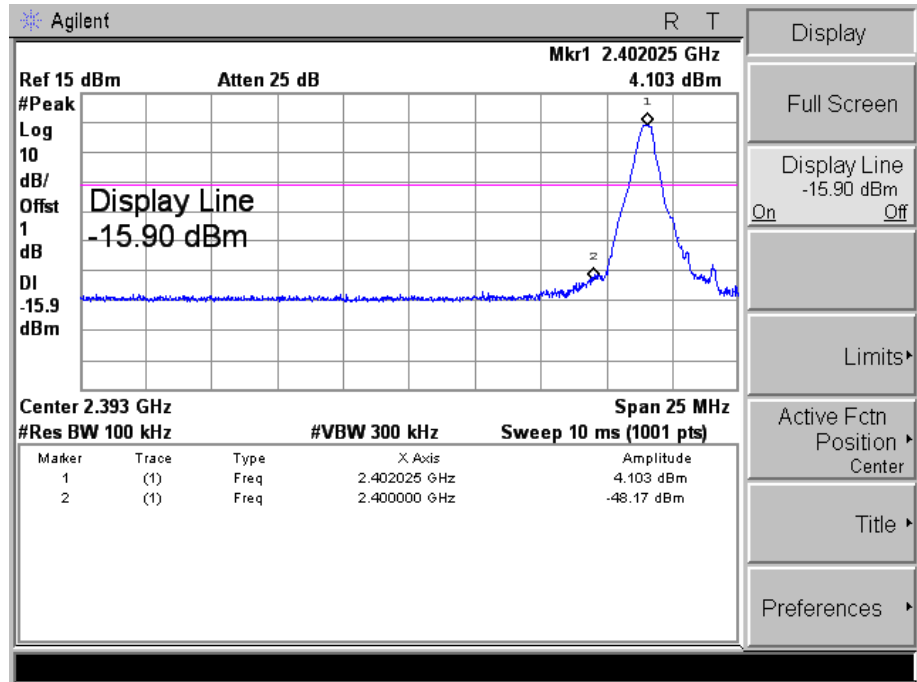




Middle

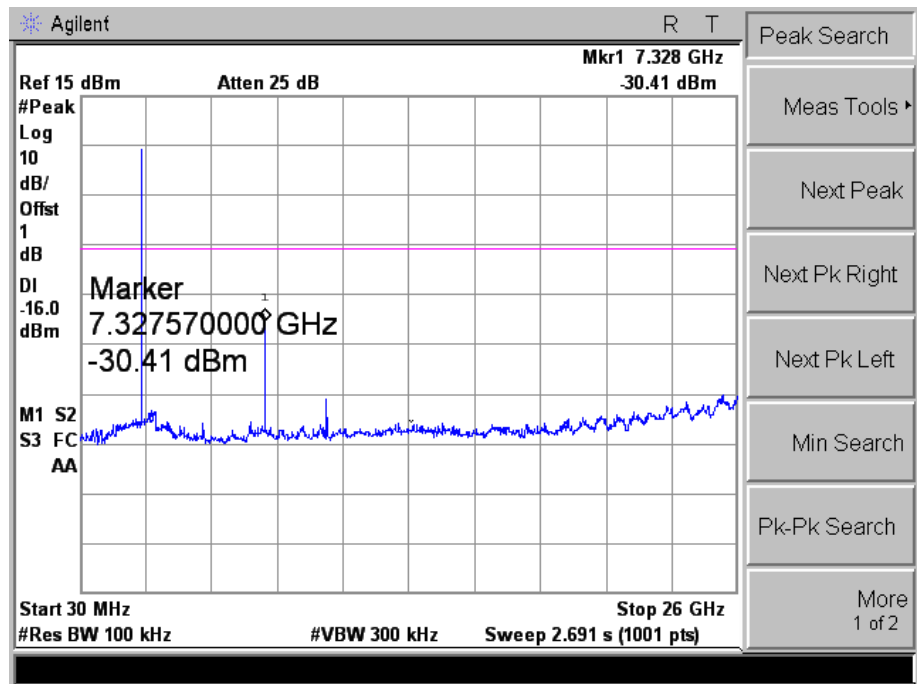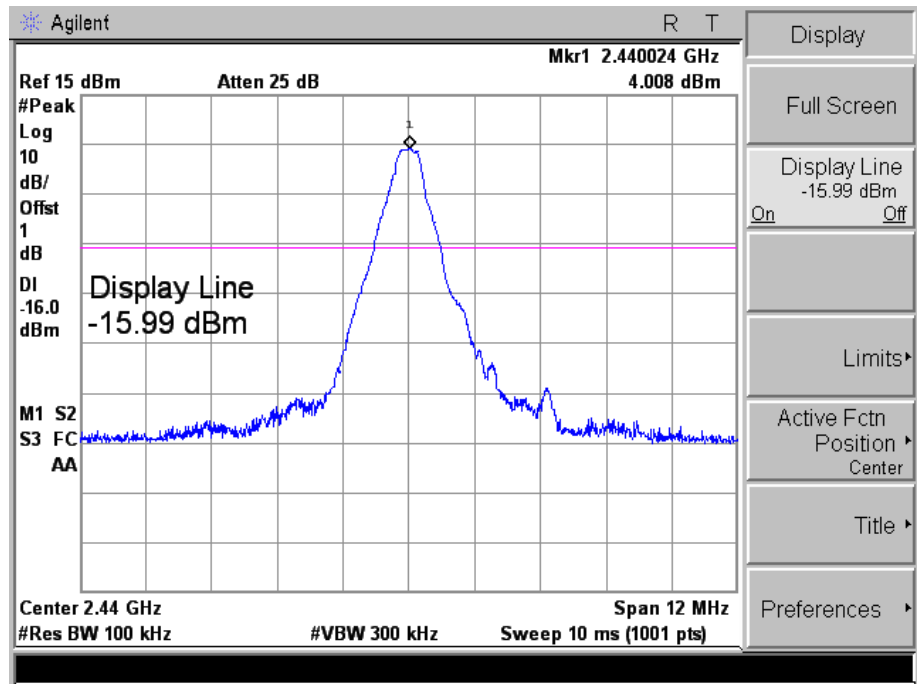

High

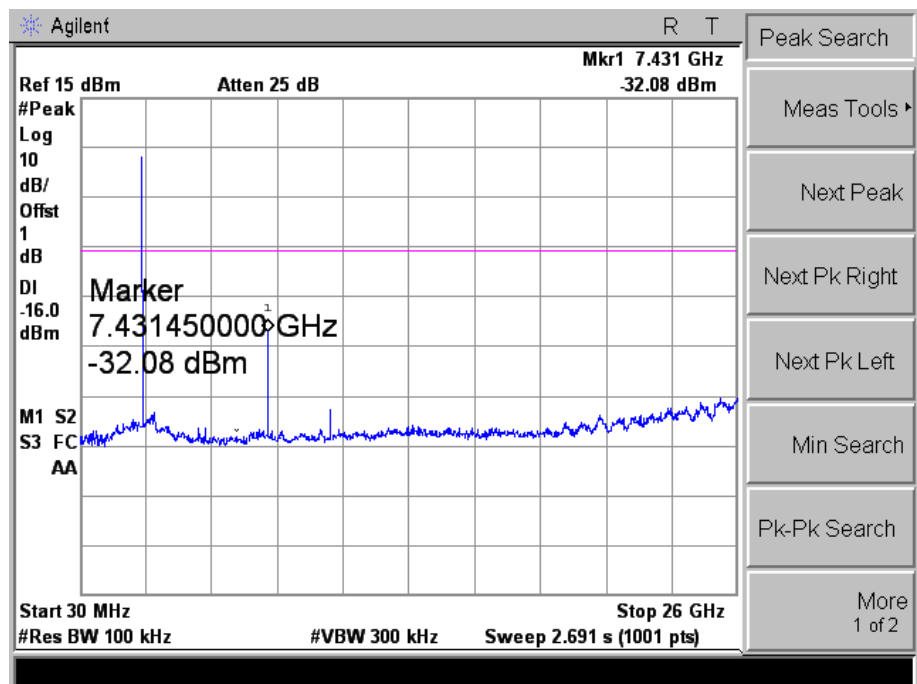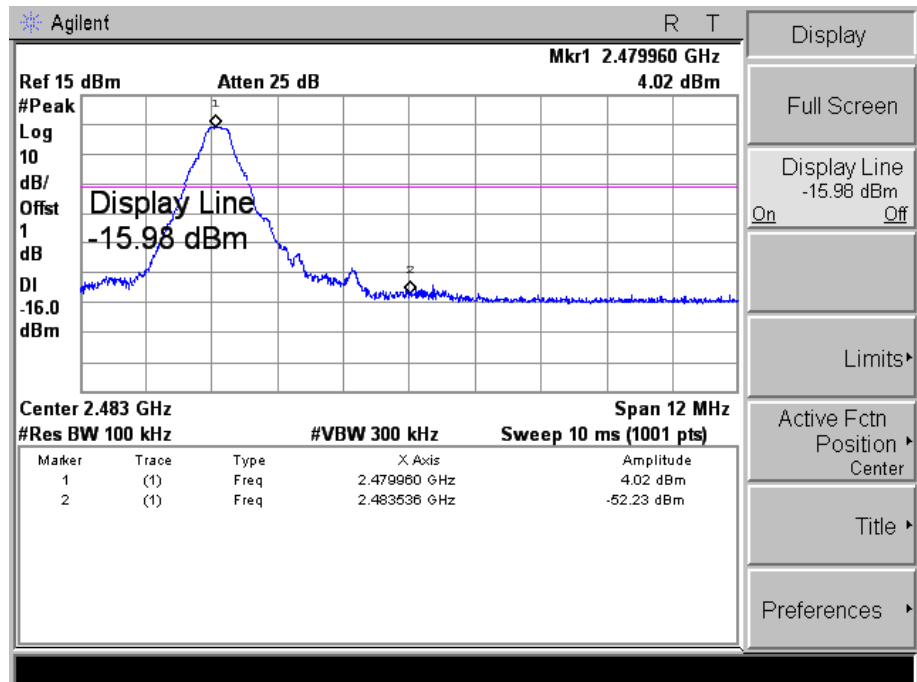

\*\*\*\*\* END OF REPORT \*\*\*\*\*