

# FCC Part 15C Measurement and Test Report

For

**ENPING ENBAO ELECTRONIC CO., LTD.**

**B3, 3 Zone, Enping Park, Industrial Transfer Park of Jiangmen,**

**Guangdong, China**

**FCC ID: 2AILBIEM-DIGITAL**

**FCC Rule(s):** FCC Part 15.249

**Product Description:** in ear monitor transmitter

**Tested Model:** IEM-DIGITAL

**Report No.:** STR18118209I

**Sample Receipt Date:** 2018-11-16


**Tested Date:** 2018-11-19 to 2019-01-02

**Issued Date:** 2019-01-02

**Tested By:** Ray Yang / Engineer



**Reviewed By:** Silin Chen / EMC Manager



**Approved & Authorized By:** Jandy So / PSQ Manager



**Prepared By:**

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

## **TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	4
1.3 TEST METHODOLOGY.....	4
1.4 TEST FACILITY.....	4
1.5 EUT SETUP AND TEST MODE.....	5
1.6 MEASUREMENT UNCERTAINTY.....	5
1.7 TEST EQUIPMENT LIST AND DETAILS.....	6
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
<b>3. ANTENNA REQUIREMENTS.....</b>	<b>8</b>
3.1 STANDARD APPLICABLE.....	8
3.2 TEST RESULT.....	8
<b>4. RADIATED EMISSIONS.....</b>	<b>9</b>
4.1 STANDARD APPLICABLE.....	9
4.2 TEST PROCEDURE.....	9
4.3 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	11
4.4 SUMMARY OF TEST RESULTS/PLOTS.....	11
<b>5. OUT OF BAND EMISSIONS.....</b>	<b>19</b>
5.1 STANDARD APPLICABLE.....	19
5.2 TEST PROCEDURE.....	19
5.3 SUMMARY OF TEST RESULTS/PLOTS.....	19
<b>6. EMISSION BANDWIDTH.....</b>	<b>22</b>
6.1 STANDARD APPLICABLE.....	22
6.2 TEST PROCEDURE.....	22
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	22
<b>7. CONDUCTED EMISSIONS.....</b>	<b>24</b>
7.1 TEST PROCEDURE.....	24
7.2 BASIC TEST SETUP BLOCK DIAGRAM.....	24
7.3 TEST RECEIVER SETUP.....	24
7.4 SUMMARY OF TEST RESULTS/PLOTS.....	24

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: ENPING ENBAO ELECTRONIC CO., LTD.  
Address of applicant: B3, 3 Zone, Enping Park, Industrial Transfer Park of Jiangmen, Guangdong, China

Manufacturer: ENPING ENBAO ELECTRONIC CO., LTD.  
Address of manufacturer: B3, 3 Zone, Enping Park, Industrial Transfer Park of Jiangmen, Guangdong, China

General Description of EUT	
Product Name:	in ear monitor transmitter
Brand Name:	VOCOPRO
Model No.:	IEM-DIGITAL
Adding Model:	/
Rated Voltage:	DC 13.5V
Battery capacity:	/
Power Adaptor:	YF1350500K1-UL INPUT: AC100-240V, 50/60Hz, 0.25A OUTPUT: DC13.5V, 500mA
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

Technical Characteristics of EUT	
Frequency Range:	909MHz-927.2MHz
Max. Field Strength:	95.50dBuV/m
Modulation:	QPSK
Antenna Type:	External Antenna
Antenna Gain:	0dBi
Lowest Internal Frequency of EUT:	24.576MHz

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 15.249:** Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz.

**ANSI C63.10-2013:** American National Standard for Testing Unlicensed Wireless Devices.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which results in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	Low Channel	909MHz
TM2	Middle Channel	914.6MHz
TM3	High Channel	927.2MHz

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	±0.42dB
Occupied Bandwidth	Conducted	± 1.5%
Conducted Spurious Emission	Conducted	±2.17dB
Conducted Emissions	Conducted	9-150kHz ±3.74dB
		0.15-30MHz ±3.34dB
Transmitter Spurious Emissions	Radiated	30-200MHz ±4.52dB
		0.2-1GHz ±5.56dB
		1-6GHz ±3.84dB
		6-18GHz ±3.92dB

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due Date
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1011	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1001	EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2018-05-22	2019-05-21
SEMT-1003	L.I.S.N	Schwarz beck	NSLK8126	8126-224	2018-05-22	2019-05-21
SEMT-1002	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2018-05-22	2019-05-21
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18

## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 15.203	Antenna Requirement	Compliant
§15.205	Restricted Band of Operation	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.209(a)(f)	Radiated Spurious Emissions	Compliant
§15.249(a)	Field Strength of Emissions	Compliant
§15.249(d)	Out of Band Emission	Compliant
§15.215 (c)	Emission Bandwidth	Compliant

N/A: not applicable

### **3. Antenna Requirements**

---

#### **3.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### **3.2 Test Result**

This product has an External antenna, fulfill the requirement of this section.



## 4. Radiated Emissions

---

### 4.1 Standard Applicable

According to §15.249(a), the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency	Field strength of fundamental (milli-volts/meter)	Field strength of Harmonics (micro-volts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

(d) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.



The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.

### 4.2 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.249(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

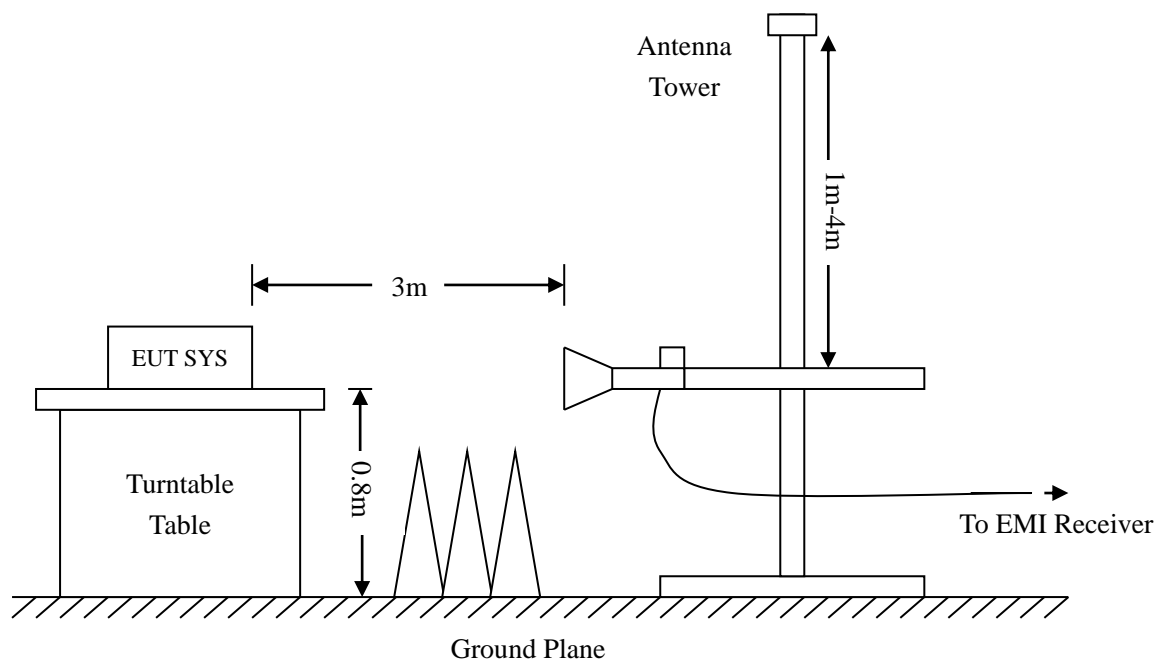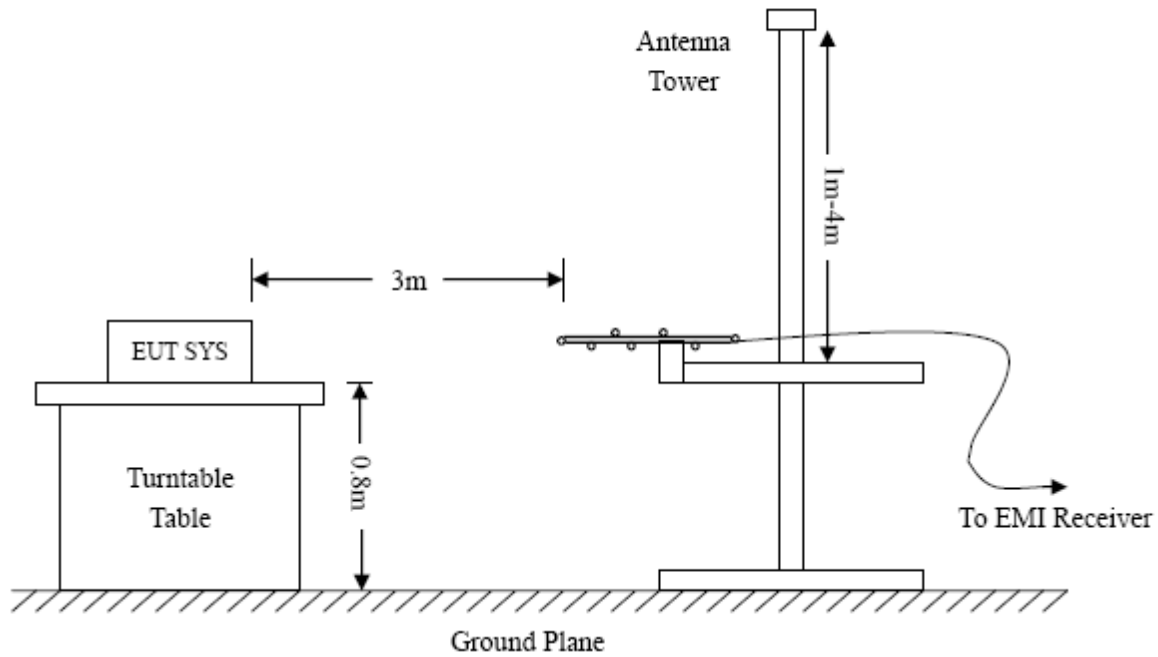

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

### 4.3 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of  $-6\text{dB}\mu\text{V}$  means the emission is  $6\text{dB}\mu\text{V}$  below the maximum limit. The equation for margin calculation is as follows:


$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15C Limit}$$

### 4.4 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


➤ Spurious Emissions Below 1GHz

Test Channel	Low	Polarity:	Horizontal
--------------	-----	-----------	------------

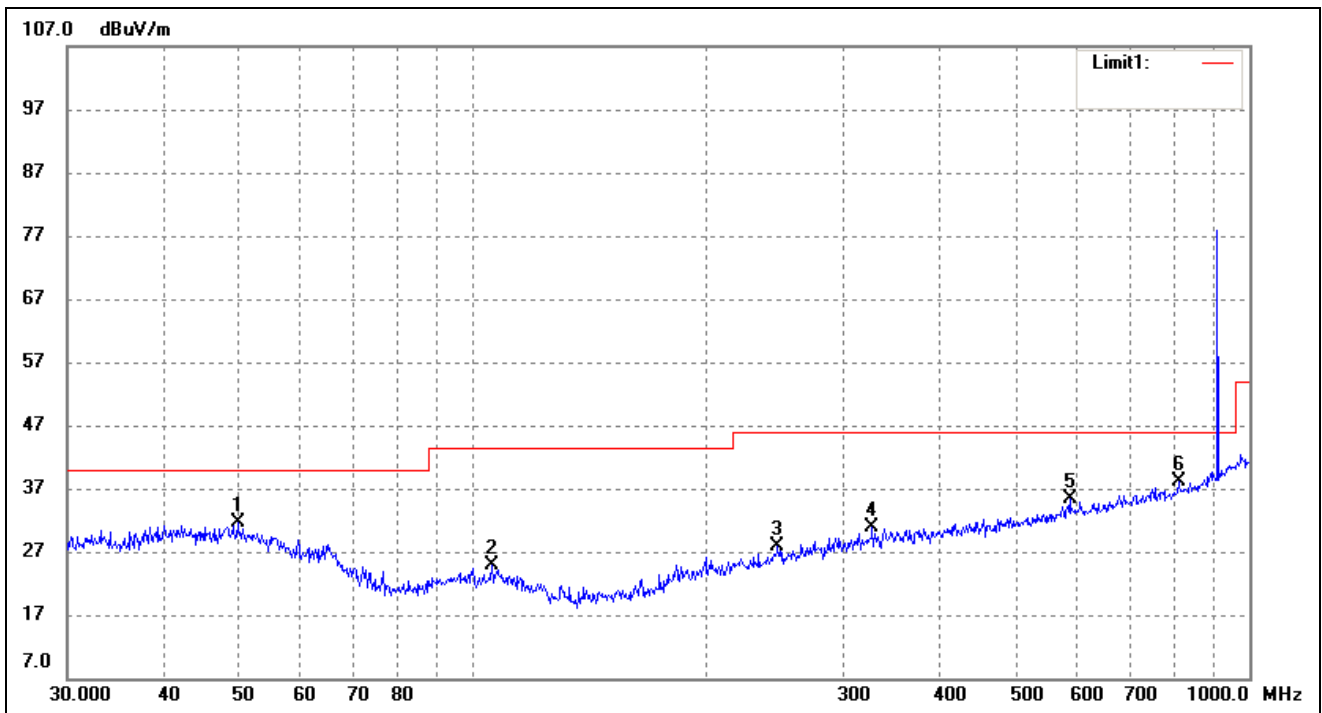


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	49.7068	40.02	-8.49	31.53	40.00	-8.47	203	100	peak
2	105.6414	39.29	-14.51	24.78	43.50	-18.72	99	100	peak
3	246.8148	39.03	-11.24	27.79	46.00	-18.21	280	100	peak
4	326.7395	39.36	-8.60	30.76	46.00	-15.24	94	100	peak
5	586.8437	39.51	-4.13	35.38	46.00	-10.62	129	100	peak
6	810.2653	39.37	-1.17	38.20	46.00	-7.80	181	100	peak

Test Channel	Low	Polarity:	Vertical
--------------	-----	-----------	----------

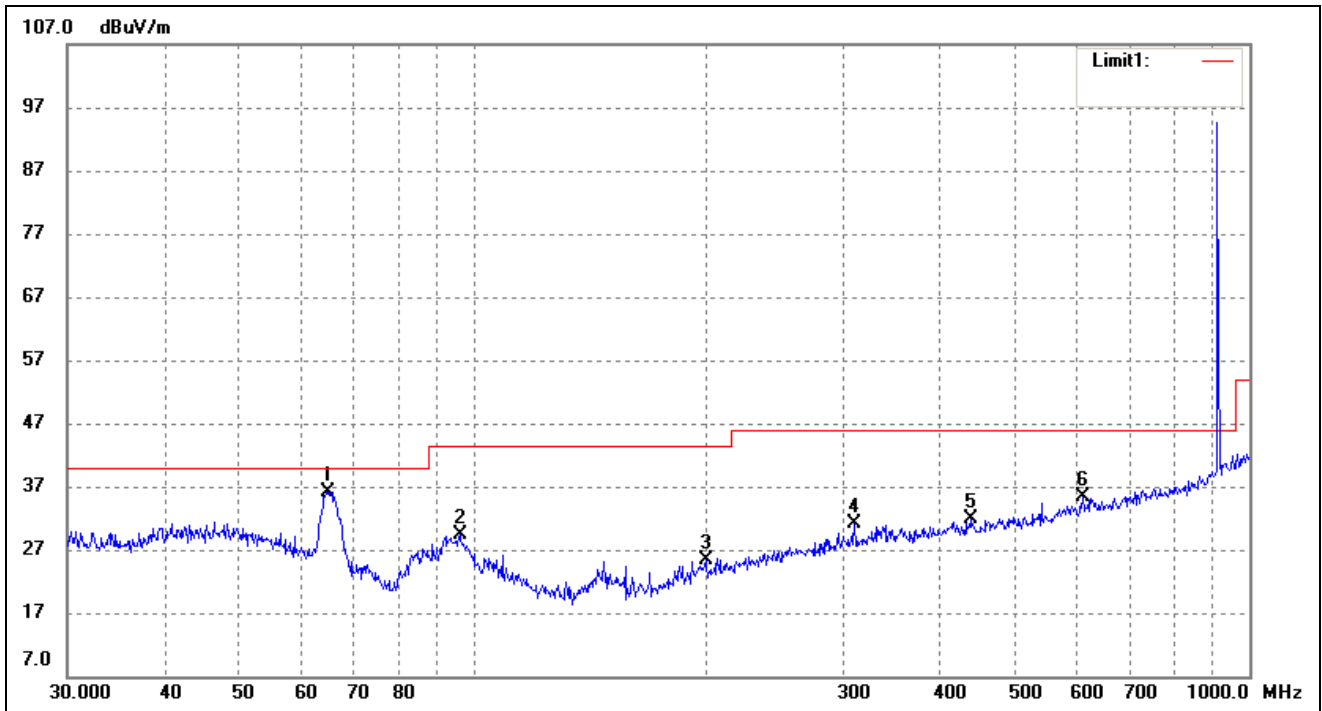


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	64.8865	48.34	-12.13	36.21	40.00	-3.79	213	100	peak
2	96.0986	44.42	-15.07	29.35	43.50	-14.15	99	100	peak
3	199.2855	38.62	-13.12	25.50	43.50	-18.00	82	100	peak
4	309.9977	40.18	-9.06	31.12	46.00	-14.88	106	100	peak
5	437.1199	38.90	-6.97	31.93	46.00	-14.07	52	100	peak
6	609.9217	39.27	-3.90	35.37	46.00	-10.63	165	100	peak

Test Channel	Middle	Polarity:	Horizontal
--------------	--------	-----------	------------

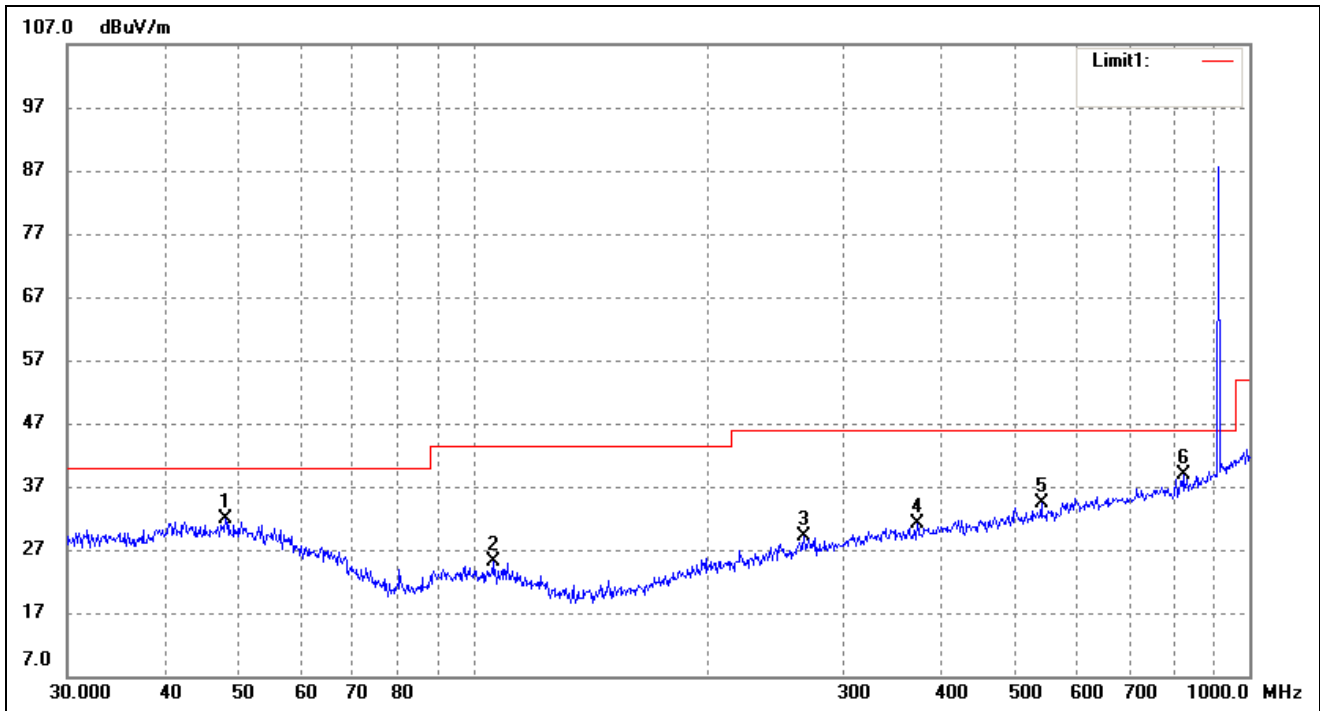


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	47.9940	40.13	-8.16	31.97	40.00	-8.03	254	100	peak
2	106.0126	39.58	-14.49	25.09	43.50	-18.41	208	100	peak
3	266.6089	39.64	-10.56	29.08	46.00	-16.92	64	100	peak
4	373.3112	39.35	-8.13	31.22	46.00	-14.78	331	100	peak
5	539.4775	39.97	-5.47	34.50	46.00	-11.50	176	100	peak
6	821.7103	39.68	-0.86	38.82	46.00	-7.18	204	100	peak

Test Channel	Middle	Polarity:	Vertical
--------------	--------	-----------	----------

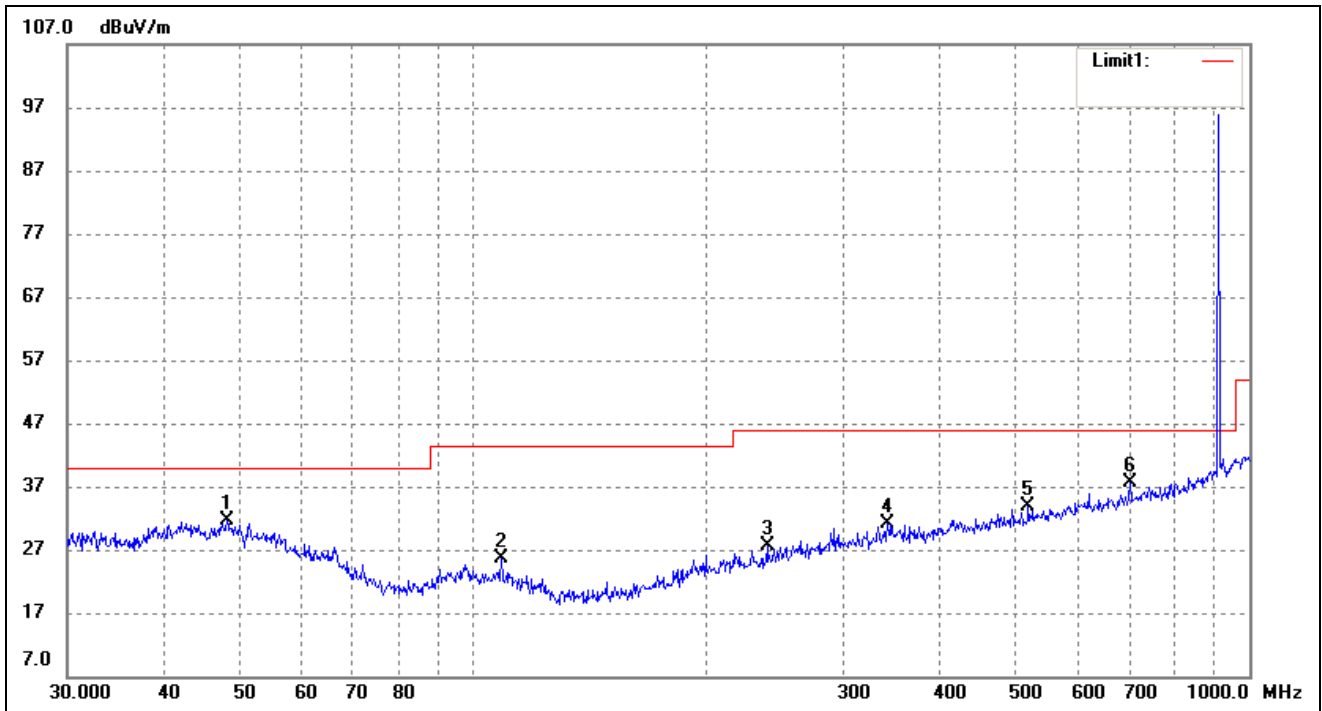

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	48.1626	39.77	-8.20	31.57	40.00	-8.43	249	100	peak
2	108.6470	39.97	-14.45	25.52	43.50	-17.98	196	100	peak
3	239.1473	39.12	-11.47	27.65	46.00	-18.35	138	100	peak
4	341.9786	39.08	-8.07	31.01	46.00	-14.99	111	100	peak
5	519.0649	39.81	-5.84	33.97	46.00	-12.03	130	100	peak
6	701.7610	40.24	-2.59	37.65	46.00	-8.35	122	100	peak


Test Channel	High	Polarity:	Horizontal
--------------	------	-----------	------------

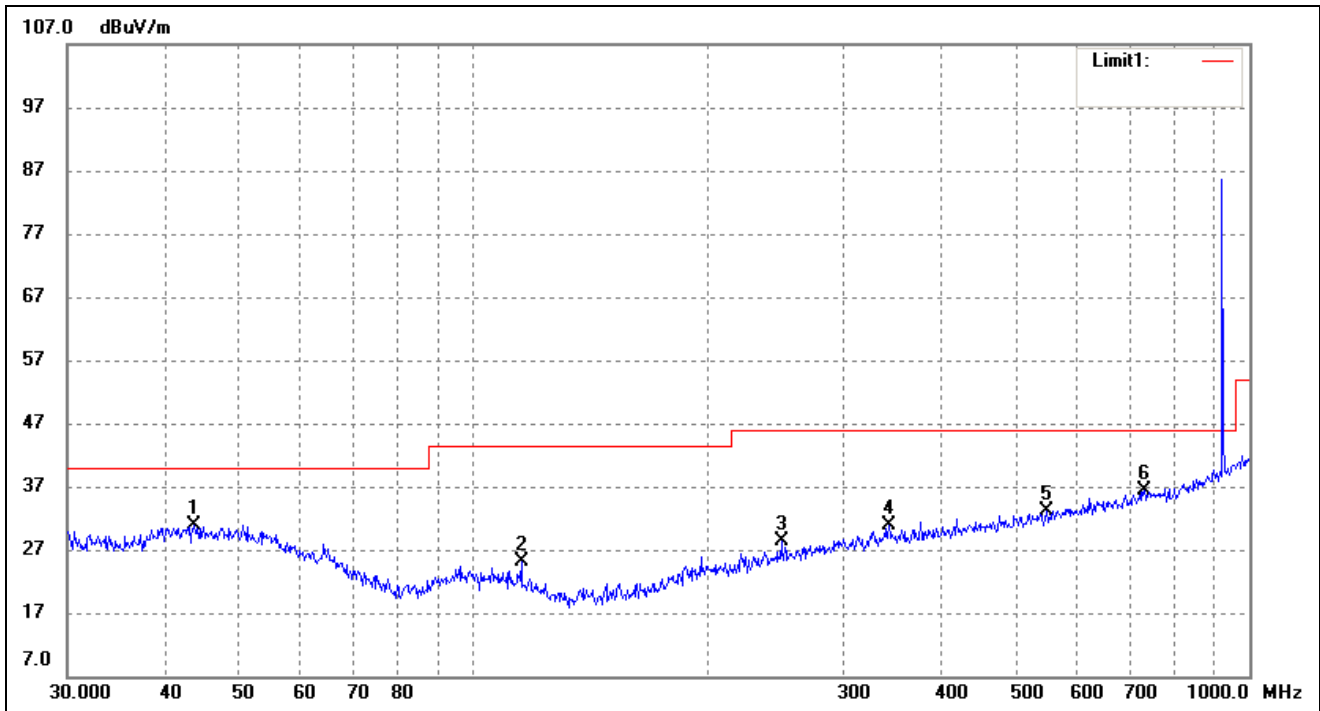

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	43.6584	38.89	-8.01	30.88	40.00	-9.12	77	100	peak
2	115.3205	40.39	-15.36	25.03	43.50	-18.47	143	100	peak
3	249.4250	39.69	-11.26	28.43	46.00	-17.57	69	100	peak
4	343.1800	38.90	-8.06	30.84	46.00	-15.16	131	100	peak
5	549.0195	38.60	-5.36	33.24	46.00	-12.76	108	100	peak
6	731.9203	38.39	-1.97	36.42	46.00	-9.58	177	100	peak



Test Channel	High	Polarity:	Vertical
--------------	------	-----------	----------

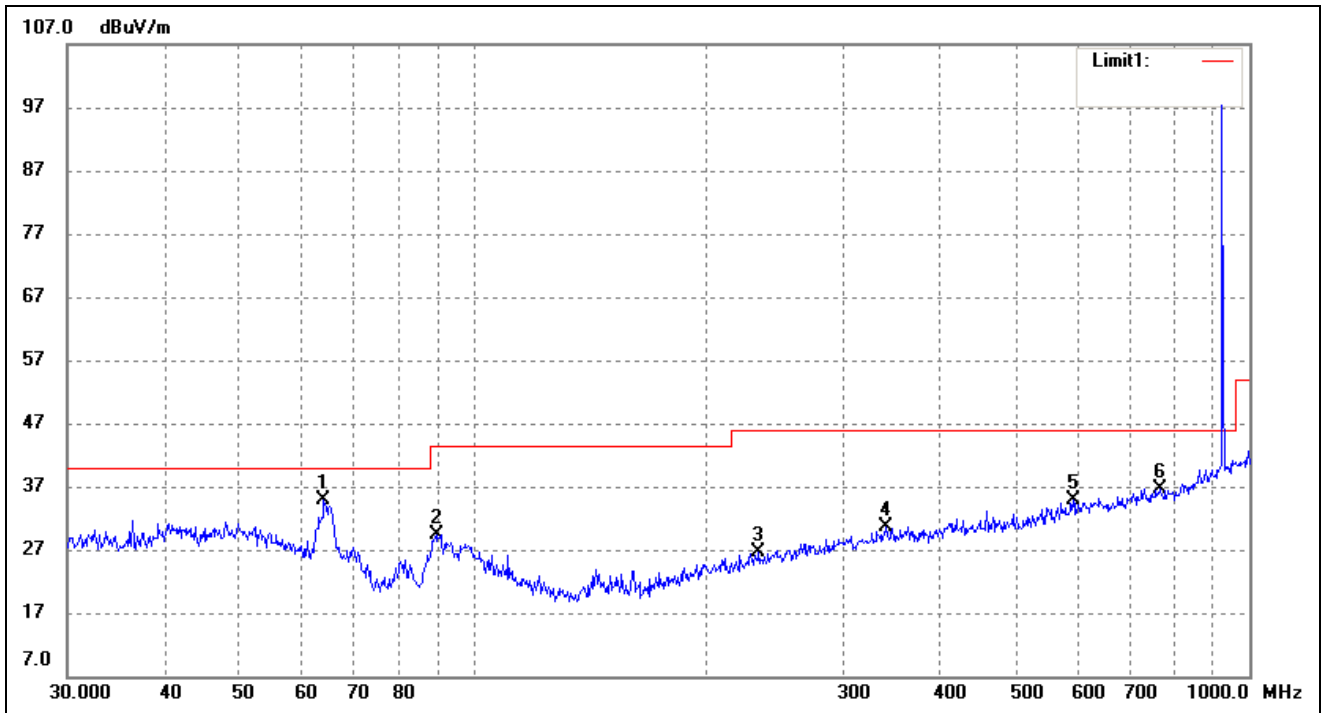

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( )	Height (cm)	Remark
1	64.2074	46.77	-11.99	34.78	40.00	-5.22	197	100	peak
2	89.5899	45.35	-15.88	29.47	43.50	-14.03	338	100	peak
3	233.3487	38.41	-11.90	26.51	46.00	-19.49	58	100	peak
4	340.7817	38.59	-8.08	30.51	46.00	-15.49	125	100	peak
5	593.0497	38.80	-4.00	34.80	46.00	-11.20	129	100	peak
6	766.0571	38.49	-1.76	36.73	46.00	-9.27	94	100	peak

## ➤ Spurious Emissions Above 1GHz

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-909MHz							
1818.00	72.04	-11.61	60.43	74.00	-13.57	H	PK
1818.00	54.38	-11.61	42.77	54.00	-11.23	H	AV
1818.00	73.13	-11.61	61.52	74.00	-12.48	V	PK
1818.00	53.45	-11.61	41.84	54.00	-12.16	V	AV
Middle Channel-914.6MHz							
1829.20	74.19	-11.40	62.79	74.00	-11.21	H	PK
1829.20	53.70	-11.40	42.30	54.00	-11.70	H	AV
1829.20	73.14	-11.40	61.74	74.00	-12.26	V	PK
1829.20	53.33	-11.40	41.93	54.00	-12.07	V	AV
High Channel-927.2MHz							
1854.40	71.38	-11.10	60.28	74.00	-13.72	H	PK
1854.40	54.52	-11.10	43.42	54.00	-10.58	H	AV
1854.40	73.19	-11.10	62.09	74.00	-11.91	V	PK
1854.40	54.87	-11.10	43.77	54.00	-10.23	V	AV

*Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured. The measurements greater than 20dB below the limit from 9kHz to 30MHz..*

## 5. Out of Band Emissions

---

### 5.1 Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

### 5.2 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 902MHz to 928MHz, than mark the higher-level emission for comparing with the FCC rules.


### 5.3 Summary of Test Results/Plots

Test mode	Frequency	Limit	Result
	MHz	dBuV / dBc	
Lowest	902.00	<46 dBuV	Pass
Highest	928.00	<46 dBuV	Pass

The edge emissions are below the FCC 15.209 Limits or complies with the 15.249 requirements.


Please refer to the test plots as below.

Test Channel	Low	Polarity:	Vertical(worst case)
--------------	-----	-----------	----------------------

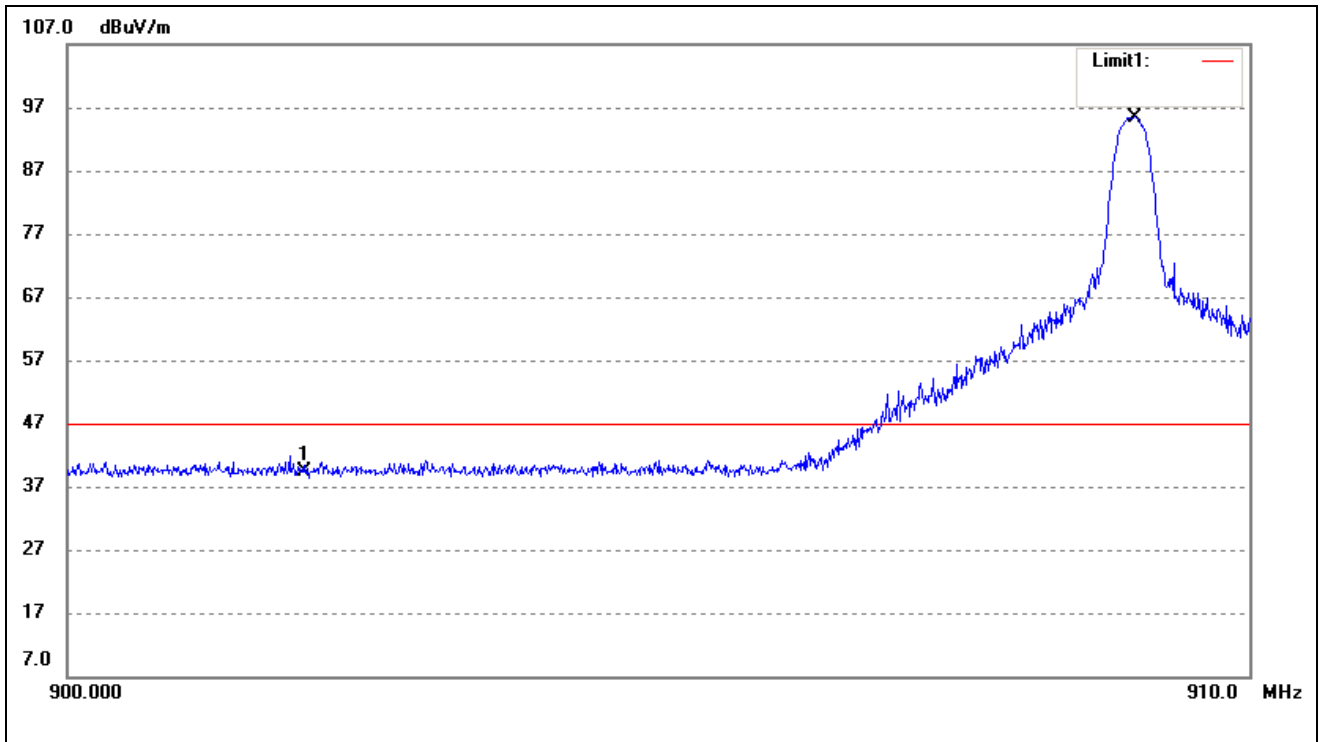

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	902.0000	37.95	1.44	39.39	47.00	-7.61	Peak Detector
2	909.0252	93.89	1.61	95.50	114.00	-18.50	Peak Detector
	909.0252	90.82	1.61	92.43	94.00	-1.57	QP Detector

Test Channel	High	Polarity:	Vertical(worst case)
--------------	------	-----------	----------------------

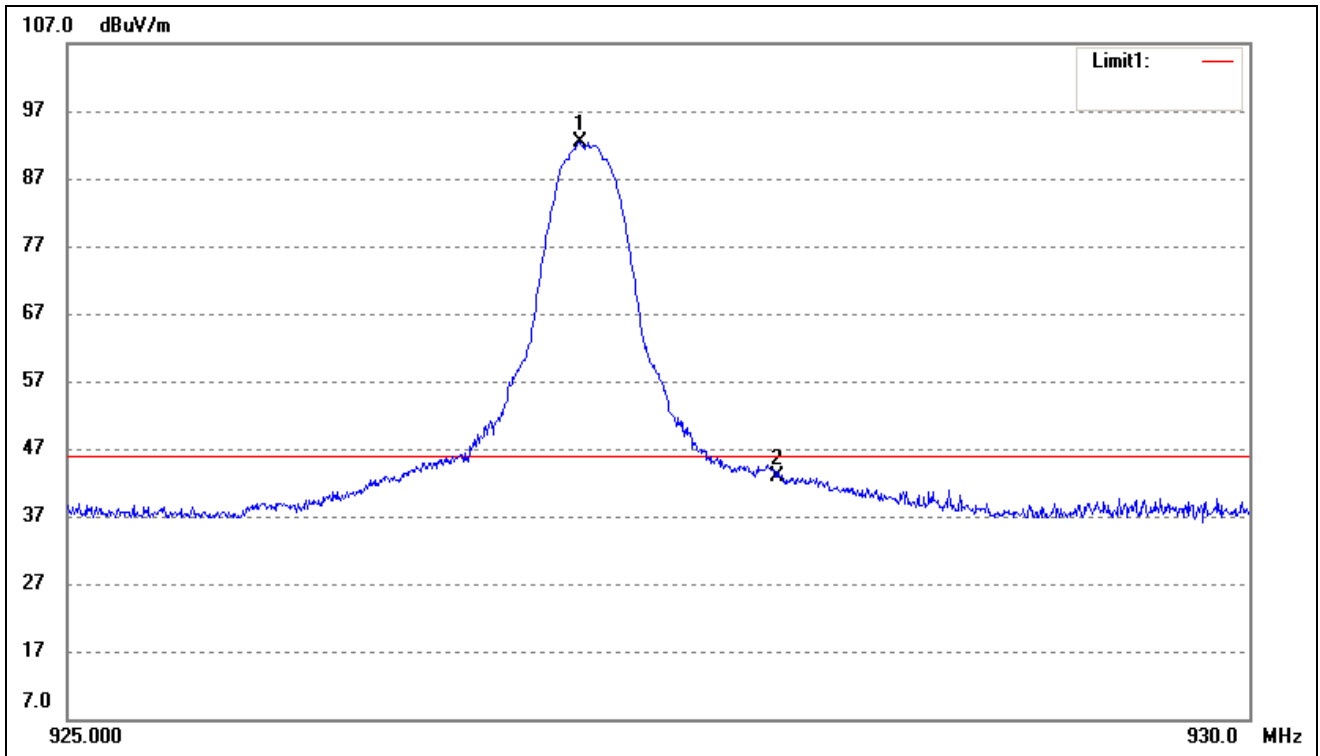

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	927.1667	91.15	1.32	92.47	114.00	-21.53	Peak Detector
	927.1667	88.15	1.32	89.47	94.00	-4.53	QP Detector
2	928.0000	41.66	1.32	42.98	46.00	-3.02	Peak Detector

## 6. Emission Bandwidth

### 6.1 Standard Applicable

According to 15.215 (c), intentional radiators operating under the alternative provisions to the general emission limits, as contained in §§15.217 through 15.257 and in Subpart E of this part, must be designed to ensure that the 20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated. The requirement to contain the designated bandwidth of the emission within the specified frequency band includes the effects from frequency sweeping, frequency hopping and other modulation techniques that may be employed as well as the frequency stability of the transmitter over expected variations in temperature and supply voltage. If a frequency stability is not specified in the regulations, it is recommended that the fundamental emission be kept within at least the central 80% of the permitted band in order to minimize the possibility of out-of-band operation.

### 6.2 Test Procedure

According to the ANSI 63.10-2013, the emission bandwidth test method as follows.

Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.

Set span = 1MHz, centered on a transmitting channel

RBW  $\geq$ 1% 20dB Bandwidth, VBW  $\geq$ RBW

Sweep = auto

Detector function = peak




Trace = max hold

All the trace to stabilize, use the marker-to-peak function to set the marker to the peak of the emission, use the marker-delta function to measure and record the 20dB down and 99% bandwidth of the emission.

### 6.3 Summary of Test Results/Plots

Channel	Frequency MHz	20dB Bandwidth kHz
Low Channel	909.0	278.360
Middle Channel	914.6	275.971
High Channel	927.2	272.535

*Please refer to the following test plots*
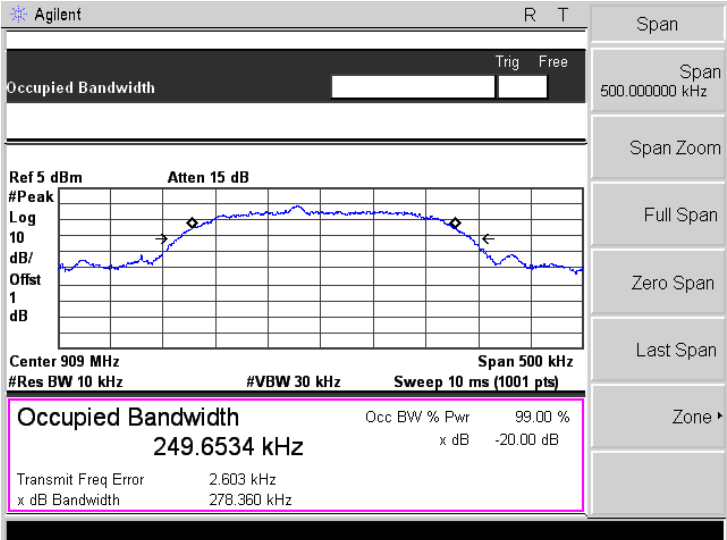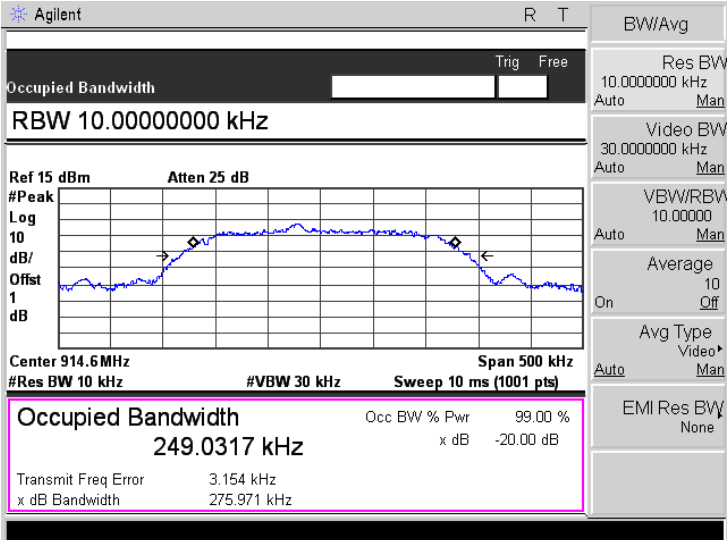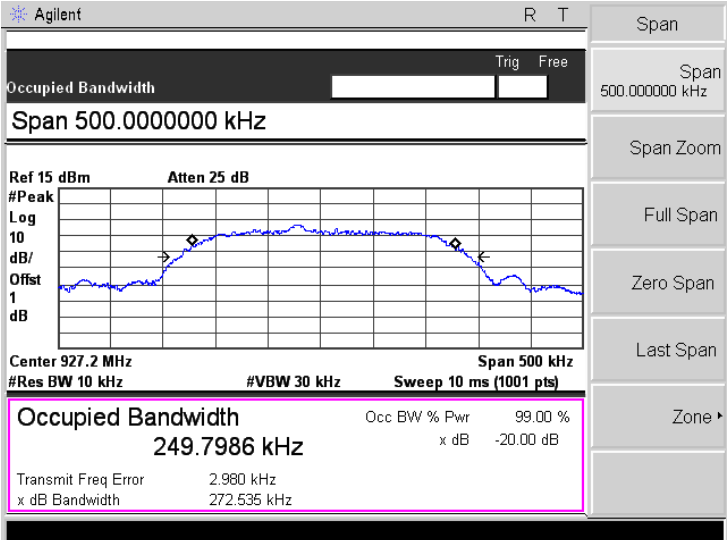
<p>Low Channel</p>	 <p>Agilent R T</p> <p>Occupied Bandwidth</p> <p>Trig Free</p> <p>Ref 5 dBm Atten 15 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 909 MHz Span 500 kHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %  <b>249.6534 kHz</b> x dB -20.00 dB</p> <p>Transmit Freq Error 2.603 kHz  x dB Bandwidth 278.360 kHz</p> <p>Span 500.000000 kHz</p> <p>Span Zoom</p> <p>Full Span</p> <p>Zero Span</p> <p>Last Span</p> <p>Zone ▶</p>
<p>Middle Channel</p>	 <p>Agilent R T</p> <p>Occupied Bandwidth</p> <p>Trig Free</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 914.6 MHz Span 500 kHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %  <b>249.0317 kHz</b> x dB -20.00 dB</p> <p>Transmit Freq Error 3.154 kHz  x dB Bandwidth 275.971 kHz</p> <p>BW/Avg</p> <p>Res BW 10.0000000 kHz Auto Man</p> <p>Video BW 30.0000000 kHz Auto Man</p> <p>VBW/RBW 10.0000 Auto Man</p> <p>Average 10 On Off</p> <p>Avg Type Video▶ Auto Man</p> <p>EMI Res BW None</p>
<p>High Channel</p>	 <p>Agilent R T</p> <p>Occupied Bandwidth</p> <p>Trig Free</p> <p>Ref 15 dBm Atten 25 dB</p> <p>#Peak Log 10 dB/ Offst 1 dB</p> <p>Center 927.2 MHz Span 500 kHz</p> <p>#Res BW 10 kHz #VBW 30 kHz Sweep 10 ms (1001 pts)</p> <p><b>Occupied Bandwidth</b> Occ BW % Pwr 99.00 %  <b>249.7986 kHz</b> x dB -20.00 dB</p> <p>Transmit Freq Error 2.980 kHz  x dB Bandwidth 272.535 kHz</p> <p>Span 500.000000 kHz</p> <p>Span Zoom</p> <p>Full Span</p> <p>Zero Span</p> <p>Last Span</p> <p>Zone ▶</p>


## 7. Conducted Emissions

### 7.1 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 7.2 Basic Test Setup Block Diagram

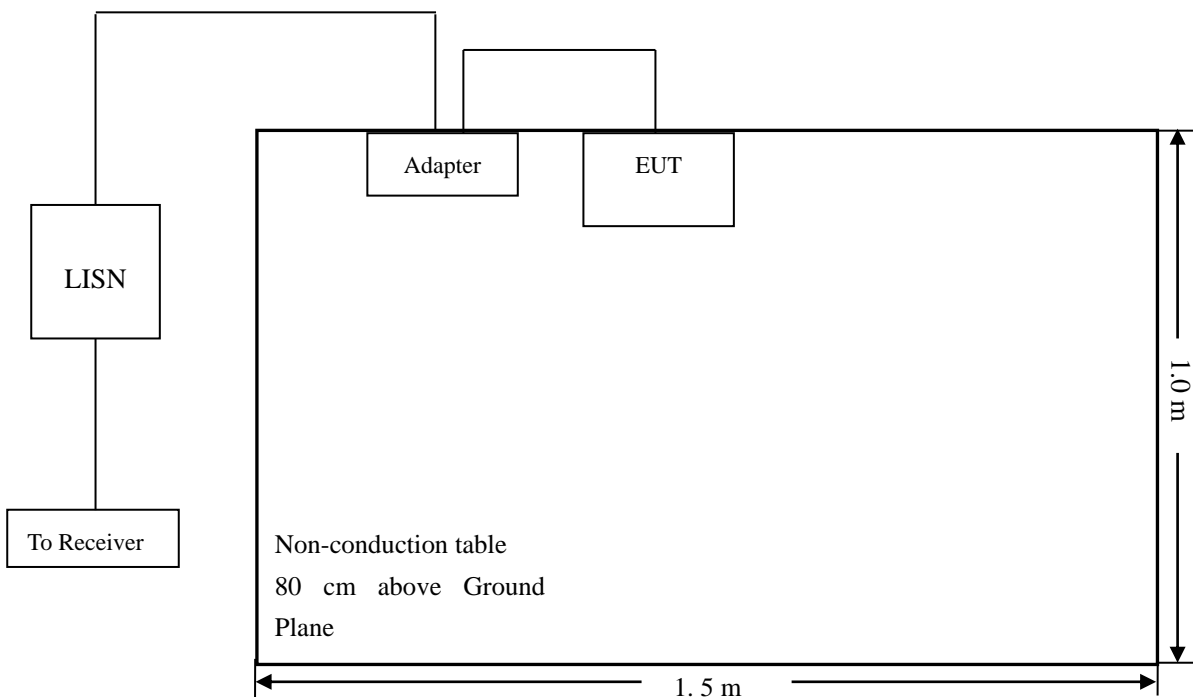

### 7.3 Test Receiver Setup


During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
 Stop Frequency ..... 30 MHz  
 Sweep Speed ..... Auto  
 IF Bandwidth..... 10 kHz  
 Quasi-Peak Adapter Bandwidth ..... 9 kHz  
 Quasi-Peak Adapter Mode ..... Normal

### 7.4 Summary of Test Results/Plots




Test Mode	Communication	AC120V 60Hz	Polarity:	Neutral
-----------	---------------	-------------	-----------	---------

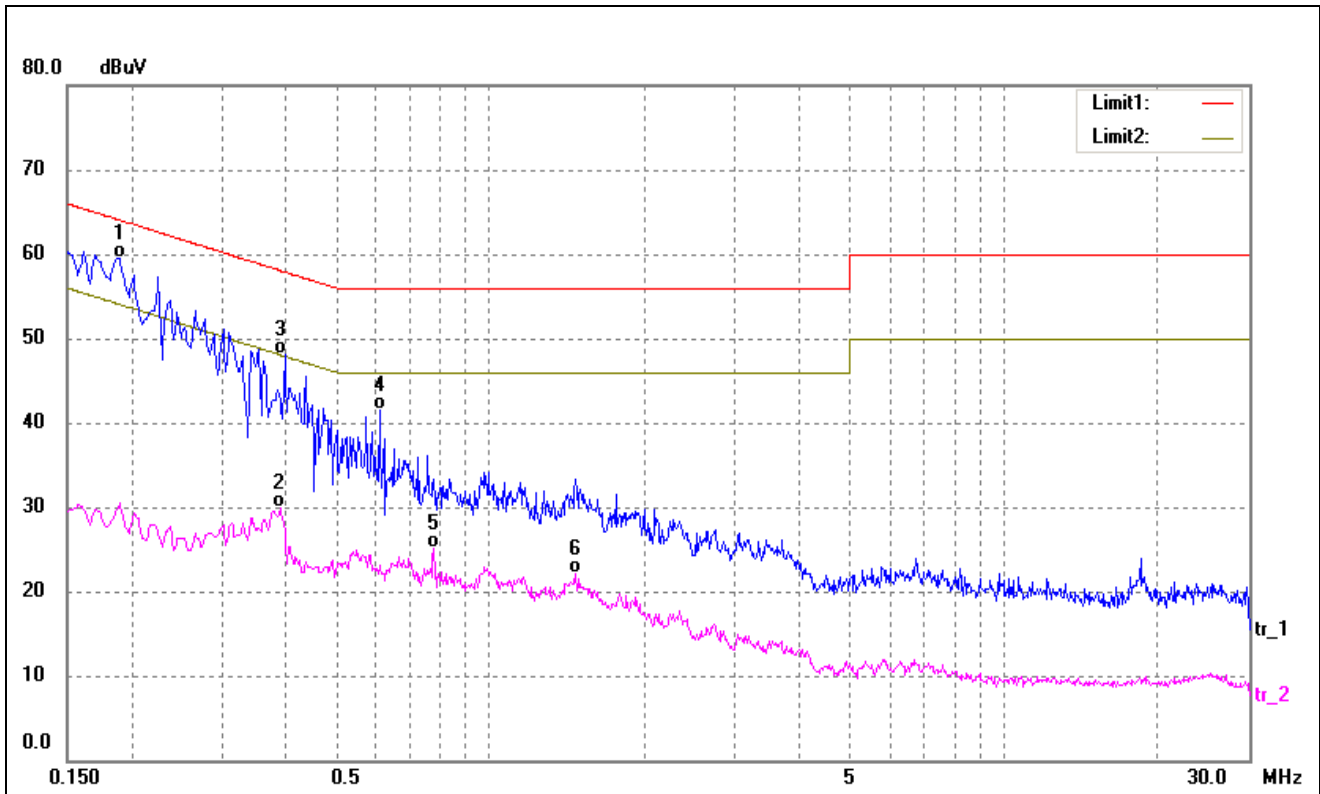

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1900	49.40	10.12	59.52	64.03	-4.51	QP
2	0.3899	19.62	10.24	29.86	48.06	-18.20	AVG
3	0.3980	37.82	10.25	48.07	57.89	-9.82	QP
4	0.6100	31.11	10.35	41.46	56.00	-14.54	QP
5	0.7780	14.72	10.42	25.14	46.00	-20.86	AVG
6	1.4660	11.58	10.56	22.14	46.00	-23.86	AVG

Test Mode	Communication	AC120V 60Hz	Polarity:	Line
-----------	---------------	-------------	-----------	------

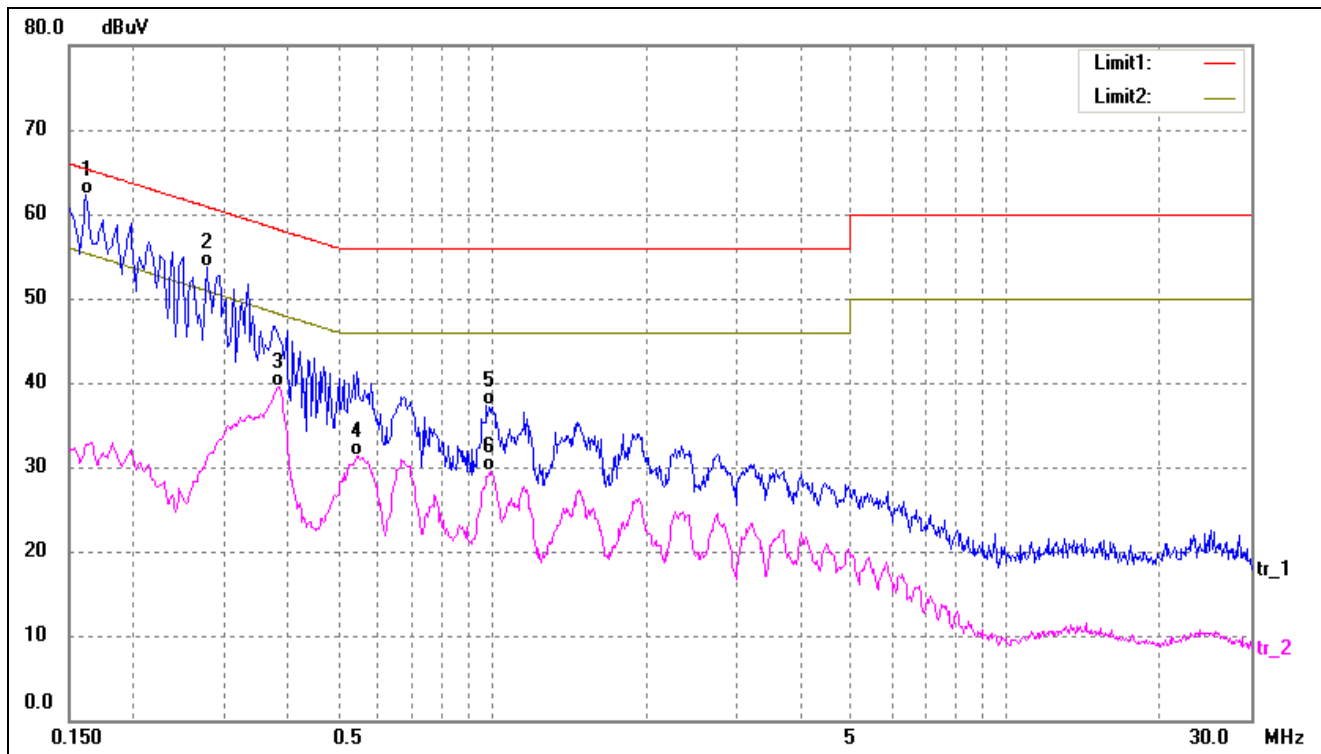

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1620	52.30	10.10	62.40	65.36	-2.96	QP
2	0.2780	43.50	10.17	53.67	60.87	-7.20	QP
3	0.3860	29.24	10.24	39.48	48.15	-8.67	AVG
4	0.5460	21.07	10.32	31.39	46.00	-14.61	AVG
5	0.9780	26.74	10.50	37.24	56.00	-18.76	QP
6	0.9940	18.98	10.50	29.48	46.00	-16.52	AVG

\*\*\*\*\* END OF REPORT \*\*\*\*\*