

FCC TEST REPORT

Product Name: Phone
Trade Mark: yumpingo
Model No.: Yumpingo ONE
Report Number: 190515008RFM-1
Test Standards: FCC 47 CFR Part 22 Subpart H
FCC 47 CFR Part 24 Subpart E
FCC 47 CFR Part 27
FCC 47 CFR Part 2
FCC ID: 2AIMEX1
Test Result: PASS
Date of Issue: September 3, 2019


Prepared for:

SMT TELECOMM HK LIMITED
Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL HK

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6, Baoneng Science and Technology Park,
Qingxiang Road No.1, Longhua New District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Tested by: 
Henry Lu
Team Leader

Reviewed by: 
Kevin Liang
Assistant Manager

Approved by: 
Billy Li
Technical Director

Date: September 3, 2019

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China
Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

Version

Version No.	Date	Description
V1.0	September 3, 2019	Original



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

CONTENTS

1. GENERAL INFORMATION	4
1.1 CLIENT INFORMATION	4
1.2 EUT INFORMATION	4
1.2.1 GENERAL DESCRIPTION OF EUT	4
1.2.2 DESCRIPTION OF ACCESSORIES	4
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	5
1.4 DESCRIPTION OF SUPPORT UNITS	7
1.5 TEST LOCATION	7
1.6 TEST FACILITY	7
1.7 DEVIATION FROM STANDARDS	8
1.8 ABNORMALITIES FROM STANDARD CONDITIONS	8
1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	8
1.10 MEASUREMENT UNCERTAINTY	8
2. TEST SUMMARY	9
3. EQUIPMENT LIST	11
4. TEST CONFIGURATION	12
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	12
4.1.1 NORMAL OR EXTREME TEST CONDITIONS	12
4.1.2 RECORD OF NORMAL ENVIRONMENT	12
4.2 TEST SETUP	13
4.2.1 FOR RADIATED EMISSIONS TEST SETUP	13
4.2.2 FOR CONDUCTED RF TEST SETUP	15
4.3 TEST CHANNELS	16
4.4 SYSTEM TEST CONFIGURATION	18
4.5 PRE-SCAN	18
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	27
5.1 REFERENCE DOCUMENTS FOR TESTING	27
5.2 ERP OR EIRP	27
5.3 CONDUCTED OUTPUT POWER	32
5.4 PEAK-TO-AVERAGE RATIO	33
5.5 99%&26dB BANDWIDTH	58
5.6 BAND EDGE AT ANTENNA TERMINALS	95
5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	138
5.8 FIELD STRENGTH OF SPURIOUS RADIATION	168
5.8.1 RADIATED EMISSION TEST DATA (30 MHz TO 1 GHz)	169
5.8.2 RADIATED EMISSION TEST DATA (ABOVE 1GHz)	216
5.9 FREQUENCY STABILITY	263
APPENDIX 1 PHOTOS OF TEST SETUP	268
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS	268

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	SMT TELECOMM HK LIMITED
Address of Applicant:	Unit C 8/F, CHARMHILL CTR 50 HILLWOOD RD TST KL HK
Manufacturer:	Yumpingo Ltd
Address of Manufacturer:	22 Endell Street, London, UK

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Phone		
Model No.:	Yumpingo ONE		
Trade Mark:	yumpingo		
DUT Stage:	Identical Prototype		
EUT Supports Function:	GSM Bands:	GSM850/1900	
	UTRA Bands:	Band II/ Band IV/ Band V	
	E-UTRA Bands:	FDD Band 2/ Band 4/ Band 5/ Band 7/Band 12/ Band 17	
	2.4 GHz ISM Band:	IEEE 802.11b/g/n Bluetooth 5.0	
	5 GHz U-NII Bands:	5 150 MHz to 5 250 MHz	IEEE 802.11a/n/ac
		5 470 MHz to 5 725 MHz	IEEE 802.11a/n/ac
		5 725 MHz to 5 850 MHz	IEEE 802.11a/n/ac
Sample Received Date:	May 15, 2019		
Sample Tested Date:	May 15, 2019 to June 30, 2019		
Declaration of Differences:	Sample 1: No holder Sample 2: With holder Note: Sample 1 without holder, Sample 2 with holder, the Holder does not contain metal, and all the other is the same. No effect on test results, all data is based on sample 1.		

1.2.2 Description of Accessories

Battery	
Model No.:	BPX150
Battery Type:	Lithium-ion Polymer Rechargeable Battery
Rated Voltage:	3.85 Vdc
Limited Charge Voltage:	4.4 Vdc
Rated Capacity:	4900 mAh

Cable	
Description:	USB Type-C Plug Cable
Cable Type:	Unshielded without ferrite
Length:	1.0 Meter

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Support Networks:	GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA, LTE	
Type of Modulation:	GSM/GPRS:	GMSK
	EDGE:	GMSK, 8PSK
	WCDMA	BPSK
	HSDPA:	QPSK
	HSUPA:	QPSK
	LTE	QPSK, 16QAM
Frequency Range:	GSM/GPRS/EDGE 850:	824.2-848.8 MHz
	GSM/GPRS/EDGE 1900:	1850.2-1909.8 MHz
	WCDMA Band II:	1852.4-1907.6 MHz
	WCDMA Band IV:	1712.4-1752.6 MHz
	WCDMA Band V:	826.4-846.6 MHz
	LTE Band 2 (Channel Bandwidth: 1.4 MHz):	1850.7-1909.3 MHz
	LTE Band 2 (Channel Bandwidth: 3 MHz):	1851.5-1908.5 MHz
	LTE Band 2 (Channel Bandwidth: 5 MHz):	1852.5-1907.5 MHz
	LTE Band 2 (Channel Bandwidth: 10 MHz):	1855.0-1905.0 MHz
	LTE Band 2 (Channel Bandwidth: 15 MHz):	1857.5-1902.5 MHz
	LTE Band 2 (Channel Bandwidth: 20 MHz):	1860.0-1900.0 MHz
	LTE Band 4 (Channel Bandwidth: 1.4 MHz):	1710.7-1754.3 MHz
	LTE Band 4 (Channel Bandwidth: 3 MHz):	1711.5-1753.5 MHz
	LTE Band 4 (Channel Bandwidth: 5 MHz):	1712.5-1752.5 MHz
	LTE Band 4 (Channel Bandwidth: 10 MHz):	1715-1750 MHz
	LTE Band 4 (Channel Bandwidth: 15 MHz):	1717.5-1747.5 MHz
	LTE Band 4 (Channel Bandwidth: 20 MHz):	1720-1745 MHz
	LTE Band 5 (Channel Bandwidth: 1.4 MHz):	824.7-848.3 MHz
	LTE Band 5 (Channel Bandwidth: 3 MHz):	825.5-847.5MHz
	LTE Band 5 (Channel Bandwidth: 5 MHz):	826.5-846.5 MHz
	LTE Band 5 (Channel Bandwidth: 10 MHz):	829-844 MHz MHz
	LTE Band 7 (Channel Bandwidth: 5 MHz):	2502.5-2567.5 MHz
	LTE Band 7 (Channel Bandwidth: 10 MHz):	2505-2565 MHz
	LTE Band 7 (Channel Bandwidth: 15 MHz):	2507.5-2562.5 MHz
	LTE Band 7 (Channel Bandwidth: 20 MHz):	2510-2560 MHz
	LTE Band 12 (Channel Bandwidth: 1.4 MHz):	699.7-715.3 MHz
	LTE Band 12 (Channel Bandwidth: 3 MHz):	700.5-714.5 MHz
	LTE Band 12 (Channel Bandwidth: 5 MHz):	701.5-713.5 MHz
	LTE Band 12 (Channel Bandwidth: 10 MHz):	704-711 MHz
	LTE Band 17 (Channel Bandwidth: 5 MHz):	706.5-713.5 MHz
	LTE Band 17 (Channel Bandwidth: 10 MHz):	709-711 MHz
Max RF Output Power:	GSM/GPRS 850:	32.21dBm
	EDGE 850:	26.81dBm
	GSM/GPRS 1900:	28.95dBm
	EDGE 1900:	25.82dBm
	WCDMA Band II:	23.43dBm
	WCDMA Band IV:	23.06dBm
	WCDMA Band V:	23.43dBm

	LTE:	See Note 1
Type of Emission:	GSM/GPRS 850:	246KGXW
	EDGE 850:	236KG7W
	GSM/GPRS 1900:	245KGXW
	EDGE 1900:	250KG7W
	WCDMA Band II:	4M17F9W
	WCDMA Band IV:	4M18F9W
	WCDMA Band V:	4M19F9W
	LTE:	See Note 1
Antenna Type:	Monopole	
Antenna Gain:	GSM 850:	1.13 dBi
	GSM 1900:	2.12 dBi
	WCDMA Band II:	2.54 dBi
	WCDMA Band IV:	2.22 dBi
	WCDMA Band V:	1.87 dBi
	LTE Band 2:	2.22 dBi
	LTE Band 4:	1.87 dBi
	LTE Band 5:	1.23 dBi
	LTE Band 7:	2.33 dBi
	LTE Band 12:	0.87 dBi
	LTE Band 17:	0.74 dBi
Normal Test Voltage:	3.85 Vdc	
Extreme Test Voltage:	3.45 to 4.4Vdc	
Extreme Test Temperature:	-30 °C to +50 °C	

Note 1:

LTE Summary of Results:							
Band	BW (MHz)	Frequency Range (MHz)	Max RF Output Power (dBm)		Type of Emission		
			Conducted (Average)	ERP/EIRP (Average)	QPSK	16QAM	64QAM
LTE Band 2	1.4	1850.7-1909.3	22.14	24.36	1M11G7D	1M10W7D	N/A
	3	1851.5-1908.5	22.13	24.35	2M70G7D	2M70W7D	N/A
	5	1852.5-1907.5	22.07	24.29	4M52G7D	4M51W7D	N/A
	10	1855.0-1905.0	22.17	24.39	9M01G7D	9M02W7D	N/A
	15	1857.5-1902.5	22.13	24.35	13M5G7D	13M5W7D	N/A
	20	1860.0-1900.0	22.18	24.4	18M0G7D	18M0W7D	N/A
LTE Band 4	1.4	1710.7-1754.3	21.43	23.3	1M10G7D	1M10W7D	N/A
	3	1711.5-1753.5	21.37	23.24	2M70G7D	2M70W7D	N/A
	5	1712.5-1752.5	21.37	23.24	4M51G7D	4M52W7D	N/A
	10	1715-1750	21.41	23.28	9M00G7D	9M00W7D	N/A
	15	1717.5-1747.5	21.48	23.35	13M5G7D	13M5W7D	N/A
	20	1720-1745	21.53	23.4	18M0G7D	18M0W7D	N/A

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

LTE Band 5	1.4	824.7-848.3	22.09	21.17	1M09G7D	1M09W7D	N/A
	3	825.5-847.5	22.06	21.14	2M70G7D	2M70W7D	N/A
	5	826.5-846.5	22.11	21.19	4M51G7D	4M51W7D	N/A
	10	829-844	22.14	21.22	9M00G7D	9M02W7D	N/A
LTE Band 7	5	2502.5-2567.5	21.05	23.38	4M51G7D	4M50W7D	N/A
	10	2505-2565	21.07	23.4	8M97G7D	8M98W7D	N/A
	15	2507.5-2562.5	21.05	23.38	13M5G7D	13M5W7D	N/A
	20	2510-2560	21.16	23.49	18M8G7D	18M0W7D	N/A
LTE Band 12	1.4	699.7-715.3	21.74	20.46	1M09G7D	1M10W7D	N/A
	3	700.5-714.5	21.69	20.41	2M70G7D	2M70W7D	N/A
	5	701.5-713.5	21.70	20.42	4M54G7D	4M53W7D	N/A
	10	704-711	21.75	20.47	9M02G7D	9M04W7D	N/A
LTE Band 17	5	706.5-713.5	22.03	20.62	4M50G7D	4M53W7D	N/A
	10	709-711	22.12	20.71	9M00G7D	9M00W7D	N/A

1.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
-	-	-	-	-

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.30 Meter	UnionTrust

1.5 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

IC-Registration No.: 21600-1

The 3m Semi-anechoic chamber of Shenzhen UnionTrust Quality and Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.:

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

21600-1.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.7 DEVIATION FROM STANDARDS

None.

1.8 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.10 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9KHz-150KHz	±3.8 dB
2	Conducted emission 150KHz-30MHz	±3.4 dB
3	Radiated emission 9KHz-30MHz	±4.9 dB
4	Radiated emission 30MHz-1GHz	±4.7 dB
5	Radiated emission 1GHz-18GHz	±5.1 dB
6	Radiated emission 18GHz-26GHz	±5.2 dB
7	Radiated emission 26GHz-40GHz	±5.2 dB

2. TEST SUMMARY

FCC 47 CFR Part 22 Subpart H Test Cases (GSM 850/WCDMA Band V/LTE Band 5)			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 22.355	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 24 Subpart E Test Cases (GSM 1900/WCDMA Band II/LTE Band 2)			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 24.232(d)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 24.238(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 24.235	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 27 Test Cases (WCDMA Band IV/LTE Band 4)			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(h)(1)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 27 Test Cases (LTE Band 7/Band 12/Band 17)			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(c)(10)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(c)(10)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	3M Chamber & Accessory Equipment	ETS-LINDGREN	3M	N/A	Dec. 03, 2018	Dec. 03, 2021
☒	Receiver	R&S	ESIB26	100114	Nov. 24, 2018	Nov. 24, 2019
☐	Loop Antenna	ETS-LINDGREN	6502	00202525	Dec. 03, 2018	Dec. 03, 2019
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Dec. 08, 2018	Dec. 08, 2019
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	Dec. 08, 2018	Dec. 08, 2019
☒	Preamplifier	HP	8447F	2805A02960	Nov. 24, 2018	Nov. 24, 2019
☒	Broadband Antenna (Pre-amplifier)	ETS-LINDGREN	3142E-PA	00201891	May 18, 2019	May 18, 2020
☒	6dB Attenuator	Talent	RA6A5-N-18	18103002	Nov. 24, 2018	Nov. 24, 2019
☒	Horn Antenna	ETS-LINDGREN	3117	00164202	Dec. 08, 2018	Dec. 08, 2019
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201874	May 18, 2019	May 18, 2020
☒	Horn Antenna	ETS-LINDGREN	3116C	00200180	May 20, 2019	May 20, 2020
☒	Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Jan. 05, 2019	Jan. 05, 2020
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Highpass Filter (1.2GHz~18GHz)	Micro-Tronics	HPM50108	G552	Nov. 29, 2018	Nov. 29, 2019
☒	Highpass Filter (3GHz~18GHz)	Micro-Tronics	HPM50117	G005	Nov. 29, 2018	Nov. 29, 2019
☒	Wideband Radio Communication Tester	R&S	CMW500	116254	Jun. 07, 2019	Jun. 07, 2020
☒	Test Software	Audix	e3	Software Version: 9.160333		

RF Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 24, 2018	Nov. 24, 2019
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Nov. 24, 2018	Nov. 24, 2019
☒	Wideband Radio Communication Tester	R&S	CMW500	116254	Jun. 07, 2019	Jun. 07, 2020
☒	DC Source	KIKUSUI	PWR400L	LK003024	Sep. 18, 2018	Sep. 18, 2019
☒	Temp & Humidity chamber	Votisch	VT4002	58566133290020	Jun. 05, 2018	Jun. 05, 2020

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING

4.1.1 Normal or Extreme Test Conditions

Test Environment	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
TN/VN	+15 to +35	3.85	20 to 75
TL/VL	-30	3.45	20 to 75
TH/VL	+50	3.45	20 to 75
TL/VH	-30	4.4	20 to 75
TH/VH	+50	4.4	20 to 75

Remark:


- 1) The EUT just work in such extreme temperature of -30 °C to +50 °C and the extreme voltage of 3.45 V to 4.4 V, so here the EUT is tested in the temperature of -30 °C to +50 °C and the voltage of 3.45 V to 4.4 V.
- 2) VN: Normal Voltage; TN: Normal Temperature;
TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.


4.1.2 Record of Normal Environment

Test Item	Temperature (°C)	Relative Humidity (%)	Pressure (kPa)	Tested by
Equivalent Isotropic Radiated Power (EIRP)	23.5	49	99.80	Hank Wu
Conducted Output Power	23.5	49	99.80	Hank Wu
Peak-to-average ratio	23.5	49	99.80	Hank Wu
99%&26dB Bandwidth	23.5	49	99.80	Hank Wu
Band Edge at antenna terminals	23.5	49	99.80	Hank Wu
Spurious emissions at antenna terminals	23.5	49	99.80	Hank Wu
Field strength of spurious radiation	25.2	52	100.02	Andy Lin
Frequency stability	23.5	49	99.80	Hank Wu


4.2 TEST SETUP

4.2.1 For Radiated Emissions test setup

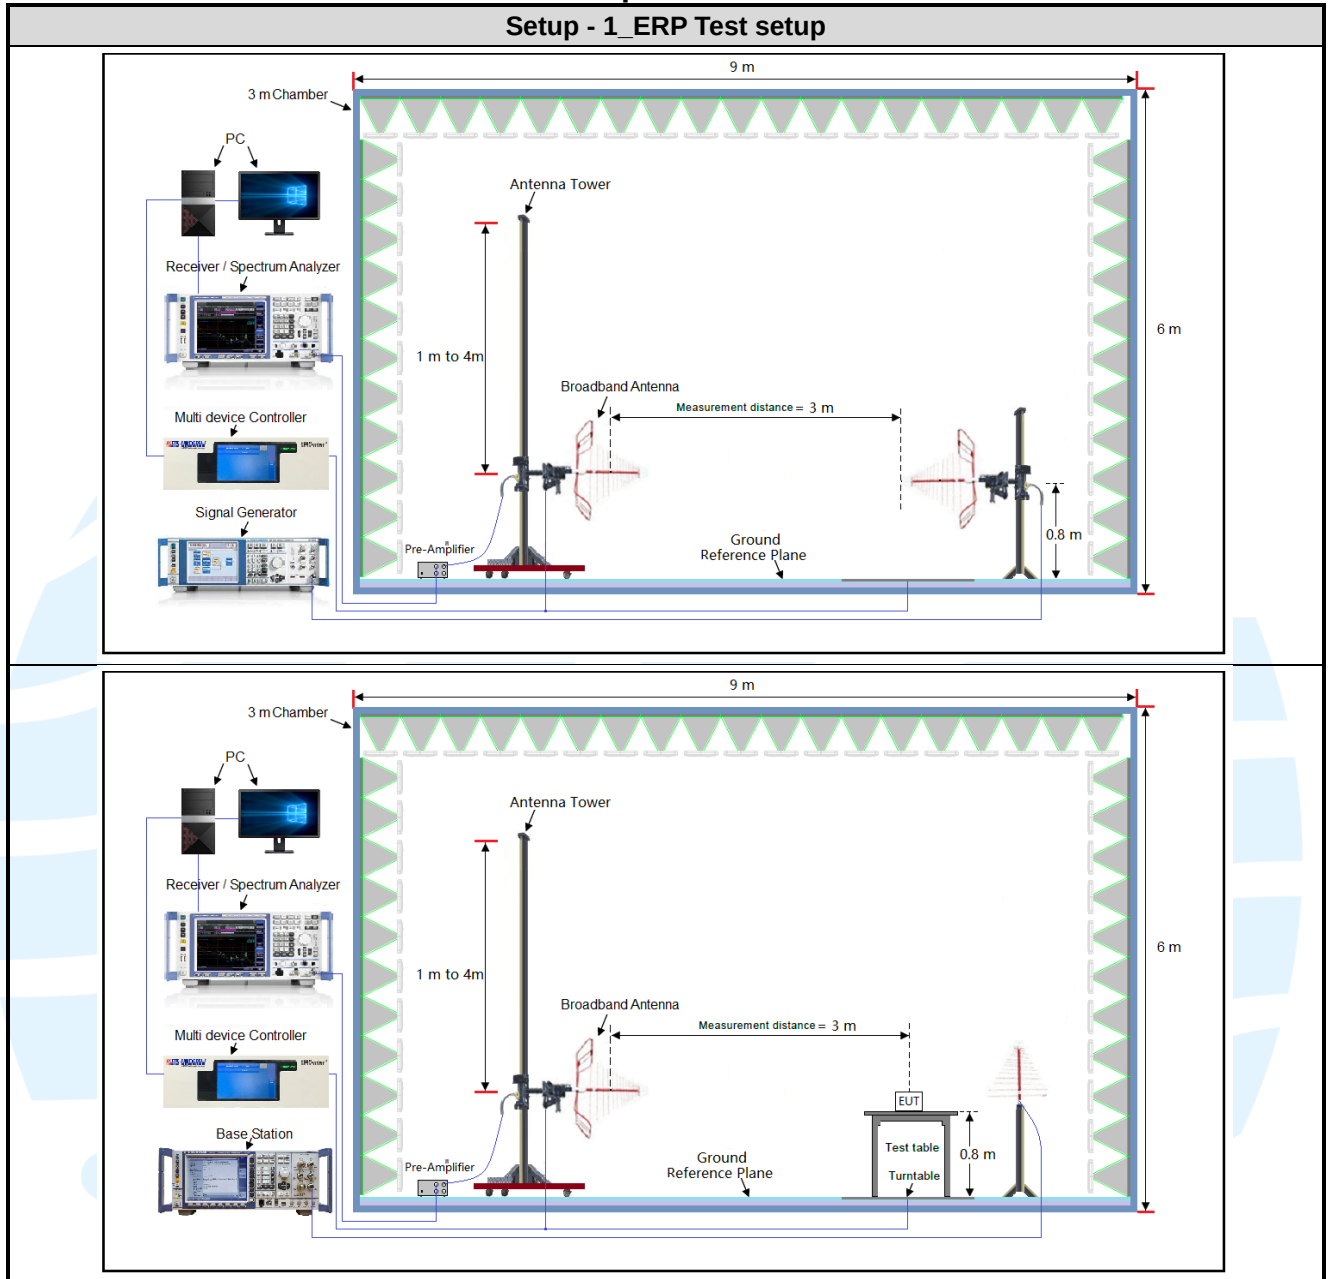

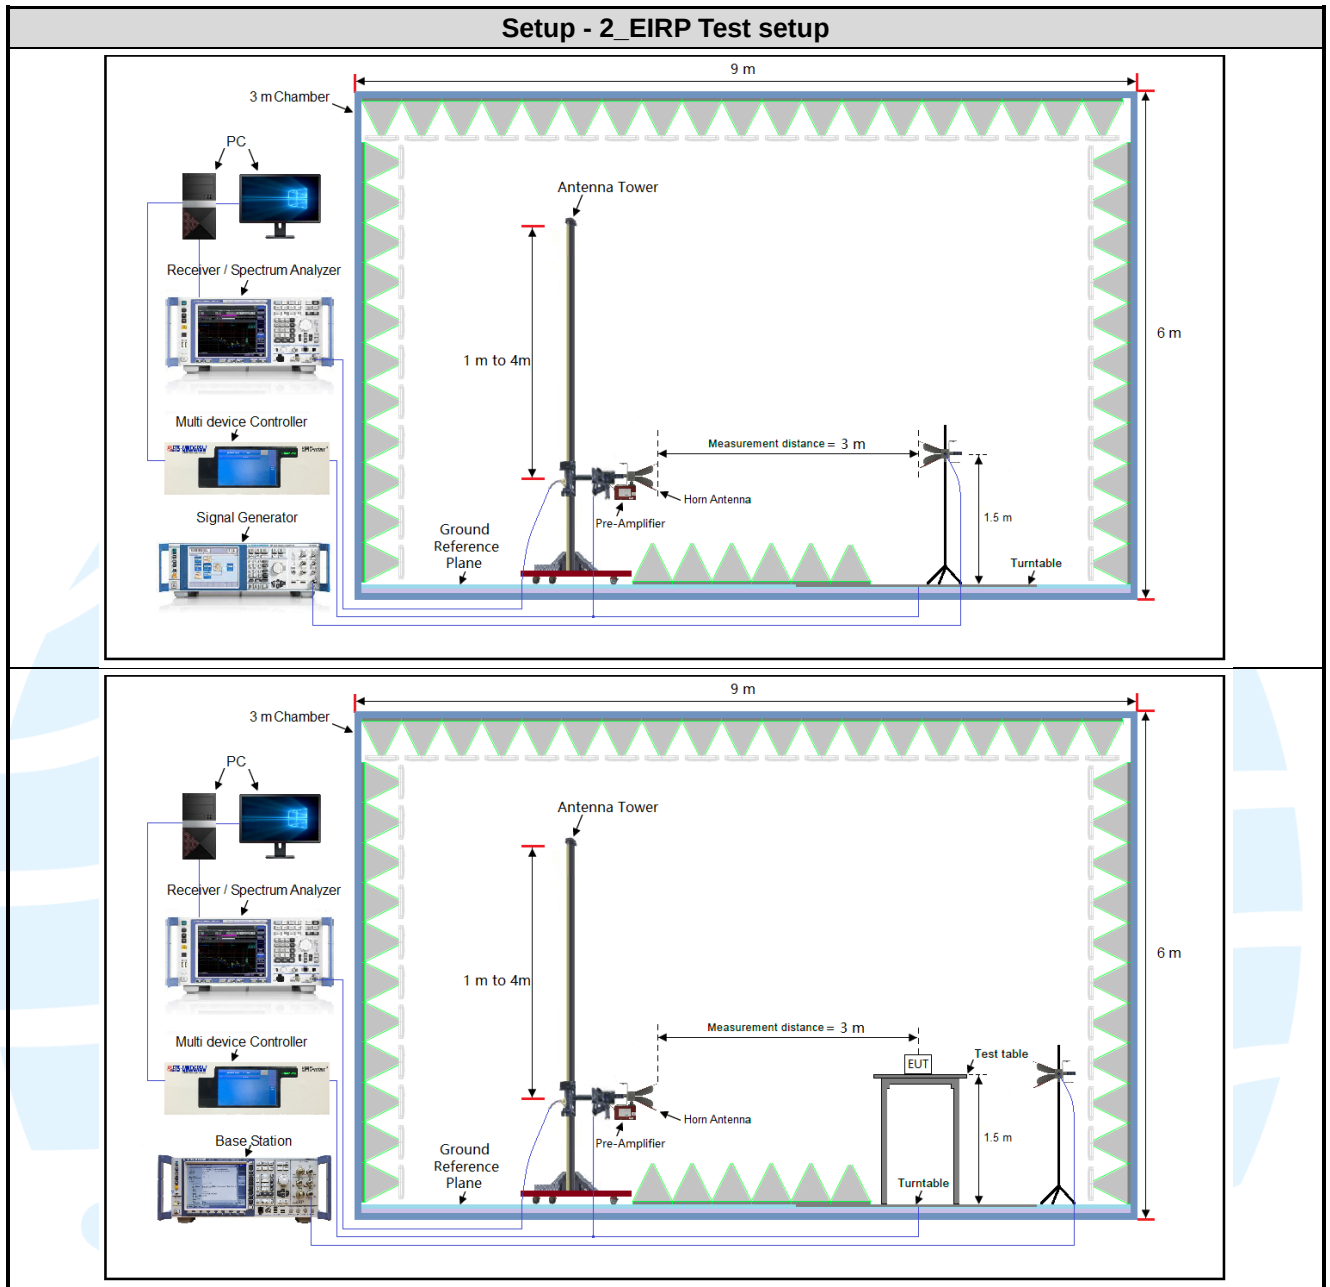

4.2.2 For Conducted RF test setup

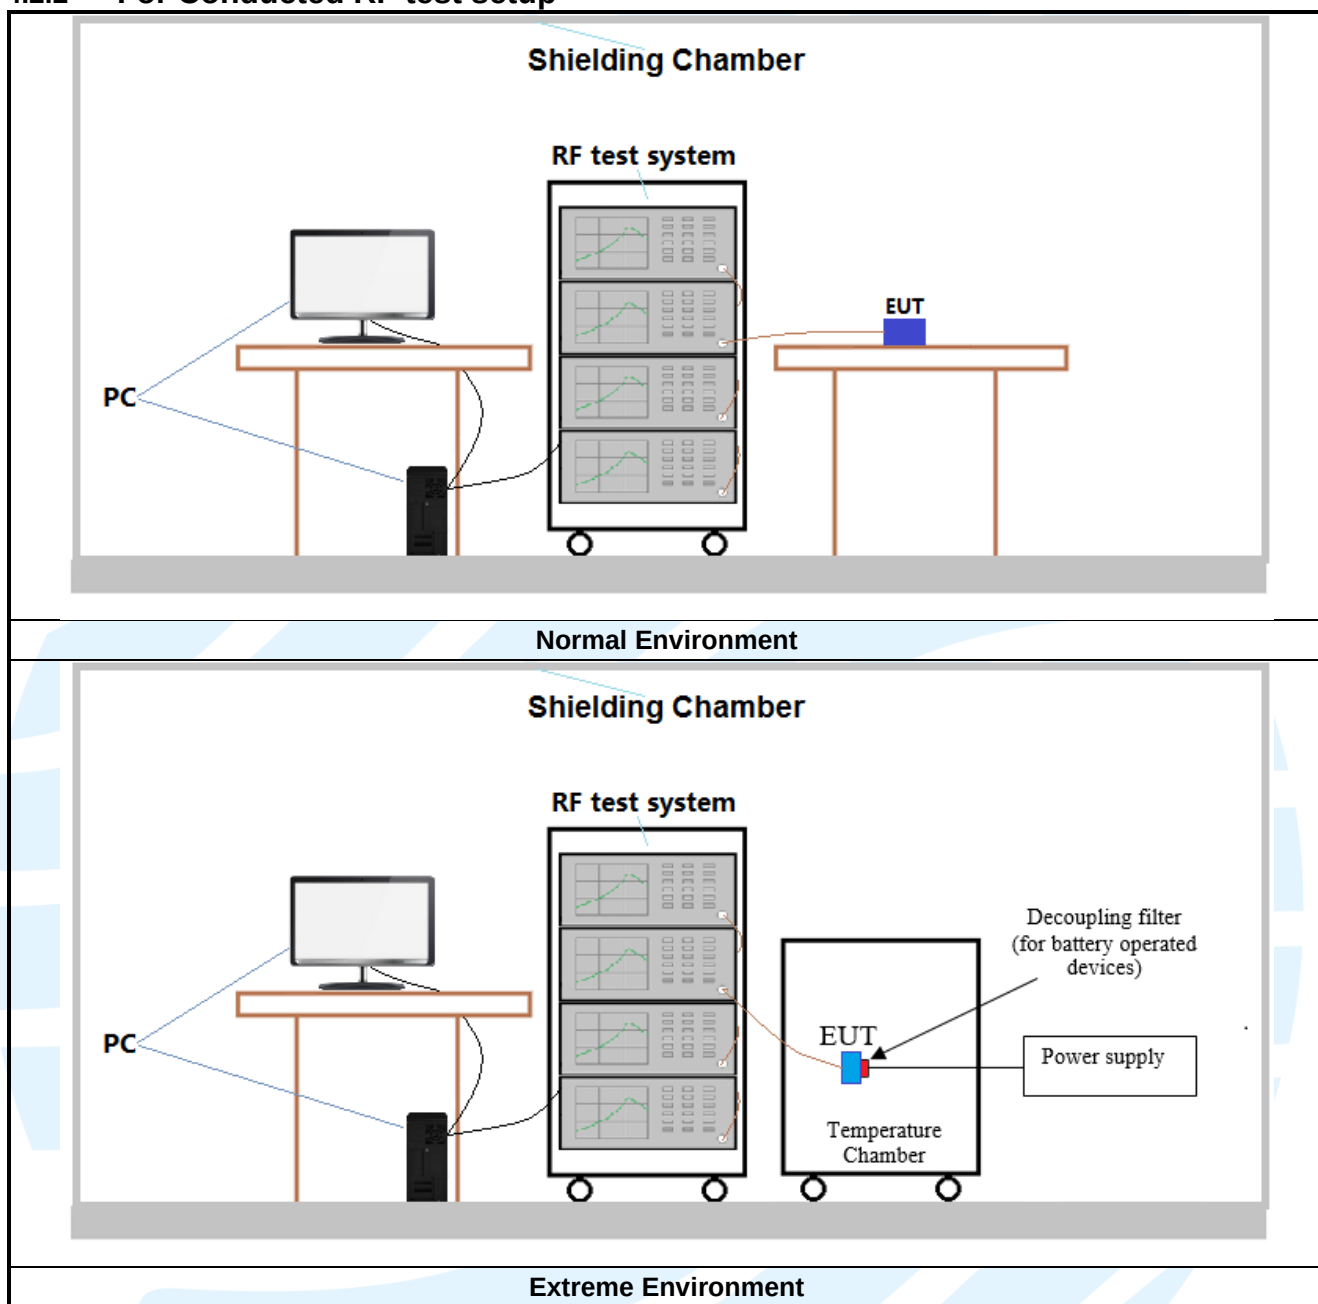

4.3 TEST CHANNELS

Band	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
GSM/GPRS/ EDGE850	Tx (824 MHz ~ 849 MHz)	Channel 128	Channel 190	Channel 251
		824.2 MHz	836.6 MHz	848.8 MHz
WCDMA band V	Tx (824 MHz ~ 849 MHz)	Channel 4132	Channel 4182	Channel 4233
		826.4 MHz	836.4 MHz	846.6 MHz

Band	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
GSM/GPRS/ EDGE1900	Tx (1850 MHz-1910 MHz)	Channel 512	Channel 661	Channel 810
		1850.2 MHz	1880.0 MHz	1909.8 MHz
WCDMA Band II	Tx (1850 MHz-1910 MHz)	Channel 9262	Channel 9400	Channel 9538
		1852.4 MHz	1880.0 MHz	1907.6 MHz

Band	Tx/Rx Frequency	RF Channel		
		Low(L)	Middle(M)	High(H)
WCDMA Band IV	Tx (1710 MHz-1755 MHz)	Channel 1312	Channel 1412	Channel 1513
		1712.4 MHz	1732.4 MHz	1752.6 MHz

Band	Test Frequency ID	Bandwidth (MHz)	Number [UL]	Frequency of Uplink (MHz)
LTE Band 2 TX: 1850-1910MHz	Low Range	1.4	18607	1850.7
		3	18615	1851.5
		5	18625	1852.5
		10	18650	1855
		15	18675	1857.5
		20	18700	1860
	Middle Range	1.4/3/5/10/15/20	18900	1880
	High Range	1.4	19193	1909.3
		3	19185	1908.5
		5	19175	1907.5
		10	19150	1905
		15	19125	1902.5
		20	19100	1900
LTE Band 4 TX:1710-1755MHz	Low Range	1.4	19957	1710.7
		3	19965	1711.5
		5	19975	1712.5
		10	20000	1715
		15	20025	1717.5
		20	20050	1720
	Middle Range	1.4/3/5/10/ 15/20	20175	1732.5
	High Range	1.4	20393	1754.3
		3	20385	1753.5
		5	20375	1752.5
		10	20350	1750
		15	20325	1747.5

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

		20	20300	1745
LTE band 5 TX:824-849 MHz	Low Range	1.4	20407	824.7
		3	20415	825.5
		5	20425	826.5
		10	20450	829
		1.4/3/5/10	20525	836.5
	High Range	1.4	20643	848.3
		3	20635	847.5
		5	20625	846.5
		10	20600	844
		5	20775	2502.5
LTE Band 7 TX:2500-2570MHz	Low Range	10	20800	2505
		15	20825	2507.5
		20	20850	2510
		5/10/15/20	21100	2535
	High Range	5	21425	2567.5
		10	21400	2565
		15	21375	2562.5
		20	21350	2560
		1.4	23017	699.7
LTE Band 12 TX:699-716MHz	Low Range	3	23025	700.5
		5	23035	701.5
		10	23060	704
		1.4/3/5/10	23095	707.5
	High Range	1.4	23173	715.3
		3	23165	714.5
		5	23155	713.5
		10	23130	711
		5	23755	706.5
LTE Band 17 TX:704-716MHz	Low Range	10	23780	709
		5/10	23790	710
	High Range	5	23825	713.5
		10	23800	711

4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8Vdc rechargeable Li-on battery. Only the worst case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports.

The worst case was found when positioned as the table below.

Band	Mode	Antenna Port	Worst-case axis positioning
GSM 850	1TX	Chain 0	Y axis
GSM 1900	1TX	Chain 0	Y axis
WCDMA Band II	1TX	Chain 0	Y axis
WCDMA Band IV	1TX	Chain 0	Y axis
WCDMA Band V	1TX	Chain 0	Y axis
LTE Band 2	1TX	Chain 0	Y axis
LTE Band 4	1TX	Chain 0	Y axis
LTE Band 5	1TX	Chain 0	Y axis
LTE Band 7	1TX	Chain 0	Y axis
LTE Band 12	1TX	Chain 0	Y axis
LTE Band 17	1TX	Chain 0	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.5 PRE-SCAN

Pre-scan under all rate at lowest middle and highest channel, find the transmitter power as below:

GSM 850 Maximum Average Power (dBm)			
Channel	128	190	251
Frequency(MHz)	824.2 MHz	836.6 MHz	848.8 MHz
GSM (GMSK, 1Tx-slot)	32.11	32.21	32.15
GPRS (GMSK, 1Tx-slot)	32.08	32.15	32.13
GPRS (GMSK, 2Tx-slot)	31.29	31.37	31.36
GPRS (GMSK, 3Tx-slot)	29.50	29.68	29.59
GPRS (GMSK, 4Tx-slot)	28.43	28.54	28.47
EDGE (8PSK, 1Tx-slot)	26.65	26.81	26.65
EDGE (8PSK, 2Tx-slot)	24.60	24.64	24.54
EDGE (8PSK, 3Tx-slot)	22.34	22.38	22.22
EDGE (8PSK, 4Tx-slot)	21.24	21.21	21.02

GSM 1900 Maximum Average Power (dBm)			
Channel	512	661	810
Frequency(MHz)	1850.2 MHz	1880.0 MHz	1909.8 MHz
GSM (GMSK, 1Tx-slot)	28.95	28.71	28.64
GPRS (GMSK, 1Tx-slot)	28.94	28.69	28.73
GPRS (GMSK, 2Tx-slot)	28.23	27.96	27.98
GPRS (GMSK, 3Tx-slot)	26.52	26.21	26.32
GPRS (GMSK, 4Tx-slot)	25.51	25.25	25.27
EDGE (8PSK, 1Tx-slot)	25.59	25.82	25.59
EDGE (8PSK, 2Tx-slot)	24.42	24.55	24.51
EDGE (8PSK, 3Tx-slot)	22.21	22.26	22.18
EDGE (8PSK, 4Tx-slot)	20.79	20.84	20.82

WCDMA Band II Maximum Average Power (dBm)			
Channel	9262	9400	9538
Frequency(MHz)	1852.4 MHz	1880.0 MHz	1907.6 MHz
RMC 12.2K	23.43	23.42	23.35
HSDPA Subtest-1	22.02	22.12	22.07
HSDPA Subtest-2	22.05	22.08	22.01
HSDPA Subtest-3	21.53	21.60	21.55
HSDPA Subtest-4	21.49	21.58	21.56
HSUPA Subtest-1	19.96	20.01	19.99
HSUPA Subtest-2	20.01	20.03	19.96
HSUPA Subtest-3	20.97	21.08	20.96
HSUPA Subtest-4	19.56	19.61	19.55
HSUPA Subtest-5	21.47	21.55	21.49

WCDMA Band IV Maximum Average Power (dBm)			
Channel	1312	1412	1513
Frequency(MHz)	1712.4 MHz	1732.4 MHz	1752.6 MHz
RMC 12.2K	22.73	22.78	23.06
HSDPA Subtest-1	21.44	21.47	21.61
HSDPA Subtest-2	21.43	21.44	21.57
HSDPA Subtest-3	20.94	20.94	21.05
HSDPA Subtest-4	20.95	20.94	21.07
HSUPA Subtest-1	19.38	19.42	19.49
HSUPA Subtest-2	19.35	19.34	19.49
HSUPA Subtest-3	20.91	20.92	21.09
HSUPA Subtest-4	18.92	18.99	19.02
HSUPA Subtest-5	20.83	20.86	20.93

WCDMA Band V Maximum Average Power (dBm)			
Channel	4132	4182	4233
Frequency(MHz)	826.4 MHz	836.4 MHz	846.6 MHz
RMC 12.2K	23.35	23.37	23.43
HSDPA Subtest-1	22.01	22.01	21.99
HSDPA Subtest-2	21.96	21.98	21.96
HSDPA Subtest-3	21.50	21.47	21.46
HSDPA Subtest-4	21.46	21.47	21.45
HSUPA Subtest-1	19.94	19.97	19.89
HSUPA Subtest-2	19.96	19.95	19.91
HSUPA Subtest-3	21.53	21.47	21.42
HSUPA Subtest-4	22.01	21.94	21.86
HSUPA Subtest-5	21.42	21.44	21.41

LTE Band 2 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 1.4 MHz						Channel Bandwidth: 3 MHz				
QPSK	1	0	21.73	21.82	21.62	1	0	21.71	21.80	21.69
	1	2	22.05	22.07	22.14	1	7	22.13	22.00	22.06
	1	5	21.59	21.70	21.48	1	14	21.62	21.59	21.55
	3	0	22.09	21.89	22.05	8	0	21.08	20.89	21.01
	3	1	22.01	21.91	21.97	8	3	21.06	20.94	20.98
	3	3	21.87	22.08	22.03	8	7	20.86	21.08	21.12
16QAM	6	0	20.95	20.99	20.99	15	0	21.02	21.07	21.00
	1	0	20.99	21.08	20.90	1	0	21.04	21.08	21.02
	1	2	21.41	21.43	21.41	1	7	21.30	21.33	21.32
	1	5	20.96	20.82	20.94	1	14	20.82	20.99	20.93
	3	0	21.11	21.02	20.98	8	0	19.98	19.87	20.09
	3	1	21.04	20.99	21.00	8	3	20.07	19.92	20.14
QPSK	3	3	20.91	20.97	21.01	8	7	20.00	19.97	19.99
	6	0	20.07	19.93	20.15	15	0	20.00	19.98	20.09
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	21.77	21.83	21.71	1	0	21.83	21.71	21.69
	1	12	21.98	22.06	22.07	1	24	22.09	22.17	22.15
	1	24	21.69	21.67	21.60	1	49	21.61	21.71	21.55
	12	0	21.03	20.98	20.97	25	0	21.07	20.99	21.13
	12	6	20.93	20.92	21.12	25	12	21.06	20.91	21.04
	12	13	20.98	21.10	21.11	25	25	20.84	20.94	20.98
16QAM	25	0	21.03	21.02	21.13	50	0	21.02	21.00	21.12
	1	0	21.13	21.01	20.85	1	0	21.14	21.05	21.02
	1	12	21.46	21.50	21.34	1	24	21.37	21.31	21.29
	1	24	20.86	20.93	20.85	1	49	20.96	20.93	20.83
	12	0	19.99	19.99	20.05	25	0	19.99	19.86	20.08
	12	6	19.94	20.07	20.16	25	12	19.93	19.91	20.11
16QAM	12	13	19.87	20.05	20.12	25	25	19.92	19.99	19.96
	25	0	19.98	20.10	20.18	50	0	20.04	19.96	20.06

LTE Band 2 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 15 MHz						Channel Bandwidth: 20 MHz				
QPSK	1	0	21.85	21.69	21.71	1	0	21.88	21.83	21.76
	1	37	21.95	22.13	21.98	1	50	22.15	22.18	22.17
	1	74	21.68	21.62	21.57	1	99	21.75	21.77	21.64
	37	0	21.09	20.96	21.02	50	0	21.13	21.04	21.15
	37	19	21.05	20.92	21.10	50	25	21.11	21.08	21.16
	37	39	20.94	21.06	21.08	50	50	21.01	21.11	21.13
	75	0	20.99	20.98	21.01	100	0	21.09	21.09	21.17
16QAM	1	0	21.09	21.03	20.94	1	0	21.16	21.12	21.04
	1	37	21.45	21.50	21.35	1	50	21.46	21.51	21.47
	1	74	20.93	20.88	20.96	1	99	21.01	21.02	21.02
	37	0	19.94	19.99	20.06	50	0	20.12	20.04	20.14
	37	19	20.06	20.02	20.10	50	25	20.08	20.11	20.17
	37	39	19.98	20.01	20.11	50	50	20.02	20.08	20.13
	75	0	19.93	20.03	20.05	100	0	20.09	20.11	20.19

LTE Band 4 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 1.4 MHz						Channel Bandwidth: 3 MHz				
QPSK	1	0	20.67	21.04	20.59	1	0	20.63	21.13	20.72
	1	2	21.14	21.43	20.95	1	7	21.26	21.37	20.96
	1	5	20.57	20.78	20.62	1	14	20.56	20.69	20.51
	3	0	21.32	21.16	21.09	8	0	20.40	20.18	20.03
	3	1	21.40	21.31	21.22	8	3	20.33	20.33	20.36
	3	3	21.29	20.95	21.04	8	7	20.19	19.97	19.99
	6	0	20.31	20.17	20.05	15	0	20.40	20.11	20.03
16QAM	1	0	20.30	20.27	19.92	1	0	20.37	20.36	19.94
	1	2	20.58	20.74	20.31	1	7	20.70	20.61	20.38
	1	5	20.31	20.12	19.90	1	14	20.27	20.13	19.89
	3	0	20.37	20.29	20.06	8	0	19.31	19.29	19.06
	3	1	20.40	20.33	20.35	8	3	19.41	19.30	19.46
	3	3	20.25	20.25	20.10	8	7	19.23	19.24	19.21
	6	0	19.24	19.27	19.32	15	0	19.40	19.30	19.35

LTE Band 4 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	20.67	21.01	20.64	1	0	20.67	21.01	20.61
	1	12	21.24	21.37	20.93	1	24	21.15	21.41	20.95
	1	24	20.61	20.85	20.61	1	49	20.61	20.68	20.53
	12	0	20.51	20.13	20.02	25	0	20.38	20.15	20.16
	12	6	20.28	20.27	20.33	25	12	20.28	20.22	20.34
	12	13	20.20	20.13	19.95	25	25	20.30	19.99	19.93
	25	0	20.36	20.11	20.10	50	0	20.31	20.03	20.06
16QAM	1	0	20.41	20.36	19.91	1	0	20.39	20.31	19.98
	1	12	20.54	20.79	20.32	1	24	20.57	20.64	20.44
	1	24	20.34	20.15	19.90	1	49	20.21	20.05	19.84
	12	0	19.33	19.36	19.21	25	0	19.37	19.34	19.20
	12	6	19.30	19.36	19.38	25	12	19.25	19.32	19.46
	12	13	19.23	19.29	19.24	25	25	19.23	19.29	19.19
	25	0	19.40	19.24	19.38	50	0	19.37	19.26	19.35

Channel Bandwidth: 15 MHz						Channel Bandwidth: 20 MHz				
QPSK	1	0	20.71	21.12	20.58	1	0	20.75	21.17	20.75
	1	37	21.09	21.48	21.02	1	50	21.26	21.53	21.06
	1	74	20.43	20.80	20.66	1	99	20.63	20.87	20.68
	37	0	20.33	20.09	20.13	50	0	20.51	20.27	20.16
	37	19	20.39	20.33	20.35	50	25	20.46	20.34	20.36
	37	39	20.17	20.04	20.02	50	50	20.31	20.14	20.05
	75	0	20.33	20.09	20.07	100	0	20.42	20.22	20.12
16QAM	1	0	20.29	20.33	19.94	1	0	20.46	20.37	20.04
	1	37	20.72	20.64	20.37	1	50	20.72	20.79	20.49
	1	74	20.30	20.04	19.99	1	99	20.38	20.18	20.02
	37	0	19.45	19.29	19.08	50	0	19.46	19.42	19.24
	37	19	19.30	19.29	19.46	50	25	19.45	19.47	19.51
	37	39	19.12	19.31	19.11	50	50	19.31	19.37	19.25
	75	0	19.22	19.35	19.22	100	0	19.41	19.36	19.38

LTE Band 5 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 1.4 MHz						Channel Bandwidth: 3 MHz				
QPSK	1	0	21.71	21.91	21.80	1	0	21.72	21.94	21.85
	1	2	21.89	21.92	21.98	1	7	21.88	22.06	22.03
	1	5	21.58	21.82	21.89	1	14	21.75	21.91	21.75
	3	0	22.03	21.92	22.06	8	0	21.05	21.08	21.05
	3	1	22.00	21.92	21.95	8	3	20.94	20.93	20.98
	3	3	21.91	22.09	21.98	8	7	20.98	21.13	21.06
	6	0	20.94	20.92	20.99	15	0	20.98	20.99	20.99
16QAM	1	0	21.11	21.11	21.11	1	0	21.02	21.03	21.08
	1	2	21.21	21.28	21.27	1	7	21.32	21.20	21.19
	1	5	21.06	21.14	20.89	1	14	21.03	21.12	21.06
	3	0	21.05	20.98	20.94	8	0	20.02	19.99	19.99
	3	1	21.01	21.04	21.00	8	3	20.02	20.00	20.03
	3	3	21.10	21.09	20.84	8	7	20.10	20.08	19.93
	6	0	20.03	20.05	20.02	15	0	19.99	20.00	20.01
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	21.78	21.90	21.88	1	0	21.82	22.04	21.96
	1	12	21.87	22.10	22.11	1	24	22.06	22.11	22.14
	1	24	21.57	21.95	21.84	1	49	21.77	21.97	21.91
	12	0	20.93	20.97	21.05	25	0	21.07	21.08	21.06
	12	6	20.90	20.87	20.93	25	12	21.03	21.07	21.10
	12	13	20.97	21.09	21.02	25	25	21.08	21.18	21.06
	25	0	21.05	21.03	20.95	50	0	21.08	21.11	21.05
16QAM	1	0	21.02	21.17	21.03	1	0	21.14	21.20	21.21
	1	12	21.14	21.14	21.26	1	24	21.32	21.29	21.31
	1	24	21.13	21.11	21.02	1	49	21.19	21.17	21.09
	12	0	20.01	20.00	19.93	25	0	20.09	20.07	20.08
	12	6	19.93	19.93	19.95	25	12	20.06	20.07	20.08
	12	13	20.10	20.10	19.95	25	25	20.12	20.16	20.03
	25	0	19.95	20.06	19.89	50	0	20.10	20.13	20.04

LTE Band 7 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	20.65	20.57	20.70	1	0	20.75	20.73	20.77
	1	12	21.05	20.98	21.00	1	24	21.04	20.86	21.07
	1	24	20.66	20.48	20.89	1	49	20.55	20.58	20.81
	12	0	19.96	19.74	20.09	25	0	19.91	19.81	20.17
	12	6	20.03	19.87	20.08	25	12	20.06	19.87	20.17
	12	13	19.93	19.83	20.13	25	25	19.90	19.94	20.18
	25	0	19.92	19.85	20.12	50	0	19.99	19.82	20.21
16QAM	1	0	19.99	19.96	19.94	1	0	19.83	19.94	20.02
	1	12	20.22	20.31	20.30	1	24	20.19	20.28	20.26
	1	24	20.02	19.92	20.26	1	49	20.07	19.74	20.26
	12	0	18.91	18.87	19.06	25	0	18.99	18.78	19.03
	12	6	18.94	18.99	19.10	25	12	18.90	18.93	19.15
	12	13	18.83	18.87	19.25	25	25	18.87	19.01	19.17
	25	0	19.17	19.07	19.12	50	0	19.11	19.09	19.15
Channel Bandwidth: 15 MHz						Channel Bandwidth: 20 MHz				
QPSK	1	0	20.74	20.62	20.65	1	0	20.78	20.75	20.85
	1	37	20.91	21.03	21.05	1	50	21.09	21.04	21.16
	1	74	20.67	20.61	20.92	1	99	20.73	20.66	20.93
	37	0	20.02	19.81	20.02	50	0	20.09	19.94	20.21
	37	19	20.08	19.95	20.14	50	25	20.10	20.05	20.23
	37	39	19.88	19.89	20.25	50	50	20.00	19.97	20.30
	75	0	19.98	19.78	20.22	100	0	20.02	19.95	20.23
16QAM	1	0	19.90	20.09	19.94	1	0	20.02	20.09	20.10
	1	37	20.21	20.17	20.40	1	50	20.32	20.35	20.43
	1	74	19.99	19.81	20.21	1	99	20.11	19.93	20.27
	37	0	18.97	18.89	19.11	50	0	19.07	18.95	19.21
	37	19	18.95	18.91	19.09	50	25	19.09	19.01	19.25
	37	39	18.96	18.88	19.20	50	50	19.02	19.03	19.28
	75	0	19.22	19.14	19.20	100	0	19.22	19.27	19.25

LTE Band 12 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 1.4 MHz						Channel Bandwidth: 3 MHz				
QPSK	1	0	21.53	21.41	21.42	1	0	21.51	21.35	21.31
	1	2	21.68	21.65	21.58	1	7	21.59	21.69	21.47
	1	5	21.58	21.48	21.45	1	14	21.61	21.54	21.55
	3	0	21.51	21.53	21.36	8	0	20.52	20.63	20.53
	3	1	21.65	21.64	21.50	8	3	20.61	20.65	20.64
	3	3	21.74	21.74	21.70	8	7	20.64	20.64	20.68
	6	0	20.57	20.62	20.65	15	0	20.62	20.67	20.68
16QAM	1	0	20.56	20.59	20.61	1	0	20.59	20.63	20.61
	1	2	20.91	20.70	20.75	1	7	20.94	20.79	20.77
	1	5	20.81	20.75	20.58	1	14	20.73	20.86	20.76
	3	0	20.45	20.70	20.72	8	0	19.51	19.61	19.62
	3	1	20.88	20.84	20.94	8	3	19.95	19.84	19.95
	3	3	20.70	21.13	21.04	8	7	19.72	20.05	20.11
	6	0	20.01	19.91	20.04	15	0	20.02	19.90	19.90
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	21.51	21.35	21.47	1	0	21.57	21.51	21.51
	1	12	21.62	21.70	21.56	1	24	21.74	21.75	21.64
	1	24	21.49	21.43	21.57	1	49	21.66	21.63	21.60

	12	0	20.62	20.59	20.38	25	0	20.64	20.65	20.54
	12	6	20.56	20.58	20.48	25	12	20.70	20.69	20.66
	12	13	20.58	20.79	20.56	25	25	20.78	20.83	20.70
	25	0	20.70	20.70	20.55	50	0	20.71	20.74	20.68
16QAM	1	0	20.66	20.54	20.61	1	0	20.73	20.66	20.70
	1	12	20.94	20.71	20.77	1	24	21.00	20.81	20.81
	1	24	20.67	20.73	20.61	1	49	20.81	20.89	20.77
	12	0	19.50	19.68	19.60	25	0	19.65	19.76	19.74
	12	6	19.92	19.91	20.02	25	12	20.01	19.98	20.03
	12	13	19.71	19.95	20.08	25	25	19.88	20.15	20.11
	25	0	19.92	19.88	19.97	50	0	20.04	20.06	20.06

LTE Band 17 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	21.36	21.94	21.52	1	0	21.50	21.97	21.52
	1	12	21.54	21.97	21.78	1	24	21.68	22.12	21.85
	1	24	21.42	22.03	21.58	1	49	21.62	22.04	21.60
	12	0	20.50	21.01	20.41	25	0	20.59	21.01	20.59
	12	6	20.58	21.08	20.61	25	12	20.73	21.13	20.71
	12	13	20.69	21.07	20.82	25	25	20.78	21.15	20.85
	25	0	20.64	21.02	20.93	50	0	20.73	21.10	20.99
16QAM	1	0	20.62	21.12	20.81	1	0	20.71	21.13	20.95
	1	12	20.87	21.12	21.20	1	24	20.92	21.28	21.25
	1	24	20.77	21.08	21.09	1	49	20.86	21.26	21.09
	12	0	19.39	20.01	19.90	25	0	19.52	20.01	19.96
	12	6	19.87	20.08	19.92	25	12	19.91	20.10	20.09
	12	13	20.06	20.12	20.13	25	25	20.12	20.13	20.15
	25	0	19.92	20.02	20.02	50	0	20.02	20.09	20.06

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the worse mode applicability and tested channel detail as below:

Band	Radiated	Conducted
GSM/GPRS/EDGE 850/1900	1) GSM (GMSK, 1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link 3) EDGE (8PSK, 1Tx-slot) Link	1) GSM (GMSK, 1Tx-slot) Link 2) GPRS (GMSK, 1Tx-slot) Link 3) EDGE (8PSK, 1Tx-slot) Link
WCDMA Band II/IV/V	RMC 12.2Kbps Link	RMC 12.2Kbps Link

Item	Band	Bandwidth(MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
ERP/EIRP	2	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☐	☐	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☐	☐	☒	☒	☒
	5	☒	☒	☒	☒	-	-	☒	☒	☐	☒	☐	☐	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☐	☒	☐	☐	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☐	☒	☐	☐	☒	☒	☒
Conducted output power	2	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☒	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☒	☒	☒	☒

	5	☒	☒	☒	☒	-	-	☒	☒	☐	☒	☒	☒	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☐	☒	☒	☒	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☐	☒	☒	☒	☒	☒	☒
99%&26dB Bandwidth	2	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☒	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☒	☒	☒	☒
	5	☒	☒	☒	☒	-	-	☒	☒	☐	☐	☐	☒	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☐	☐	☐	☒	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☐	☐	☐	☒	☒	☒	☒
peak-to-av erage ratio	2	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☐	☒	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☐	☒	☒	☒	☒
	5	☒	☒	☒	☒	-	-	☒	☒	☐	☒	☐	☒	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☐	☒	☐	☒	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☐	☒	☐	☒	☒	☒	☒
Band Edge at antenna terminals	2	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☐	☒	☒	☐	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☐	☒	☒	☐	☒
	5	☒	☒	☒	☒	-	-	☒	☒	☐	☒	☐	☒	☒	☐	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☐	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☐	☒	☐	☒	☒	☐	☒
	17	-	-	☒	☒	-	-	☒	☒	☐	☒	☐	☒	☒	☐	☒
Spurious emissions at antenna terminals	2	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☐	☐	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☐	☐	☒	☒	☒
	5	☒	☒	☒	☒	-	-	☒	☒	☐	☒	☐	☐	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☐	☒	☐	☐	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☐	☒	☐	☐	☒	☒	☒
Field	2	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☐	☐	☐	☒	☐

strength of spurious radiation	4	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☐	☐	☐	☒	☐
	5	☒	☒	☒	☒	-	-	☒	☐	☐	☒	☐	☐	☐	☒	☐
	7	-	-	☒	☒	☒	☒	☒	☐	☐	☒	☐	☐	☐	☒	☐
	12	☒	☒	☒	☒	-	-	☒	☐	☐	☒	☐	☐	☐	☒	☐
	17	-	-	☒	☒	-	-	☒	☐	☐	☒	☐	☐	☐	☒	☐
Frequency stability	2	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☐	☒	☐	☒	☐
	4	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☐	☒	☐	☒	☐
	5	☒	☒	☒	☒	-	-	☒	☐	☐	☐	☐	☒	☐	☒	☐
	7	-	-	☒	☒	☒	☒	☒	☐	☐	☐	☐	☒	☐	☒	☐
	12	☒	☒	☒	☒	-	-	☒	☐	☐	☐	☐	☒	☐	☒	☐
	17	-	-	☒	☒	-	-	☒	☐	☐	☐	☐	☒	☐	☒	☐
Remark: The mark " ☒ " means is chosen for testing; The mark " ☐ " means is not chosen for testing; The mark "-" means is not supported bandwidth																

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2 Subpart J	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 22 Subpart H	Cellular Radiotelephone Service
3	FCC 47 CFR Part 27	Miscellaneous Wireless Communications Services
4	FCC 47 CFR Part 24 Subpart E	PART 24 – PERSONAL COMMUNICATIONS SERVICES Subpart E – Broadband PCS
5	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01
6	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

5.2 ERP OR EIRP

Test Requirement: FCC 47 CFR Part 2.1046(a),
GSM 850 & WCDMA Band V & LTE Band 5: FCC 47 CFR Part 22.913(a),
GSM 1900 & WCDMA Band II & LTE Band 2: FCC 47 CFR Part 24.232(c),
WCDMA Band IV & LTE Band 4: FCC 47 CFR Part 27.50(d)(4),
LTE Band 12 & Band 17: FCC 47 CFR Part 27.50(c)(10)
LTE Band 7: FCC 47 CFR Part 27.50(h)(2)

Test Method: KDB 971168 D01v03r01& ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c)

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

FCC 47 CFR Part 27.50(c)(10):

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

FCC 47 CFR Part 27.50(h)(2): Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP.

All user stations are limited to 2.0 watts transmitter output power.

Test Procedure:

Test procedure as below:

- 1) The EUT was powered ON and placed on a 0.8/1.5m high table at a 3 meter semi/fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. Modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 4) Steps 1) to 3) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 5) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 6) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 3) is obtained for this set of conditions.
- 7) The output power into the substitution antenna was then measured.
- 8) Steps 6) and 7) were repeated with both antennas polarized.
- 9) Calculate power in dBm by the following formula:

$$\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

$$\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

$$EIRP=ERP+2.15dB$$

where:

Pg is the generator output power into the substitution antenna.

- 10) Test the EUT in the lowest channel, the middle channel the Highest channel
- 11) The radiation measurements are performed in X, Y, Z axis positioning for EUT operation mode, and found the Y axis positioning which it is worse case.
- 12) Repeat above procedures until all frequencies measured was complete.

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
30MHz-1GHz	Peak	100kHz	300kHz	Peak
Above 1GHz	Peak	1MHz	3MHz	Peak

Test Setup:

Refer to section 4.2.1 for details.

Instruments Used:

Refer to section 3 for details

Test Mode:

Link mode

Test Results:

Pass

Test Data:

See table below

Maximum ERP (dBm)					
Channel	GSM 850 1Tx-slot	EDGE 850 1Tx-slot	WCDMA Band V RMC 12.2Kbps	Limit (dBm)	Result
Lowest	31.09	25.63	23.82	38.45	Pass
Middle	31.19	25.79	23.84	38.45	Pass
Highest	31.13	25.63	23.90	38.45	Pass

Maximum EIRP (dBm)					
Channel	GSM 1900 1Tx-slot	EDGE 1900 1Tx-slot	WCDMA Band II RMC 12.2Kbps	Limit (dBm)	Result
Lowest	31.07	27.71	25.97	33.01	Pass
Middle	30.83	27.94	25.96	33.01	Pass
Highest	30.76	27.71	25.89	33.01	Pass

Maximum EIRP (dBm)			
Channel	WCDMA Band IV RMC 12.2Kbps		Limit (dBm)
Lowest	24.95		30.00
Middle	25.00		30.00
Highest	25.28		30.00

LTE Band 2 Maximum EIRP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 1.4MHz					
Lowest	24.27	23.63	N/A	33.01	Pass
Middle	24.29	23.65	N/A	33.01	Pass
Highest	24.36	23.63	N/A	33.01	Pass
Channel Bandwidth: 3MHz					
Lowest	24.35	23.52	N/A	33.01	Pass
Middle	24.22	23.55	N/A	33.01	Pass
Highest	24.28	23.54	N/A	33.01	Pass
Channel Bandwidth: 5MHz					
Lowest	24.20	23.68	N/A	33.01	Pass
Middle	24.28	23.72	N/A	33.01	Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)

Highest	24.29	23.56	N/A	33.01	Pass
Channel Bandwidth: 10MHz					
Lowest	24.31	23.59	N/A	33.01	Pass
Middle	24.39	23.53	N/A	33.01	Pass
Highest	24.37	23.51	N/A	33.01	Pass
Channel Bandwidth: 15MHz					
Lowest	24.17	23.67	N/A	33.01	Pass
Middle	24.35	23.72	N/A	33.01	Pass
Highest	24.20	23.57	N/A	33.01	Pass
Channel Bandwidth: 20MHz					
Lowest	24.37	23.68	N/A	33.01	Pass
Middle	24.40	23.73	N/A	33.01	Pass
Highest	24.39	23.69	N/A	33.01	Pass

LTE Band 4 Maximum EIRP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 1.4MHz					
Lowest	23.01	22.45	N/A	30.00	Pass
Middle	23.30	22.61	N/A	30.00	Pass
Highest	22.82	22.18	N/A	30.00	Pass
Channel Bandwidth: 3MHz					
Lowest	23.13	22.57	N/A	30.00	Pass
Middle	23.24	22.48	N/A	30.00	Pass
Highest	22.83	22.25	N/A	30.00	Pass
Channel Bandwidth: 5MHz					
Lowest	23.11	22.41	N/A	30.00	Pass
Middle	23.24	22.66	N/A	30.00	Pass
Highest	22.80	22.19	N/A	30.00	Pass
Channel Bandwidth: 10MHz					
Lowest	23.02	22.44	N/A	30.00	Pass
Middle	23.28	22.51	N/A	30.00	Pass
Highest	22.82	22.31	N/A	30.00	Pass
Channel Bandwidth: 15MHz					
Lowest	22.96	22.59	N/A	30.00	Pass
Middle	23.35	22.51	N/A	30.00	Pass
Highest	22.89	22.24	N/A	30.00	Pass
Channel Bandwidth: 20MHz					
Lowest	23.13	22.59	N/A	30.00	Pass
Middle	23.40	22.66	N/A	30.00	Pass
Highest	22.93	22.36	N/A	30.00	Pass

LTE Band 5 Maximum ERP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 1.4MHz					
Lowest	20.99	20.29	N/A	38.45	Pass
Middle	21.17	20.36	N/A	38.45	Pass
Highest	21.06	20.35	N/A	38.45	Pass
Channel Bandwidth: 3MHz					
Lowest	20.96	20.40	N/A	38.45	Pass
Middle	21.14	20.28	N/A	38.45	Pass
Highest	21.11	20.27	N/A	38.45	Pass
Channel Bandwidth: 5MHz					
Lowest	20.95	20.22	N/A	38.45	Pass
Middle	21.18	20.22	N/A	38.45	Pass
Highest	21.19	20.34	N/A	38.45	Pass
Channel Bandwidth: 10MHz					
Lowest	21.14	20.40	N/A	38.45	Pass
Middle	21.19	20.37	N/A	38.45	Pass
Highest	21.22	20.39	N/A	38.45	Pass

LTE Band 7 Maximum ERP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 5MHz					
Lowest	21.23	20.40	N/A	33.01	Pass
Middle	21.16	20.49	N/A	33.01	Pass
Highest	21.18	20.48	N/A	33.01	Pass
Channel Bandwidth: 10MHz					
Lowest	21.22	20.37	N/A	33.01	Pass
Middle	21.04	20.46	N/A	33.01	Pass
Highest	21.25	20.44	N/A	33.01	Pass
Channel Bandwidth: 15MHz					
Lowest	21.09	20.39	N/A	33.01	Pass
Middle	21.21	20.35	N/A	33.01	Pass
Highest	21.23	20.58	N/A	33.01	Pass
Channel Bandwidth: 20MHz					
Lowest	21.27	20.50	N/A	33.01	Pass
Middle	21.22	20.53	N/A	33.01	Pass
Highest	21.34	20.61	N/A	33.01	Pass

LTE Band 12 Maximum ERP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 1.4MHz					
Lowest	20.46	19.42	N/A	34.77	Pass
Middle	20.46	19.85	N/A	34.77	Pass
Highest	20.42	19.76	N/A	34.77	Pass
Channel Bandwidth: 3MHz					
Lowest	20.31	19.66	N/A	34.77	Pass
Middle	20.41	19.51	N/A	34.77	Pass
Highest	20.19	19.49	N/A	34.77	Pass
Channel Bandwidth: 5MHz					
Lowest	20.34	19.66	N/A	34.77	Pass
Middle	20.42	19.43	N/A	34.77	Pass
Highest	20.28	19.49	N/A	34.77	Pass
Channel Bandwidth: 10MHz					
Lowest	20.46	19.72	N/A	34.77	Pass
Middle	20.47	19.53	N/A	34.77	Pass
Highest	20.36	19.53	N/A	34.77	Pass

LTE Band 17 Maximum ERP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 5MHz					
Lowest	20.01	19.46	N/A	34.77	Pass
Middle	20.62	19.71	N/A	34.77	Pass
Highest	20.17	19.79	N/A	34.77	Pass
Channel Bandwidth: 10MHz					
Lowest	20.27	19.51	N/A	34.77	Pass
Middle	20.71	19.87	N/A	34.77	Pass
Highest	20.44	19.84	N/A	34.77	Pass

5.3 CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 2.1046(a),
GSM 850 & WCDMA Band V & LTE Band 5: FCC 47 CFR Part 22.913(a),
GSM 1900 & WCDMA Band II & LTE Band 2: FCC 47 CFR Part 24.232(c),
WCDMA Band IV & LTE Band 4: FCC 47 CFR Part 27.50(d)(4),
LTE Band 12 & Band 17: FCC 47 CFR Part 27.50(c)(10)
LTE Band 7: FCC 47 CFR Part 27.50(h)(2)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

FCC 47 CFR Part 22.913(a)

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c)

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4)

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

FCC 47 CFR Part 27.50(c)(10):

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

FCC 47 CFR Part 27.50(h)(2): Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure:

The EUT was set up for the maximum power with GSM, GPRS, EDGE, WCDMA, CDMA2000, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: The full result refer to section 4.5 for details.

5.4 PEAK-TO-AVERAGE RATIO

Test Requirement: GSM 850 & WCDMA Band V & LTE Band 5: FCC 47 CFR Part 22.913(a),
GSM 1900 & WCDMA Band II & LTE Band 2: FCC 47 CFR Part 24.232(c),
WCDMA Band IV & LTE Band 4: FCC 47 CFR Part 27.50(d)(5),
LTE Band 12 & Band 17: FCC 47 CFR Part 27.50(d)(5)
LTE Band 7: FCC 47 CFR Part 27.50(d)(5)

Test Method: KDB 971168 D01v03r01

Limit: In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

- Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth
- Set the number of counts to a value that stabilizes the measured CCDF curve
- Record the maximum PAPR level associated with a probability of 0.1 %

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode


Test Results: Pass

Test Data: See table below

Peak-to-average ratio (dB)					
Channel	GSM 1900 1Tx-slot	EDGE 1900 1Tx-slot	WCDMA Band II RMC 12.2Kbps	Limit (dBm)	Result
Lowest	0.29	2.91	2.49	13	Pass
Middle	0.29	2.51	3.07	13	Pass
Highest	0.30	2.77	2.87	13	Pass

The test plots as follows:



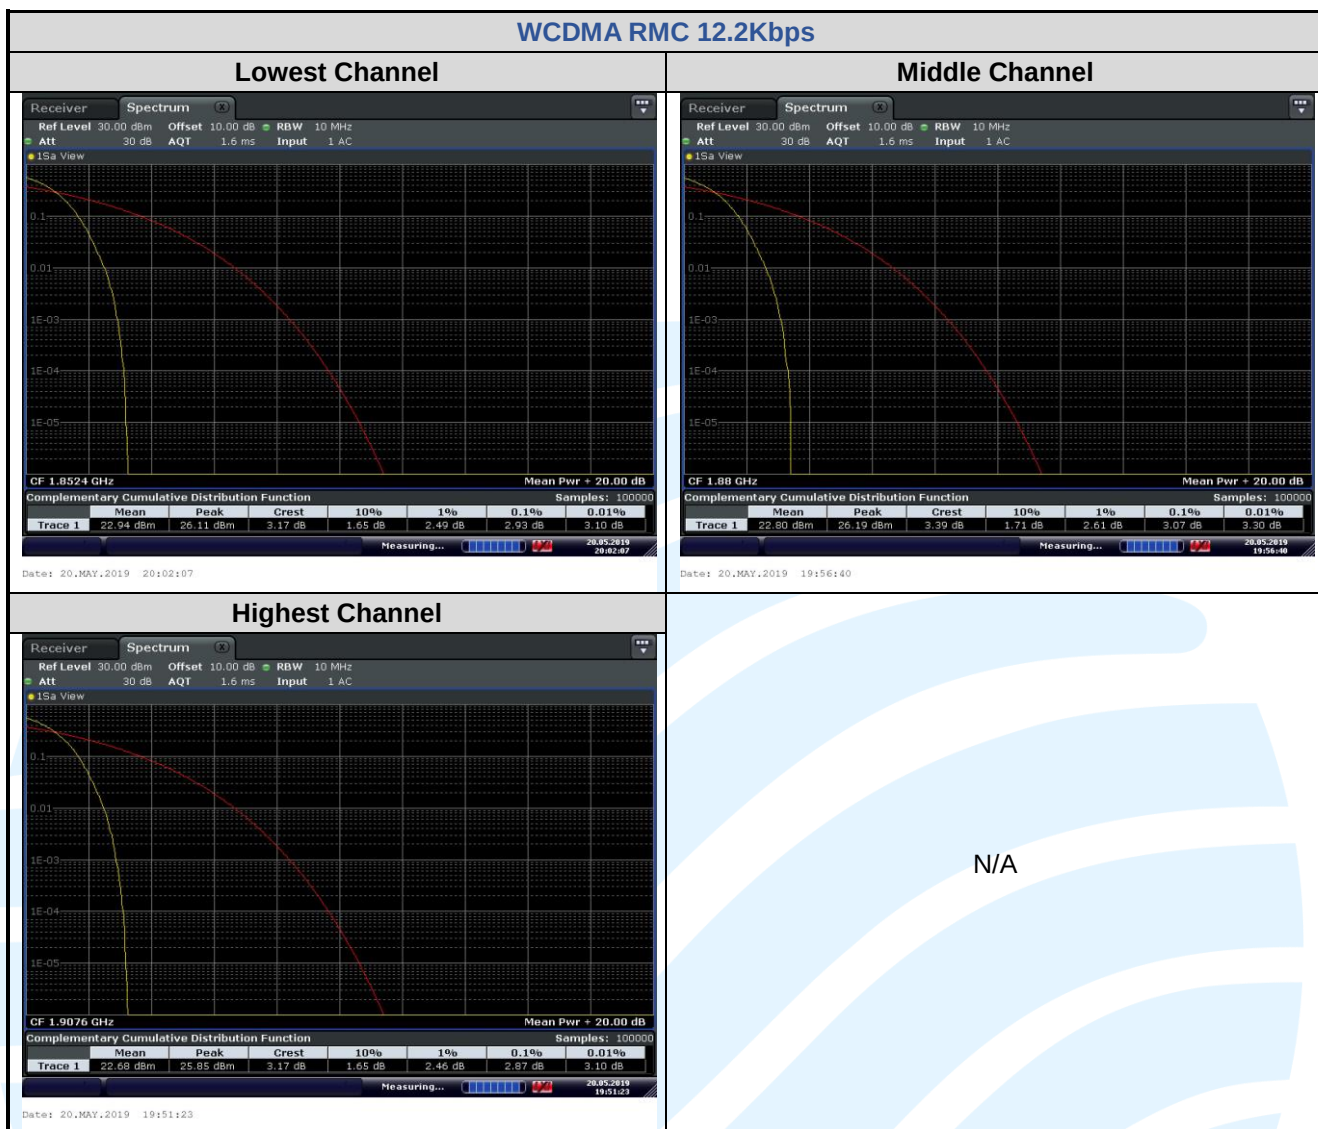

Peak-to-average ratio (dB)					
Channel	GSM 850 1Tx-slot	EDGE 850 1Tx-slot	WCDMA Band V RMC 12.2Kbps	Limit (dBm)	Result
Lowest	0.28	0.27	4.06	13	Pass
Middle	0.28	2.24	3.22	13	Pass
Highest	0.30	2.61	3.19	13	Pass

