
FCC Test Report

Report No.: AGC03777160407FE07

FCC ID : 2AIMJSW0029
APPLICATION PURPOSE : Original Equipment
PRODUCT DESIGNATION : FW16_GWP_BT_Speaker
BRAND NAME : Swarovski
MODEL NAME : SW0029, 5271209, 5273767, 5271210, 5273768,
5276631, 5275181
CLIENT : Orient Link Limited
DATE OF ISSUE : May 31,2016
STANDARD(S) : FCC Part 15 Rules
REPORT VERSION : V1.0

Attestation of Global Compliance (Shenzhen) Co., Ltd



CAUTION:

This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.



Report Revise Record

Report Version	Revise Time	Issued Date	Valid Version	Notes
V1.0	/	May 31, 2016	Valid	Original Report

TABLE OF CONTENTS

- 1. VERIFICATION OF CONFORMITY 4**
- 2. SYSTEM DESCRIPTION 5**
- 3. MEASUREMENT UNCERTAINTY..... 5**
- 4. PRODUCT INFORMATION 6**
- 5. SUPPORT EQUIPMENT..... 7**
- 6. TEST FACILITY 8**
- 7. FCCLINE CONDUCTED EMISSION TEST 10**
 - 7.1. LIMITS OF LINE CONDUCTED EMISSION TEST 10
 - 7.2. BLOCK DIAGRAM OF TEST SETUP 10
 - 7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST 11
 - 7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST 12
- 8. FCC RADIATED EMISSION TEST 14**
 - 8.1. LIMITS OF RADIATED EMISSION TEST 14
 - 8.2. BLOCK DIAGRAM OF TEST SETUP 14
 - 8.3. PROCEDURE OF RADIATED EMISSION TEST 16
 - 8.4. TEST RESULT OF RADIATED EMISSION TEST 17
- APPENDIX A: PHOTOGRAPHS OF TEST SETUP 19**
- APPENDIX B: PHOTOGRAPHS OF EUT 21**

1. VERIFICATION OF CONFORMITY

Applicant	Orient Link Limited
Address	9/F, 1063 King's Road, Quarry Bay, Hong Kong.
Manufacturer	Sweda (Shen Zhen) Electronics Company Limited
Address	Block C, Lian Tang Chun Wei Ind. Bldg., Lian Tang, ShenZhen, PRC. Postal Code=518004
Product Designation	FW16_GWP_BT_Speaker
Brand Name	Swarovski
Test Model	SW0029
Series Model	5271209, 5273767, 5271210, 5273768, 5276631, 5275181
Difference description	All the same except for the model name.
Date of test	May 18,2016 to May 20,2016
Deviation	None
Condition of Test Sample	Normal
Report Template	AGCRT-US-IT/AC

The above equipment was tested by Dongguan Precise Testing Service Co., Ltd. for compliance with the requirements set forth in the FCC Rules and Regulations Part 15, the measurement procedure according to ANSI C63.4:2014. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested By Water Zuo
Water Zuo(Zuo Yingying) May 31, 2016

Reviewed By Forrest Lei
Forrest Lei(Lei Yonggang) May 31, 2016

Approved By Solger Zhang
Solger Zhang(Zhang Hongyi)
Authorized Officer May 31, 2016

2. SYSTEM DESCRIPTION

EUT test procedure:

1. Connect EUT and peripheral devices (PC) through USB port and audio in port.
2. Power on the EUT.
3. Make sure the EUT operates normally during the test.

Test Mode

TEST MODE DESCRIPTION		
NO.	TEST MODE DESCRIPTION	WORST
1	Data transmission(USB)	V
Note: 1.V means EMI worst mode		

3. MEASUREMENT UNCERTAINTY

The uncertainty is calculated using the methods suggested in the “Guide to the Expression of Uncertainty in Measurement” (GUM) published by ISO.

Conducted measurement: +/- 2.75dB

Radiated measurement: +/- 3.2dB

Summary Of Test Results

FCC Rules	Description Of Test	Result
§15.107	Conduction Emission	Compliant
§15.109	Radiated Emission	Compliant

4. PRODUCT INFORMATION

Housing Type	Plastic and metal
Frequency	The highest frequency is lower than 108MHz
Voltage	DC3.7V by battery

I/O Port Information (Applicable Not Applicable)

I/O Port of EUT			
I/O Port Type	Q'TY	Cable	Tested with
USB Port	1	0.3 m, unshielded	1
AUX in Port	1	0.8 m, unshielded	1

5. SUPPORT EQUIPMENT

Device Type	Manufacturer	Model Name	Serial No.	Power Cable
PC	SONY	E1412AYCW	A.E	1.5m unshielded
IPOD	APPLE	A1367	CCQKQBPWF96V	N/A
Power Adapter(PC)	DELL	AA22850	N/A	N/A

Note: All the above equipment/cables were placed in worse case positions to maximize emission signals during emission test.

6. TEST FACILITY

Site	Dongguan Precise Testing Service Co., Ltd.
Location	Building D, Baoding Technology Park, Guangming Road2, Dongcheng District, Dongguan, Guangdong, China,
FCC Registration No.	371540
Description	The test site is constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2014.

ALL TEST EQUIPMENT LIST

FOR RADIATED EMISSION TEST (BELOW 1GHZ)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Trilog Broadband Antenna (25M-1GHz)	SCHWARZBECK	VULB9160	9160-3355	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9475	9745-0013	July 4, 2015	July 3, 2016
RF Cable	SCHWARZBECK	AK9515E	96221	July 4, 2015	July 3, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A
Spectrum analyzer	Agilent	E4407B	MY46185649	June 6, 2015	June 5, 2016

FOR RADIATED EMISSION TEST (1GHZ ABOVE)

Radiated Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Horn Antenna (1G-18GHz)	SCHWARZBECK	BBHA9120D	9120D-1246	July 11, 2015	July 10, 2016
Spectrum Analyzer	Agilent	E4411B	MY4511453	July 4, 2015	July 3, 2016
Signal Amplifier	SCHWARZBECK	BBV 9718	9718-269	July 7, 2015	July 6, 2016
RF Cable	SCHWARZBECK	AK9515H	96220	July 8, 2015	July 7, 2016
3m Anechoic Chamber	CHENGYU	966	PTS-001	June 6, 2015	June 5, 2016
MULTI-DEVICE Positioning Controller	Max-Full	MF-7802	MF780208339	N/A	N/A

Conducted Emission Test Site					
Name of Equipment	Manufacturer	Model Number	Serial Number	Last Calibration	Due Calibration
EMI Test Receiver	Rohde & Schwarz	ESCI	101417	July 4, 2015	July 3, 2016
Artificial Mains Network	Narda	L2-16B	000WX31025	July 8, 2015	July 7, 2016
Artificial Mains Network (AUX)	Narda	L2-16B	000WX31026	July 8, 2015	July 7, 2016
RF Cable	SCHWARZBECK	AK9515E	96222	July 4, 2015	July 3, 2016
Shielded Room	CHENGYU	843	PTS-002	June 6,2015	June 5,2016

7. FCCLINE CONDUCTED EMISSION TEST


7.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Frequency	Maximum RF Line Voltage	
	Q.P.(dBuV)	Average(dBuV)
150kHz-500kHz	66-56	56-46
500kHz-5MHz	56	46
5MHz-30MHz	60	50

Note:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50MHz.

7.2. BLOCK DIAGRAM OF TEST SETUP

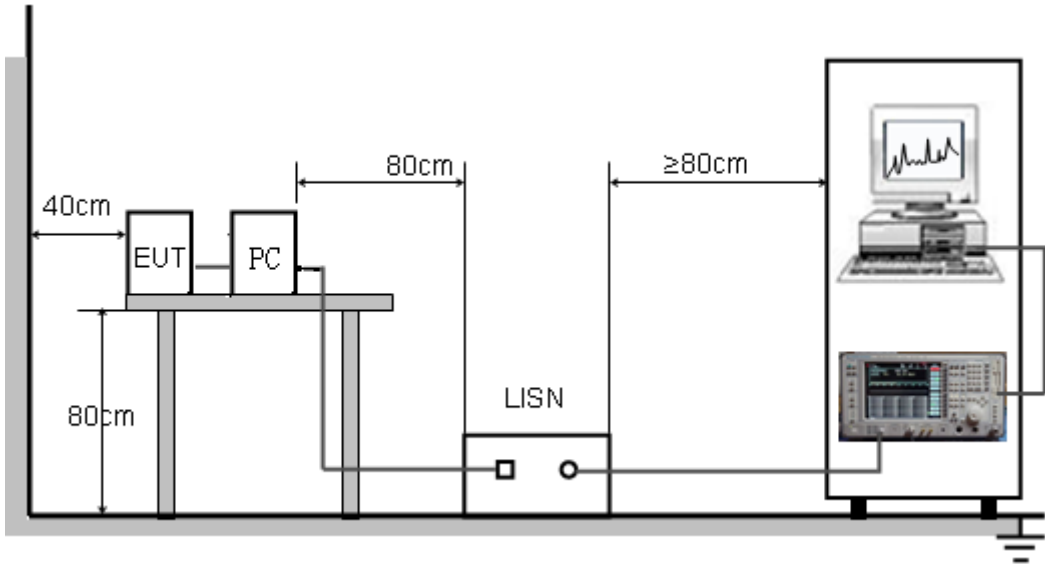


7.3. PROCEDURE OF LINE CONDUCTED EMISSION TEST

- (1) The equipment was set up as per the test configuration to simulate typical actual usage per the user's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per ANSI C63.4 (see Test Facility for the dimensions of the ground plane used). When the EUT is a floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- (2) Support equipment, if needed, was placed as per ANSI C63.4.
- (3) All I/O cables were positioned to simulate typical actual usage as per ANSI C63.4.
- (4) The EUT received DC5V power from PC which receive AC120V/60Hz power from a LISN.
- (5) The EUT test program was started. Emissions were measured on each current carrying line of the EUT using a spectrum Analyzer / Receiver connected to the LISN powering the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Line 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- (6) Analyzer / Receiver scanned from 150 kHz to 30MHz for emissions in each of the test modes.
- (7) During the above scans, the emissions were maximized by cable manipulation.
- (8) A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions.
- (9) Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less -2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.

The test data of the worst case condition (mode 1) was reported on the Summary Data page.


7.4. TEST RESULT OF LINE CONDUCTED EMISSION TEST
 LINE CONDUCTED EMISSION TEST-L

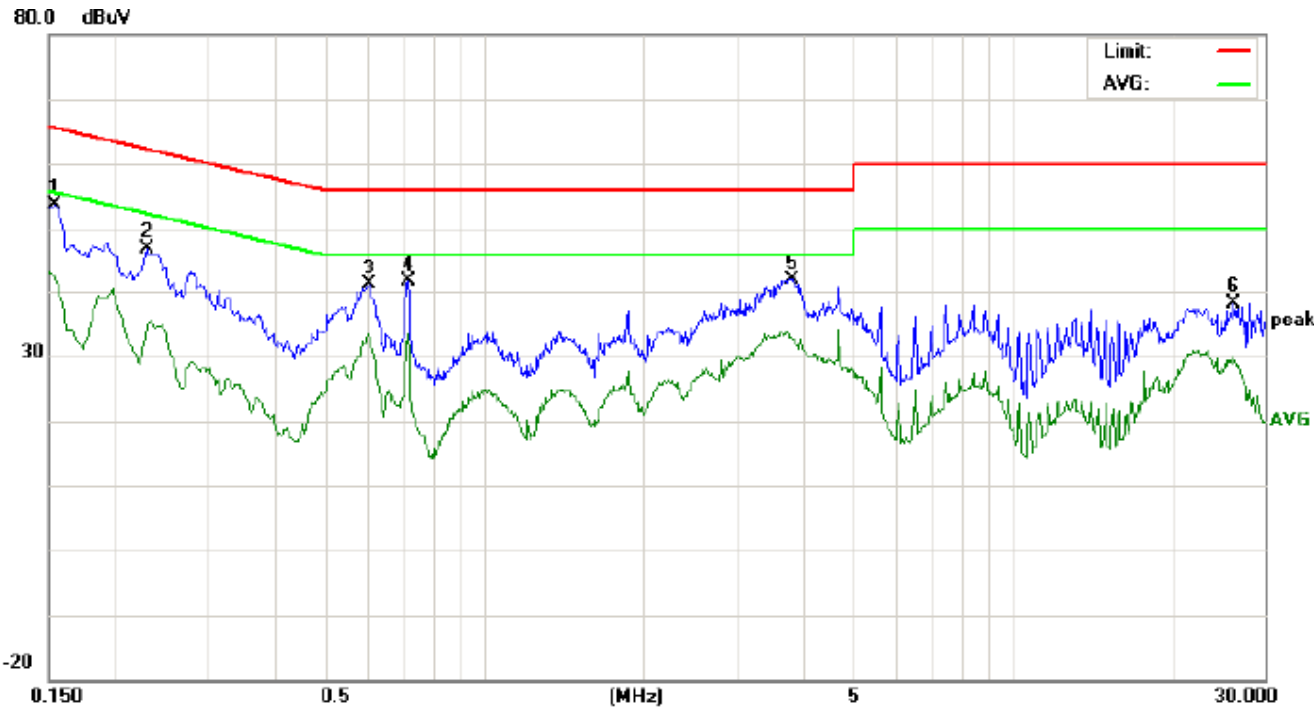

Site: Conduction Phase: **L1** Temperature: 25.3
 Limit: FCC Class B Conduction(QP) Power: Humidity: 52.9 %
 EUT:FW16_GWP_BT_Speaker
 M/N:SW0029
 Mode:Data transmission
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1539	43.46		31.94	10.16	53.62		42.10	65.78	55.78	-12.16	-13.68	P	
2	0.2300	36.70		24.53	10.25	46.95		34.78	62.45	52.45	-15.50	-17.67	P	
3	0.6059	30.69		22.42	10.31	41.00		32.73	56.00	46.00	-15.00	-13.27	P	
4	0.7179	31.35		23.15	10.34	41.69		33.49	56.00	46.00	-14.31	-12.51	P	
5	3.8220	31.48		22.11	10.46	41.94		32.57	56.00	46.00	-14.06	-13.43	P	
6	26.2620	28.12		19.81	10.11	38.23		29.92	60.00	50.00	-21.77	-20.08	P	

LINE CONDUCTED EMISSION TEST-N

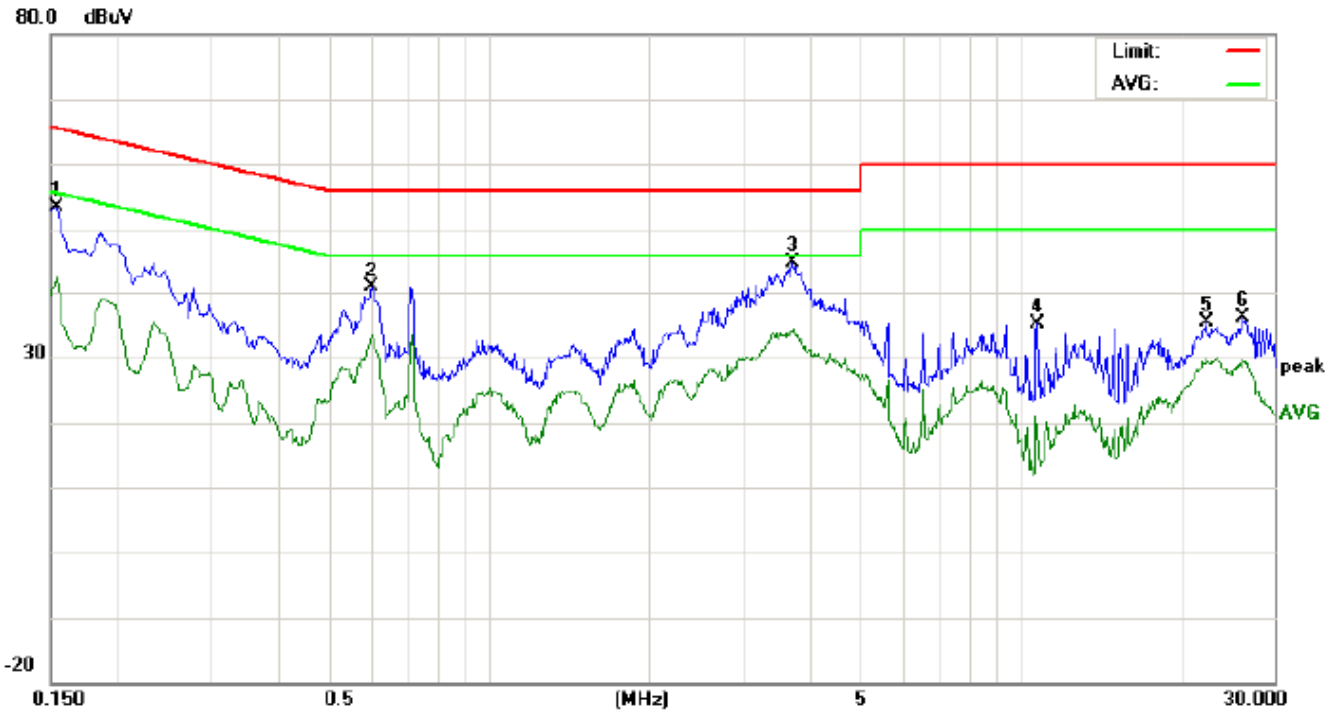

Site: Conduction Phase: **N** Temperature: 25.3
 Limit: FCC Class B Conduction(QP) Power: Humidity: 52.9 %
 EUT:FW16_GWP_BT_Speaker
 M/N:SW0029
 Mode:Data transmission
 Note:

No.	Freq. (MHz)	Reading_Level (dBuV)			Correct Factor (dB)	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		Peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1556	42.72		29.45	10.17	52.89		39.62	65.69	55.69	-12.80	-16.07	P	
2	0.6019	30.61		23.18	10.31	40.92		33.49	56.00	46.00	-15.08	-12.51	P	
3	3.7219	34.52		23.59	10.47	44.99		34.06	56.00	46.00	-11.01	-11.94	P	
4	10.7858	24.91		9.29	10.10	35.01		19.39	60.00	50.00	-24.99	-30.61	P	
5	22.3659	25.22		19.02	10.12	35.34		29.14	60.00	50.00	-24.66	-20.86	P	
6	26.2540	26.09		19.49	10.11	36.20		29.60	60.00	50.00	-23.80	-20.40	P	

RESULT: PASS

8. FCC RADIATED EMISSION TEST

8.1. LIMITS OF RADIATED EMISSION TEST

Frequency (MHz)	Distance (m)	Maximum Field Strength Limit (dBuV/m/ Q.P.)
30~88	3	40.0
88~216	3	43.5
216~960	3	46.0
960~1000	3	54.0

Note: The lower limit shall apply at the transition frequency.


8.1.1 The following table is the setting of spectrum analyzer and receiver:

Spectrum Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP
Start ~Stop Frequency	1GHz~6GHz 1MHz/1MHz for Peak, 1MHz/10Hz for Average


Receiver Parameter	Setting
Start ~Stop Frequency	9KHz~150KHz/RB 200Hz for QP
Start ~Stop Frequency	150KHz~30MHz/RB 9KHz for QP
Start ~Stop Frequency	30MHz~1000MHz/RB 120KHz for QP

8.2. BLOCK DIAGRAM OF TEST SETUP


System Diagram of Connections between EUT and Simulators

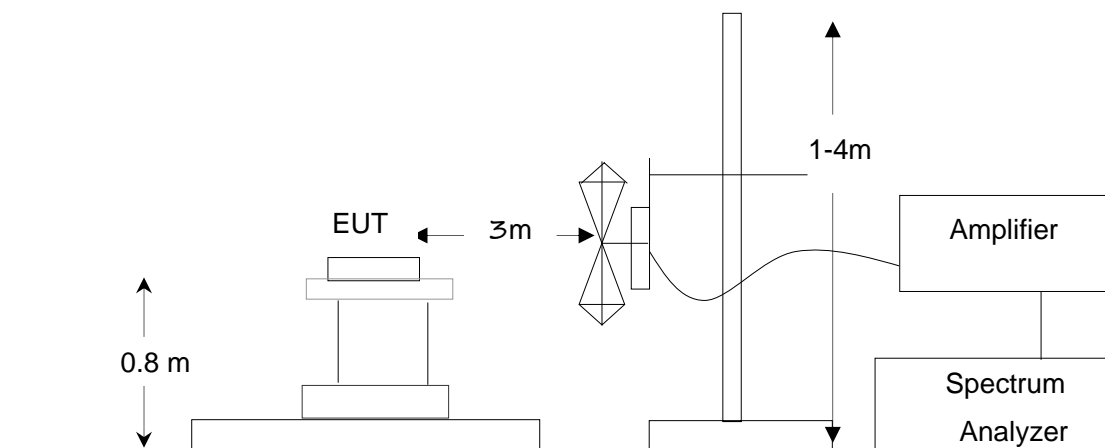

RADIATED EMISSION TEST SETUP 30MHz-1000MHz

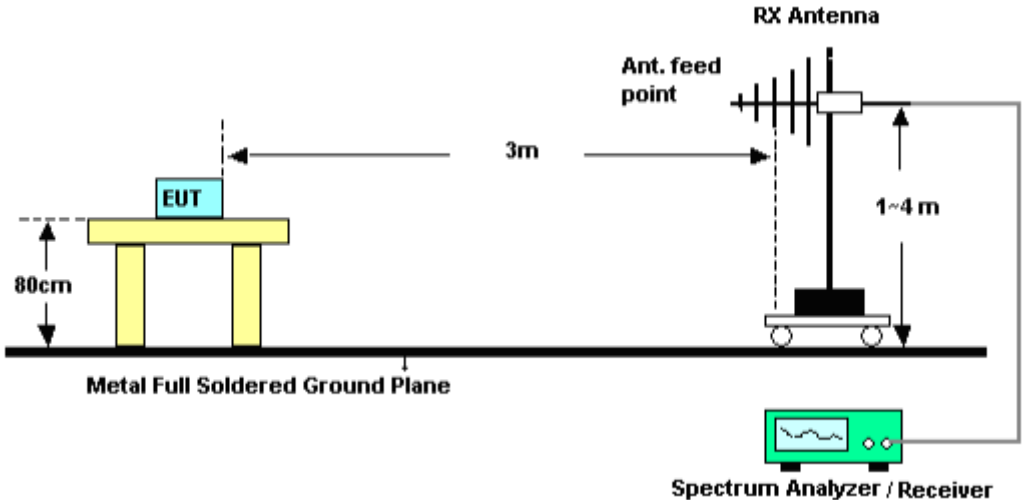

RADIATED EMISSION TEST SETUP ABOVE 1000MHz

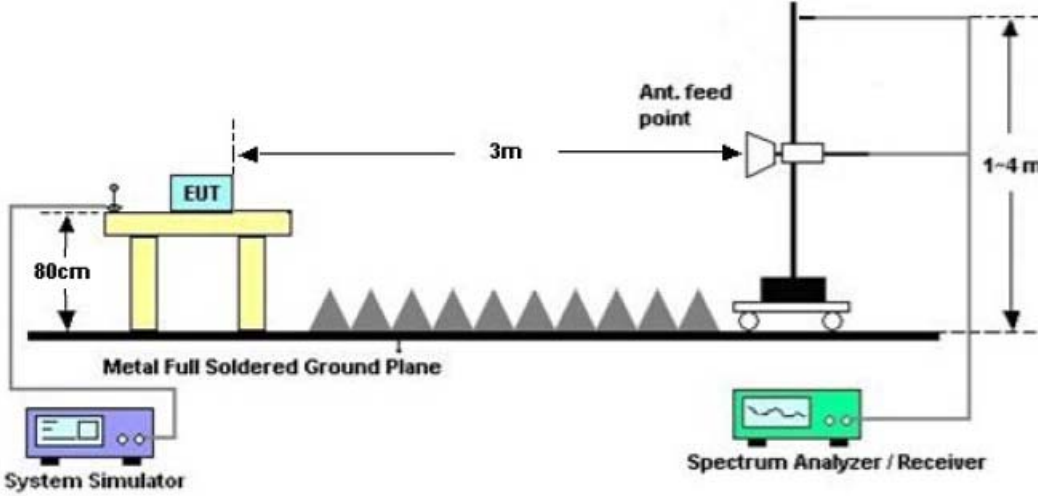


8.3. PROCEDURE OF RADIATED EMISSION TEST

1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum values.

8.4. TEST RESULT OF RADIATED EMISSION TEST

Radiated Emission Test at 3m Distance-Horizontal

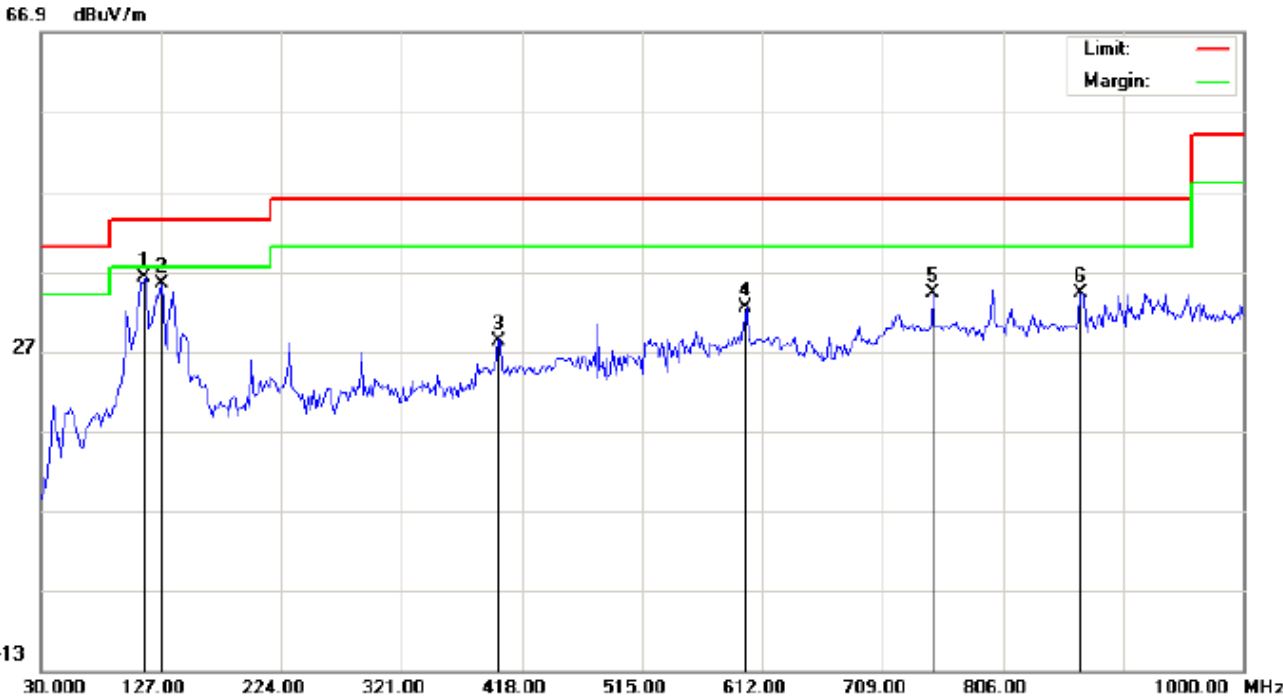


Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT:FW16_GWP_BT_Speaker
 M/N:SW0029
 Mode:Data transmission
 Note:

Polarization: *Horizontal*
 Power:
 Distance:

Temperature: 23.5
 Humidity: 52.9 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	114.0666	28.95	7.23	36.18	43.50	-7.32	peak			
2		127.0000	26.28	9.13	35.41	43.50	-8.09	peak			
3		398.6000	9.24	19.06	28.30	46.00	-17.70	peak			
4		599.0666	8.70	23.71	32.41	46.00	-13.59	peak			
5		749.4166	7.66	26.61	34.27	46.00	-11.73	peak			
6		869.0499	6.34	27.81	34.15	46.00	-11.85	peak			

Radiated Emission Test at 3m Distance-Vertical

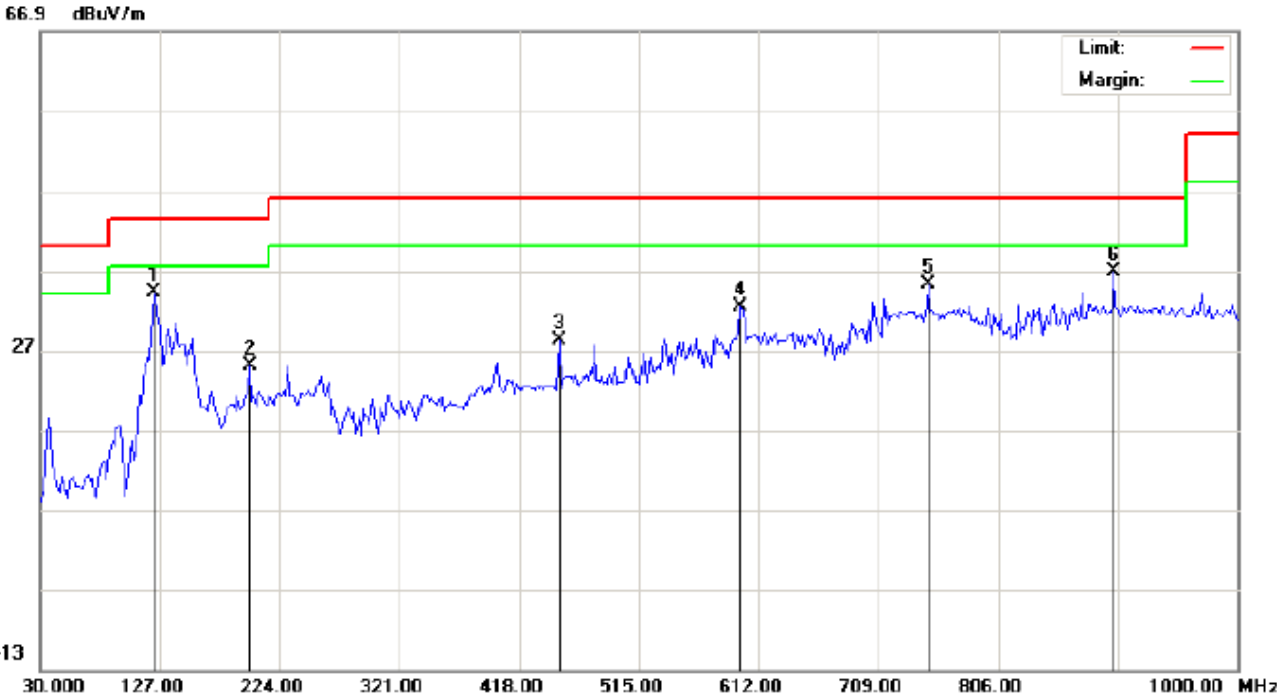

Site: site #1
 Limit: FCC Class B 3M Radiation
 EUT:FW16_GWP_BT_Speaker
 M/N:SW0029
 Mode:Data transmission
 Note:

Polarization: *Vertical*
 Power:
 Distance:

Temperature: 23.5
 Humidity: 52.9 %

No.	Mk	Freq.	Reading	Factor	Measurement	Limit	Over	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		cm	degree	
1	*	122.1500	26.46	7.76	34.22	43.50	-9.28	peak			
2		199.7500	15.95	9.06	25.01	43.50	-18.49	peak			
3		450.3333	7.60	20.59	28.19	46.00	-17.81	peak			
4		597.4500	9.68	22.72	32.40	46.00	-13.60	peak			
5		749.4166	8.53	26.61	35.14	46.00	-10.86	peak			
6		899.7667	8.12	28.60	36.72	46.00	-9.28	peak			


RESULT: PASS


Note: Above 1GHz have more than 20dB margin, no recording in the report
 Measurement = Reading + Factor, Over = Measurement – Limit.

APPENDIX A: PHOTOGRAPHS OF TEST SETUP
FCC LINE CONDUCTED EMISSION TEST SETUP




FCC RADIATED EMISSION TEST SETUP

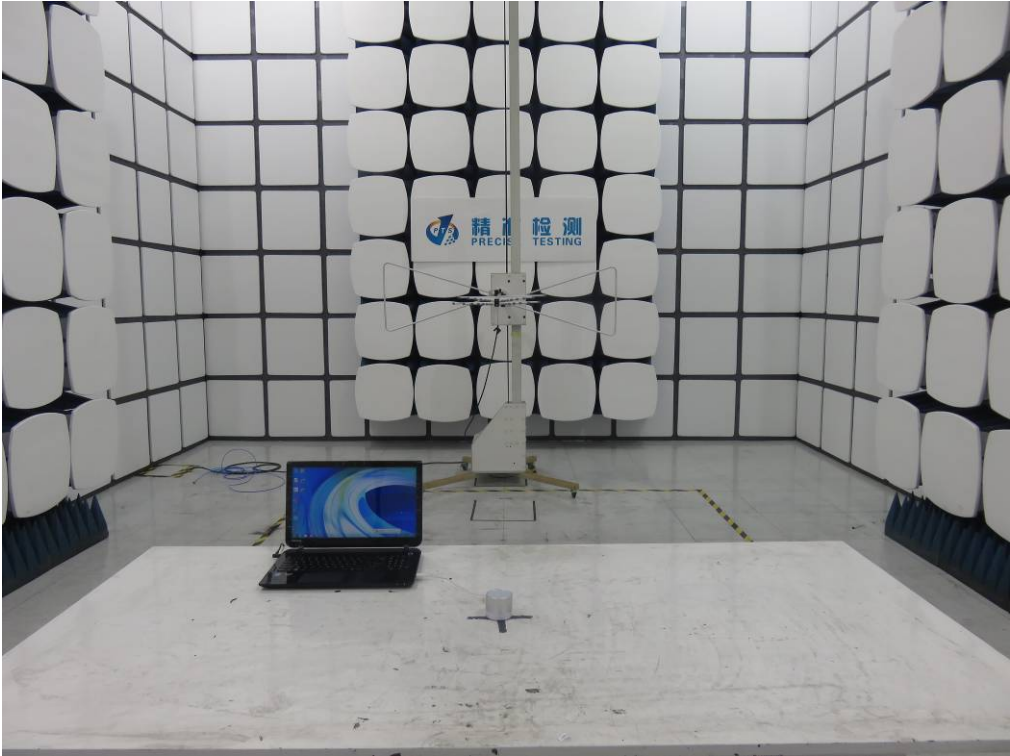


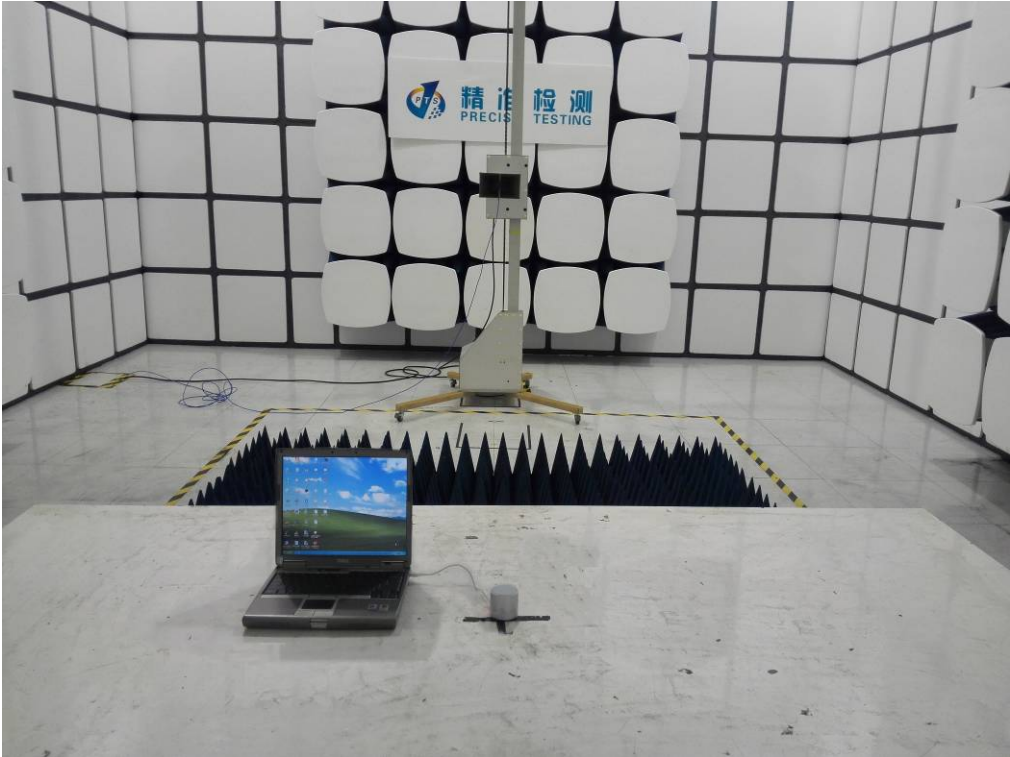

APPENDIX B: PHOTOGRAPHS OF EUT
TOTAL VIEW OF EUT

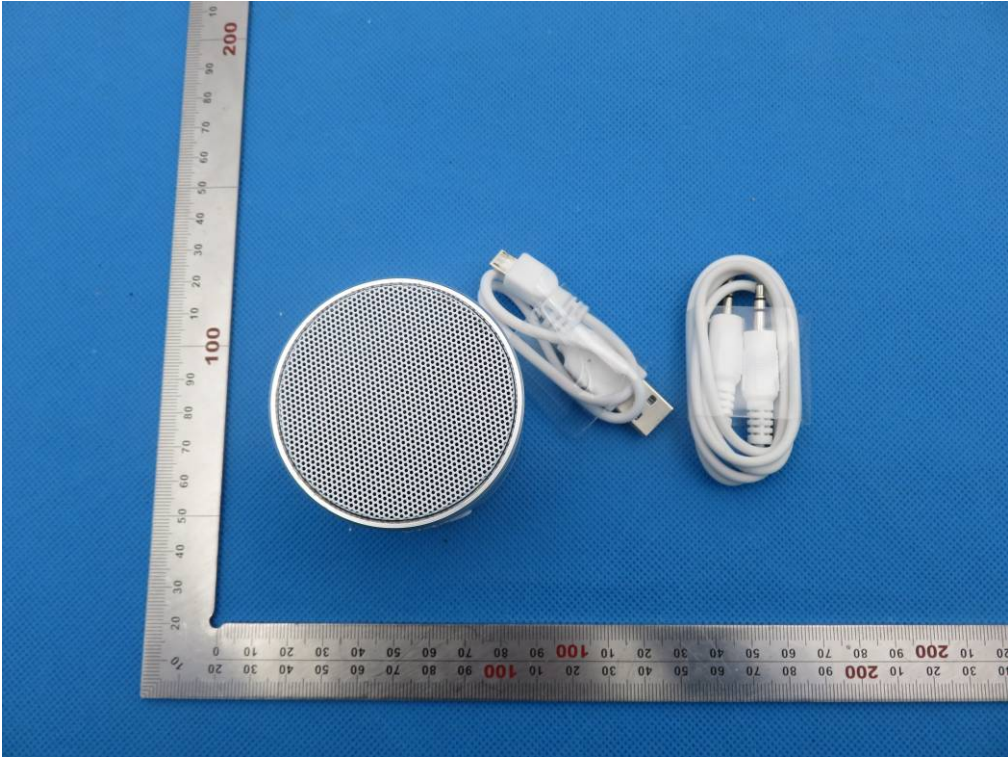


TOP VIEW OF EUT

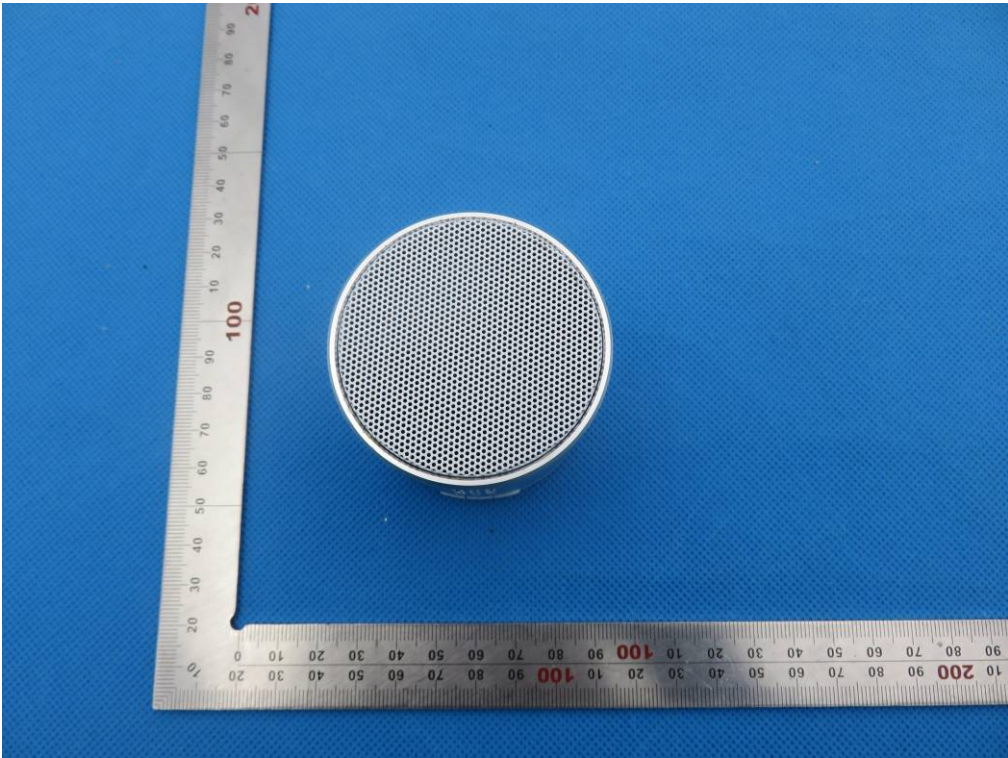

BOTTOM VIEW OF EUT




FRONT VIEW OF EUT

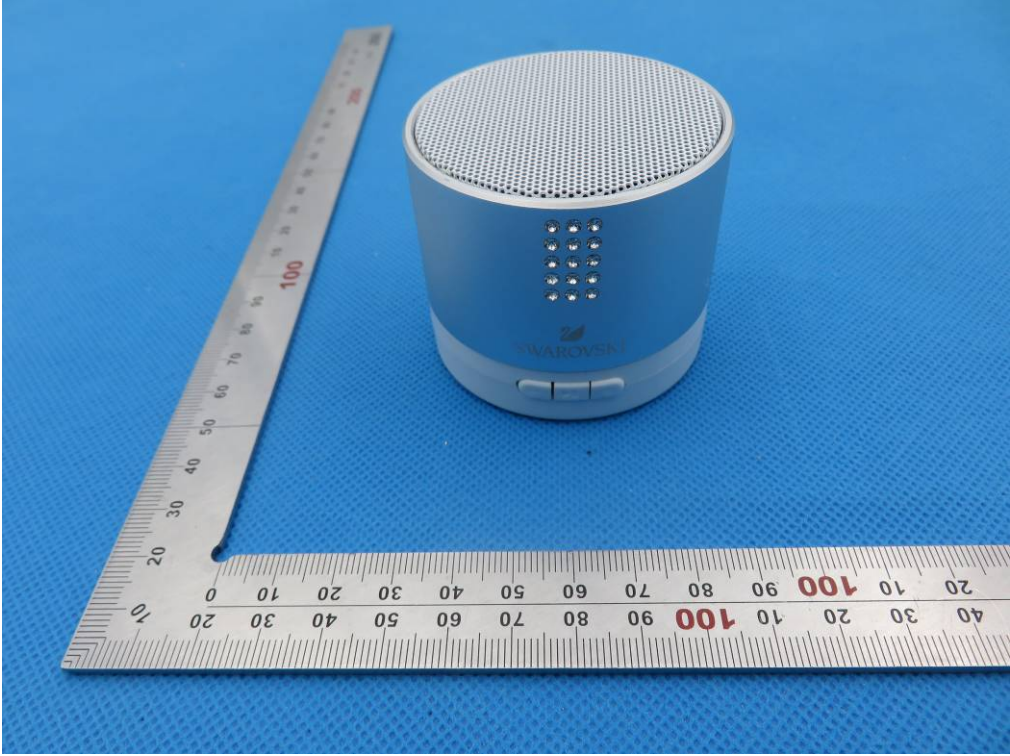


BACK VIEW OF EUT



LEFT VIEW OF EUT

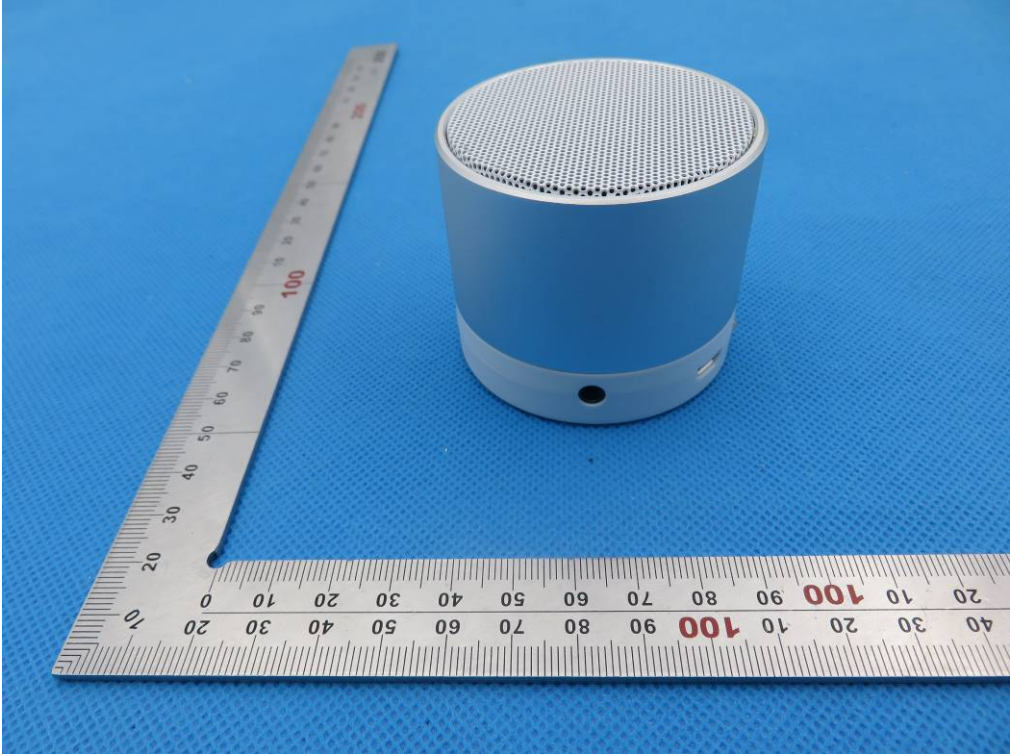


RIGHT VIEW OF EUT

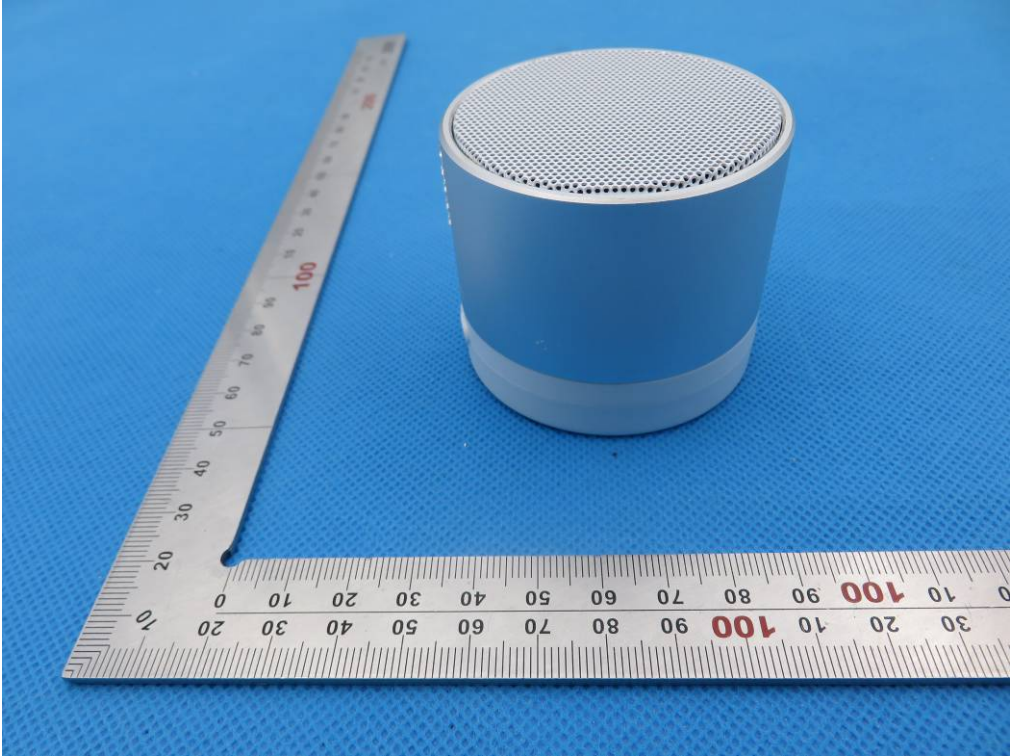


VIEW OF EUT (PORT)




VIEW OF EUT (OPEN)

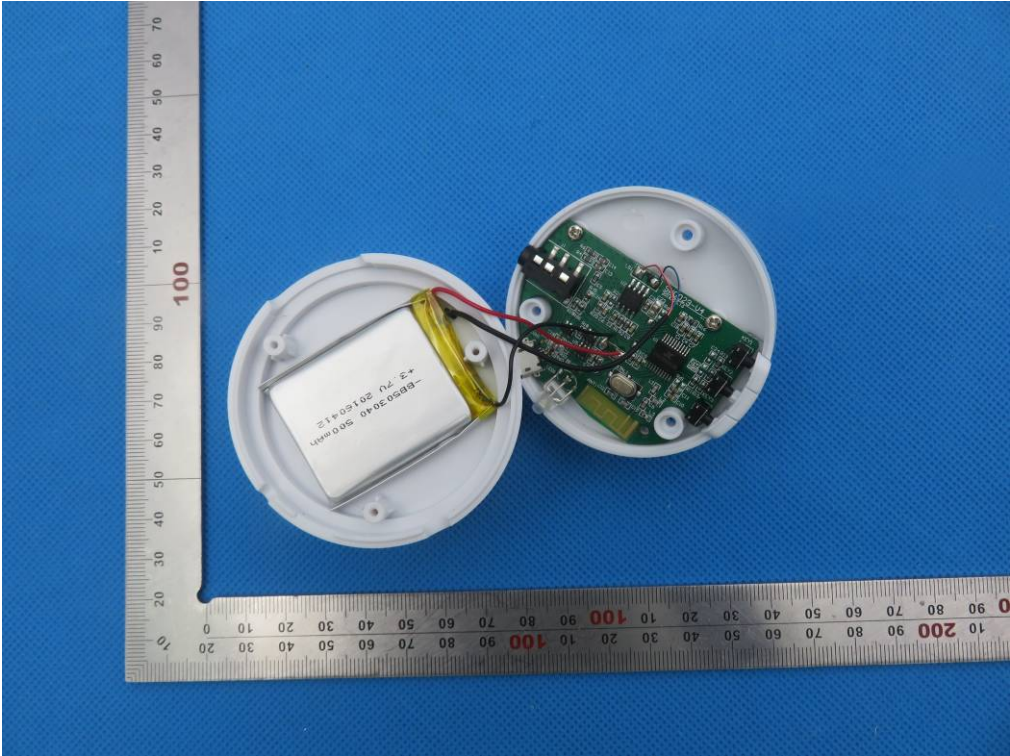

INTERNAL VIEW OF EUT-1

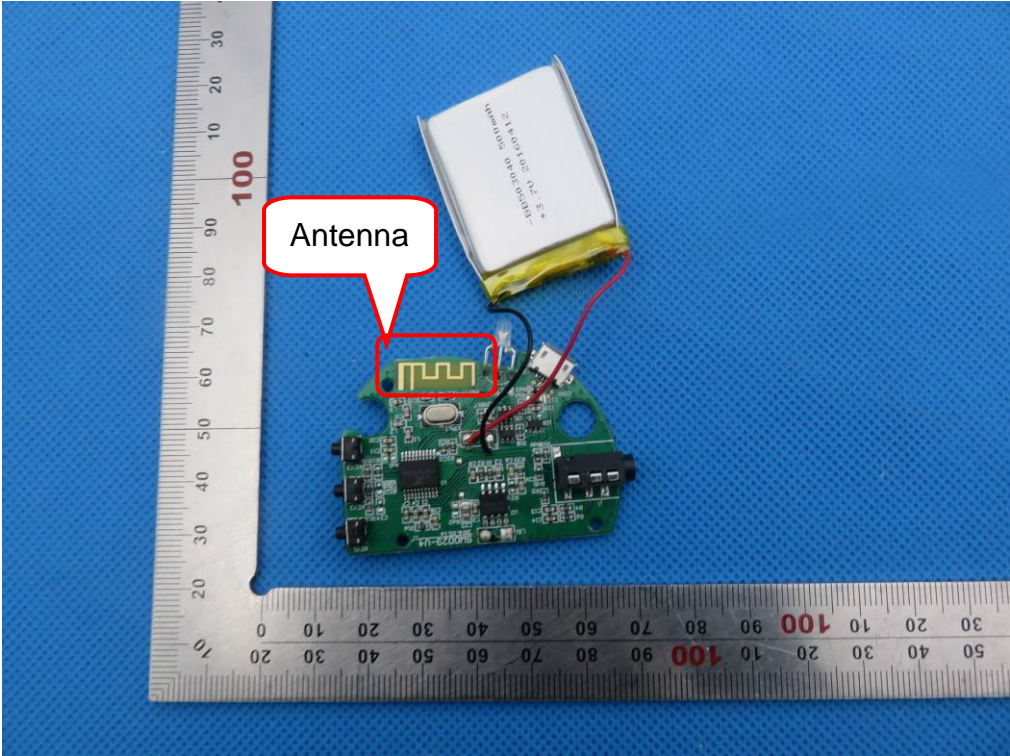

INTERNAL VIEW OF EUT-2

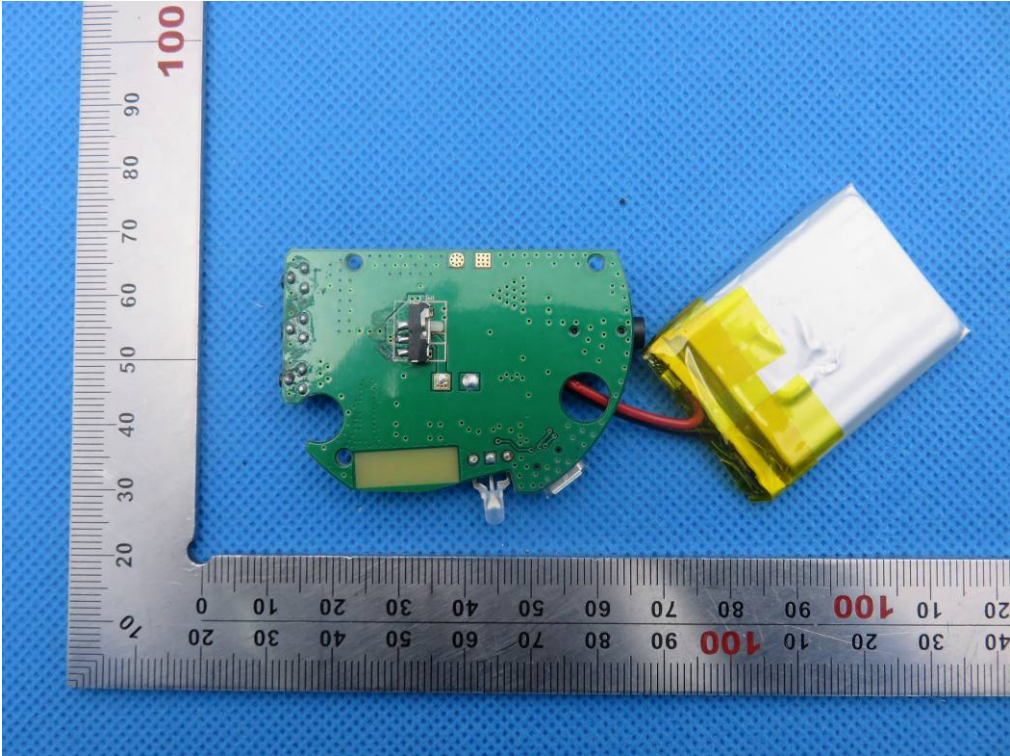

----END OF REPORT----