

FCC Radio Test Report

FCC ID: 2AIMRRD12

This report concerns: Original Grant

Report No. : eLab-FCCP-2-2312C025B
Equipment : Xiaomi Router AX1500
Brand Name : Xiaomi
Test Model : RD12
Series Model : N/A
Applicant : Beijing Xiaomi Electronics Co., Ltd.
Address : Room 802, Floor 8, Building 5, No.15 KeChuang 10th Road, Beijing
Economic and Technological Development Zone, Beijing City, China.

Radio Function : RLAN 5 GHz (U-NII 1, U-NII 2A, U-NII 2C, U-NII 3)

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart E (15.407)
Measurement : ANSI C63.10-2013
Procedure(s)

Date of Receipt : 2024/03/11
Date of Test : 2024/03/11 ~ 2024/03/22
Issued Date : 2024/03/27

The above equipment has been tested and found compliance with the requirement of the relative standards by eLab Inc.

Prepared by

: 
Hunter Chiang

Approved by

: 
Sam Chuang

eLab Inc.

10F., No. 167, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

Tel: +886-2-8692-6160 Fax: +886-2-8692-6170

Declaration

eLab represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

eLab's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **eLab** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **eLab** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

eLab's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

eLab is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents**Page**

REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 TEST MODES	11
2.3 PARAMETERS OF TEST SOFTWARE	12
2.4 DUTY CYCLE	14
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	17
2.6 SUPPORT UNITS	18
3 . AC POWER LINE CONDUCTED EMISSIONS	19
3.1 LIMIT	19
3.2 TEST PROCEDURE	19
3.3 DEVIATION FROM TEST STANDARD	19
3.4 TEST SETUP	20
3.5 EUT OPERATION CONDITIONS	20
3.6 TEST RESULTS	20
4 . RADIATED EMISSIONS	21
4.1 LIMIT	21
4.2 TEST PROCEDURE	22
4.3 DEVIATION FROM TEST STANDARD	23
4.4 TEST SETUP	23
4.5 EUT OPERATION CONDITIONS	24
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	24
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	24
4.8 TEST RESULTS - ABOVE 1000 MHZ	24
5 . BANDWIDTH	25
5.1 LIMIT	25
5.2 TEST PROCEDURE	25
5.3 DEVIATION FROM STANDARD	25
5.4 TEST SETUP	26

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	26
5.6 TEST RESULTS	26
6 . MAXIMUM OUTPUT POWER	27
6.1 LIMIT	27
6.2 TEST PROCEDURE	27
6.3 DEVIATION FROM STANDARD	27
6.4 TEST SETUP	27
6.5 EUT OPERATION CONDITIONS	27
6.6 TEST RESULTS	27
7 . POWER SPECTRAL DENSITY	28
7.1 LIMIT	28
7.2 TEST PROCEDURE	28
7.3 DEVIATION FROM STANDARD	28
7.4 TEST SETUP	29
7.5 EUT OPERATION CONDITIONS	29
7.6 TEST RESULTS	29
8 . MEASUREMENT INSTRUMENTS LIST	30
9 . EUT TEST PHOTOS	31
10 . EUT PHOTOS	31
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	32
APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	37
APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ	40
APPENDIX D - BANDWIDTH	219
APPENDIX E - MAXIMUM OUTPUT POWER	248
APPENDIX F - POWER SPECTRAL DENSITY	274

REPORT ISSUED HISTORY

Report No.	Version	Description	Issued Date	Note
eLab-FCCP-2-2312C025B	R00	Original Report.	2024/03/25	Invalid
eLab-FCCP-2-2312C025B	R01	Updated the description of antenna.	2024/03/27	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart E				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	N/A	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C	PASS	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX D	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX E	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX F	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (2)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
 - Outdoor access point device
 - Indoor access point device
 - Fixed point-to-point access points device
 - Client device

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No.64, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan

The test sites and facilities are covered under FCC RN: 681248 and DN: TW4045.

C01 CB01 TR01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**. The measurement instrumentation uncertainty considerations contained in CISPR 16-4-2. The eLab measurement uncertainty is less than the CISPR 16-4-2 U_{cispr} requirement.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U ,(dB)
C01	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test:

Test Site	Measurement Frequency Range	U ,(dB)
CB01	0.03 GHz ~ 0.2 GHz	4.01
	0.2 GHz ~ 1 GHz	4.64
	1 GHz ~ 6 GHz	5.91
	6 GHz ~ 18 GHz	6.24
	18 GHz ~ 26 GHz	3.93
	26 GHz ~ 40 GHz	4.06

C. Other Measurement test:

Test Item	U ,(dB)
Occupied Bandwidth	0.5332
Maximum Output Power	0.3669
Power Spectral Density	0.6590
Conducted Spurious emissions	0.5416
Conducted Band edges	0.5335


Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C	45%	AC 120V/60Hz	Hunter Chiang
Radiated Emissions-30MHz to 1000MHz	25°C	60%	AC 1□0V/60Hz	Hunter Chiang
Radiated Emissions-Above 1000 MHz	25°C	60%	AC 120V/60Hz	Hunter Chiang
Bandwidth	21°C	64%	AC 120V/60Hz	Cheng Tsai
Maximum Output Power	21°C	64%	AC 120V/60Hz	Cheng Tsai
Power Spectral Density	21°C	64%	AC 120V/60Hz	Cheng Tsai

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Xiaomi Router AX1500
Brand Name	Xiaomi
Test Model	RD12
Series Model	N/A
Model Difference(s)	N/A
Software Version	1.0.31
Hardware Version	1.0
Power Source	DC voltage supplied from AC adapter. Model: AD-0121200100US-5
Power Rating	I/P: 100-240V~ 50/60Hz 0.5A O/P: 12V  1A
Operation Frequency Band(s)	UNII-1: 5150 MHz ~ 5250 MHz UNII-2A: 5250 MHz ~ 5350 MHz UNII-2C: 5470 MHz ~ 5725 MHz UNII-3: 5725 MHz ~ 5850 MHz
Modulation Type	IEEE 802.11a/n/ac: OFDM IEEE 802.11ax: OFDMA
Bit Rate of Transmitter	IEEE 802.11a: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 300 Mbps IEEE 802.11ac: up to 866.7 Mbps IEEE 802.11ax: up to 1201 Mbps
Maximum Output Power UNII-1	IEEE 802.11ac (VHT80): 20.60 dBm (0.1148 W)
Maximum Output Power UNII-2A	IEEE 802.11ac (VHT80): 20.32 dBm (0.1076 W)
Maximum Output Power UNII-2C	IEEE 802.11ax (HE80): 23.10 dBm (0.2042 W)
Maximum Output Power UNII-3	IEEE 802.11n (HT40): 21.44 dBm (0.1393 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:



IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590		
112	5560	126	5630		
116	5580	134	5670		
120	5600				
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	P/N	Antenna Type	Connector	Gain (dBi)
1	 South star	3.N102.1161	Dipole	N/A	2.46
2	 South star	3.N102.1160	Dipole	N/A	2.48

Note:

- 1) This EUT supports SISO and MIMO, any transmit signals are correlated with each other, so Directional gain= $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2 / N]$ dBi, that is Directional gain= $10\log[(10^{-2.46/20} + 10^{-2.48/20})^2 / 2]$ dBi=5.48.
- 2) The antenna gain is provided by the manufacturer.

4. Table for Antenna Configuration:

Operating Mode	TX Mode	1TX	2TX
	IEEE 802.11a		V (Ant. 1)
IEEE 802.11n (HT20)		-	V(Ant. 1 + Ant. 2)
IEEE 802.11n (HT40)		-	V(Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT20)		-	V(Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT40)		-	V(Ant. 1 + Ant. 2)
IEEE 802.11ac (VHT80)		-	V(Ant. 1 + Ant. 2)
IEEE 802.11ax (HE20)		-	V(Ant. 1 + Ant. 2)
IEEE 802.11ax (HE40)		-	V(Ant. 1 + Ant. 2)
IEEE 802.11ax (HE80)		-	V(Ant. 1 + Ant. 2)

2.2 TEST MODES

Test Items	Test Mode	Channel	Note	
AC power line conducted emissions	Normal/Idle	-	-	
Radiated Emissions-30MHz to 1000MHz	IEEE 802.11ax (HE80)	106	-	
Radiated Emissions-Above 1000MHz	IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ax (HE20)	36/48/52/64/100/ 140/149/165	Bandedge	
	IEEE 802.11n (HT40) IEEE 802.11ax (HE40)	38/46/54/62/102/ 134/151/159		
	IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	42/58/106/122/155		
	Radiated Emissions-Above 1000MHz	IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ax (HE20)	36/40/48/52/60/64/100/ 116/140/149/157/165	Harmonic
		IEEE 802.11n (HT40) IEEE 802.11ax (HE40)	38/46/54/62/102/110/ 134/151/159	
		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	42/58/106/122/155	
Maximum Output Power	IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)	36/40/48/52/60/64/100/ 116/140/149/157/165	-	
	IEEE 802.11n (HT40) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE40)	38/46/54/62/102/110/ 134/151/159		
	IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	42/58/106/122/155		
Bandwidth & Power Spectral Density	IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ax (HE20)	36/40/48/52/60/64/100/ 116/140/149/157/165	-	
	IEEE 802.11n (HT40) IEEE 802.11ax (HE40)	38/46/54/62/102/110/ 134/151/159		
	IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	42/58/106/122/155		

Note:

- (1) For AC power line conducted emissions and radiated emission below 1 GHz test, the TX AX(HE80) Mode Channel 106 is found to be the worst case and recorded.
- (2) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (3) The measurements for Output Power are tested, the worst case are IEEE 802.11a mode, IEEE 802.11n(HT20) mode, IEEE 802.11n(HT40) mode, IEEE 802.11ac(VHT80) mode, IEEE 802.11ax(HE20) mode, IEEE 802.11ax(HE40) mode and IEEE 802.11ax(HE80) mode, only the worst cases are documented for other test items.
- (4) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded

2.3 PARAMETERS OF TEST SOFTWARE

UNII-1			
Test Software Version	MP_tool_8832b		
Frequency (MHz)	5180	5200	5240
IEEE 802.11a	18	18	18.25
IEEE 802.11n(HT20)	18	18.25	18.5
IEEE 802.11ac(VHT20)	18	18.25	18.5
IEEE 802.11ax(HE20)	18	18.75	18.75
Frequency (MHz)	5190	5230	
IEEE 802.11n(HT40)	19	19.25	
IEEE 802.11ac(VHT40)	19	19.25	
IEEE 802.11ax(HE40)	18.5	19.5	
Frequency (MHz)	5210		
IEEE 802.11ac(VHT80)	19.75		
IEEE 802.11ax(HE80)	17		


UNII-2A			
Test Software Version			
Frequency (MHz)	5260	5300	5320
IEEE 802.11a	18.25	18.25	18.5
IEEE 802.11n(HT20)	18.5	18.75	18.75
IEEE 802.11ac(VHT20)	18.5	18.75	18.75
IEEE 802.11ax(HE20)	18.75	18.75	15
Frequency (MHz)	5270	5310	
IEEE 802.11n(HT40)	19.75	18	
IEEE 802.11ac(VHT40)	19.75	18	
IEEE 802.11ax(HE40)	19.5	18	
Frequency (MHz)	5290		
IEEE 802.11ac(VHT80)	19.5		
IEEE 802.11ax(HE80)	16.5		

UNII-2C			
Test Software Version			
Frequency (MHz)	5500	5580	5700
IEEE 802.11a	21	21	21
IEEE 802.11n(HT20)	21	21	20.75
IEEE 802.11ac(VHT20)	21	21	20.75
IEEE 802.11ax(HE20)	21	21	21
Frequency (MHz)	5510	5550	5670
IEEE 802.11n(HT40)	18	21.5	21.5
IEEE 802.11ac(VHT40)	18	21.5	21.5
IEEE 802.11ax(HE40)	18	21.5	21.5
Frequency (MHz)	5530	5610	
IEEE 802.11ac(VHT80)	18.25	21.5	
IEEE 802.11ax(HE80)	21.5	21.5	

UNII-3			
Test Software Version			
Frequency (MHz)	5745	5785	5825
IEEE 802.11a	21.5	21.5	21.5
IEEE 802.11n(HT20)	21.5	21.5	21.5
IEEE 802.11ac(VHT20)	21.5	21.5	21.5
IEEE 802.11ax(HE20)	21.5	21.5	21.5
Frequency (MHz)	5755	5795	
IEEE 802.11n(HT40)	21.5	21.5	
IEEE 802.11ac(VHT40)	21.5	21.5	
IEEE 802.11ax(HE40)	21.5	21.5	
Frequency (MHz)	5775		
IEEE 802.11ac(VHT80)	21.5		
IEEE 802.11ax(HE80)	21.5		


2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
If duty cycle is $< 98\%$, duty factor shall be considered.
The output power = measured power + duty factor.
The power spectral density = measured power spectral density + duty factor.

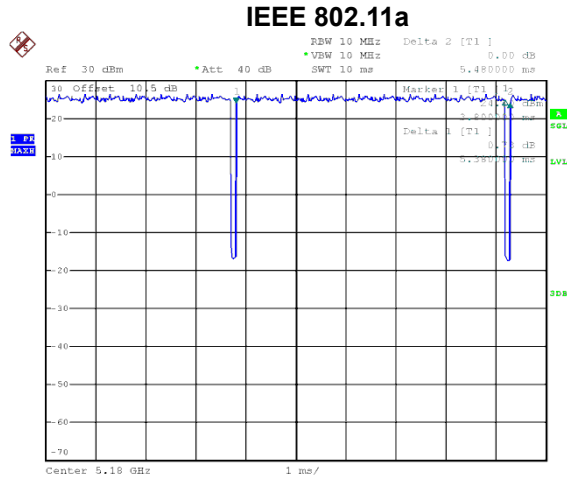


Date: 13.MAR.2024 16:27:40

Duty cycle = $5.380 \text{ ms} / 5.480 \text{ ms} = 98.18\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.00$

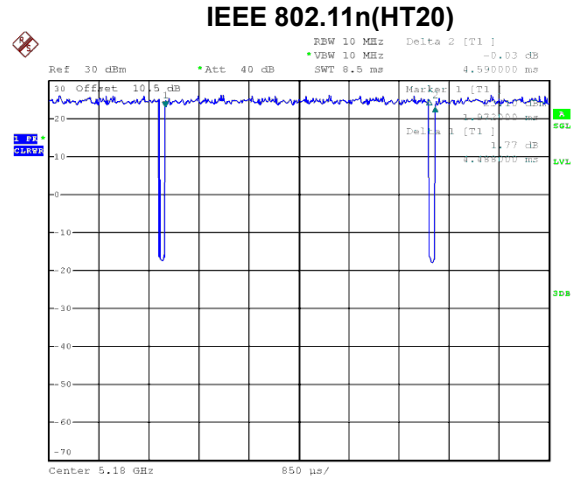


Date: 13.MAR.2024 16:53:00

Duty cycle = $4.488 \text{ ms} / 4.590 \text{ ms} = 97.78\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.10$

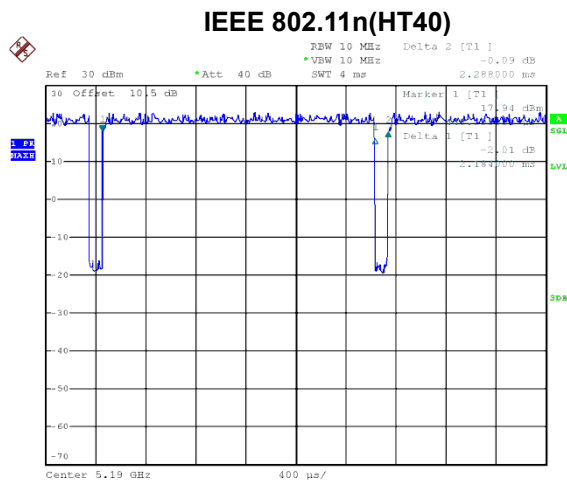

Date: 13.MAR.2024 17:14:28


Duty cycle = $2.184 \text{ ms} / 2.288 \text{ ms} = 95.45\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.20$

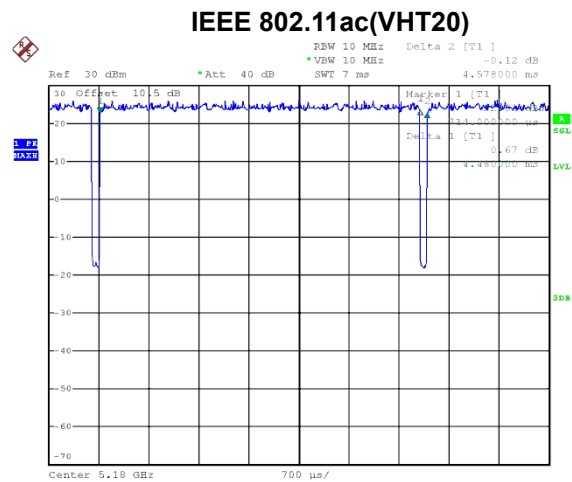

Date: 13.MAR.2024 17:33:34

Duty cycle = $4.480 \text{ ms} / 4.578 \text{ ms} = 97.86\%$
Duty Factor = $10 \log(1 / \text{Duty cycle}) = 0.09$


IEEE 802.11ac(VHT40)

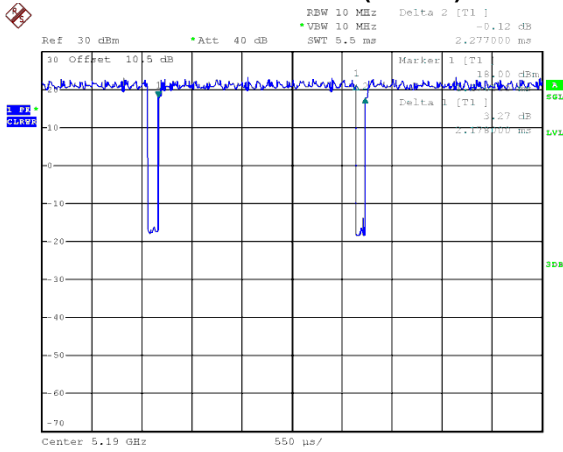

Date: 13.MAR.2024 17:54:36

Duty cycle = 2.178 ms / 2.277 ms = 95.65%
Duty Factor = 10 log(1 / Duty cycle) = 0.19


IEEE 802.11ac(VHT80)

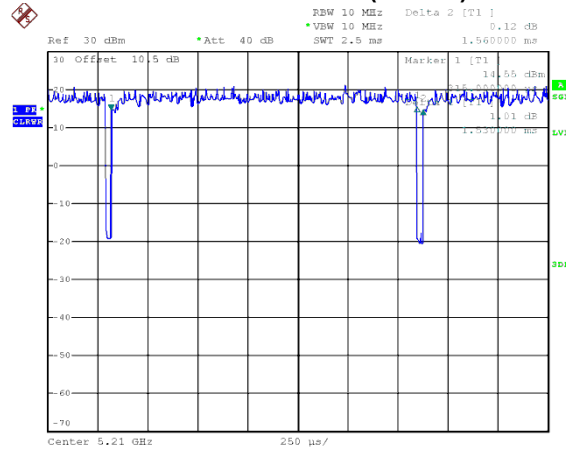

Date: 13.MAR.2024 18:12:23

Duty cycle = 1.530 ms / 1.560 ms = 98.08%
Duty Factor = 10 log(1 / Duty cycle) = 0.00


IEEE 802.11ax(HE20)

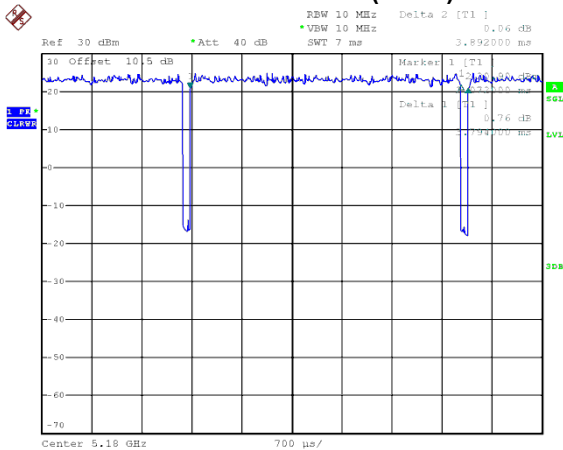

Date: 18.MAR.2024 18:44:16


Duty cycle = 3.794 ms / 3.892 ms = 97.48%
Duty Factor = 10 log(1 / Duty cycle) = 0.11

IEEE 802.11ax(HE40)

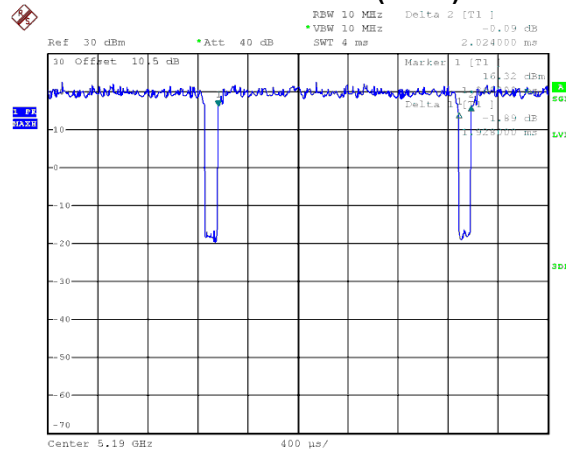

Date: 18.MAR.2024 18:43:19

Duty cycle = 1.928 ms / 2.024 ms = 95.26%
Duty Factor = 10 log(1 / Duty cycle) = 0.21

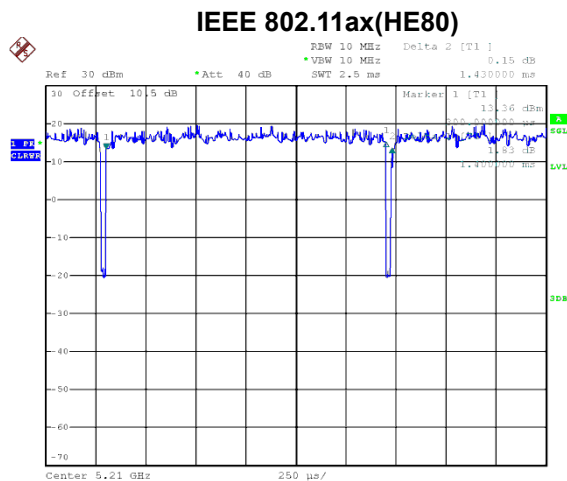

Date: 18.MAR.2024 10:45:09

Duty cycle = 1.400 ms / 1.430 ms = 97.90%
Duty Factor = 10 log(1 / Duty cycle) = 0.09

NOTE:

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0.223 kHz (Duty cycle < 98%).

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0.458 kHz (Duty cycle < 98%).

For IEEE 802.11ac(VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0.223 kHz (Duty cycle < 98%).

For IEEE 802.11ac(VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0.459 kHz (Duty cycle < 98%).

For IEEE 802.11ax(HE20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0.264 kHz (Duty cycle < 98%).

For IEEE 802.11ax(HE40):


For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0.519 kHz (Duty cycle < 98%).

For IEEE 802.11ax(HE80):


For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0.714 kHz (Duty cycle < 98%).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

AC power line conducted emissions test



Radiated emissions test

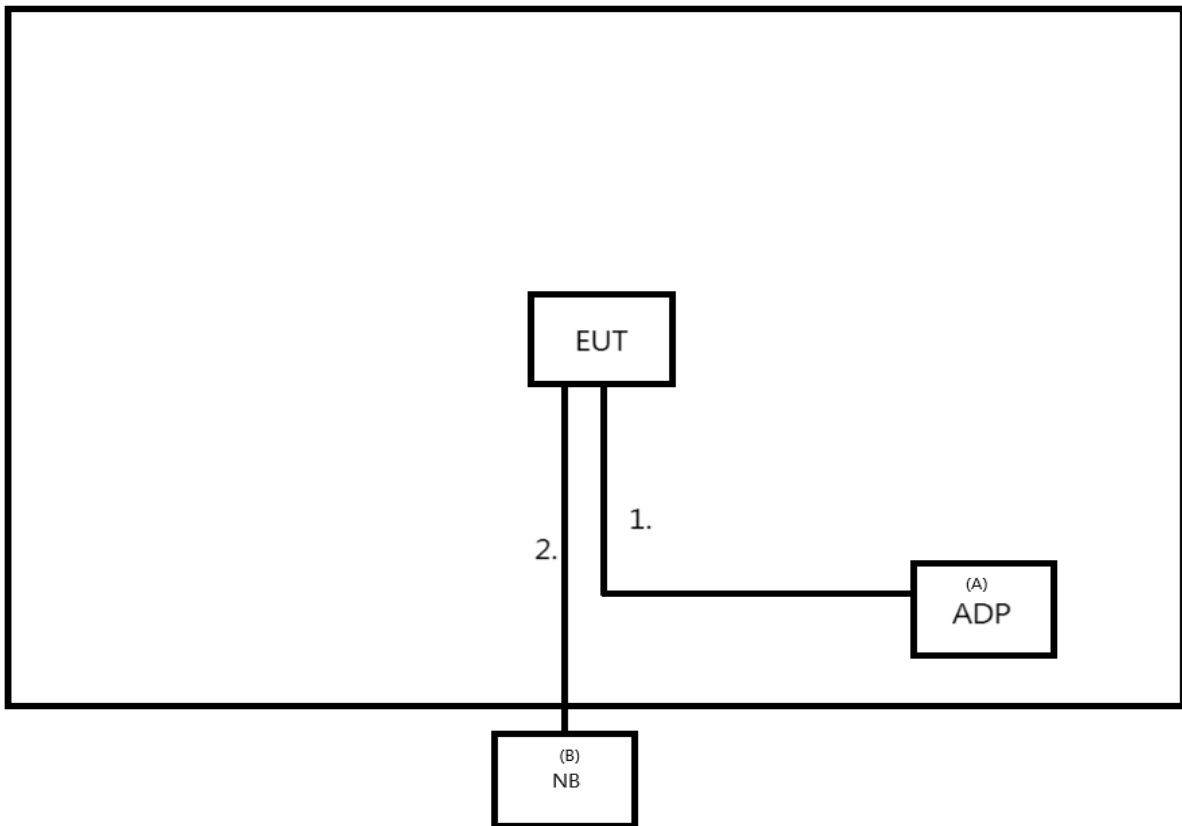

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Note
A	ADP	Xiaomi	AD-0121200100US-5	N/A	Supplied by test requester
B	NB	Dynabook	TECRA A40-J	41029336H	Furnished by test lab

Item	Cable Type	Shielded Type	Ferrite Core	Length	Note
1	DC Cable	NO	NO	1.5m	Supplied by test requester
2	RJ45 Cable	NO	NO	10m	Furnished by test lab

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency (MHz)	Limit (dBµV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
38.22	+	3.45	=	41.67

Measurement Value		Limit Value		Margin Level
41.67	-	60	=	-18.33

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameter	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

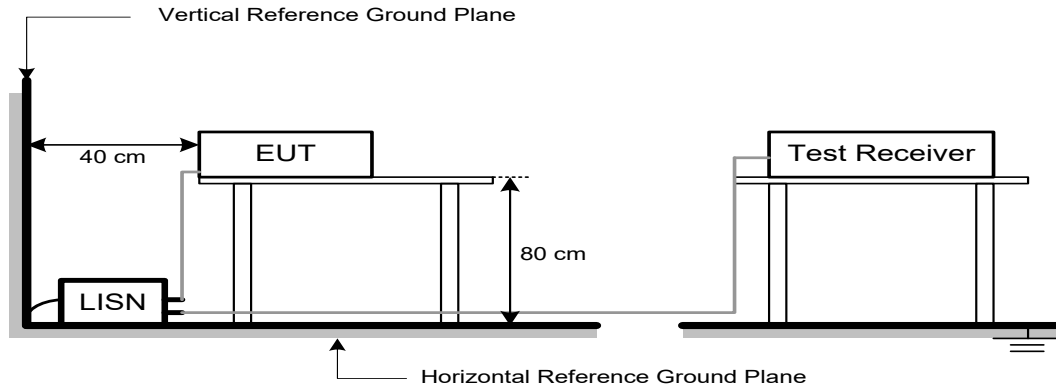

3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS (Above 1000 MHz)

Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength at 3m (dBµV/m)
5150-5250	-27	68.2
5250-5350	-27	68.2
5470-5725	-27	68.2
5725-5850 NOTE (2)	-27	68.2
	10	105.2
	15.6	110.8
	27	122.2

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level		Correct Factor		Measurement Value
36.23	+	-11.97	=	24.26

Measurement Value		Limit Value		Margin Level
24.26	-	40	=	-15.74

4.2 TEST PROCEDURE

- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic or 40 GHz, whichever is lower
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~40 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

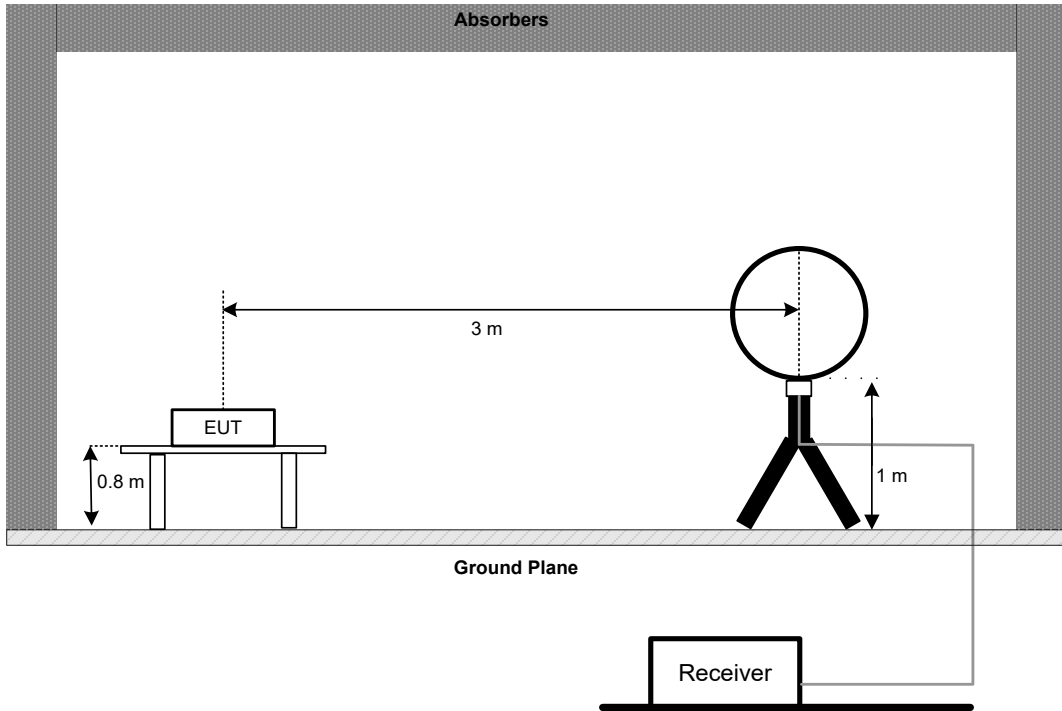

30 MHz to 1 GHz

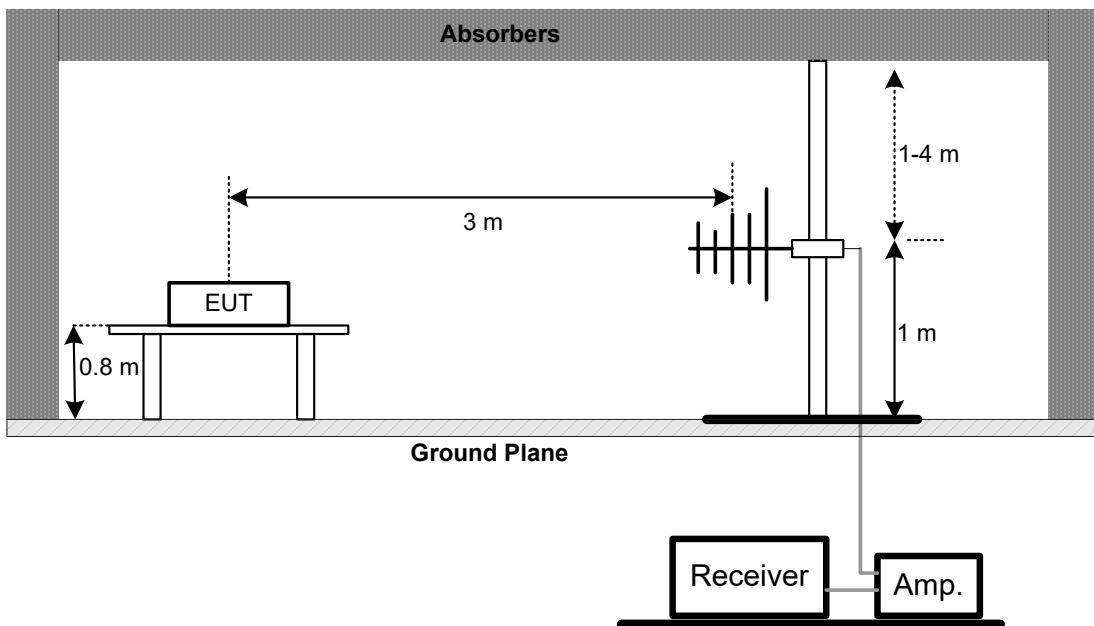

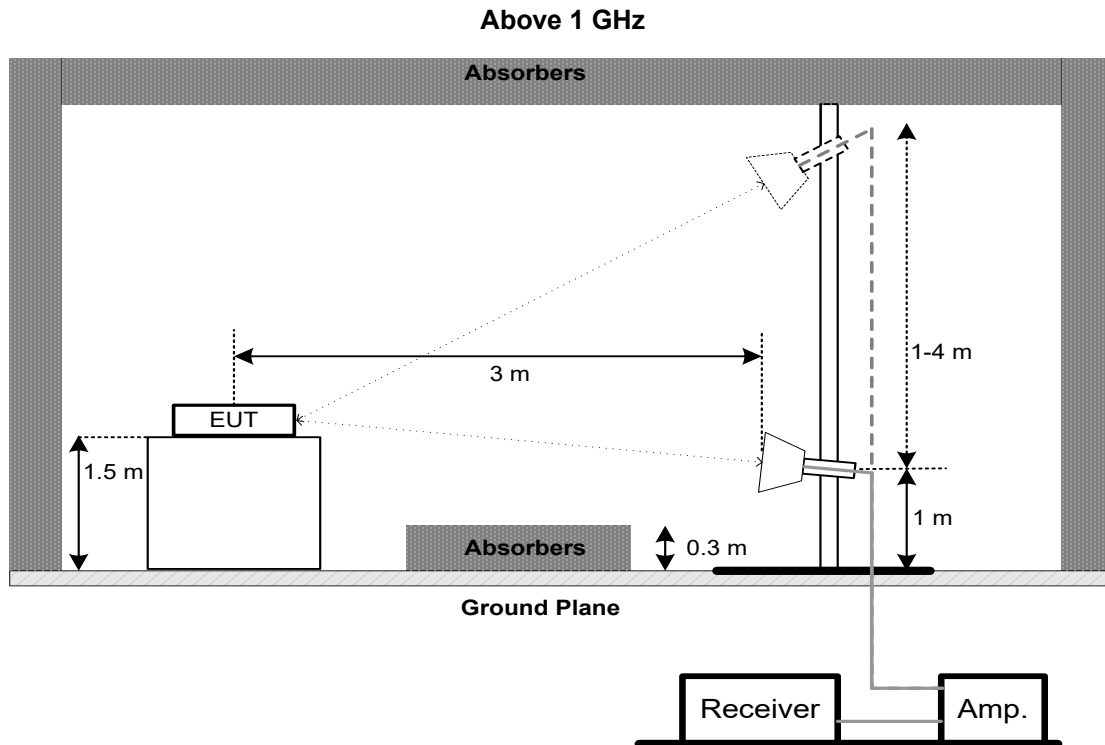

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX B.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. Spectrum Setting:

For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	> 26 dB Bandwidth
RBW	Appromiximately 1% of the emission bandwidth
VBW	> RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	> 6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Occupied Bandwidth:

Spectrum Parameter	Setting
Span Frequency	1.5 times to 5 times the OBW
RBW	1% to 5% of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB / 6 dB below carrier.

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

6. MAXIMUM OUTPUT POWER

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- a. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- b. For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


6.2 TEST PROCEDURE

- a. The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- b. The test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

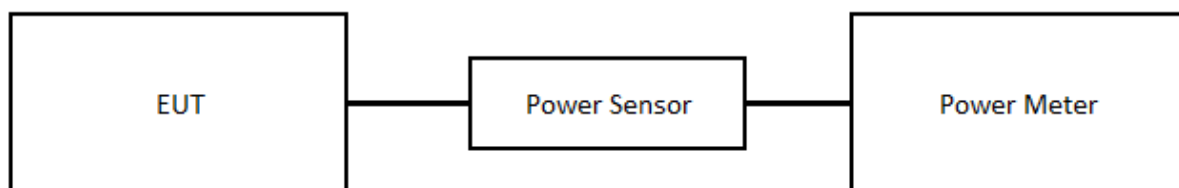

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

7.2 TEST PROCEDURE

a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.

b. Spectrum Setting:

For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1 MHz.
VBW	3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

For UNII-3:

Spectrum Parameter	Setting
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	100 kHz.
VBW	300 kHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 100kHz and VBW at 300kHz if the spectrum analyzer does not have 500 kHz RBW. Then, add $10 \log (500 \text{ kHz}/100 \text{ kHz})$ to the measured result, i.e. 7 dB.
- During the test of U-NII 3 PSD, the measurement result with RBW=100kHz has been added 7 dB by compensating offset. For example, the cable loss is 10.5 dB, and the final offset is $10.5 + 7 = 17.5$ dB when RBW=100kHz is used.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Two-Line V-Network	R&S	ENV216	101051	2023/7/21	2024/7/20
2	EMI Test Receiver	Keysight	N9038A	MY54130009	2023/6/26	2024/6/25

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Pre-Amplifier	EMCI	EMC001330-20 201222	980807	2023/12/11	2024/12/10
2	Pre-Amplifier	EMCI	EMC184045SE	980512	2023/12/11	2024/12/10
3	Pre-Amplifier	EMCI	EMC051845SE	980779	2023/12/11	2024/12/10
4	Test Cable	EMCI	EMC105-SM-S M-3000	210118	2023/12/11	2024/12/10
5	Test Cable	EMCI	EMC105-SM-S M-1000	210119	2023/12/11	2024/12/10
6	EMI Test Receiver	Keysight	N9038A	MY54130009	2023/6/26	2024/6/25
7	EXA Spectrum Analyzer	keysight	N9010A	MY56480554	2023/9/12	2024/9/11
8	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2024/1/10	2025/1/9
9	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	340	2023/6/29	2024/6/28
10	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01207	2023/12/18	2024/12/17
11	Loop Ant.	Electro-Metrics	EMCI-LPA600	274	2023/6/28	2024/6/27
12	6dB Attenuator	EMCI	EMCI-N-6-05	N/A	2023/12/18	2024/12/17
13	Measurement Software	EZ	EZ EMC (Version NB-03A1-01)	N/A	N/A	N/A

Maximum Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	USB Peak Power Sensor	Anritsu	MA24408A	12591	2023/10/25	2024/10/24

Bandwidth & Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2023/6/26	2024/6/25

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

9. EUT TEST PHOTOS


Please refer to APPENDIX-TEST PHOTOS.

10. EUT PHOTOS

Please refer to APPENDIX-EUT PHOTOS.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Test Date	2024/3/18
Test Frequency	-	Phase	Line

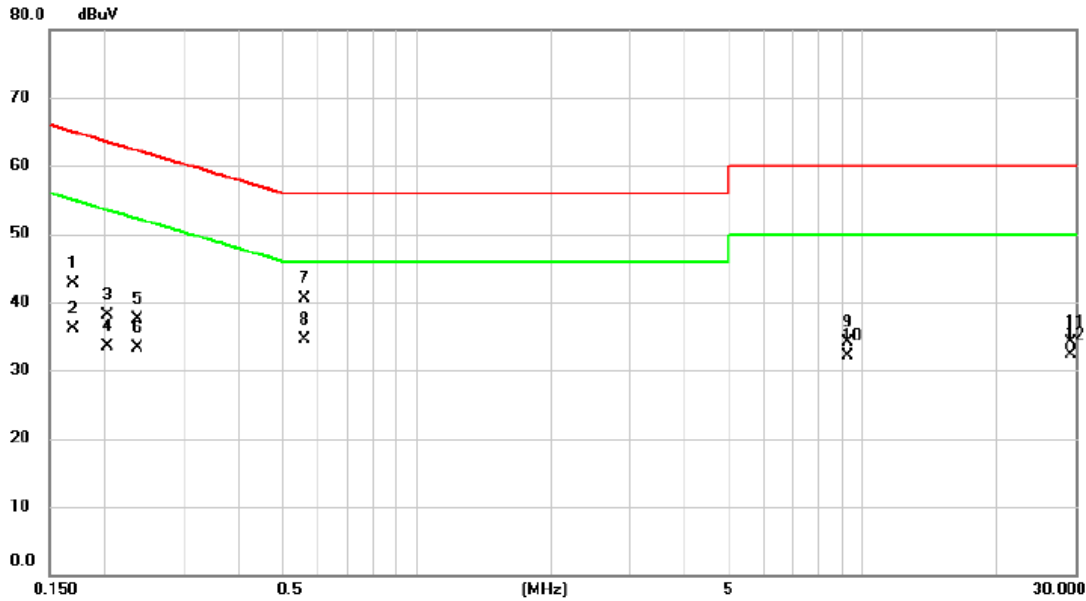


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1696	32.94	9.67	42.61	64.98	-22.37	QP	
2	0.1696	26.39	9.67	36.06	54.98	-18.92	AVG	
3	0.2025	28.49	9.67	38.16	63.51	-25.35	QP	
4	0.2025	23.87	9.67	33.54	53.51	-19.97	AVG	
5	0.2368	27.77	9.67	37.44	62.21	-24.77	QP	
6	0.2368	23.57	9.67	33.24	52.21	-18.97	AVG	
7	0.5585	30.83	9.69	40.52	56.00	-15.48	QP	
8 *	0.5585	24.73	9.69	34.42	46.00	-11.58	AVG	
9	9.2250	23.99	10.04	34.03	60.00	-25.97	QP	
10	9.2250	22.07	10.04	32.11	50.00	-17.89	AVG	
11	29.2250	23.97	10.21	34.18	60.00	-25.82	QP	
12	29.2250	22.06	10.21	32.27	50.00	-17.73	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Test Date	2024/3/18
Test Frequency	-	Phase	Neutral

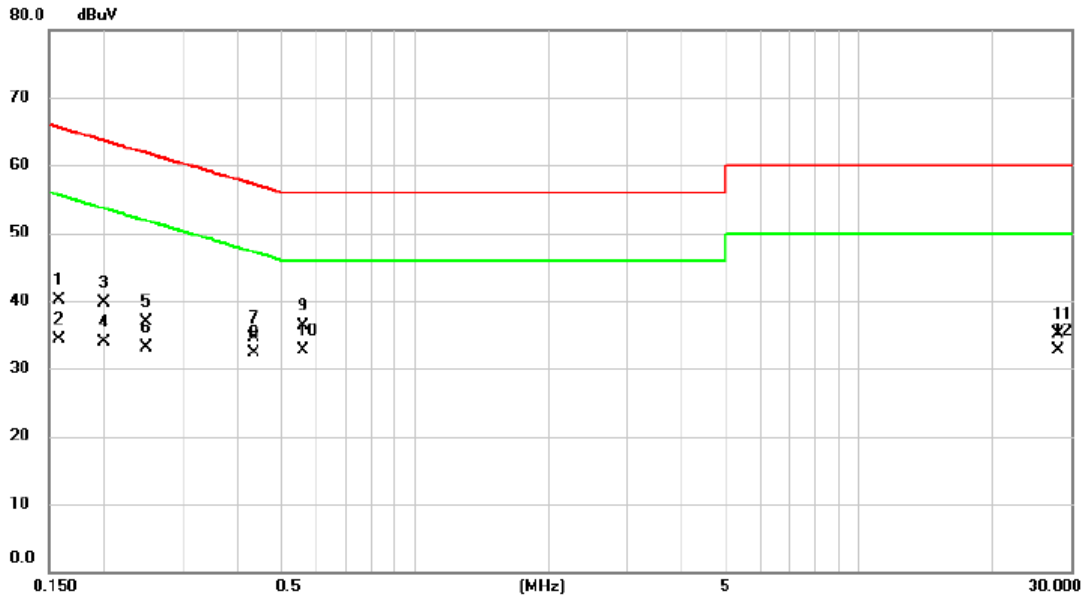


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1587	30.53	9.67	40.20	65.53	-25.33	QP	
2	0.1587	24.60	9.67	34.27	55.53	-21.26	AVG	
3	0.1993	30.02	9.66	39.68	63.64	-23.96	QP	
4	0.1993	24.28	9.66	33.94	53.64	-19.70	AVG	
5	0.2480	27.15	9.66	36.81	61.82	-25.01	QP	
6	0.2480	23.38	9.66	33.04	51.82	-18.78	AVG	
7	0.4340	24.74	9.68	34.42	57.18	-22.76	QP	
8	0.4340	22.65	9.68	32.33	47.18	-14.85	AVG	
9	0.5585	26.68	9.69	36.37	56.00	-19.63	QP	
10 *	0.5585	22.97	9.69	32.66	46.00	-13.34	AVG	
11	28.0500	24.56	10.45	35.01	60.00	-24.99	QP	
12	28.0500	22.35	10.45	32.80	50.00	-17.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Test Date	2024/3/18
Test Frequency	-	Phase	Line

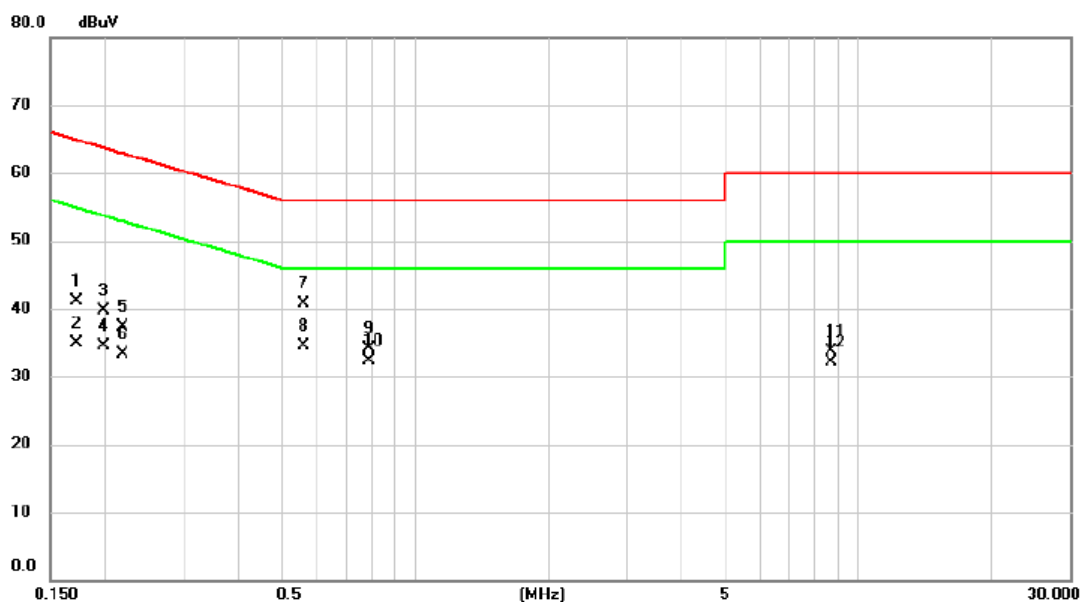


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1727	31.44	9.67	41.11	64.83	-23.72	QP	
2	0.1727	25.29	9.67	34.96	54.83	-19.87	AVG	
3	0.1986	30.07	9.67	39.74	63.67	-23.93	QP	
4	0.1986	24.78	9.67	34.45	53.67	-19.22	AVG	
5	0.2190	27.61	9.67	37.28	62.86	-25.58	QP	
6	0.2190	23.64	9.67	33.31	52.86	-19.55	AVG	
7	0.5585	30.94	9.69	40.63	56.00	-15.37	QP	
8 *	0.5585	24.81	9.69	34.50	46.00	-11.50	AVG	
9	0.7880	24.37	9.72	34.09	56.00	-21.91	QP	
10	0.7880	22.67	9.72	32.39	46.00	-13.61	AVG	
11	8.7000	23.71	10.01	33.72	60.00	-26.28	QP	
12	8.7000	22.11	10.01	32.12	50.00	-17.88	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Idle	Test Date	2024/3/18
Test Frequency	-	Phase	Neutral

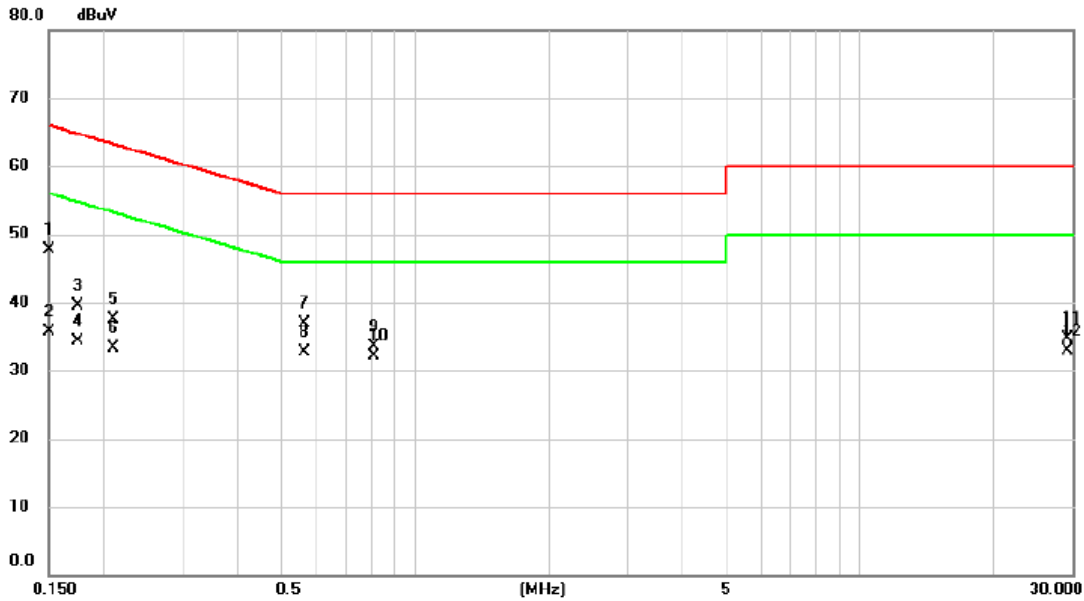


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1510	38.01	9.67	47.68	65.94	-18.26	QP	
2	0.1510	26.12	9.67	35.79	55.94	-20.15	AVG	
3	0.1745	29.84	9.67	39.51	64.74	-25.23	QP	
4	0.1745	24.70	9.67	34.37	54.74	-20.37	AVG	
5	0.2091	27.77	9.66	37.43	63.24	-25.81	QP	
6	0.2091	23.65	9.66	33.31	53.24	-19.93	AVG	
7	0.5630	27.20	9.69	36.89	56.00	-19.11	QP	
8 *	0.5630	22.93	9.69	32.62	46.00	-13.38	AVG	
9	0.8060	23.76	9.72	33.48	56.00	-22.52	QP	
10	0.8060	22.44	9.72	32.16	46.00	-13.84	AVG	
11	29.2000	24.32	10.47	34.79	60.00	-25.21	QP	
12	29.2000	22.43	10.47	32.90	50.00	-17.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/3/18
Test Frequency	5530 MHz	Polarization	Vertical

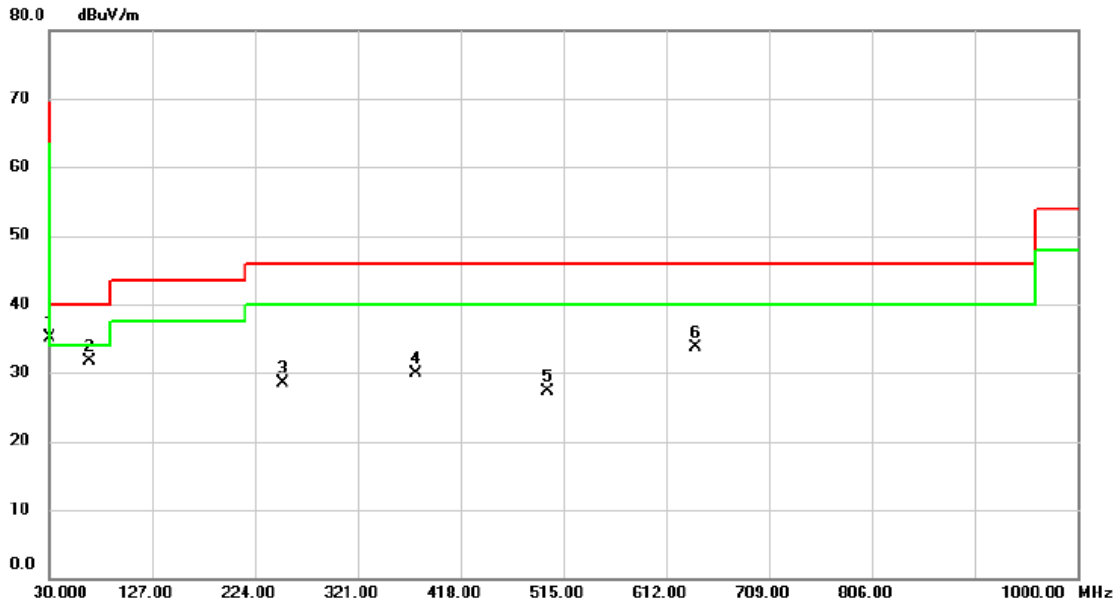


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	30.0000	48.76	-13.64	35.12	40.00	-4.88	peak	100	255	
2		67.8300	45.05	-13.25	31.80	40.00	-8.20	peak	100	243	
3		250.1900	40.41	-11.99	28.42	46.00	-17.58	peak	200	238	
4		375.3200	38.08	-8.19	29.89	46.00	-16.11	peak	200	126	
5		500.4500	32.46	-5.23	27.23	46.00	-18.77	peak	100	347	
6		640.1300	35.42	-1.80	33.62	46.00	-12.38	peak	100	312	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/3/18
Test Frequency	5530 MHz	Polarization	Horizontal

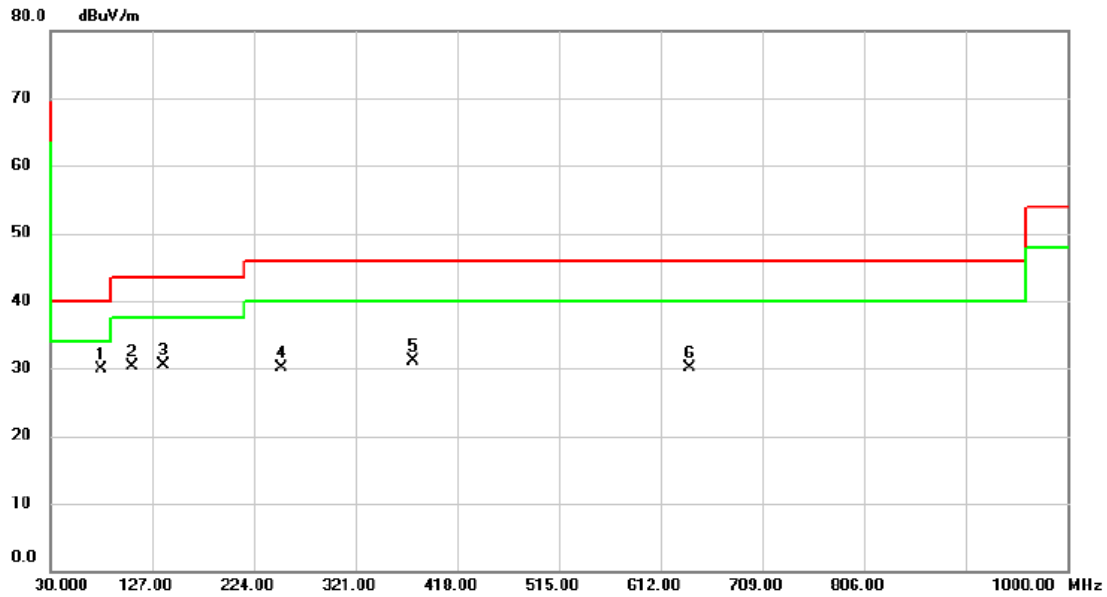


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	78.5000	45.65	-15.78	29.87	40.00	-10.13	peak	200	178	
2		108.5700	45.35	-15.03	30.32	43.50	-13.18	peak	200	272	
3		138.6400	42.65	-12.11	30.54	43.50	-12.96	peak	100	107	
4		250.1900	42.14	-11.99	30.15	46.00	-15.85	peak	122	360	
5		375.3200	39.38	-8.19	31.19	46.00	-14.81	peak	100	140	
6		640.1300	31.82	-1.80	30.02	46.00	-15.98	peak	100	224	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - ABOVE 1000 MHZ

Test Mode	IEEE 802.11a	Test Date	2024/3/16
Test Frequency	5180 MHz	Polarization	Horizontal

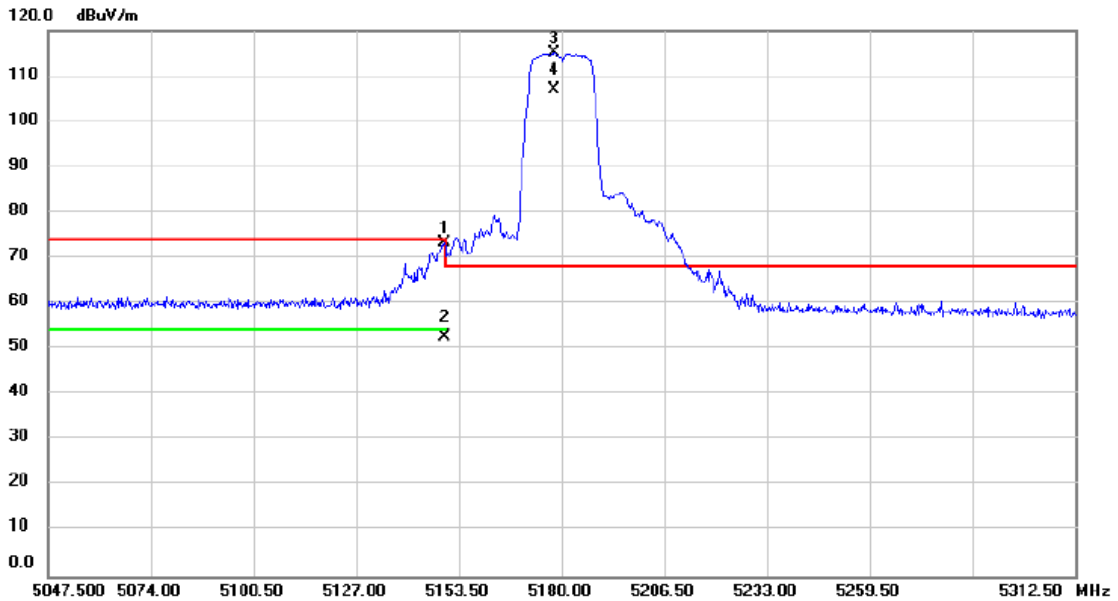


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.790	63.43	9.95	73.38	74.00	-0.62			peak
2		5149.790	42.80	9.95	52.75	54.00	-1.25			AVG
3	*	5178.145	104.96	9.97	114.93	68.20	46.73			peak No Limit
4	X	5178.145	96.96	9.97	106.93	68.20	38.73			AVG No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/16
Test Frequency	5240 MHz	Polarization	Horizontal

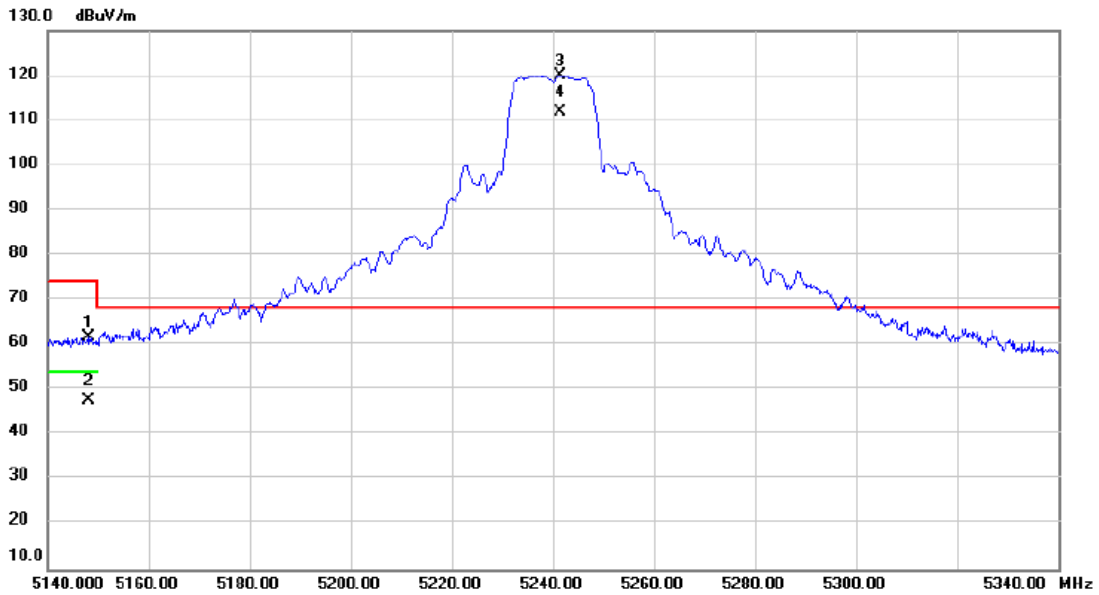


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		5148.000	51.82	9.95	61.77	74.00	-12.23	peak			
2		5148.000	37.67	9.95	47.62	54.00	-6.38	AVG			
3	*	5241.400	110.04	10.01	120.05	68.20	51.85	peak			No Limit
4	X	5241.400	101.94	10.01	111.95	68.20	43.75	AVG			No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/16
Test Frequency	5260 MHz	Polarization	Horizontal

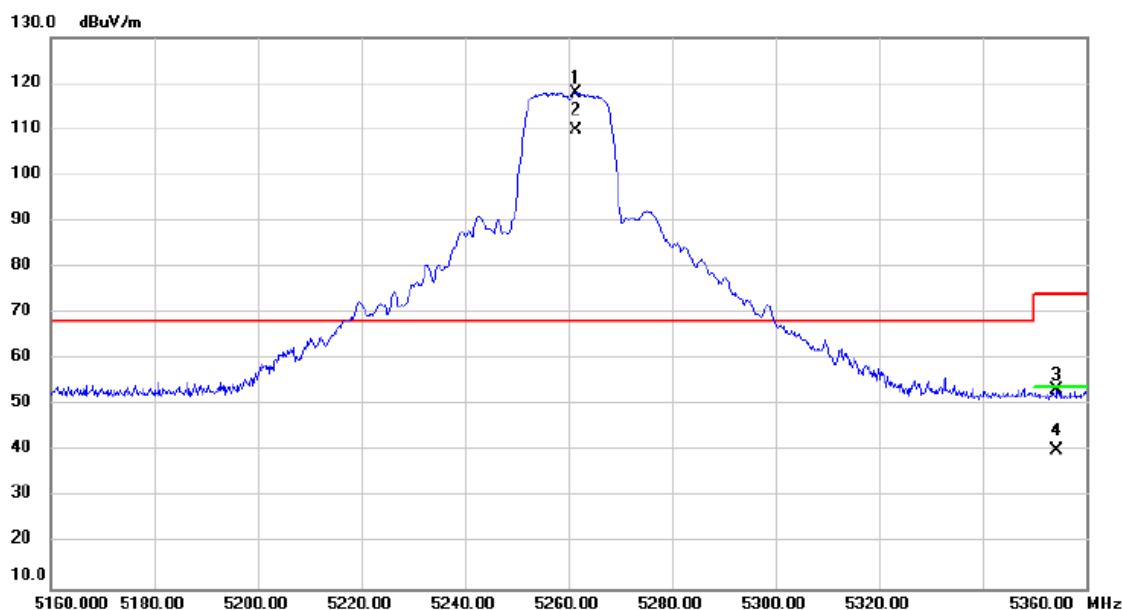


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	5261.400	107.94	10.01	117.95	68.20	49.75			peak	No Limit
2	X	5261.400	99.88	10.01	109.89	68.20	41.69			AVG	No Limit
3		5354.400	43.42	10.06	53.48	74.00	-20.52			peak	
4		5354.400	29.99	10.06	40.05	54.00	-13.95			AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/16
Test Frequency	5320 MHz	Polarization	Horizontal

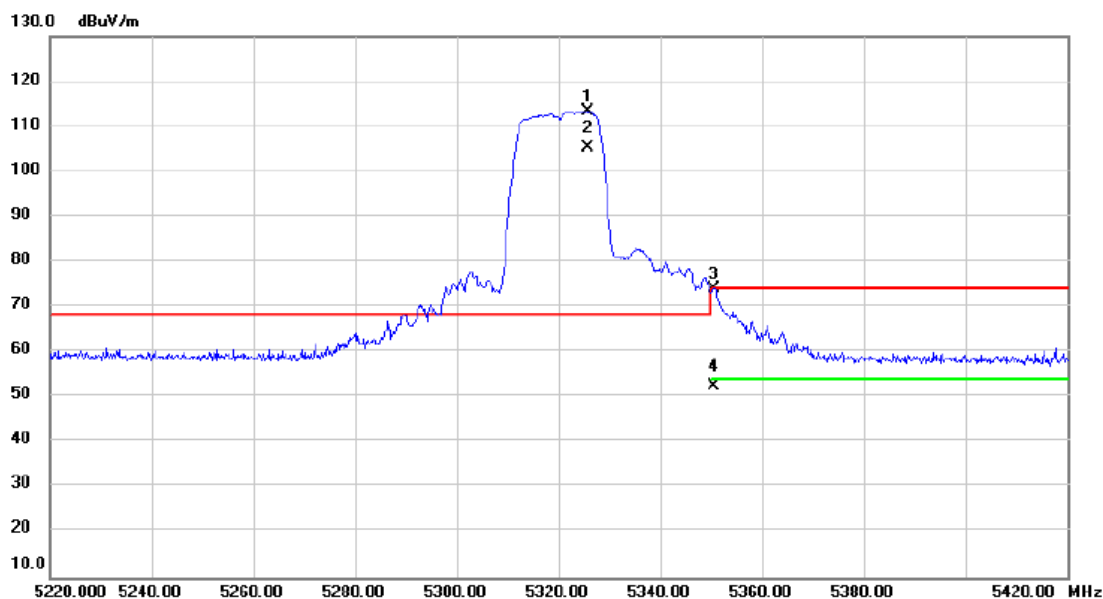


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5325.800	103.17	10.05	113.22	68.20	45.02	peak		No Limit
2	X	5325.800	95.19	10.05	105.24	68.20	37.04	AVG		No Limit
3		5350.600	63.86	10.06	73.92	74.00	-0.08	peak		
4		5350.600	42.43	10.06	52.49	54.00	-1.51	AVG		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5500 MHz	Polarization	Horizontal

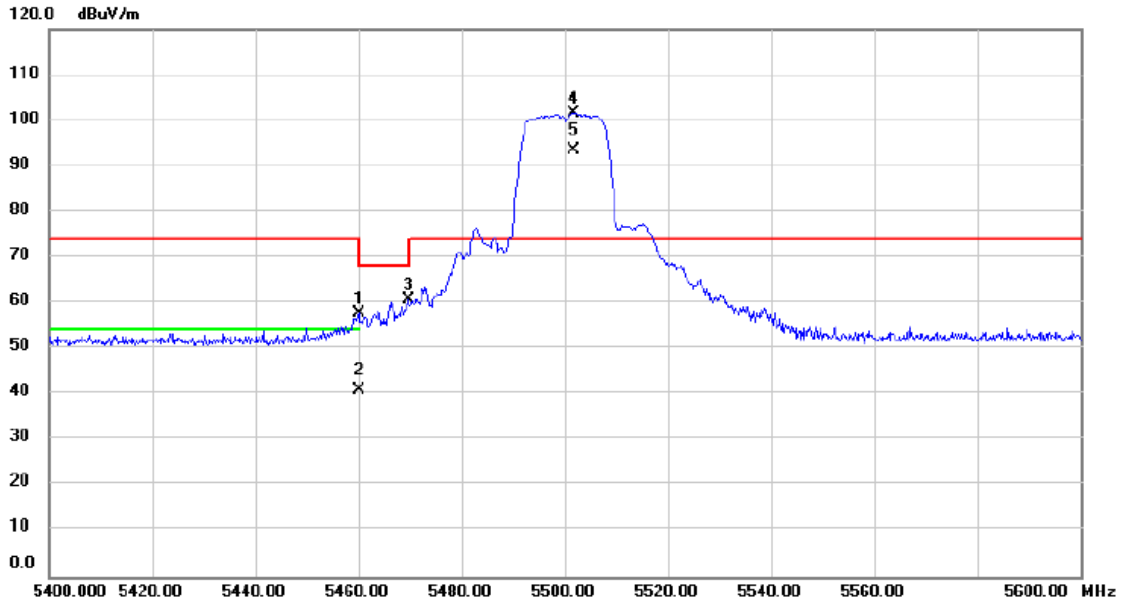


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5460.000	47.68	10.12	57.80	74.00	-16.20			peak
2		5460.000	30.92	10.12	41.04	54.00	-12.96			AVG
3		5469.600	50.72	10.12	60.84	68.20	-7.36			peak
4	*	5501.600	91.37	10.14	101.51	74.00	27.51			No Limit
5	X	5501.600	83.33	10.14	93.47	74.00	19.47			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5700 MHz	Polarization	Horizontal

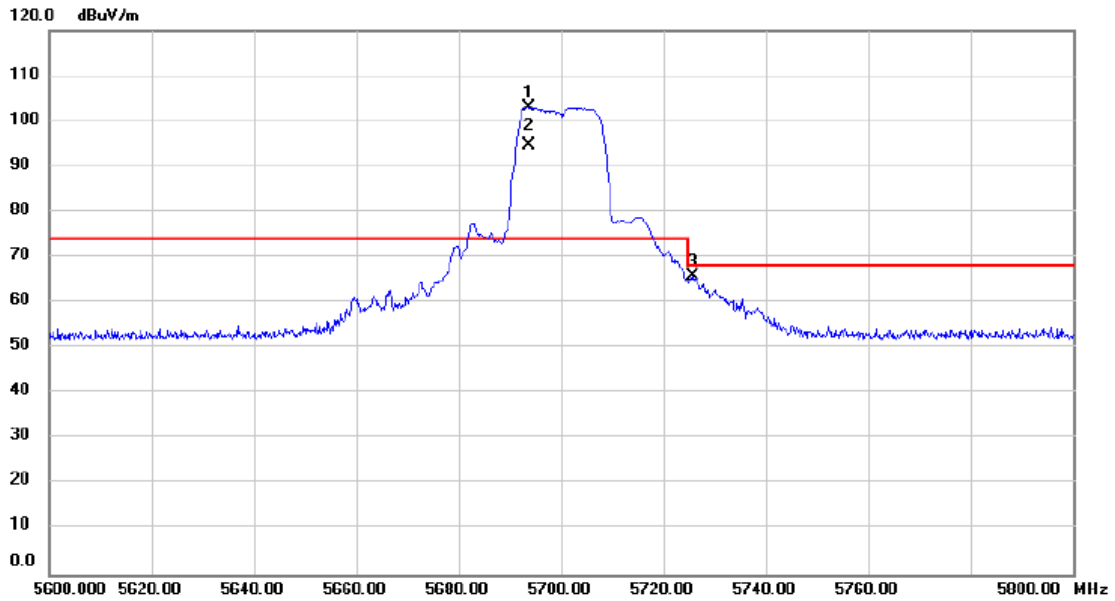


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5693.600	92.40	10.56	102.96	74.00	28.96	peak		No Limit
2	X	5693.600	84.21	10.56	94.77	74.00	20.77	AVG		No Limit
3		5725.600	55.26	10.63	65.89	68.20	-2.31	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/16
Test Frequency	5745 MHz	Polarization	Horizontal

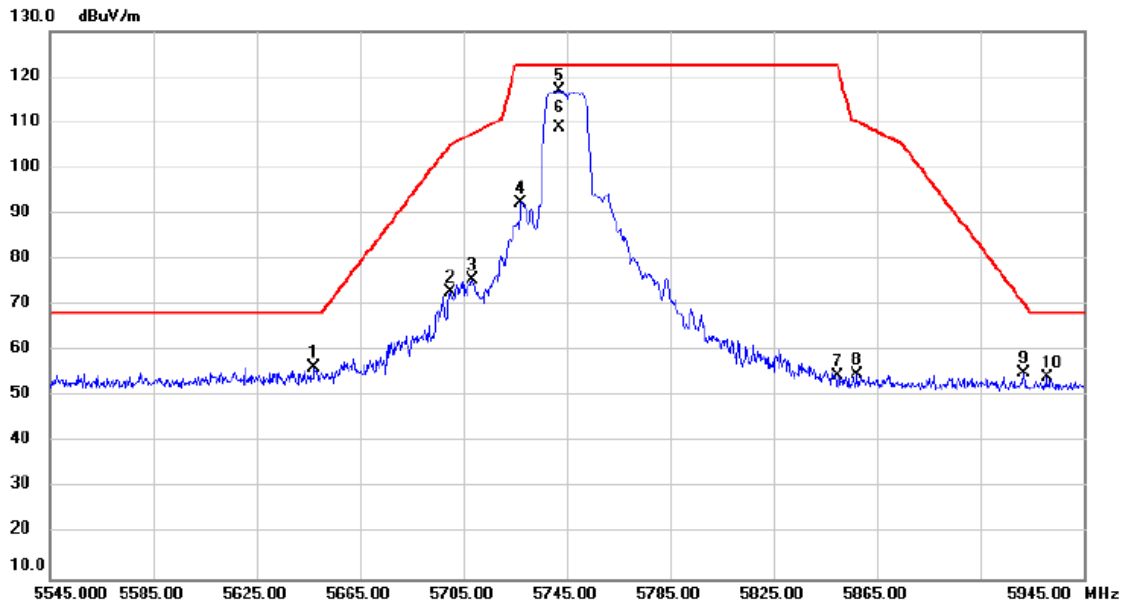


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5647.400	45.87	10.47	56.34	68.20	-11.86	peak			
2		5700.200	62.25	10.58	72.83	105.26	-32.43	peak			
3		5708.600	64.82	10.59	75.41	107.61	-32.20	peak			
4		5727.400	81.65	10.63	92.28	122.20	-29.92	peak			
5	*	5742.200	106.15	10.67	116.82	122.20	-5.38	peak			No Limit
6		5742.200	98.21	10.67	108.88	122.20	-13.32	AVG			No Limit
7		5849.800	43.62	10.91	54.53	122.20	-67.67	peak			
8		5857.400	43.99	10.92	54.91	110.13	-55.22	peak			
9		5921.800	44.00	11.07	55.07	70.56	-15.49	peak			
10		5930.600	43.07	11.09	54.16	68.20	-14.04	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/16
Test Frequency	5825 MHz	Polarization	Horizontal

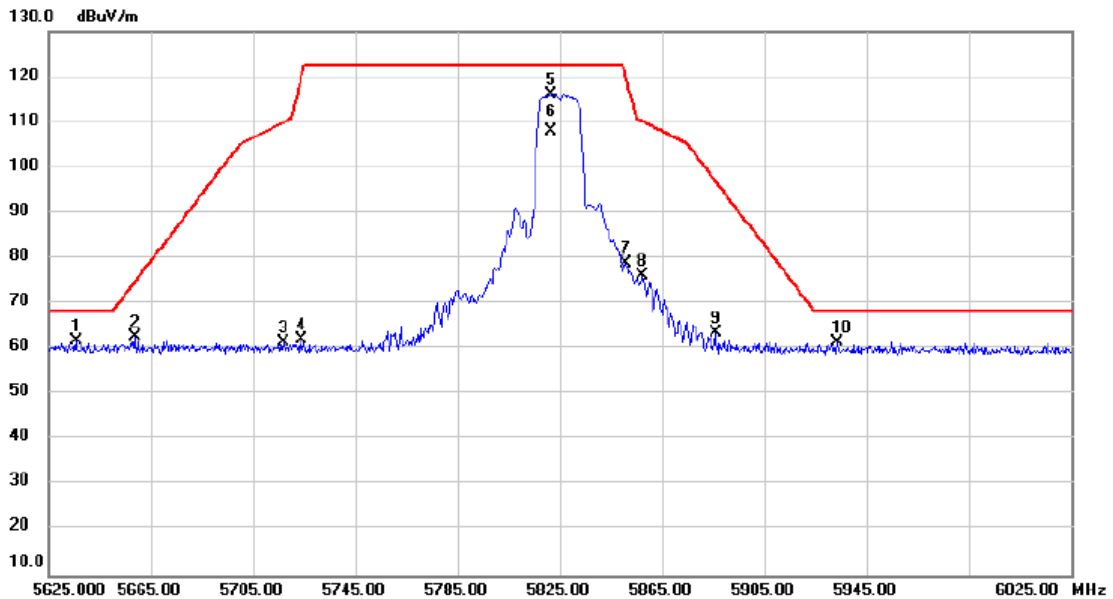


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5635.800	51.18	10.44	61.62	68.20	-6.58	peak			
2	5658.600	52.21	10.49	62.70	74.59	-11.89	peak			
3	5717.000	50.94	10.62	61.56	109.96	-48.40	peak			
4	5723.800	51.35	10.63	61.98	119.46	-57.48	peak			
5 *	5821.400	105.15	10.84	115.99	122.20	-6.21	peak			No Limit
6	5821.400	97.03	10.84	107.87	122.20	-14.33	AVG			No Limit
7	5850.600	67.85	10.91	78.76	120.83	-42.07	peak			
8	5857.400	65.10	10.92	76.02	110.13	-34.11	peak			
9	5885.800	52.54	10.99	63.53	97.18	-33.65	peak			
10	5933.400	50.50	11.09	61.59	68.20	-6.61	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/16
Test Frequency	5180 MHz	Polarization	Horizontal

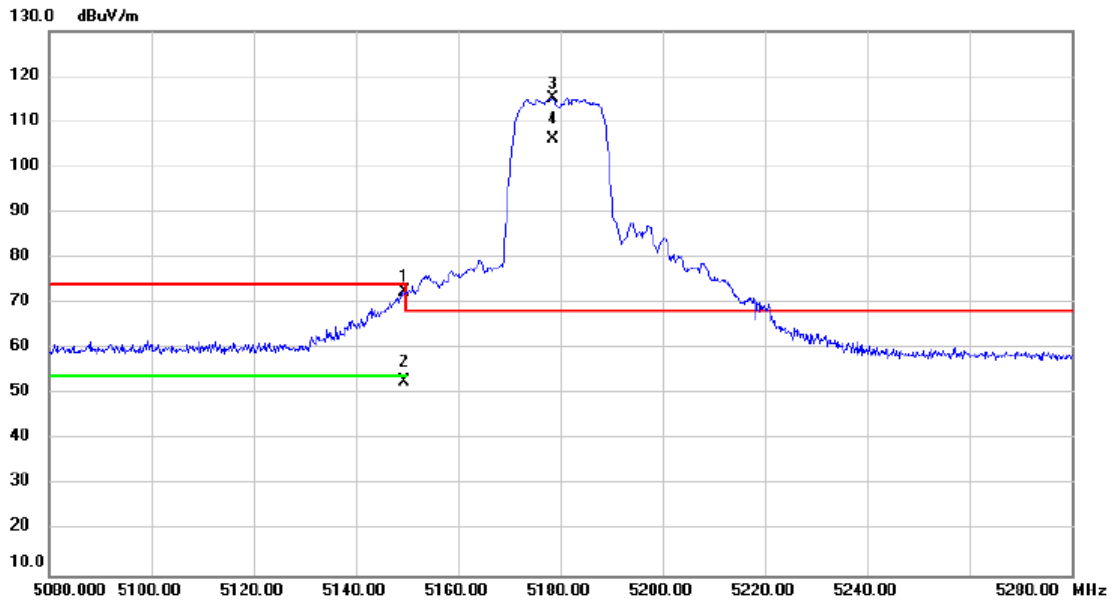


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	5149.400	62.72	9.95	72.67	74.00	-1.33	peak			
2	5149.400	42.84	9.95	52.79	54.00	-1.21	AVG			
3 *	5178.600	105.20	9.97	115.17	68.20	46.97	peak			No Limit
4 X	5178.600	96.32	9.97	106.29	68.20	38.09	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/16
Test Frequency	5240 MHz	Polarization	Horizontal

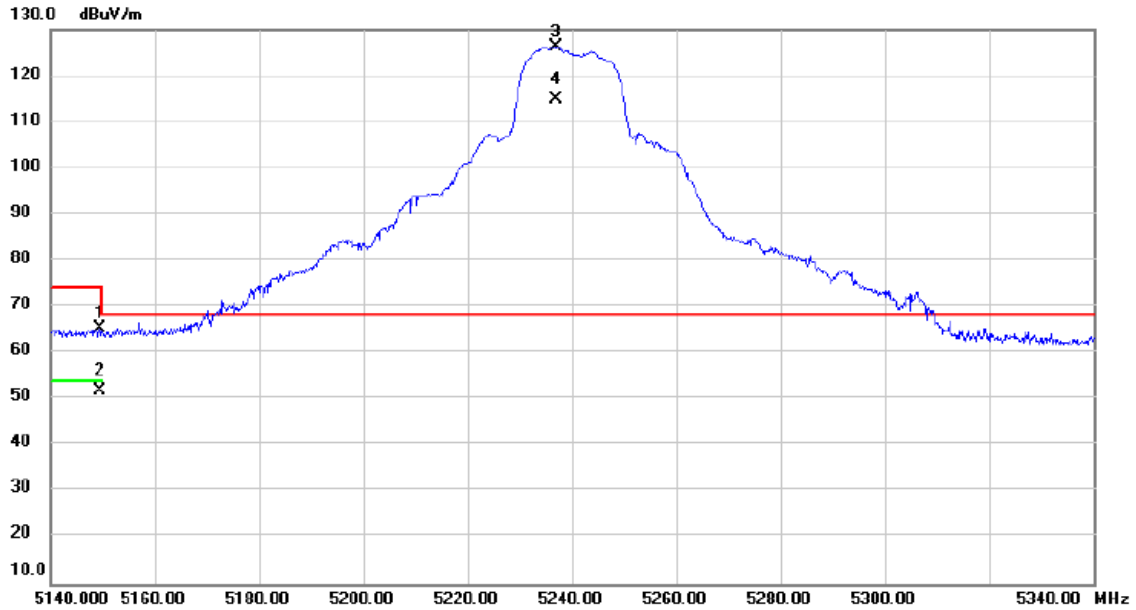


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.400	55.44	9.95	65.39	74.00	-8.61	peak		
2		5149.400	41.90	9.95	51.85	54.00	-2.15	AVG		
3	*	5237.000	116.29	10.00	126.29	68.20	58.09	peak		No Limit
4	X	5237.000	104.85	10.00	114.85	68.20	46.65	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/16
Test Frequency	5260 MHz	Polarization	Horizontal

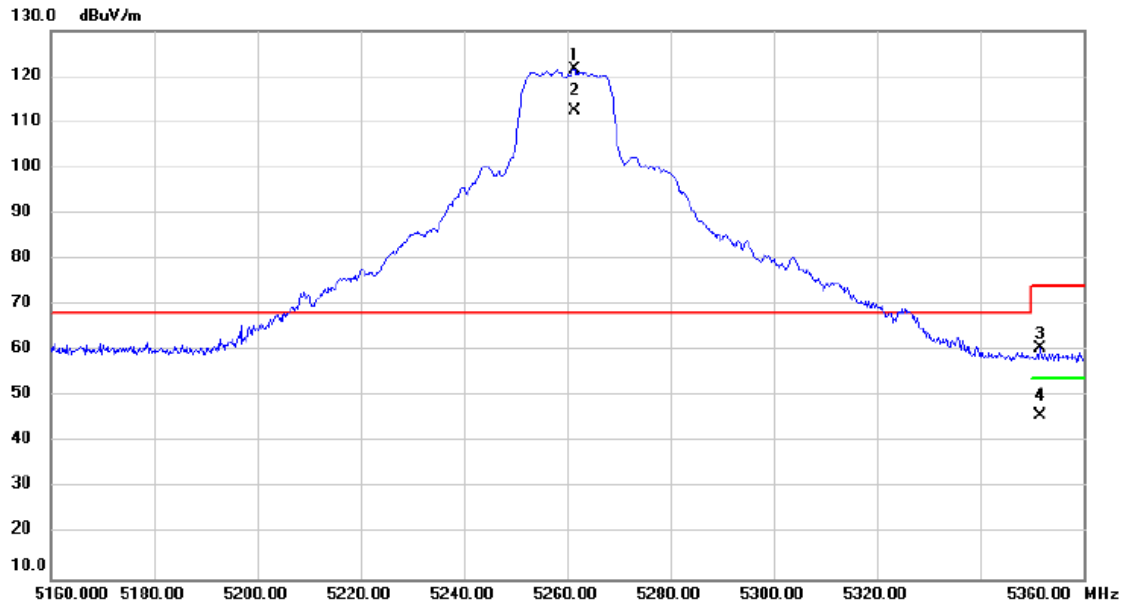


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	5261.400	111.51	10.01	121.52	68.20	53.32			peak	No Limit
2	X	5261.400	102.56	10.01	112.57	68.20	44.37			AVG	No Limit
3		5351.600	50.49	10.06	60.55	74.00	-13.45			peak	
4		5351.600	35.75	10.06	45.81	54.00	-8.19			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/16
Test Frequency	5320 MHz	Polarization	Horizontal

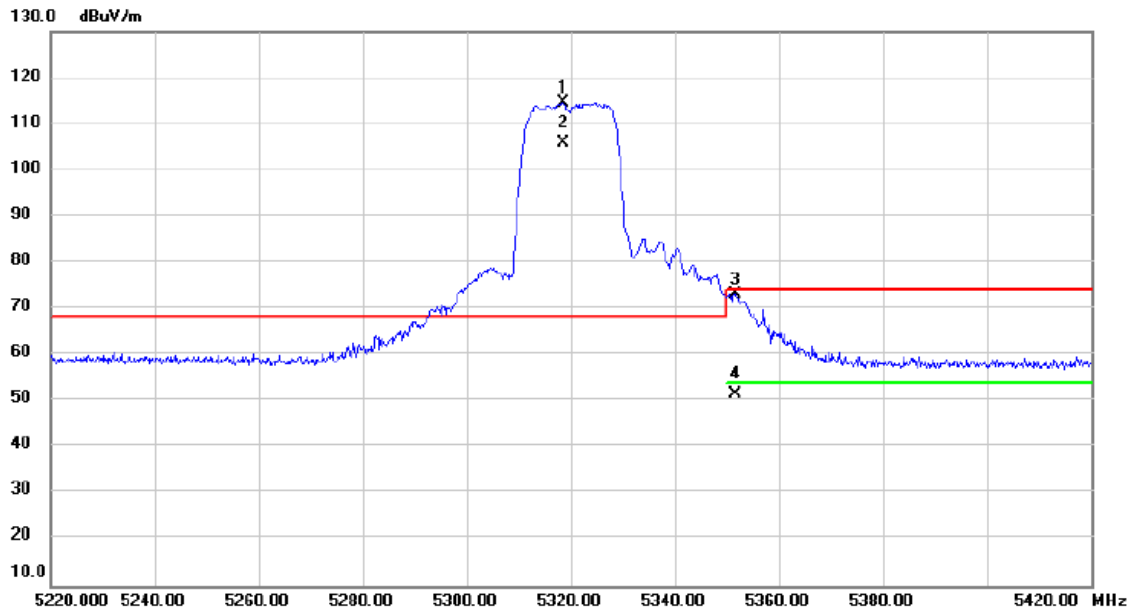


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5318.600	104.48	10.04	114.52	68.20	46.32	peak		No Limit
2	X	5318.600	95.85	10.04	105.89	68.20	37.69	AVG		No Limit
3		5351.600	63.15	10.06	73.21	74.00	-0.79	peak		
4		5351.600	41.58	10.06	51.64	54.00	-2.36	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5500 MHz	Polarization	Horizontal

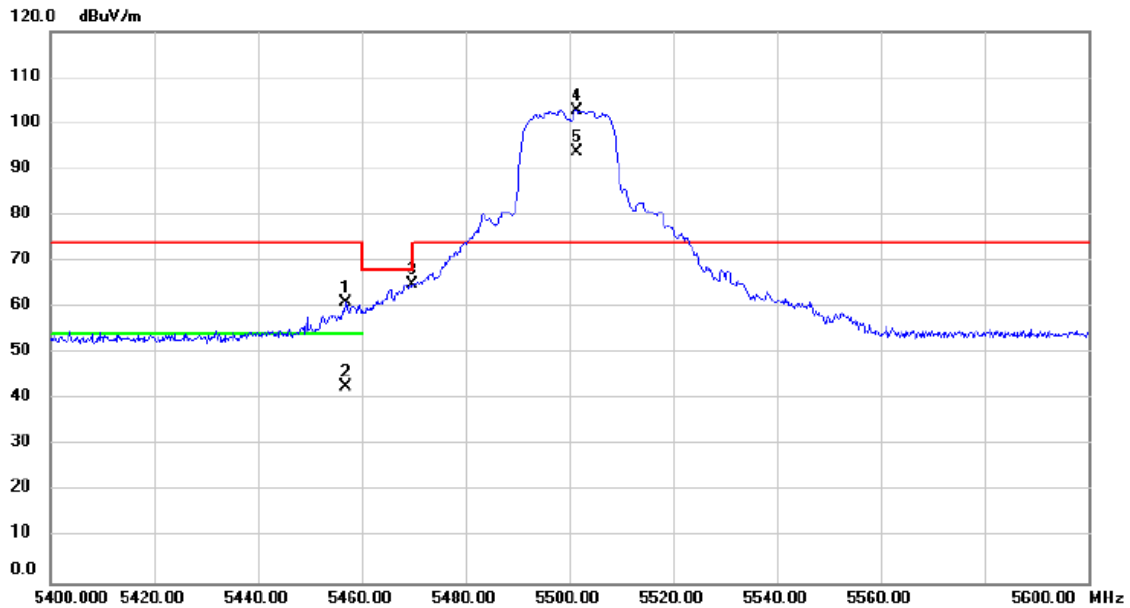


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5457.000	50.87	10.12	60.99	74.00	-13.01	peak		
2		5457.000	32.69	10.12	42.81	74.00	-31.19	peak		
3		5469.800	54.79	10.12	64.91	68.20	-3.29	peak		
4	*	5501.400	92.66	10.14	102.80	74.00	28.80	peak		No Limit
5	X	5501.400	83.65	10.14	93.79	74.00	19.79	peak		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5700 MHz	Polarization	Horizontal

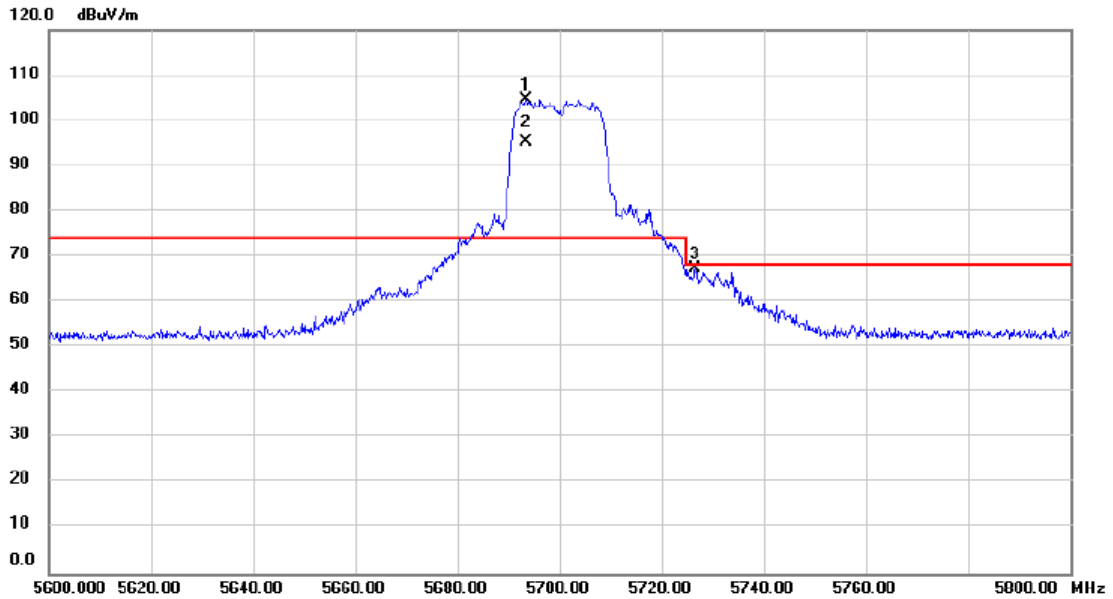


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	5693.400	93.98	10.56	104.54	74.00	30.54	peak			No Limit
2	X	5693.400	84.80	10.56	95.36	74.00	21.36	AVG			No Limit
3		5726.600	56.69	10.63	67.32	68.20	-0.88	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/16
Test Frequency	5745 MHz	Polarization	Horizontal

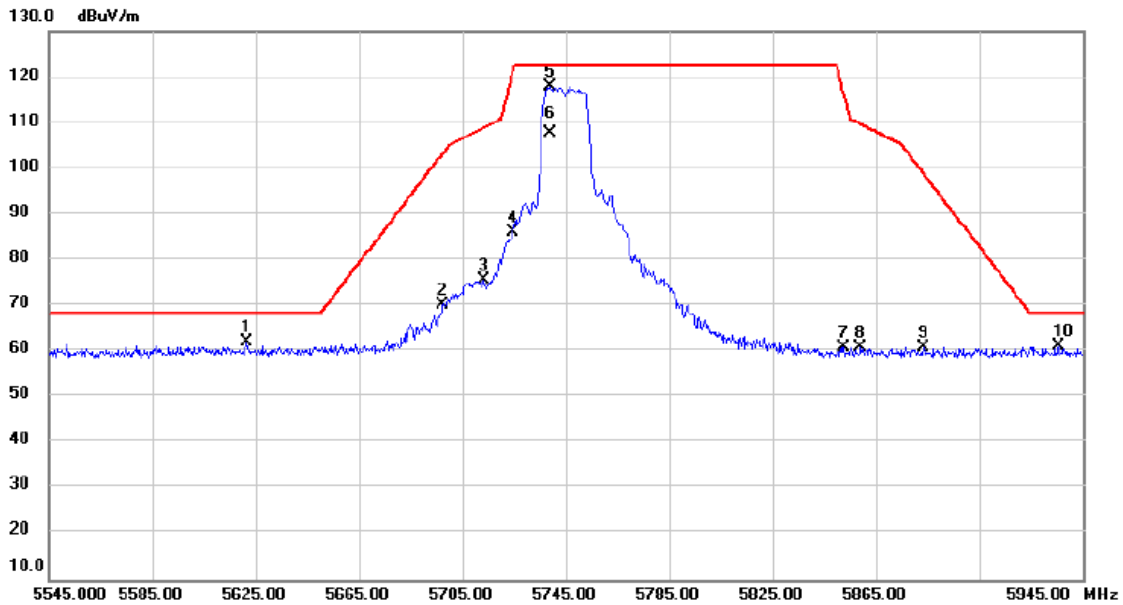


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5621.400	51.60	10.40	62.00	68.20	-6.20	peak			
2		5697.400	59.53	10.57	70.10	103.28	-33.18	peak			
3		5713.000	64.92	10.60	75.52	108.84	-33.32	peak			
4		5724.600	75.43	10.63	86.06	121.29	-35.23	peak			
5	*	5738.600	107.10	10.66	117.76	122.20	-4.44	peak			No Limit
6		5738.600	97.02	10.66	107.68	122.20	-14.52	AVG			No Limit
7		5852.600	49.84	10.91	60.75	116.27	-55.52	peak			
8		5859.000	49.83	10.92	60.75	109.68	-48.93	peak			
9		5883.400	49.98	10.98	60.96	98.96	-38.00	peak			
10		5935.800	49.95	11.11	61.06	68.20	-7.14	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/16
Test Frequency	5825 MHz	Polarization	Horizontal

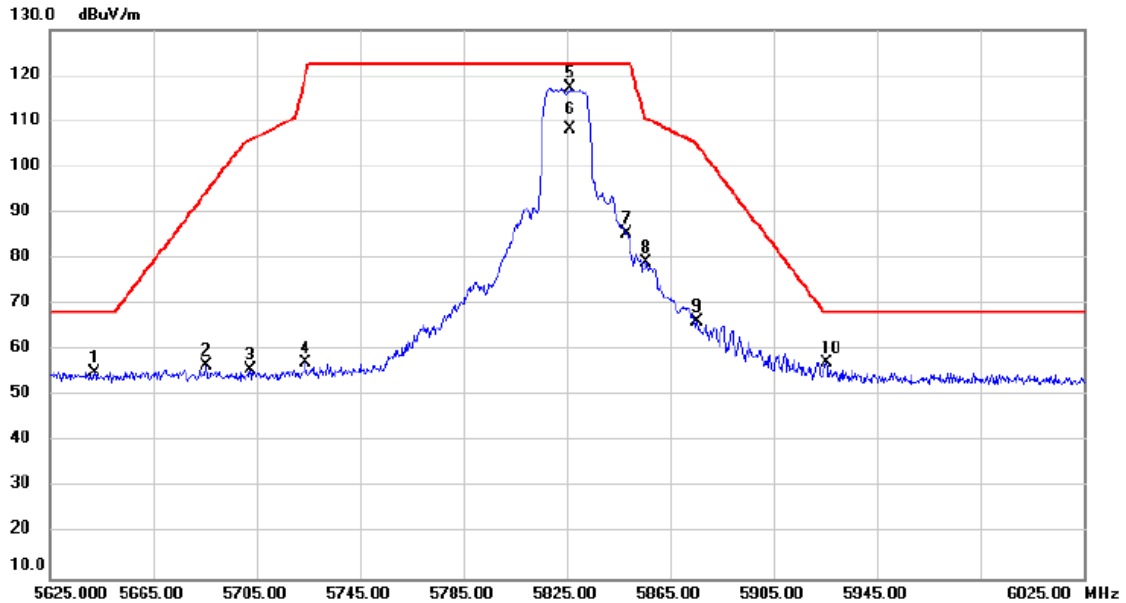


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5642.200	44.84	10.46	55.30	68.20	-12.90	peak			
2	5685.400	46.01	10.56	56.57	94.43	-37.86	peak			
3	5702.600	45.18	10.58	55.76	105.93	-50.17	peak			
4	5724.200	46.49	10.63	57.12	120.38	-63.26	peak			
5 *	5826.200	106.53	10.85	117.38	122.20	-4.82	peak			No Limit
6	5826.200	97.49	10.85	108.34	122.20	-13.86	AVG			No Limit
7	5848.200	74.61	10.91	85.52	122.20	-36.68	peak			
8	5855.800	68.11	10.92	79.03	110.58	-31.55	peak			
9	5875.400	55.23	10.97	66.20	104.90	-38.70	peak			
10	5925.400	46.08	11.08	57.16	68.20	-11.04	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/16
Test Frequency	5190 MHz	Polarization	Horizontal

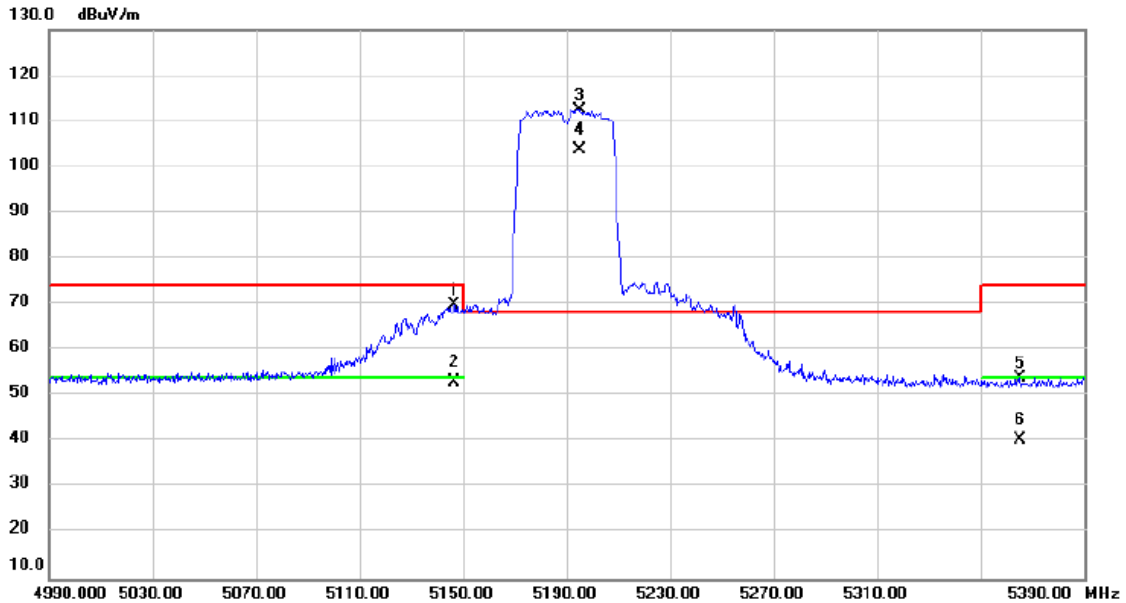


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5146.400	59.86	9.95	69.81	74.00	-4.19	peak			
2		5146.400	43.24	9.95	53.19	54.00	-0.81	AVG			
3	*	5194.800	102.58	9.97	112.55	68.20	44.35	peak			No Limit
4	X	5194.800	93.81	9.97	103.78	68.20	35.58	AVG			No Limit
5		5365.200	43.96	10.06	54.02	74.00	-19.98	peak			
6		5365.200	30.52	10.06	40.58	54.00	-13.42	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/16
Test Frequency	5230 MHz	Polarization	Horizontal

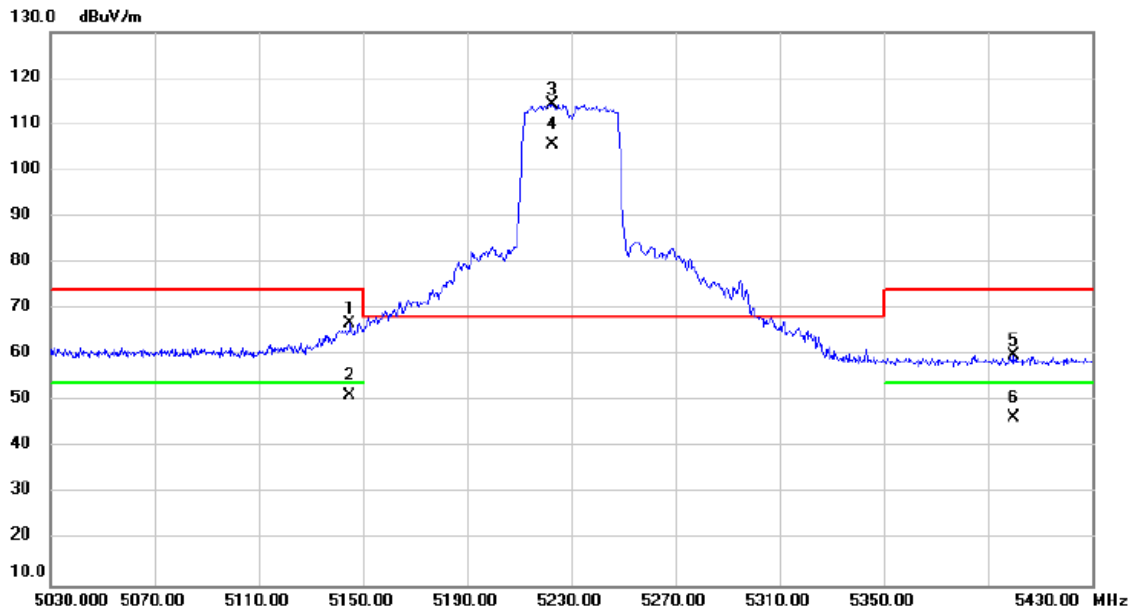


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5145.200	57.02	9.95	66.97	74.00	-7.03	peak			
2		5145.200	41.30	9.95	51.25	54.00	-2.75	AVG			
3	*	5222.800	104.21	9.99	114.20	68.20	46.00	peak			No Limit
4	X	5222.800	95.48	9.99	105.47	68.20	37.27	AVG			No Limit
5		5399.600	49.73	10.09	59.82	74.00	-14.18	peak			
6		5399.600	36.37	10.09	46.46	54.00	-7.54	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/16
Test Frequency	5270 MHz	Polarization	Horizontal

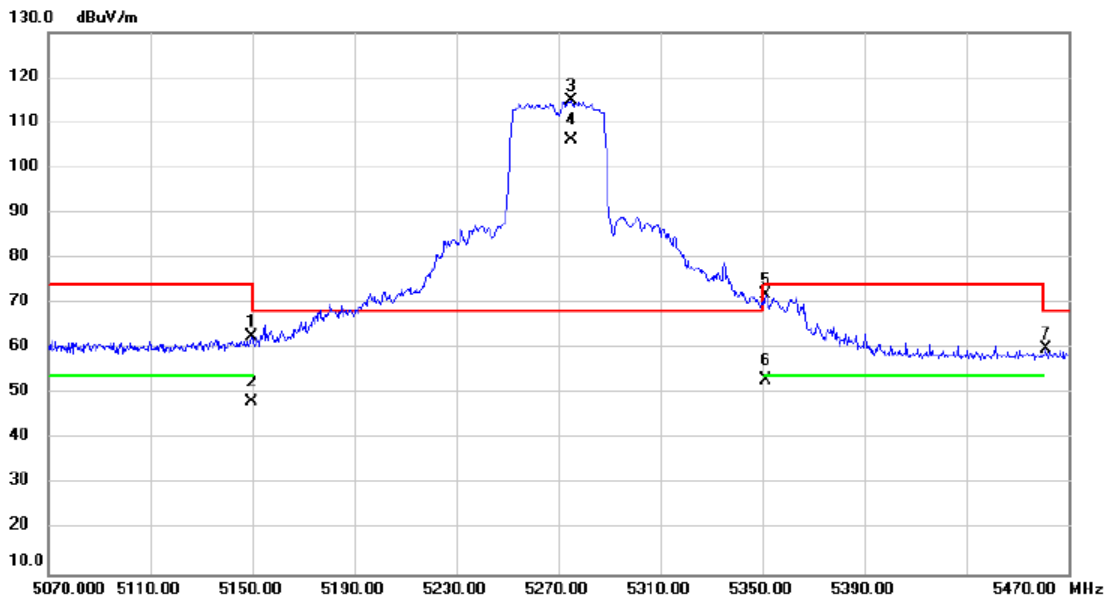


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5149.600	52.72	9.95	62.67	74.00	-11.33			peak
2		5149.600	38.27	9.95	48.22	54.00	-5.78			AVG
3	*	5275.200	104.73	10.02	114.75	68.20	46.55			No Limit
4	X	5275.200	96.00	10.02	106.02	68.20	37.82			No Limit
5		5351.200	61.82	10.06	71.88	74.00	-2.12			peak
6		5351.200	42.89	10.06	52.95	54.00	-1.05			AVG
7		5461.200	49.79	10.12	59.91	68.20	-8.29			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/16
Test Frequency	5310 MHz	Polarization	Horizontal

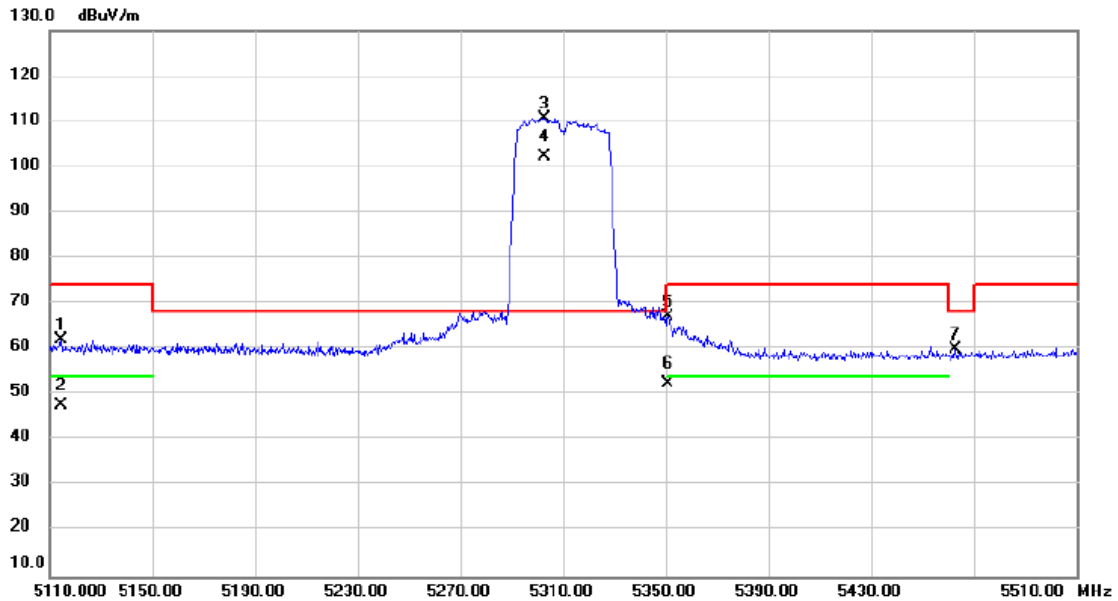


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		5114.400	52.18	9.93	62.11	74.00	-11.89	peak			
2		5114.400	37.59	9.93	47.52	54.00	-6.48	AVG			
3	*	5302.800	100.67	10.04	110.71	68.20	42.51	peak			No Limit
4	X	5302.800	92.10	10.04	102.14	68.20	33.94	AVG			No Limit
5		5350.800	56.97	10.06	67.03	74.00	-6.97	peak			
6		5350.800	42.47	10.06	52.53	54.00	-1.47	AVG			
7		5462.800	49.72	10.12	59.84	68.20	-8.36	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/16
Test Frequency	5510 MHz	Polarization	Horizontal

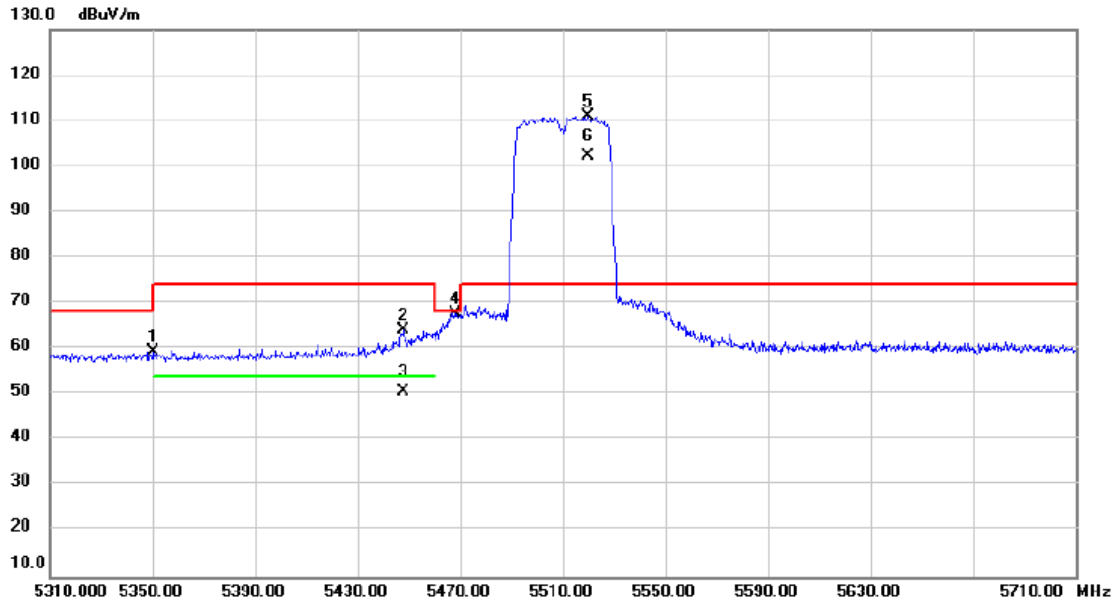


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5350.000	49.41	10.06	59.47	74.00	-14.53	peak			
2	5448.000	53.92	10.11	64.03	74.00	-9.97	peak			
3	5448.000	40.52	10.11	50.63	54.00	-3.37	AVG			
4	5468.000	57.57	10.12	67.69	68.20	-0.51	peak			
5 *	5520.000	100.73	10.18	110.91	74.00	36.91	peak			No Limit
6 X	5520.000	92.07	10.18	102.25	74.00	28.25	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5670 MHz	Polarization	Horizontal

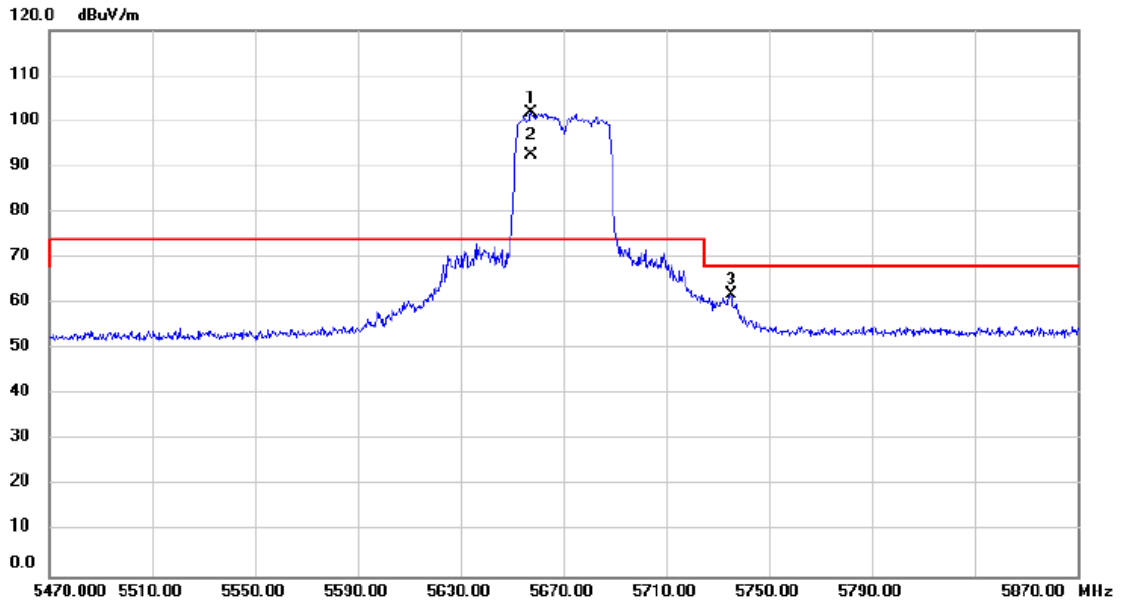


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		cm	degree	
1	*	5657.600	91.31	10.49	101.80	74.00	27.80	peak			No Limit
2	X	5657.600	82.16	10.49	92.65	74.00	18.65	AVG			No Limit
3		5735.200	51.34	10.66	62.00	68.20	-6.20	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/16
Test Frequency	5755 MHz	Polarization	Horizontal

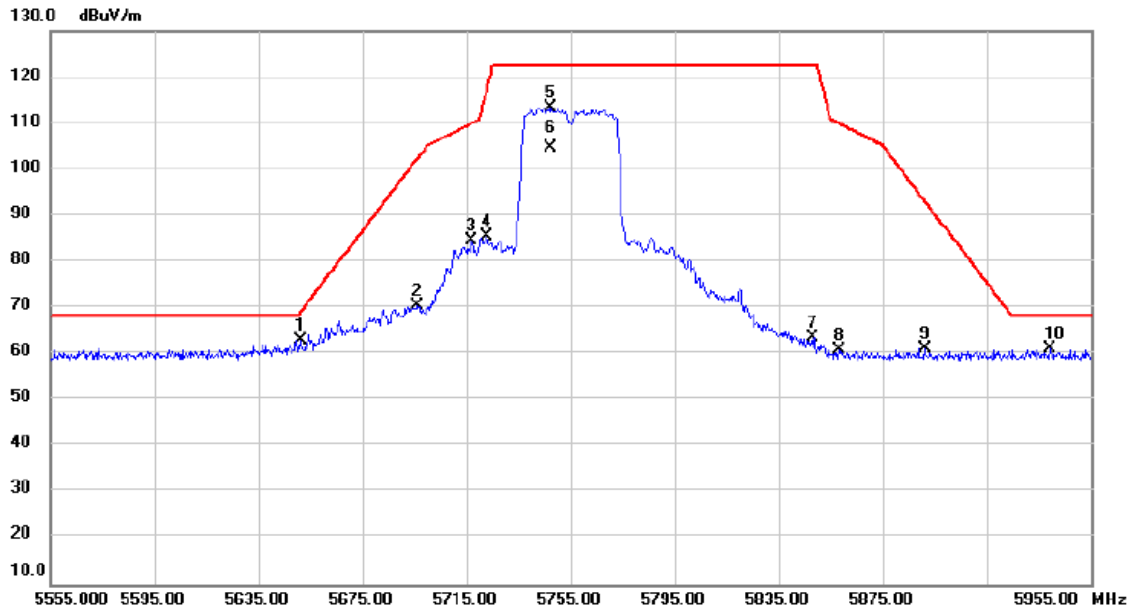


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	5651.000	52.61	10.47	63.08	68.94	-5.86	peak			
2		5696.200	59.99	10.56	70.55	102.40	-31.85	peak			
3		5717.000	74.06	10.62	84.68	109.96	-25.28	peak			
4		5722.600	74.80	10.63	85.43	116.73	-31.30	peak			
5		5747.400	102.63	10.69	113.32	122.20	-8.88	peak			No Limit
6		5747.400	93.98	10.69	104.67	122.20	-17.53	AVG			No Limit
7		5848.200	52.52	10.91	63.43	122.20	-58.77	peak			
8		5858.200	50.03	10.92	60.95	109.90	-48.95	peak			
9		5891.000	50.04	11.01	61.05	93.33	-32.28	peak			
10		5939.000	50.02	11.10	61.12	68.20	-7.08	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/16
Test Frequency	5795 MHz	Polarization	Horizontal

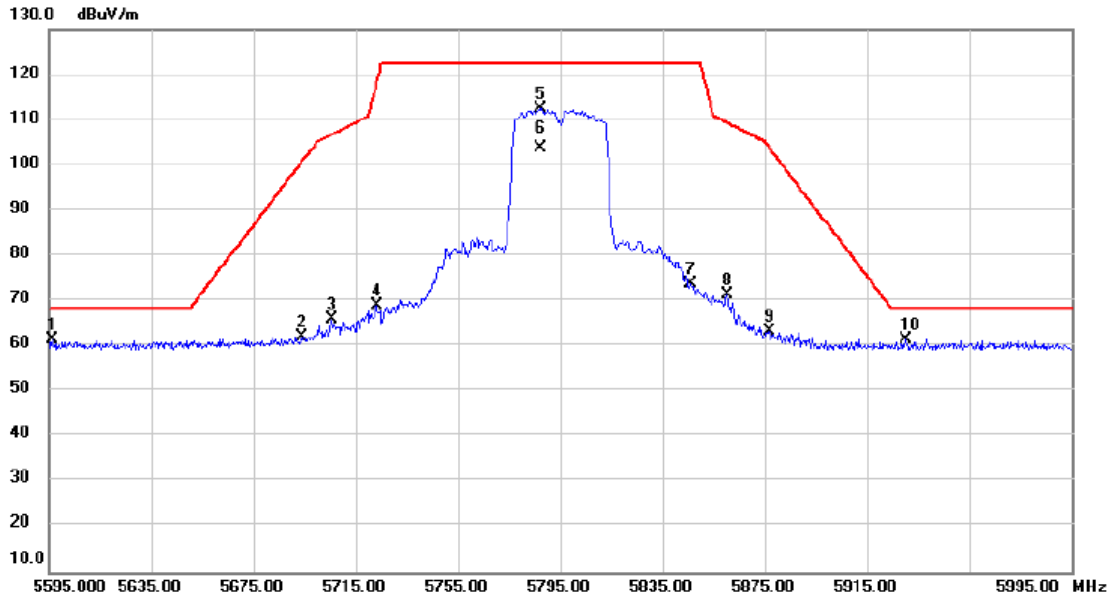


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		5596.200	50.96	10.35	61.31	68.20	-6.89			peak
2		5693.800	51.59	10.56	62.15	100.63	-38.48			peak
3		5705.800	55.33	10.59	65.92	106.83	-40.91			peak
4		5723.000	58.45	10.63	69.08	117.64	-48.56			peak
5		5787.400	101.69	10.78	112.47	122.20	-9.73			peak
6		5787.400	92.88	10.78	103.66	122.20	-18.54			AVG
7		5846.200	62.87	10.90	73.77	122.20	-48.43			peak
8		5860.200	60.37	10.93	71.30	109.34	-38.04			peak
9		5877.000	52.20	10.97	63.17	103.71	-40.54			peak
10	*	5930.200	50.35	11.09	61.44	68.20	-6.76			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5210 MHz	Polarization	Horizontal

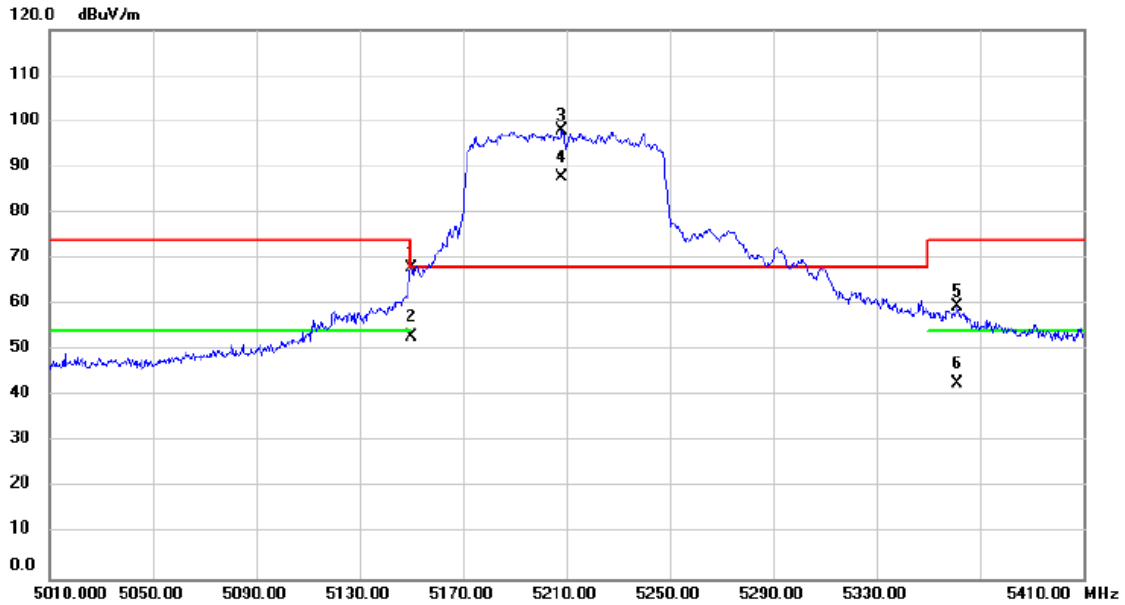


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5150.000	57.86	9.95	67.81	68.20	-0.39	peak			
2		5150.000	43.06	9.95	53.01	54.00	-0.99	AVG			
3	*	5208.400	87.91	9.98	97.89	68.20	29.69	peak			No Limit
4	X	5208.400	77.72	9.98	87.70	68.20	19.50	AVG			No Limit
5		5361.200	49.50	10.06	59.56	74.00	-14.44	peak			
6		5361.200	32.61	10.06	42.67	54.00	-11.33	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5290 MHz	Polarization	Horizontal

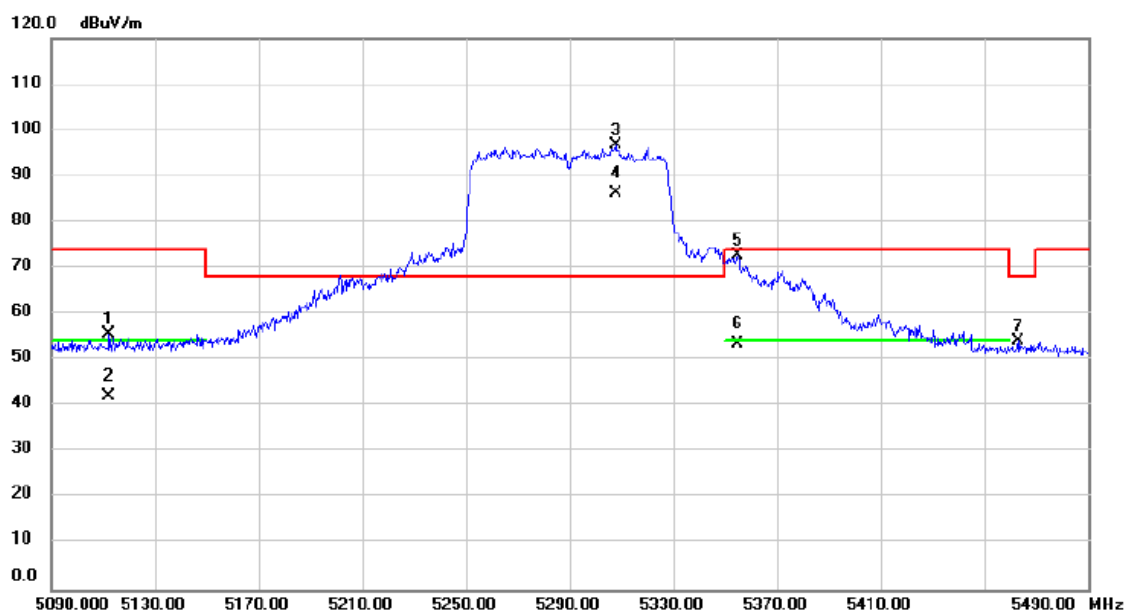


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5112.400	45.83	9.93	55.76	74.00	-18.24	peak			
2		5112.400	32.32	9.93	42.25	54.00	-11.75	AVG			
3	*	5307.600	86.67	10.03	96.70	68.20	28.50	peak			No Limit
4	X	5307.600	76.19	10.03	86.22	68.20	18.02	AVG			No Limit
5		5354.800	62.62	10.06	72.68	74.00	-1.32	peak			
6		5354.800	43.41	10.06	53.47	54.00	-0.53	AVG			
7		5462.800	44.09	10.12	54.21	68.20	-13.99	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5530 MHz	Polarization	Horizontal

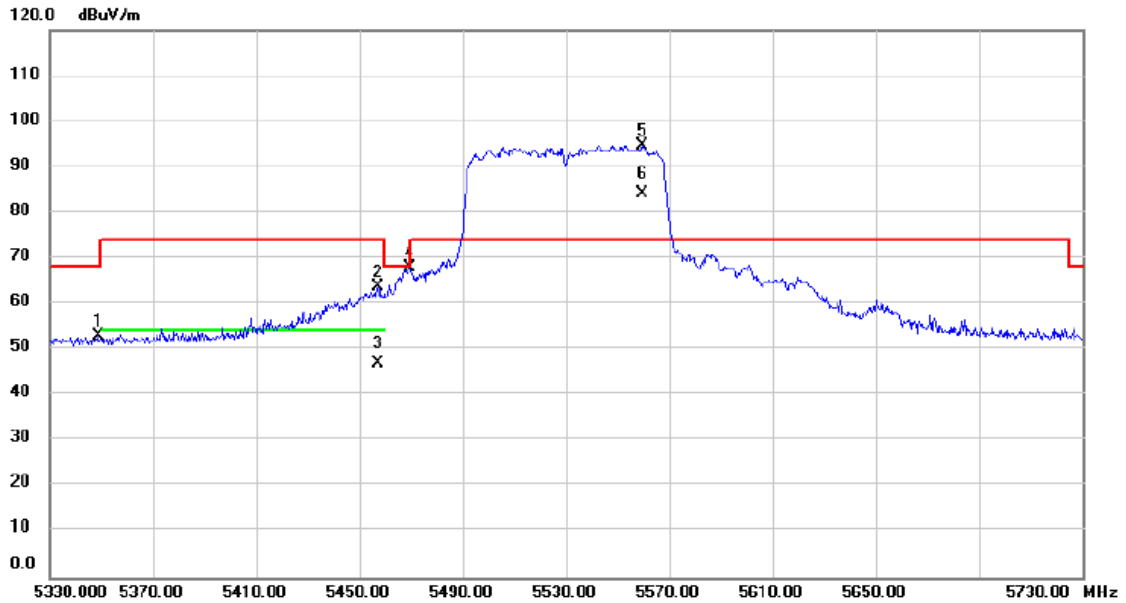


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		cm	degree	
1		5349.200	42.79	10.06	52.85	68.20	-15.35	peak			
2		5457.200	53.56	10.12	63.68	74.00	-10.32	peak			
3		5457.200	36.81	10.12	46.93	54.00	-7.07	AVG			
4		5469.600	57.75	10.12	67.87	68.20	-0.33	peak			
5	*	5559.600	84.50	10.28	94.78	74.00	20.78	peak			No Limit
6	X	5559.600	73.80	10.28	84.08	74.00	10.08	AVG			No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5610 MHz	Polarization	Horizontal

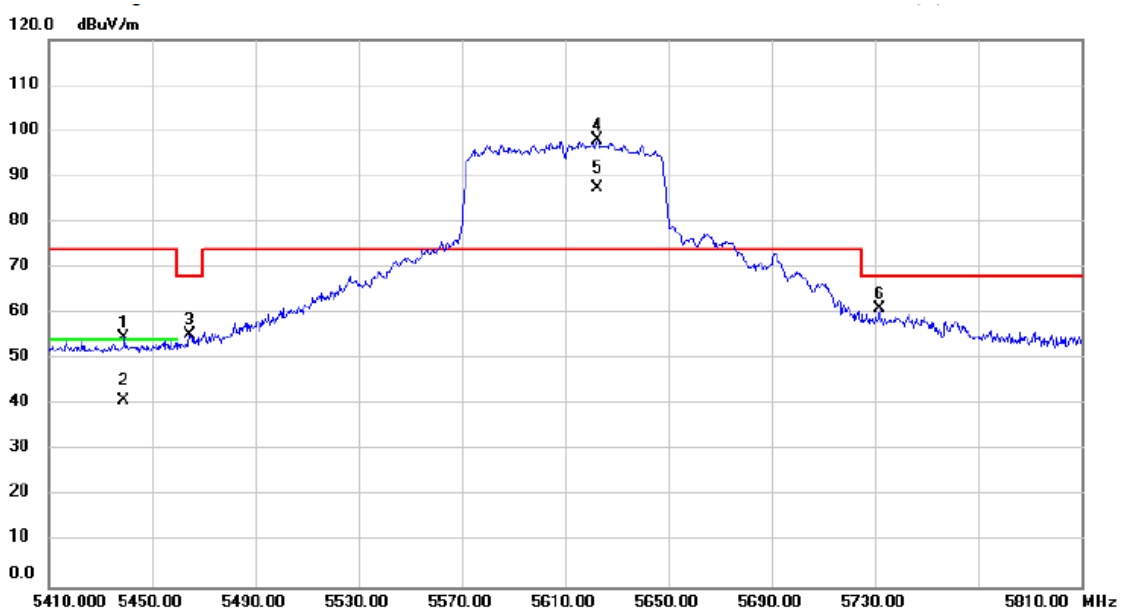


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5439.200	44.79	10.11	54.90	74.00	-19.10	peak			
2		5439.200	30.83	10.11	40.94	54.00	-13.06	AVG			
3		5464.800	45.11	10.12	55.23	68.20	-12.97	peak			
4	*	5622.400	87.43	10.41	97.84	74.00	23.84	peak			No Limit
5	X	5622.400	77.12	10.41	87.53	74.00	13.53	AVG			No Limit
6		5731.600	50.33	10.65	60.98	68.20	-7.22	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5775 MHz	Polarization	Horizontal

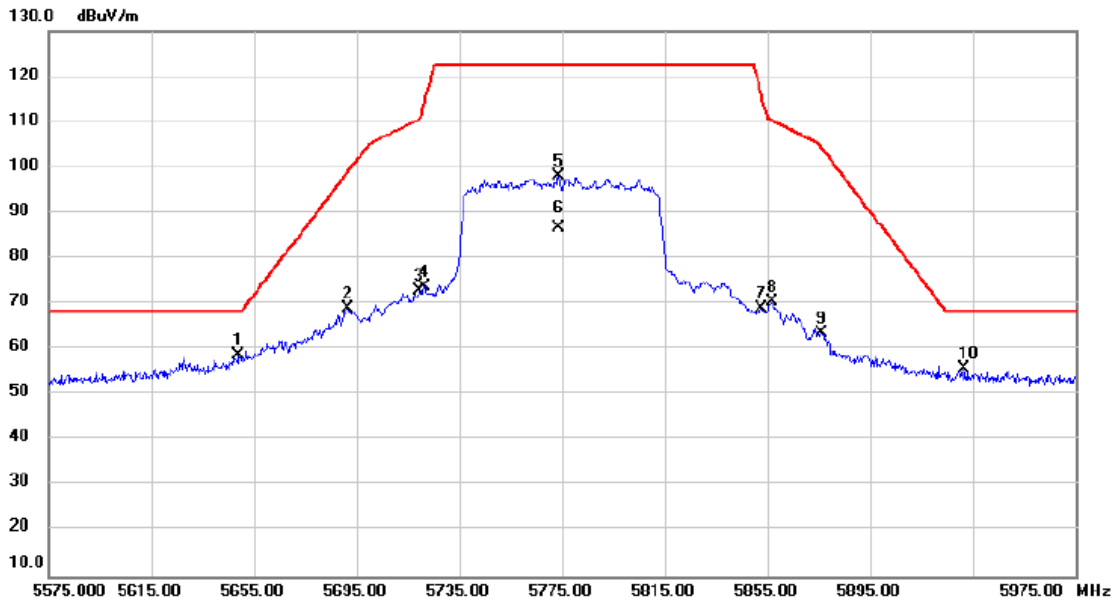


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1 *	5649.000	48.16	10.47	58.63	68.20	-9.57	peak			
2	5691.400	58.31	10.56	68.87	98.86	-29.99	peak			
3	5719.400	62.29	10.62	72.91	110.63	-37.72	peak			
4	5721.400	63.06	10.62	73.68	113.99	-40.31	peak			
5	5773.800	87.38	10.75	98.13	122.20	-24.07	peak			No Limit
6	5773.800	75.95	10.75	86.70	122.20	-35.50	AVG			No Limit
7	5852.600	58.02	10.91	68.93	116.27	-47.34	peak			
8	5856.600	59.41	10.92	70.33	110.35	-40.02	peak			
9	5875.800	52.64	10.97	63.61	104.61	-41.00	peak			
10	5931.400	44.54	11.09	55.63	68.20	-12.57	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/16
Test Frequency	5180 MHz	Polarization	Horizontal

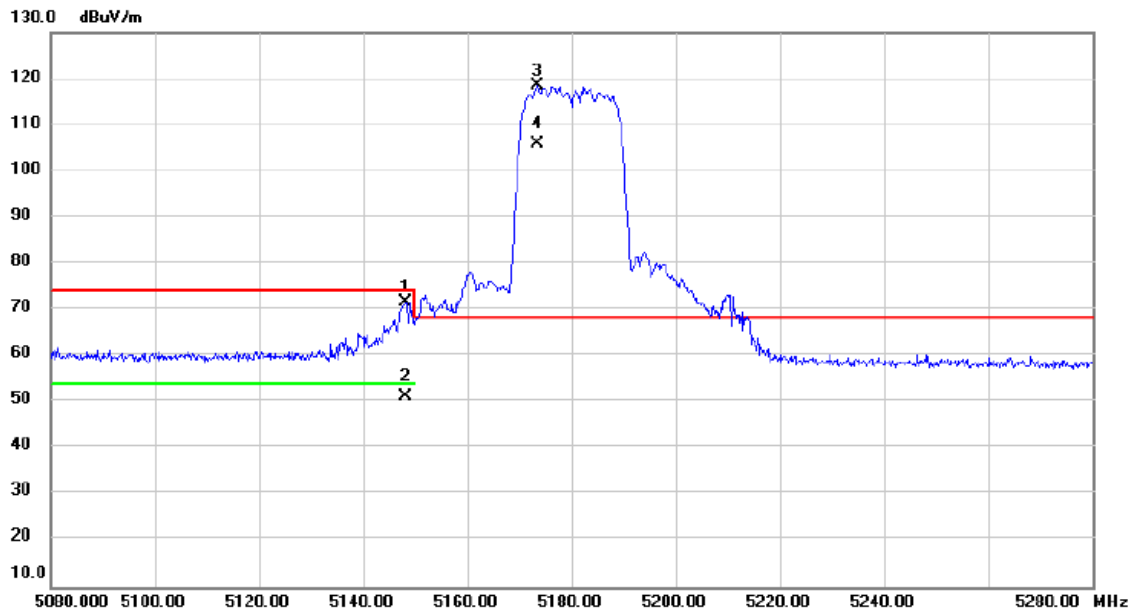


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		5148.200	61.74	9.95	71.69	74.00	-2.31	peak		
2		5148.200	41.24	9.95	51.19	54.00	-2.81	AVG		
3	*	5173.400	108.47	9.96	118.43	68.20	50.23	peak		No Limit
4	X	5173.400	95.76	9.96	105.72	68.20	37.52	AVG		No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5240 MHz	Polarization	Horizontal

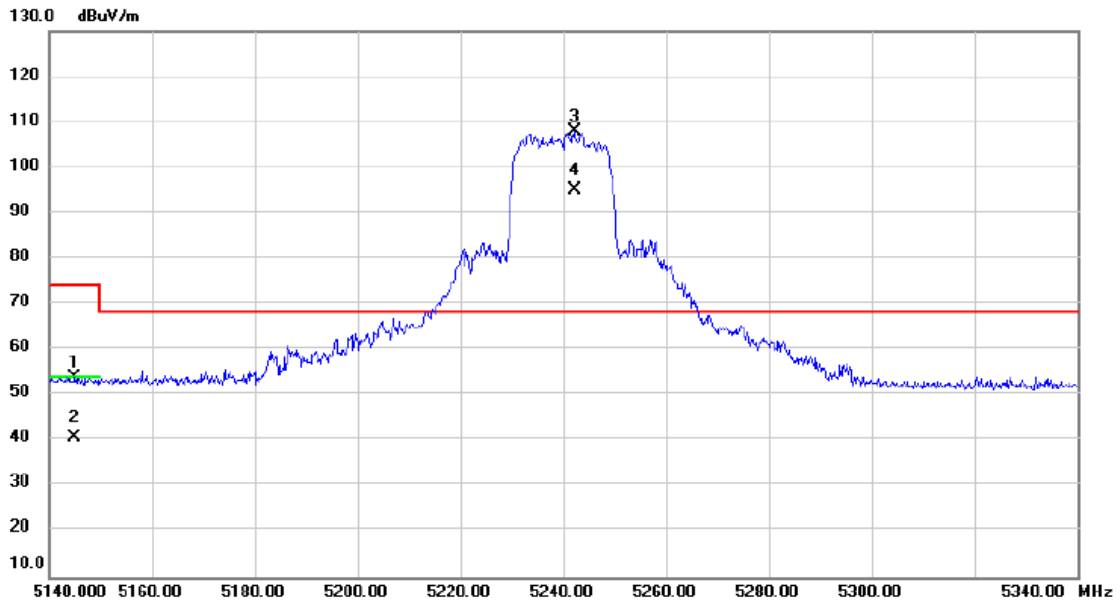


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB		cm	degree	
1		5145.000	43.97	9.95	53.92	74.00	-20.08	peak			
2		5145.000	30.65	9.95	40.60	54.00	-13.40	AVG			
3	*	5242.200	97.86	10.01	107.87	68.20	39.67	peak			No Limit
4	X	5242.200	85.15	10.01	95.16	68.20	26.96	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5260 MHz	Polarization	Horizontal

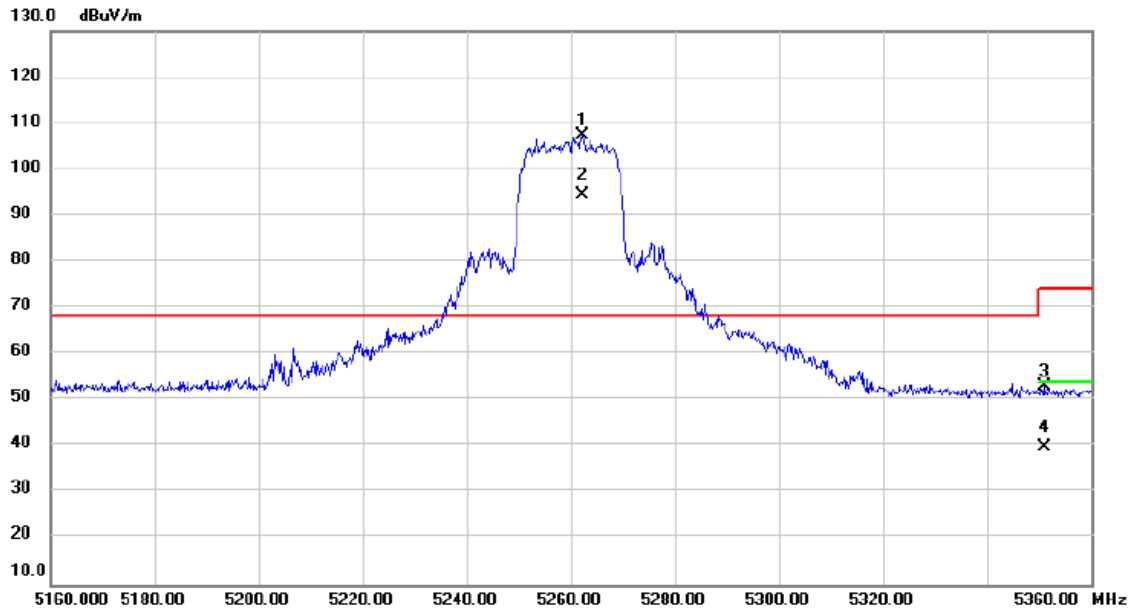


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	5262.200	97.25	10.01	107.26	68.20	39.06	peak		No Limit
2	X	5262.200	84.58	10.01	94.59	68.20	26.39	AVG		No Limit
3		5351.000	42.86	10.06	52.92	74.00	-21.08	peak		
4		5351.000	29.70	10.06	39.76	54.00	-14.24	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/16
Test Frequency	5320 MHz	Polarization	Horizontal

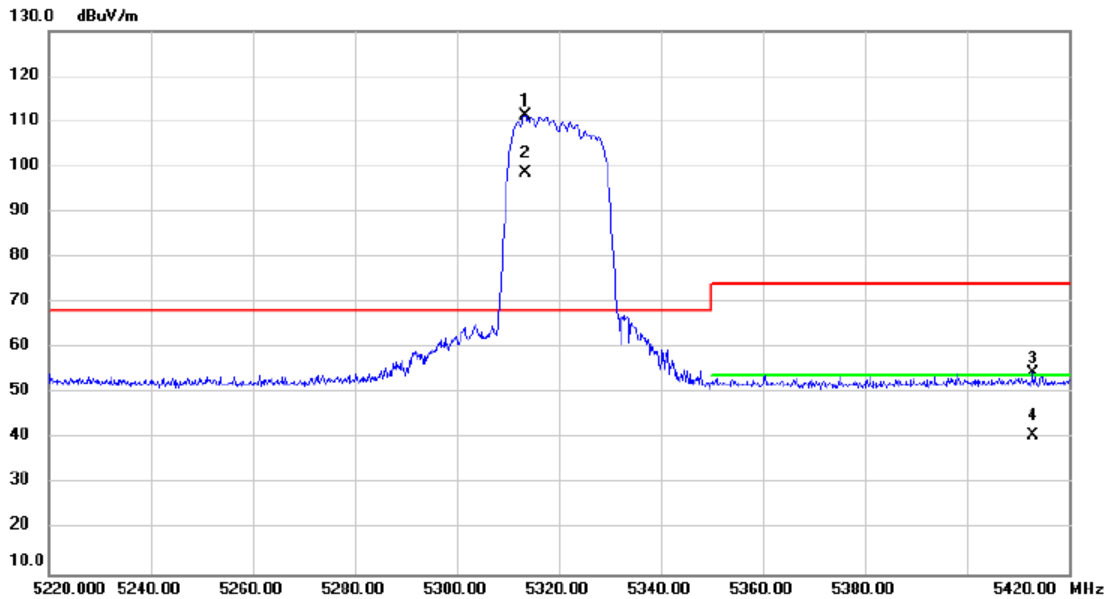


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5313.400	101.34	10.03	111.37	68.20	43.17	peak		No Limit
2	X	5313.400	88.55	10.03	98.58	68.20	30.38	AVG		No Limit
3		5413.000	44.33	10.09	54.42	74.00	-19.58	peak		
4		5413.000	30.51	10.09	40.60	54.00	-13.40	AVG		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5500 MHz	Polarization	Horizontal

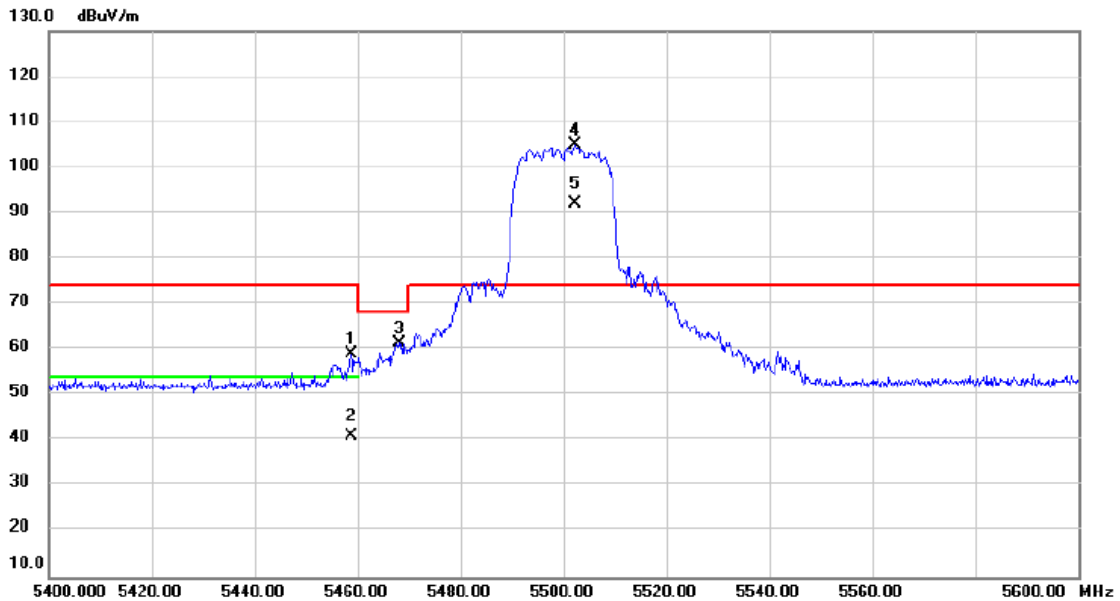


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5458.800	49.03	10.12	59.15	74.00	-14.85	peak			
2		5458.800	30.89	10.12	41.01	54.00	-12.99	AVG			
3		5468.000	51.35	10.12	61.47	68.20	-6.73	peak			
4	*	5502.400	94.83	10.14	104.97	74.00	30.97	peak			No Limit
5	X	5502.400	82.05	10.14	92.19	74.00	18.19	AVG			No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5700 MHz	Polarization	Horizontal

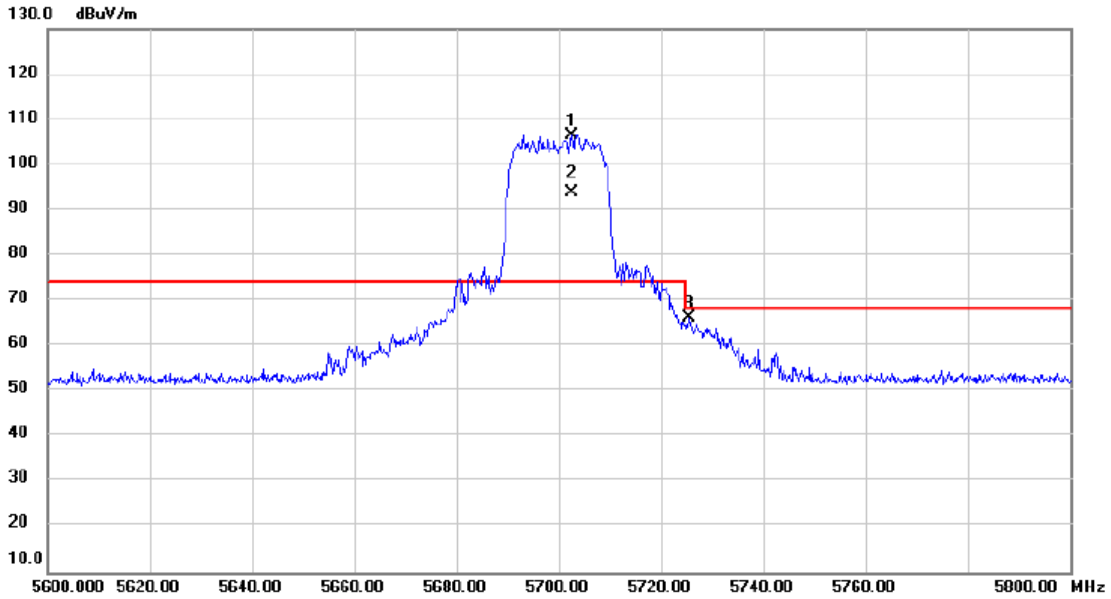


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	*	5702.600	96.00	10.58	106.58	74.00	32.58	peak			No Limit
2	X	5702.600	83.24	10.58	93.82	74.00	19.82	AVG			No Limit
3		5725.400	55.57	10.63	66.20	68.20	-2.00	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/16
Test Frequency	5745 MHz	Polarization	Horizontal

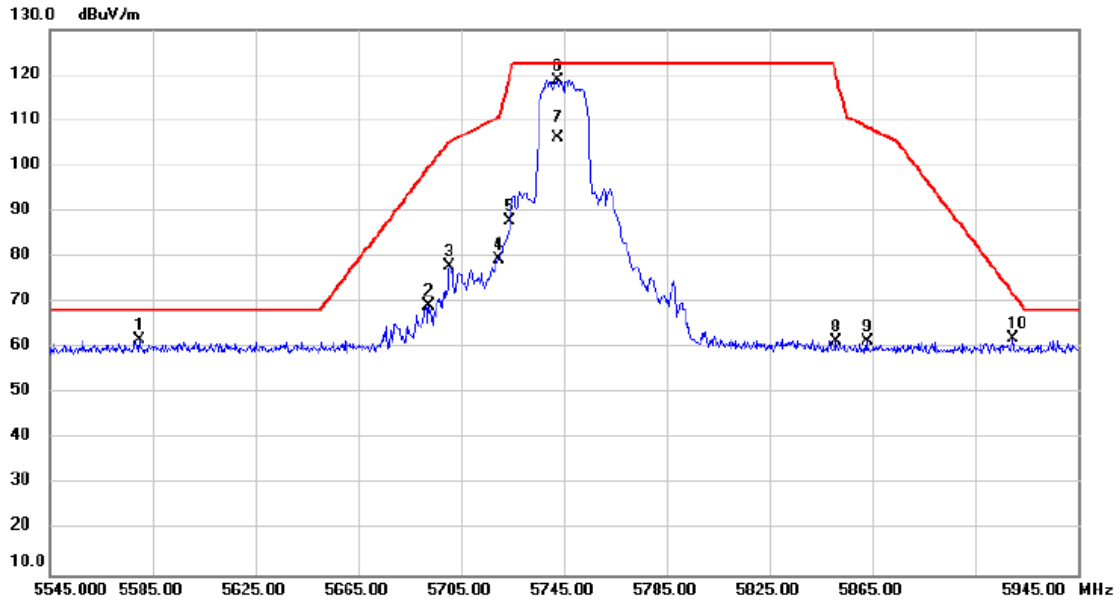


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5579.800	51.33	10.31	61.64	68.20	-6.56	peak			
2	5692.600	58.62	10.56	69.18	99.74	-30.56	peak			
3	5700.600	67.40	10.58	77.98	105.37	-27.39	peak			
4	5719.800	68.86	10.62	79.48	110.74	-31.26	peak			
5	5724.200	77.31	10.63	87.94	120.38	-32.44	peak			No Limit
6 *	5742.600	108.18	10.67	118.85	122.20	-3.35	peak			No Limit
7	5742.600	95.62	10.67	106.29	122.20	-15.91	AVG			
8	5850.600	50.63	10.91	61.54	120.83	-59.29	peak			
9	5863.000	50.39	10.94	61.33	108.56	-47.23	peak			
10	5919.800	50.92	11.07	61.99	72.03	-10.04	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/16
Test Frequency	5825 MHz	Polarization	Horizontal

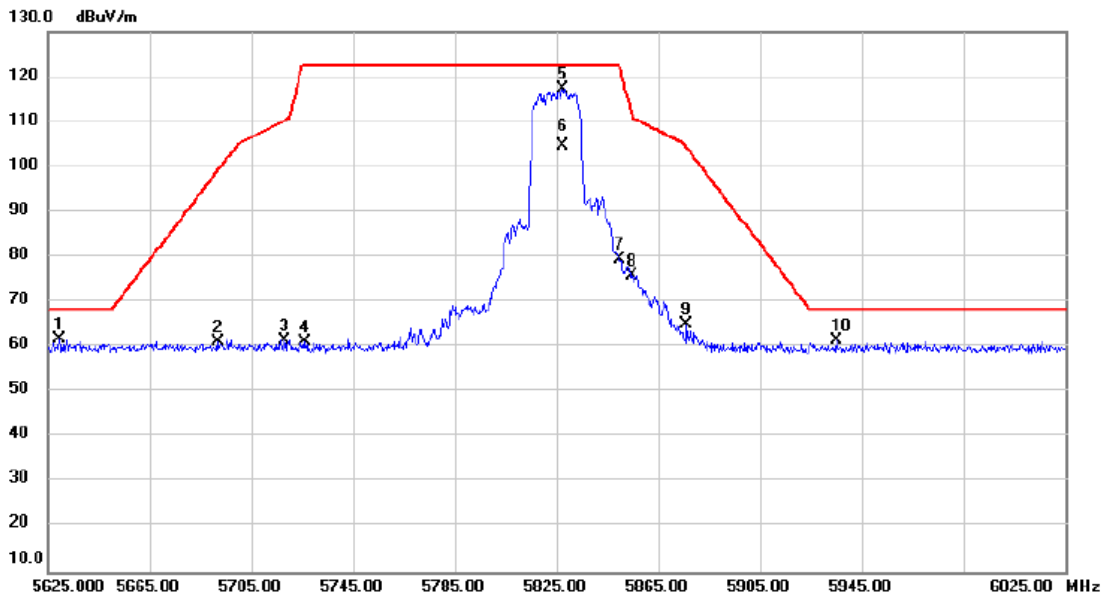


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	5629.400	51.23	10.43	61.66	68.20	-6.54	peak			
2	5691.800	50.64	10.56	61.20	99.15	-37.95	peak			
3	5718.200	50.97	10.62	61.59	110.30	-48.71	peak			
4	5725.800	50.38	10.63	61.01	122.20	-61.19	peak			
5 *	5827.400	106.40	10.85	117.25	122.20	-4.95	peak			No Limit
6	5827.400	93.75	10.85	104.60	122.20	-17.60	AVG			No Limit
7	5849.800	68.51	10.91	79.42	122.20	-42.78	peak			
8	5854.600	65.02	10.92	75.94	111.71	-35.77	peak			
9	5876.200	54.11	10.97	65.08	104.31	-39.23	peak			
10	5935.000	50.38	11.11	61.49	68.20	-6.71	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/16
Test Frequency	5190 MHz	Polarization	Horizontal

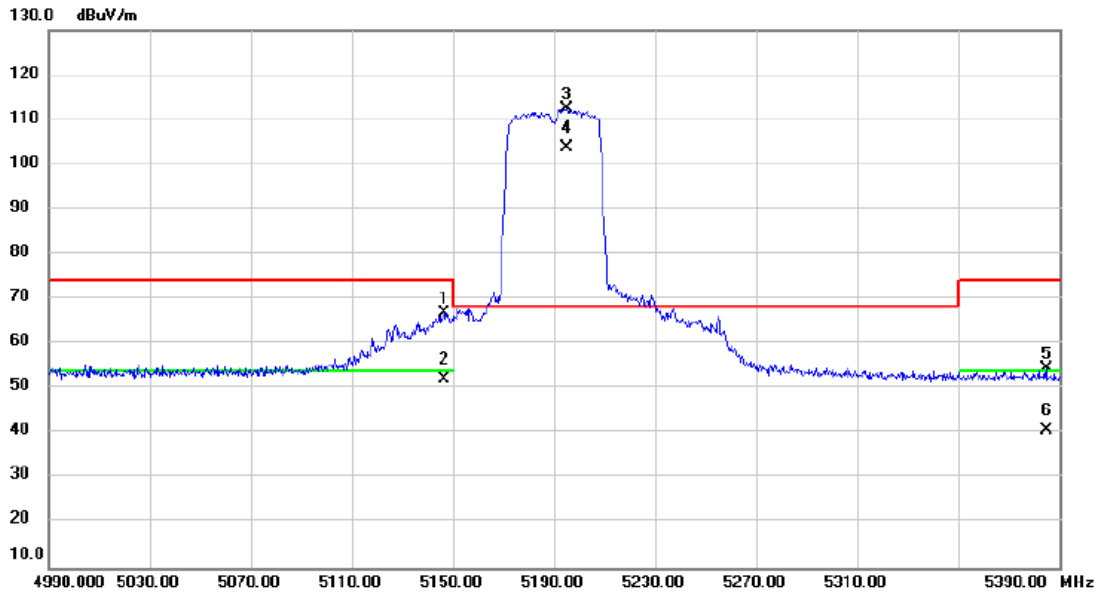


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1		5146.400	56.92	9.95	66.87	74.00	-7.13			peak	
2		5146.400	42.17	9.95	52.12	54.00	-1.88			AVG	
3	*	5194.800	102.44	9.97	112.41	68.20	44.21			peak	No Limit
4	X	5194.800	93.71	9.97	103.68	68.20	35.48			AVG	No Limit
5		5384.800	44.45	10.08	54.53	74.00	-19.47			peak	
6		5384.800	30.71	10.08	40.79	54.00	-13.21			AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/16
Test Frequency	5230 MHz	Polarization	Horizontal

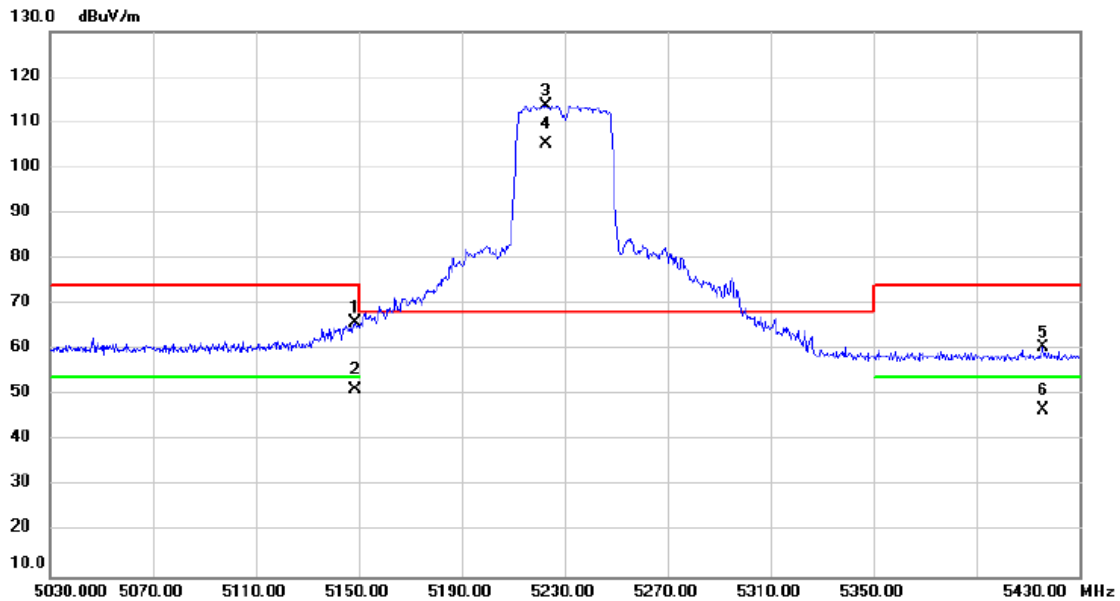


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1	5148.800	56.01	9.95	65.96	74.00	-8.04	peak			
2	5148.800	41.24	9.95	51.19	54.00	-2.81	AVG			
3 *	5222.800	103.80	9.99	113.79	68.20	45.59	peak			No Limit
4 X	5222.800	95.29	9.99	105.28	68.20	37.08	AVG			No Limit
5	5415.600	50.49	10.10	60.59	74.00	-13.41	peak			
6	5415.600	36.51	10.10	46.61	54.00	-7.39	AVG			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/16
Test Frequency	5270 MHz	Polarization	Horizontal

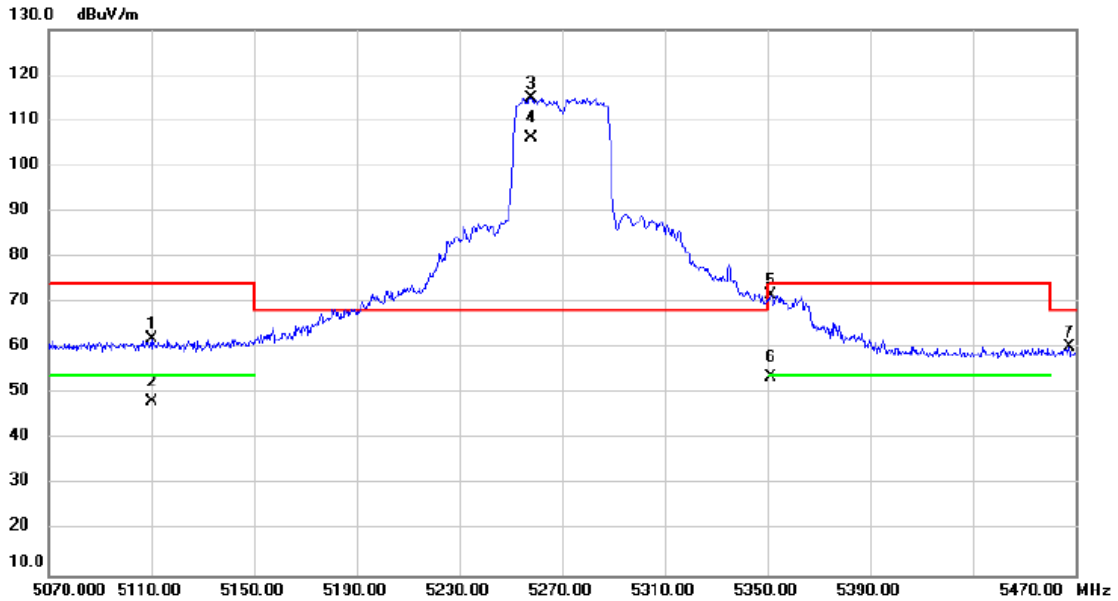


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5110.400	52.03	9.93	61.96	74.00	-12.04	peak			
2		5110.400	38.42	9.93	48.35	54.00	-5.65	AVG			
3	*	5258.000	104.88	10.00	114.88	68.20	46.68	peak			No Limit
4	X	5258.000	96.08	10.00	106.08	68.20	37.88	AVG			No Limit
5		5351.200	61.54	10.06	71.60	74.00	-2.40	peak			
6		5351.200	43.57	10.06	53.63	54.00	-0.37	AVG			
7		5467.600	50.05	10.12	60.17	68.20	-8.03	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/16
Test Frequency	5310 MHz	Polarization	Horizontal

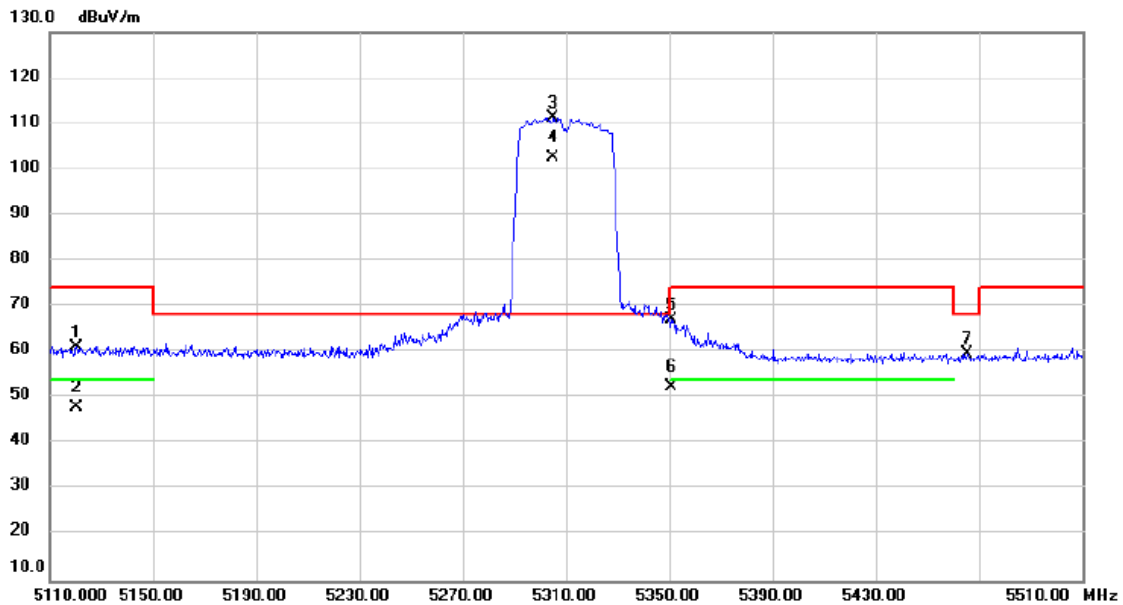


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		5120.400	51.33	9.93	61.26	74.00	-12.74	peak			
2		5120.400	37.93	9.93	47.86	54.00	-6.14	AVG			
3	*	5305.200	101.23	10.04	111.27	68.20	43.07	peak			No Limit
4	X	5305.200	92.57	10.04	102.61	68.20	34.41	AVG			No Limit
5		5350.800	57.23	10.06	67.29	74.00	-6.71	peak			
6		5350.800	42.43	10.06	52.49	54.00	-1.51	AVG			
7		5465.600	49.47	10.12	59.59	68.20	-8.61	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/16
Test Frequency	5510 MHz	Polarization	Horizontal

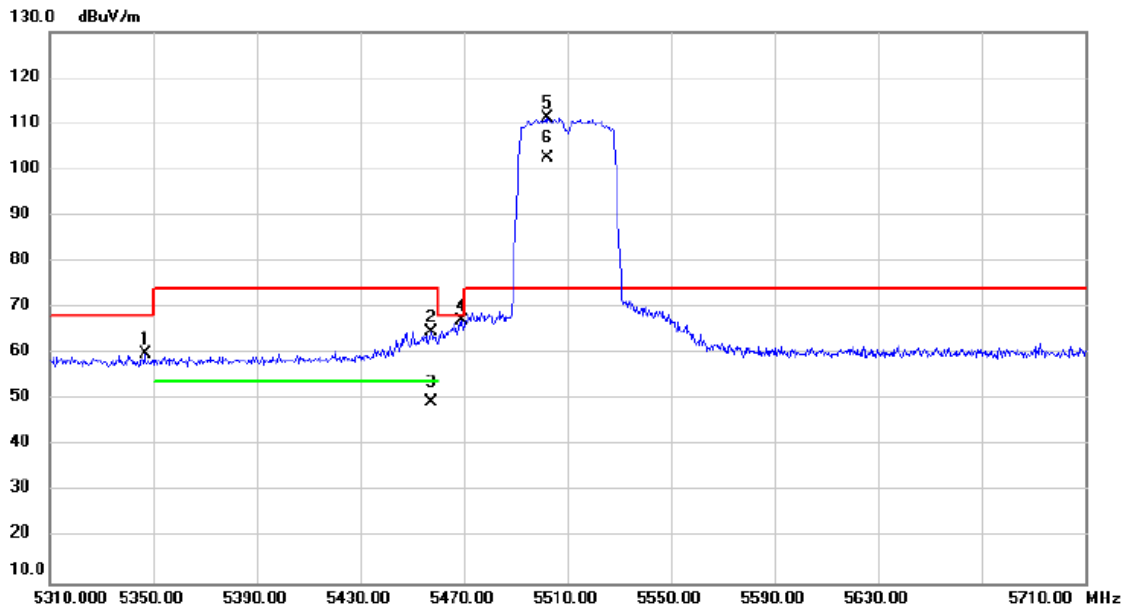


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5346.800	49.85	10.06	59.91	68.20	-8.29	peak			
2		5457.600	54.76	10.12	64.88	74.00	-9.12	peak			
3		5457.600	39.29	10.12	49.41	54.00	-4.59	AVG			
4		5469.200	57.00	10.12	67.12	68.20	-1.08	peak			
5	*	5502.400	101.04	10.14	111.18	74.00	37.18	peak			No Limit
6	X	5502.400	92.46	10.14	102.60	74.00	28.60	AVG			No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5670 MHz	Polarization	Horizontal

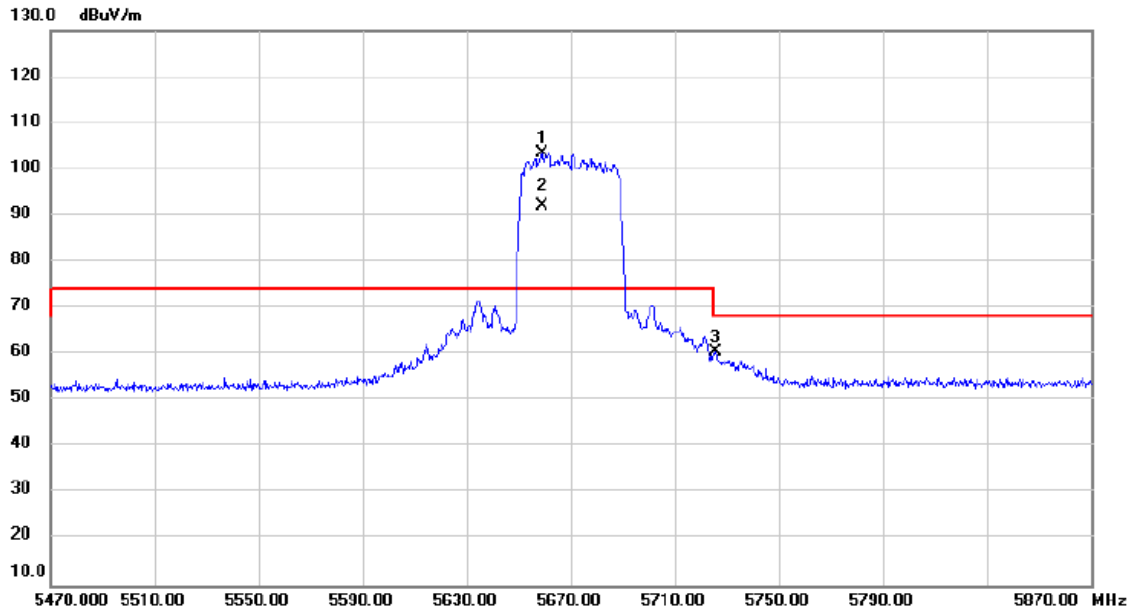


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	5658.800	92.86	10.49	103.35	74.00	29.35	peak			No Limit
2	X	5658.800	81.50	10.49	91.99	74.00	17.99	AVG			No Limit
3		5725.600	49.88	10.63	60.51	68.20	-7.69	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/16
Test Frequency	5755 MHz	Polarization	Horizontal

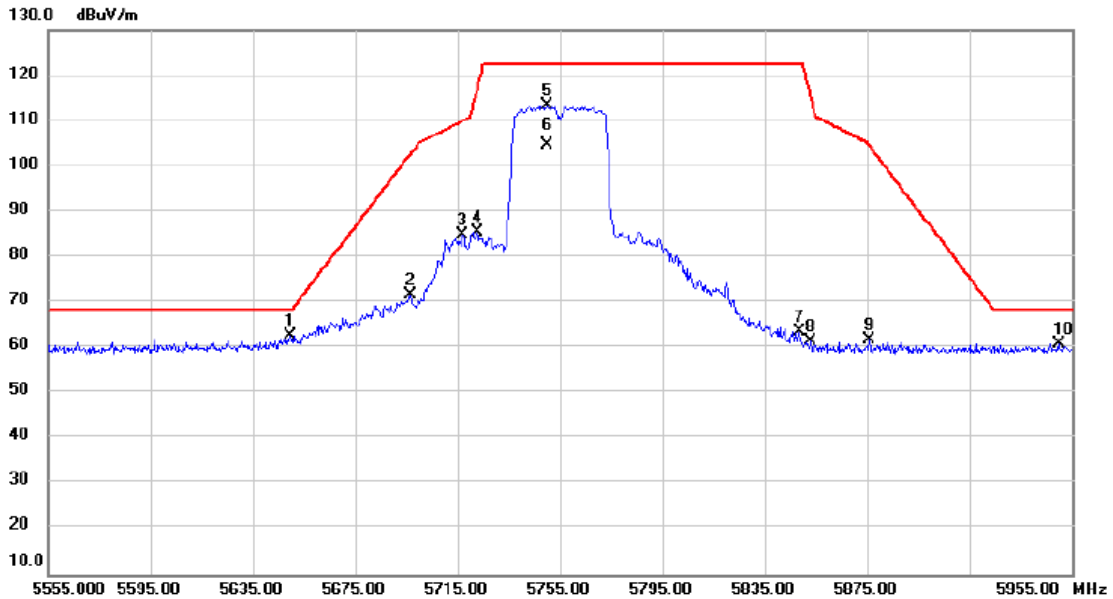


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	5649.800	52.19	10.47	62.66	68.20	-5.54			peak
2		5696.600	61.09	10.56	71.65	102.69	-31.04			peak
3		5717.000	74.36	10.62	84.98	109.96	-24.98			peak
4		5722.600	74.86	10.63	85.49	116.73	-31.24			peak
5		5750.200	102.67	10.69	113.36	122.20	-8.84			peak
6		5750.200	94.01	10.69	104.70	122.20	-17.50			AVG
7		5848.600	52.61	10.91	63.52	122.20	-58.68			peak
8		5853.000	50.51	10.91	61.42	115.36	-53.94			peak
9		5875.800	50.75	10.97	61.72	104.61	-42.89			peak
10		5949.800	49.83	11.13	60.96	68.20	-7.24			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/16
Test Frequency	5795 MHz	Polarization	Horizontal

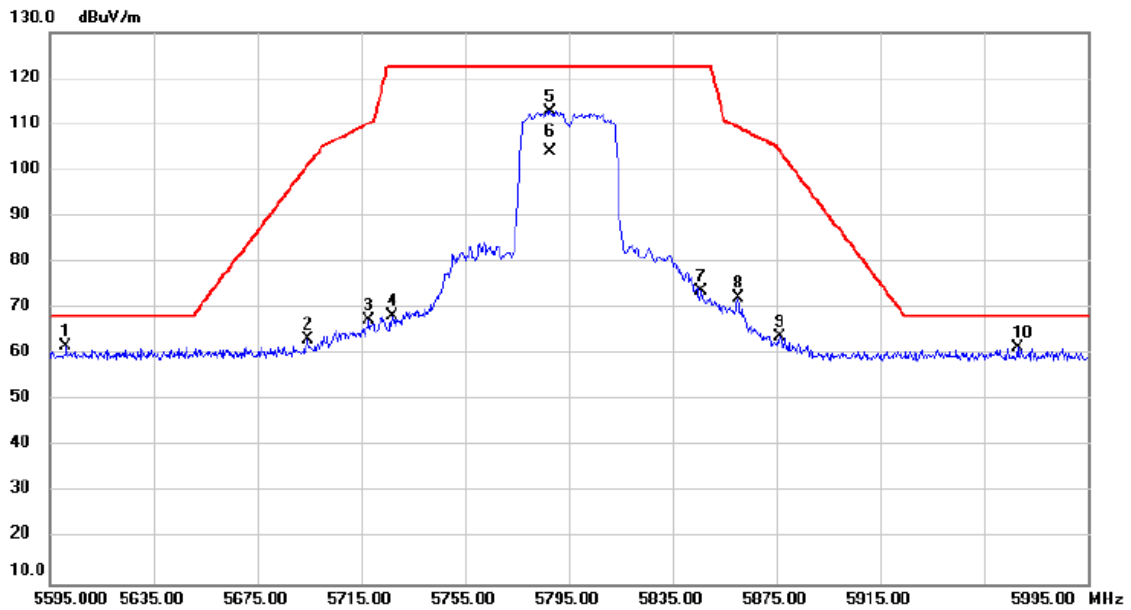


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1 *	5601.400	51.33	10.36	61.69	68.20	-6.51	peak			
2	5694.600	52.69	10.56	63.25	101.22	-37.97	peak			
3	5718.200	56.72	10.62	67.34	110.30	-42.96	peak			
4	5727.000	57.75	10.63	68.38	122.20	-53.82	peak			
5	5787.800	102.07	10.78	112.85	122.20	-9.35	peak			No Limit
6	5787.800	93.31	10.78	104.09	122.20	-18.11	AVG			No Limit
7	5846.200	62.82	10.90	73.72	122.20	-48.48	peak			
8	5860.200	61.27	10.93	72.20	109.34	-37.14	peak			
9	5876.200	52.83	10.97	63.80	104.31	-40.51	peak			
10	5967.800	50.41	11.17	61.58	68.20	-6.62	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/3/16
Test Frequency	5210 MHz	Polarization	Horizontal

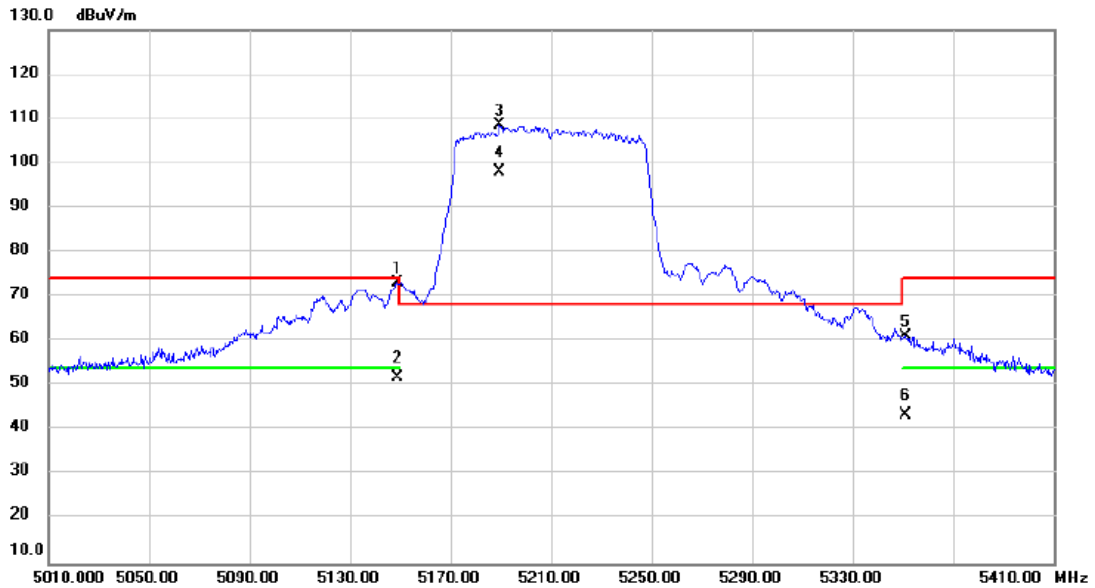


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree degree	Detector	Comment
1		5148.800	63.30	9.95	73.25	74.00	-0.75			peak	
2		5148.800	41.76	9.95	51.71	54.00	-2.29			AVG	
3	*	5189.600	98.54	9.98	108.52	68.20	40.32			peak	No Limit
4	X	5189.600	88.08	9.98	98.06	68.20	29.86			AVG	No Limit
5		5350.800	51.04	10.06	61.10	74.00	-12.90			peak	
6		5350.800	33.35	10.06	43.41	54.00	-10.59			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/3/16
Test Frequency	5290 MHz	Polarization	Horizontal

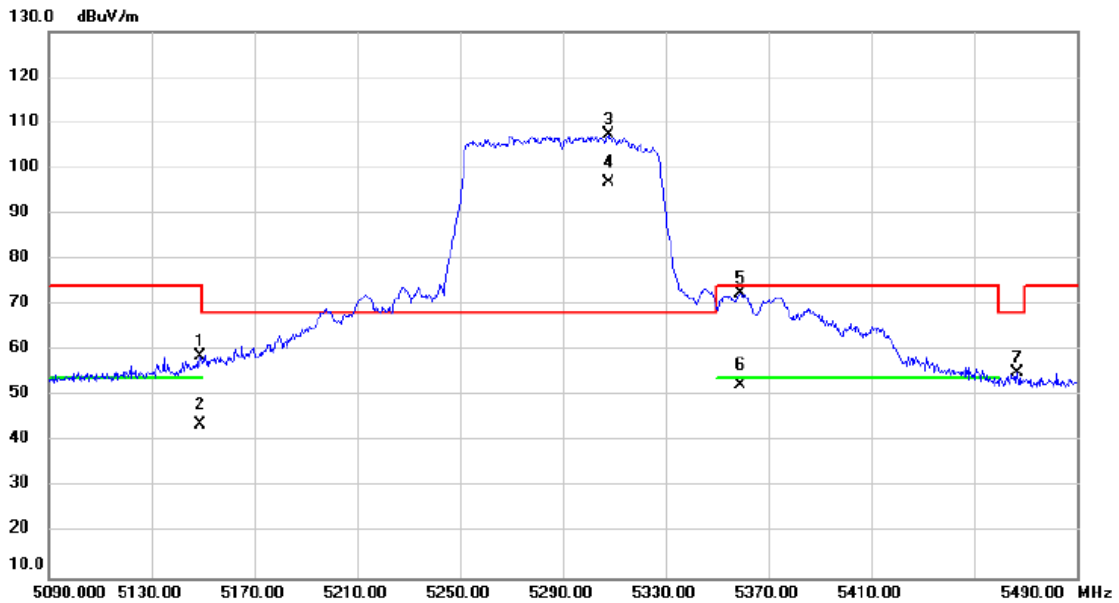


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5148.800	48.68	9.95	58.63	74.00	-15.37	peak			
2		5148.800	33.65	9.95	43.60	54.00	-10.40	AVG			
3	*	5307.600	97.19	10.03	107.22	68.20	39.02	peak			No Limit
4	X	5307.600	86.90	10.03	96.93	68.20	28.73	AVG			No Limit
5		5359.200	62.53	10.07	72.60	74.00	-1.40	peak			
6		5359.200	42.53	10.07	52.60	54.00	-1.40	AVG			
7		5466.800	44.99	10.12	55.11	68.20	-13.09	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/3/17
Test Frequency	5530 MHz	Polarization	Horizontal

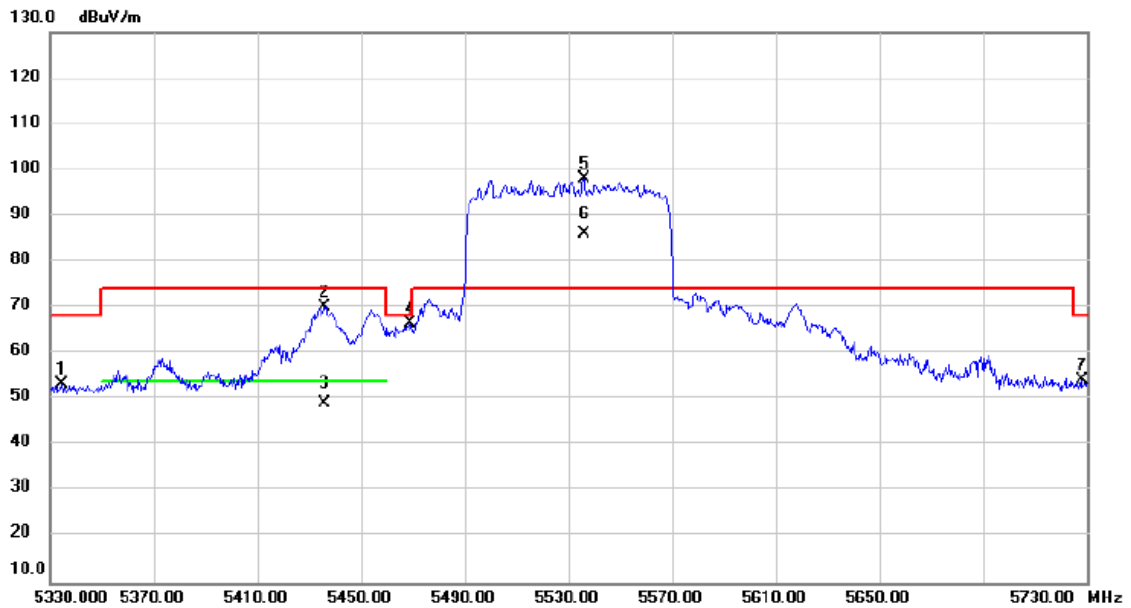


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5334.400	43.24	10.05	53.29	68.20	-14.91	peak			
2		5436.000	59.99	10.11	70.10	74.00	-3.90	peak			
3		5436.000	39.14	10.11	49.25	54.00	-4.75	AVG			
4		5468.800	56.46	10.12	66.58	68.20	-1.62	peak			
5	*	5536.000	87.87	10.22	98.09	74.00	24.09	peak			No Limit
6	X	5536.000	75.77	10.22	85.99	74.00	11.99	AVG			No Limit
7		5728.000	43.47	10.64	54.11	68.20	-14.09	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/3/17
Test Frequency	5610 MHz	Polarization	Horizontal

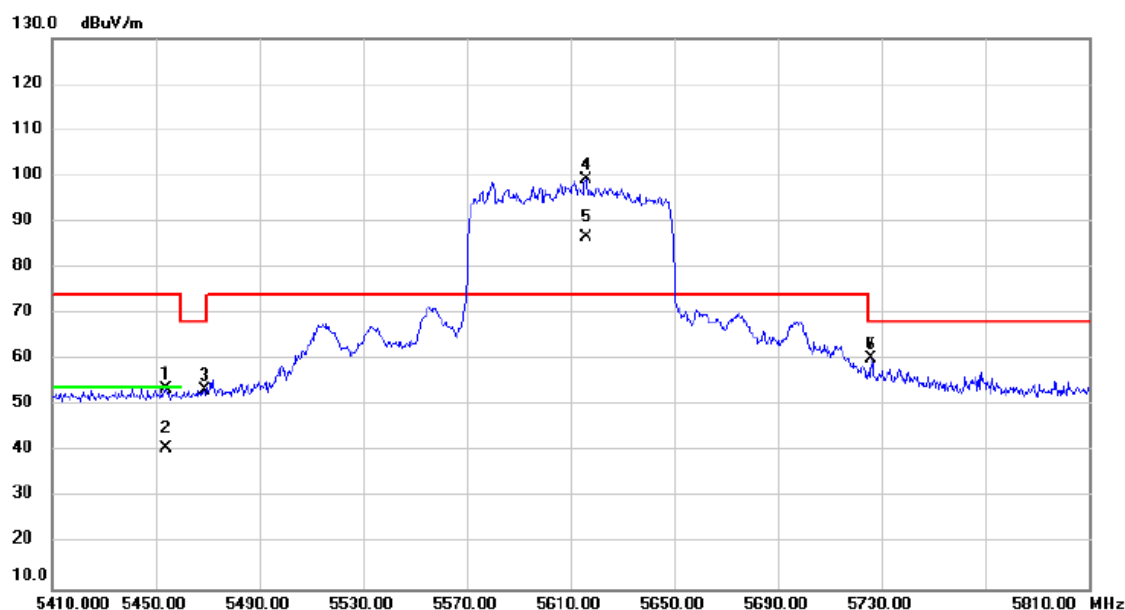


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		5454.000	43.66	10.12	53.78	74.00	-20.22	peak			
2		5454.000	30.63	10.12	40.75	54.00	-13.25	AVG			
3		5469.200	43.30	10.12	53.42	68.20	-14.78	peak			
4	*	5616.000	88.85	10.40	99.25	74.00	25.25	peak			No Limit
5	X	5616.000	76.15	10.40	86.55	74.00	12.55	AVG			No Limit
6		5726.000	49.55	10.63	60.18	68.20	-8.02	peak			
7		5726.000	49.55	10.63	60.18	68.20	-8.02	peak			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/3/17
Test Frequency	5775 MHz	Polarization	Horizontal

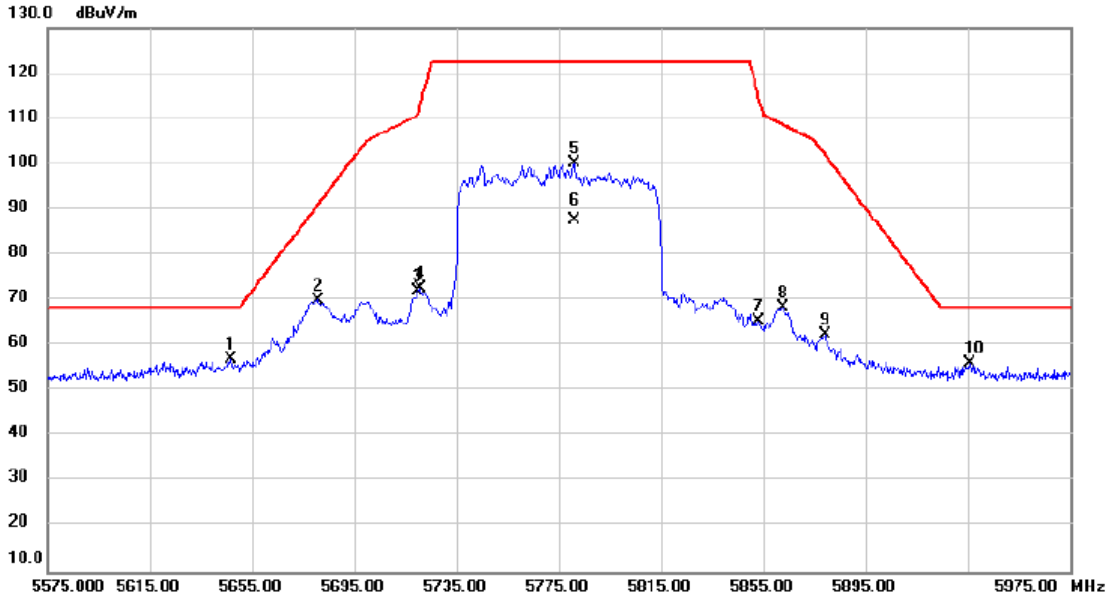


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	*	5646.600	46.41	10.46	56.87	68.20	-11.33	peak			
2		5680.600	59.46	10.54	70.00	90.88	-20.88	peak			
3		5719.800	61.35	10.62	71.97	110.74	-38.77	peak			
4		5721.000	61.78	10.62	72.40	113.08	-40.68	peak			
5		5781.000	89.31	10.76	100.07	122.20	-22.13	peak			No Limit
6		5781.000	76.73	10.76	87.49	122.20	-34.71	AVG			No Limit
7		5853.400	54.30	10.92	65.22	114.45	-49.23	peak			
8		5862.600	57.51	10.94	68.45	108.67	-40.22	peak			
9		5879.000	51.27	10.98	62.25	102.23	-39.98	peak			
10		5935.800	45.06	11.11	56.17	68.20	-12.03	peak			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5180 MHz	Polarization	Vertical

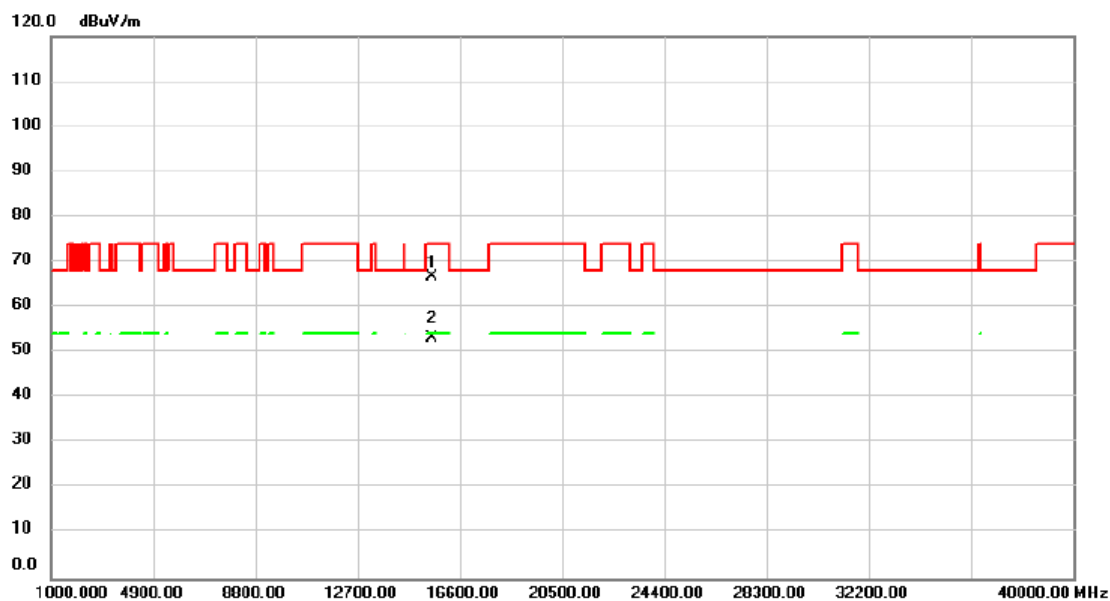


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15547.00	59.86	6.87	66.73	74.00	-7.27			peak
2	*	15547.00	46.48	6.87	53.35	54.00	-0.65			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5180 MHz	Polarization	Horizontal

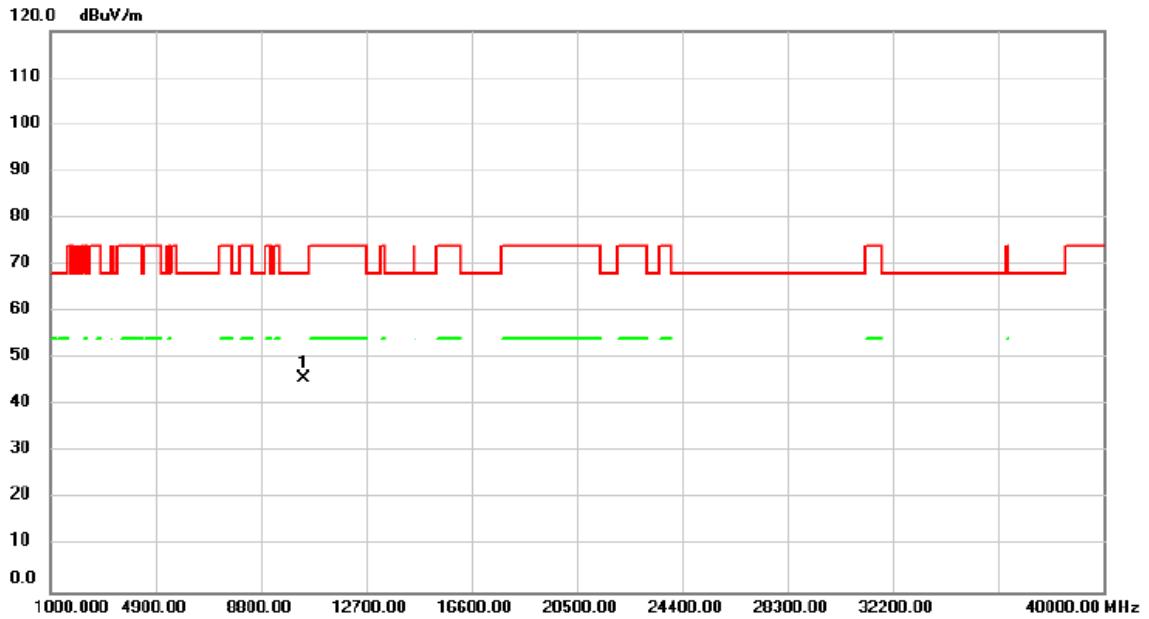


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.00	41.37	4.41	45.78	68.20	-22.42	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5200 MHz	Polarization	Vertical

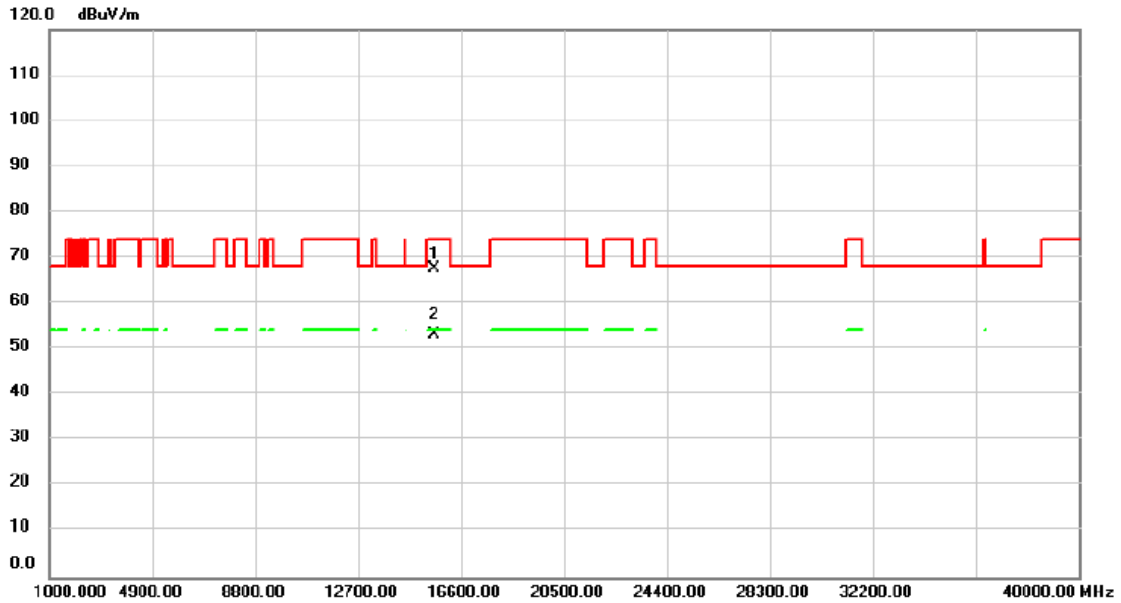


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15586.00	60.76	6.91	67.67	74.00	-6.33			peak
2	*	15586.00	46.23	6.91	53.14	54.00	-0.86			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5200 MHz	Polarization	Horizontal

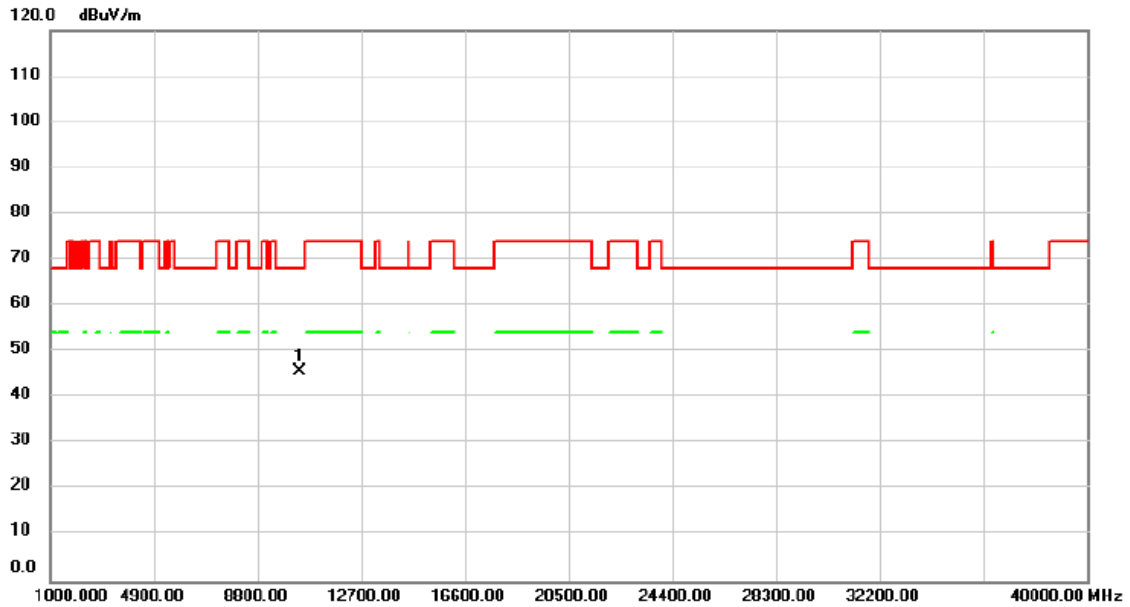


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10400.00	41.36	4.42	45.78	68.20	-22.42			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5240 MHz	Polarization	Vertical

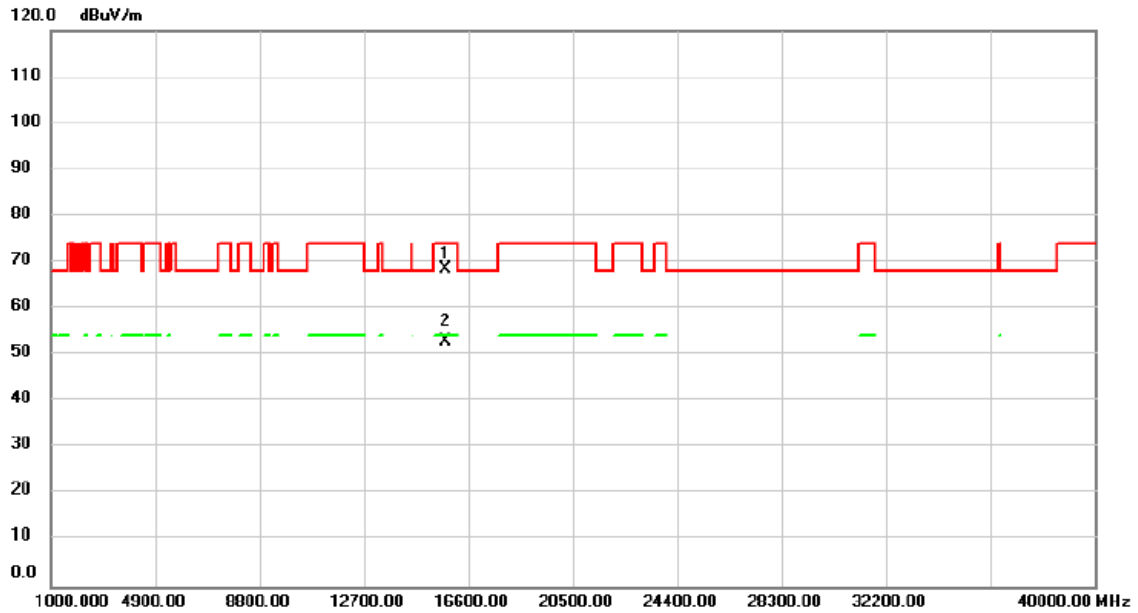


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15742.00	61.61	7.08	68.69	74.00	-5.31			peak
2	*	15742.00	45.75	7.08	52.83	54.00	-1.17			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5240 MHz	Polarization	Horizontal

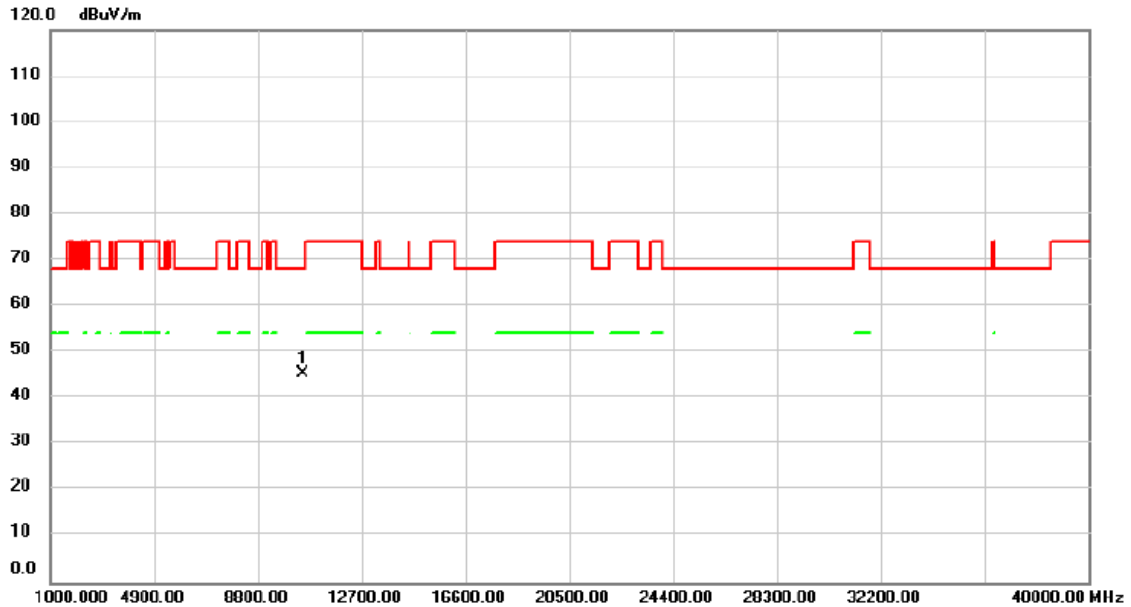


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10480.00	41.10	4.42	45.52	68.20	-22.68			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5260 MHz	Polarization	Vertical

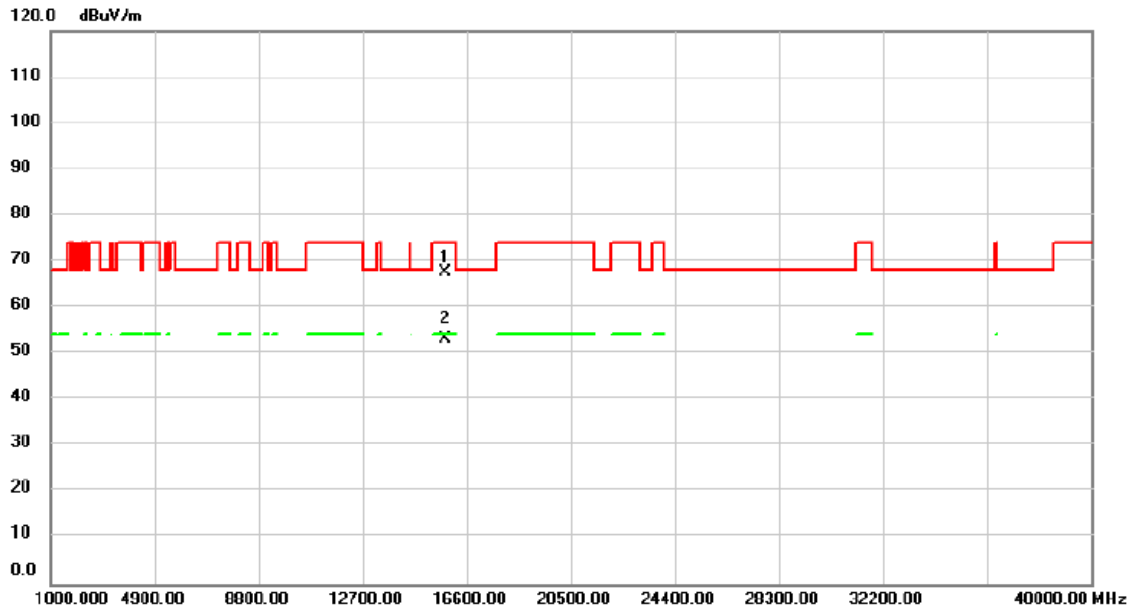


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15781.00	60.62	7.12	67.74	74.00	-6.26			peak
2	*	15781.00	46.05	7.12	53.17	54.00	-0.83			AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5260 MHz	Polarization	Horizontal

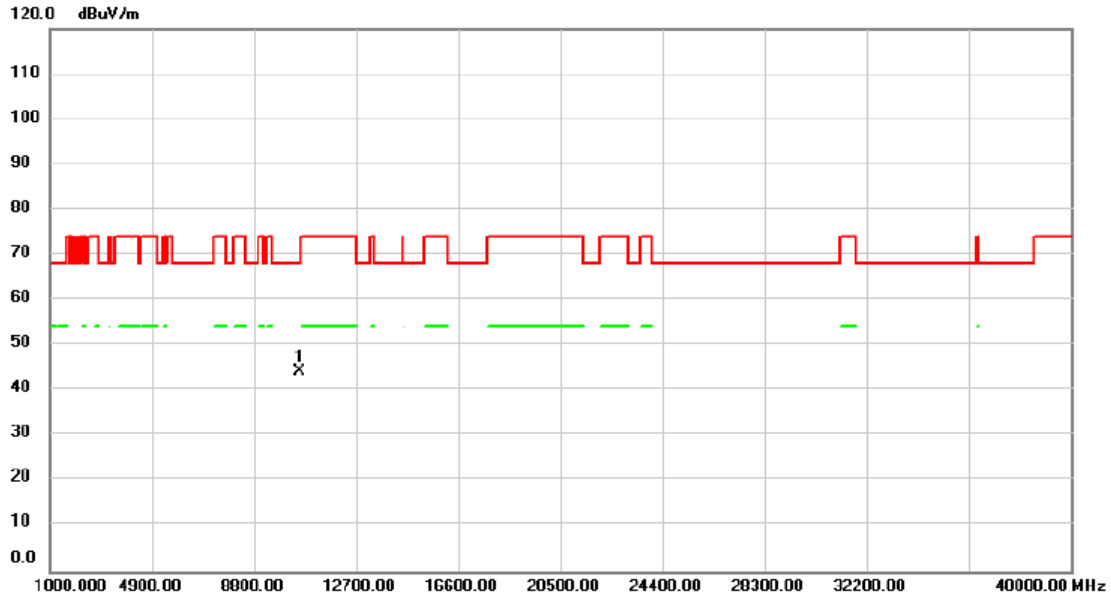


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10520.00	39.97	4.43	44.40	68.20	-23.80			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5300 MHz	Polarization	Vertical

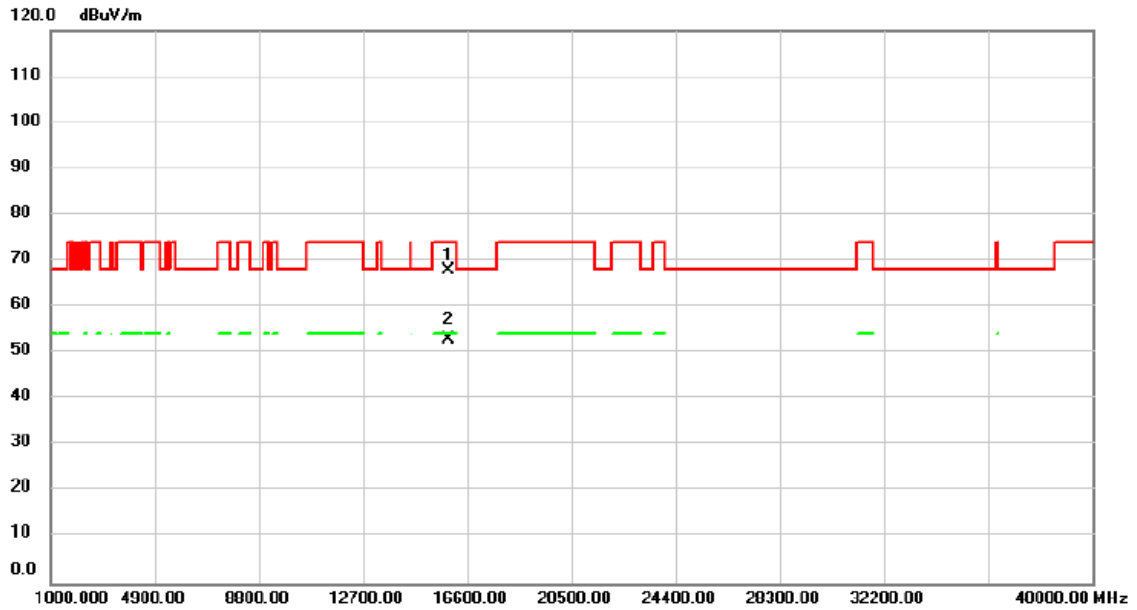


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15898.00	60.80	7.24	68.04	74.00	-5.96			peak
2	*	15898.00	45.71	7.24	52.95	54.00	-1.05			AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5300 MHz	Polarization	Horizontal

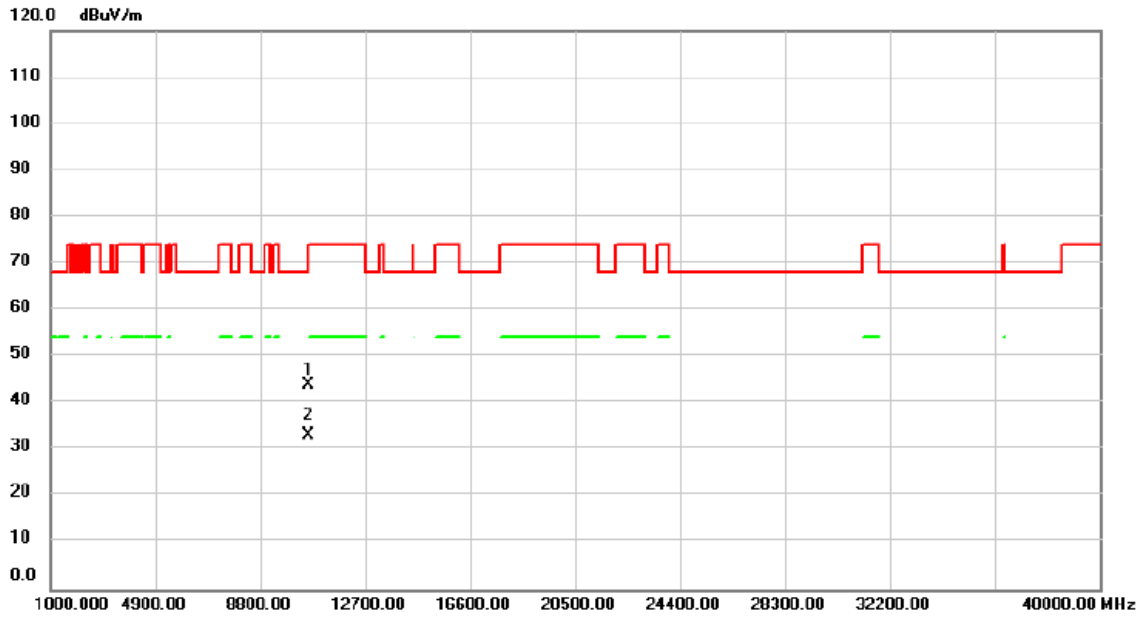


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		10600.00	39.41	4.46	43.87	68.20	-24.33	peak		
2	*	10600.00	28.69	4.46	33.15	54.00	-20.85	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5320 MHz	Polarization	Vertical

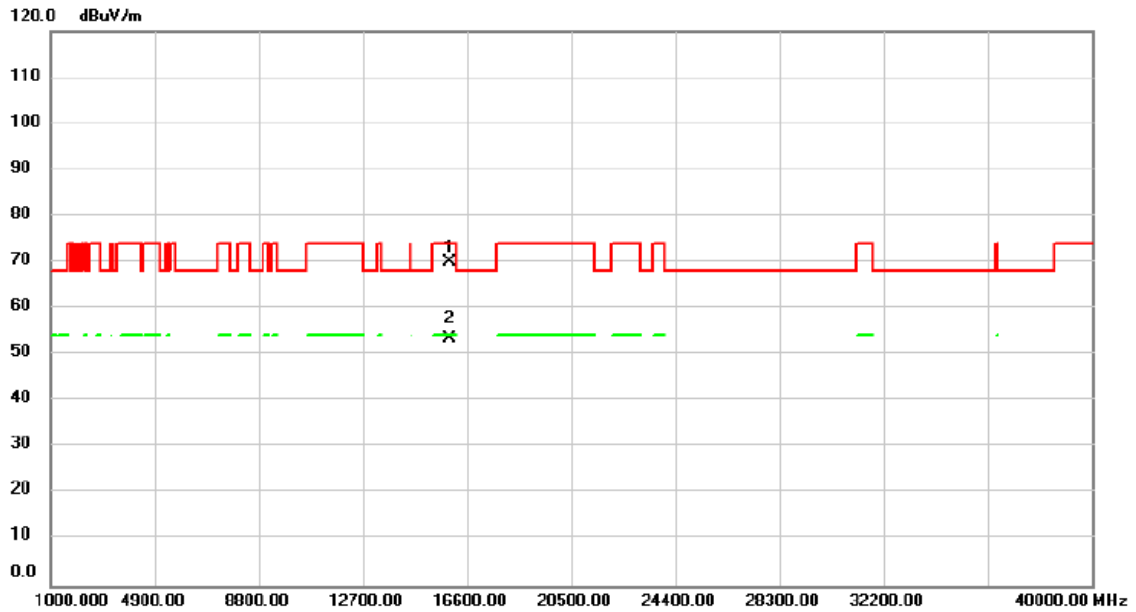


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15937.00	62.64	7.28	69.92	74.00	-4.08	peak		
2	*	15937.00	46.29	7.28	53.57	54.00	-0.43	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5320 MHz	Polarization	Horizontal

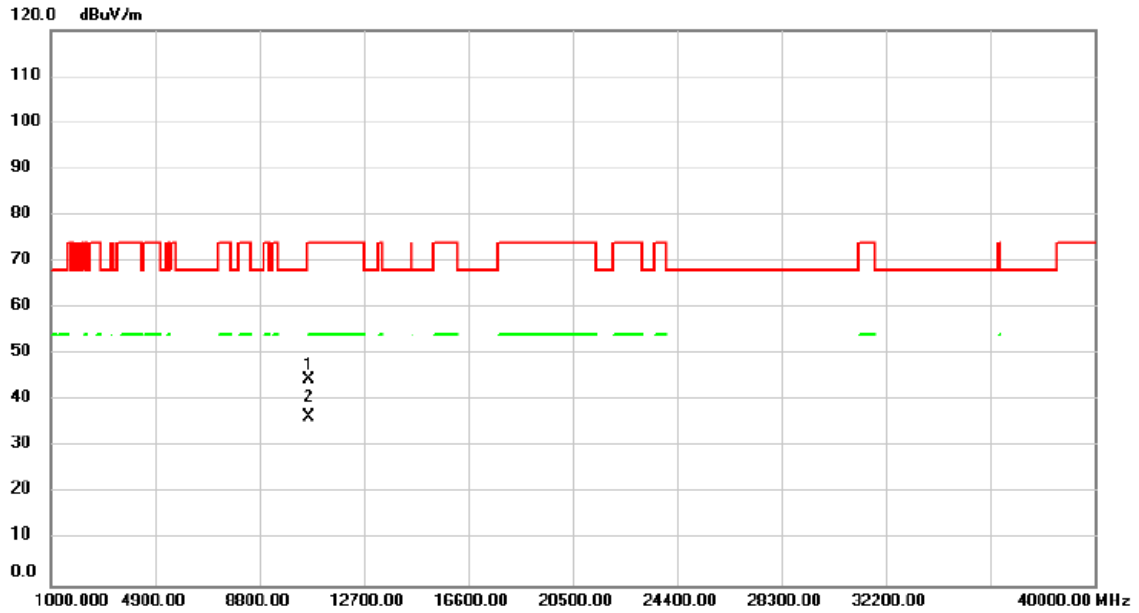


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10640.00	40.03	4.46	44.49	74.00	-29.51			peak
2	*	10640.00	31.95	4.46	36.41	54.00	-17.59			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5500 MHz	Polarization	Vertical

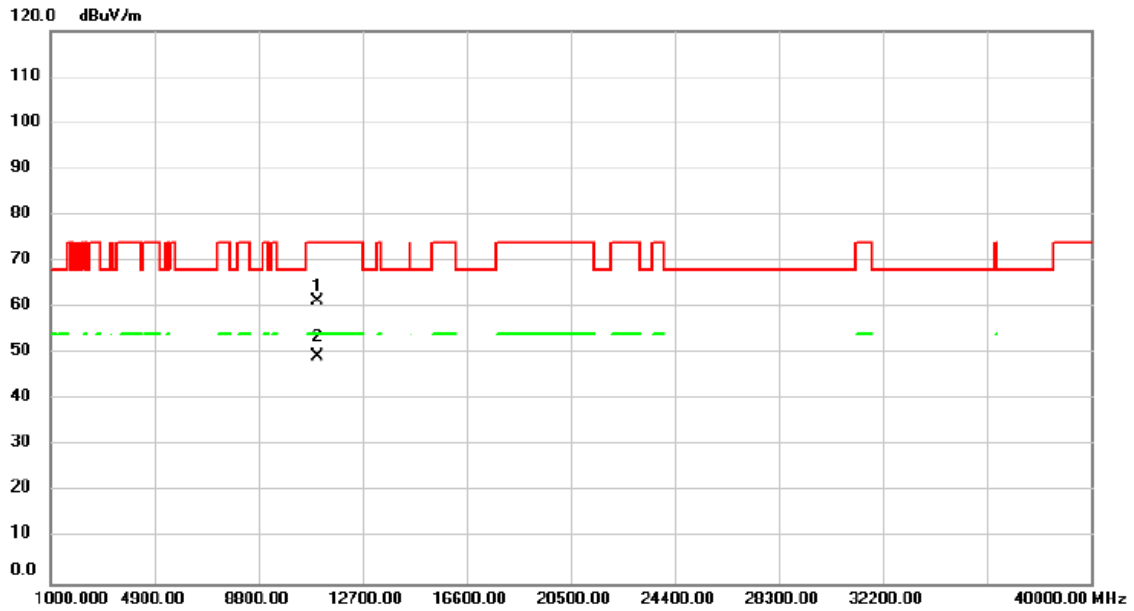


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10984.00	56.90	4.57	61.47	74.00	-12.53			peak
2	*	10984.00	44.85	4.57	49.42	54.00	-4.58			AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5500 MHz	Polarization	Horizontal

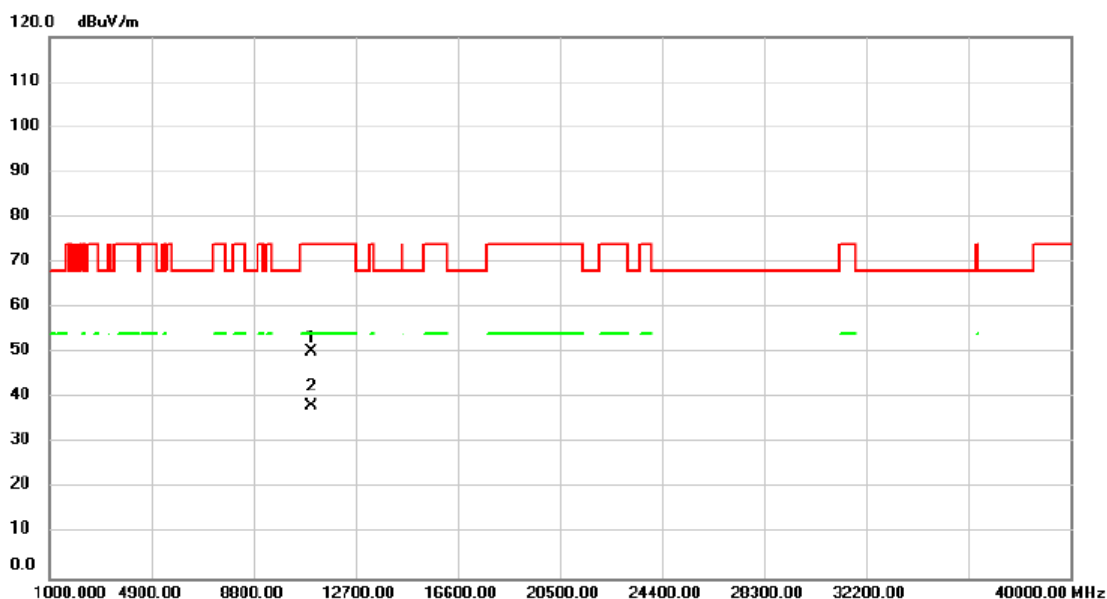


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11023.00	45.57	4.60	50.17	74.00	-23.83	peak		
2	*	11023.00	33.70	4.60	38.30	54.00	-15.70	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5580 MHz	Polarization	Vertical

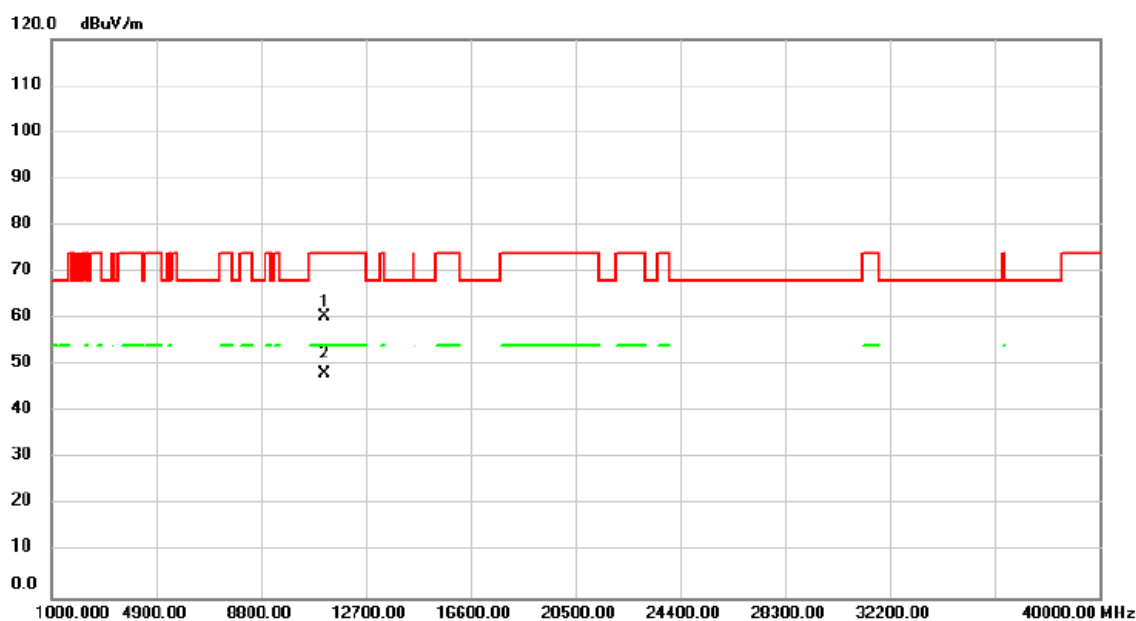


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11179.00	55.79	4.77	60.56	74.00	-13.44	peak		
2	*	11179.00	43.26	4.77	48.03	54.00	-5.97	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5580 MHz	Polarization	Horizontal

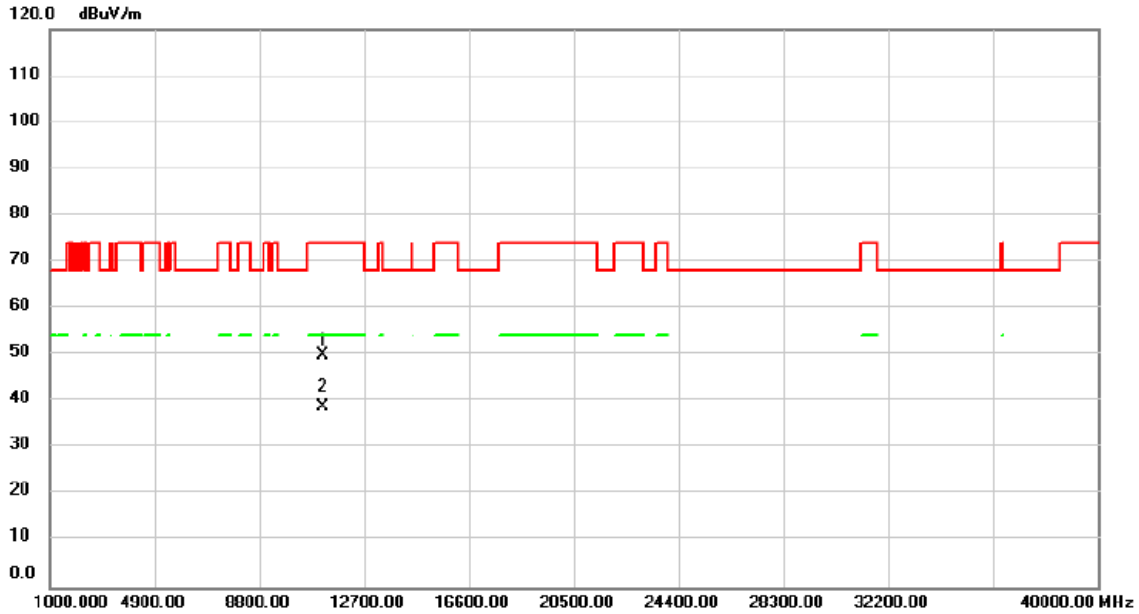


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11140.00	45.08	4.73	49.81	74.00	-24.19			peak
2	*	11140.00	34.17	4.73	38.90	54.00	-15.10			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5700 MHz	Polarization	Vertical

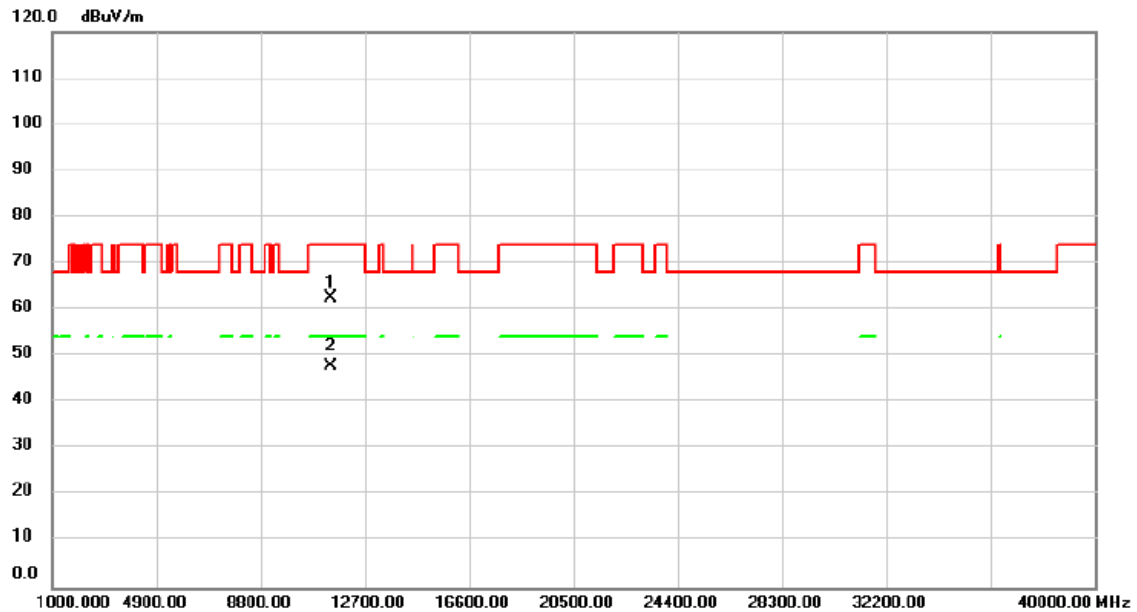


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11413.00	57.55	5.03	62.58	74.00	-11.42			peak
2	*	11413.00	42.90	5.03	47.93	54.00	-6.07			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5700 MHz	Polarization	Horizontal

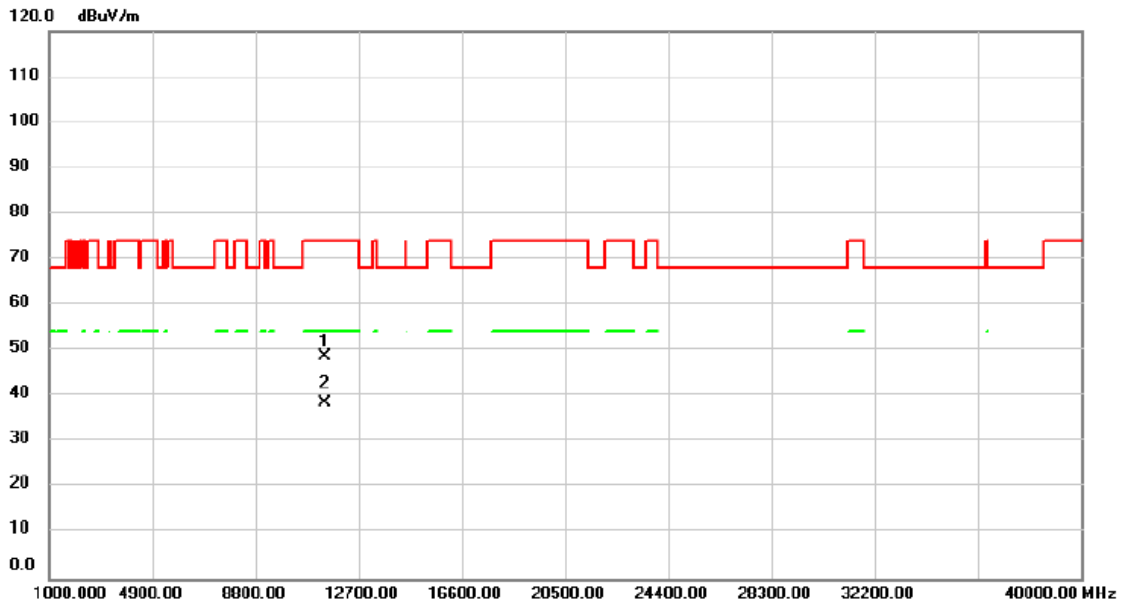


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11413.00	43.73	5.03	48.76	74.00	-25.24			peak
2	*	11413.00	33.64	5.03	38.67	54.00	-15.33			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5745 MHz	Polarization	Vertical

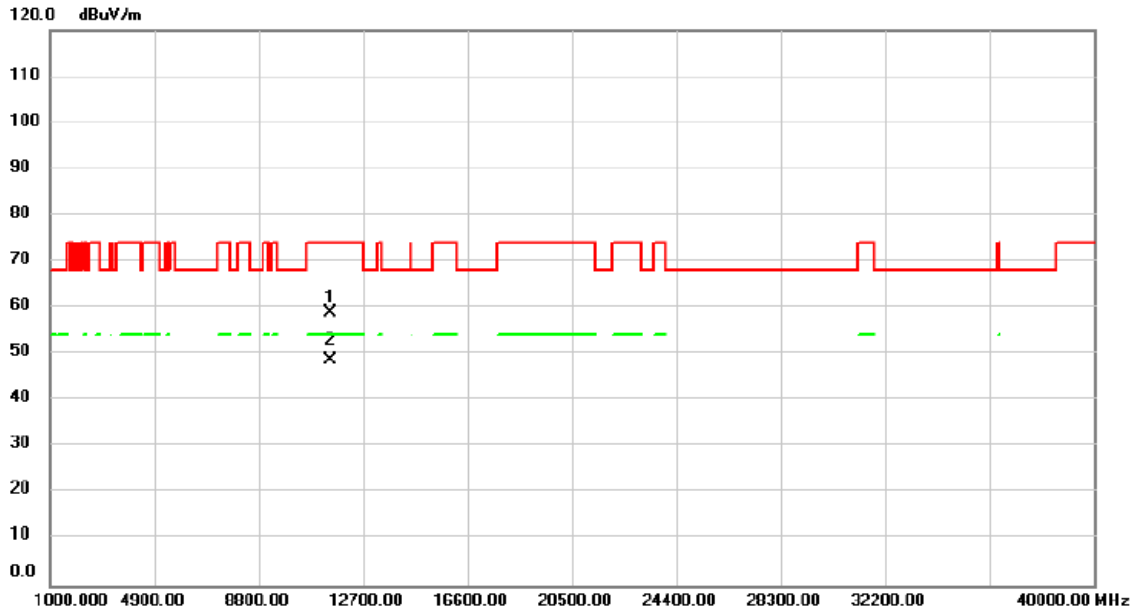


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11491.00	53.82	5.12	58.94	74.00	-15.06			peak
2	*	11491.00	43.67	5.12	48.79	54.00	-5.21			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5745 MHz	Polarization	Horizontal

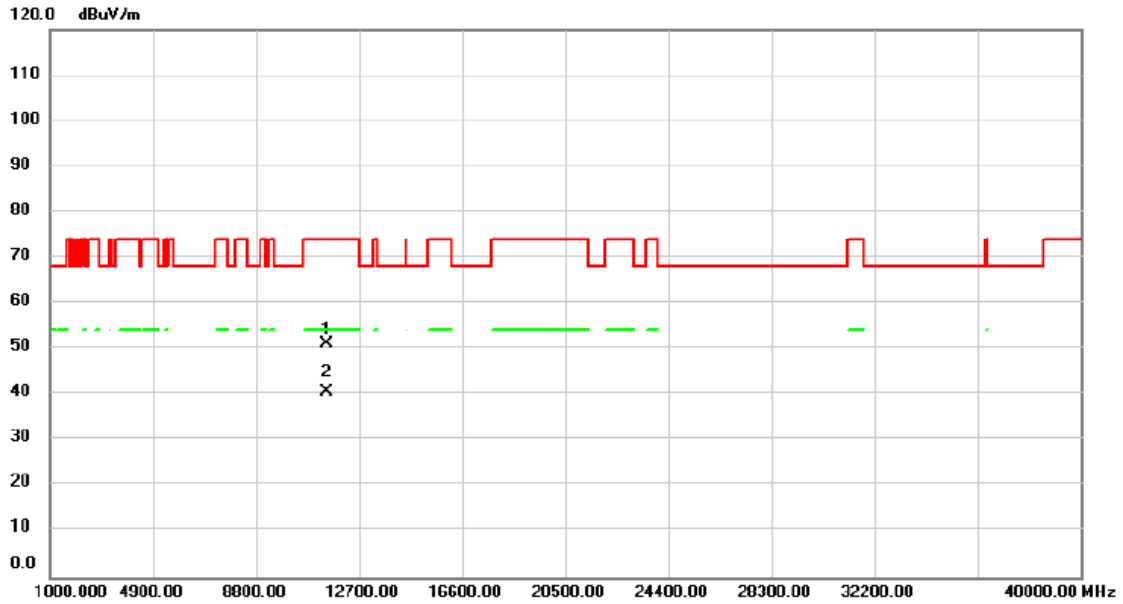


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11491.00	45.98	5.12	51.10	74.00	-22.90			peak
2	*	11491.00	35.66	5.12	40.78	54.00	-13.22			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5785 MHz	Polarization	Vertical

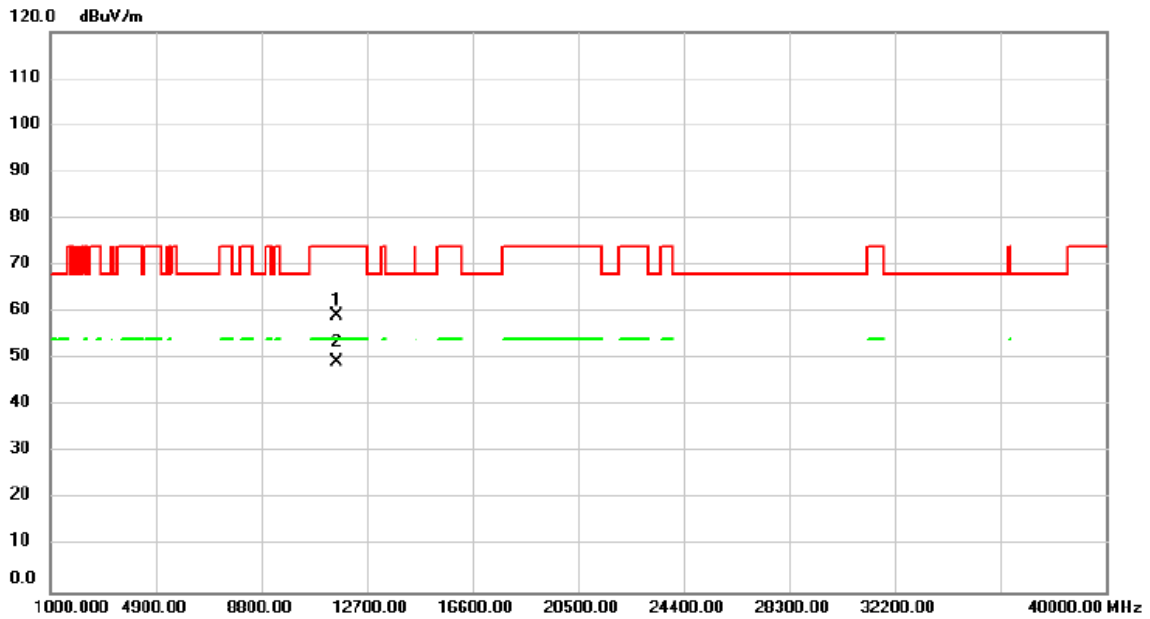


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11569.00	54.19	5.15	59.34	74.00	-14.66	peak			
2	*	11569.00	44.14	5.15	49.29	54.00	-4.71	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5785 MHz	Polarization	Horizontal

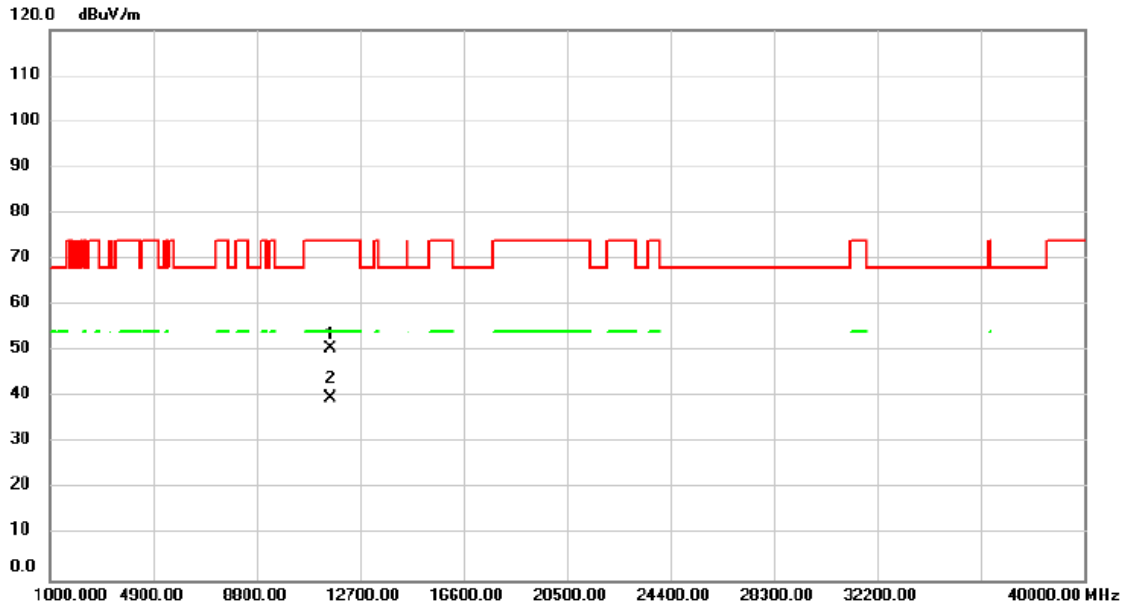


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11569.00	45.52	5.15	50.67	74.00	-23.33			peak
2	*	11569.00	34.66	5.15	39.81	54.00	-14.19			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5825 MHz	Polarization	Vertical

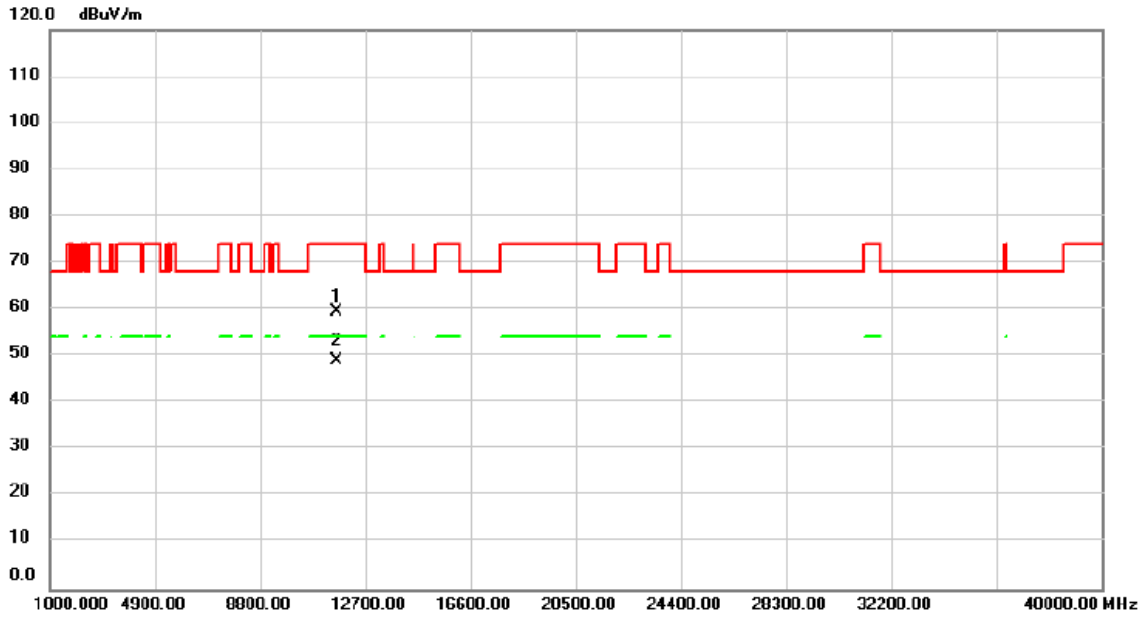


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11647.00	54.40	5.17	59.57	74.00	-14.43	peak			
2	*	11647.00	43.93	5.17	49.10	54.00	-4.90	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11a	Test Date	2024/3/17
Test Frequency	5825 MHz	Polarization	Horizontal

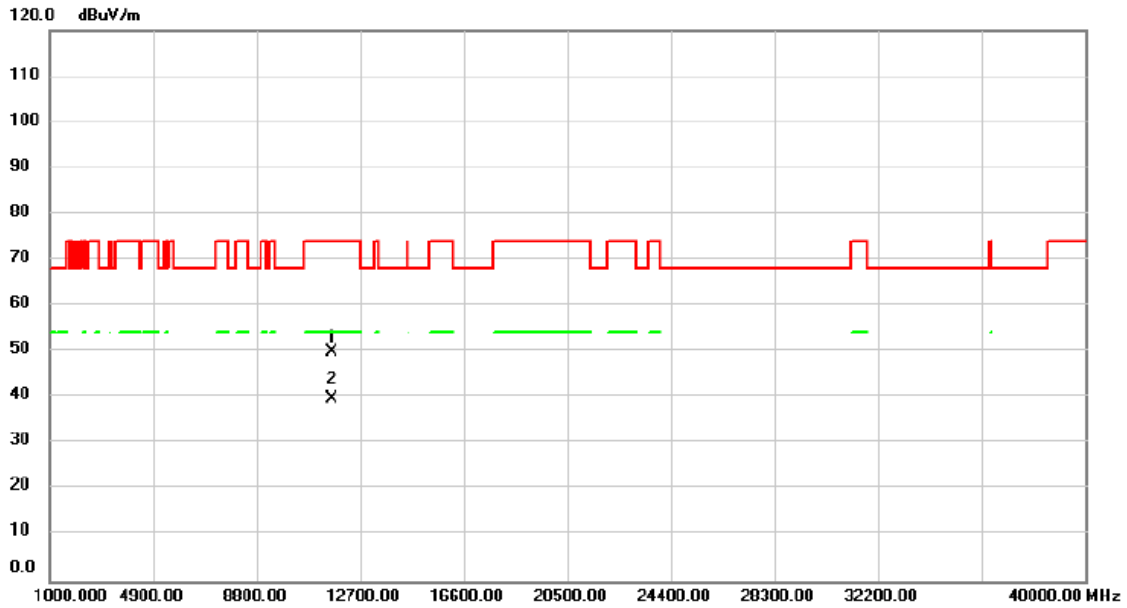


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11647.00	44.83	5.17	50.00	74.00	-24.00	peak			
2	*	11647.00	34.61	5.17	39.78	54.00	-14.22	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5180 MHz	Polarization	Vertical

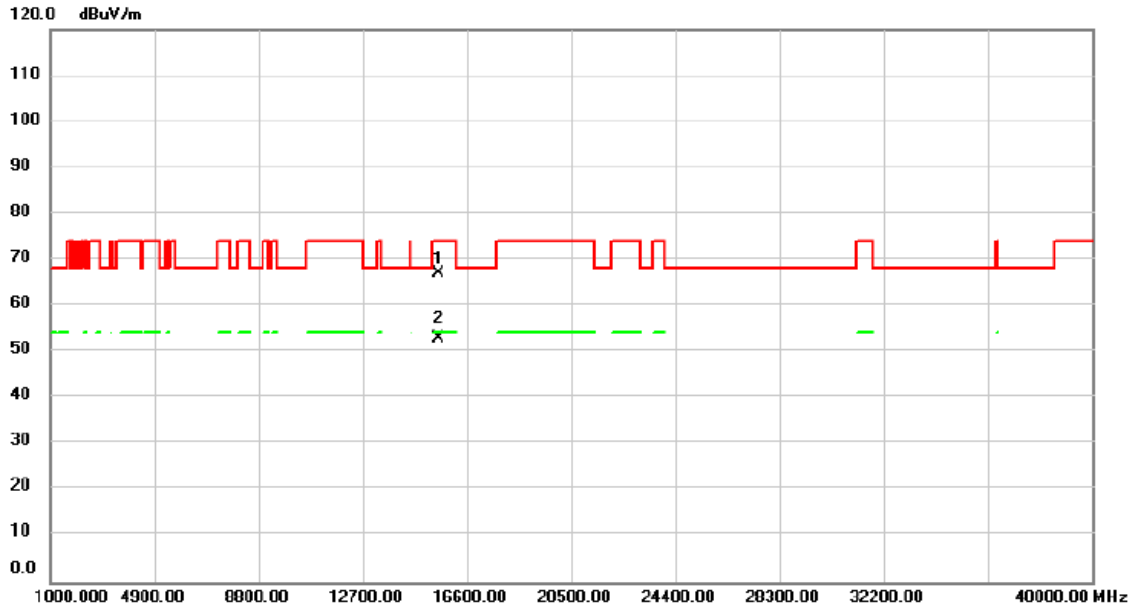


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15547.00	60.08	6.87	66.95	74.00	-7.05			peak
2	*	15547.00	46.11	6.87	52.98	54.00	-1.02			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5180 MHz	Polarization	Horizontal

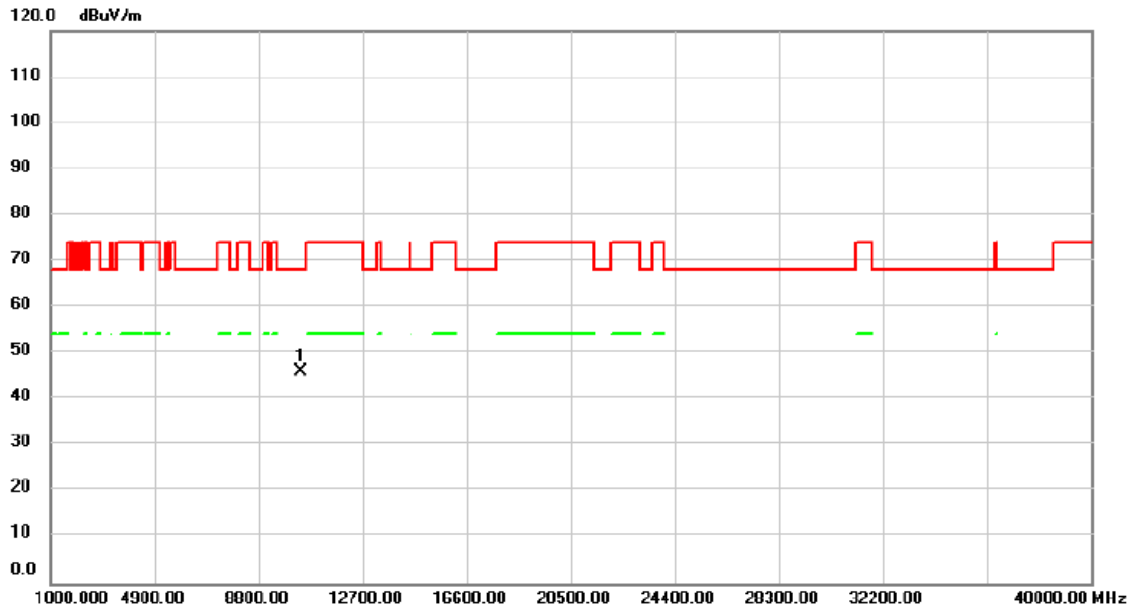


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10360.00	41.65	4.41	46.06	68.20	-22.14	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5200 MHz	Polarization	Vertical

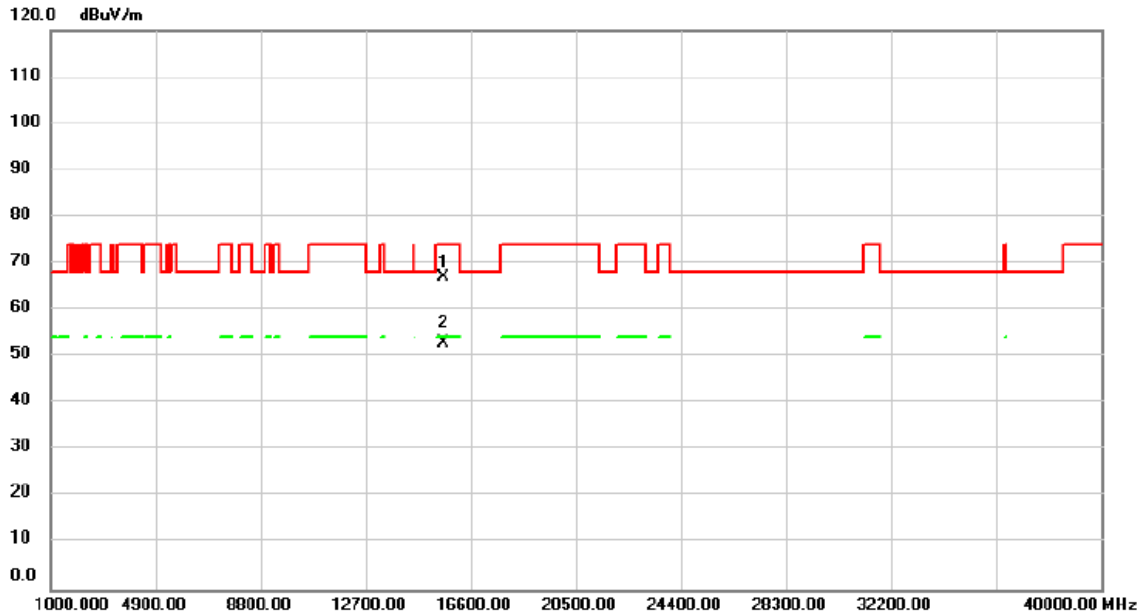


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15586.00	60.09	6.91	67.00	74.00	-7.00			peak
2	*	15586.00	46.05	6.91	52.96	54.00	-1.04			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5200 MHz	Polarization	Horizontal

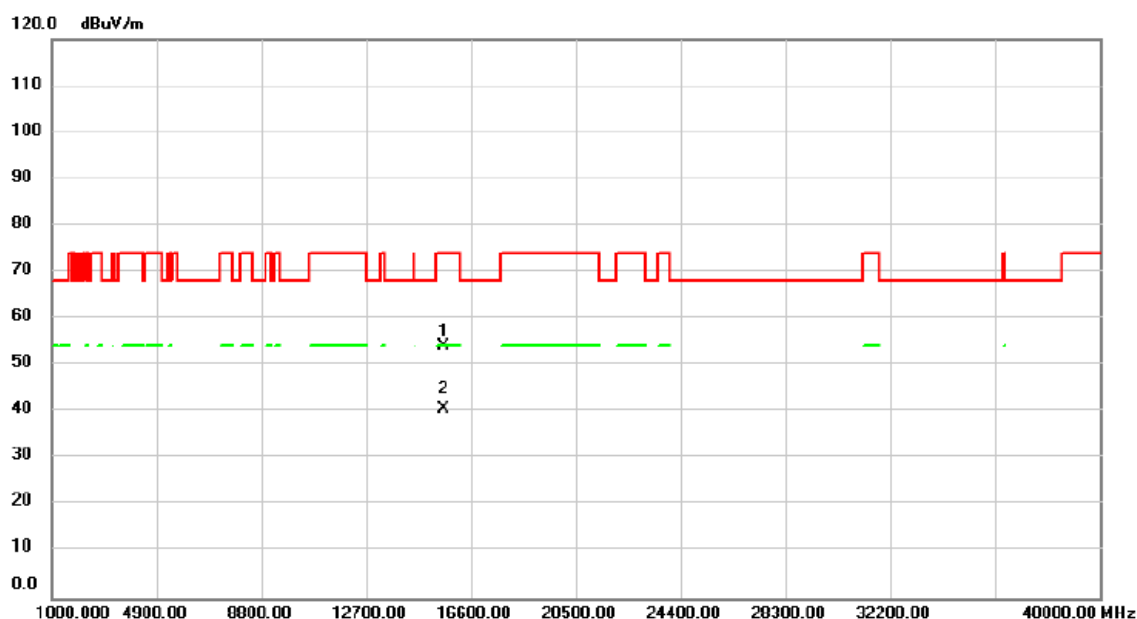


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		15586.00	47.35	6.91	54.26	74.00	-19.74	peak		
2	*	15586.00	33.85	6.91	40.76	54.00	-13.24	AVG		

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5240 MHz	Polarization	Vertical

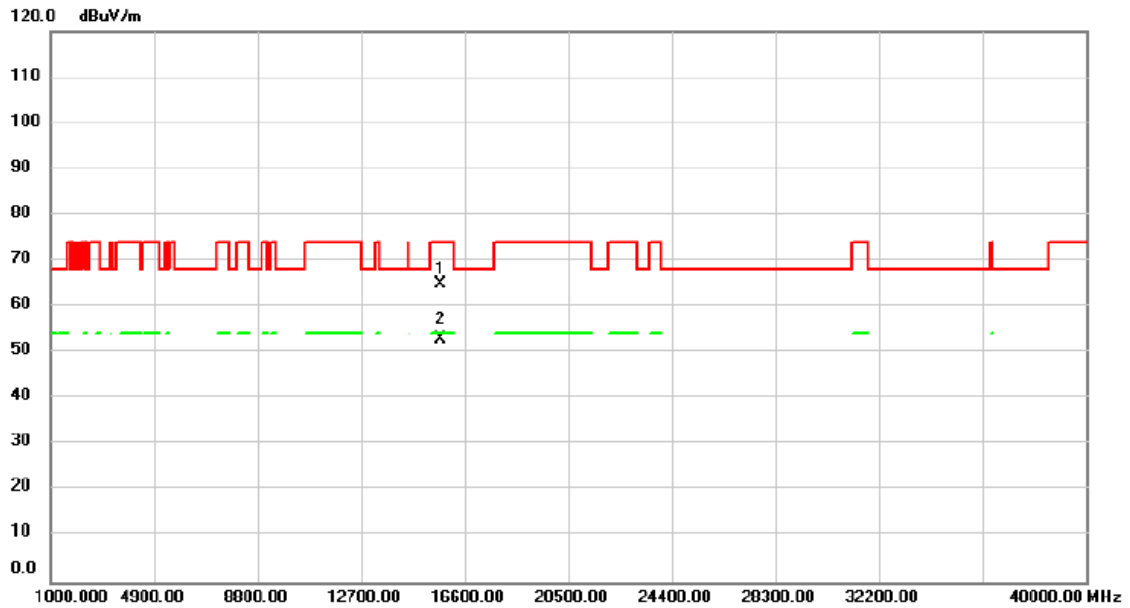


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15703.00	57.87	7.02	64.89	74.00	-9.11			peak
2	*	15703.00	45.88	7.02	52.90	54.00	-1.10			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5240 MHz	Polarization	Horizontal

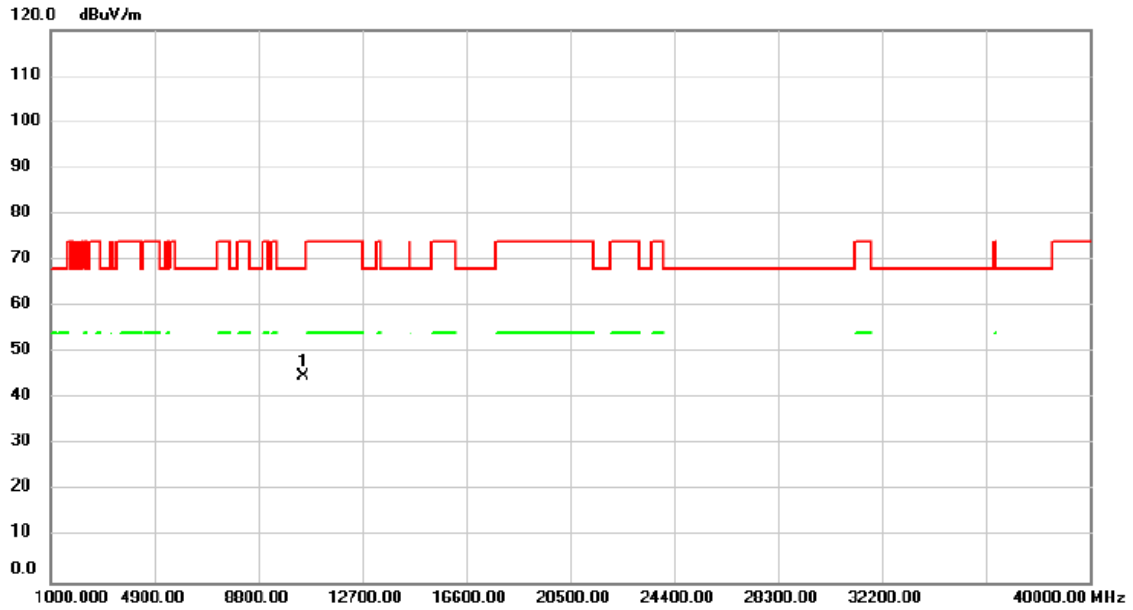


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10480.00	40.31	4.42	44.73	68.20	-23.47	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5260 MHz	Polarization	Vertical

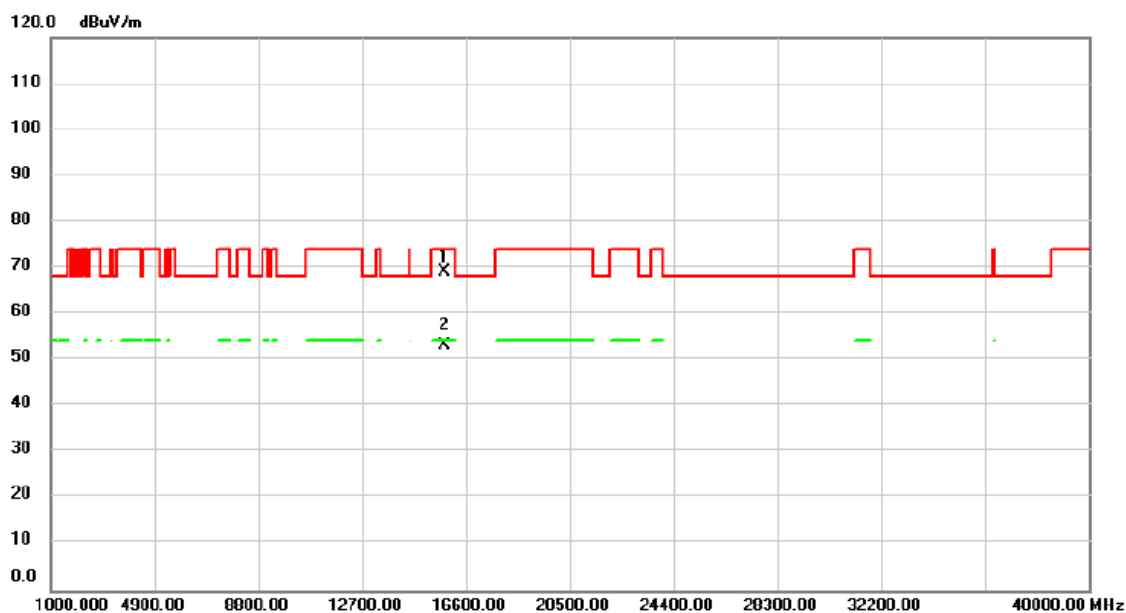


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15781.00	62.06	7.12	69.18	74.00	-4.82			peak
2	*	15781.00	46.11	7.12	53.23	54.00	-0.77			AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5260 MHz	Polarization	Horizontal

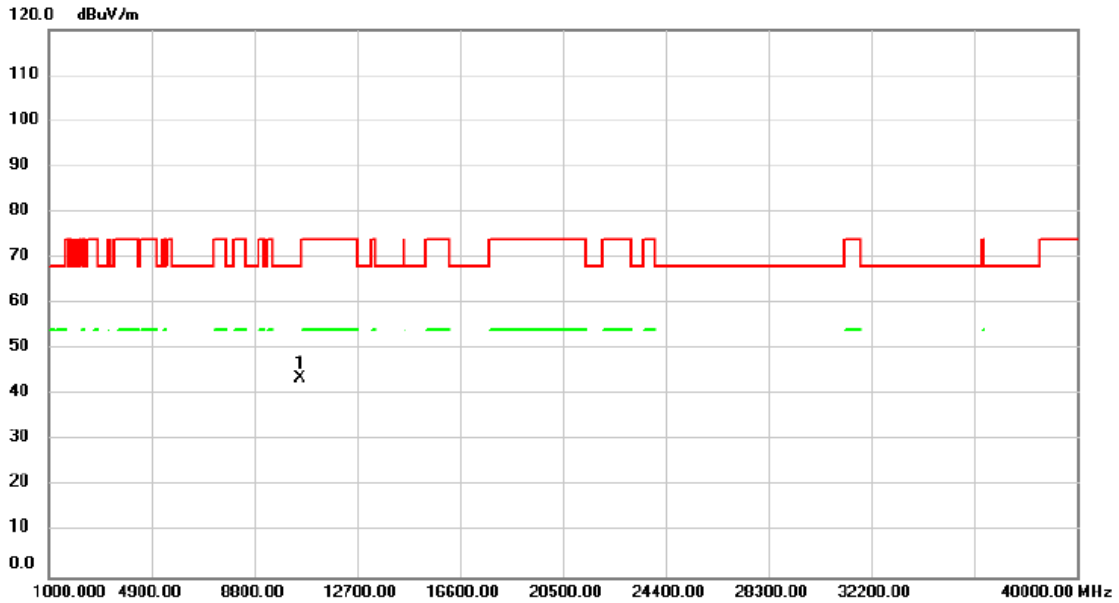


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10520.00	39.35	4.43	43.78	68.20	-24.42	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5300 MHz	Polarization	Vertical

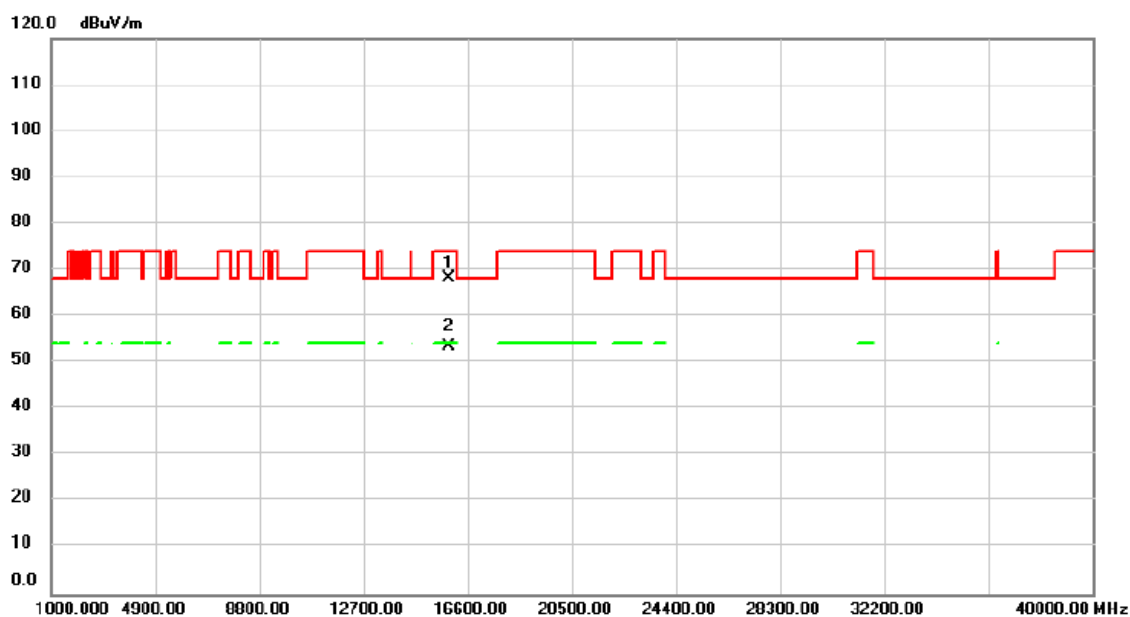


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		15898.00	61.01	7.24	68.25	74.00	-5.75			peak
2	*	15898.00	46.42	7.24	53.66	54.00	-0.34			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5300 MHz	Polarization	Horizontal

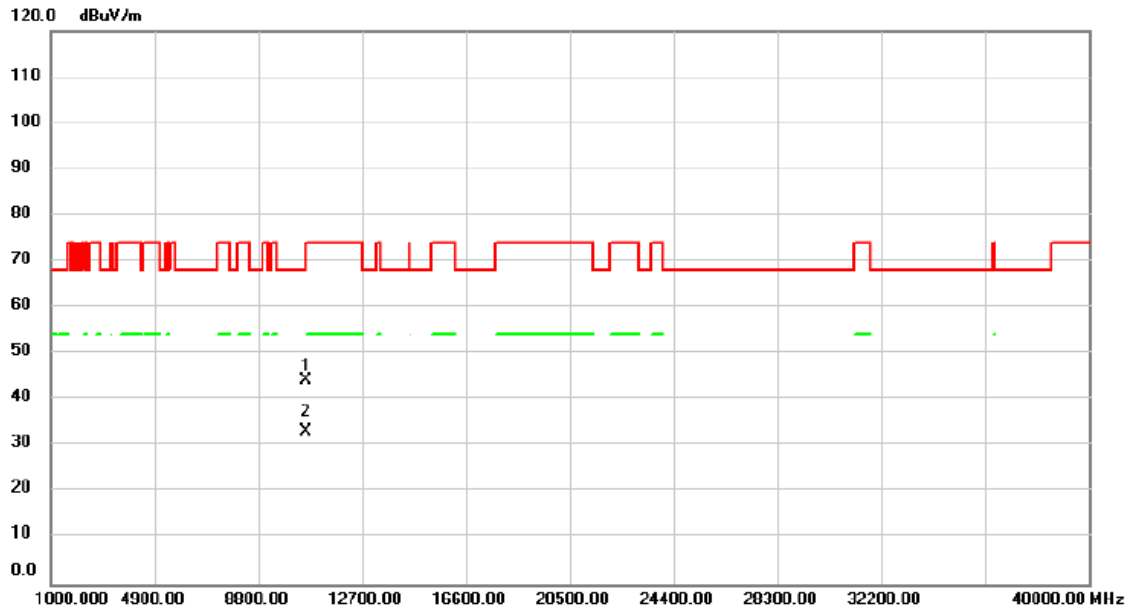


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		10600.00	39.77	4.46	44.23	68.20	-23.97	peak			
2	*	10600.00	28.71	4.46	33.17	54.00	-20.83	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5320 MHz	Polarization	Vertical

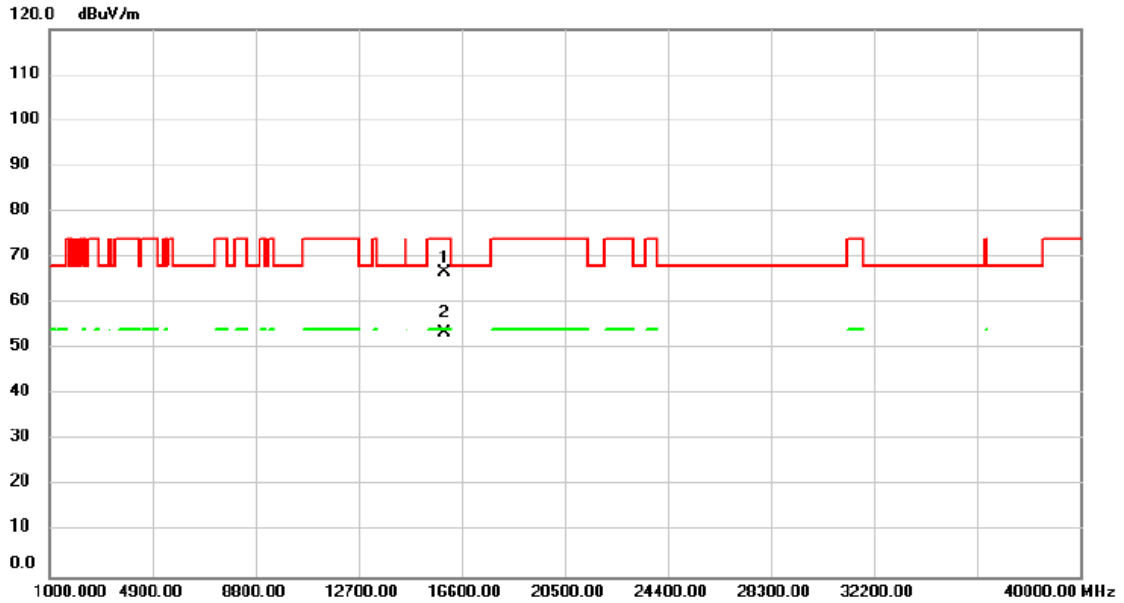


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15937.00	59.58	7.28	66.86	74.00	-7.14			peak
2	*	15937.00	46.23	7.28	53.51	54.00	-0.49			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5320 MHz	Polarization	Horizontal

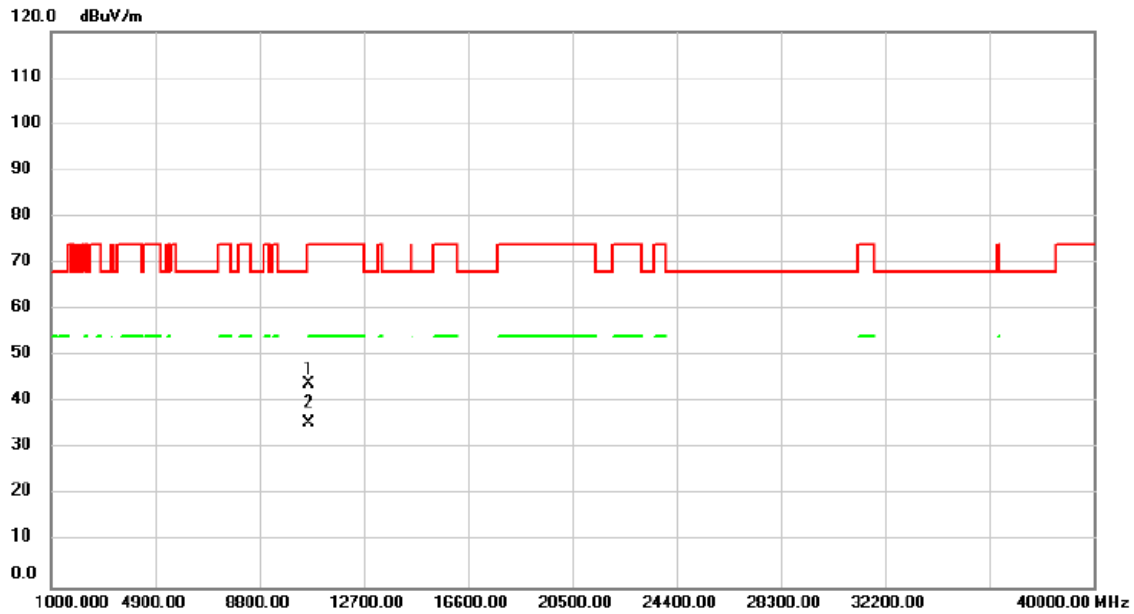


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		10640.00	39.60	4.46	44.06	74.00	-29.94	peak		
2	*	10640.00	30.96	4.46	35.42	54.00	-18.58	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5500 MHz	Polarization	Vertical

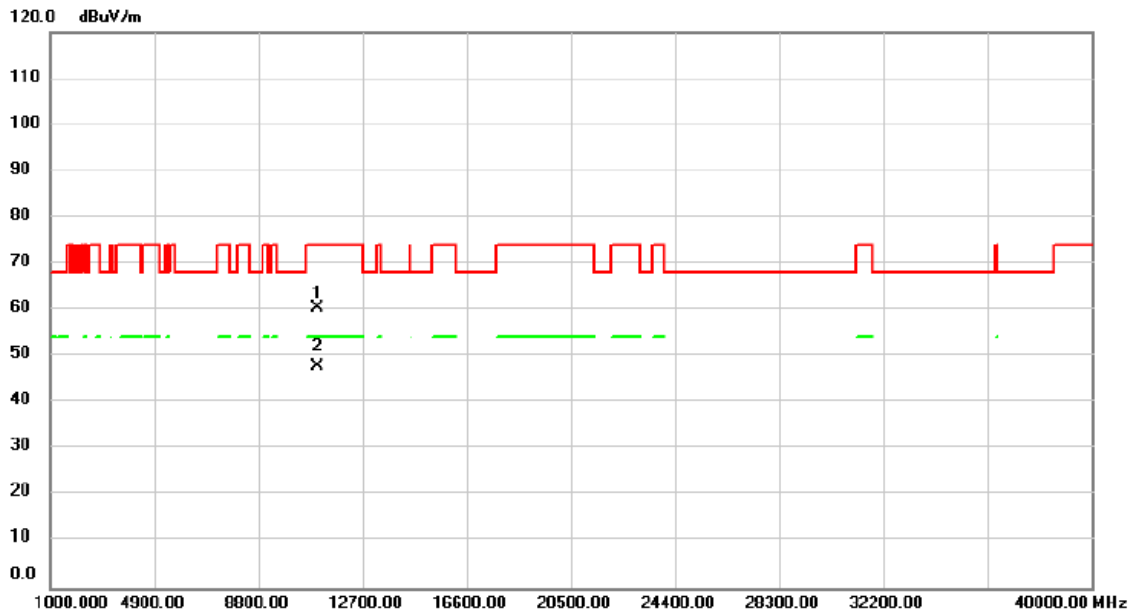


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10984.00	55.79	4.57	60.36	74.00	-13.64			peak
2	*	10984.00	43.33	4.57	47.90	54.00	-6.10			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5500 MHz	Polarization	Horizontal

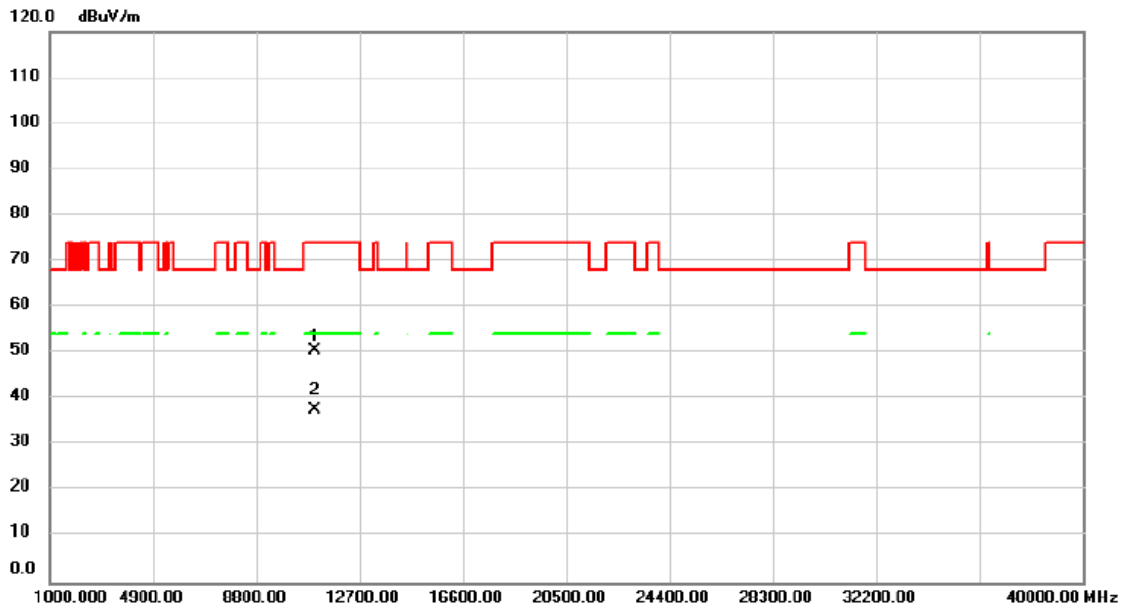


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		10984.00	45.92	4.57	50.49	74.00	-23.51	peak			
2	*	10984.00	32.96	4.57	37.53	54.00	-16.47	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5580 MHz	Polarization	Vertical

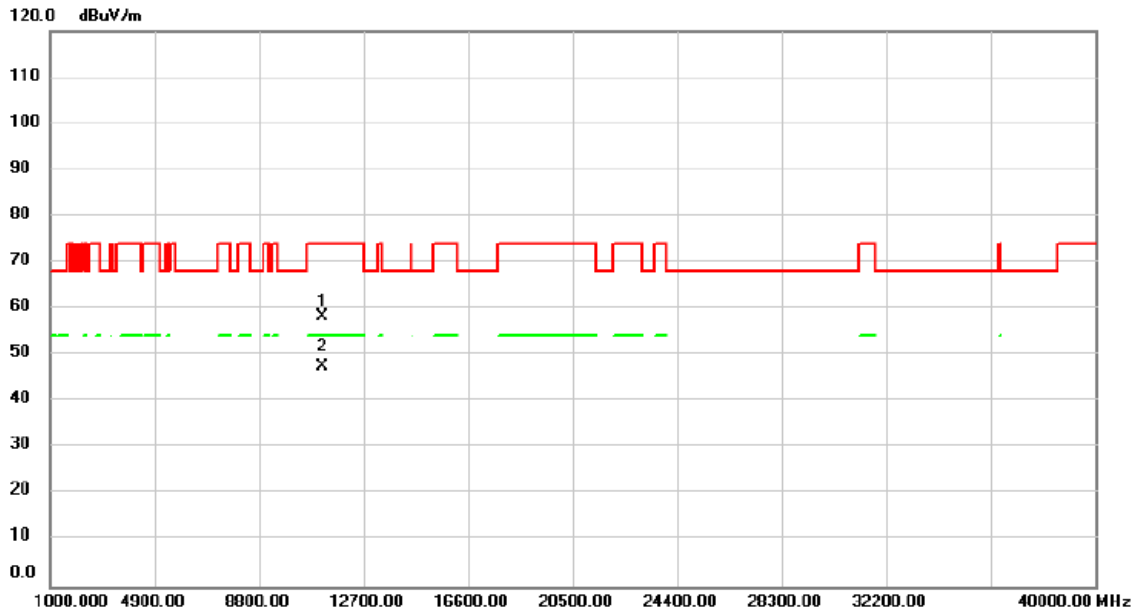


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11179.00	53.45	4.77	58.22	74.00	-15.78			peak
2	*	11179.00	42.91	4.77	47.68	54.00	-6.32			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5580 MHz	Polarization	Horizontal

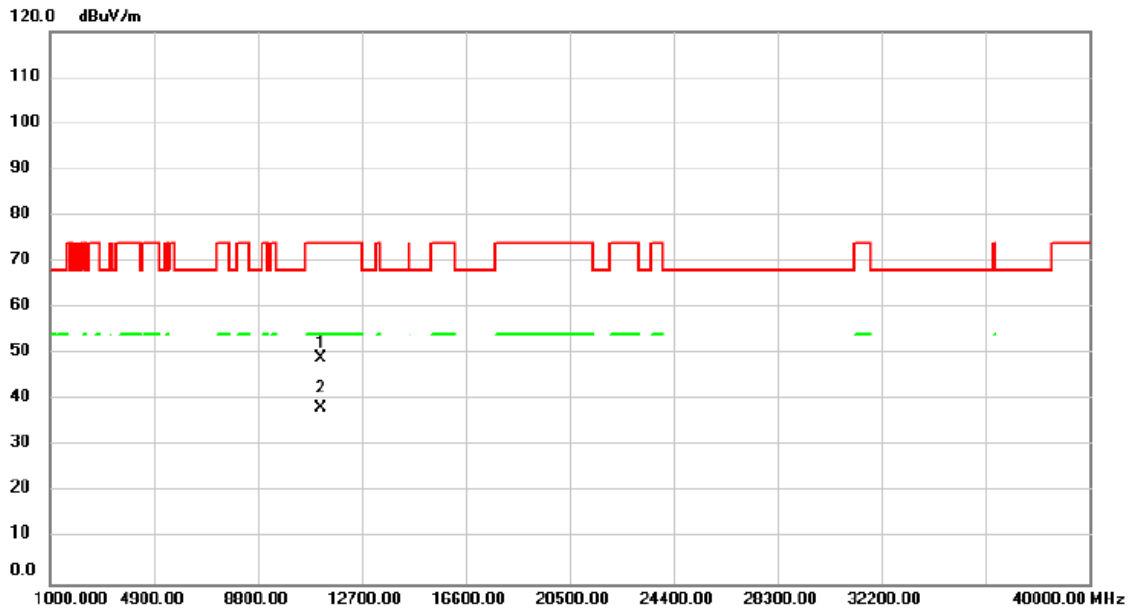


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11179.00	44.15	4.77	48.92	74.00	-25.08	peak			
2	*	11179.00	33.37	4.77	38.14	54.00	-15.86	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5700 MHz	Polarization	Vertical

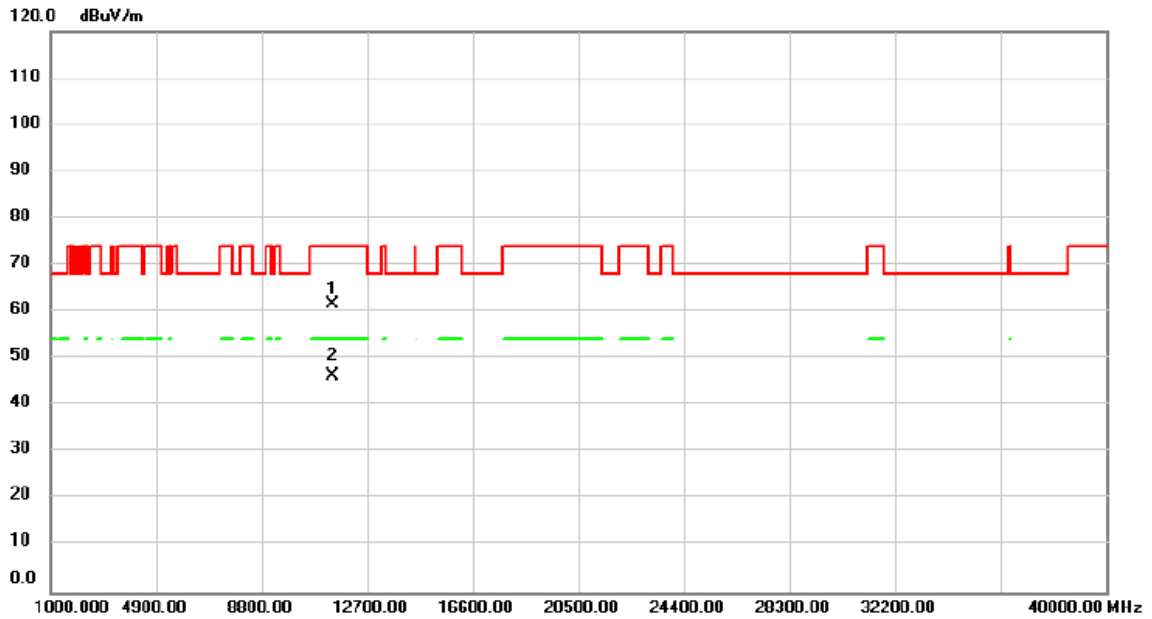


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11413.00	56.56	5.03	61.59	74.00	-12.41			peak
2	*	11413.00	41.25	5.03	46.28	54.00	-7.72			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5700 MHz	Polarization	Horizontal

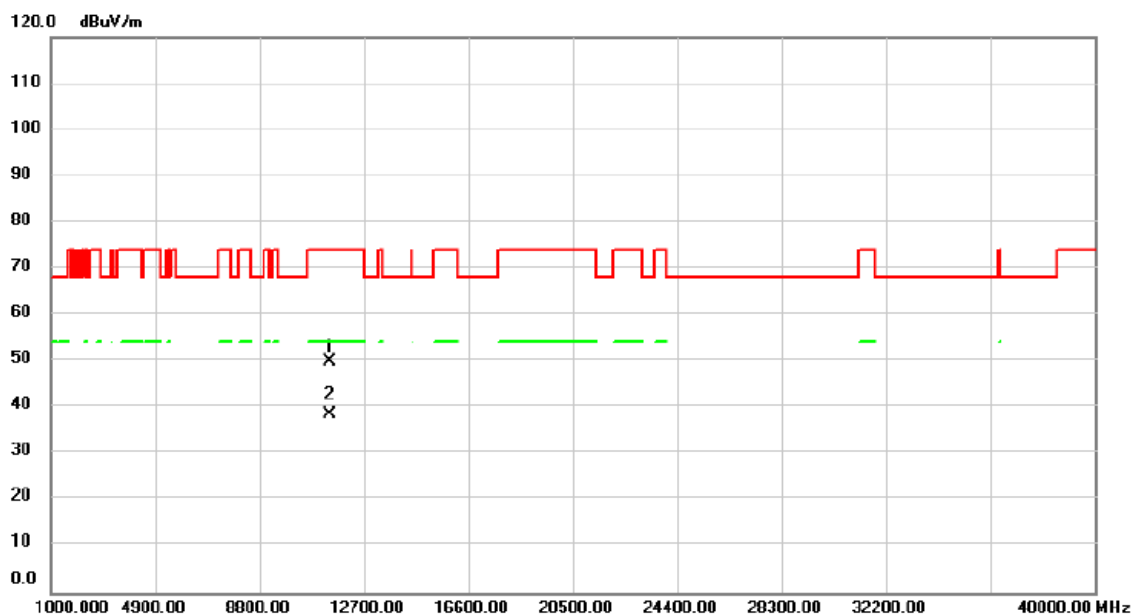


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11413.00	44.98	5.03	50.01	74.00	-23.99			peak
2	*	11413.00	33.47	5.03	38.50	54.00	-15.50			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5745 MHz	Polarization	Vertical

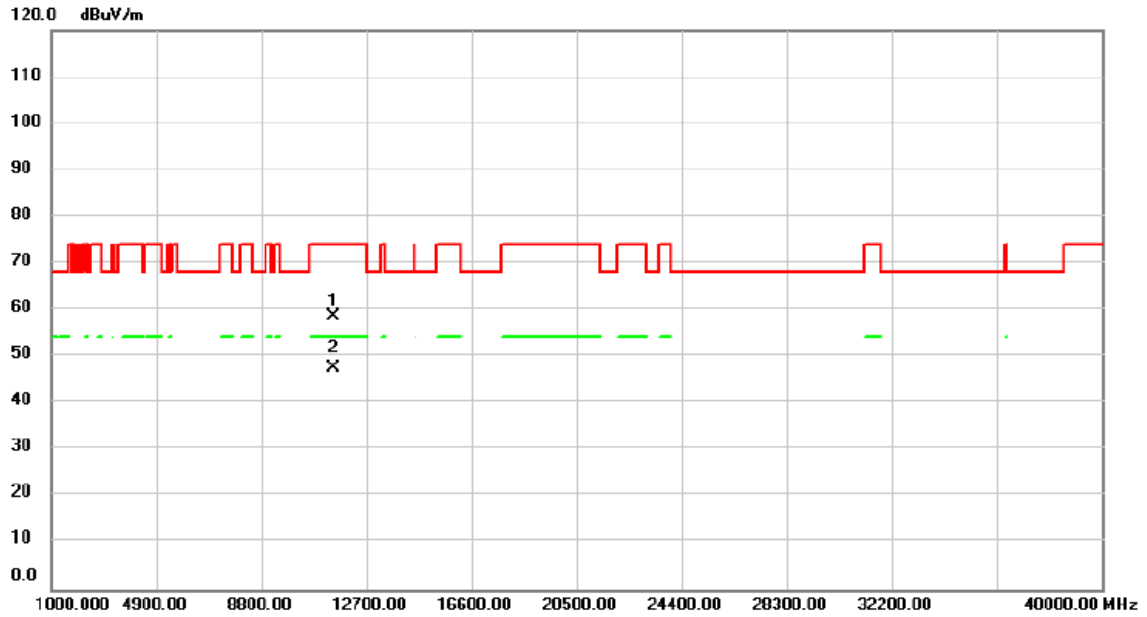


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11491.00	53.50	5.12	58.62	74.00	-15.38	peak			
2	*	11491.00	42.54	5.12	47.66	54.00	-6.34	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5745 MHz	Polarization	Horizontal

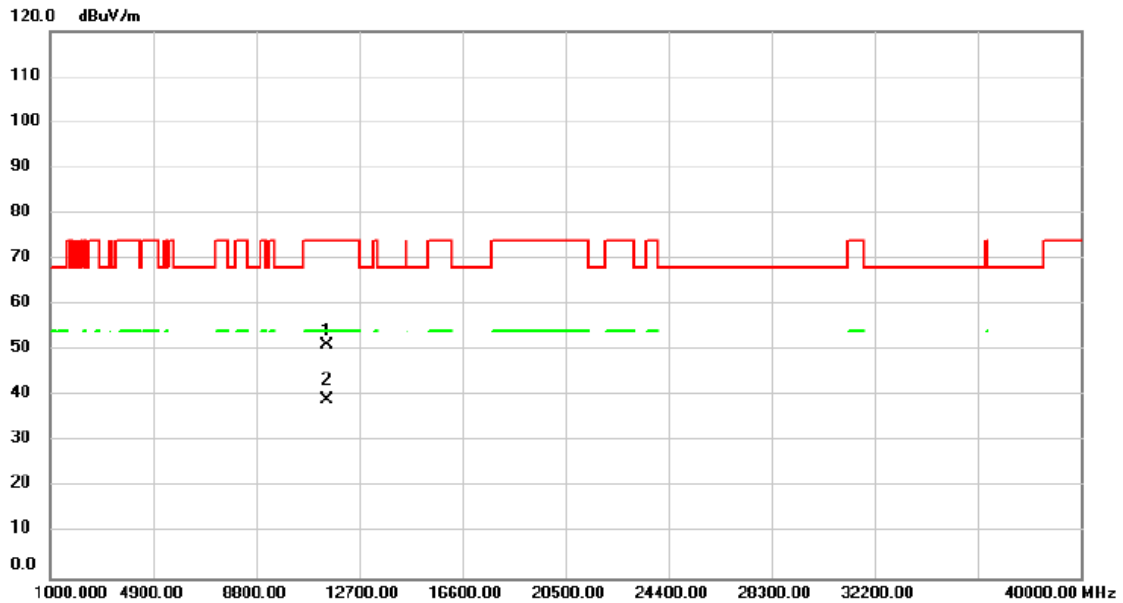


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		11491.00	46.02	5.12	51.14	74.00	-22.86			peak	
2	*	11491.00	34.17	5.12	39.29	54.00	-14.71			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5785 MHz	Polarization	Vertical

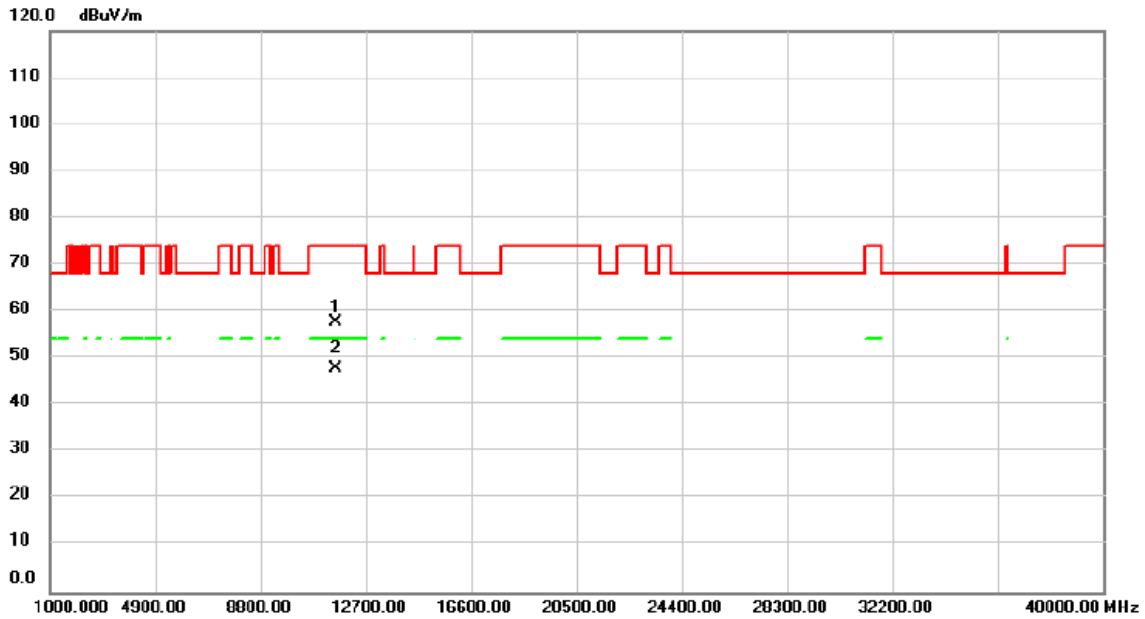


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11569.00	52.72	5.15	57.87	74.00	-16.13	peak			
2	*	11569.00	42.80	5.15	47.95	54.00	-6.05	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5785 MHz	Polarization	Horizontal

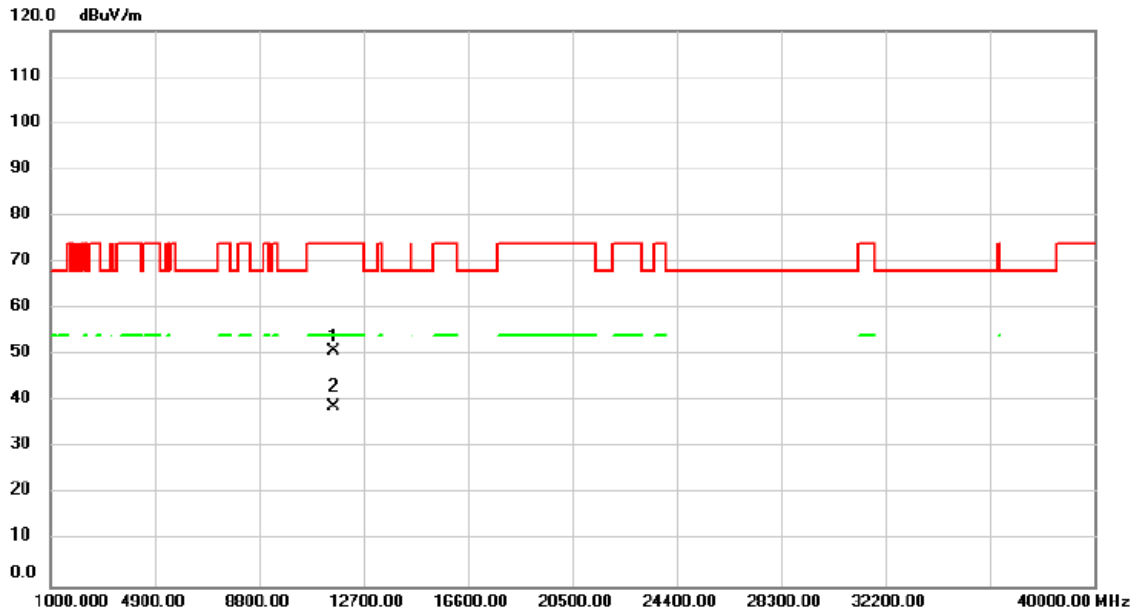


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11569.00	45.78	5.15	50.93	74.00	-23.07			peak
2	*	11569.00	33.56	5.15	38.71	54.00	-15.29			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5825 MHz	Polarization	Vertical

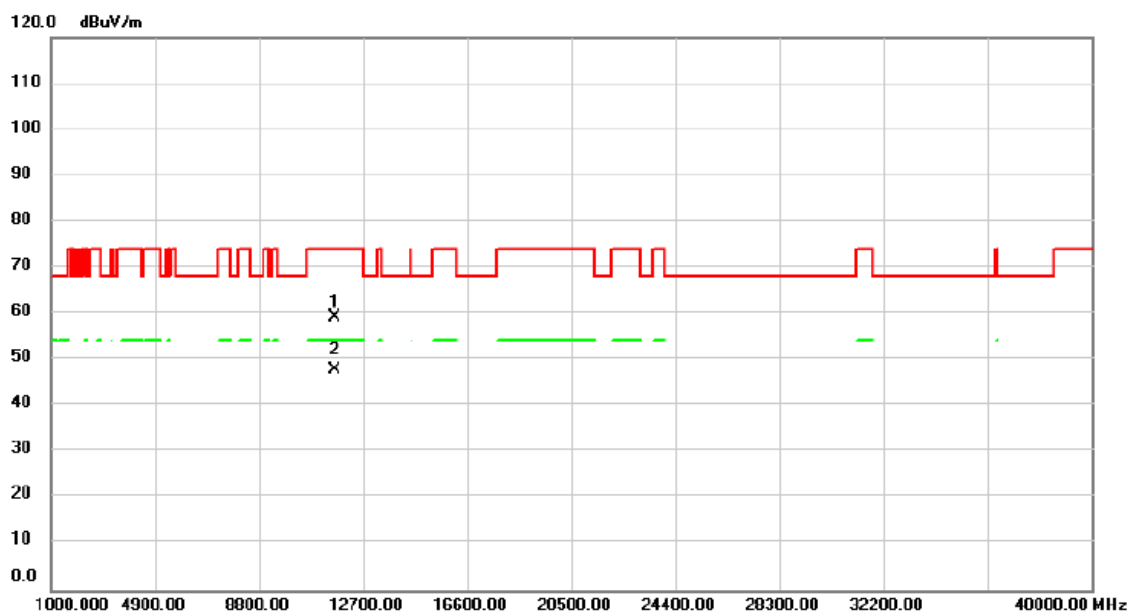


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11647.00	54.12	5.17	59.29	74.00	-14.71	peak			
2	*	11647.00	42.64	5.17	47.81	54.00	-6.19	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT20)	Test Date	2024/3/17
Test Frequency	5825 MHz	Polarization	Horizontal

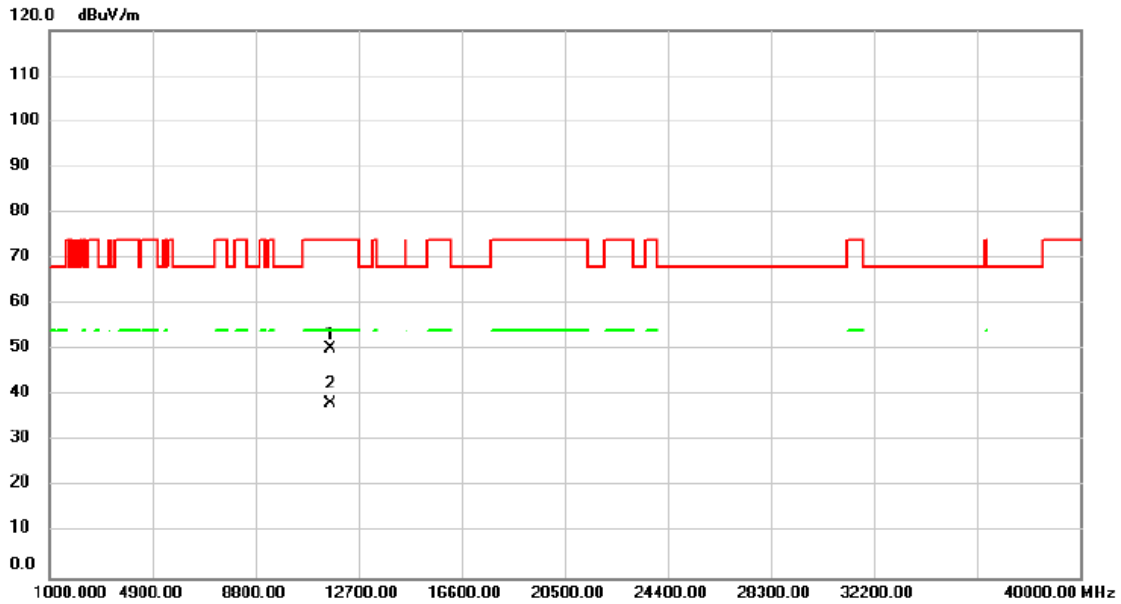


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11647.00	45.05	5.17	50.22	74.00	-23.78			peak
2	*	11647.00	33.21	5.17	38.38	54.00	-15.62			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5190 MHz	Polarization	Vertical

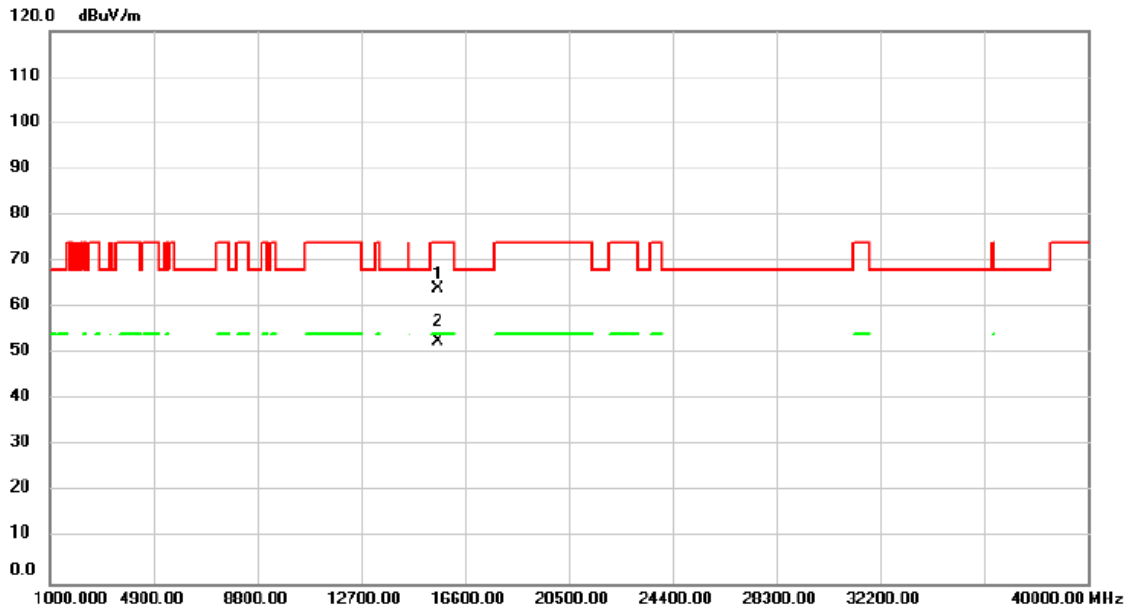


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		15586.00	57.01	6.91	63.92	74.00	-10.08			peak
2	*	15586.00	45.80	6.91	52.71	54.00	-1.29			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5190 MHz	Polarization	Horizontal

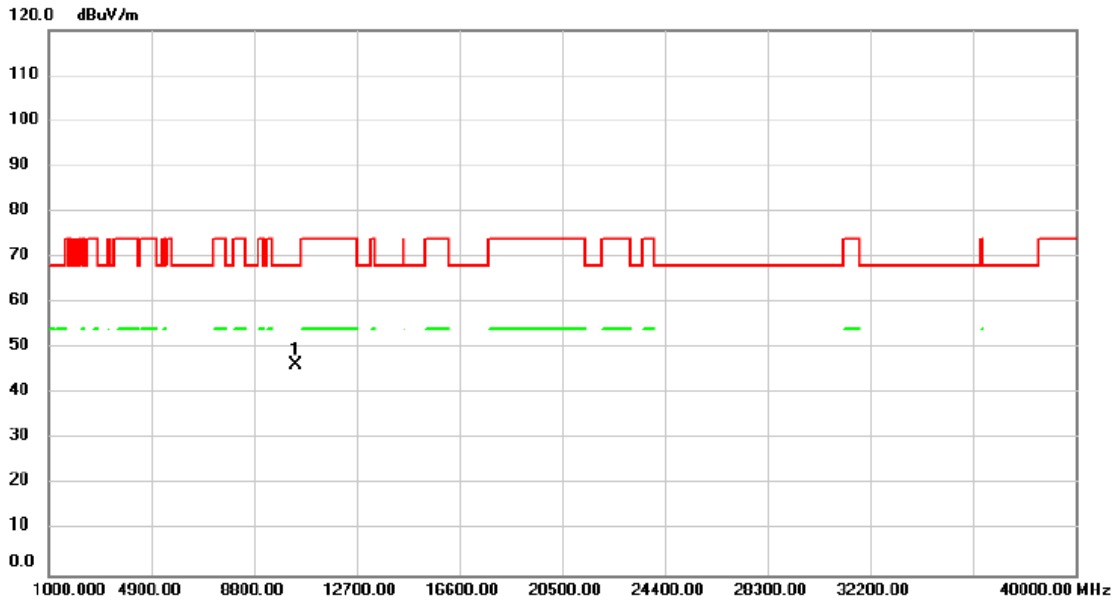


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10380.00	41.81	4.42	46.23	68.20	-21.97			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5230 MHz	Polarization	Vertical

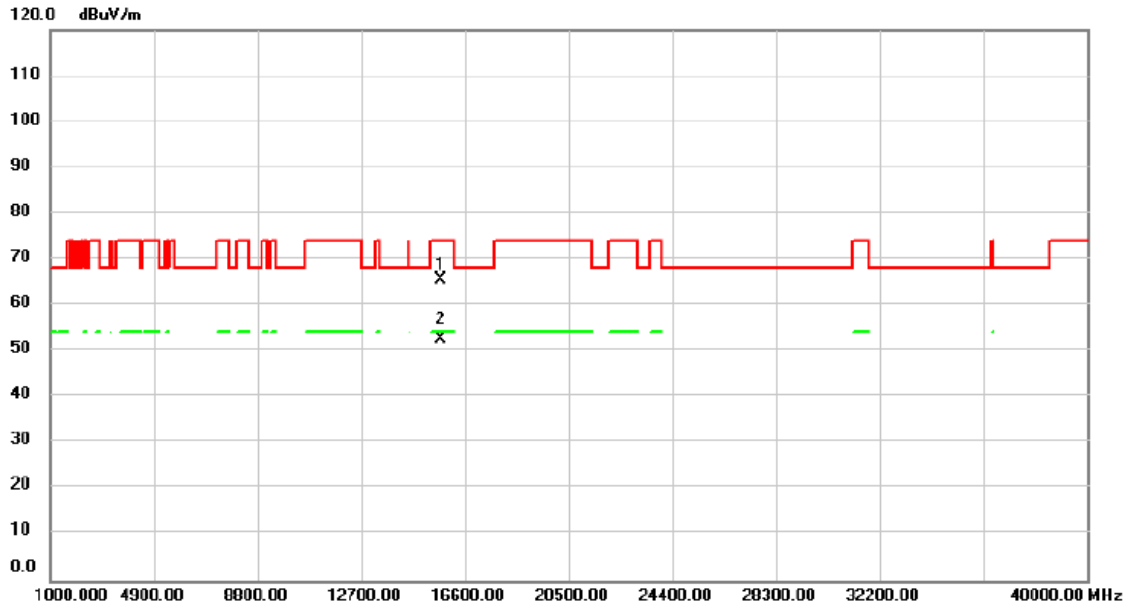


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		15664.00	58.54	6.98	65.52	74.00	-8.48	peak		
2	*	15664.00	45.82	6.98	52.80	54.00	-1.20	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5230 MHz	Polarization	Horizontal

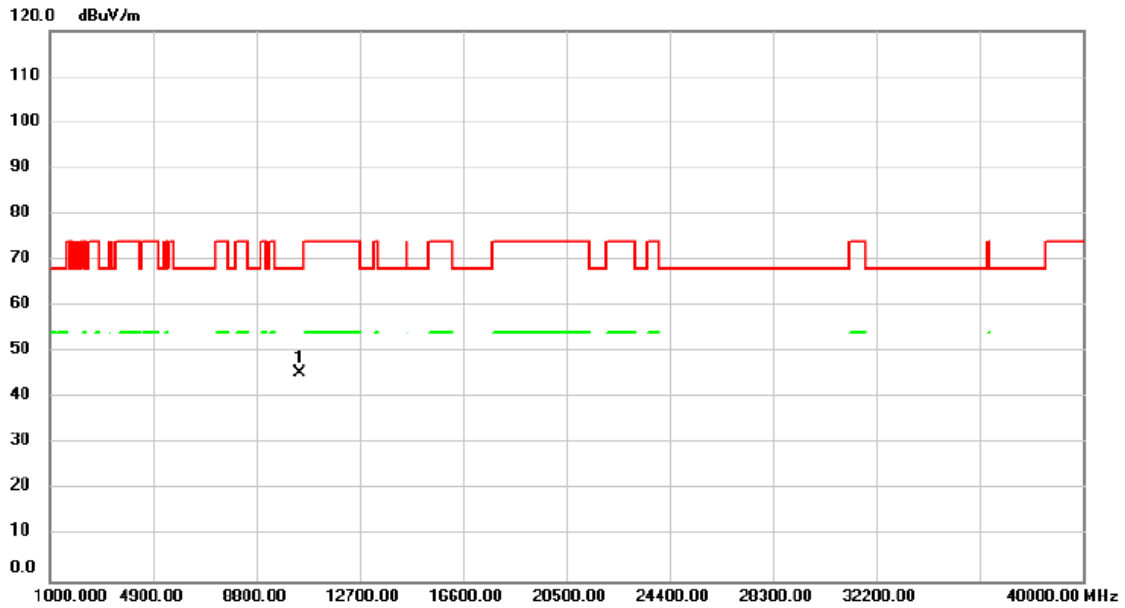


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10460.00	40.92	4.41	45.33	68.20	-22.87			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5270 MHz	Polarization	Vertical

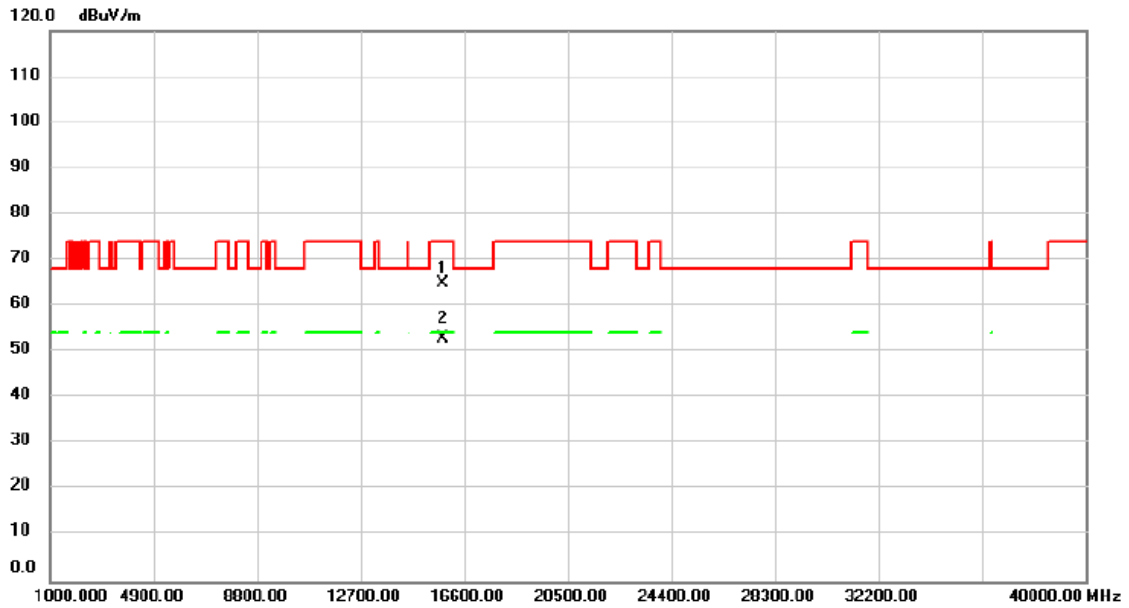


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15781.00	57.73	7.12	64.85	74.00	-9.15			peak
2	*	15781.00	45.69	7.12	52.81	54.00	-1.19			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5270 MHz	Polarization	Horizontal

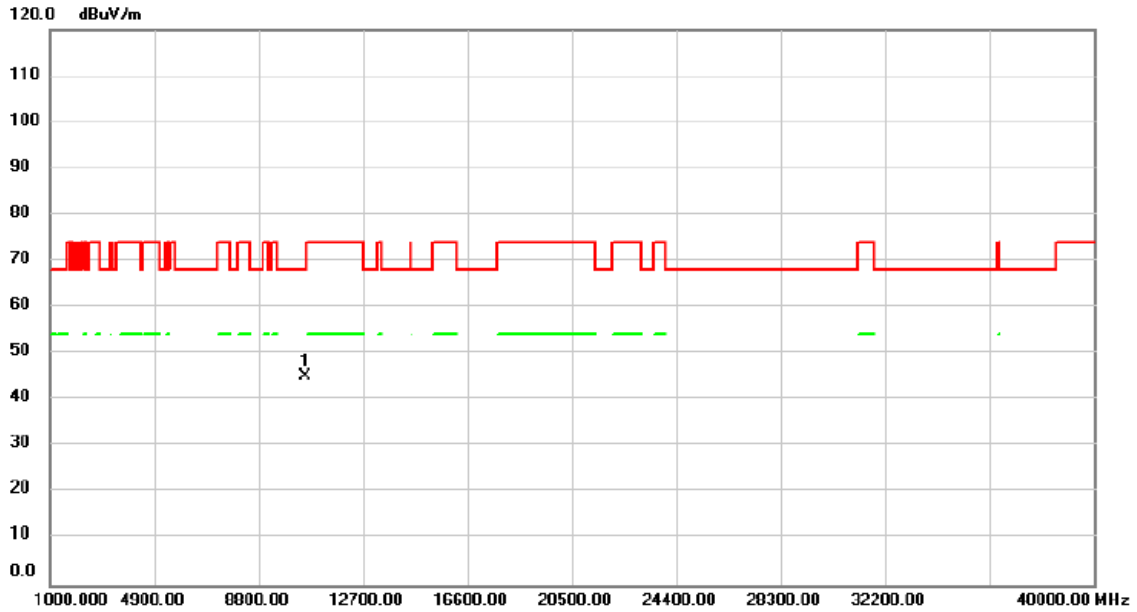


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10540.00	40.68	4.44	45.12	68.20	-23.08			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5310 MHz	Polarization	Vertical

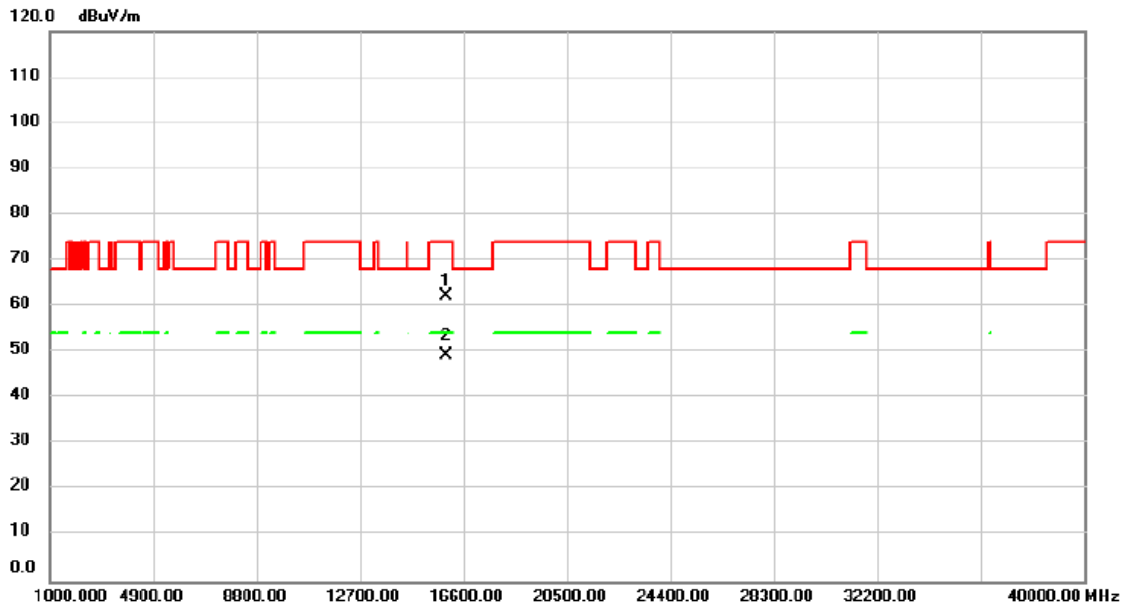


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15937.00	54.87	7.28	62.15	74.00	-11.85			peak
2	*	15937.00	41.96	7.28	49.24	54.00	-4.76			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5310 MHz	Polarization	Horizontal

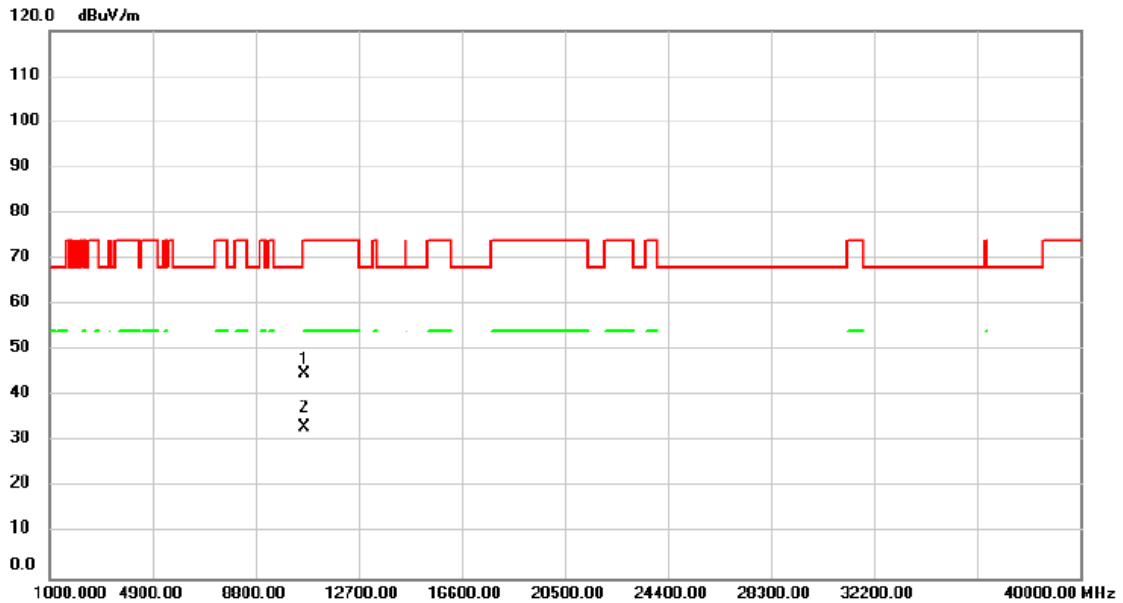


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10620.00	40.32	4.47	44.79	74.00	-29.21			peak
2	*	10620.00	28.55	4.47	33.02	54.00	-20.98			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5510 MHz	Polarization	Vertical

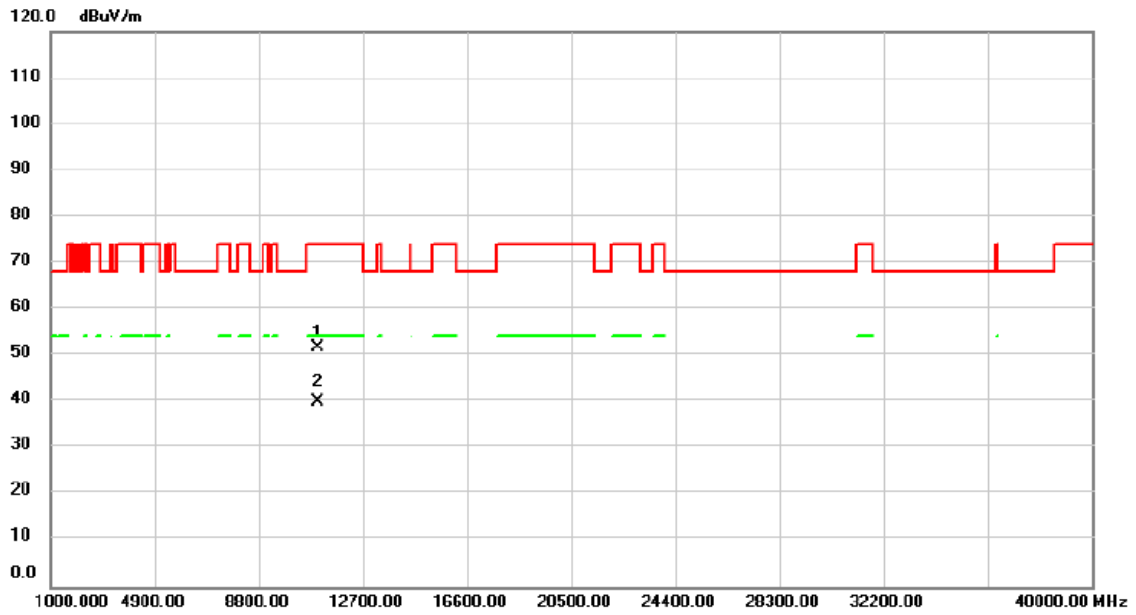


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11023.00	47.20	4.60	51.80	74.00	-22.20			peak
2	*	11023.00	35.56	4.60	40.16	54.00	-13.84			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5510 MHz	Polarization	Horizontal

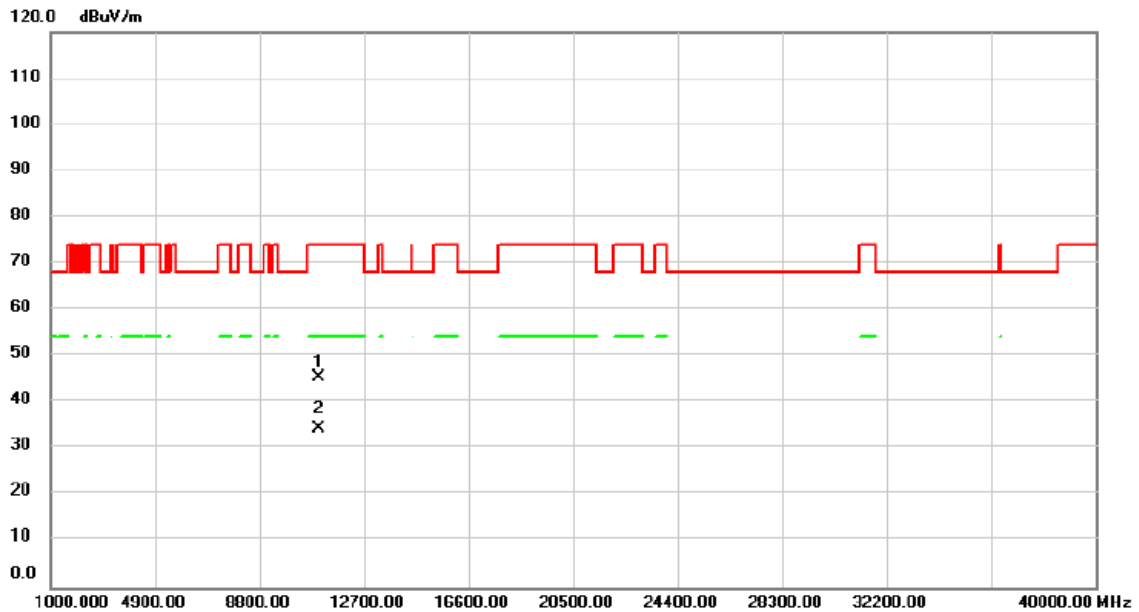


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11020.00	40.74	4.61	45.35	74.00	-28.65	peak			
2	*	11020.00	29.76	4.61	34.37	54.00	-19.63	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5550 MHz	Polarization	Vertical

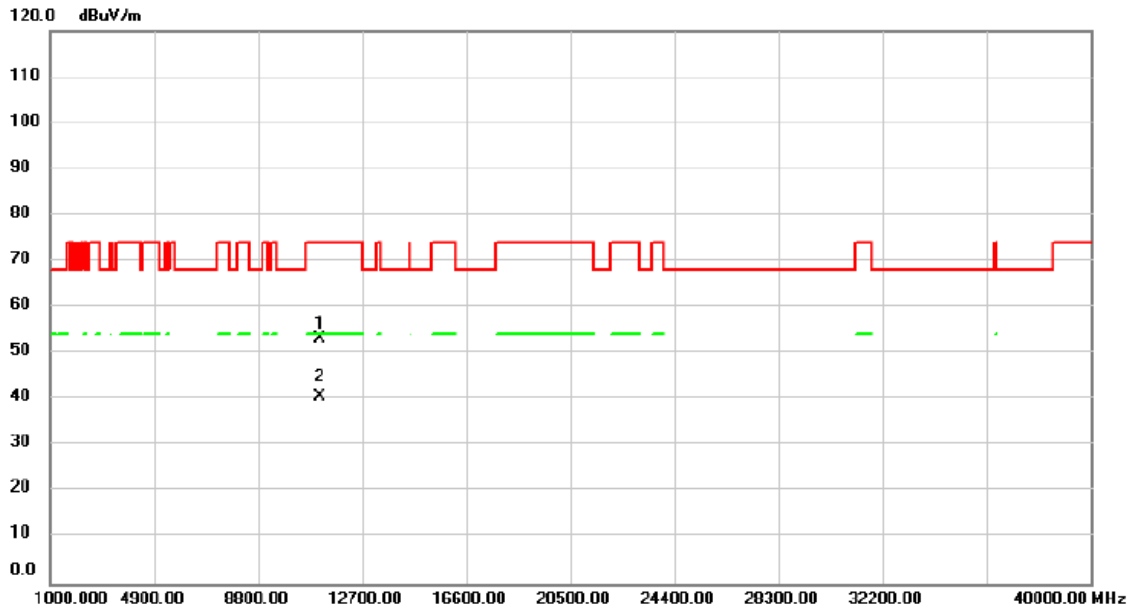


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11101.00	48.44	4.69	53.13	74.00	-20.87	peak		
2	*	11101.00	36.06	4.69	40.75	54.00	-13.25	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5550 MHz	Polarization	Horizontal

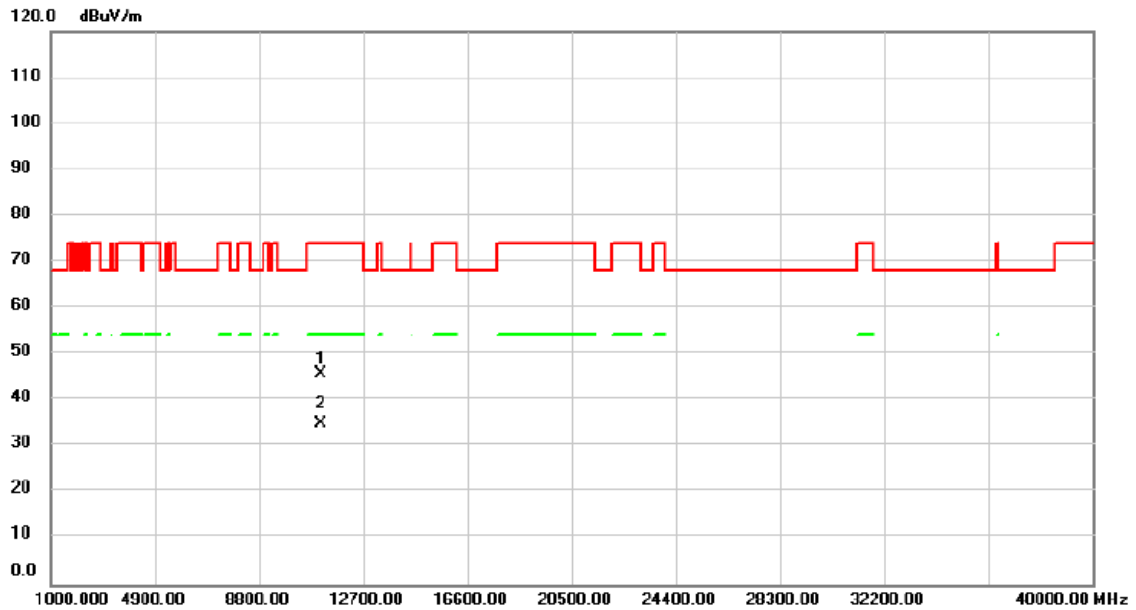


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	11100.00	41.15	4.69	45.84	74.00	-28.16			peak
2		11100.00	30.22	4.69	34.91	74.00	-39.09			QP

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5670 MHz	Polarization	Vertical

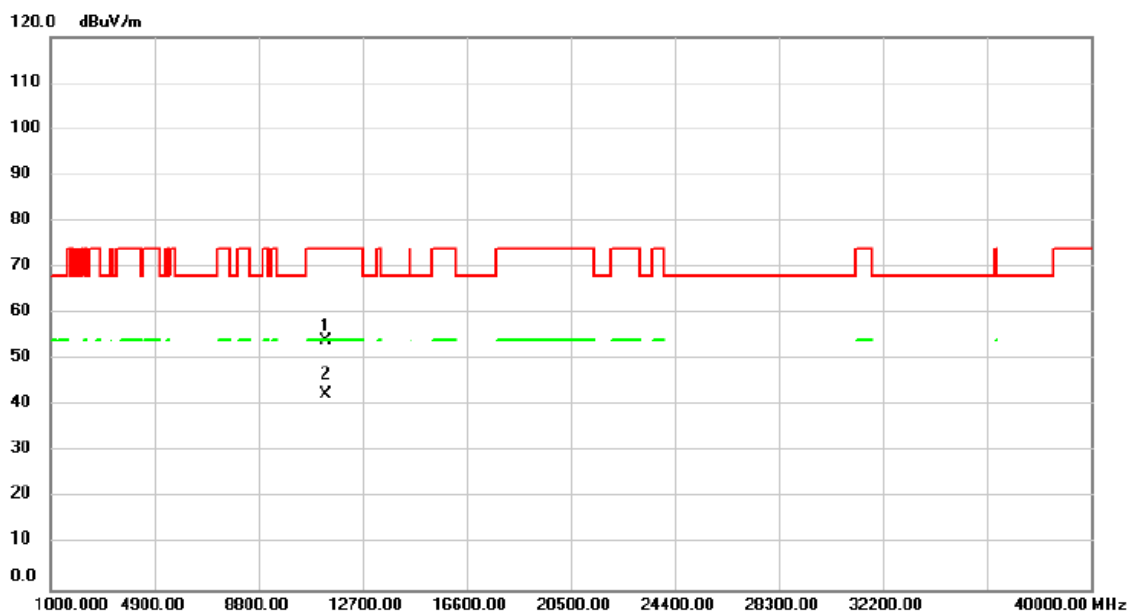


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11335.00	49.13	4.94	54.07	74.00	-19.93	peak			
2	*	11335.00	37.37	4.94	42.31	54.00	-11.69	AVG			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5670 MHz	Polarization	Horizontal

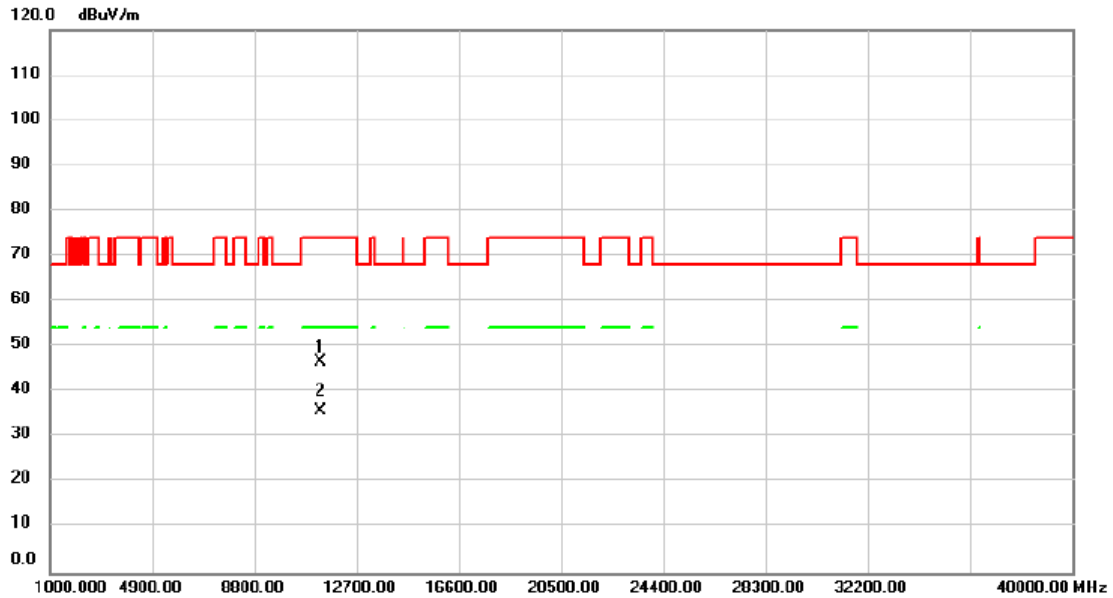


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11340.00	41.70	4.96	46.66	74.00	-27.34			peak
2	*	11340.00	30.81	4.96	35.77	54.00	-18.23			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5755 MHz	Polarization	Vertical

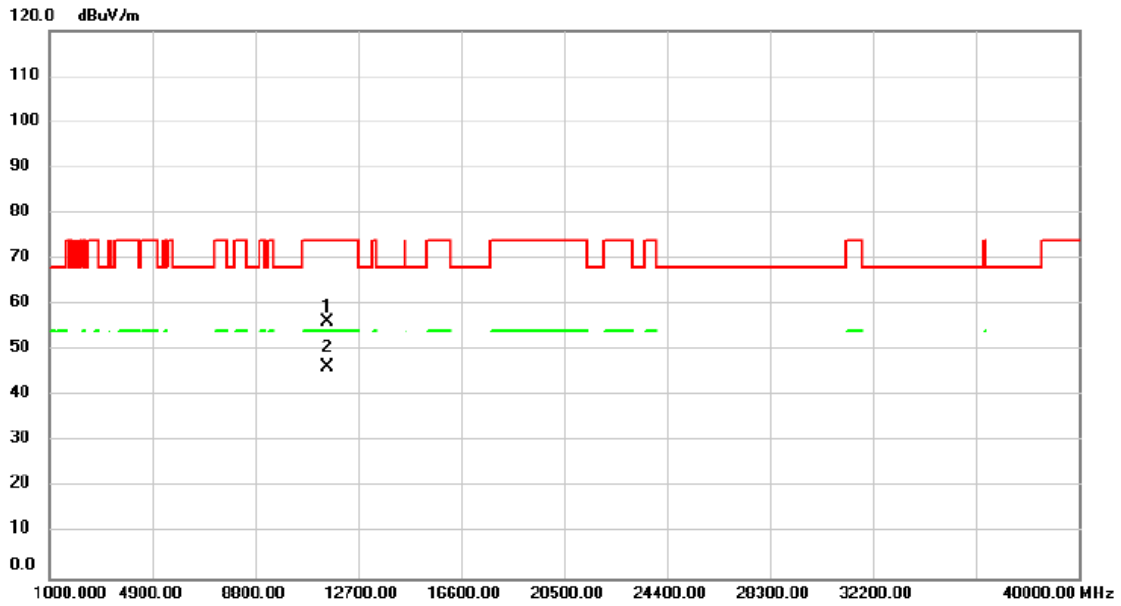


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11530.00	51.15	5.14	56.29	74.00	-17.71			peak
2	*	11530.00	41.15	5.14	46.29	54.00	-7.71			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5755 MHz	Polarization	Horizontal

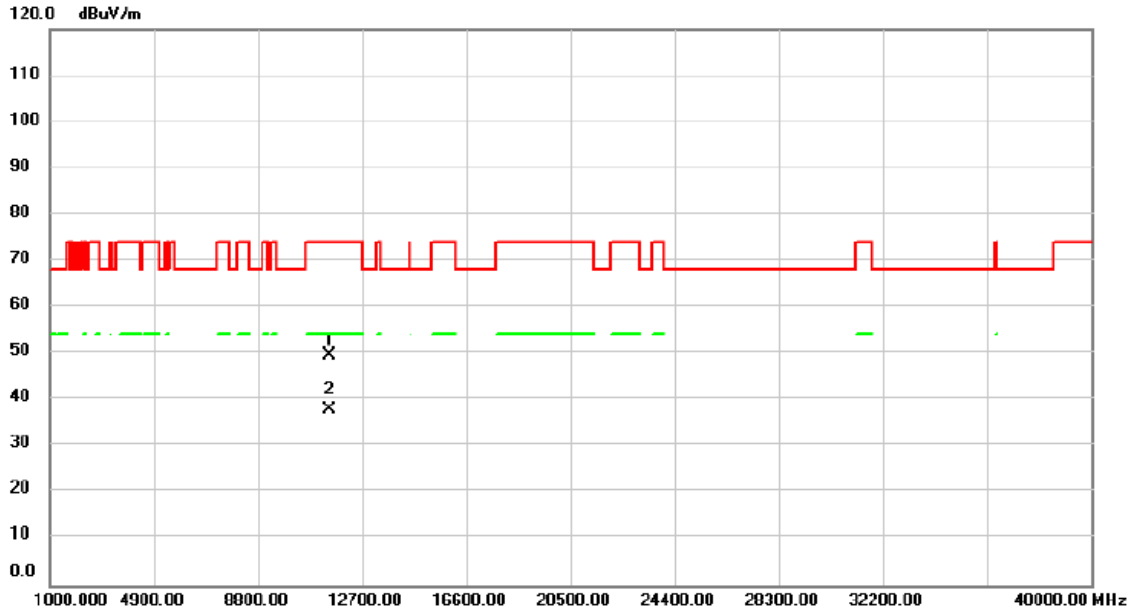


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1		11491.00	44.45	5.12	49.57	74.00	-24.43			peak	
2	*	11491.00	32.78	5.12	37.90	54.00	-16.10			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5795 MHz	Polarization	Vertical

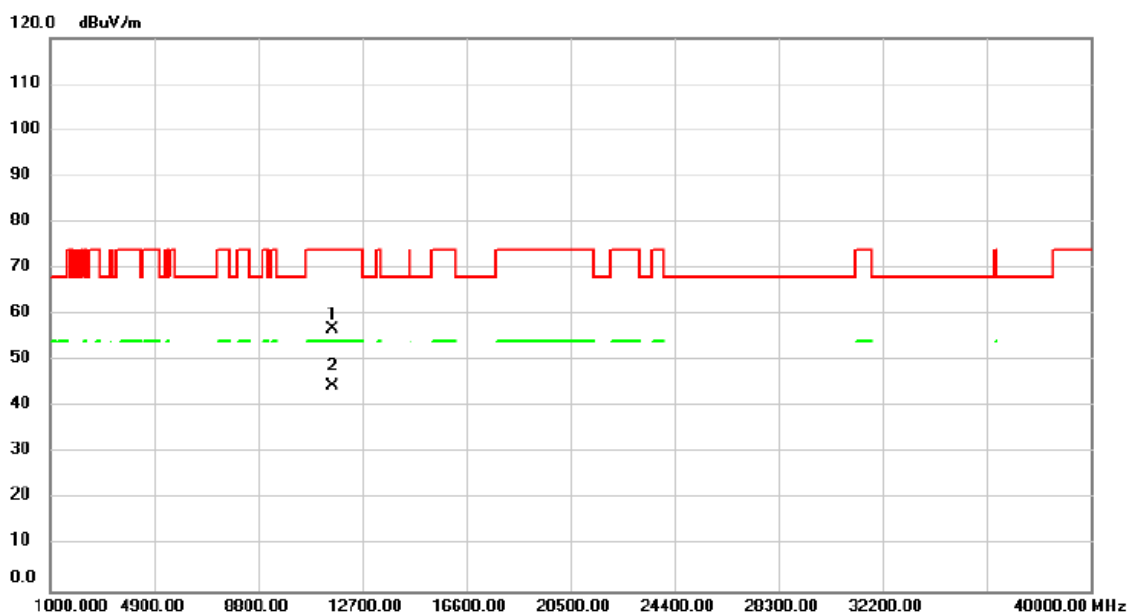


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measurement dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	11569.00	51.59	5.15	56.74	74.00	-17.26	peak			
2 *	11569.00	39.46	5.15	44.61	54.00	-9.39	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11n (HT40)	Test Date	2024/3/17
Test Frequency	5795 MHz	Polarization	Horizontal

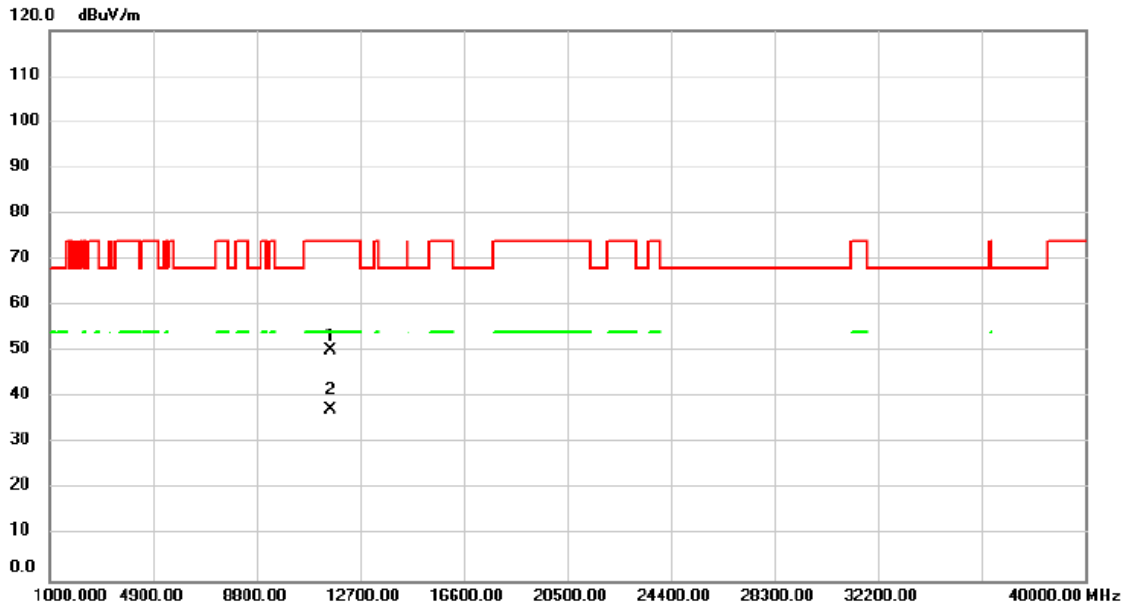


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11569.00	45.06	5.15	50.21	74.00	-23.79			peak
2	*	11569.00	32.20	5.15	37.35	54.00	-16.65			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5210 MHz	Polarization	Vertical

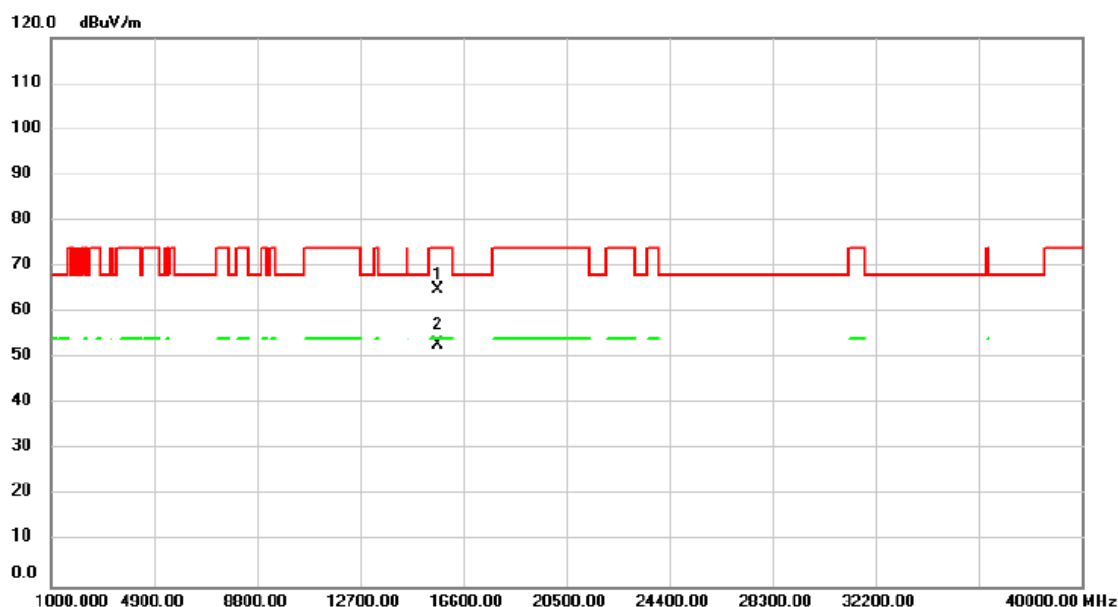


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15625.00	58.09	6.95	65.04	74.00	-8.96			peak
2	*	15625.00	45.90	6.95	52.85	54.00	-1.15			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5210 MHz	Polarization	Horizontal

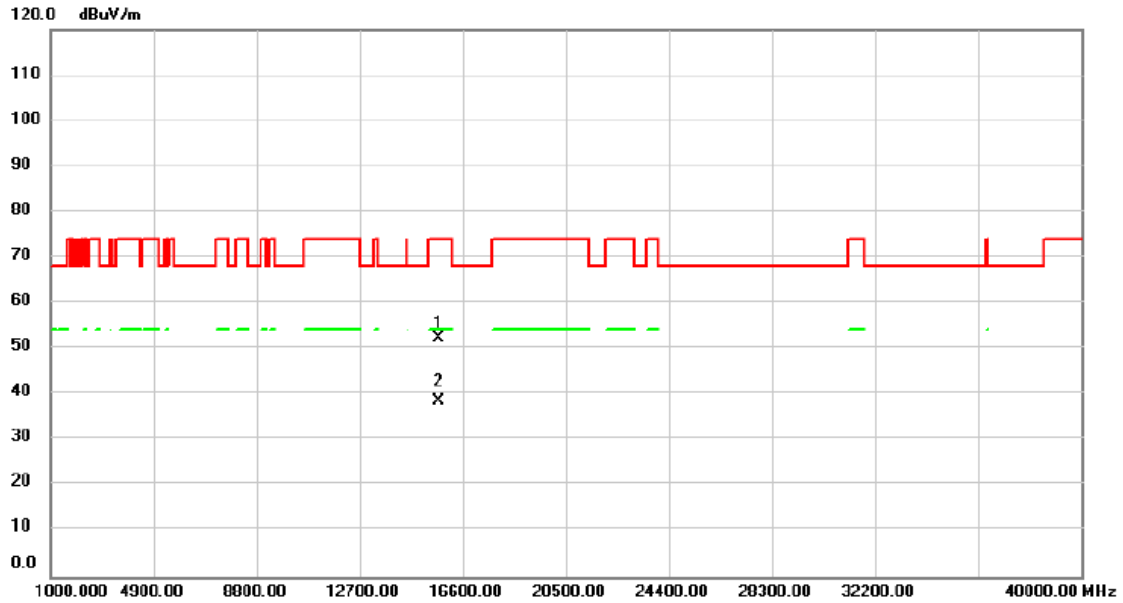


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15664.00	45.38	6.98	52.36	74.00	-21.64			peak
2	*	15664.00	31.66	6.98	38.64	54.00	-15.36			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5290 MHz	Polarization	Vertical

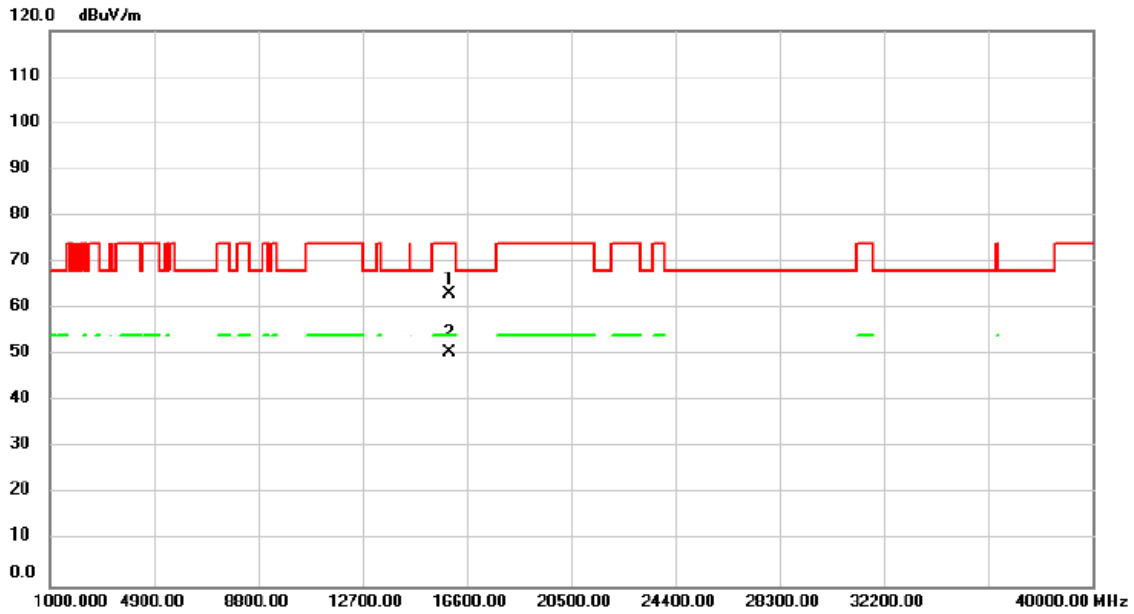


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15937.00	55.78	7.28	63.06	74.00	-10.94			peak
2	*	15937.00	43.41	7.28	50.69	54.00	-3.31			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5290 MHz	Polarization	Horizontal

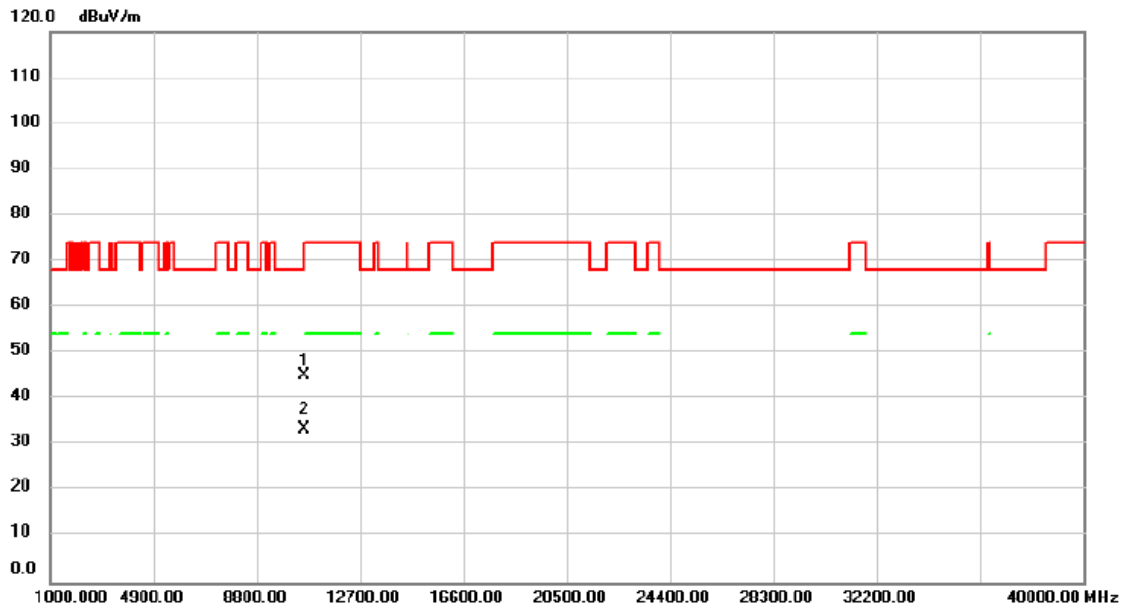


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10580.00	40.80	4.45	45.25	68.20	-22.95			peak
2		10580.00	29.01	4.45	33.46	68.20	-34.74			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5530 MHz	Polarization	Vertical

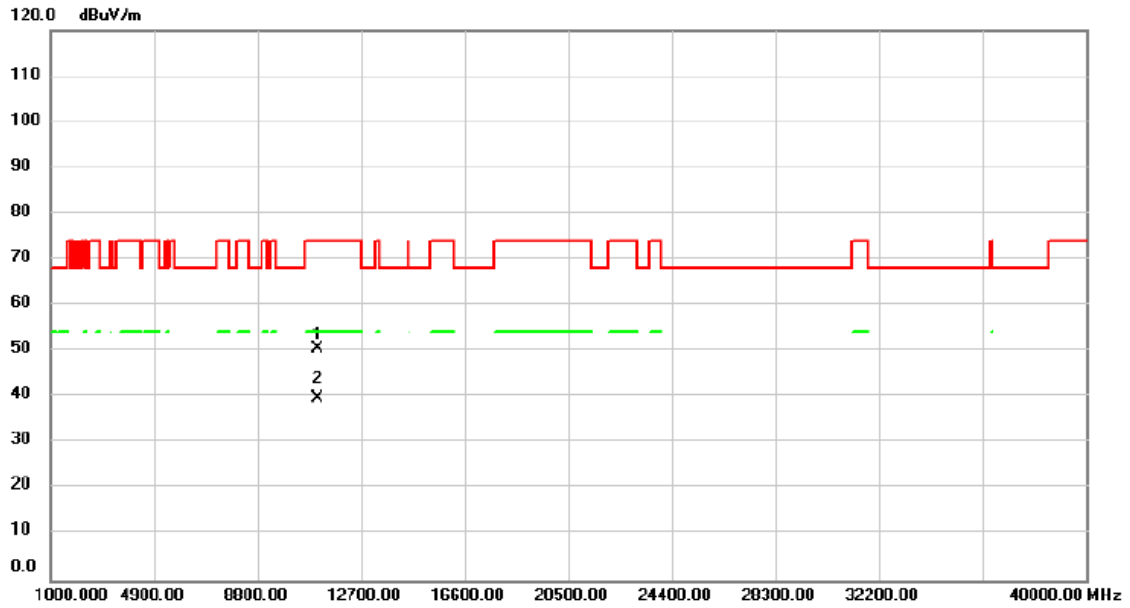


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11062.00	45.94	4.65	50.59	74.00	-23.41			peak
2	*	11062.00	35.07	4.65	39.72	54.00	-14.28			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5530 MHz	Polarization	Horizontal

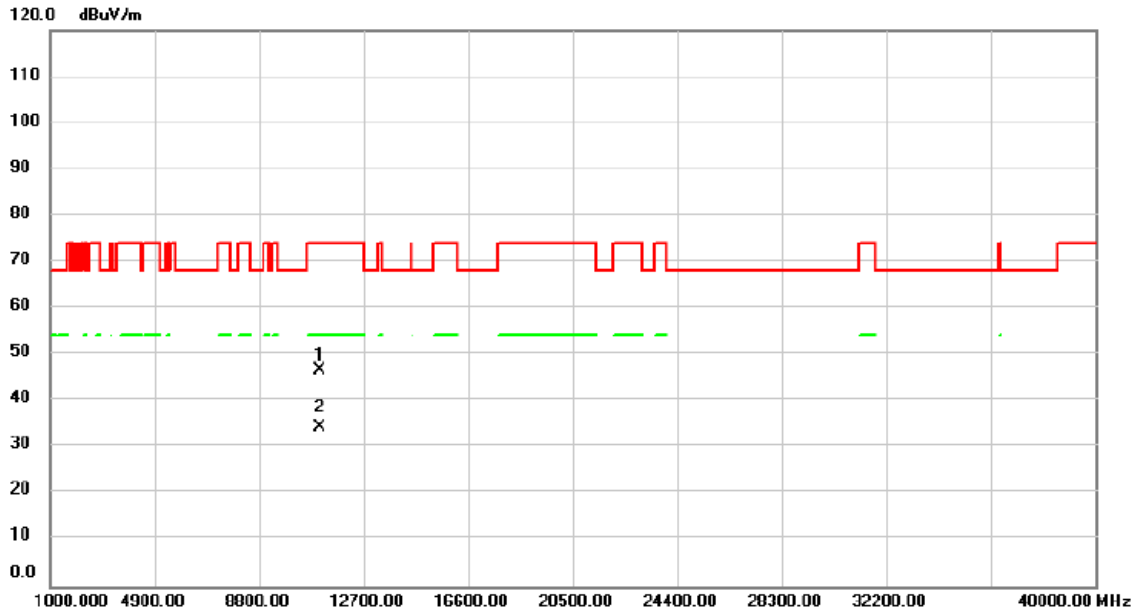


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		11060.00	42.12	4.65	46.77	74.00	-27.23	peak			
2	*	11060.00	29.74	4.65	34.39	54.00	-19.61	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5610 MHz	Polarization	Vertical

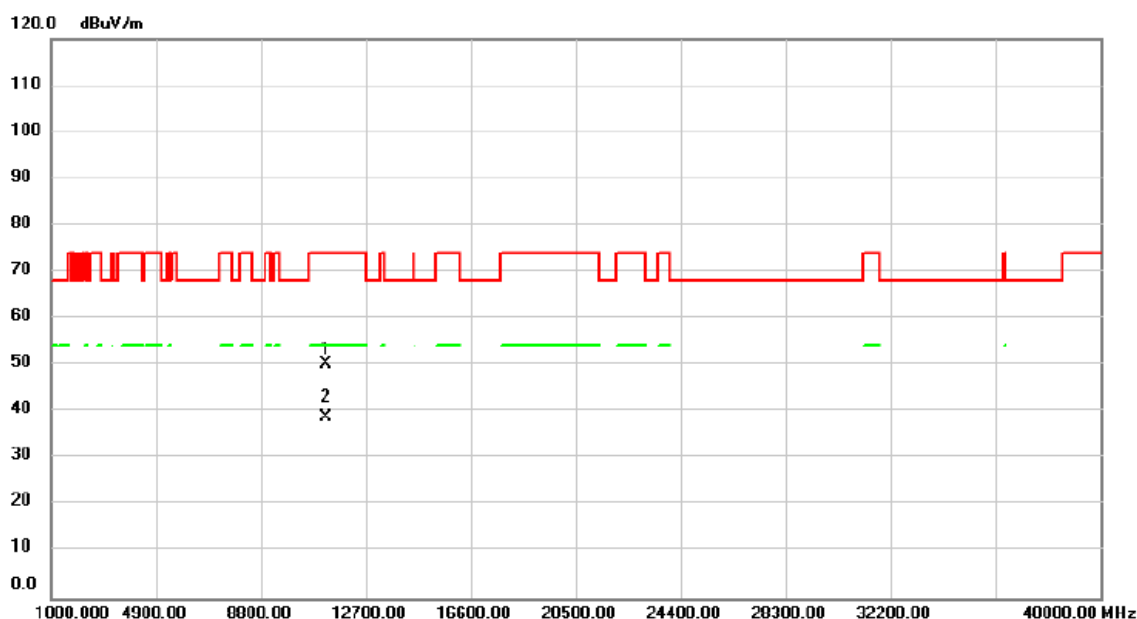


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11218.00	45.34	4.82	50.16	74.00	-23.84	peak			
2	*	11218.00	34.15	4.82	38.97	54.00	-15.03	AVG			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5610 MHz	Polarization	Horizontal

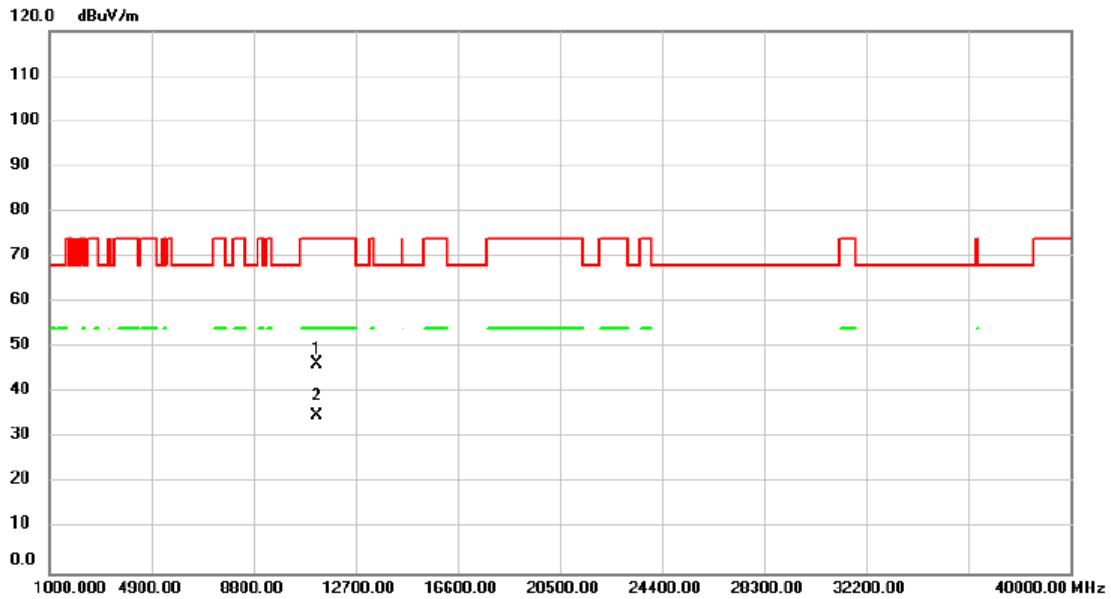


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11220.00	41.38	4.82	46.20	74.00	-27.80			peak
2	*	11220.00	30.06	4.82	34.88	54.00	-19.12			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5775 MHz	Polarization	Vertical

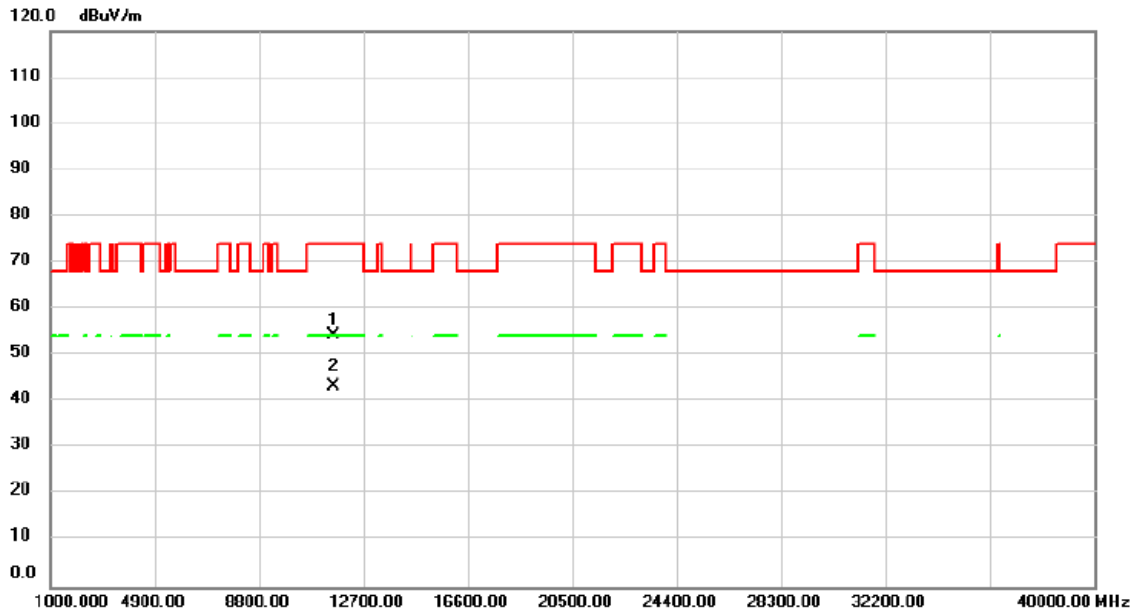


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11569.00	49.27	5.15	54.42	74.00	-19.58	peak		
2	*	11569.00	38.23	5.15	43.38	54.00	-10.62	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2024/3/17
Test Frequency	5775 MHz	Polarization	Horizontal

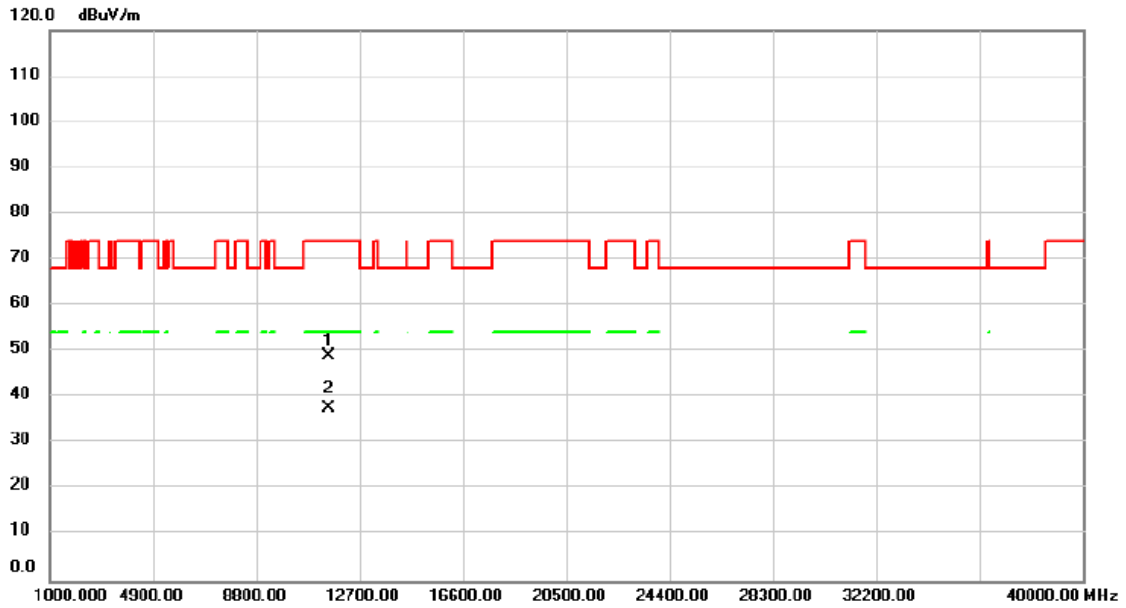


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11530.00	44.01	5.14	49.15	74.00	-24.85	peak			
2	*	11530.00	32.43	5.14	37.57	54.00	-16.43	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5180 MHz	Polarization	Vertical

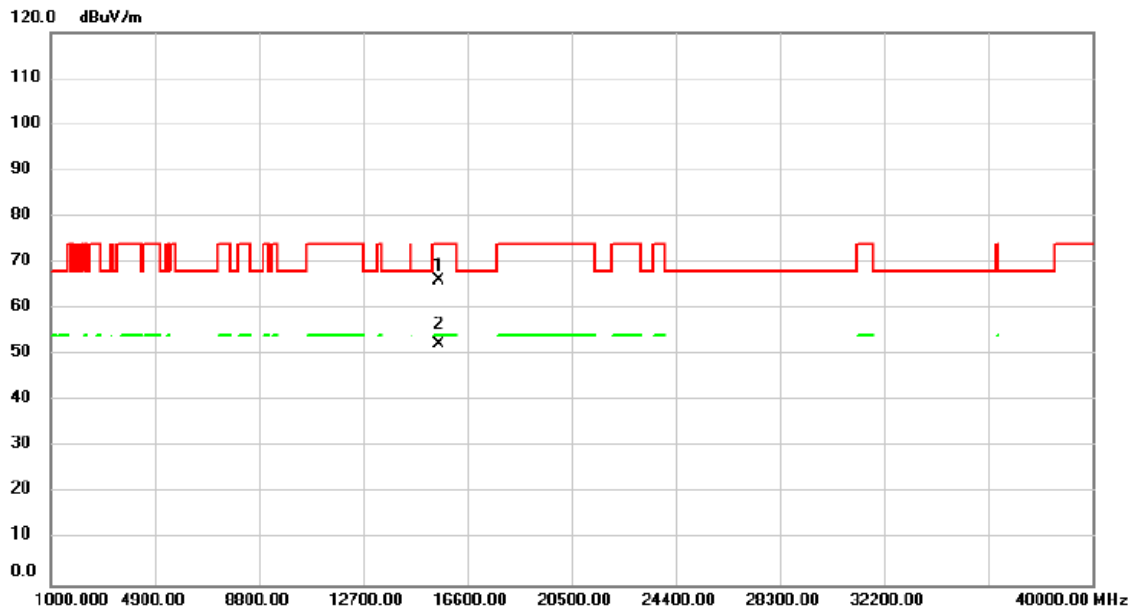


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15547.00	59.20	6.87	66.07	74.00	-7.93			peak
2	*	15547.00	45.53	6.87	52.40	54.00	-1.60			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5180 MHz	Polarization	Horizontal

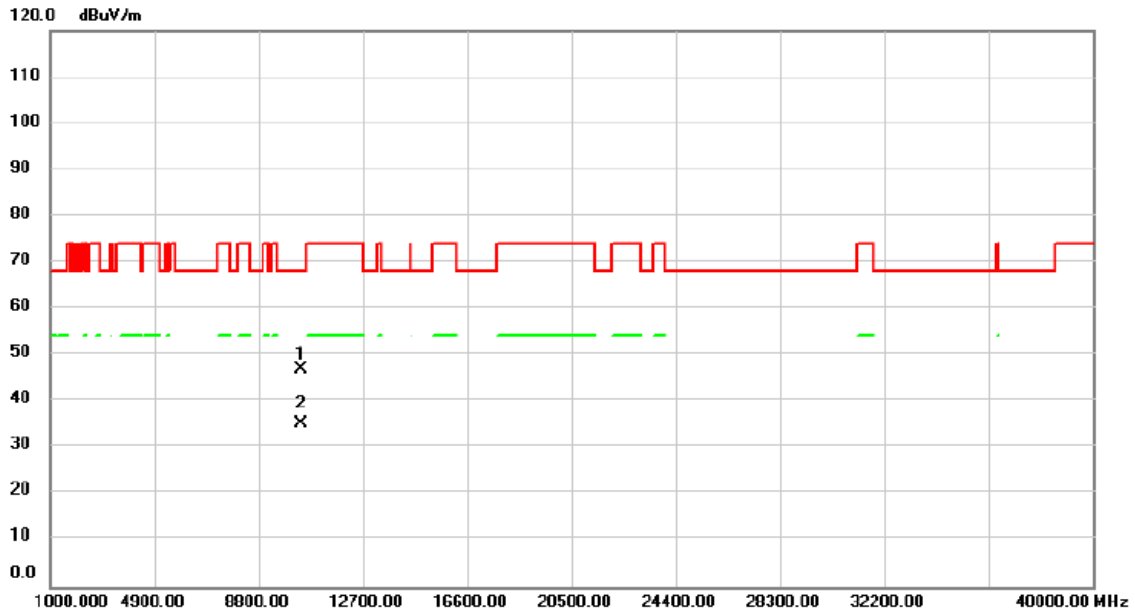


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10360.00	42.57	4.41	46.98	68.20	-21.22			peak
2		10360.00	30.87	4.41	35.28	68.20	-32.92			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5200 MHz	Polarization	Vertical

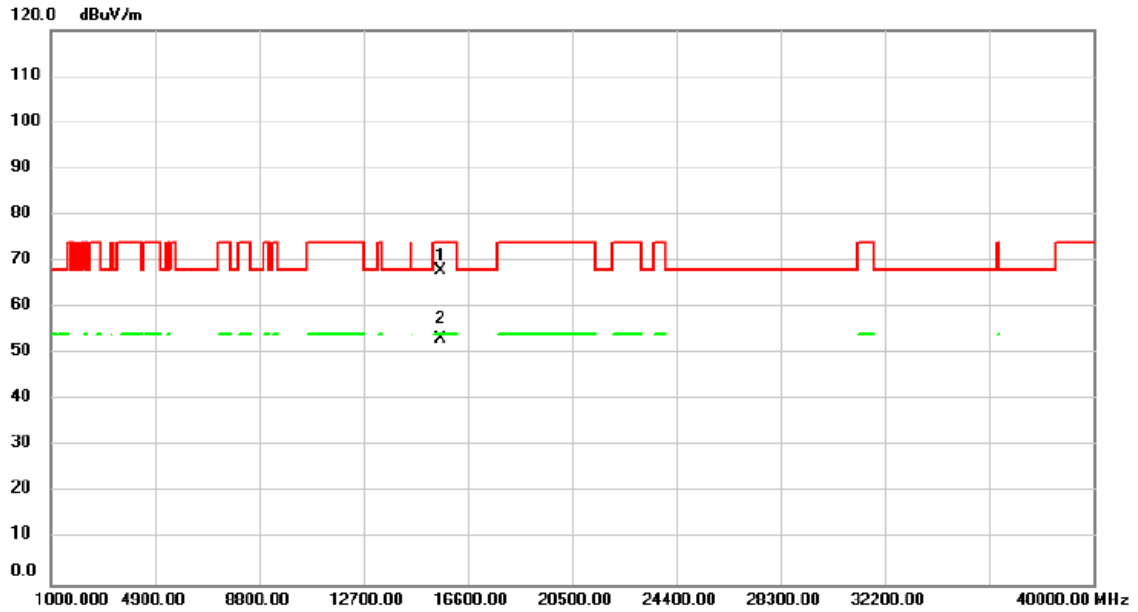


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15586.00	60.90	6.91	67.81	74.00	-6.19			peak
2	*	15586.00	46.20	6.91	53.11	54.00	-0.89			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5200 MHz	Polarization	Horizontal

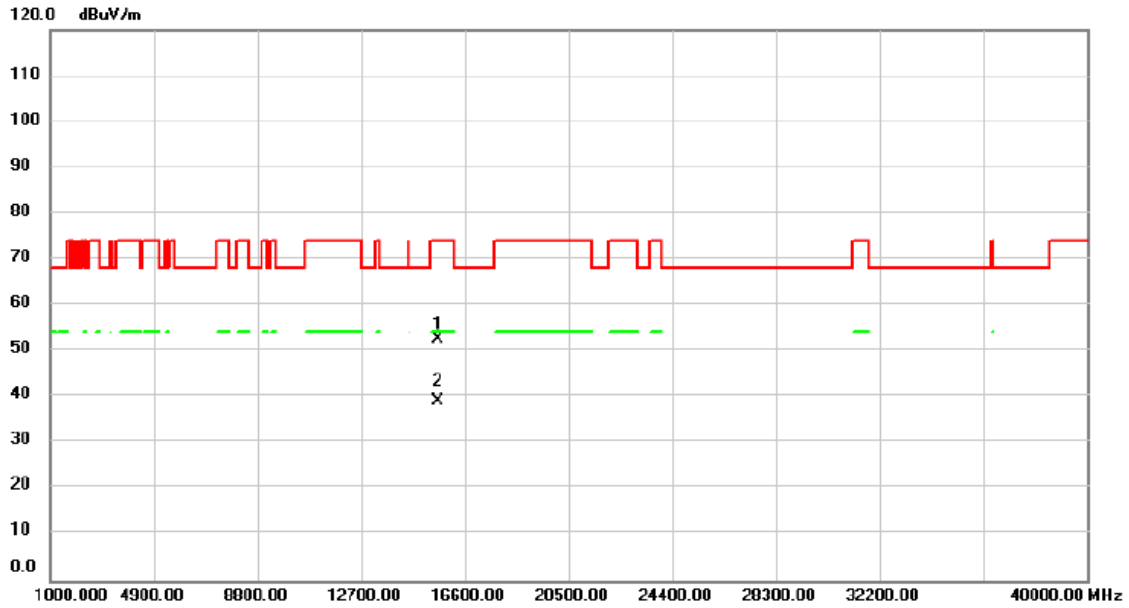


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		15586.00	45.69	6.91	52.60	74.00	-21.40	peak		
2	*	15586.00	32.13	6.91	39.04	54.00	-14.96	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5240 MHz	Polarization	Vertical

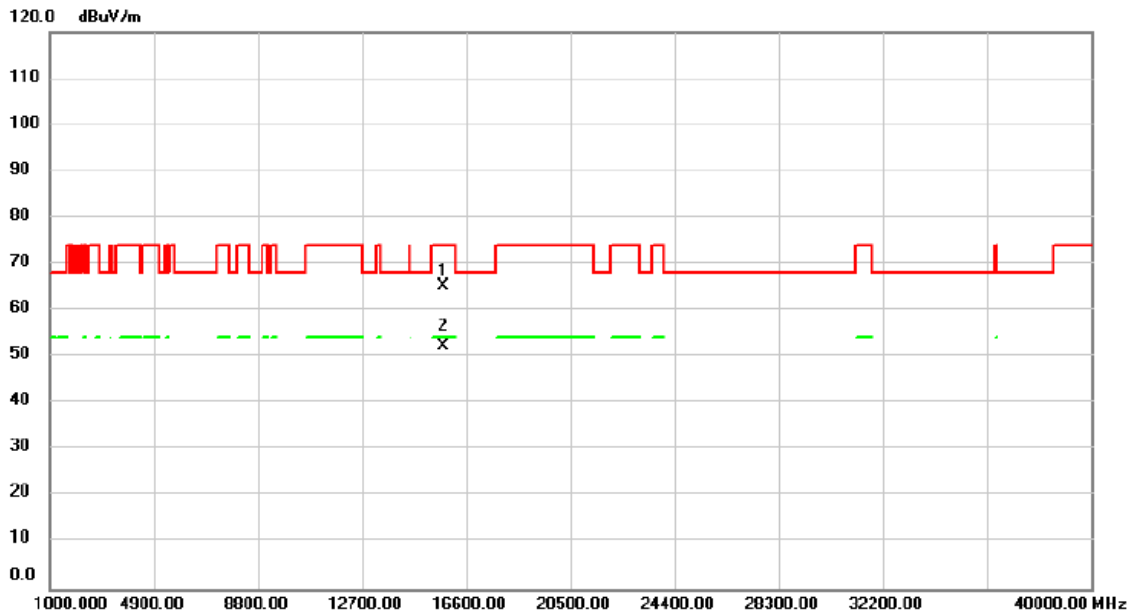


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		15742.00	58.29	7.08	65.37	74.00	-8.63	peak			
2	*	15742.00	45.41	7.08	52.49	54.00	-1.51	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5240 MHz	Polarization	Horizontal

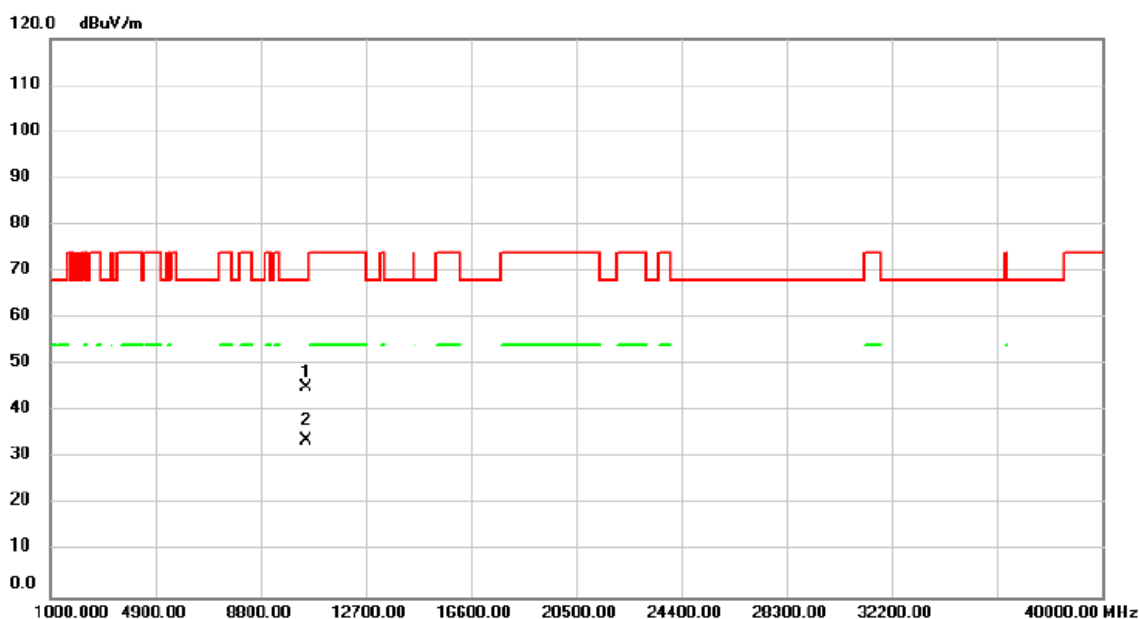


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	10480.00	40.88	4.42	45.30	68.20	-22.90			peak	
2		10480.00	29.45	4.42	33.87	68.20	-34.33			AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5260 MHz	Polarization	Vertical

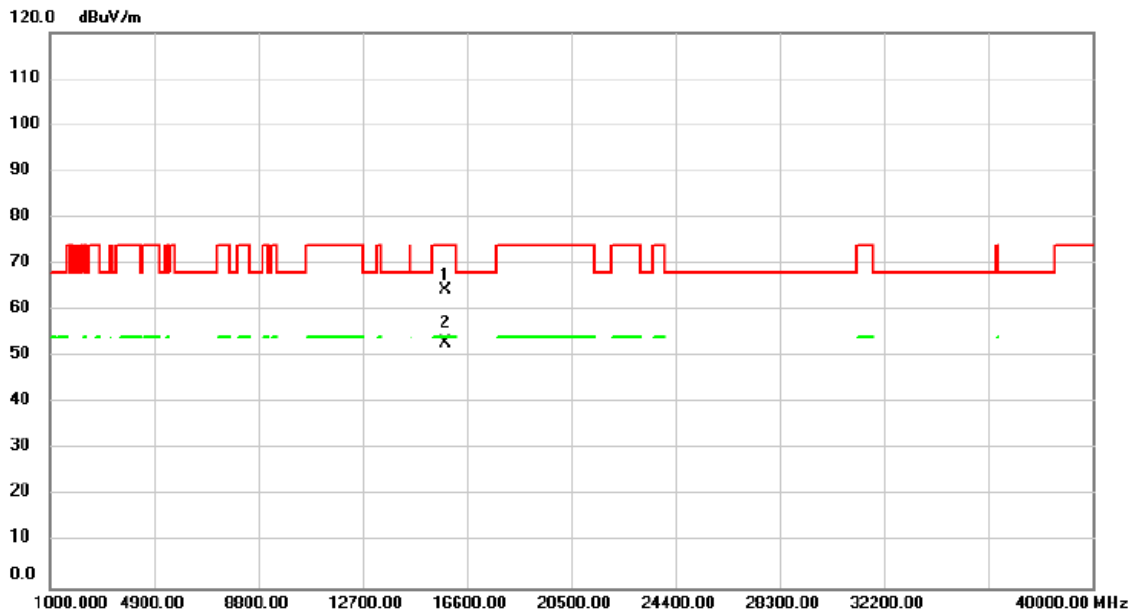


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Detector	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree		
1		15781.00	57.22	7.12	64.34	74.00	-9.66			peak	
2	*	15781.00	45.75	7.12	52.87	54.00	-1.13			AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5260 MHz	Polarization	Horizontal

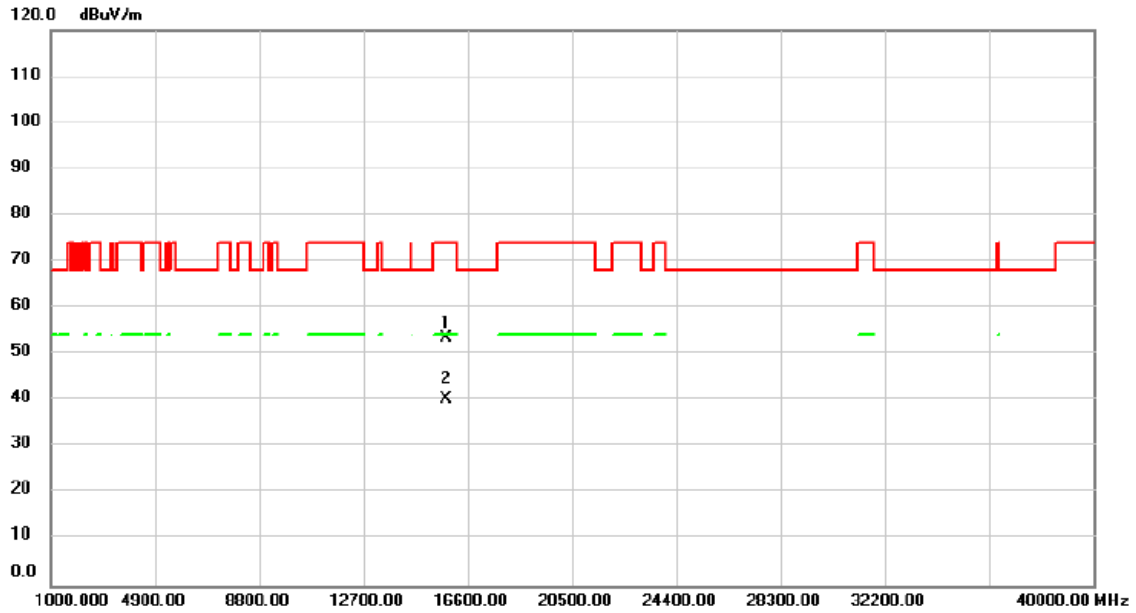


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		15781.00	46.44	7.12	53.56	74.00	-20.44	peak		
2	*	15781.00	33.19	7.12	40.31	54.00	-13.69	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5300 MHz	Polarization	Vertical

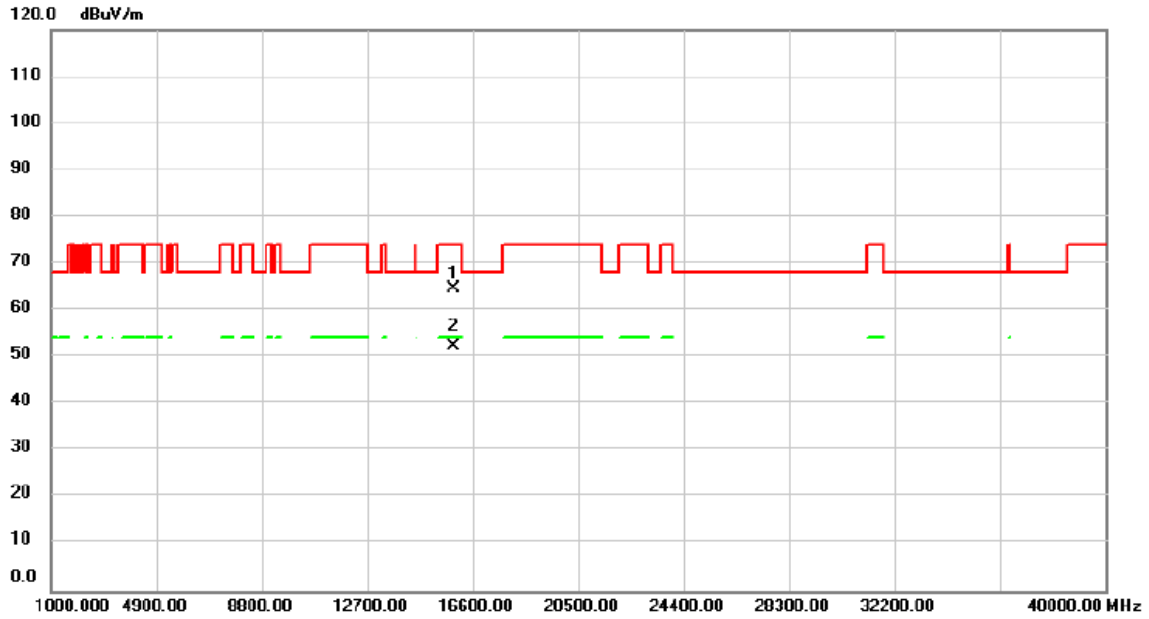


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		15898.00	57.49	7.24	64.73	74.00	-9.27	peak			
2	*	15898.00	45.17	7.24	52.41	54.00	-1.59	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5300 MHz	Polarization	Horizontal

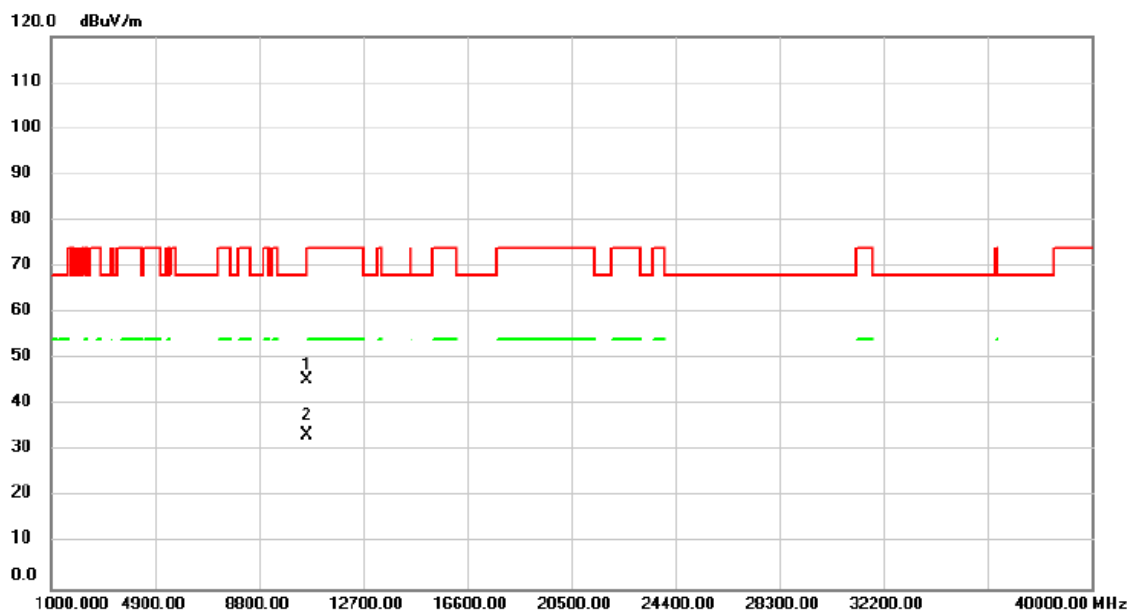


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10600.00	40.87	4.46	45.33	68.20	-22.87			peak
2	*	10600.00	28.93	4.46	33.39	54.00	-20.61			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5320 MHz	Polarization	Vertical

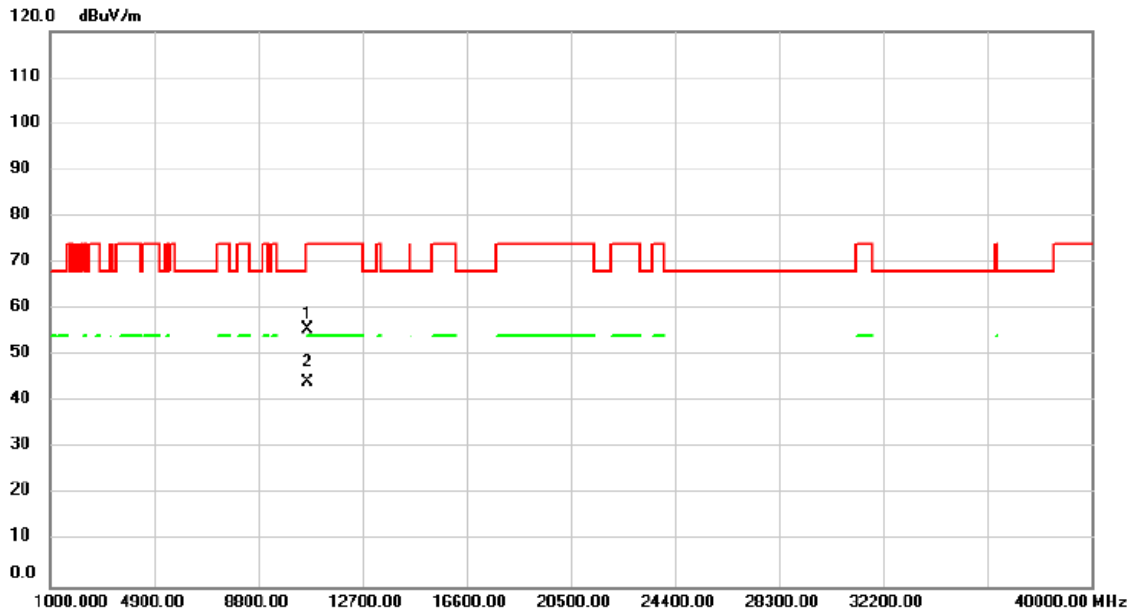


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10633.00	51.23	4.46	55.69	74.00	-18.31			peak
2	*	10633.00	39.67	4.46	44.13	54.00	-9.87			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5320 MHz	Polarization	Horizontal

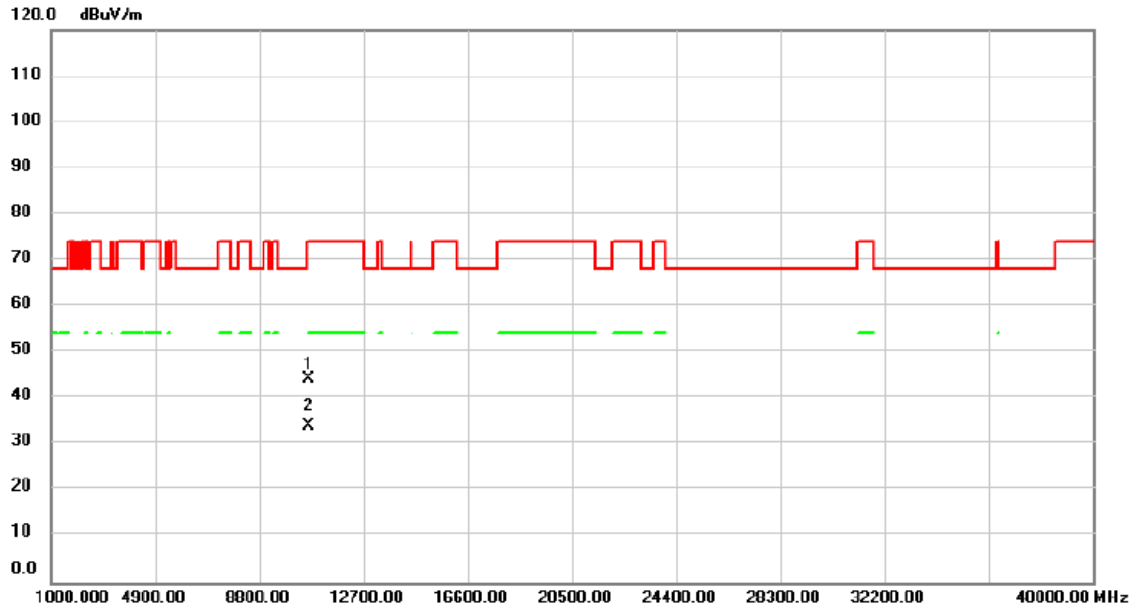


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		10640.00	39.84	4.46	44.30	74.00	-29.70			peak
2	*	10640.00	29.55	4.46	34.01	54.00	-19.99			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5500 MHz	Polarization	Vertical

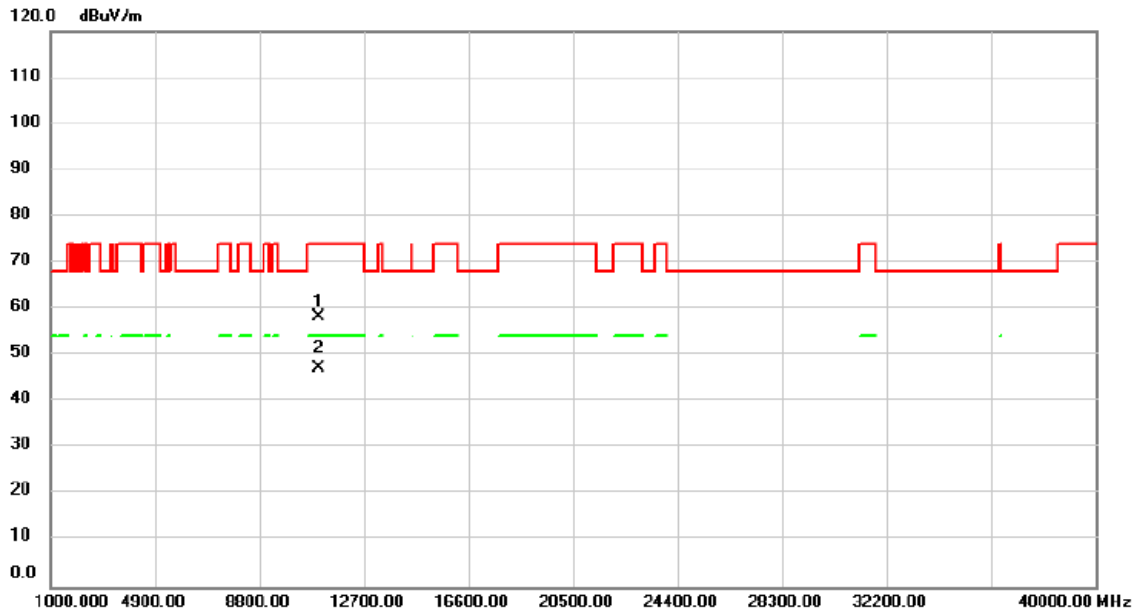


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		10984.00	53.64	4.57	58.21	74.00	-15.79	peak			
2	*	10984.00	42.73	4.57	47.30	54.00	-6.70	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5500 MHz	Polarization	Horizontal

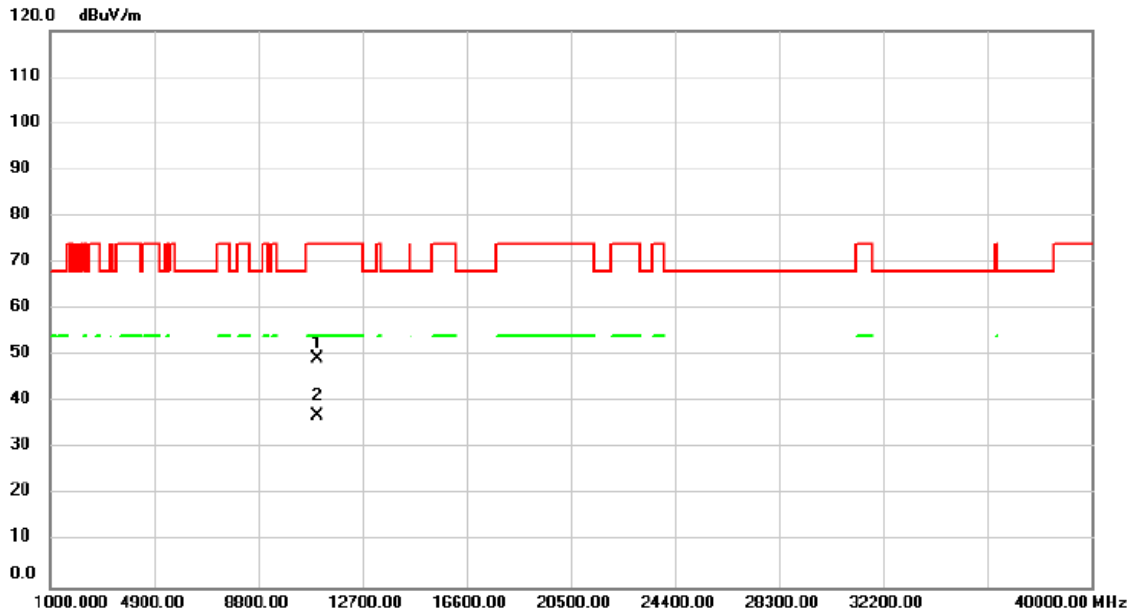


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		10984.00	44.68	4.57	49.25	74.00	-24.75	peak		
2	*	10984.00	32.53	4.57	37.10	54.00	-16.90	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5580 MHz	Polarization	Vertical

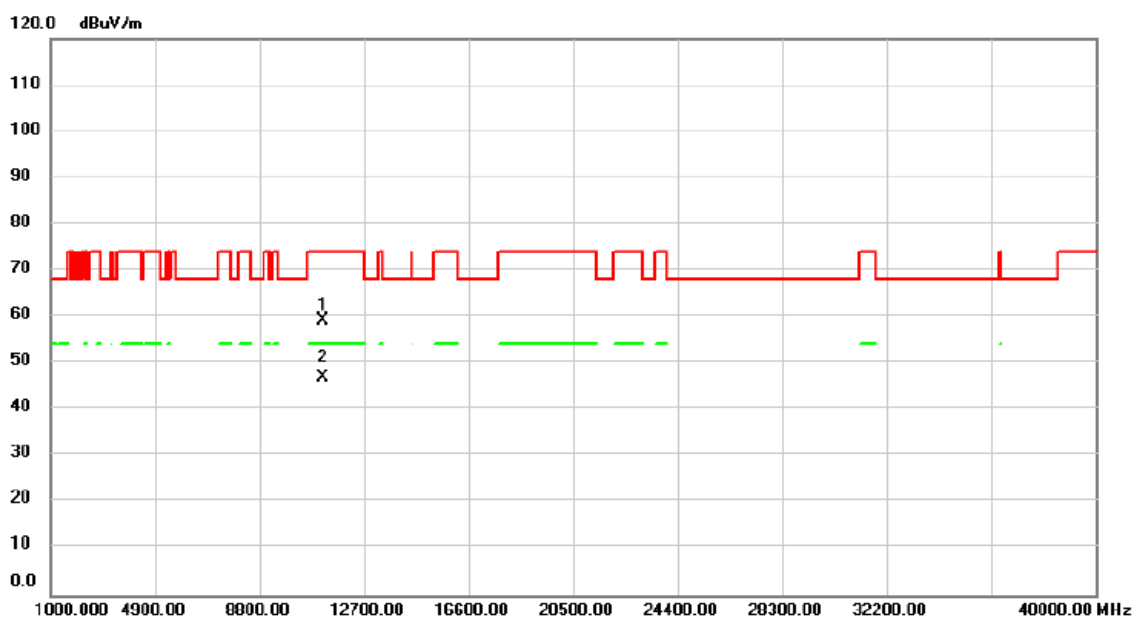


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11179.00	54.59	4.77	59.36	74.00	-14.64			peak
2	*	11179.00	42.18	4.77	46.95	54.00	-7.05			AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5580 MHz	Polarization	Horizontal

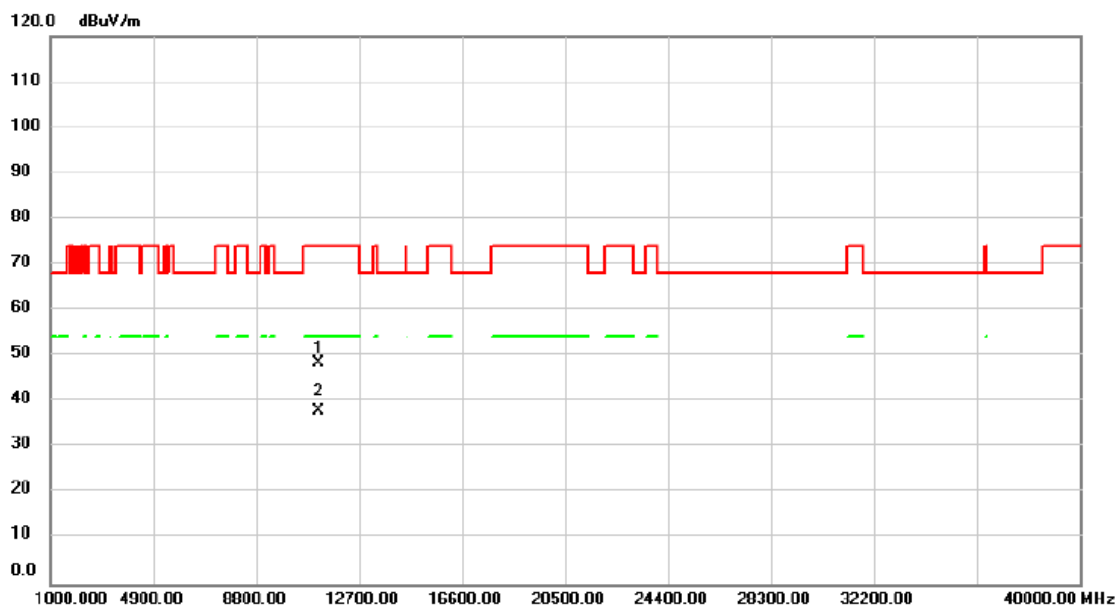


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11140.00	43.72	4.73	48.45	74.00	-25.55	peak			
2	*	11140.00	33.21	4.73	37.94	54.00	-16.06	AVG			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5700 MHz	Polarization	Vertical

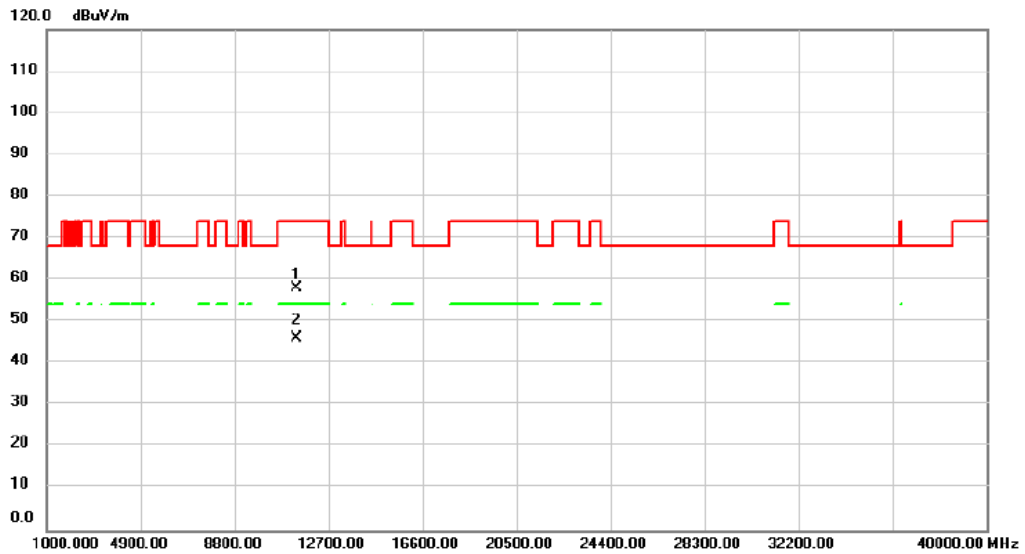


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11374.00	53.05	4.99	58.04	74.00	-15.96	peak			
2	*	11374.00	40.99	4.99	45.98	54.00	-8.02	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5700 MHz	Polarization	Horizontal

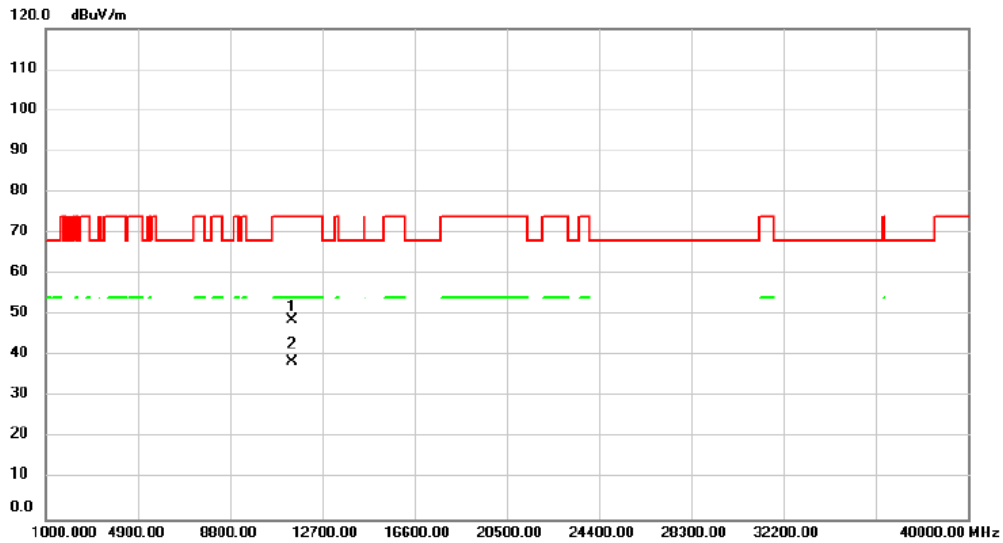


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11413.00	43.63	5.03	48.66	74.00	-25.34	peak		
2	*	11413.00	33.57	5.03	38.60	54.00	-15.40	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5745 MHz	Polarization	Vertical

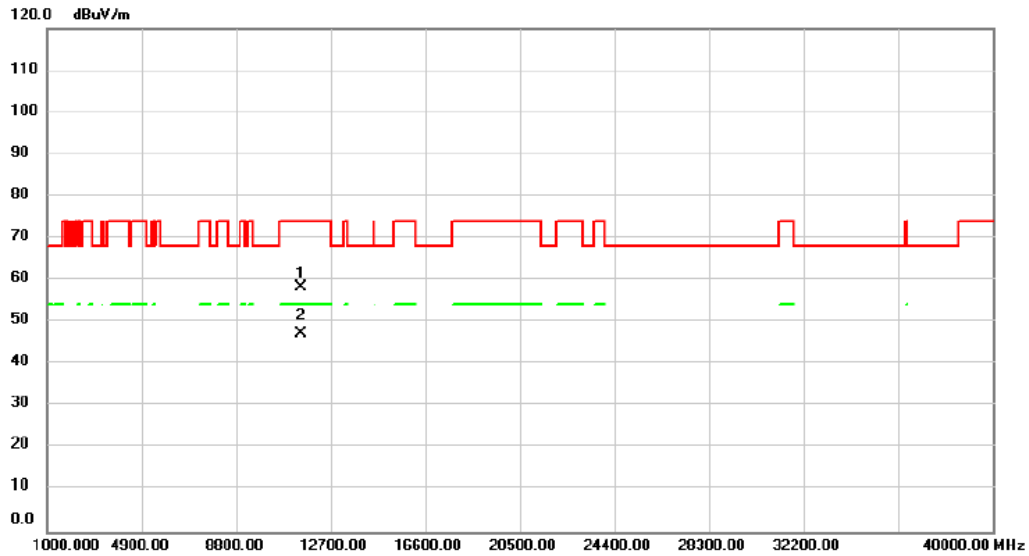


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		11491.00	53.33	5.12	58.45	74.00	-15.55	peak		
2	*	11491.00	42.15	5.12	47.27	54.00	-6.73	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5745 MHz	Polarization	Horizontal

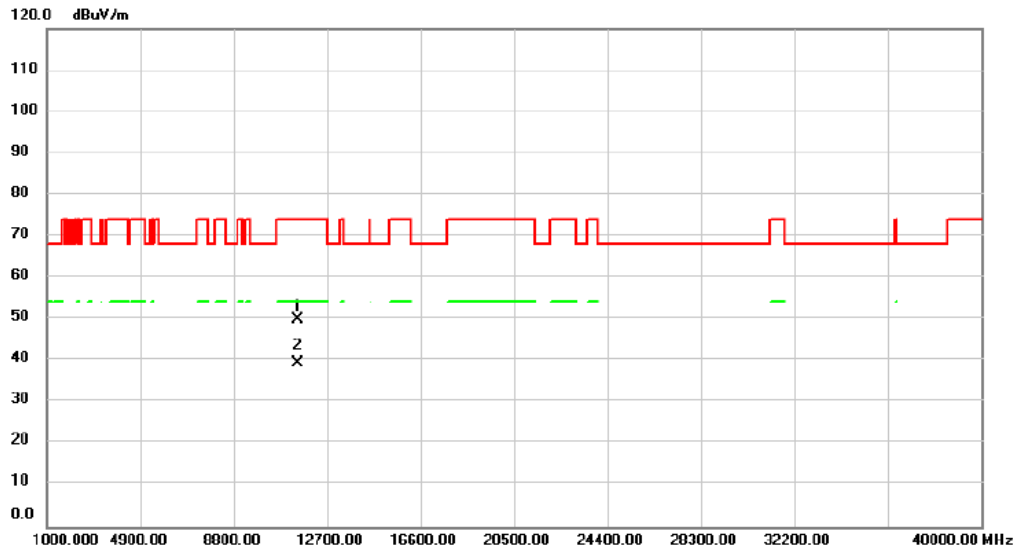


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11491.00	44.98	5.12	50.10	74.00	-23.90	peak			
2	*	11491.00	34.47	5.12	39.59	54.00	-14.41	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5785 MHz	Polarization	Vertical

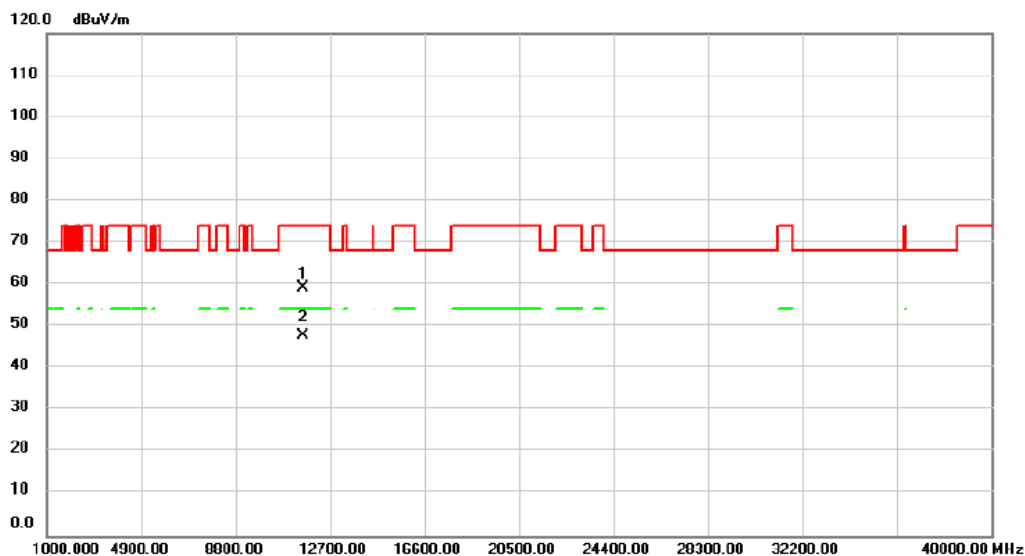


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11569.00	54.09	5.15	59.24	74.00	-14.76	peak		
2	*	11569.00	42.71	5.15	47.86	54.00	-6.14	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5785 MHz	Polarization	Horizontal

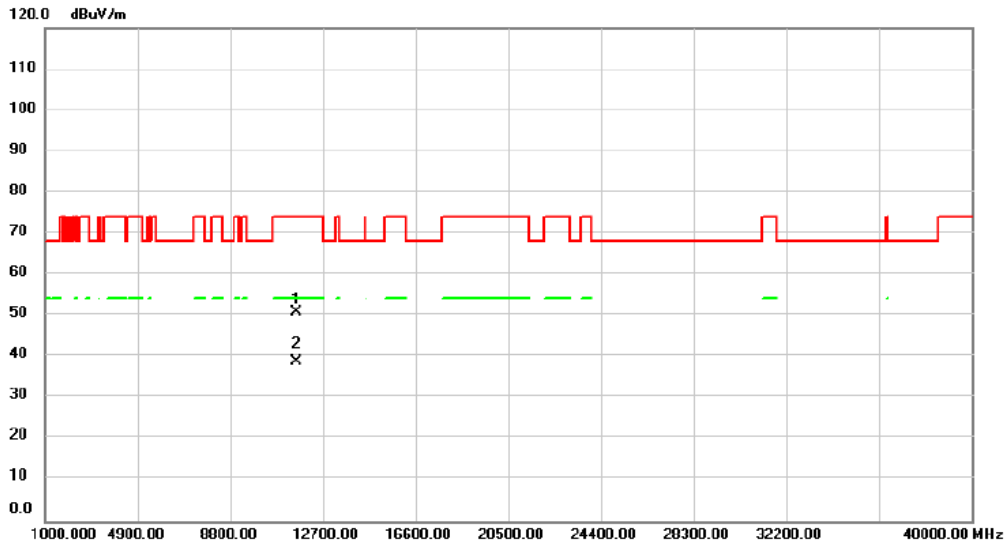


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11569.00	45.67	5.15	50.82	74.00	-23.18			peak
2	*	11569.00	33.58	5.15	38.73	54.00	-15.27			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5825 MHz	Polarization	Vertical

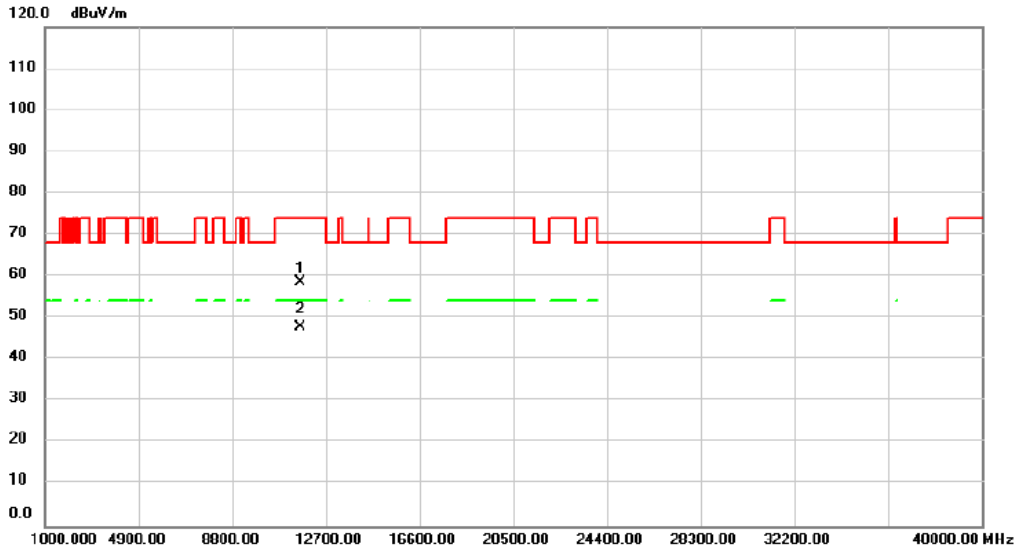


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11647.00	53.56	5.17	58.73	74.00	-15.27	peak			
2	*	11647.00	42.64	5.17	47.81	54.00	-6.19	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE20)	Test Date	2024/3/17
Test Frequency	5825 MHz	Polarization	Horizontal

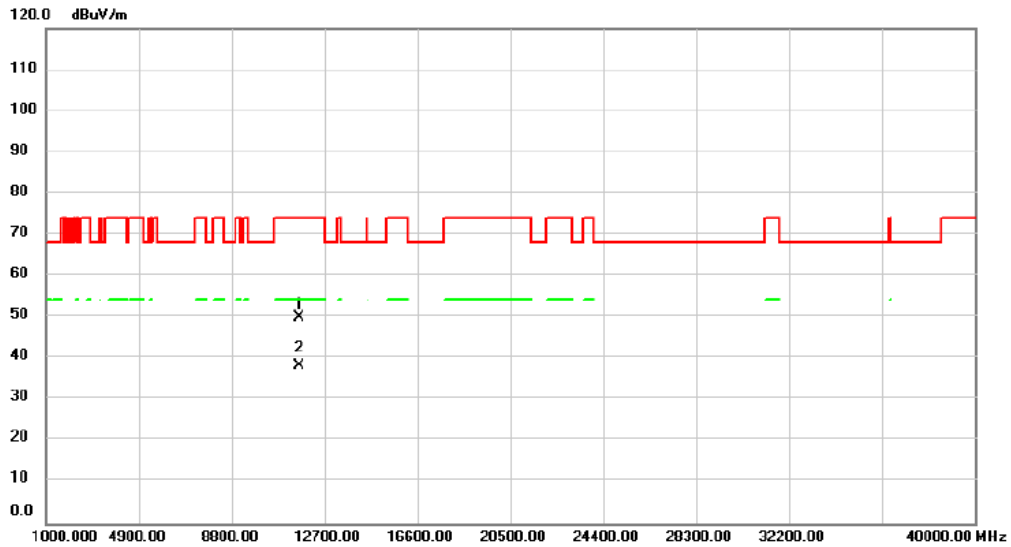


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11647.00	44.93	5.17	50.10	74.00	-23.90	peak		
2	*	11647.00	33.14	5.17	38.31	54.00	-15.69	AVG		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5190 MHz	Polarization	Vertical

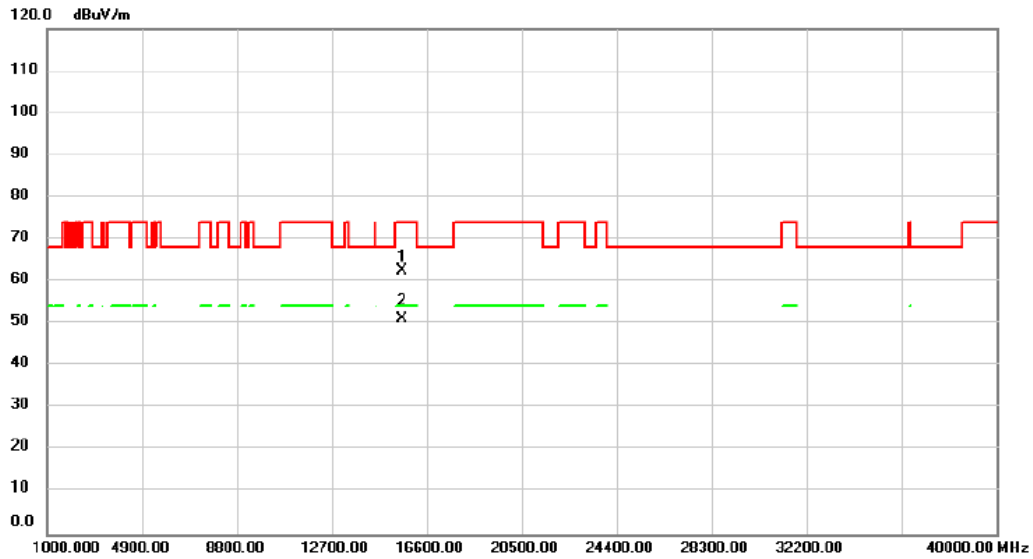


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	15586.00	55.63	6.91	62.54	74.00	-11.46	peak			
2 *	15586.00	44.15	6.91	51.06	54.00	-2.94	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5190 MHz	Polarization	Horizontal

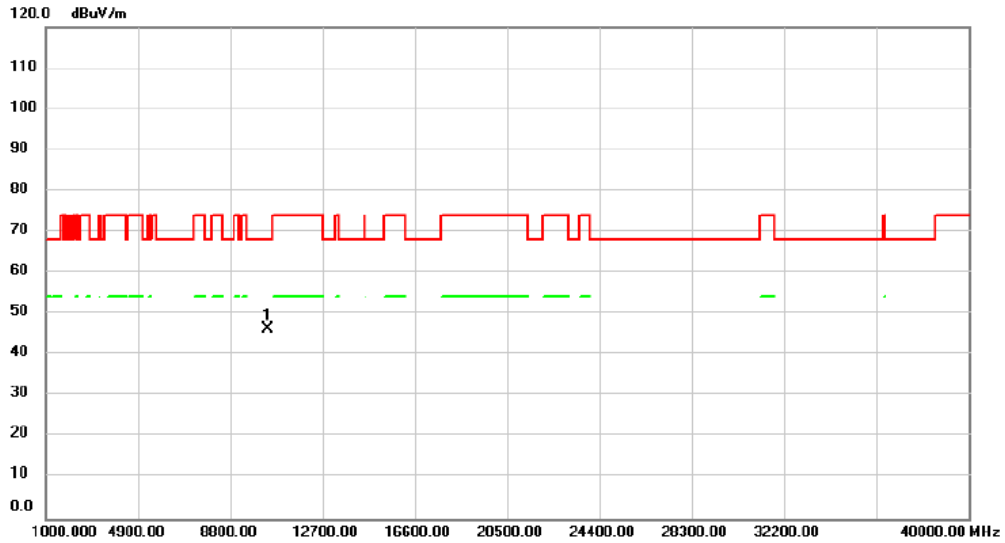


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1	*	10380.00	41.99	4.42	46.41	68.20	-21.79	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5230 MHz	Polarization	Vertical

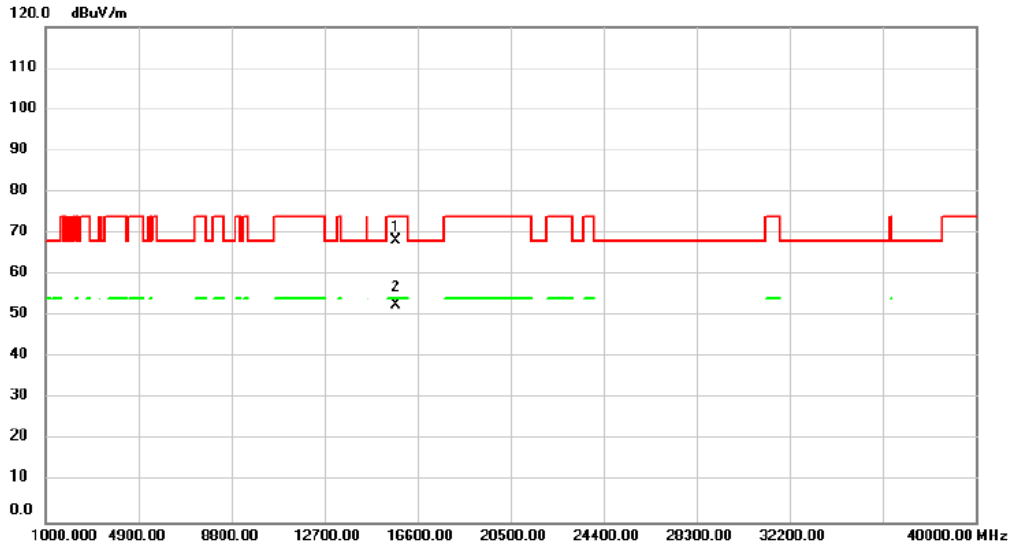


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	Comment
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	
1		15703.00	61.14	7.02	68.16	74.00	-5.84			peak
2	*	15703.00	45.55	7.02	52.57	54.00	-1.43			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5230 MHz	Polarization	Horizontal

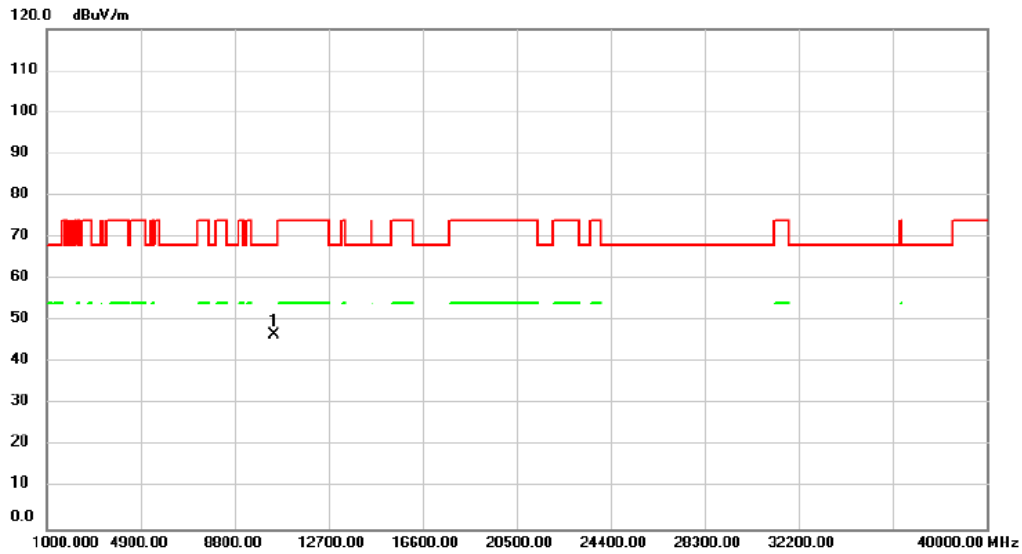


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10460.00	42.14	4.41	46.55	68.20	-21.65			peak

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5270 MHz	Polarization	Vertical

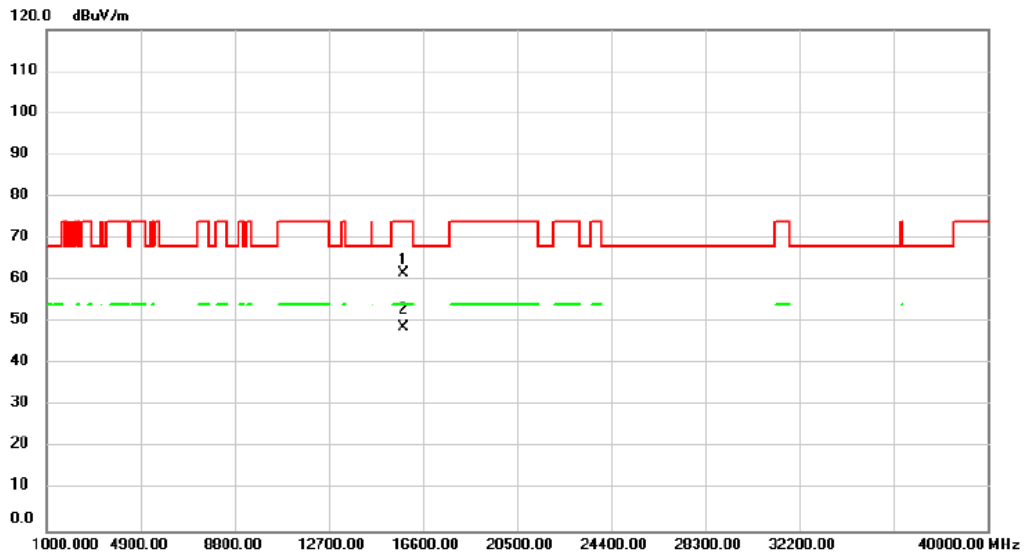


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		15781.00	54.48	7.12	61.60	74.00	-12.40	peak			
2	*	15781.00	41.56	7.12	48.68	54.00	-5.32	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5270 MHz	Polarization	Horizontal

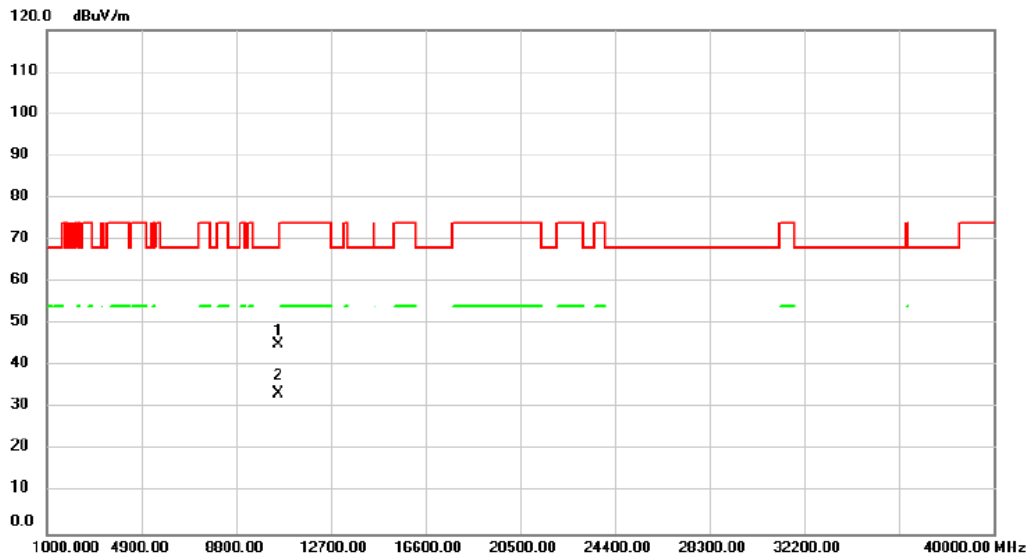


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10540.00	40.63	4.44	45.07	68.20	-23.13			peak
2		10540.00	29.01	4.44	33.45	68.20	-34.75			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5310 MHz	Polarization	Vertical

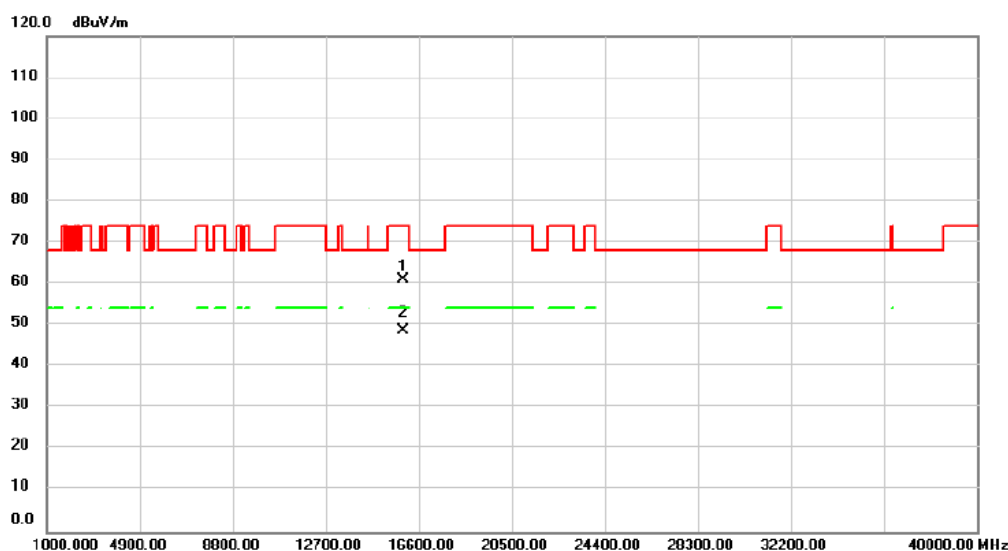


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	15937.00	53.91	7.28	61.19	74.00	-12.81	peak			
2 *	15937.00	41.36	7.28	48.64	54.00	-5.36	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5310 MHz	Polarization	Horizontal

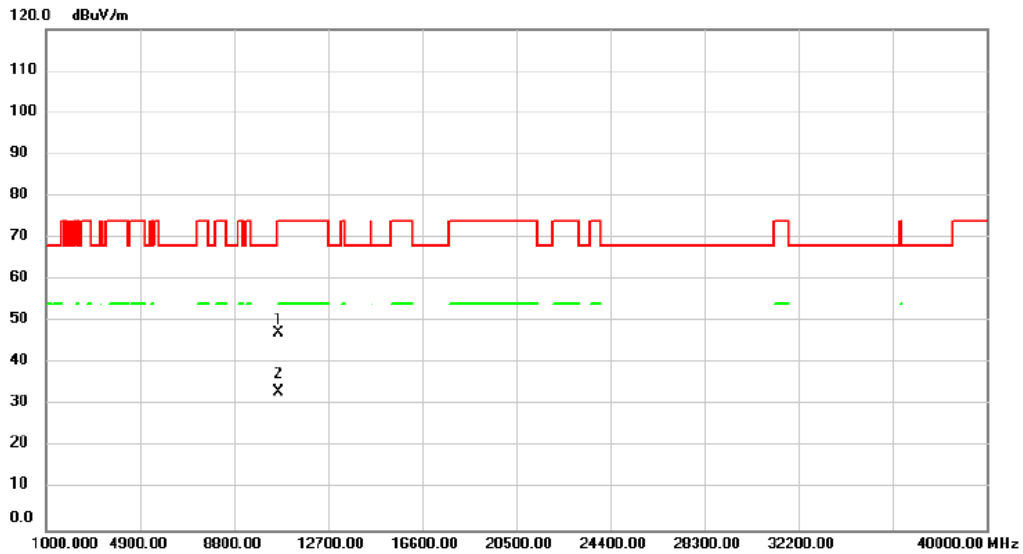


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		10620.00	42.79	4.47	47.26	74.00	-26.74	peak			
2	*	10620.00	28.67	4.47	33.14	54.00	-20.86	AVG			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5510 MHz	Polarization	Vertical

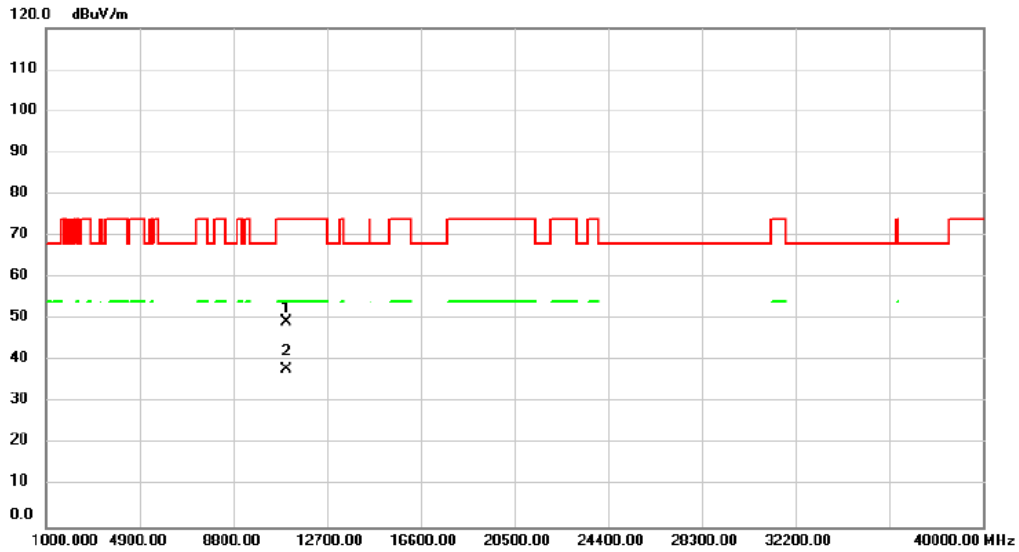


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1	11020.00	44.80	4.61	49.41	74.00	-24.59	peak			
2 *	11020.00	33.32	4.61	37.93	54.00	-16.07	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5510 MHz	Polarization	Horizontal

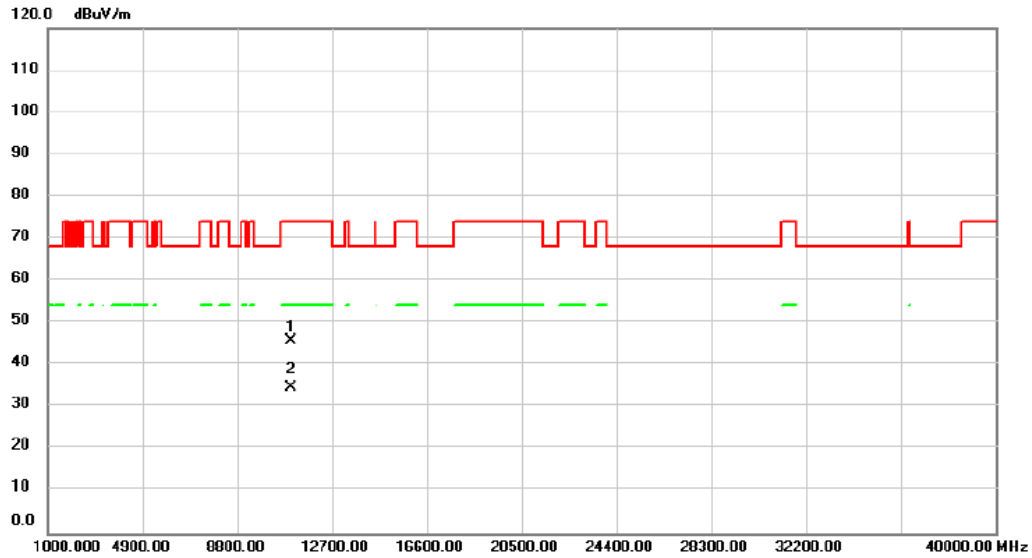


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11020.00	41.22	4.61	45.83	74.00	-28.17			peak
2	*	11020.00	29.90	4.61	34.51	54.00	-19.49			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5550 MHz	Polarization	Vertical

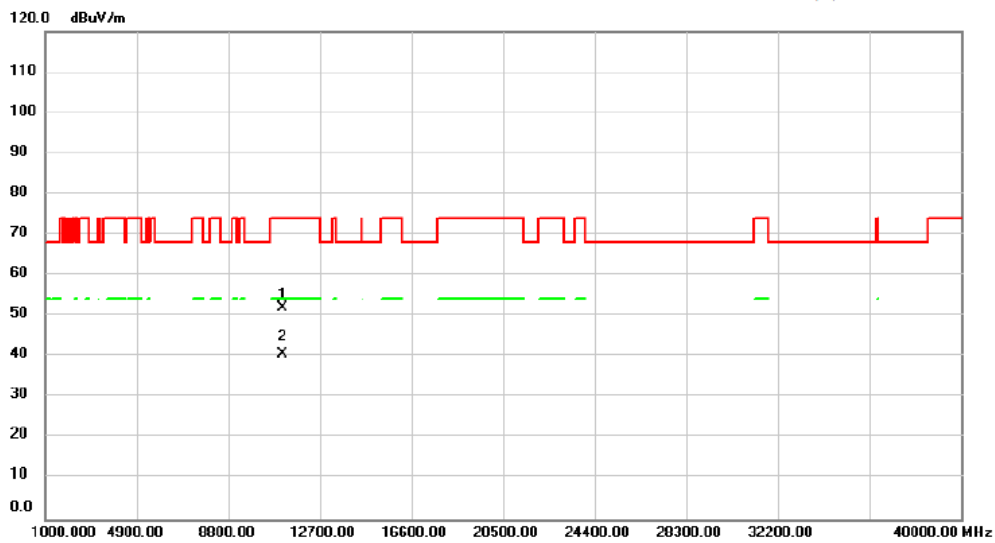


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11101.00	47.33	4.69	52.02	74.00	-21.98			peak
2	*	11101.00	35.95	4.69	40.64	54.00	-13.36			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5550 MHz	Polarization	Horizontal

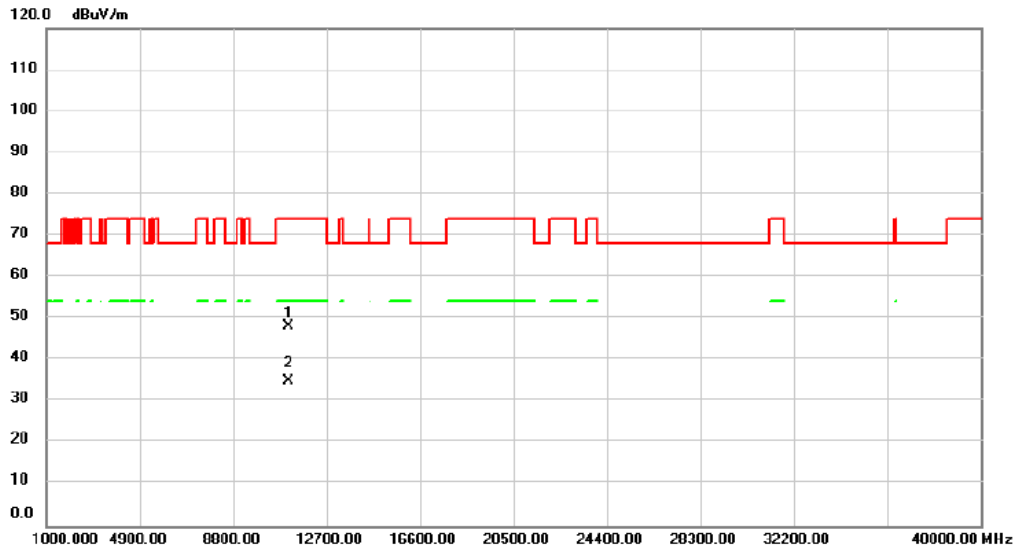


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11100.00	43.35	4.69	48.04	74.00	-25.96	peak			
2	*	11100.00	30.23	4.69	34.92	54.00	-19.08	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5670 MHz	Polarization	Vertical

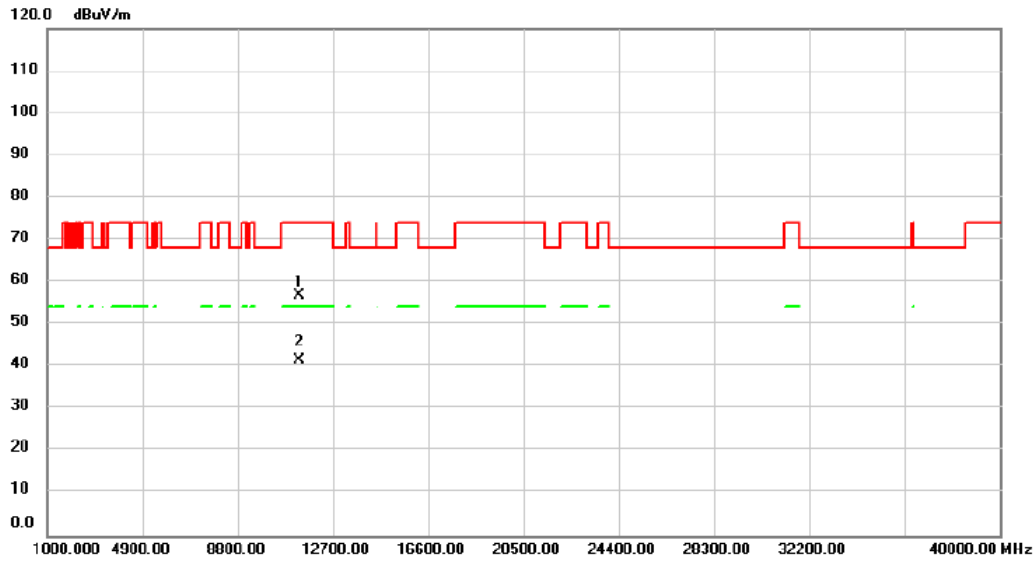


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11335.00	52.03	4.94	56.97	74.00	-17.03			peak
2	*	11335.00	36.55	4.94	41.49	54.00	-12.51			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5670 MHz	Polarization	Horizontal

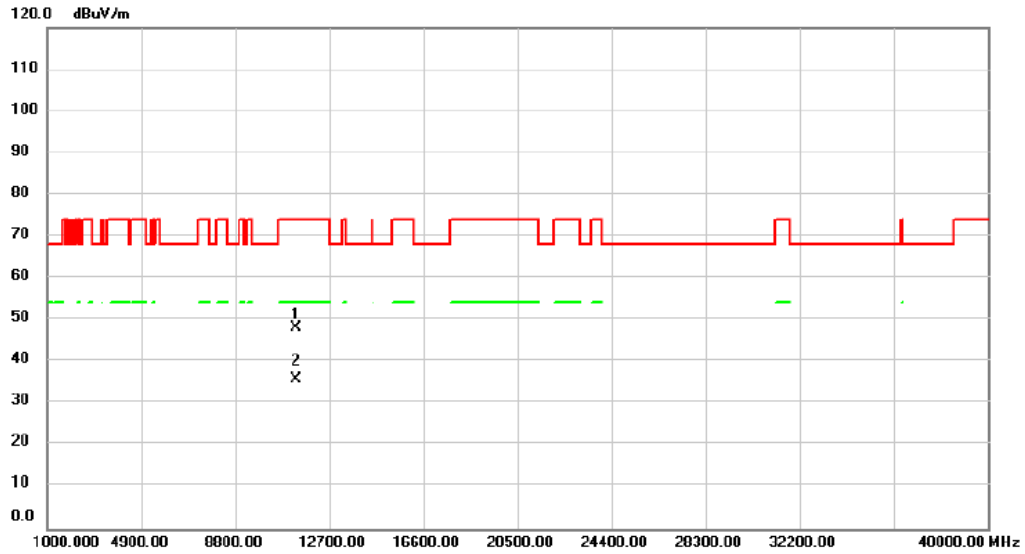


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11340.00	43.27	4.96	48.23	74.00	-25.77			peak
2	*	11340.00	30.85	4.96	35.81	54.00	-18.19			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5755 MHz	Polarization	Vertical

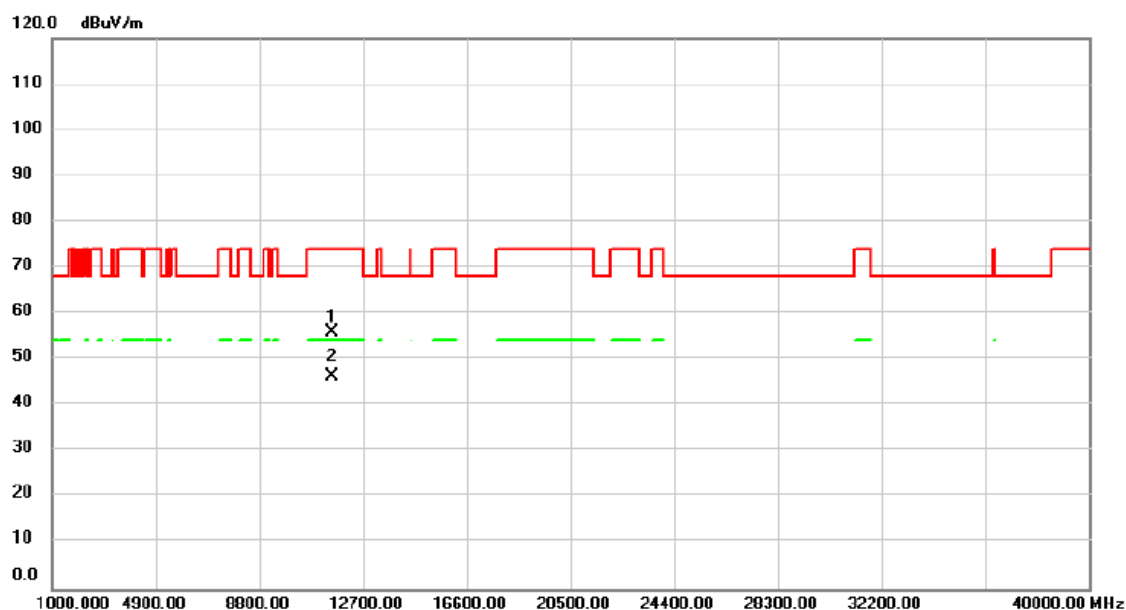


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11530.00	50.78	5.14	55.92	74.00	-18.08			peak
2	*	11530.00	41.20	5.14	46.34	54.00	-7.66			AVG

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5755 MHz	Polarization	Horizontal

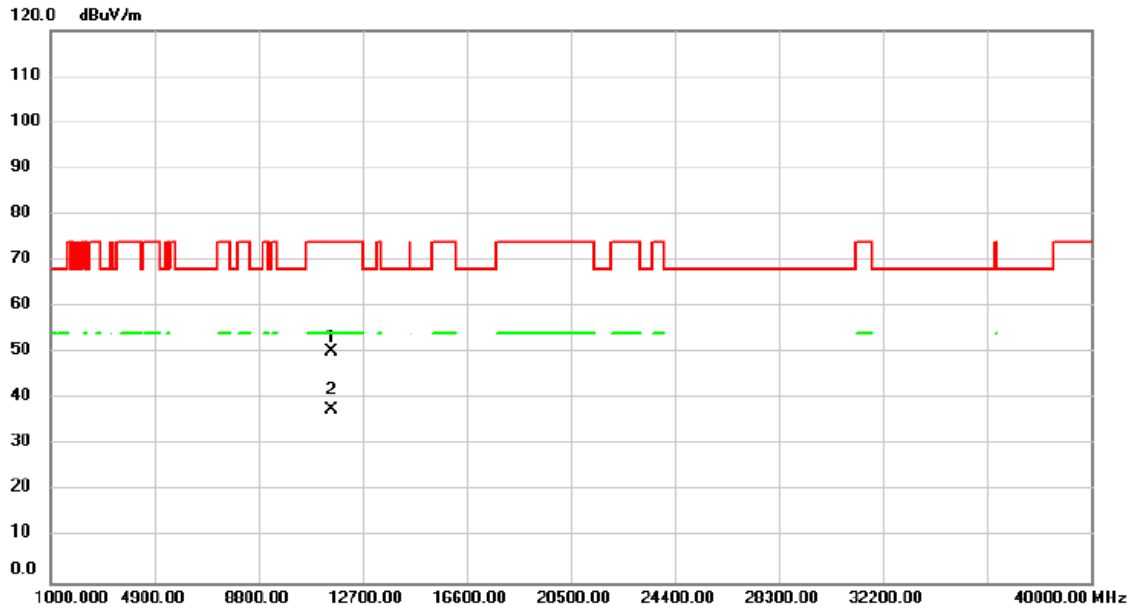


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11530.00	45.02	5.14	50.16	74.00	-23.84	peak			
2	*	11530.00	32.64	5.14	37.78	54.00	-16.22	AVG			

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5795 MHz	Polarization	Vertical

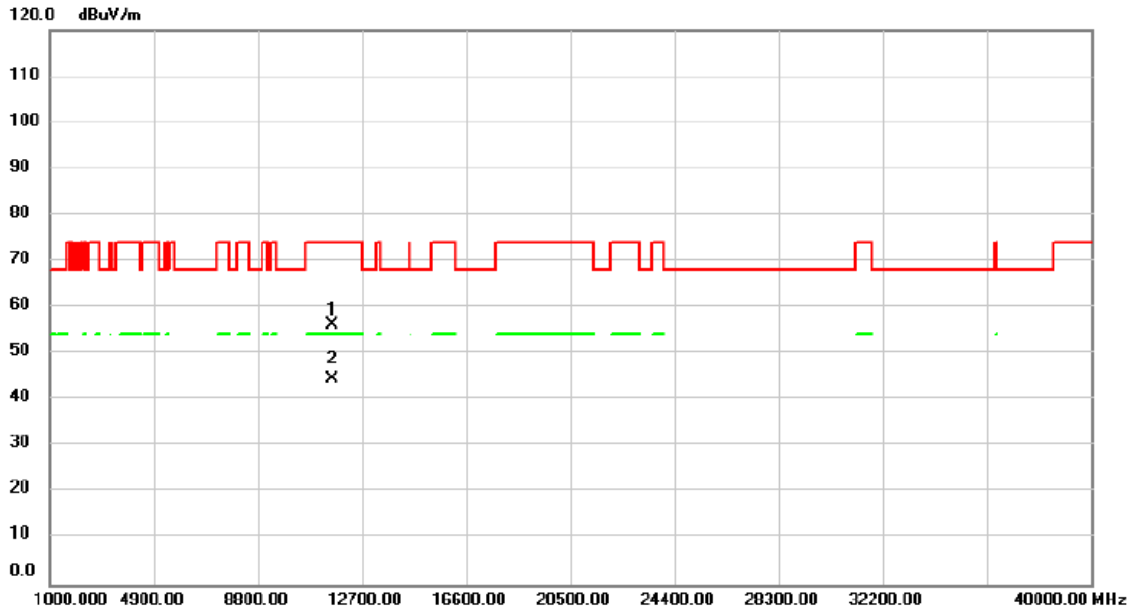


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		11569.00	51.19	5.15	56.34	74.00	-17.66			peak
2	*	11569.00	39.28	5.15	44.43	54.00	-9.57			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE40)	Test Date	2024/3/17
Test Frequency	5795 MHz	Polarization	Horizontal

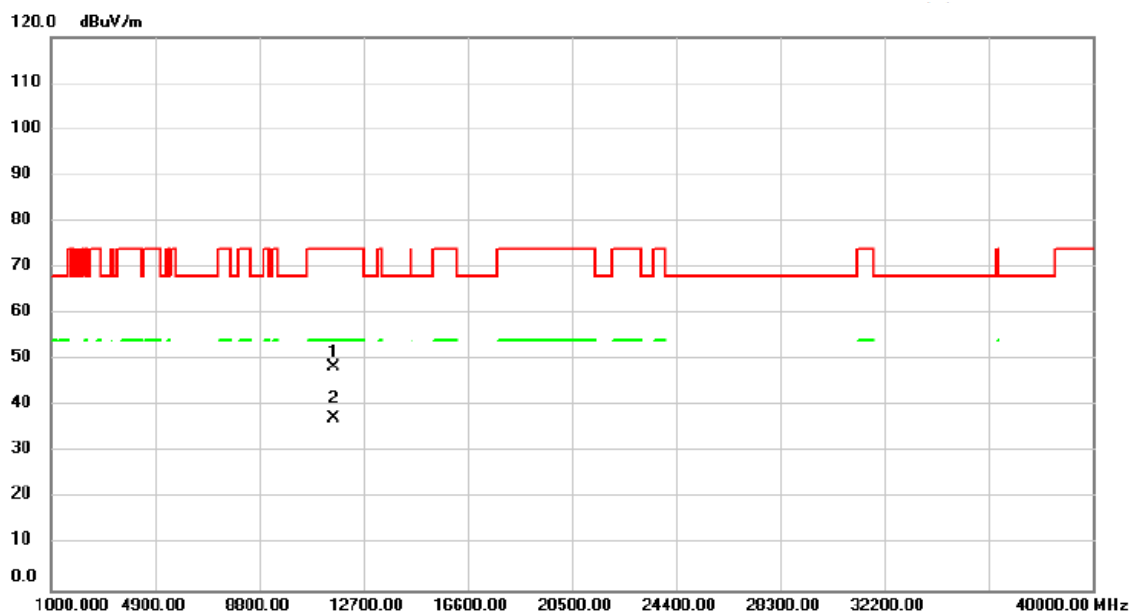


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		11590.00	43.21	5.16	48.37	74.00	-25.63	peak			
2	*	11590.00	32.13	5.16	37.29	54.00	-16.71	AVG			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/3/17
Test Frequency	5210 MHz	Polarization	Vertical

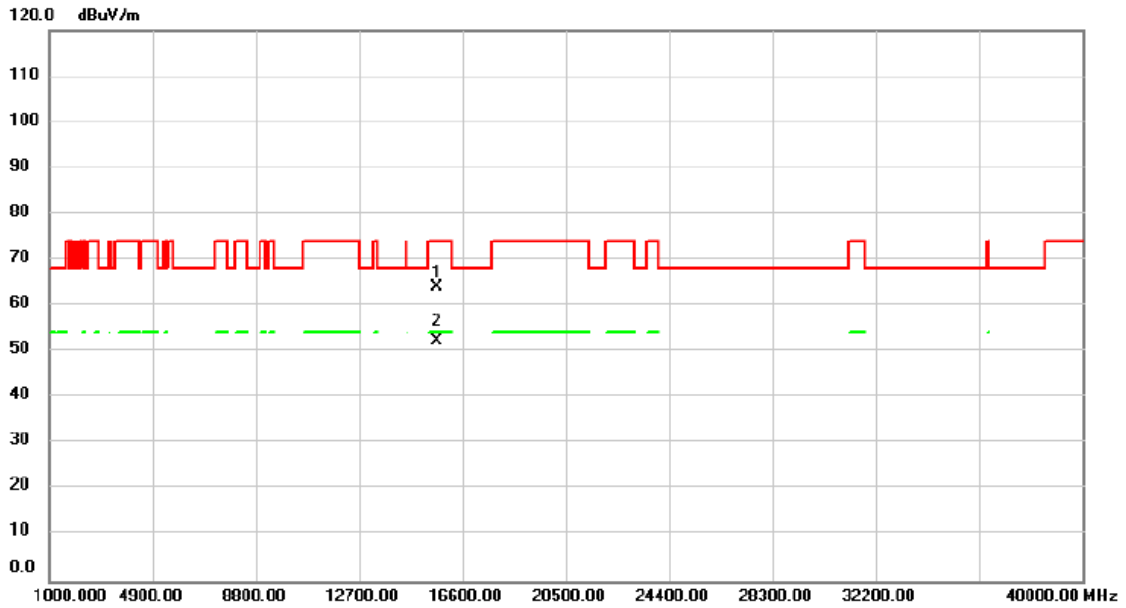


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Antenna Height cm	Table Degree	Comment
1		15625.00	57.24	6.95	64.19	74.00	-9.81	peak			
2	*	15625.00	45.46	6.95	52.41	54.00	-1.59	AVG			

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor

(2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/3/17
Test Frequency	5210 MHz	Polarization	Horizontal

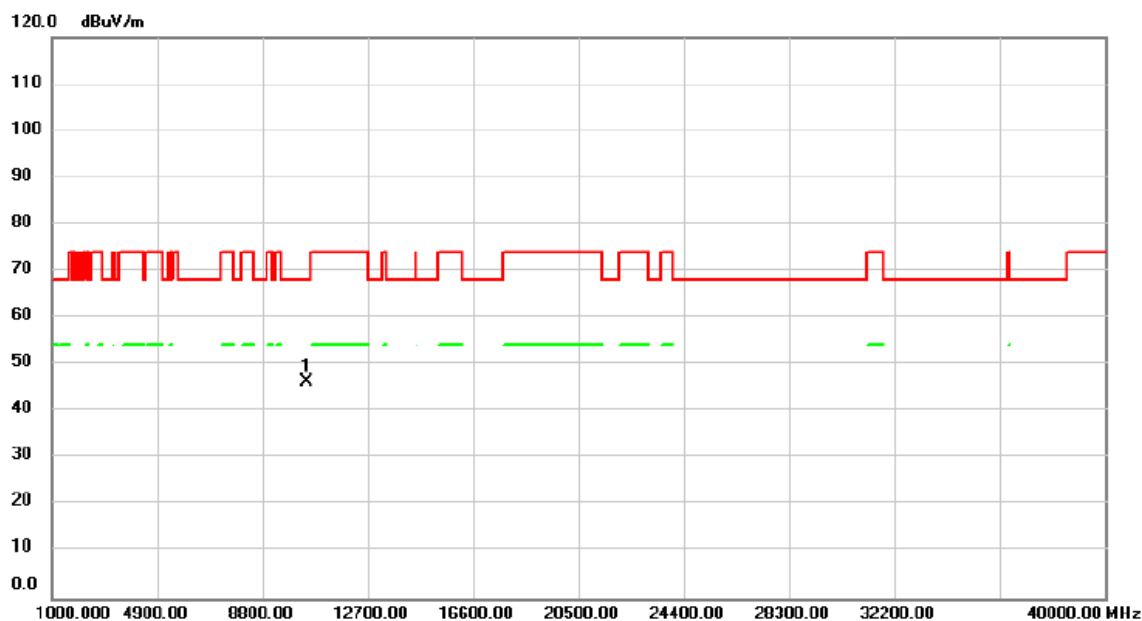


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	10420.00	41.99	4.40	46.39	68.20	-21.81	peak		

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value

Test Mode	IEEE 802.11ax (HE80)	Test Date	2024/3/17
Test Frequency	5290 MHz	Polarization	Vertical

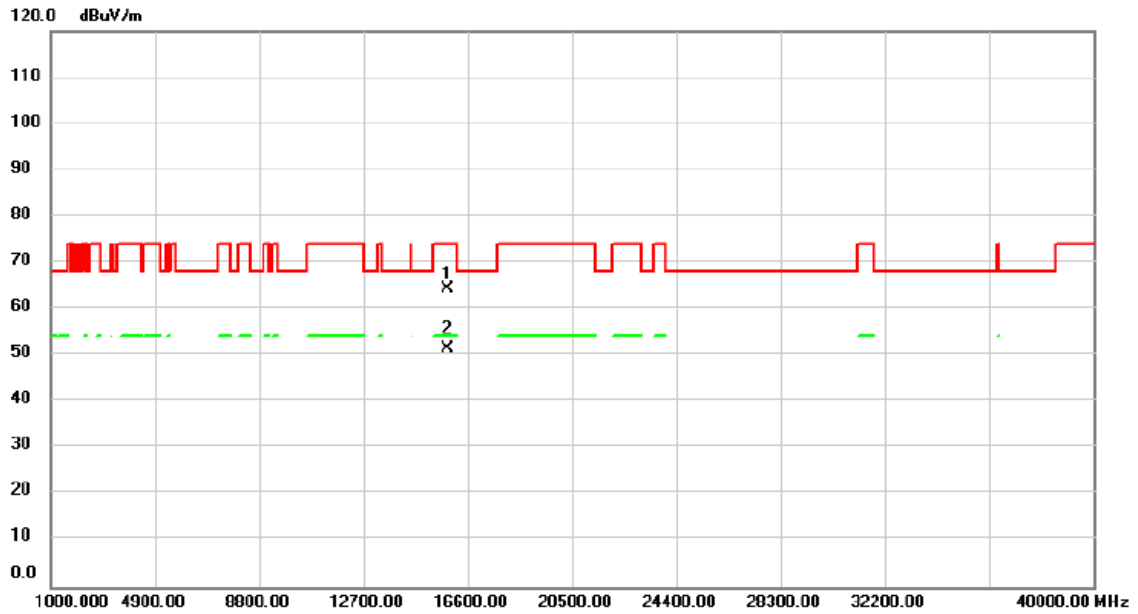

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		15859.00	57.13	7.19	64.32	74.00	-9.68			peak
2	*	15859.00	44.23	7.19	51.42	54.00	-2.58			AVG

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor
- (2) Margin Level = Measurement Value - Limit Value