

# FCC Part 15C Measurement and Test Report

For

**JOYO TECHNOLOGY CO., LTD**

**2/F, Lushi Industry Building, 28th District, Bao'an, Shenzhen,**

**518101 China**

**FCC ID: 2AIN7TOP-GT**

<b>FCC Rule(s):</b>	<u>FCC Part 15.247</u>
<b>Product Description:</b>	<u>MINI BLUETOOTH SPEAKER FOR GUITAR</u>
<b>Tested Model:</b>	<u>TOP-GT</u>
<b>Report No.:</b>	<u>STR16068032I-2</u>
<b>Tested Date:</b>	<u>2016-06-04 to 2016-06-08</u>
<b>Issued Date:</b>	<u>2016-06-08</u>
<b>Tested By:</b>	<u>Iven Guo / Engineer</u> <i>Iven Guo</i>
<b>Reviewed By:</b>	<u>Silin Chen / EMC Manager</u> <i>Silin Chen</i>
<b>Approved &amp; Authorized By:</b>	<u>Jandy so / PSQ Manager</u> <i>Jandyso</i>
<b>Prepared By:</b>	

**Shenzhen SEM.Test Technology Co., Ltd.**  
1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,  
Bao'an District, Shenzhen, P.R.C. (518101)  
Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM.Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION</b>	<b>3</b>
1.2 TEST STANDARDS	4
1.3 TEST METHODOLOGY	4
1.4 TEST FACILITY	4
1.5 EUT SETUP AND TEST MODE	5
1.6 TEST EQUIPMENT LIST AND DETAILS	5
<b>2. SUMMARY OF TEST RESULTS</b>	<b>6</b>
<b>3. RF EXPOSURE</b>	<b>7</b>
3.1 STANDARD APPLICABLE	7
3.2 TEST RESULT	7
<b>4. ANTENNA REQUIREMENT</b>	<b>8</b>
4.1 STANDARD APPLICABLE	8
4.2 EVALUATION INFORMATION	8
<b>5. POWER SPECTRAL DENSITY</b>	<b>9</b>
5.1 STANDARD APPLICABLE	9
5.2 TEST PROCEDURE	9
5.3 ENVIRONMENTAL CONDITIONS	9
5.4 SUMMARY OF TEST RESULTS/PLOTS	9
<b>6. 6DB BANDWIDTH</b>	<b>12</b>
6.1 STANDARD APPLICABLE	12
6.2 TEST PROCEDURE	12
6.3 ENVIRONMENTAL CONDITIONS	12
6.4 SUMMARY OF TEST RESULTS/PLOTS	12
<b>7. RF OUTPUT POWER</b>	<b>15</b>
7.1 STANDARD APPLICABLE	15
7.2 TEST PROCEDURE	15
7.3 ENVIRONMENTAL CONDITIONS	15
7.4 SUMMARY OF TEST RESULTS/PLOTS	15
<b>8. FIELD STRENGTH OF SPURIOUS EMISSIONS</b>	<b>16</b>
8.1 MEASUREMENT UNCERTAINTY	16
8.2 STANDARD APPLICABLE	16
8.3 TEST PROCEDURE	16
8.4 CORRECTED AMPLITUDE & MARGIN CALCULATION	18
8.5 ENVIRONMENTAL CONDITIONS	18
8.6 SUMMARY OF TEST RESULTS/PLOTS	18
<b>9. OUT OF BAND EMISSIONS</b>	<b>26</b>
9.1 STANDARD APPLICABLE	26
9.2 TEST PROCEDURE	26
9.3 ENVIRONMENTAL CONDITIONS	27
9.4 SUMMARY OF TEST RESULTS/PLOTS	27
<b>10. CONDUCTED EMISSIONS</b>	<b>32</b>
10.1 MEASUREMENT UNCERTAINTY	32
10.2 TEST PROCEDURE	32
10.3 BASIC TEST SETUP BLOCK DIAGRAM	32
10.4 ENVIRONMENTAL CONDITIONS	32
10.5 TEST RECEIVER SETUP	33
10.6 SUMMARY OF TEST RESULTS/PLOTS	33
10.7 CONDUCTED EMISSIONS TEST DATA	33

## 1. GENERAL INFORMATION

### Client Information

Applicant: JOYO TECHNOLOGY CO., LTD  
Address of applicant: 2/F, Lushi Industry Building, 28th District, Bao'an, Shenzhen,  
518101 China

Manufacturer: JOYO TECHNOLOGY CO., LTD  
Address of manufacturer: 2/F, Lushi Industry Building, 28th District, Bao'an, Shenzhen,  
518101 China

General Description of EUT	
Product Name:	MINI BLUETOOTH SPEAKER FOR GUITAR
Brand Name:	JOYO
Model No.:	TOP-GT
Adding Model(s):	/
Battery Rated Voltage:	DC 7.4 V Li-ion Battery
Battery Capacity:	2200mAh
Power Adaptor :	SJ-09030001/SJ-38809030001 Input: 100-240V~50/60Hz Output: DC9V /3.0A
Software Version:	V1.0
Hardware Version:	V1.0
<i>Note: The test data is gathered from a production sample, provided by the manufacturer. For more information refer to the circuit diagram form and the user's manual.</i>	

Technical Characteristics of EUT	
Bluetooth Version:	V4.1
Frequency Range:	2402-2480MHz
RF Output Power:	-1.86 dBm (Conducted)
Data Rate:	1Mbps
Modulation:	GFSK
Quantity of Channels:	40
Channel Separation:	2MHz
Type of Antenna:	Integral Antenna
Antenna Gain:	0 dBi
Lowest Internal Frequency:	26MHz

## 1.2 Test Standards

The following report is prepared on behalf of the JOYO TECHNOLOGY CO., LTD in accordance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.203, 15.205, 15.207, 15.209 and 15.247 of the Federal Communication Commissions rules.

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard for Testing Unlicensed Wireless Devices, and ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz. The measurement guide KDB 558074 D01 v03r05 for digital transmission systems shall be performed also.

## 1.4 Test Facility

### **FCC – Registration No.: 934118**

Shenzhen SEM.Test Technology Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 934118.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM.Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

### **CNAS Registration No.: L4062**

Shenzhen SEM.Test Technology Co., Ltd. is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L4062. All measurement facilities used to collect the measurement data are located at 1/F, Building A, Hongwei Industrial Park, Liuxian 2<sup>nd</sup> Road, Bao'an District, Shenzhen, P.R.C (518101).

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GFSK(BLE)	2402MHz, 2440MHz, 2480MHz

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
AC Adapter Cable	1.0	Shielded	Without Ferrite
DC Adapter Cable	1.5	Shielded	With Ferrite
Audio Cable	1.0	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Adapter	/	BLJ5W050100U-V	/
Notebook	Lenovo	E23	EB12648265

## 1.6 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal Date	Due Date
Spectrum Analyzer	Agilent	E4407B	MY41440400	2015-06-17	2016-06-16
Spectrum Analyzer	Rohde & Schwarz	FSP	836079/035	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2015-06-17	2016-06-16
Amplifier	Agilent	8447F	3113A06717	2015-06-17	2016-06-16
Amplifier	C&D	PAP-1G18	2002	2015-06-17	2016-06-16
Broadband Antenna	Schwarz beck	VULB9163	9163-333	2015-06-17	2016-06-16
Horn Antenna	ETS	3117	00086197	2015-06-17	2016-06-16
Horn Antenna	ETS	3116B	00088203	2015-06-17	2016-06-16
Loop Antenna	Schwarz beck	FMZB 1516	9773	2015-06-17	2016-06-16
EMI Test Receiver	Rohde & Schwarz	ESPI	101611	2015-06-17	2016-06-16
L.I.S.N	Schwarz beck	NSLK8126	8126-224	2015-06-17	2016-06-16
Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100911	2015-06-17	2016-06-16

---

## 2. SUMMARY OF TEST RESULTS

---

<b>FCC Rules</b>	<b>Description of Test Item</b>	<b>Result</b>
§ 2.1093	RF Exposure	Compliant
§ 15.203; § 15.247(b)(4)(i)	Antenna Requirement	Compliant
§ 15.207(a)	Conducted Emission	Compliant
§ 15.247(e)	Power Spectral Density	Compliant
§ 15.247(a)(2)	6 dB Bandwidth	Compliant
§ 15.247(b)(3)	RF Output Power	Compliant
§ 15.209(a)	Radiated Emission	Compliant
§ 15.247(d)	Band Edge (Out of Band Emissions)	Compliant

N/A: not applicable

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the RF Exposure Report.

## **4. Antenna Requirement**

---

### **4.1 Standard Applicable**

According to FCC Part 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

### **4.2 Evaluation Information**

This product has a PCB antenna, fulfill the requirement of this section.



## 5. Power Spectral Density

### 5.1 Standard Applicable

According to 15.247(a)(1)(iii), For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 5.2 Test Procedure

According to the KDB 558074 D01 v03r05, the test method of power spectral density as below:

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
- d) Set the VBW  $\geq 3 \times \text{RBW}$ .
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### 5.3 Environmental Conditions


Temperature:	26° C
Relative Humidity:	54%
ATM Pressure:	1011 mbar

### 5.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	Power Spectral Density dBm/3kHz	Limit dBm/3kHz
GFSK(BLE)	2402	-15.68	8
	2442	-16.43	8
	2480	-18.11	8

Please refer to the following test plots:


Low Channel

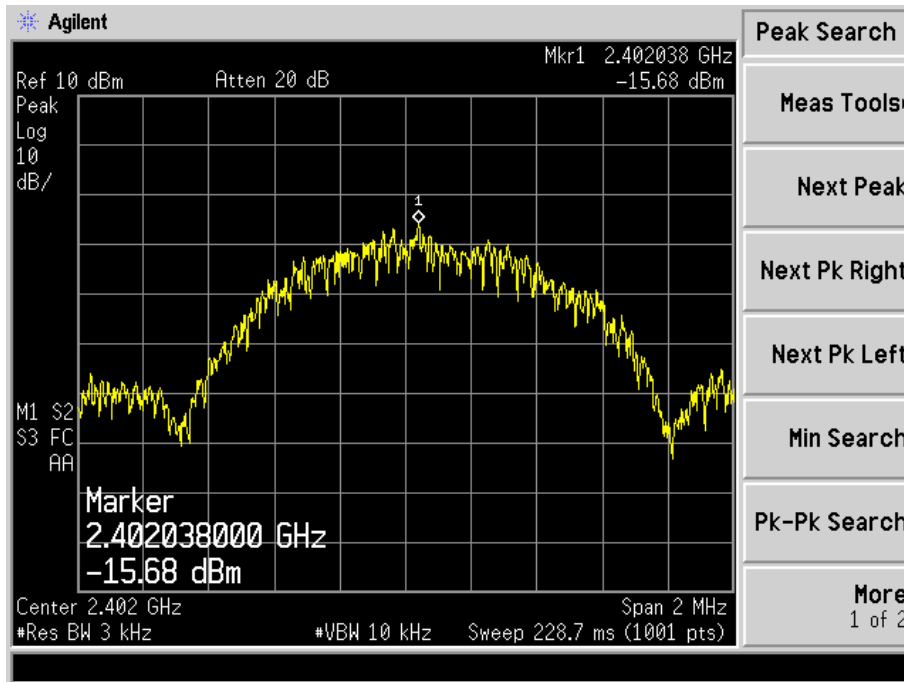

Middle Channel

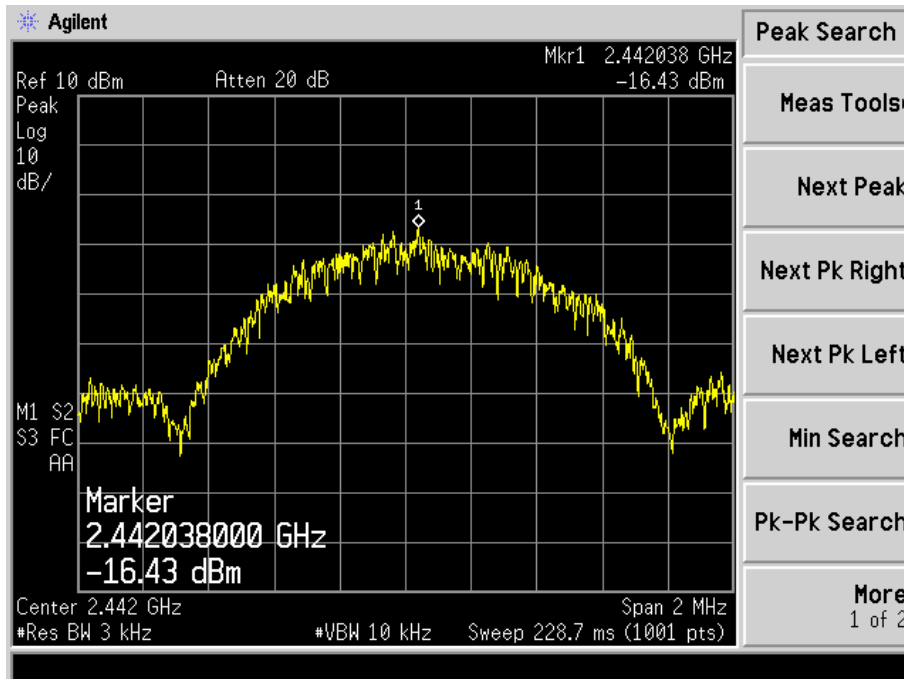

## High Channel

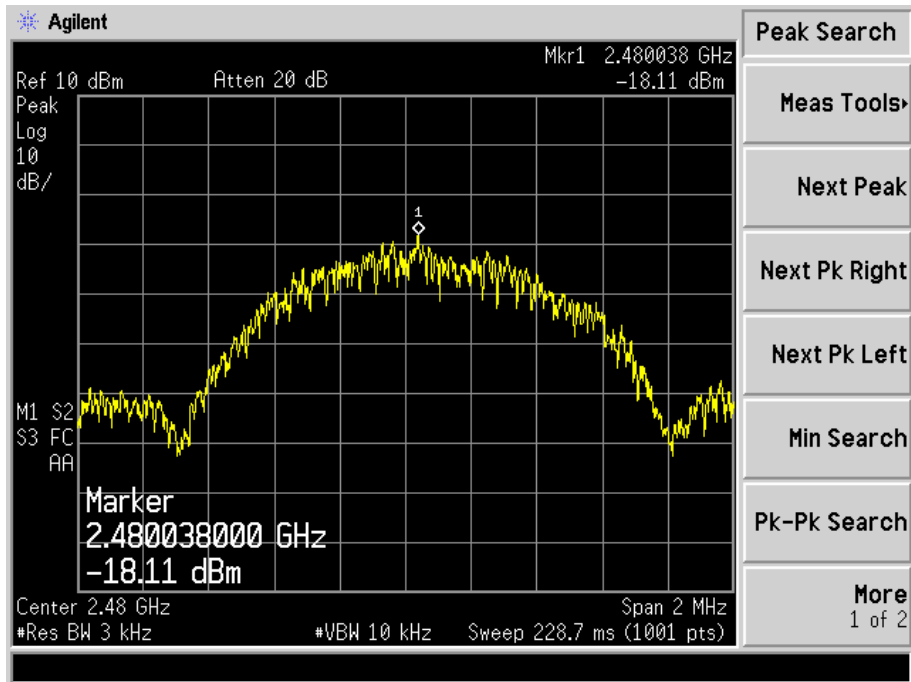

## 6. 6dB Bandwidth

### 6.1 Standard Applicable

According to 15.247(a)(2). Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 6.2 Test Procedure

- a) Set RBW = 100 kHz.
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

### 6.3 Environmental Conditions


Temperature:	25° C
Relative Humidity:	53%
ATM Pressure:	1018 mbar

### 6.4 Summary of Test Results/Plots


Test Mode	Test Channel MHz	6 dB Bandwidth kHz	99% Bandwidth kHz	Limit kHz
GFSK(BLE)	2402	736.644	1093.8	$\geq 500$
	2442	731.973	1091.2	$\geq 500$
	2480	727.806	1095.3	$\geq 500$

Please refer to the following test plots:


For BLE  
Low Channel:

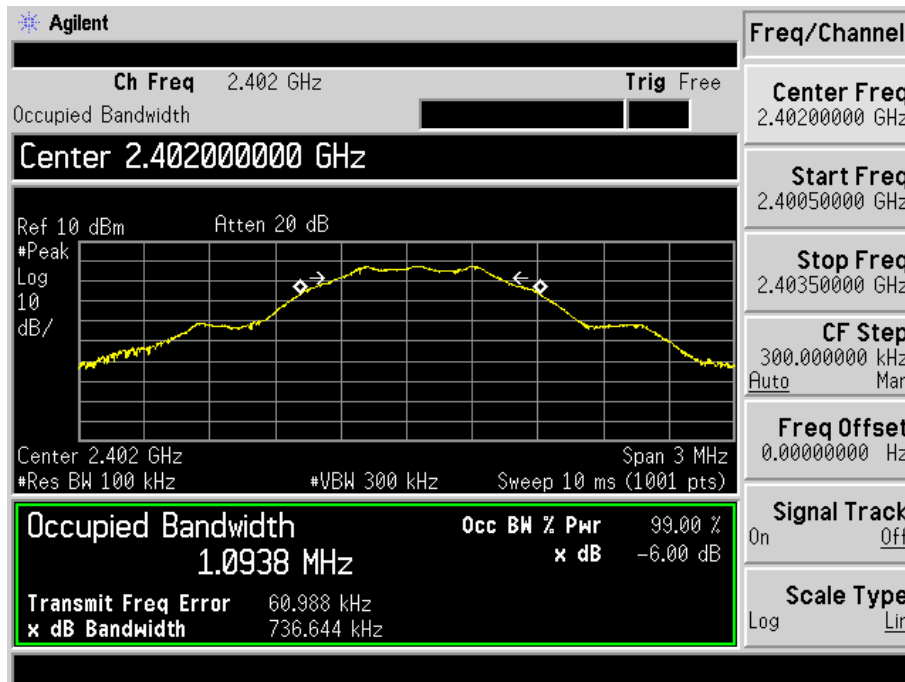

Middle Channel:

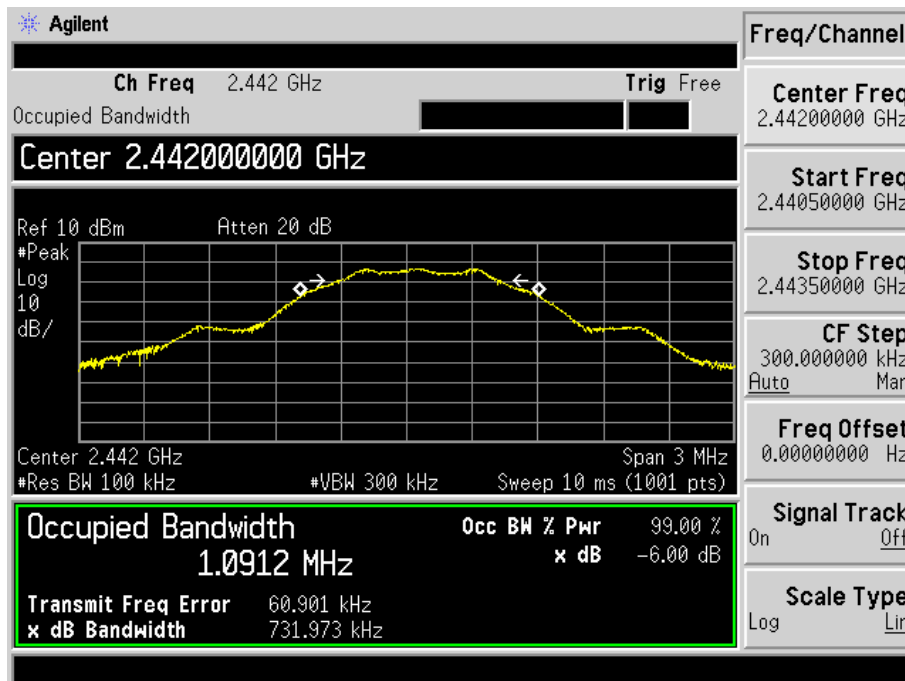

High Channel:

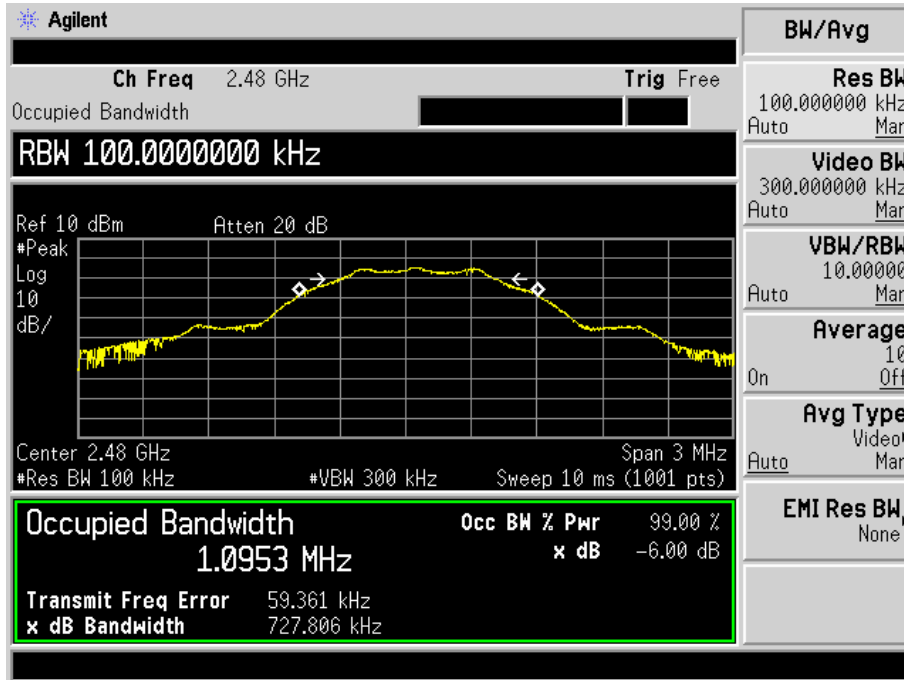

## 7. RF Output Power

### 7.1 Standard Applicable

According to 15.247(b)(3). For systems using digital modulation in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands: 1 Watt.

### 7.2 Test Procedure

According to section KDB-558074 D01 v03r05 section 9.1.1, this procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- a) Set the RBW  $\geq$  DTS bandwidth.
- b) Set VBW  $\geq 3 \times$  RBW.
- c) Set span  $\geq 3 \times$  RBW
- d) Sweep time = auto couple.
- e) Detector = peak.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use peak marker function to determine the peak amplitude level.

### 7.3 Environmental Conditions

Temperature:	26° C
Relative Humidity:	57%
ATM Pressure:	1011 mbar

### 7.4 Summary of Test Results/Plots

Test Mode	Frequency MHz	Reading dBm	Output Power mW	Limit mW
GFSK(BLE)	2402	-1.86	0.65	1000
	2442	-2.57	0.55	1000
	2480	-3.19	0.48	1000

*Note: the antenna gain of 0 dBi less than 6dBi maximum permission antenna gain value based on 1 watt peak output power limit.*

---

## 8. Field Strength of Spurious Emissions

---

### 8.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is  $\pm 5.10$  dB.

### 8.2 Standard Applicable

According to §15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply. Spurious Radiated Emissions measurements starting below or at the lowest crystal frequency.



### 8.3 Test Procedure

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.205 15.247(a) and FCC Part 15.209 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.



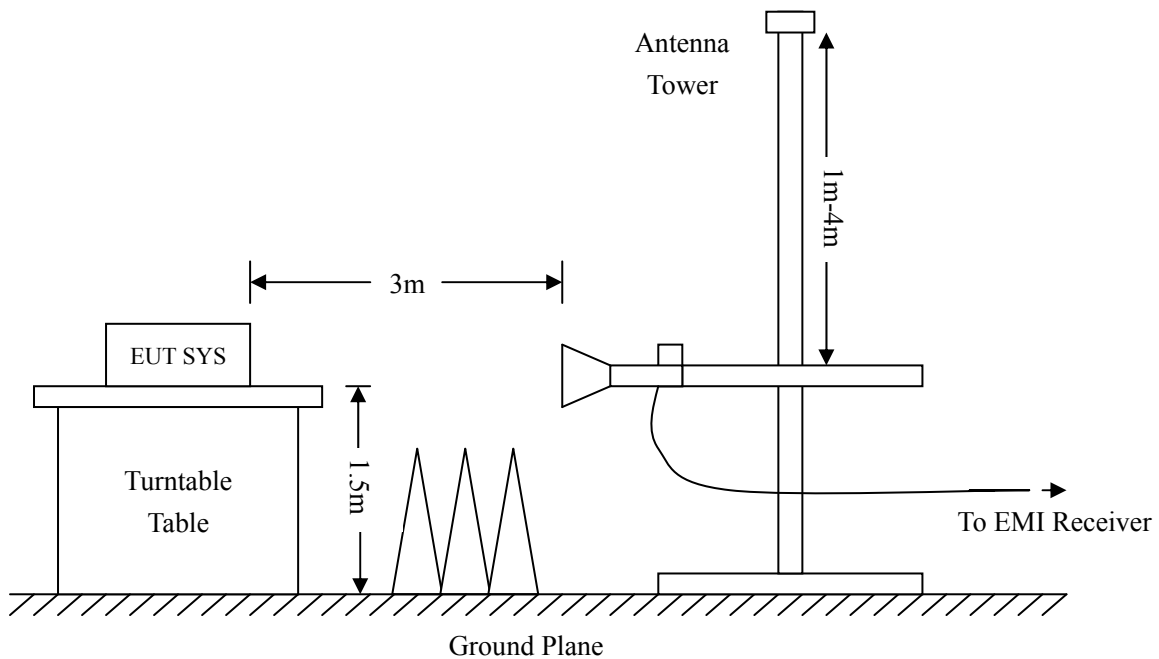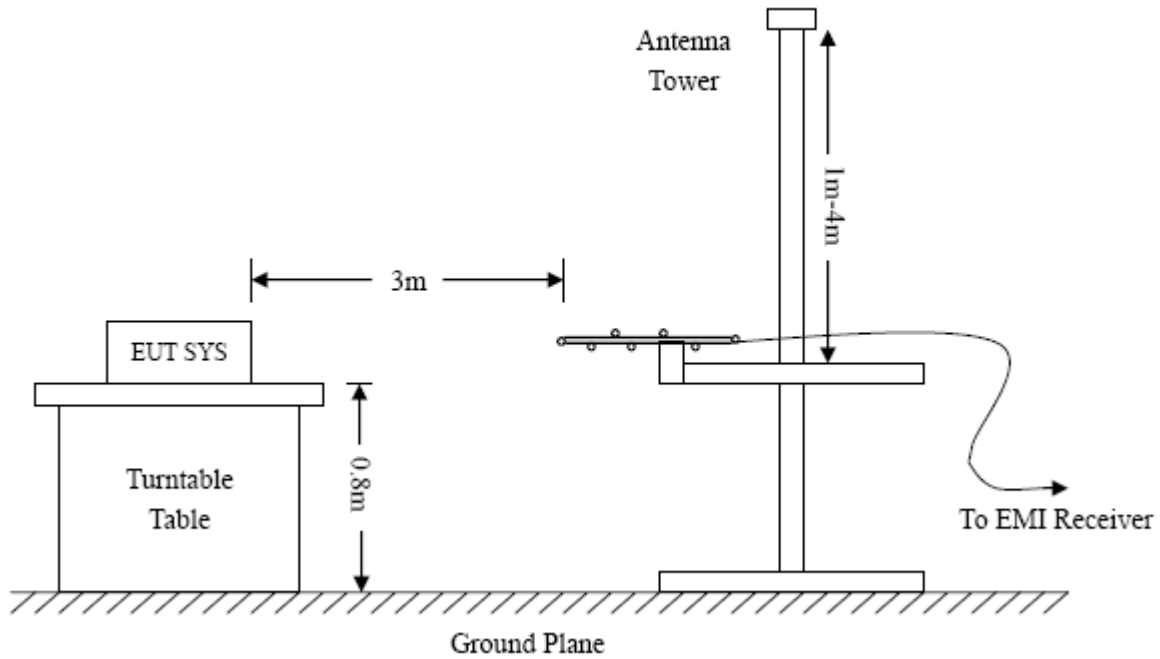

Frequency :9kHz-30MHz  
 RBW=10KHz,  
 VBW =30KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak

Frequency :30MHz-1GHz  
 RBW=120KHz,  
 VBW=300KHz  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, QP

Frequency :Above 1GHz  
 RBW=1MHz,  
 VBW=3MHz(Peak), 10Hz(AV)  
 Sweep time= Auto  
 Trace = max hold  
 Detector function = peak, AV

## 8.4 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant. Factor} + \text{Cable Loss} - \text{Ampl. Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB $\mu$ V means the emission is 6dB $\mu$ V below the maximum limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15 Limit}$$

## 8.5 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar


## 8.6 Summary of Test Results/Plots

According to the data below, the FCC Part 15.205, 15.209 and 15.247 standards, and had the worst cases:

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


**Plot of Radiated Emissions Test Data**

EUT: *MINI BLUETOOTH SPEAKER FOR GUITAR*  
 Tested Model: *TOP-GT*  
 Operating Condition: *Transmitting-Low channel (2402MHz)*  
 Comment: *DC 7.4V*  
 Test Specification: *Horizontal*

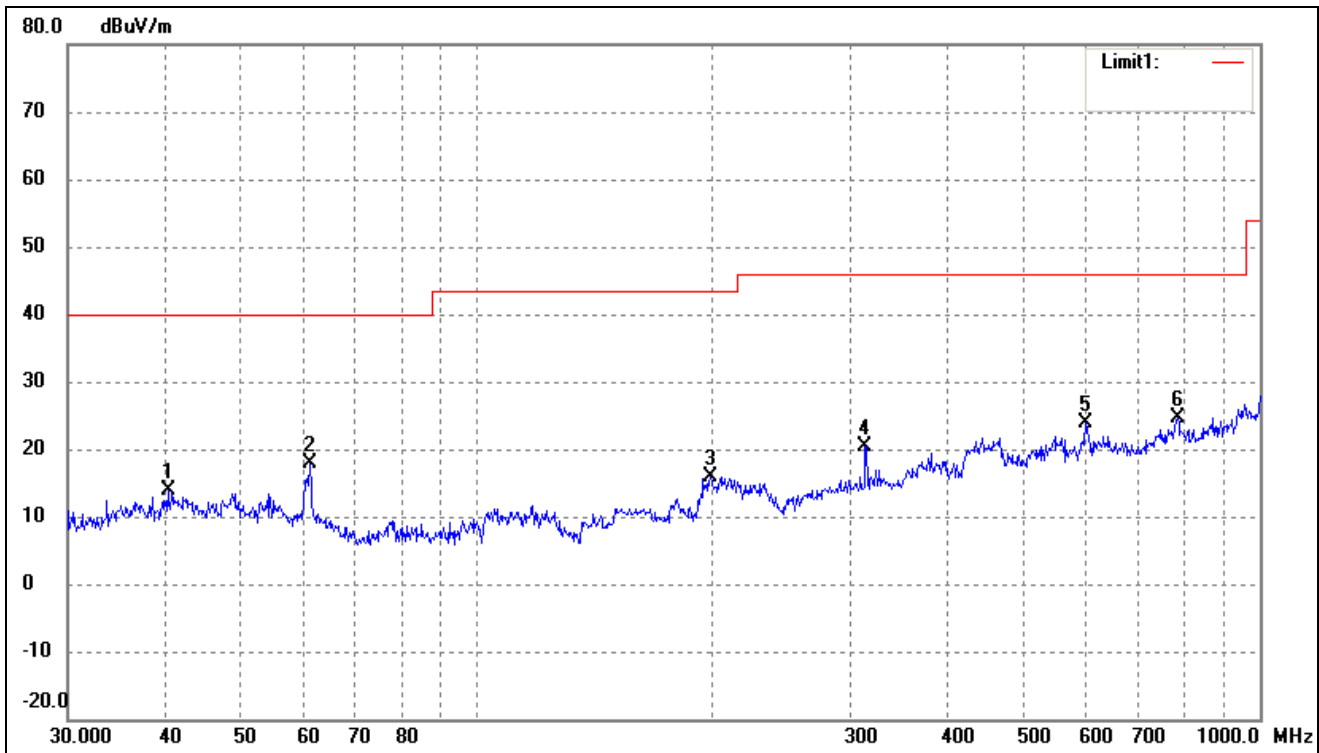

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	40.2757	21.51	-7.69	13.82	40.00	-26.18	0	100	QP
2	61.1316	27.77	-9.94	17.83	40.00	-22.17	0	100	QP
3	198.5880	24.81	-8.85	15.96	43.50	-27.54	0	100	QP
4	313.2760	25.31	-4.97	20.34	46.00	-25.66	0	100	QP
5	599.3213	23.98	-0.17	23.81	46.00	-22.19	0	100	QP
6	785.0935	21.98	2.65	24.63	46.00	-21.37	0	100	QP


Test Specification: Vertical

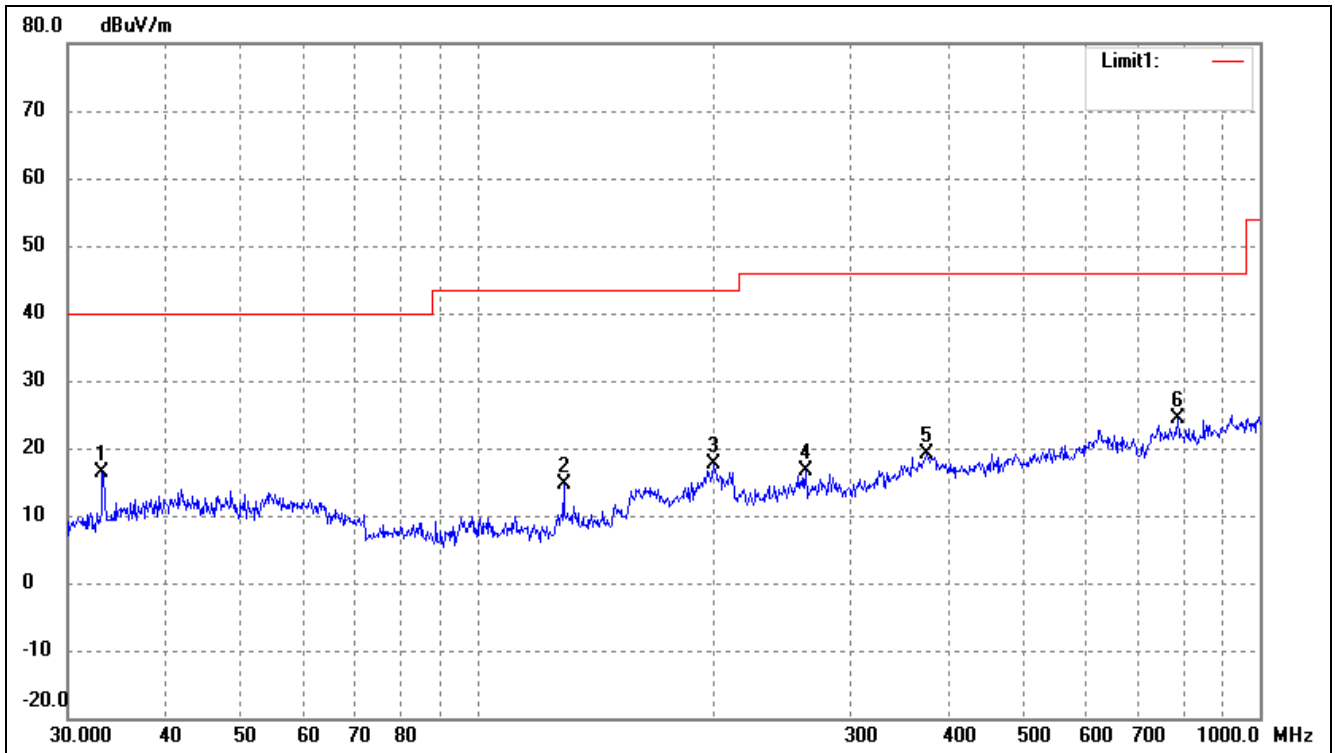

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.2112	25.90	-9.50	16.40	40.00	-23.60	0	100	QP
2	129.0146	26.67	-11.94	14.73	43.50	-28.77	0	100	QP
3	200.6881	26.19	-8.66	17.53	43.50	-25.97	0	100	QP
4	262.8955	23.34	-6.83	16.51	46.00	-29.49	0	100	QP
5	374.6226	21.49	-2.41	19.08	46.00	-26.92	0	100	QP
6	785.0935	21.76	2.65	24.41	46.00	-21.59	0	100	QP


**Plot of Radiated Emissions Test Data**

EUT: *MINI BLUETOOTH SPEAKER FOR GUITAR*  
 Tested Model: *TOP-GT*  
 Operating Condition: *Transmitting-Mid channel (2442MHz)*  
 Comment: *DC7.4V*  
 Test Specification: *Horizontal*

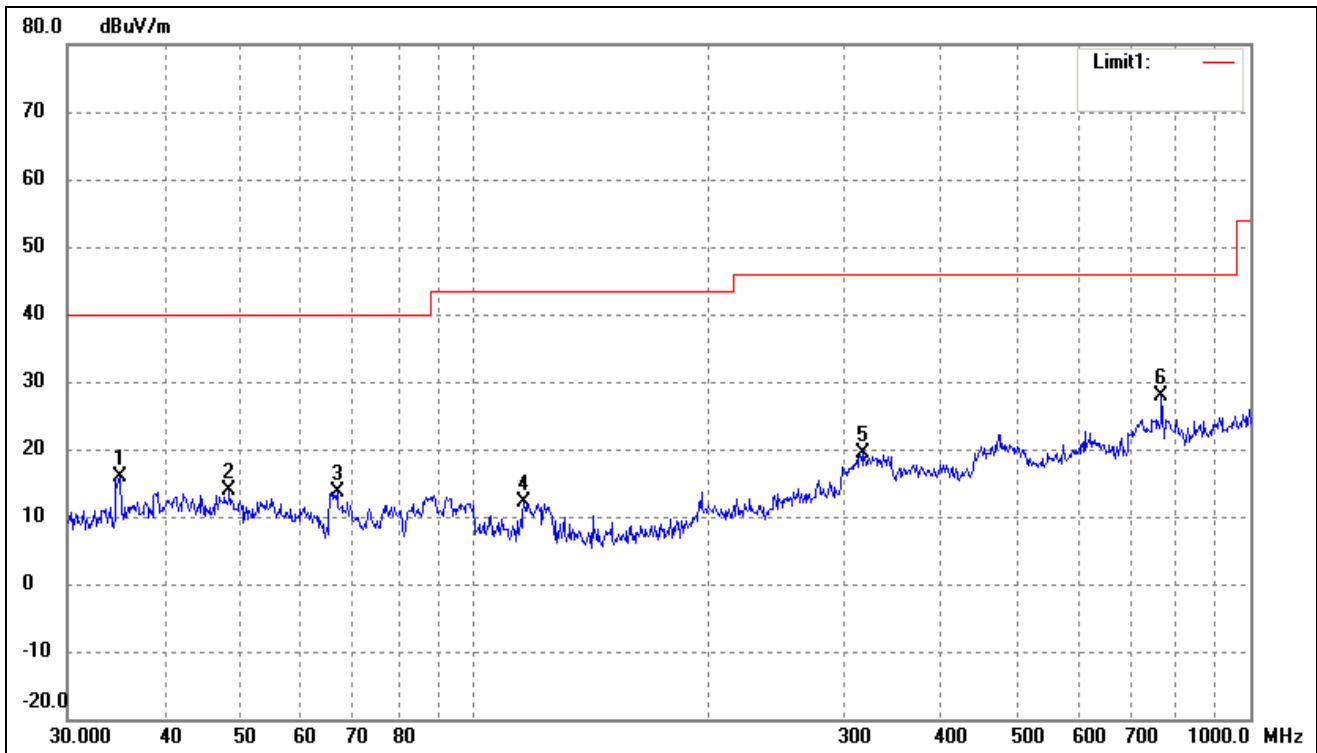

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	35.1278	24.96	-9.01	15.95	40.00	-24.05	0	100	QP
2	48.5016	22.09	-8.22	13.87	40.00	-26.13	0	100	QP
3	66.7325	25.34	-11.77	13.57	40.00	-26.43	0	100	QP
4	116.1321	23.54	-11.33	12.21	43.50	-31.29	0	100	QP
5	317.7011	24.18	-4.74	19.44	46.00	-26.56	0	100	QP
6	768.7482	25.64	2.28	27.92	46.00	-18.08	0	100	QP


Test Specification: Vertical

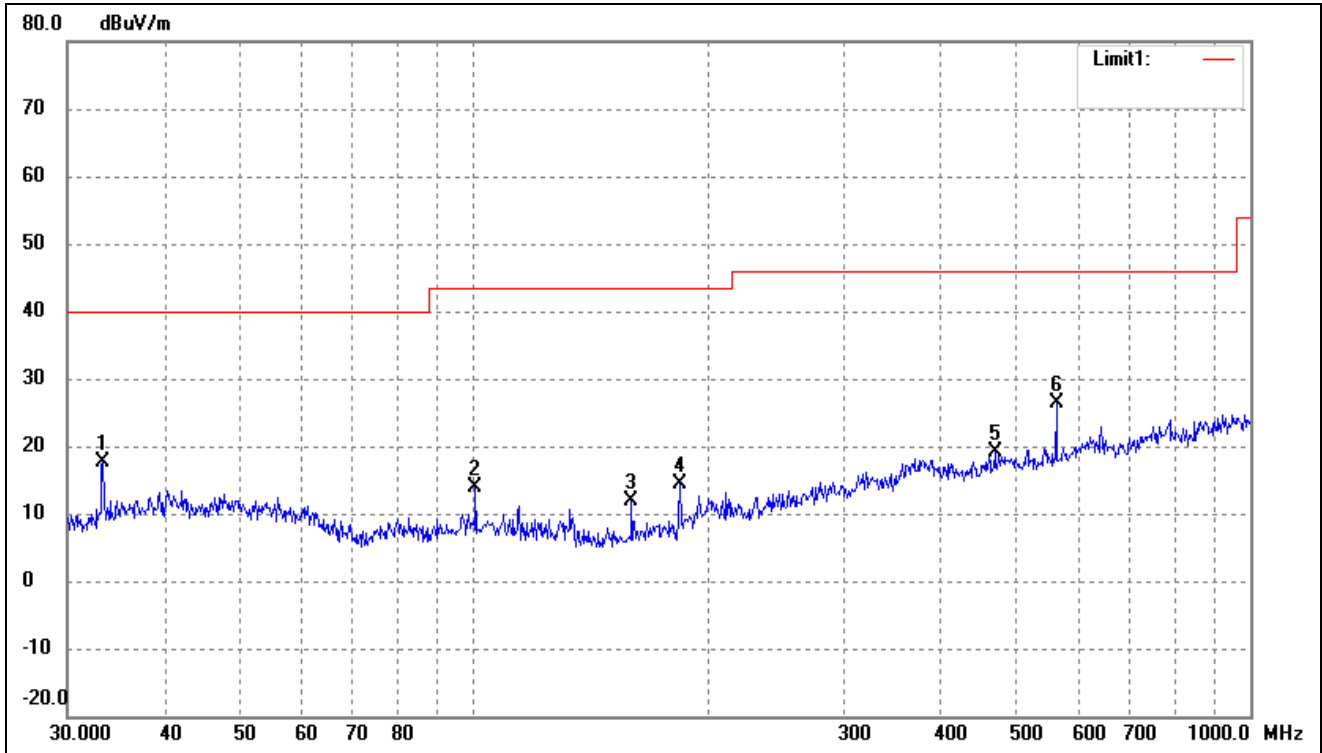

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	33.3279	27.07	-9.46	17.61	40.00	-22.39	0	100	QP
2	100.5806	24.77	-10.92	13.85	43.50	-29.65	0	100	QP
3	159.7844	24.05	-12.27	11.78	43.50	-31.72	0	100	QP
4	184.4898	25.07	-10.75	14.32	43.50	-29.18	0	100	QP
5	468.8762	21.08	-1.96	19.12	46.00	-26.88	0	100	QP
6	562.6624	27.69	-1.33	26.36	46.00	-19.64	0	100	QP


**Plot of Radiated Emissions Test Data**

EUT: *MINI BLUETOOTH SPEAKER FOR GUITAR*  
 Tested Model: *TOP-GT*  
 Operating Condition: *Transmitting-High channel (2480MHz)*  
 Comment: *DC7.4V*  
 Test Specification: *Horizontal*

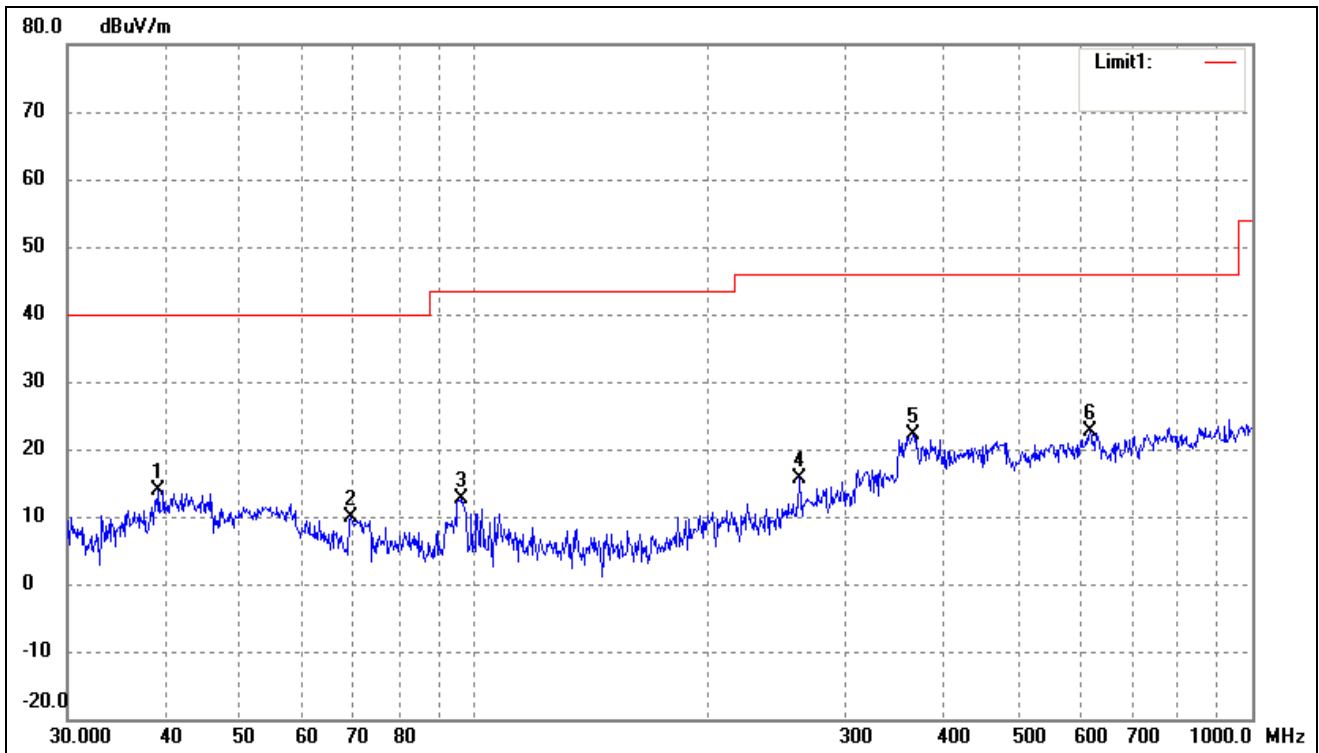

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	39.2991	21.69	-7.85	13.84	40.00	-26.16	0	100	QP
2	69.3568	22.52	-12.62	9.90	40.00	-30.10	0	100	QP
3	96.0986	24.24	-11.70	12.54	43.50	-30.96	0	100	QP
4	261.9753	22.42	-6.87	15.55	46.00	-30.45	0	100	QP
5	366.8231	24.87	-2.86	22.01	46.00	-23.99	0	100	QP
6	618.5369	21.37	1.14	22.51	46.00	-23.49	0	100	QP

Test Specification: Vertical

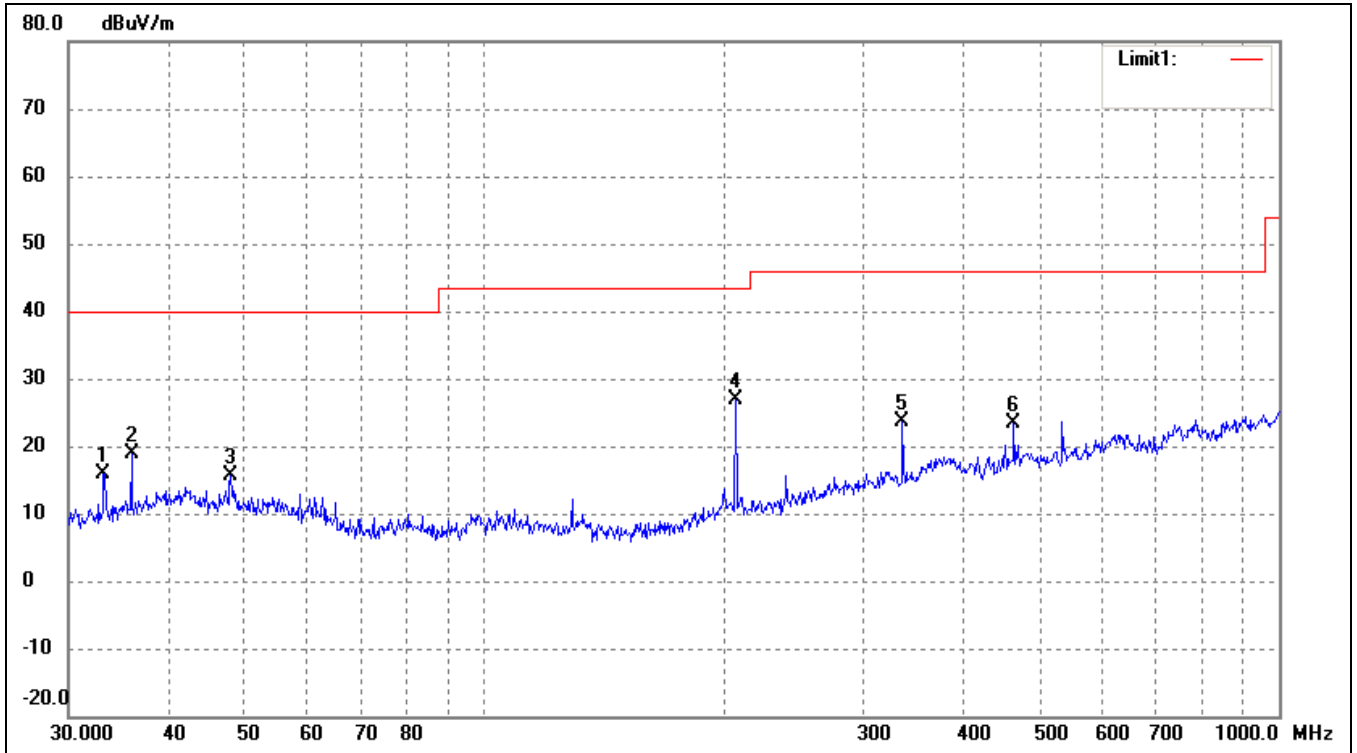

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree ( ° )	Height (cm)	Remark
1	33.2112	25.37	-9.50	15.87	40.00	-24.13	0	100	QP
2	36.0007	27.53	-8.76	18.77	40.00	-21.23	0	100	QP
3	47.9940	23.87	-8.19	15.68	40.00	-24.32	0	100	QP
4	207.1226	35.60	-8.72	26.88	43.50	-16.62	0	100	QP
5	336.0352	28.66	-4.91	23.75	46.00	-22.25	0	100	QP
6	463.9696	25.70	-2.36	23.34	46.00	-22.66	0	100	QP



*Spurious Emissions Above 1GHz*

Transmitting: BLE mode:

Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Polar H/V	Detector
Low Channel-2402MHz							
4804	60.73	0.55	61.28	74	-12.72	H	PK
4804	39.31	0.55	39.86	54	-14.14	H	AV
7206	59.97	3.67	63.64	74	-10.36	H	PK
7206	41.92	3.67	45.59	54	-8.41	H	AV
4804	58.73	0.55	59.28	74	-14.72	V	PK
4804	39.84	0.55	40.39	54	-13.61	V	AV
7206	60.04	3.67	63.71	74	-10.29	V	PK
7206	39.61	3.67	43.28	54	-10.72	V	AV
Middle Channel-2442MHz							
4884	61.48	0.66	62.14	74	-11.86	H	PK
4884	39.75	0.66	40.41	54	-13.59	H	AV
7326	58.73	3.75	62.48	74	-11.52	H	PK
7326	39.51	3.75	43.26	54	-10.74	H	AV
4884	61.44	0.66	62.1	74	-11.9	V	PK
4884	39.64	0.66	40.3	54	-13.7	V	AV
7326	58.03	3.75	61.78	74	-12.22	V	PK
7326	41.92	3.75	45.67	54	-8.33	V	AV
High Channel-2480MHz							
4960	61.49	0.78	62.27	74	-11.73	H	PK
4960	41.84	0.78	42.62	54	-11.38	H	AV
7440	60.82	3.85	64.67	74	-9.33	H	PK
7440	39.63	3.85	43.48	54	-10.52	H	AV
4960	58.78	0.77	59.55	74	-14.45	V	PK
4960	39.26	0.77	40.03	54	-13.97	V	AV
7440	61.65	3.85	65.5	74	-8.5	V	PK
7440	39.78	3.85	43.63	54	-10.37	V	AV

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, which above 3<sup>th</sup> Harmonics are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

The measurements greater than 20dB below the limit from 9kHz to 30MHz..

---

## 9. Out of Band Emissions

---

### 9.1 Standard Applicable

According to §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

### 9.2 Test Procedure

According to the KDB 558074 D01 v03r05, the band-edge radiated test method as follows:

Set span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation (2310MHz to 2420MHz for low bandedge, 2460MHz to 2500MHz for the high bandedge)

RBW = 1MHz, VBW = 1MHz for peak value measured

RBW = 1MHz, VBW = 10Hz for average value measured

Sweep = auto; Detector function = peak/average; Trace = max hold

All the trace to stabilize, set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Those emission must comply with the 15.209 limit for fall in the restricted bands listed in section 15.205. Note that the method of measurement KDB publication number: 913591 may be used for the radiated bandedge measurements.

According to the KDB 558074 D01 v03r05, the conducted spurious emissions test method as follows:

1. Set start frequency to DTS channel edge frequency.
2. Set stop frequency so as to encompass the spectrum to be examined.
3. Set RBW = 100 kHz.
4. Set VBW  $\geq$  300 kHz.
5. Detector = peak.
6. Trace Mode = max hold.
7. Sweep = auto couple.
8. Allow the trace to stabilize (this may take some time, depending on the extent of the span).
9. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) are attenuated by at least the minimum requirements specified in section 8.1. Report the three highest emissions relative to the limit.

### 9.3 Environmental Conditions

Temperature:	23°C
Relative Humidity:	54%
ATM Pressure:	1011 mbar


### 9.4 Summary of Test Results/Plots

Bandedge (Radiated)  
 Lowest Bandedge-BLE  
 Horizontal (Worst case)

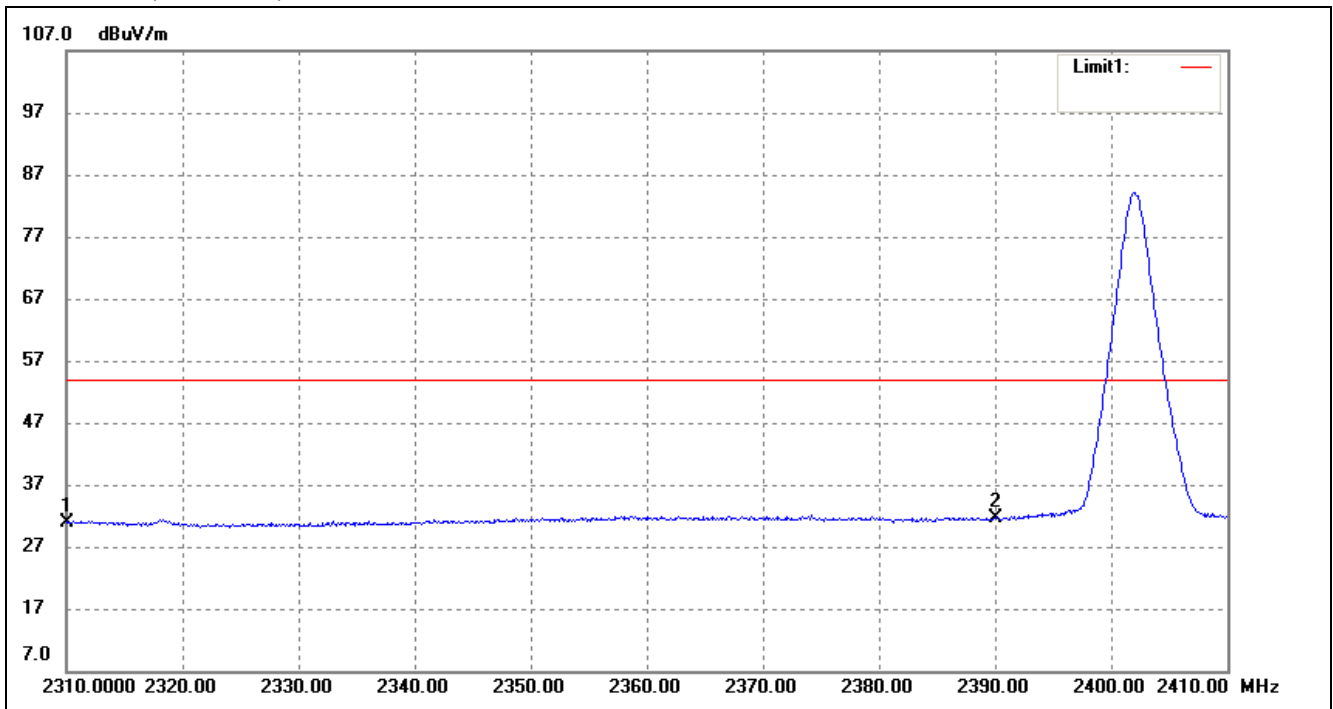

No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2310.000	35.30	-4.42	30.88	54.00	-23.12	Average Detector
	2310.000	46.10	-4.42	41.68	74.00	-32.32	Peak Detector
2	2390.000	35.33	-3.72	31.61	54.00	-22.39	Average Detector
	2390.000	47.44	-3.72	43.72	74.00	-30.28	Peak Detector


Highest Bandedge-BLE  
Horizontal (Worst case)

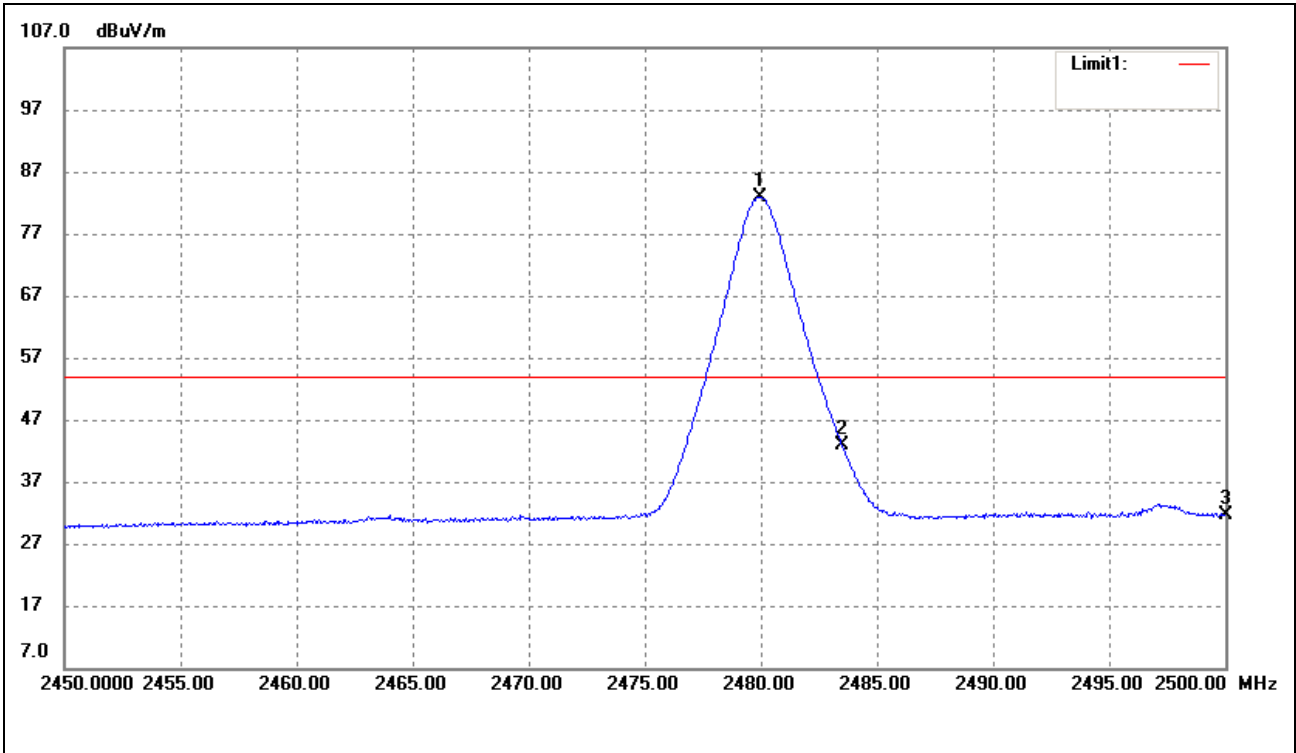


No.	Frequency (MHz)	Reading (dBuV/m)	Correct (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2479.950	86.48	-3.55	82.93	/	/	Average Detector
	2480.250	89.70	-3.55	86.15	/	/	Peak Detector
2	2483.500	Delta = 48.16 dBc		34.77	54.00	-19.23	Average Detector
	2483.500			37.99	74.00	-36.01	Peak Detector
3	2500.000	34.94	-3.40	31.54	54.00	-22.46	Average Detector
	2500.000	46.74	-3.40	43.34	74.00	-30.66	Peak Detector

## Bandedge (Conducted)

Lowest

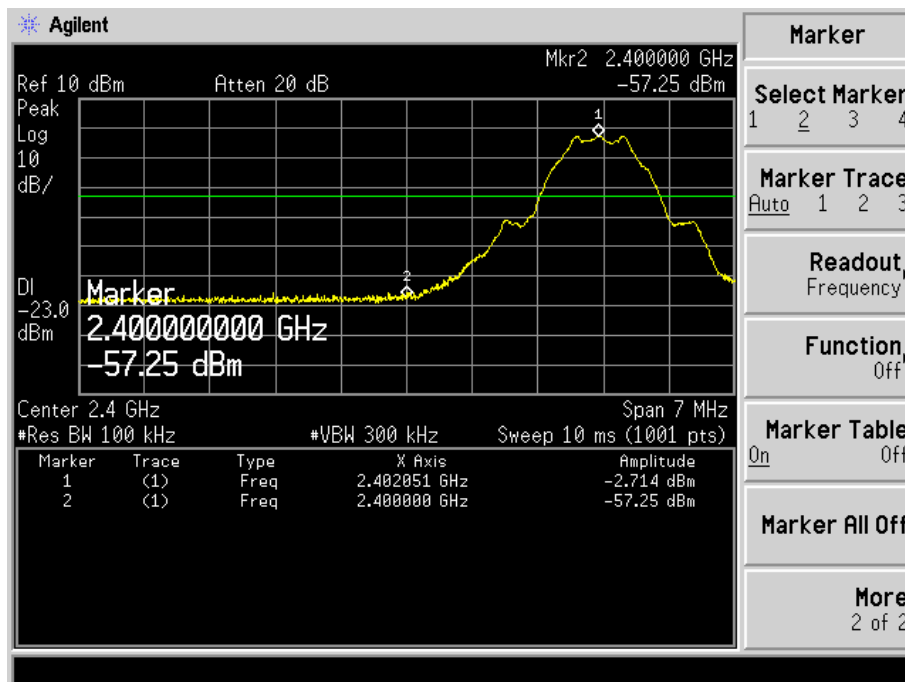


## Highest

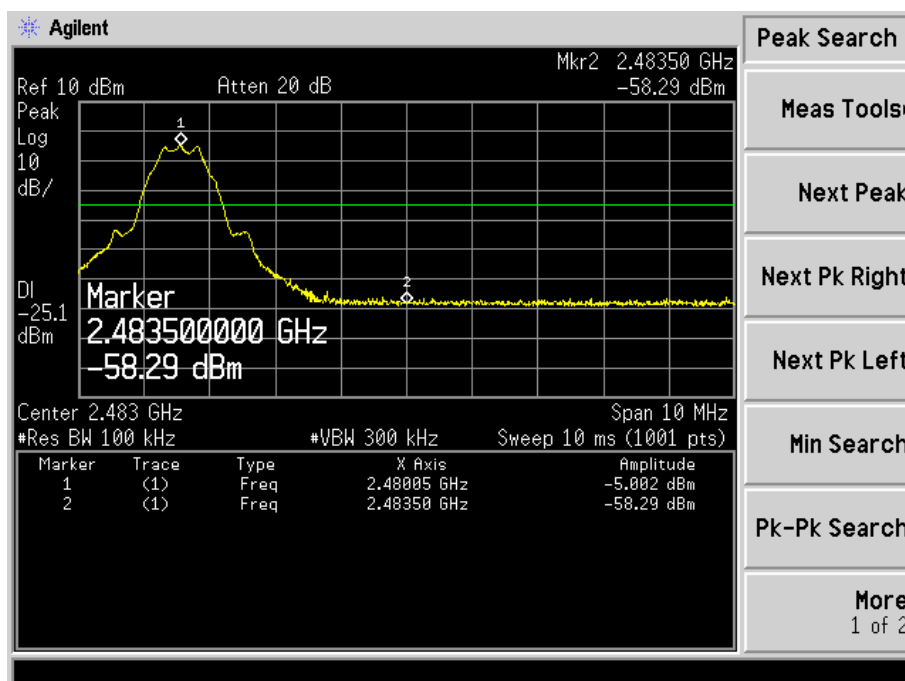


### Conducted Spurious Emission


Low Channel

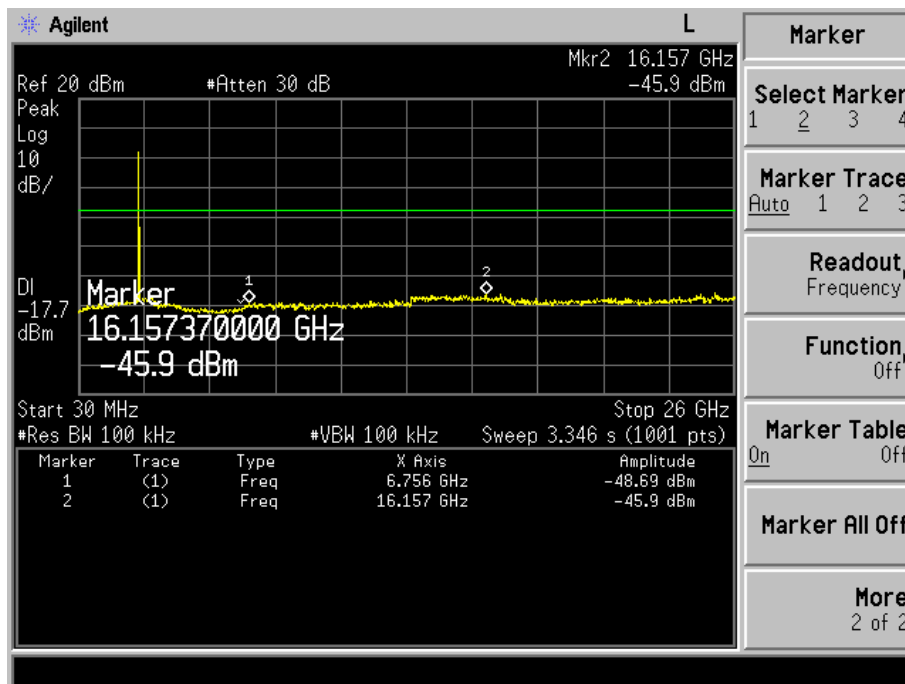

Middle Channel

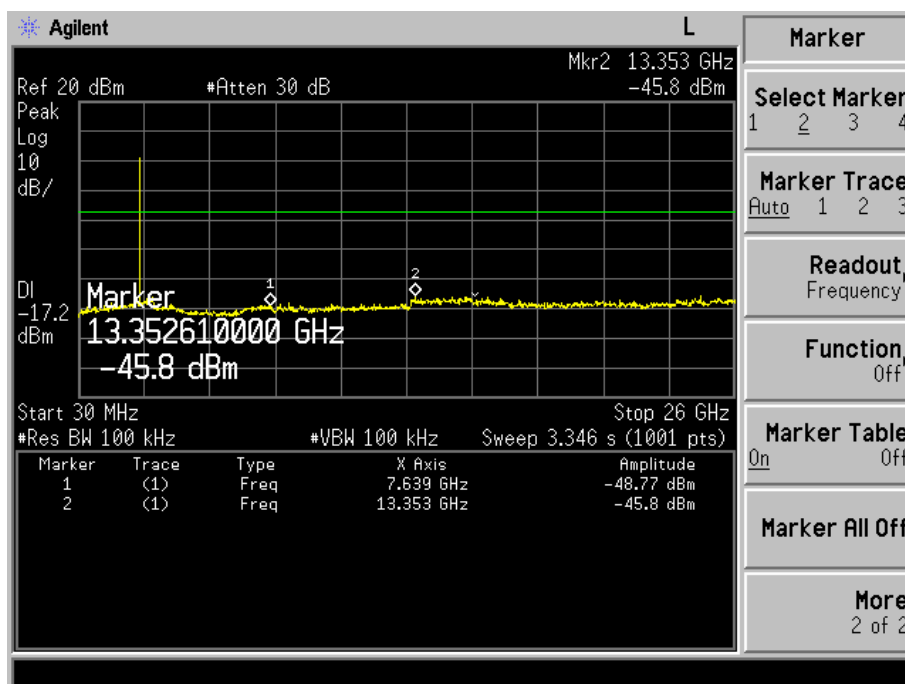

High Channel

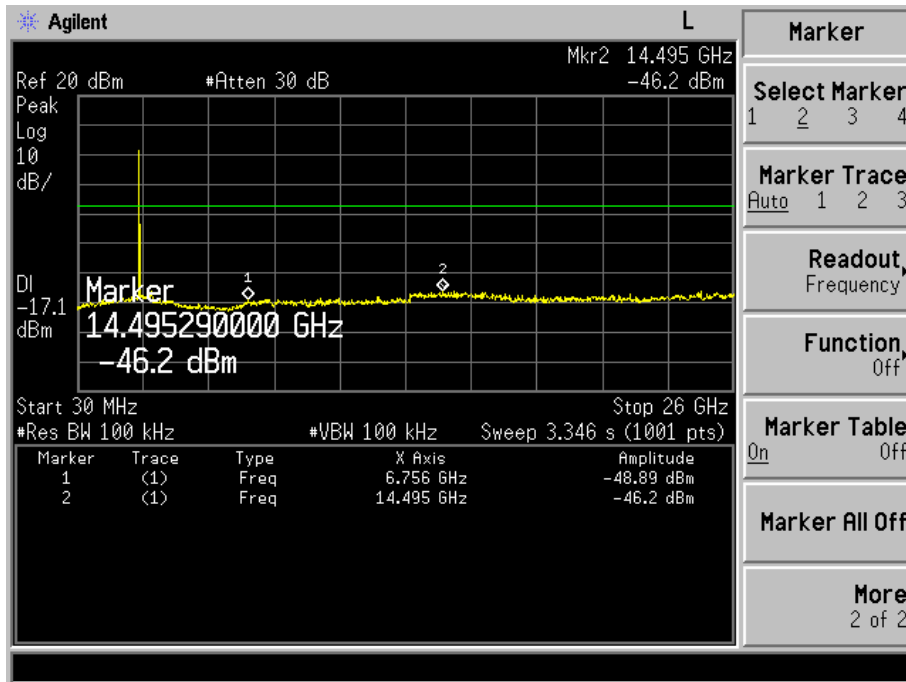

## 10. Conducted Emissions

### 10.1 Measurement Uncertainty


Base on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of any conducted emissions measurement is  $\pm 2.88$  dB.

### 10.2 Test Procedure

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15.207 Limit.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle. The spacing between the peripherals was 10 cm.

### 10.3 Basic Test Setup Block Diagram

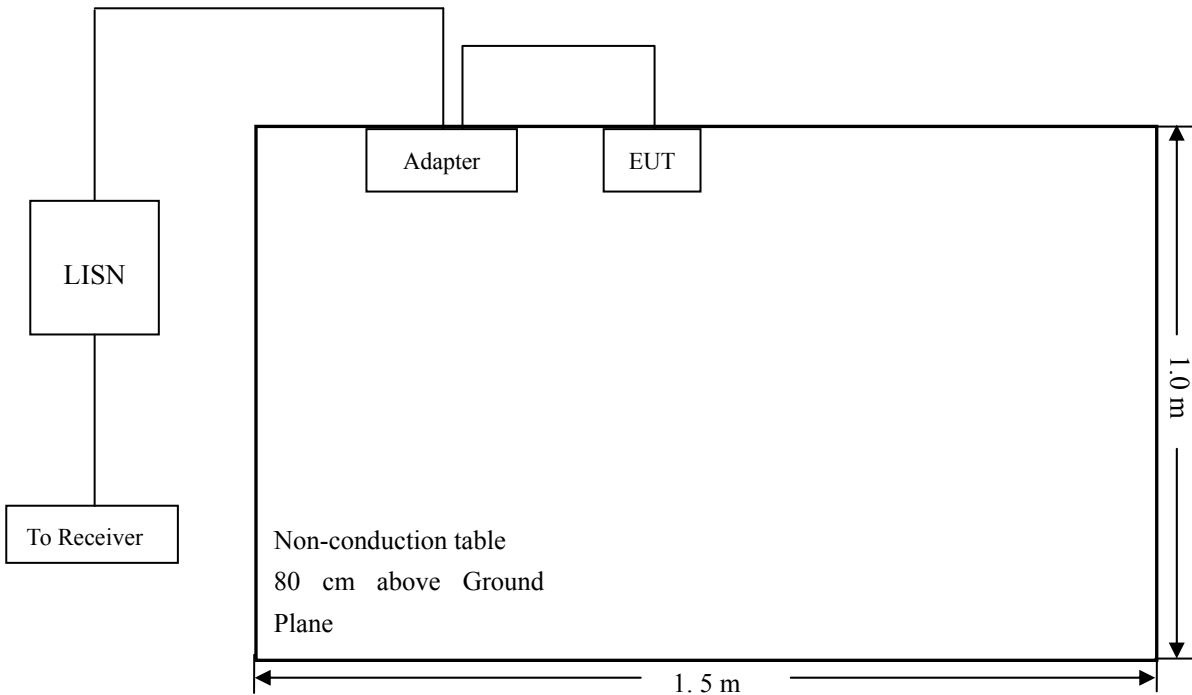

### 10.4 Environmental Conditions

Temperature:	25 °C
Relative Humidity:	52%
ATM Pressure:	1012 mbar



### 10.5 Test Receiver Setup

During the conducted emission test, the test receiver was set with the following configurations:

Start Frequency ..... 150 kHz  
Stop Frequency..... 30 MHz  
Sweep Speed ..... Auto  
IF Bandwidth..... 10 kHz  
Quasi-Peak Adapter Bandwidth ..... 9 kHz  
Quasi-Peak Adapter Mode ..... Normal

### 10.6 Summary of Test Results/Plots


According to the data in section 10.7, the EUT complied with the FCC Part 15.207 Conducted margin for this device, with the *worst* margin reading of:

**-5.08 dB at 0.1540 MHz** in the Neutral, **Peak** detector, 0.15-30MHz

### 10.7 Conducted Emissions Test Data


**Plot of Conducted Emissions Test Data**

EUT: *MINI BLUETOOTH SPEAKER FOR GUITAR*  
 Tested Model: *TOP-GT*  
 Operating Condition: *Transmitting*  
 Comment: *AC 120V/60Hz; Adapter USB 9V*  
 Test Specification: *Neutral*

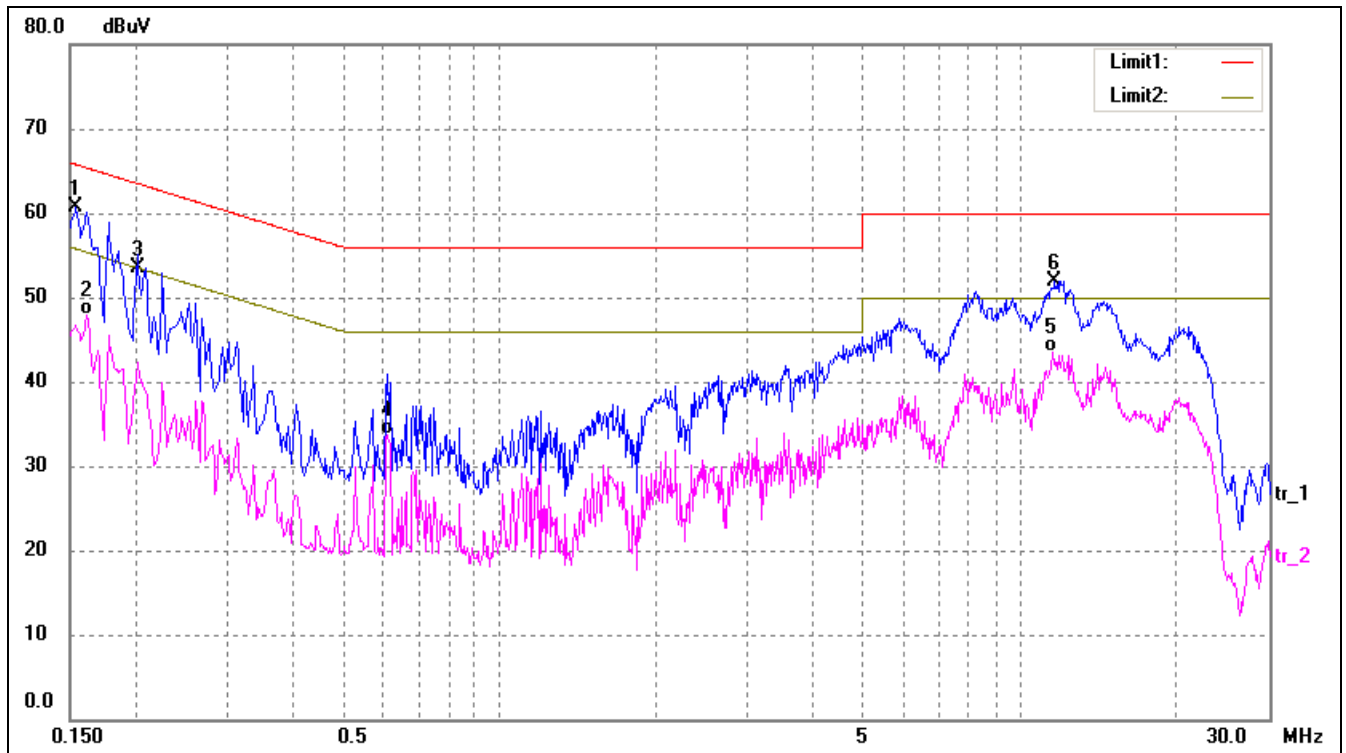

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1*	0.1540	51.20	9.50	60.70	65.78	-5.08	peak
2	0.1620	38.45	9.50	47.95	55.36	-7.41	AVG
3	0.2029	43.96	9.50	53.46	63.49	-10.03	peak
4	0.6100	24.17	9.59	33.76	46.00	-12.24	AVG
5	11.5060	33.17	10.38	43.55	50.00	-6.45	AVG
6	11.6780	41.59	10.38	51.97	60.00	-8.03	peak

Test Specification: Line

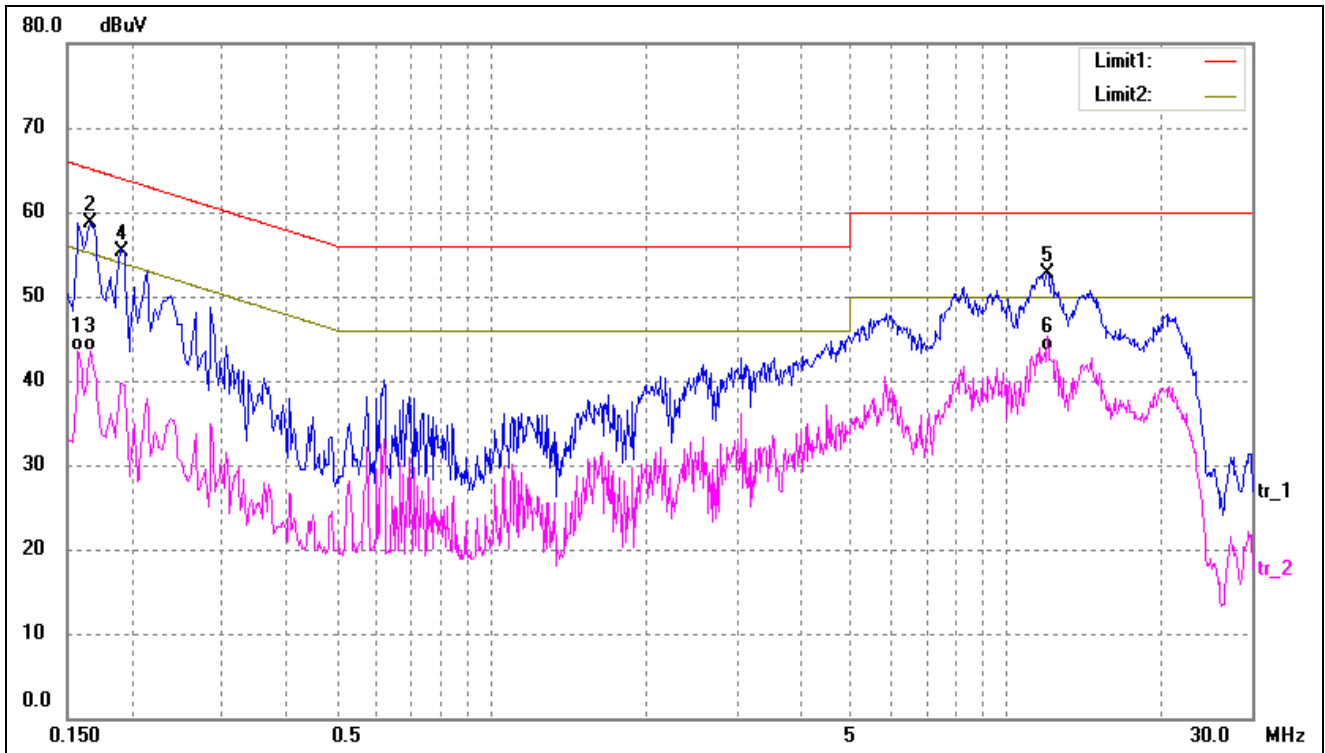

No.	Frequency (MHz)	Reading (dBuV)	Correct (dB/m)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.1580	34.01	9.50	43.51	55.57	-12.06	AVG
2*	0.1660	49.18	9.50	58.68	65.16	-6.48	peak
3	0.1660	33.94	9.50	43.44	55.16	-11.72	AVG
4	0.1914	45.87	9.50	55.37	63.98	-8.61	peak
5	12.0460	42.32	10.38	52.70	60.00	-7.30	peak
6	12.0460	33.13	10.38	43.51	50.00	-6.49	AVG

\*\*\*\*\* END OF REPORT \*\*\*\*\*