


## FCC ID: 2AIOC-1090 RF Exposure Report

### Test Requirement:

Environmental evaluation and exposure limit according to FCC CFR 47 Part 1.1307(b), 1.1310  
According KDB680106 D01v02: RF Exposure Wireless Charging Apps v02 and FCC CFR 47 Part 2.1091(d)(4)

### Test Setup

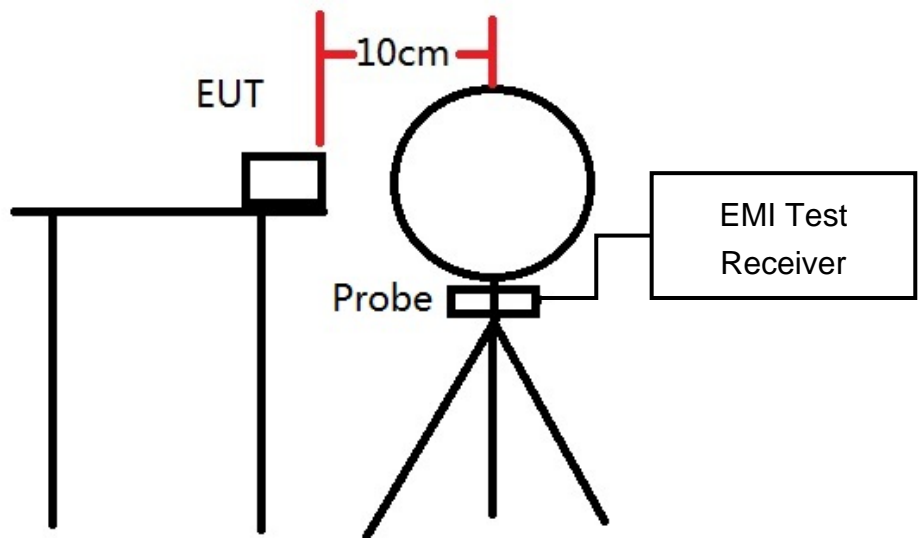

These testing were performed at test configuration as above diagram.

EUT was placed on a table, and the measure probe was placed at a measurement distance of 10cm from the EUT to the center of the probe.

The EUT was put in different directions (Left, Right, Front, Rear, Top and Bottom) to obtain the maximum reading.

**The procedures / limit**

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz; \*Plane-wave equivalent power density

**RF Exposure Evaluations**

Test Side	Separation Distance(cm)	Measured Result(V/m)	Limit(V/m)	Result
Left	10	3.16	614	Compliance
Right	10	3.22	614	Compliance
Front	10	3.19	614	Compliance
Rear	10	3.21	614	Compliance
Top	10	3.15	614	Compliance
Bottom	10	3.20	614	Compliance
Max Margin (%)	0.52	Limit (%)	30	

Remark: The device meets the mobile RF exposure limit at a 10cm separation distance as specified in §2.1091 of the FCC Rules. The maximum leakage fields at 10 cm surrounding the device from transmitting coil is demonstrated to be less than 30% of the MPE limit.

$$\text{dBuV/m to V/m } V/m=10^{((\text{dBuV/m})-120)/20}$$