

# TEST REPORT

**Reference No.** ..... : WTS17S0990131E  
**FCC ID**..... : 2AIOC-FLD01  
**Applicant** ..... : HANK ELECTRONICS CO., LTD.  
**Address** ..... : Floor 2nd-7th,A8,Hongye Industry City, Lezhujiao, Zhoushi Road,Baoan District, Shenzhen, China  
**Manufacturer** ..... : HANK ELECTRONICS CO., LTD.  
**Address** ..... : Floor 2nd-7th,A8,Hongye Industry City, Lezhujiao, Zhoushi Road,Baoan District, Shenzhen, China  
**Product** ..... : FLOOD SENSOR  
**Model(s)**..... : HKZW-FLD01  
**Standards**..... : FCC CFR47 Part 15 Section 15.249:2016  
**Date of Receipt sample**.... : 2017-09-13  
**Date of Test**..... : 2017-09-14 to 2017-09-26  
**Date of Issue**..... : 2017-09-27  
**Test Result** ..... : Pass

**Remarks:**

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

**Prepared By:**

**Waltek Services (Shenzhen) Co., Ltd.**

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:

*Robin Zhou*

Robin Zhou / Test Engineer

Approved by:



*Philo Zhong*

Philo Zhong / Manager

## 1 Laboratories Introduction

**Waltek Services Test Group Ltd.** is one of the largest and the most comprehensive third party testing organizations in China, our headquarter located in Shenzhen (CNAS Registration No. L3110, A2LA Certificate Number: 4243.01) and have branches in Foshan (CNAS Registration No. L6478), Dongguan (CNAS Registration No. L9950), Zhongshan, Suzhou (CNAS Registration No. L7754), Ningbo and Hong Kong, Our test capability covered four large fields: safety test. Electronic Magnetic Compatibility(EMC), reliability and energy performance, Chemical test. Meanwhile, Waltek has got recognition as registration and accreditation laboratory from EMSD (Electrical and Mechanical Services Department), and American Energy star, FCC(The Federal Communications Commission), CPSC(Consumer Product Safety Commission), CEC(California energy efficiency), IC(Industry Canada) and ELI(Efficient Lighting Initiative). It's the strategic partner and data recognition laboratory of international authoritative organizations, such as UL, Intertek(ETL-SEMKO), CSA, TÜV Rheinland, TÜV SÜD, etc. As a professional, comprehensive, justice international test organization, we still keep the scientific and rigorous work attitude to help each client satisfy the international standards and assist their product enter into globe market smoothly.

### Waltek Services (Shenzhen) Co., Ltd.

#### A. Accreditations for Conformity Assessment (International)

Country/Region	Accreditation Body	Scope	Note	
USA	<b>CNAS (Registration No.: L3110) A2LA (Certificate No.: 4243.01)</b>	FCC ID \ DOC \ VOC	1	
Canada		IC ID \ VOC	2	
Japan		MIC-T \ MIC-R	-	
Europe		EMCD \ RED	-	
Taiwan		NCC	-	
Hong Kong		OFCA	-	
Australia		RCM	-	
India		WPC	-	
Thailand		<b>International Services</b>	NTC	-
Singapore			IDA	-
Note:				
1. FCC Designation No.: CN1201. Test Firm Registration No.: 523476.				
2. IC Canada Registration No.: 7760A				

#### B. TCBs and Notify Bodies Recognized Testing Laboratory.

Recognized Testing Laboratory of ...	Notify body number
TUV Rheinland	Optional.
Intertek	
TUV SUD	
SGS	
Phoenix Testlab GmbH	0700
Element Materials Technology Warwick Ltd	0891
Timco Engineering, Inc.	1177
Eurofins Product Service GmbH	0681

## 2 Contents

	Page
<b>COVER PAGE</b> .....	<b>1</b>
<b>1 LABORATORIES INTRODUCTION</b> .....	<b>2</b>
<b>2 CONTENTS</b> .....	<b>3</b>
<b>3 REVISION HISTORY</b> .....	<b>4</b>
<b>4 GENERAL INFORMATION</b> .....	<b>5</b>
4.1    GENERAL DESCRIPTION OF E.U.T.....	5
4.2    DETAILS OF E.U.T.....	5
4.3    CHANNEL LIST .....	5
4.4    STANDARDS APPLICABLE FOR TESTING .....	5
4.5    TEST MODE .....	5
<b>5 EQUIPMENT USED DURING TEST</b> .....	<b>6</b>
5.1    EQUIPMENTS LIST .....	6
5.2    MEASUREMENT UNCERTAINTY.....	7
5.3    TEST EQUIPMENT CALIBRATION.....	7
<b>6 TEST SUMMARY</b> .....	<b>8</b>
<b>7 RADIATION EMISSION TEST</b> .....	<b>9</b>
7.1    EUT OPERATION.....	9
7.2    TEST SETUP .....	10
7.3    SPECTRUM ANALYZER SETUP.....	11
7.4    TEST PROCEDURE.....	12
7.5    FREQUENCY RANGE OF RADIATED MEASUREMENTS.....	12
7.6    TEST RESULT .....	13
<b>8 PERIODIC OPERATION</b> .....	<b>15</b>
<b>9 BAND EDGE</b> .....	<b>16</b>
9.1    TEST PROCEDURE.....	16
9.2    TEST RESULT .....	16
<b>10 20 DB BANDWIDTH MEASUREMENT</b> .....	<b>17</b>
10.1    TEST PROCEDURE.....	17
10.2    TEST RESULT .....	17
<b>11 ANTENNA REQUIREMENT</b> .....	<b>18</b>
<b>12 PHOTOGRAPHS- MODEL HKZW-FLD01 TEST SETUP PHOTOS</b> .....	<b>19</b>
12.1    PHOTOGRAPH – RADIATION EMISSION .....	19
<b>13 PHOTOGRAPHS - CONSTRUCTIONAL DETAILS</b> .....	<b>21</b>
13.1    MODEL HKZW-FLD01 - EXTERNAL PHOTOS .....	21
13.2    MODEL HKZW-FLD01 - INTERNAL PHOTOS .....	25

**3 Revision History**

Test report No.	Date of Receipt sample	Date of Test	Date of Issue	Purpose	Comment	Approved
WTS17S0990131E	2017-09-13	2017-09-14 to 2017-09-26	2017-09-27	Original	-	Valid

## 4 General Information

### 4.1 General Description of E.U.T.

Product:	FLOOD SENSOR
Model(s):	HKZW-FLD01
Model Differences Description:	N/A
Type of Modulation:	FSK
Frequency Range:	908.42MHz
Antenna installation:	PCB Printed Antenna
Antenna Gain:	0dBi

### 4.2 Details of E.U.T.

Ratings: Input: DC 3.6V by non-rechargeable LITTHIUM BATTERY(1xER14250)

### 4.3 Channel List

Channel No.	Frequency (MHz)
1	908.42

### 4.4 Standards Applicable for Testing

The tests were performed according to following standards:

FCC CFR47 Part 15 Section 15.249:2016 Telecommunication-RADIO FREQUENCY DEVICES-Intentional Radiators-Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHZ, and 24.0-24.25 GHz.

### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests.

Test mode	Test channel
Transmitting	908.42MHz

## 5 Equipment Used during Test

### 5.1 Equipments List

3m Semi-anechoic Chamber for Radiation Emissions Test site						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	Spectrum Analyzer	R&S	FSP	100091	2017-04-29	2018-04-28
2	Amplifier	Agilent	8447D	2944A10178	2017-01-12	2018-01-11
3	Active Loop Antenna	Beijing Dazhi	ZN30900A	0703	2016-10-17	2017-10-16
4	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	2017-04-07	2018-04-06
5	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	2017-09-12	2018-09-11
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	2017-04-07	2018-04-06
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	2017-04-07	2018-04-06
8	Coaxial Cable (above 1GHz)	Top	1GHz-18GHz	EW02014-7	2017-04-07	2018-04-06
3m Semi-anechoic Chamber for Radiation Emissions Test site						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	2017-04-06	2018-04-05
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	2017-04-07	2018-04-06
3	Amplifier	ANRITSU	MH648A	M43381	2017-04-07	2018-04-06
4	Cable	HUBER+SUHNER	CBL2	525178	2017-04-07	2018-04-06
RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
2.	Spectrum Analyzer (9k-6GHz)	R&S	FSL6	100959	2017-09-12	2018-09-11
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	2017-09-12	2018-09-11

## 5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	$\pm 1.0$ dB
RF Power Density	$\pm 2.2$ dB
Radiated Spurious Emissions test	$\pm 5.03$ dB (Bilog antenna 30M~1000MHz)
	$\pm 5.47$ dB (Horn antenna 1000M~25000MHz)

## 5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by GUANG ZHOU GRG METROLOGY & TEST CO., LTD. address is No.163, Pingyun Rd. West of Huangpu Ave, Tianhe District, Guangzhou, Guangdong, China.

## 6 Test Summary

Test Items	Test Requirement	Result
Conducted Emissions	15.207	Pass
Radiated Emission	15.249(a) 15.209 15.205(a)	Pass
Periodic Operation	15.35(c)	Pass
Band Edge	15.249 15.205 15.209	Pass
20dB Bandwidth	15:215(c)	Pass
Antenna Requirement	15.203	Pass
Note: Pass=Compliance; NC=Not Compliance; NT=Not Tested; N/A=Not Applicable.		



## 7 Radiation Emission Test

Test Requirement: FCC Part15 Paragraph 15.249&15.209&15.205  
 Test Method: ANSI 63.10: 2013;ANSI C63.4:2014  
 Measurement Distance: 3m  
 Test Result: PASS

15.249(a)Limit:

Fundamental frequency	Field strength of fundamental		Field strength of harmonics	
	mV/m	dBuV/m	uV/m	dBuV/m
902-928 MHz	50	94	500	54
2400-2483.5 MHz	50	94	500	54
5725-5875 MHz	50	94	500	54
24.0-24.25 GHz	250	108	2500	68

15.209 Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40=(29.54+40)$
30 ~ 88	100	3	100	$20\log^{(100)}=(40)$
88 ~ 216	150	3	150	$20\log^{(150)}=(43.5)$
216 ~ 960	200	3	200	$20\log^{(200)}=(46)$
Above 960	500	3	500	$20\log^{(500)}=(54)$

**Note:** RF Voltage(dBuV)=20 log<sub>10</sub> RF Voltage(uV)

### 7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C  
 Humidity: 51.1 % RH  
 Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in Transmitting mode (DC 3.6V by battery), the test data were shown in the report.


## 7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10: 2013.


The test setup for emission measurement below 30MHz.

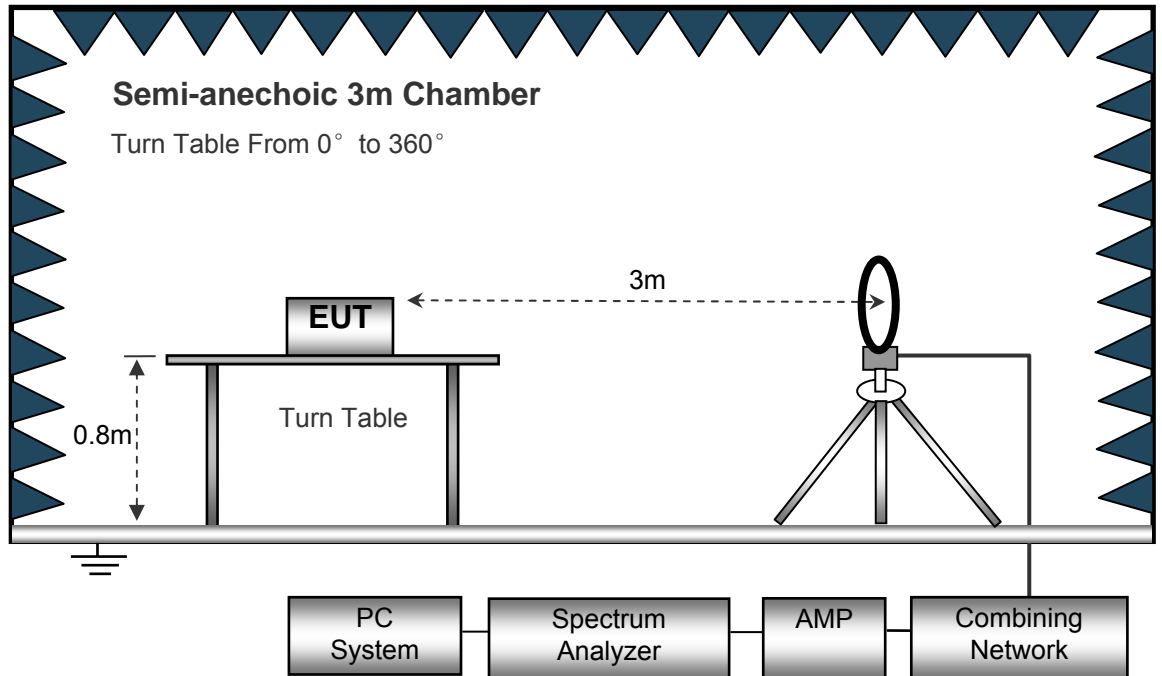

The test setup for emission measurement from 30MHz to 1GHz.

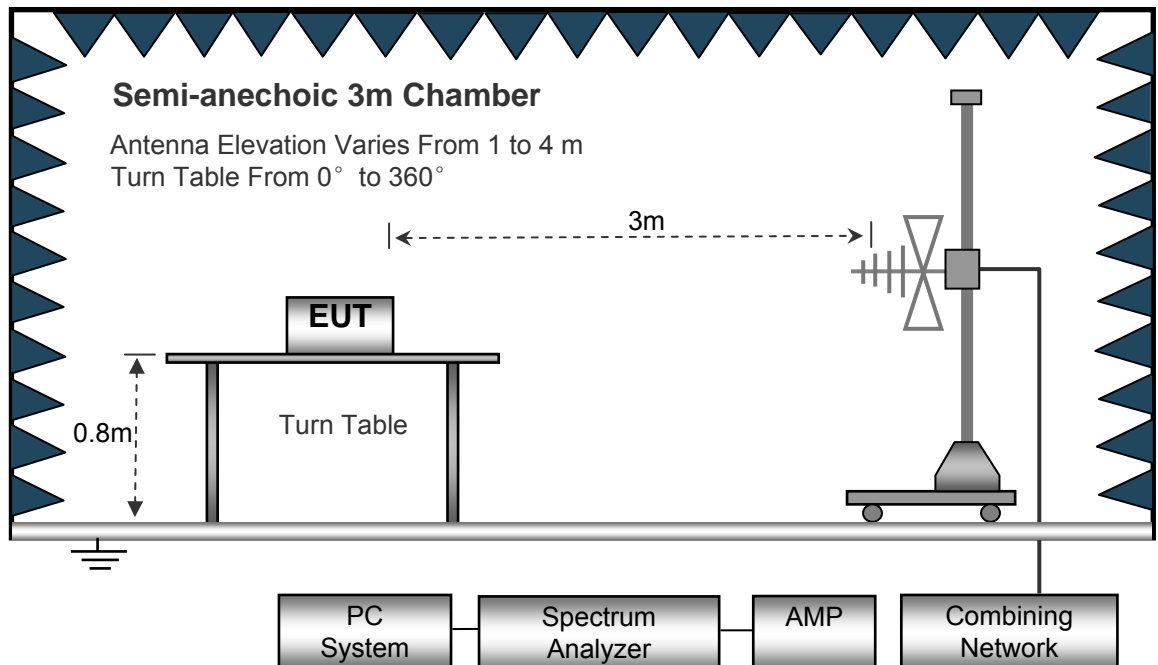

The test setup for emission measurement above 1 GHz.

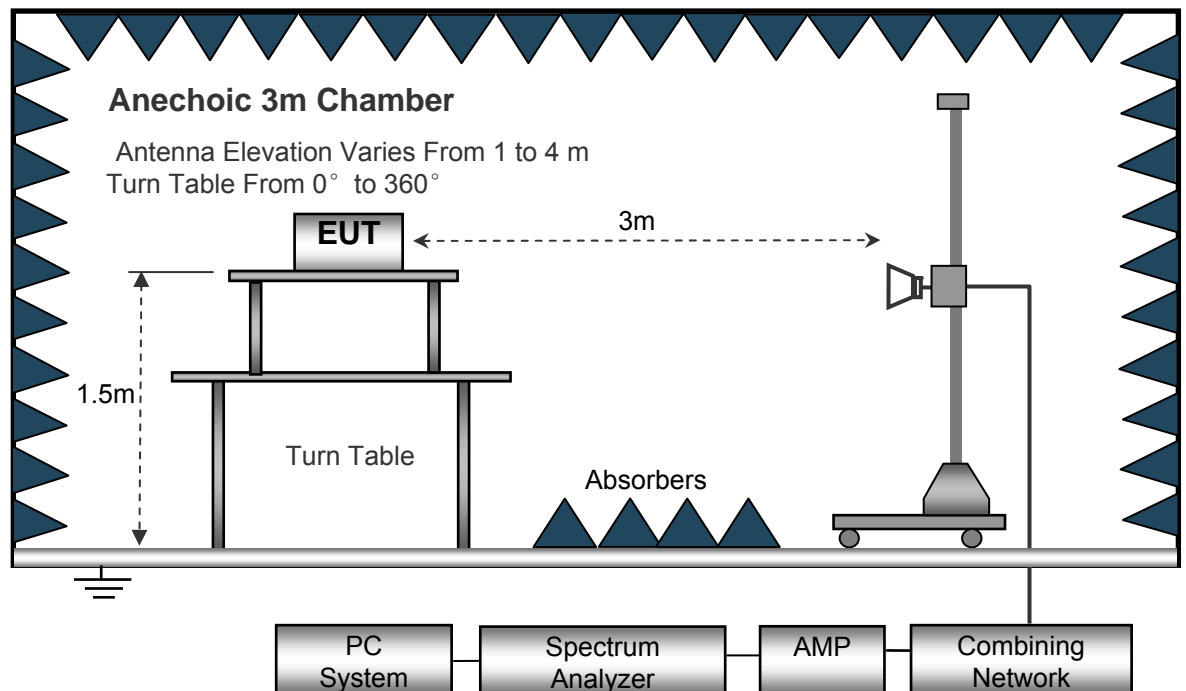

### 7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed ..... Auto  
 IF Bandwidth..... 10kHz  
 Video Bandwidth ..... 10kHz  
 Resolution Bandwidth ..... 10kHz

30MHz ~ 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 100kHz  
 Video Bandwidth ..... 300kHz

Above 1GHz

Sweep Speed ..... Auto  
 Detector ..... PK  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth ..... 3MHz  
 Detector ..... Ave.  
 Resolution Bandwidth..... 1MHz  
 Video Bandwidth ..... 10Hz

Video Bandwidth ..... 10Hz

## 7.4 Test Procedure

1. The EUT is placed on a turntable. For below 1GHz, the EUT is 0.8m above ground plane; For above 1GHz, the EUT is 1.5m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions. The spectrum was investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X, Y, Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), after pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

## 7.5 Frequency range of radiated measurements.

According to FCC 47 CFR Section 15.33:

(a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

- (1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.
- (2) If the intentional radiator operates at or above 10 GHz and below 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 100 GHz, whichever is lower.
- (3) If the intentional radiator operates at or above 30 GHz: to the fifth harmonic of the highest fundamental frequency or to 200 GHz, whichever is lower, unless specified otherwise elsewhere in the rules.
- (4) If the intentional radiator contains a digital device, regardless of whether this digital device controls the functions of the intentional radiator or the digital device is used for additional control or function purposes other than to enable the operation of the intentional radiator, the frequency range shall be investigated up to the range specified in paragraphs (a)(1) through (a)(3) of this section or the range applicable to the digital device, as shown in paragraph (b)(1) of this section, whichever is the higher frequency range of investigation.

Result: So the Frequency range of radiated form: 9KHz to 10GHz.

## 7.6 Test Result

### Test Frequency: 9 KHz~30 MHz

The measurements were more than 20 dB below the limit and not reported.

### Test Frequency: 30MHz ~ 10GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.249/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB $\mu$ V)	(PK/QP)	Degree	(m)	(H/V)	(dB/m)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)
55.80	39.68	QP	234	1.3	V	-16.92	22.76	40.00	-17.24
908.42	87.67	PK*	323	1.6	H	1.98	89.65	114.00	-24.35
908.42	86.67	PK*	242	1.5	V	1.98	88.65	114.00	-25.35
1816.84	60.15	PK	163	1.4	H	-13.80	46.35	74.00	-27.65
1816.84	60.28	PK	94	1.3	V	-13.80	46.48	74.00	-27.52
2725.26	58.18	PK	55	1.3	H	-11.14	47.04	74.00	-26.96
2725.26	59.31	PK	65	1.5	V	-11.14	48.17	74.00	-25.83
3633.68	56.13	PK	211	1.5	H	-9.35	46.78	74.00	-27.22
3633.68	57.80	PK	92	1.2	V	-9.35	48.45	74.00	-25.55

(\* Note: For pulse modulated devices with a pulse-repetition frequency of 20 Hz or less and for which CISPR quasi-peak measurements are specified, compliance with the regulations shall be demonstrated using measuring equipment employing a peak detector function, properly adjusted for such factors as pulse desensitization, using the same measurement bandwidths that are indicated for CISPR quasi-peak measurements. So based on the data in Section9, the PRF is 5.46Hz which less than 20Hz, measuring equipment employing a peak function.)

AV = Peak +20Log10(duty cycle) =PK+(-10.23) [refer to section 9 for more detail]

Frequency	PK	RX Antenna Polar	Duty cycle Factor	AV	FCC Part 15.249/209/205	
					Limit	Margin
(MHz)	(dBμV/m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
908.42	87.67	H	-10.23	77.44	94.00	-16.56
908.42	86.67	V	-10.23	76.44	94.00	-17.56
1816.84	60.15	H	-10.23	49.92	54.00	-4.08
1816.84	60.28	V	-10.23	50.05	54.00	-3.95
2725.26	58.18	H	-10.23	47.95	54.00	-6.05
2725.26	59.31	V	-10.23	49.08	54.00	-4.92
3633.68	56.13	H	-10.23	45.90	54.00	-8.10
3633.68	57.80	V	-10.23	47.57	54.00	-6.43

## 8 Periodic Operation

The duty cycle was determined by the following equation:

To calculate the actual field intensity, the duty cycle correction factor in decibel is needed for later use and can be obtained from following conversion

Duty Cycle(%)=Total On interval in a complete pulse train/ Length of a complete pulse train \* %


Duty Cycle Correction Factor(dB)=20 \* Log<sub>10</sub>(Duty Cycle Correction Factor)

Pulse-repetition frequency (Hz) =1/ Pulse duration(s)

Total transmission time(ms)	30.80
Pulse duration(s)	0.183
Pulse-repetition frequency(Hz)	5.46
Length of a complete transmission period(ms)	100*
Duty Cycle(%)	30.80
Duty Cycle Correction Factor(dB)	-10.23

(\* Note: the transmitter operates for longer than 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. So the Length of a complete transmission period=100ms)

Refer to the duty cycle plot (as below)

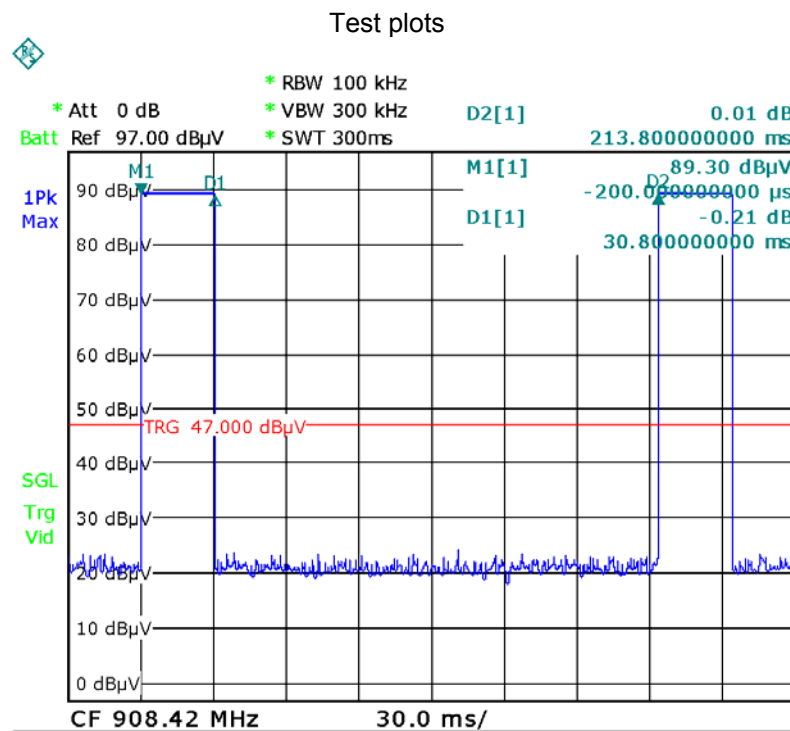


## 9 Band Edge

Test Requirement:	15.249(d):Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.
Test Method:	ANSI C63.10:2013
Test Mode:	Transmitting

### 9.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz, Sweep = auto  
Detector function = peak, Trace = max hold

### 9.2 Test Result

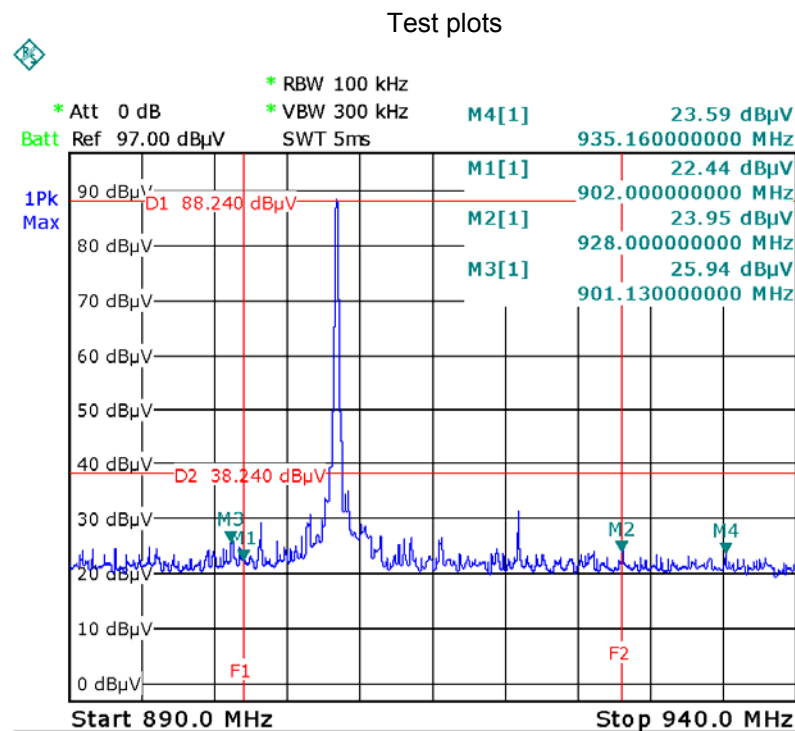



## 10 20 dB Bandwidth Measurement


Test Requirement: FCC CFR47 Part 15 Section 15.215(c)  
 Test Method: ANSI C63.10:2013  
 Test Mode: Transmitting

### 10.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyser: RBW = 3 kHz, VBW = 10 kHz

### 10.2 Test Result

Frequency (MHz)	20dB Bandwidth Emission (kHz)
908.42	64.67

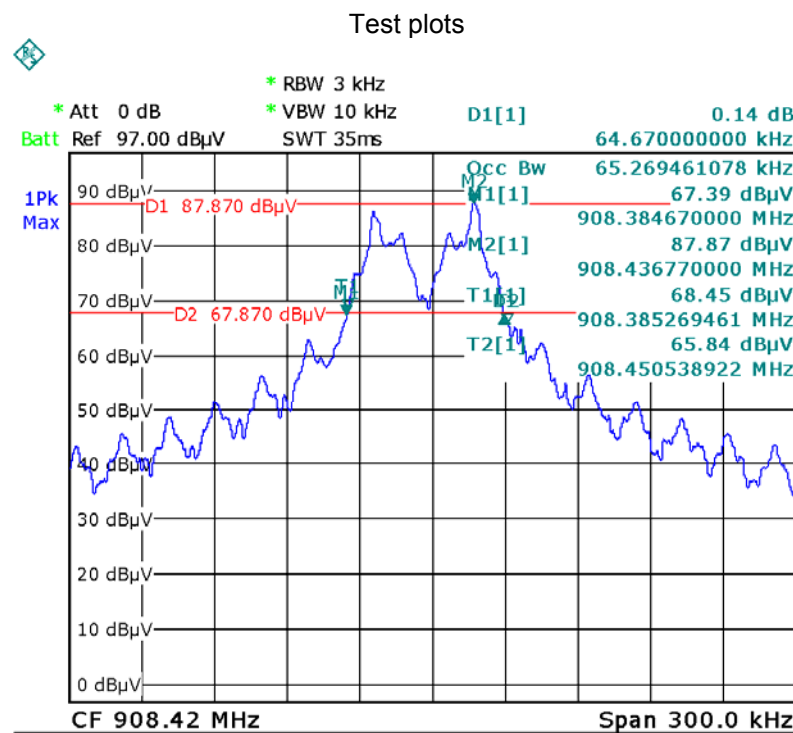


## 11 Antenna Requirement

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Result:

The EUT has one PCB Printed Antenna for Z-wave, the gain is 0dBi. meets the requirements of FCC 15.203.

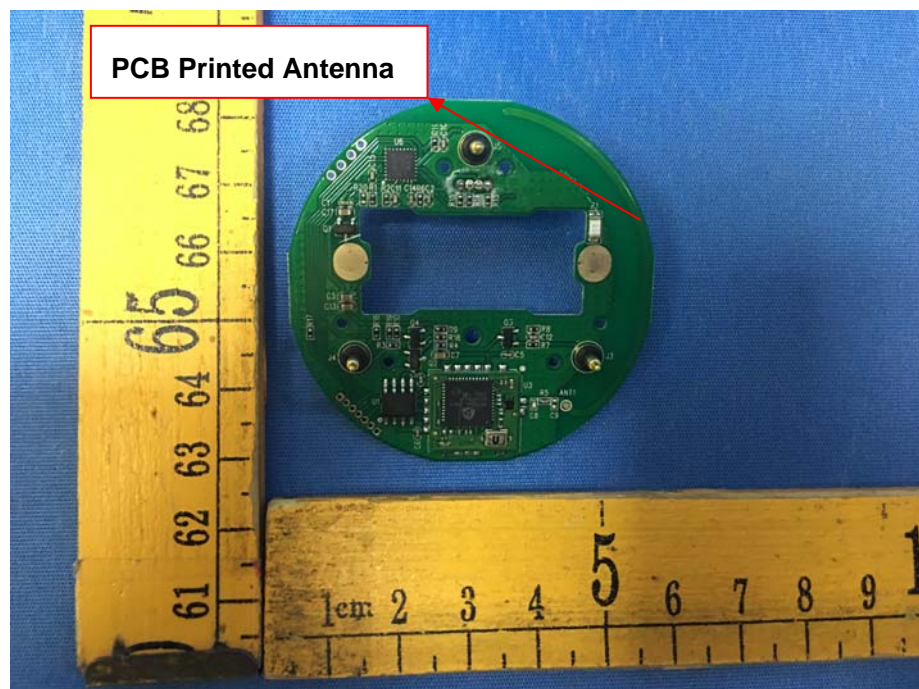

## 12 Photographs- Model HKZW-FLD01 Test Setup Photos

### 12.1 Photograph – Radiation Emission

Test frequency from 9 KHz to 30 MHz at test



Test frequency from 30 MHz to 1 GHz at test




Test frequency from 1GHz to 10 GHz at test





### 13 Photographs - Constructional Details

#### 13.1 Model HKZW-FLD01 - External Photos

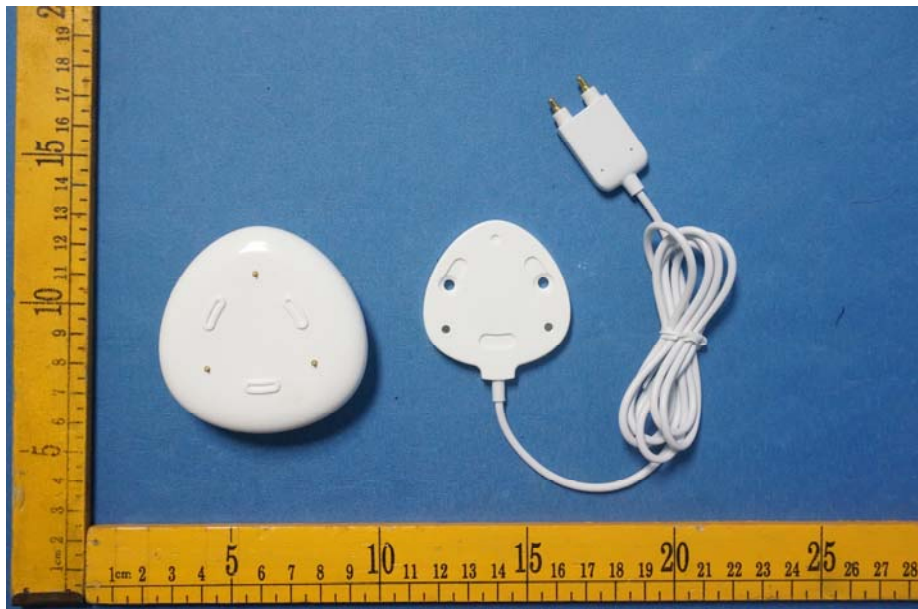












### 13.2 Model HKZW-FLD01 - Internal Photos

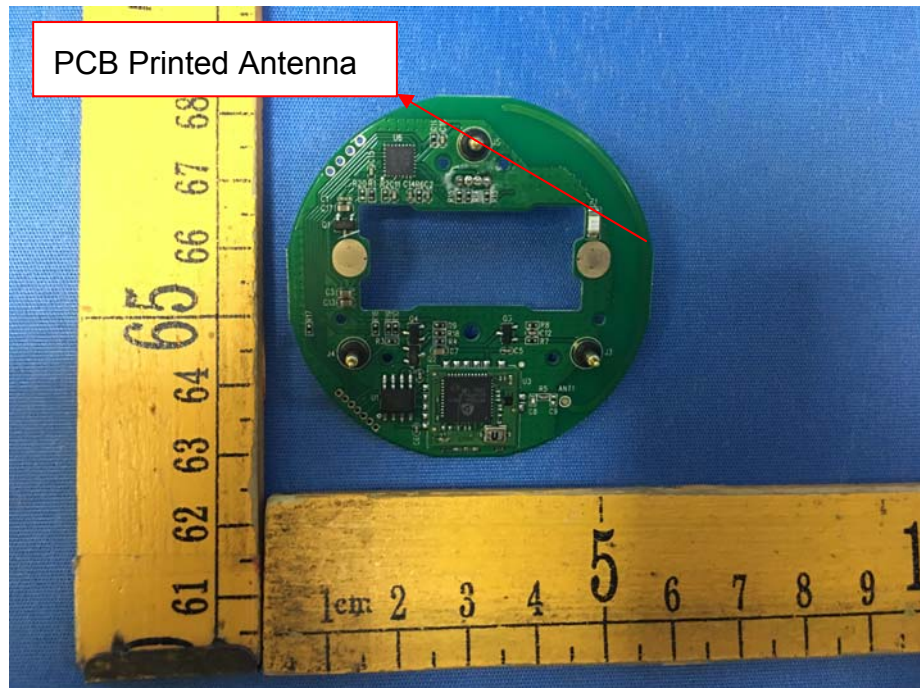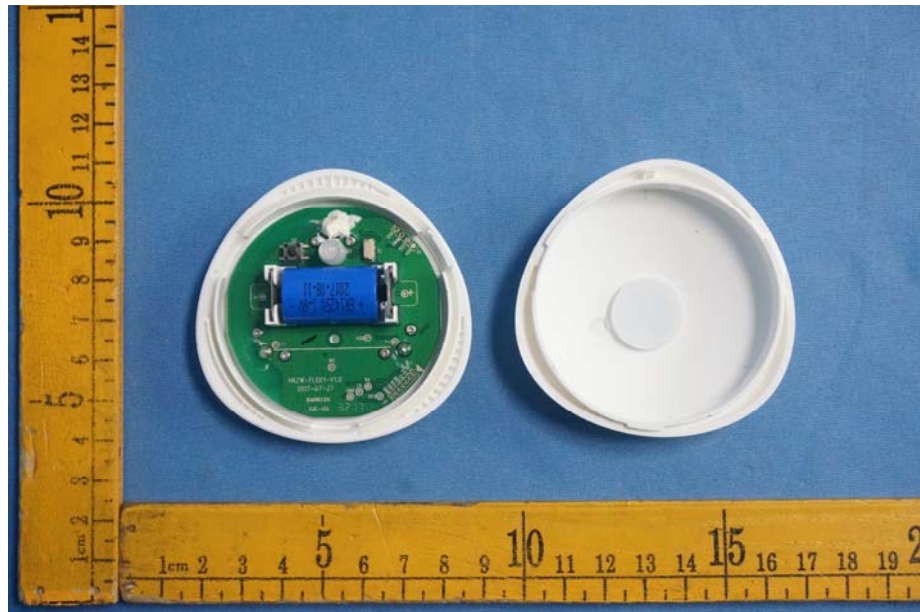

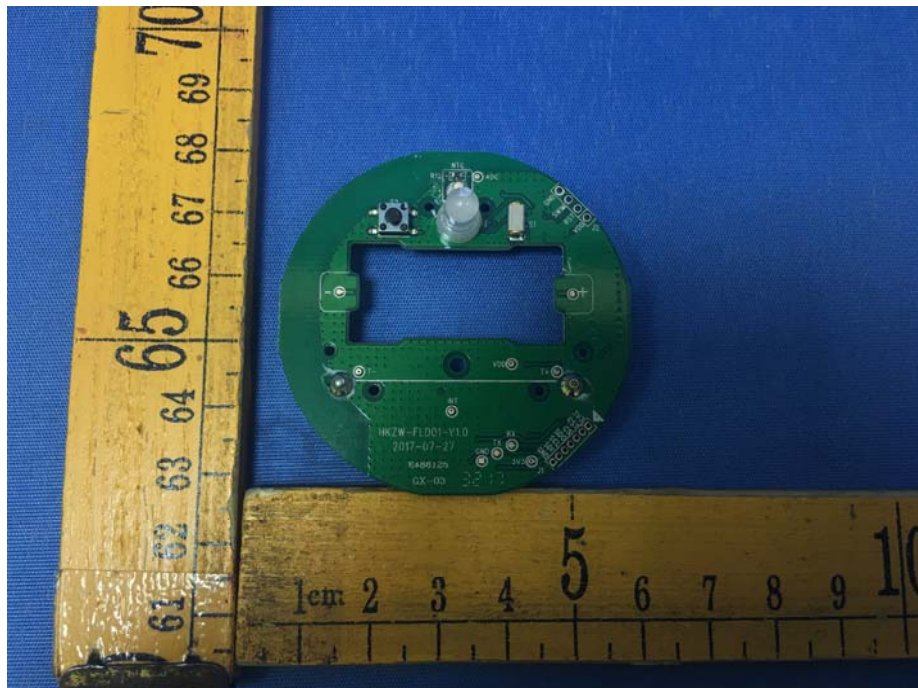



====End of Report====