



**FCC TEST REPORT**

Report No: STS1606066F01

Issued for

HANK ELECTRONICS CO., LTD.

Floor 2nd-7th,A8,Hongye Industry City, Lezhujiao, Zhoushi Road,Baoan District,Shenzhen,China

<b>Product Name:</b>	One-Key Scene Controller
<b>Brand Name:</b>	HANK,HDCLUB
<b>Model Name:</b>	HKZW-SCN01
<b>Series Model:</b>	HKZW-SCN04
<b>FCC ID:</b>	2AIOC-SCN01
<b>Test Standard:</b>	FCC Part 15.249

Any reproduction of this document must be done in full. No single part of this document may be reproduced without permission from STS, All Test Data Presented in this report is only applicable to presented Test sample.



**TEST RESULT CERTIFICATION**

**Applicant's name :** HANK ELECTRONICS CO., LTD.  
**Address :** Floor 2nd-7th,A8,Hongye Industry City, Lezhujiao, Zhoushi Road,Baoan District,Shenzhen,China  
**Manufacture's Name :** HANK ELECTRONICS CO., LTD.  
**Address :** Floor 2nd-7th,A8,Hongye Industry City, Lezhujiao, Zhoushi Road,Baoan District,Shenzhen,China

**Product description**

**Product name :** One-Key Scene Controller  
**Brand name :** HANK,HDCLUB  
**Model and/or type reference :** HKZW-SCN01, HKZW-SCN04

**Standards :** FCC Part15.249  
**Test procedure :** ANSI C63.10-2013, ANSI C63.4-2014

This device described above has been tested by STS, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

This report shall not be reproduced except in full, without the written approval of STS, this document may be altered or revised by STS, personal only, and shall be noted in the revision of the document.

**Date of Test :**  
**Date of performance of tests :** 12 June. 2016 ~07 July. 2016  
**Date of Issue :** 08 July. 2016  
**Test Result :** **Pass**

Testing Engineer :

(Tony Liu)

Technical Manager :

(Vita Li)

Authorized Signatory :

(Bovey Yang)





Table of Contents	Page
<b>1. SUMMARY OF TEST RESULTS</b>	<b>5</b>
1.1 TEST FACTORY	6
1.2 MEASUREMENT UNCERTAINTY	6
<b>2. GENERAL INFORMATION</b>	<b>7</b>
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	8
2.4 DESCRIPTION OF SUPPORT UNITS	9
2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS	10
<b>3. EMC EMISSION TEST</b>	<b>11</b>
3.1 CONDUCTED EMISSION MEASUREMENT	11
3.2 RADIATED EMISSION MEASUREMENT	15
<b>4. BANDWIDTH TEST</b>	<b>23</b>
4.1 TEST PROCEDURE	23
4.2 TEST SETUP	23
4.3 EUT OPERATION CONDITIONS	23
4.4 TEST RESULTS	24
<b>5. ANTENNA REQUIREMENT</b>	<b>25</b>
5.1 STANDARD REQUIREMENT	25
5.2 EUT ANTENNA	25
<b>APPENDIX I- PHOTOS OF TEST SETUP</b>	<b>26</b>



**Revision History**

Rev.	Issue Date	Report NO.	Effect Page	Contents
00	08 July. 2016	STS1606066F01	ALL	Initial Issue





## 1. SUMMARY OF TEST RESULTS


Test procedures according to the technical standards:

<b>FCC Part 15.249, Subpart C</b>			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	Pass	
15.203	Antenna Requirement	Pass	
15.249	Radiated Spurious Emission	Pass	
15.249	20dB Bandwidth	Pass	

### NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

(2) All tests are according to ANSI C63.4-2014 and ANSI C63.10-2013

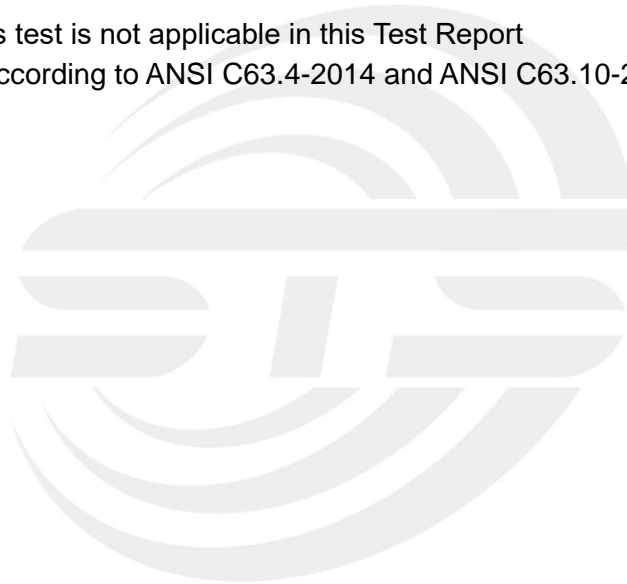



### 1.1 TEST FACTORY

Shenzhen STS Test Services Co., Ltd.

Add. : 1/F., Building B, Zhuoke Science Park, No.190, Chongqing Road,  
Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

CNAS Registration No.: L7649;

FCC Registration No.: 842334; IC Registration No.: 12108A-1

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	Conducted Emission (9KHz-150KHz)	$\pm 2.88\text{dB}$
2	Conducted Emission (150KHz-30MHz)	$\pm 2.67\text{dB}$
3	RF power,conducted	$\pm 0.70\text{dB}$
4	Spurious emissions,conducted	$\pm 1.19\text{dB}$
5	All emissions,radiated(<1G) 30MHz-200MHz	$\pm 2.83\text{dB}$
6	All emissions,radiated(<1G) 200MHz-1000MHz	$\pm 2.94\text{dB}$
7	All emissions,radiated(>1G)	$\pm 3.03\text{dB}$
8	Temperature	$\pm 0.5^{\circ}\text{C}$
9	Humidity	$\pm 2\%$



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

Equipment	One-Key Scene Controller
Trade Name	HANK,HDCLUB
Model Name	HKZW-SCN01
Series Model	HKZW-SCN04
Model Difference	Only difference is appearance
Product Description	The EUT is a One-Key Scene Controller
	Operation Frequency: 908.42MHz
	Modulation Type: GFSK
	Antenna Designation: Shrapnel Antenna
	Antenna Gain(Peak) 0.8 dBi
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as an ITE/Computing Device. More details of EUT technical specification, please refer to the User's Manual.
Channel List	Please refer to the Note 2.
Battery	DC 3.6V,120mAh

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.



2.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	908.42		

3. Table for Filed Antenna

Ant	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	NOTE
1	HANK,HD CLUB	HKZW-SCN01	Shrapnel Antenna	NA	0.8	Antenna

The EUT antenna is Shrapnel Antenna. No antenna other than that furnished by the responsible party shall be used with the device.

## 2.2 DESCRIPTION OF TEST MODES

For conducted test items and radiated spurious emissions

Each of these EUT operation mode(s) or test configuration mode(s) mentioned below was evaluated respectively..

Pretest Mode	Description	Data/Modulation
Mode 1	TX CH01	1 MHz/GFSK


Note:

- (1) All above mode have been measurement, only worst data was reported.
- (2) New Battery is used during all test.

## 2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product power parameters

Radiated Spurious Emission Test







#### 2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Serial No.	Note
E-1	One-Key Scene Controller	HANK,HDCLUB	HKZW-SCN01	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



## 2.5 EQUIPMENTS LIST FOR ALL TEST ITEMS

## Radiation Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Spectrum Analyzer	Agilent	E4407B	MY50140340	2015.10.25	2016.10.24
Test Receiver	R&S	ESCI	101427	2015.10.25	2016.10.24
Bilog Antenna	TESEQ	CBL6111D	34678	2015.11.25	2016.11.24
Horn Antenna	Schwarzbeck	BBHA 9120D(1201)	9120D-1343	2016.03.06	2017.03.05
50Ω Coaxial Switch	Anritsu	MP59B	6200264416	2016.03.06	2017.03.05
PreAmplifier	Agilent	8449B	60538	2015.10.25	2016.10.24
Loop Antenna	ARA	PLA-1030/B	1029	2016.03.06	2017.03.05
USB RF power sensor	DARE	RPR3006W	15I00041SNO03	2015.10.25	2016.10.24

## Conduction Test equipment

Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
EMI Test Receiver	R&S	ESPI	102086	2015.11.20	2016.11.19
LISN	R&S	ENV216	101242	2015.10.25	2016.10.24
LISN	EMCO	3810/2NM	000-23625	2015.10.25	2016.10.24

### 3. EMC EMISSION TEST

#### 3.1 CONDUCTED EMISSION MEASUREMENT

##### 3.1.1 POWER LINE CONDUCTED EMISSION LIMITS

Operating frequency band. In case the emission fall within the restricted band specified on Part 15.249 limit in the table below has to be followed.

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

### 3.1.2 TEST PROCEDURE

- a. The EUT was placed 0.4 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.3 TEST SETUP

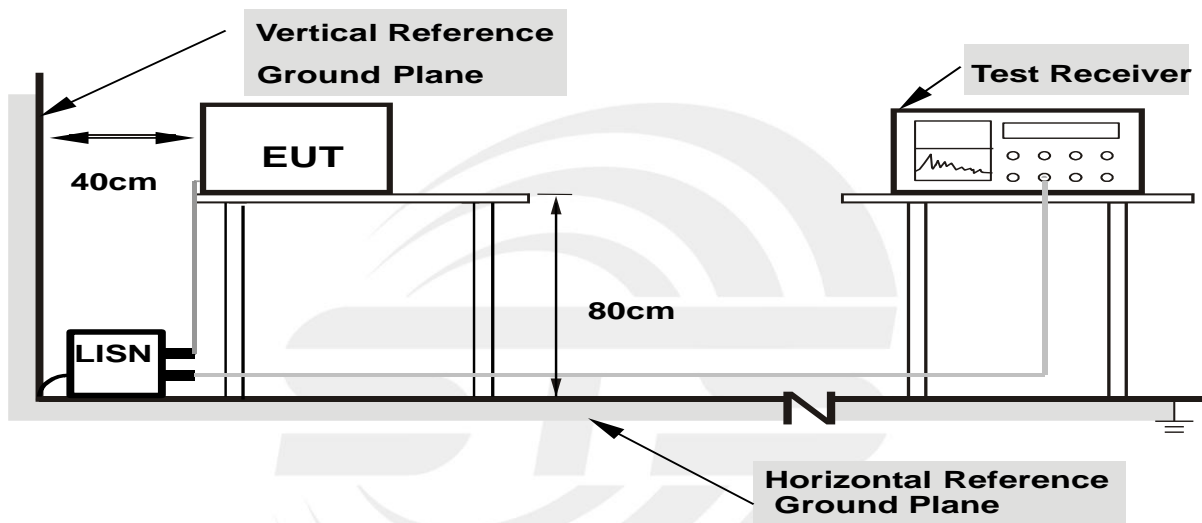

- Note: 1.Support units were connected to second LISN.**  
**2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes**

### 3.1.4 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.



3.1.5 TEST RESULTS


Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	L
Test Voltage:	DC 3.6V	Test Mode:	Mode 1

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1700	47.59	0.03	47.62	64.96	-17.34	QP
0.1700	27.10	0.03	27.13	54.96	-27.83	AVG
0.2300	38.40	0.03	38.43	62.45	-24.02	QP
0.2300	20.07	0.03	20.10	52.45	-32.35	AVG
0.3540	30.74	0.03	30.77	58.87	-28.10	QP
0.3540	14.22	0.03	14.25	48.87	-34.62	AVG
3.9060	27.20	0.06	27.26	56.00	-28.74	QP
3.9060	15.98	0.06	16.04	46.00	-29.96	AVG
9.8220	32.67	0.10	32.77	60.00	-27.23	QP
9.8220	25.82	0.10	25.92	50.00	-24.08	AVG
15.9220	32.15	0.14	32.29	60.00	-27.71	QP
15.9220	26.49	0.14	26.63	50.00	-23.37	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result = Reading + Factor) – Limit

100.0 dBuV

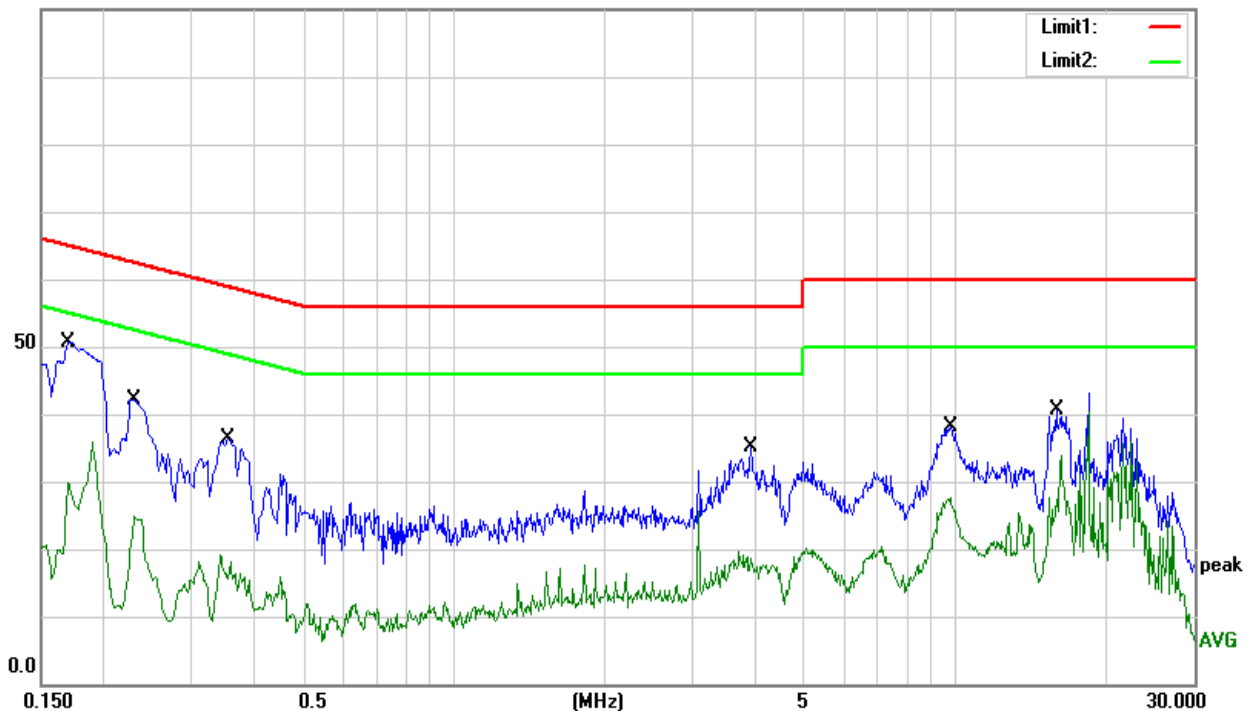




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	N
Test Voltage :	DC 3.6V	Test Mode :	Mode 1

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
0.1768	37.70	0.03	37.73	64.63	-26.90	QP
0.1768	19.05	0.03	19.08	54.63	-35.55	AVG
0.2366	28.49	0.03	28.52	62.21	-33.69	QP
0.2366	10.01	0.03	10.04	52.21	-42.17	AVG
0.3450	20.99	0.03	21.02	59.08	-38.06	QP
0.3450	4.85	0.03	4.88	49.08	-44.20	AVG
4.1222	15.29	0.07	15.36	56.00	-40.64	QP
4.1222	6.60	0.07	6.67	46.00	-39.33	AVG
9.7706	23.37	0.10	23.47	60.00	-36.53	QP
9.7706	16.47	0.10	16.57	50.00	-33.43	AVG
16.1675	26.85	0.14	26.99	60.00	-33.01	QP
16.1675	23.25	0.14	23.39	50.00	-26.61	AVG

Remark:

1. All readings are Quasi-Peak and Average values.
2. Margin = Result (Result =Reading + Factor )–Limit

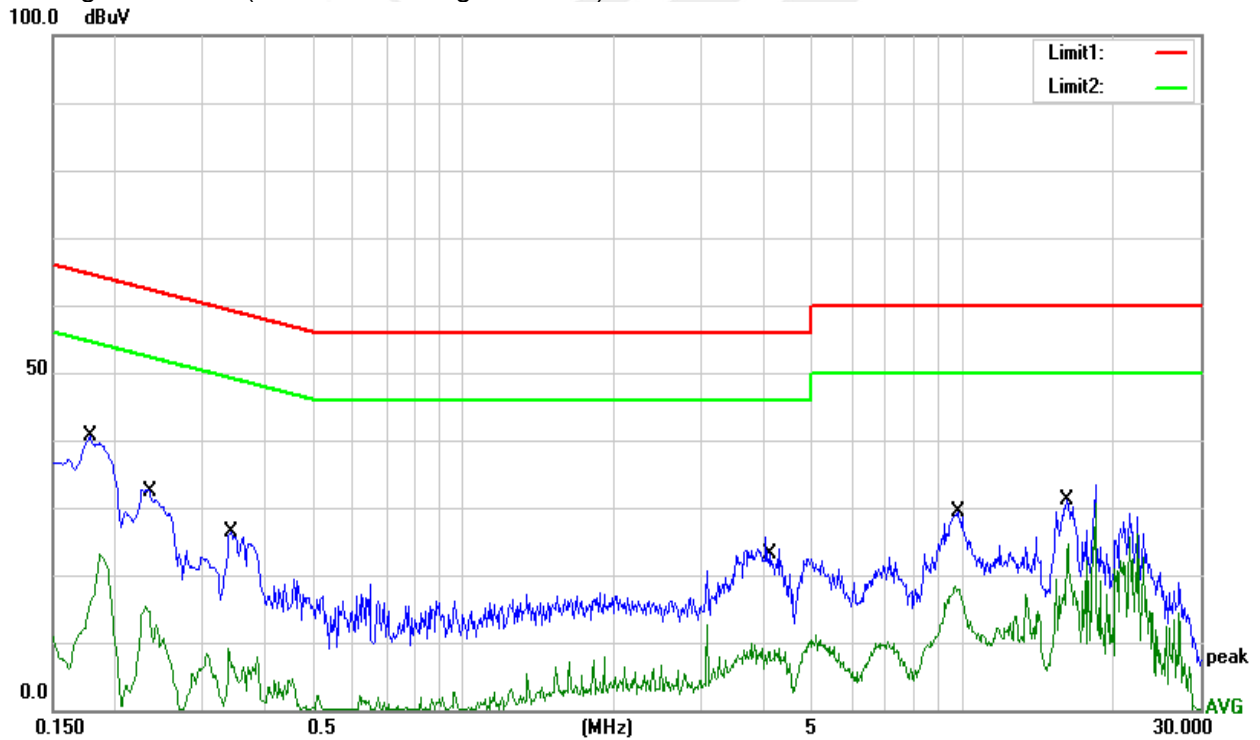



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on Part 15.205(a), then the Part 15.209(a) and Part 15.231(b) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (0.009MHz - 1000MHz)

Frequencies (MHz)	Field Strength (microrvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~40.66	100	3
40.70~70	100	3

LIMITS OF RADIATED EMISSION MEASUREMENT ( FCC 15.249)

Frequency of Emission (MHz)	Field Strength of fundamental ((millivolts /meter)	Field Strength of Harmonics (microvolts/meter)
2400 - 2483.5	50	500

Notes:

- (1) Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

Spectrum Parameter	Setting
Detector	Peak
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (emission in restricted band)	1 MHz / 3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
	150kHz~30MHz / RB 9kHz for QP
	30MHz~1000MHz / RB 100kHz for PK
	Above 1GHz, Pk detector / RBW 1MHz ; VBW 1MHz for PK /VBW 10Hz for AV

### 3.2.2 TEST PROCEDURE

- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz. and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit,
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:

Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported

### 3.2.3 DEVIATION FROM TEST STANDARD


No deviation






### 3.2.4 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

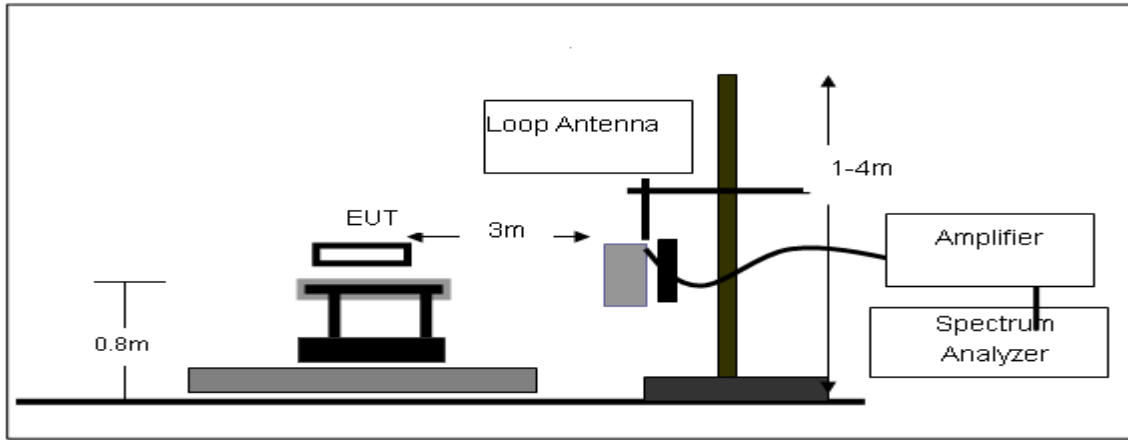

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

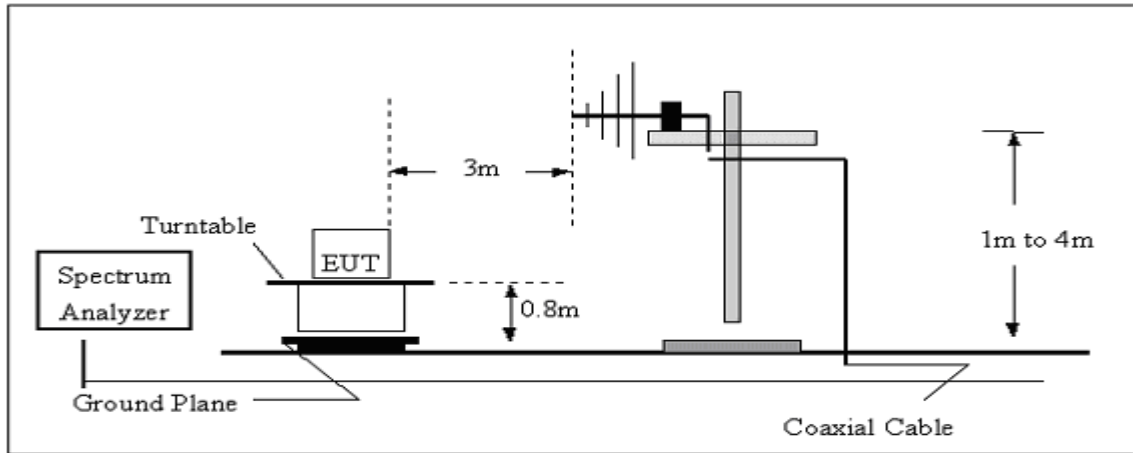

(C) Radiated Emission Test-Up Frequency Above 1GHz

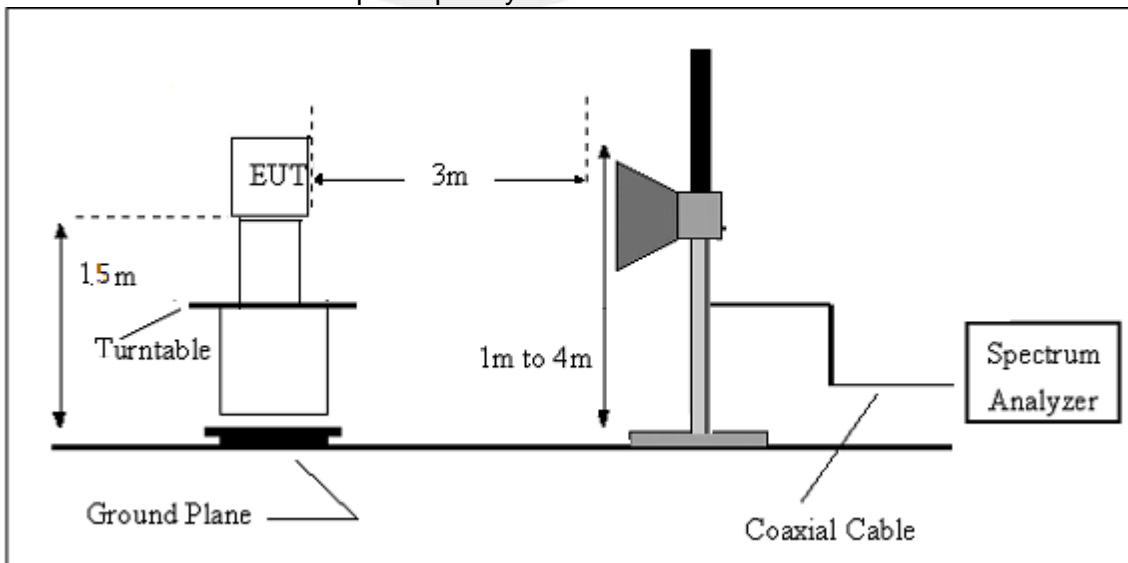

### 3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.



Below 30 MHz

Temperature :	23 °C	Relative Humidity :	50%
Pressure :	1010 hPa	Polarization :	---
Test Voltage :	DC 3.6V		
Test Mode :	TX Mode		


Freq. (MHz)	Reading (dBuV/m)	Limit (dBuV/m)	Margin (dB)	State P/F
--	--	--	--	PASS
--	--	--	--	PASS

**NOTE:**

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor =  $40 \log(\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.

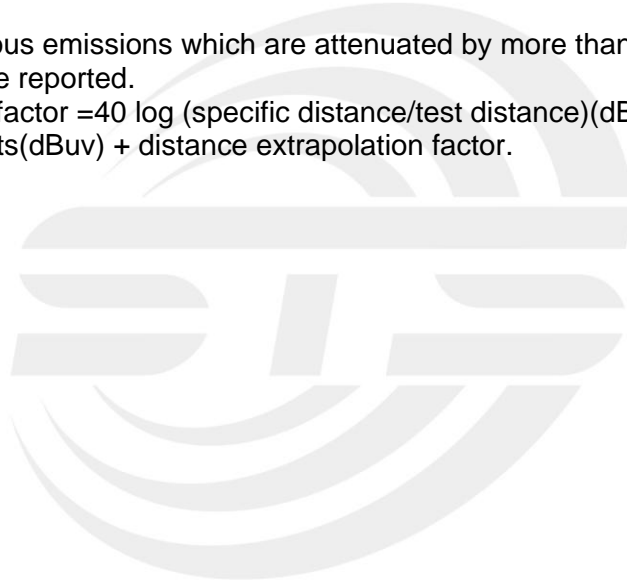




Between 30MHz – 1000 MHz Radiation Spurious

Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Horizontal
Test Voltage:	DC 3.6V	Test Mode:	Mode 1 (Model 1 worst)

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
48.6720	43.44	-20.80	22.64	40.00	-17.36	QP
117.7724	29.44	-17.83	11.61	43.50	-31.89	QP
259.2336	27.98	-15.15	12.83	46.00	-33.17	QP
396.2412	27.59	-11.48	16.11	46.00	-29.89	QP
689.5643	33.80	-5.57	28.23	46.00	-17.77	QP
893.8567	35.03	-2.34	32.69	46.00	-13.31	QP

Remark:

1. Margin = Result (Result =Reading + Factor )–Limit

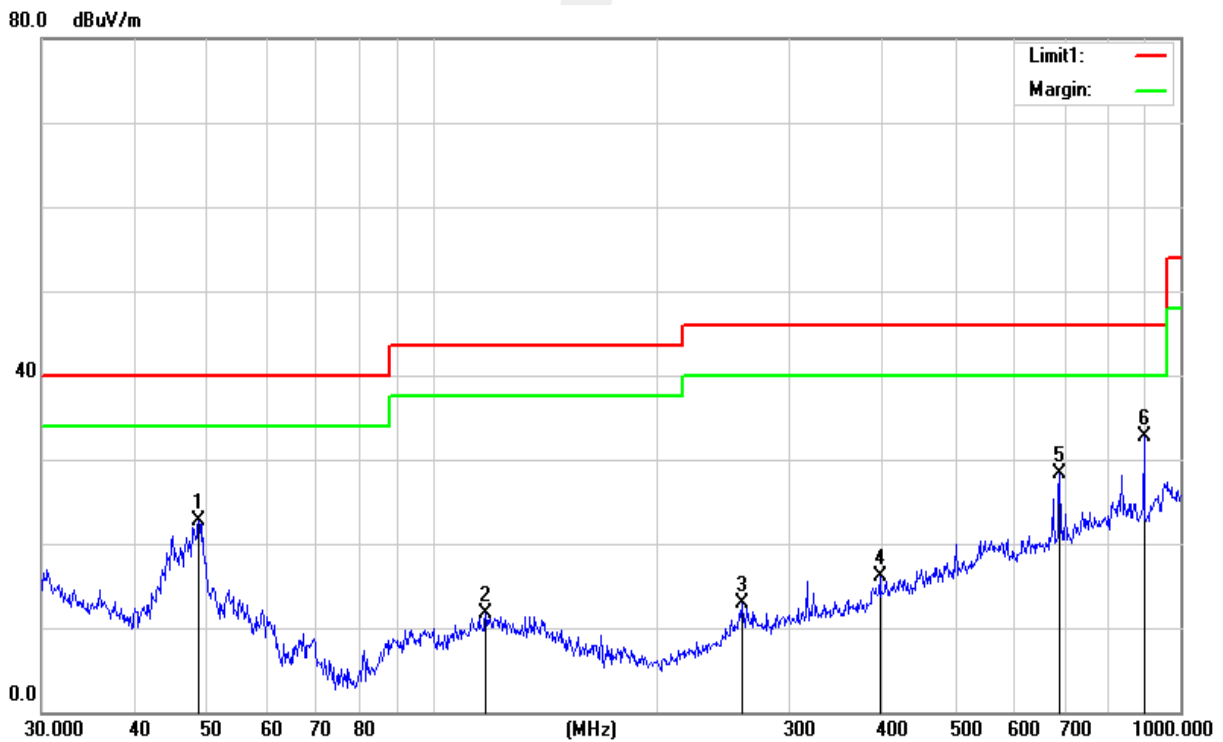




Temperature:	26 °C	Relative Humidity:	54%
Pressure:	1010hPa	Phase:	Vertical
Test Voltage:	DC 3.6V	Test Mode:	Mode 1 (Model 1 worst)

Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
30.6376	29.61	-11.52	18.09	40.00	-21.91	QP
48.8430	36.85	-20.89	15.96	40.00	-24.04	QP
64.8863	41.19	-24.22	16.97	40.00	-23.03	QP
133.1511	29.99	-17.54	12.45	43.50	-31.05	QP
287.9904	37.32	-15.49	21.83	46.00	-24.17	QP
839.1818	39.22	-2.78	36.44	46.00	-9.56	QP

Remark:

1. Margin = Result (Result =Reading + Factor )–Limit

80.0 dBuV/m

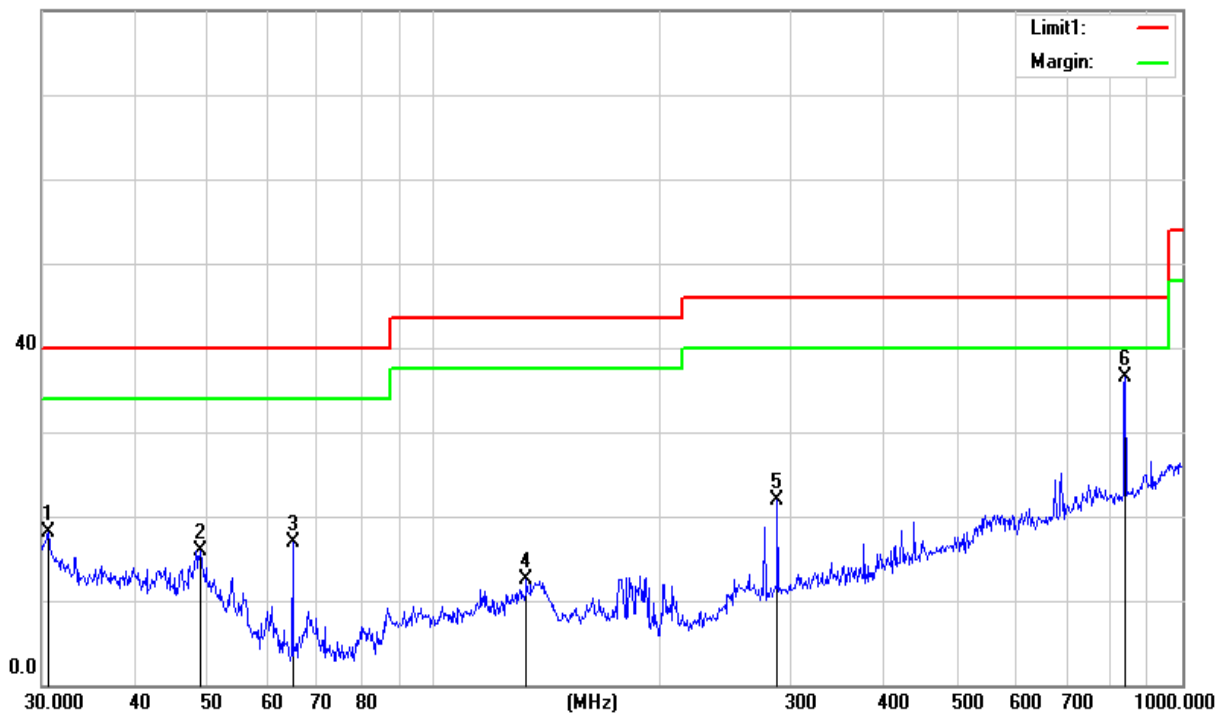



Radiation Power

Frequency (MHz)	Reading (dBμV/m)	Factor(dB) Corr.	Result(dBμV/m)	Limit(dBμV/m)	Margin(dB)	Polarization
	PEAK		PEAK	PEAK	PEAK	
908.42	98.27	-7.46	90.81	94	-3.19	Vertical
908.42	96.32	-7.46	88.86	94	-5.14	Horizontal

Above 1G Radiation Spurious

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type	Comment
908.42MHz							
1100.23	69.03	-18.30	50.73	74	-23.27	PK	Vertical
1100.23	57.02	-18.30	38.72	54	-15.28	AV	Vertical
1100.54	69.02	-18.30	50.72	74	-23.28	PK	Horizontal
1100.54	56.98	-18.30	38.68	54	-15.32	AV	Horizontal
1517.21	66.74	-15.70	51.04	74	-22.96	PK	Vertical
1517.21	54.80	-15.70	39.10	54	-14.90	AV	Vertical
1517.36	66.82	-15.70	51.12	74	-22.88	PK	Horizontal
1517.36	54.77	-15.70	39.07	54	-14.93	AV	Horizontal
1816.84	75.21	-13.80	61.41	74	-12.59	PK	Vertical
1816.84	60.09	-13.80	46.29	54	-7.71	AV	Vertical
1816.24	75.32	-13.80	61.52	74	-12.48	PK	Horizontal
1816.24	60.12	-13.80	46.32	54	-7.68	AV	Horizontal
2145.21	64.06	-12.50	51.56	74	-22.44	PK	Vertical
2145.21	52.09	-12.50	39.59	54	-14.41	AV	Vertical
2145.35	64.05	-12.50	51.55	74	-22.45	PK	Horizontal
2145.35	52.06	-12.50	39.56	54	-14.44	AV	Horizontal
2725.26	71.02	-10.60	60.42	74	-13.58	PK	Vertical
2725.26	57.21	-10.60	46.61	54	-7.39	AV	Vertical
2725.28	71.23	-10.60	60.63	74	-13.37	PK	Horizontal
2725.28	57.32	-10.60	46.72	54	-7.28	AV	Horizontal
3265.32	68.12	-9.80	58.32	74	-15.68	PK	Vertical
3265.32	51.00	-9.80	41.20	54	-12.80	AV	Vertical
3265.29	68.32	-9.80	58.52	74	-15.48	PK	Horizontal
3265.29	52.36	-9.80	42.56	54	-11.44	AV	Horizontal



4000.28	69.01	-6.60	62.41	74	-11.59	PK	Vertical
4000.28	50.32	-6.60	43.72	54	-10.28	AV	Vertical
4000.27	69.21	-6.60	62.61	74	-11.39	PK	Horizontal
4000.27	50.26	-6.60	43.66	54	-10.34	AV	Horizontal
7236.36	59.32	3.40	62.72	74	-11.28	PK	Vertical
7236.36	41.25	3.40	44.65	54	-9.35	AV	Vertical
7236.40	59.38	3.40	62.78	74	-11.22	PK	Horizontal
7236.40	41.35	3.40	44.75	54	-9.25	AV	Horizontal
8124.49	60.14	4.80	64.94	74	-9.06	PK	Vertical
8124.49	41.02	4.80	45.82	54	-8.18	AV	Vertical
8124.48	60.13	4.80	64.93	74	-9.07	PK	Horizontal
8124.48	41.32	4.80	46.12	54	-7.88	AV	Horizontal
9105.18	59.63	5.00	64.63	74	-9.37	PK	Vertical
9105.18	41.28	5.00	46.28	54	-7.72	AV	Vertical
9105.20	59.58	5.00	64.58	74	-9.42	PK	Horizontal
9105.20	41.23	5.00	46.23	54	-7.77	AV	Horizontal
11036.43	55.32	10.20	65.52	74	-8.48	PK	Vertical
11036.43	35.26	10.20	45.46	54	-8.54	AV	Vertical
11036.44	55.36	10.20	65.56	74	-8.44	PK	Horizontal
11036.44	35.42	10.20	45.62	54	-8.38	AV	Horizontal

## 4. BANDWIDTH TEST

### 4.1 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below,
- b. Spectrum Setting : RBW= 100KHz, VBW $\geq$ RBW, Sweep time = Auto.

### 4.2 TEST SETUP



### 4.3 EUT OPERATION CONDITIONS

TX mode.






### 4.4 TEST RESULTS

Temperature :	25 °C	Relative Humidity :	50%
Pressure :	1012 hPa	Test Voltage :	DC 3.6V

Test Channel	Frequency (MHz)	20 dB Bandwidth (MHz)	99% Bandwidth (MHz)
CH01	908.42	0.416	0.363

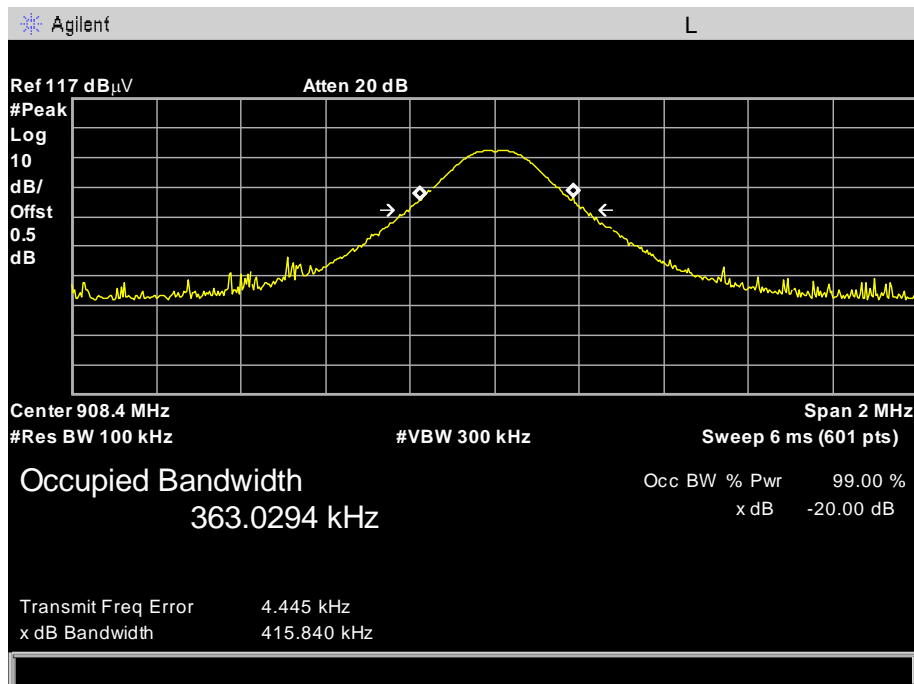





## 5. ANTENNA REQUIREMENT

### 5.1 STANDARD REQUIREMENT

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna to the intentional radiator shall be considered sufficient to comply with the provisions of this section. This product use a permanent ceramic printed antenna, fulfill the requirement of this section


### 5.2 EUT ANTENNA

The EUT antenna is Shrapnel Antenna.It conforms to the standard requirements.



## APPENDIX I- PHOTOS OF TEST SETUP

### Radiated Measurement Photos

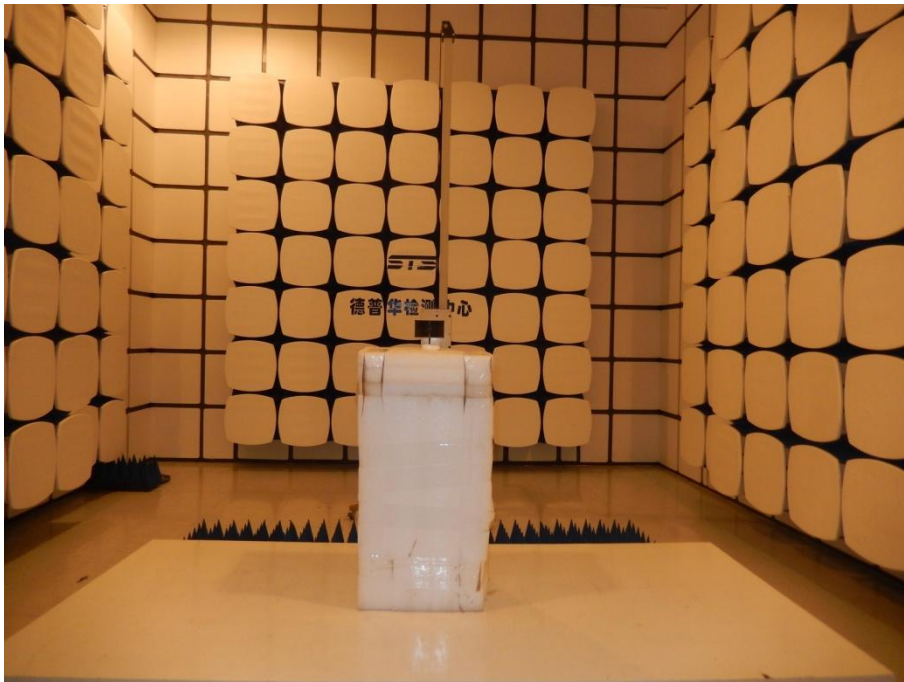

※※※※※END OF THE REPORT※※※※※