



Report No: FCC 1606026 File reference No: 2016-06-16

Applicant: Guangdong Samzuk Technology Development Co., Ltd

Product: 10 channel FRS

Model No: FWAN20A

Trademark: **SAMCOM**

Test Standards: FCC Part 95, Subpart B and Subpart E;

Test result:

It is herewith confirmed and found to comply with the

requirements set up by ANSI C63.10, FCC Part 95, Subpart B and Subpart E; regulations for the evaluation of electromagnetic

compatibility

Approved By

Jack Chung

Jack Chung Manager

Dated: June 16, 2016

Results appearing herein relate only to the sample tested

The technical reports is issued errors and omissions exempt and is subject to withdrawal at

SHENZHEN TIMEWAY TESTING LABORATORIES

Room 512-519, 5/F., East Tower, Building 4, Anhua Industrial Zone, Futian District, Shenzhen, Guangdong, China

Tel (755) 83448688, Fax (755) 83442996, E-Mail:info@timeway-lab.com

Report No.: EMC1606026 Page 2 of 46

Date: 2016-06-16



Special Statement:

The testing quality ability of our laboratory meet with "Quality Law of People's Republic of China" Clause 19.

The testing quality system of our laboratory meets with ISO/IEC-17025 requirements, which is approved by CNAS. This approval result is accepted by MRA of APLAC.

Our test facility is recognized, certified, or accredited by the following organizations:

CNAS-LAB Code: L2292

The EMC Laboratory has been assessed and in compliance with CNAS-CL01 accreditation criteria for testing Laboratories (identical to ISO/IEC 17025:1999 General Requirements) for the Competence of testing Laboratories.

FCC-Registration No.: 899988

The EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications commission. The acceptance letter from the FCC is maintained in our files. Registration No.:899988.

IC- Registration No.: IC5205A-02

The EMC Laboratory has been registered and fully described in a report filed with the (IC) Industry Canada. The acceptance letter from the IC is maintained in our files. Registration No.: IC 5205A-02.

Page 3 of 46

Report No.: EMC1606026

Date: 2016-06-16



Test Report Conclusion

Content

1.0	General Details	4
1.1	Test Lab Details.	4
1.2	Applicant Details	4
1.3	Description of EUT	4
1.4	Submitted Sample	5
1.5	Test Duration.	5
1.6	Test Uncertainty	5
1.7	Test By	5
2.0	List of Measurement Equipment.	6
3.0	Technical Details	7
3.1	Summary of Test Results	7
3.2	Test Standards	7
4.0	EUT Modification.	7
5.0	Power Line Conducted Emission Test.	8
6.0	Frequency Tolerance.	12
7.0	EMISSION BANDWIDTH and Mask	15
8.0	UNWANTED RADIATION	24
9.0	Modulation Characteristics.	27
10.0	MAXIMUM TRANSMITTER POWER	31
11.0	Radiated Emission on Receiving Mode.	32
12.0	FCC ID Label.	35
13.0	Photo of testing	36

Report No.: EMC1606026 Page 4 of 46

Date: 2016-06-16



1.0 **General Details**

1.1 Test Lab Details

Name: SHENZHEN TIMEWAY TESTING LABORATORIES.

Address: Room 512-519,5/F., East Tower, Building 4, Anhua Industrial Zone, Futian

District, Shenzhen, Guangdong China

Telephone: (755) 83448688 Fax: (755) 83442996

Site on File with the Federal Communications Commission – United Sates

Registration Number: 899988

For 3m & 10 m OATS

Site Listed with Industry Canada of Ottawa, Canada

Registration Number: IC: 5205A-02

For 3m & 10 m OATS

1.2 Applicant Details

Applicant: Guangdong Samzuk Technology Development Co., Ltd

Address: High-Tech Zone Xinggong Avenue East Heyuan City, Guangdong Province, China

Telephone: 0762-3116133 Fax: 0762-3116833

1.3 Description of EUT

10 channel FRS Product:

Manufacturer: Guangdong Samzuk Technology Development Co., Ltd

Address: High-Tech Zone Xinggong Avenue East Heyuan City, Guangdong Province,

China

SAMCOM Brand Name:

Additional Brand Name: N/A

Model Number: FWAN20A

Additional Model Number: N/A Type of Modulation FM

Page 5 of 46

Report No.: EMC1606026

Date: 2016-06-16



Frequency range

Channel	Frequence (MHz)
1	467.7125
2	467.6875
3	467.6625
4	467.6375
5	467.6125
6	467.5875
7	467.5625
8	462.7125
9	462.6875
0	462.6625

Antenna: Integral antenna with Gain 2.0 dBi Rating: DC4.8V, 4 pcs AAA Size batteries

Model: PDWAN20A; Input: 100-240V~, 50/60Hz, 0.1A Max; Output: DC7.5V, Power Supply:

Submitted Sample: 3 Samples

1.5 Test Duration

2016-06-02 to 2016-06-15

Test Uncertainty

Conducted Emissions Uncertainty = 3.6dB Radiated Emissions Uncertainty =4.7dB

1.7 Test Engineer Terry lang

The sample tested by

Print Name: Terry Tang

Page 6 of 46

Report No.: EMC1606026

Date: 2016-06-16



2.0 Test Equipments					
Instrument Type	Manufacturer	Model	Serial No.	Date of Cal.	Due Date
ESPI Test Receiver	R&S	ESPI 3	100379	2015-08-22	2016-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100294	2015-08-22	2016-08-21
TWO Line-V-NETW	R&S	EZH3-Z5	100253	2015-08-22	2016-08-21
Ultra Broadband ANT	R&S	HL562	100157	2015-08-23	2016-08-22
ESDV Test Receiver	R&S	ESDV	100008	2015-08-22	2016-08-21
Impuls-Begrenzer	R&S	ESH3-Z2	100281	2015-08-22	2016-08-21
System Controller	CT	SC100	-		
Printer	EPSON	РНОТО ЕХЗ	CFNH234850		
Computer	IBM	8434	1S8434KCE99BLXLO*	-	-
Loop Antenna	EMCO	6502	00042960	2015-08-23	2016-08-22
ESPI Test Receiver	R&S	ESI26	838786/013	2015-08-22	2016-08-21
3m OATS			N/A	2015-08-24	2016-08-23
Horn Antenna	R&S	BBHA 9170	BBHA9170265	2015-08-24	2016-08-23
Horn Antenna	R&S	BBHA 9120D	9120D-631	2015-08-24	2016-08-23
Power meter	Anritsu	ML2487A	6K00003613	2015-08-22	2016-08-21
Power sensor	Anritsu	MA2491A	32263	2015-08-22	2016-08-21
Bilog Antenna	Schwarebeck	VULB9163	9163/340	2015-08-23	2016-08-21
LISN	AFJ	LS16C	10010947251	2015-08-22	2016-08-21
LISN (Three Phase)	Schwarebeck	NSLK 8126	8126453	2015-08-23	2016-08-22
9*6*6 Anechoic			N/A	2015-08-24	2016-08-23
EMI Test Receiver	RS	ESCS30	100139	2015-08-22	2016-08-21
Modulation Analyzer	HP	8901B	3104A03367	2016-06-07	2017-06-06

Report No.: EMC1606026 Page 7 of 46

Date: 2016-06-16



3.0 **Technical Details**

Summary of test results 3.1

The EUT has been tested according to the following specifications:				
Standard	Test Type	Result	Notes	
FCC Part 15.207	Conducted Emission	Pass	Complies	
FCC Part 95.639	Maximum Transmitter Power	Pass	Complies	
FCC Part 95.637	Modulation Characteristic	Pass	Complies	
FCC Part 95.633	Occupied Bandwidth	Pass	Complies	
FCC Part 95.633	Emission Mask	Pass	Complies	
FCC Part 95.626	Frequency Tolerance	Pass	Complies	
FCC Part 95.635	Spurious Radiated Emissions	Pass	Complies	

3.2 **Test Standards**

FCC Part 95, ANSI C63.10:2013

4.0 **EUT Modification**


No modification by SHENZHEN TIMEWAY TESTING LABORATORIES

Date: 2016-06-16



5. Power Line Conducted Emission Test

5.1 Schematics of the test




EUT: Equipment Under Test

5.2 Test Method and test Procedure

The EUT was tested according to ANSI C63.10-2013. The Frequency spectrum From 0.15MHz to 30MHz was investigated. The LISN used was 50ohm/50uH as specified by section 5.1 of ANSI C63.10-2013.

Test Voltage: 120V~, 60Hz

Block diagram of Test setup

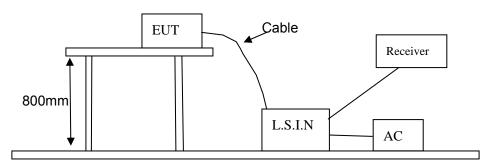

5.3 Configuration of The EUT

The EUT was configured according to ANSI C63.10-2013. All interface ports were connected to the appropriate peripherals. All peripherals and cables are listed below.

One channels are provided to the EUT

A. EUT

Device	Manufacturer	Model	FCC ID
10 channel FRS	Guangdong Samzuk Technology	FWAN20A	2AIOQ-FWAN20A
	Development Co., Ltd		

B. Internal Device

Device	Device Manufacturer		FCC ID/DOC	
N/A				

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: EMC1606026 Page 9 of 46

Date: 2016-06-16



C. Peripherals

Device	Manufacturer	Model	FCC ID/DOC	Cable
N/A				

5.4 **EUT Operating Condition**

Operating condition is according to ANSI C63.10-2013

- Setup the EUT and simulators as shown on follow Α
- В Enable AF signal and confirm EUT active to normal condition

5.5 Power line conducted Emission Limit according to Paragraph 15.207

0 0 1						
	Class A Li	mits (dBµV)	Class B Limits (dBµV)			
Frequency(MHz)	Quasi-peak	Average Level	Quasi-peak Level	Average Level		
	Level					
0.15 ~ 0.50	79.0	66.0	66.0~56.0*	56.0~46.0*		
0.50 ~ 5.00	73.0	60.0	56.0	46.0		
5.00 ~ 30.00	73.0	60.0	60.0	50.0		

Notes:

- 1. *Decreasing linearly with logarithm of frequency.
- 2. The tighter limit shall apply at the transition frequencies

5.6 Test Results: Pass Report No.: EMC1606026 Page 10 of 46

Date: 2016-06-16



A: Conducted Emission on Live Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging Battery

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

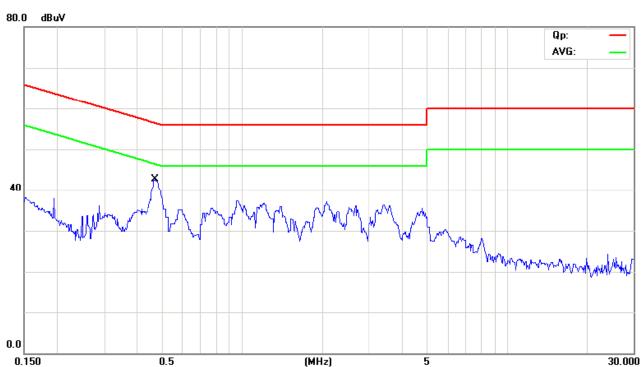

No. Mk.	Freq.	Reading Level		Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.4724	27.60	11.34	38.94	56.47	-17.53	QP	
2	0.4724	-0.10	11.34	11.24	46.47	-35.23	AVG	

Report No.: EMC1606026 Page 11 of 46

Date: 2016-06-16



B: Conducted Emission on Neutral Terminal (150kHz to 30MHz)

EUT Operating Environment


Temperature: 26°C Humidity: 65%RH Atmospheric Pressure: 101 KPa

EUT set Condition: Charging Battery

Equipment Level: Class B

Results: Pass

Please refer to following diagram for individual

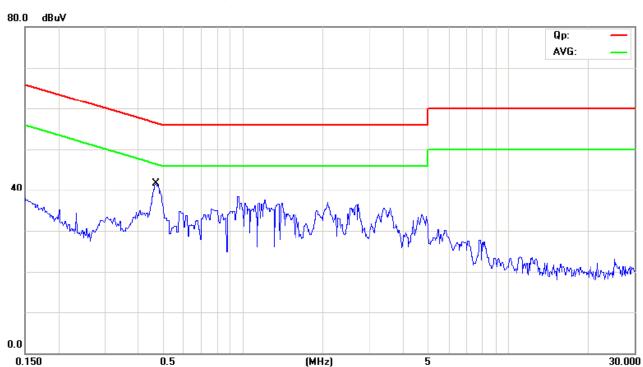

No. Mk.	Freq.	Reading Level		Measure- ment	Limit	Over		
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1 *	0.4630	26.90	11.33	38.23	56.64	-18.41	QP	
2	0.4630	-2.30	11.33	9.03	46.64	-37.61	AVG	

Report No.: EMC1606026 Page 12 of 46

Date: 2016-06-16



6. Frequency Tolerance

6.1 Applicable standard

According to FCC §2.1055(a) (1), the frequency stability shall be measured with variation of ambient temperature from –30 °C to +50 °C, and according to FCC 2.1055(d) (2), the frequency stability shall be measured with reducing primary supply voltage to the battery operating end point which is specified by the manufacturer.

According to FCC §95.626(b), Each FRS Unit must be maintained within a frequency tolerance of 0.00025 %(2.5 ppm).

6.2 Measurement Procedure

6.2.1 Frequency stability versus environmental temperature

- 1. Setup the configuration per figure 1 for frequencies measurement inside an environment chamber, Install new battery in the EUT.
- 2. Turn on EUT and set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1KHz and Video Resolution Bandwidth to 1KHz and Frequency Span to 50KHz.Record this frequency as reference frequency.
- 3. Set the temperature of chamber to 50℃. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. While maintaining a constant temperature inside the chamber, turn the EUT on and measure the EUT operating frequency.
- 4. Repeat step 2 with a 10℃ decreased per stage until the lowest temperature -30℃ is measured, record all measured frequencies on each temperature step.

6.2.2 Frequency stability versus input voltage

- 1. Setup the configuration per figure 1 for frequencies measured at temperature if it is within 15 ℃ to 25 ℃. Otherwise, an environment chamber set for a temperature of 20 ℃ shall be used.
- 2. Set SA center frequency to the EUT radiated frequency. Set SA Resolution Bandwidth to 1 KHz and Video Resolution Bandwidth to 1KHz. Record this frequency as reference frequency.
- 3. Supply the EUT primary voltage at the operating end point which is specified by manufacturer and record the frequency.

Report No.: EMC1606026 Page 13 of 46

Date: 2016-06-16



6.3 TEST SETUP BLOCK DIAGRAM

Temperature Chamber

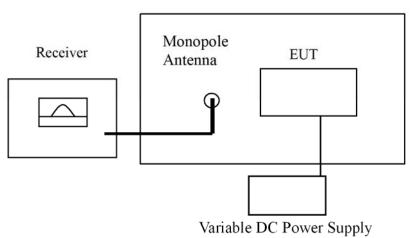


Figure 1

6.5 TEST RESULT

(1) Frequency stability versus input voltage (The end point voltage is 3.5V)

Channel	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit (ppm)
CH0	3.5V	462.662208	-0.6	462.6625MHz	±2.5
CH7	3.5V	467.561976	-1.1	467.5625MHz	±2.5

Page 14 of 46

Report No.: EMC1606026

Date: 2016-06-16



(2)Frequency stability versus ambient temperature

Test Results

CH0

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Deviation (ppm)	Nominal Frequency	Limit(pp m)
50	4.8	462.661846	-1.4	462.6625MHz	±2.5
40	4.8	462.661876	-1.3	462.6625MHz	±2.5
30	4.8	462.662047	-0.9	462.6625MHz	±2.5
20	4.8	462.661943	-1.2	462.6625MHz	±2.5
10	4.8	462.661892	-1.3	462.6625MHz	±2.5
0	4.8	462.662124	-0.8	462.6625MHz	±2.5
-10	4.8	462.662041	-1.0	462.6625MHz	±2.5
-20	4.8	462.662107	-0.8	462.6625MHz	±2.5
-30	4.8	462.662125	-0.8	462.6625MHz	±2.5

CH7

Environment Temperature(℃)	Power Supplied (Vdc)	Frequency Measured (MHz)	Frequency Error (ppm)	Nominal Frequency	Limit(pp m)
50	4.8	467.561798	-1.5	467.5625MHz	±2.5
40	4.8	467.561842	-1.4	467.5625MHz	±2.5
30	4.8	467.561923	-1.2	467.5625MHz	±2.5
20	4.8	467.561892	-1.3	467.5625MHz	±2.5
10	4.8	467.561885	-1.3	467.5625MHz	±2.5
0	4.8	467.562079	-0.9	467.5625MHz	±2.5
-10	4.8	467.562083	-0.9	467.5625MHz	±2.5
-20	4.8	467.562136	-0.8	467.5625MHz	±2.5
-30	4.8	467.561964	-1.1	467.5625MHz	±2.5

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Date: 2016-06-16



7. EMISSION BANDWIDTH and Mask

7.1 PROVISIONS APPLICABLE


Per FCC §2.1049 and FCC §95.633(a) (c), the authorized bandwidth for emission type F3E or F2D transmitted by an FRS Unit is 12.5 kHz.

- (1)At least 25 dB (decibels) on any frequency removed from the center of the authorized bandwidth by more than 50% up to and including 100% of the authorized bandwidth.
- (3) At least 35 dB on any frequency removed from the center of the authorized bandwidth by more than 100% up to and including 250% of the authorized bandwidth.
- (7) At least 43 + 10 log10 (T) dB on any frequency removed from the center of the authorized bandwidth by more than 250%.

7.2 MEASUREMENT PROCEDURE

TIA-603-C, section 2.2.11

7.3 Test Setup Block Diagram

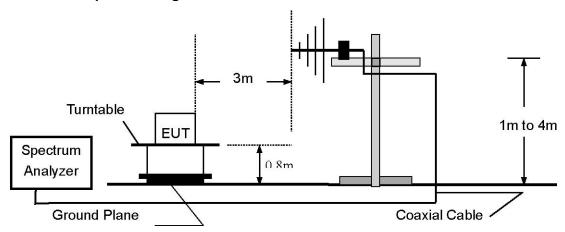

7.4 Measurement Rusult:

Bandwidth				
Operating Frequency	Test Data	Limits	Result	
462.6625MHz	8.22kHz	12.5kHz	Pass	
467.5625MHz	8.22kHz	12.5kHz	Pass	

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 16 of 46

Report No.: EMC1606026

Date: 2016-06-16



Emission Designator:

Bn=2M + 2DK


Where M = 3 KHz, D = 2.5 KHz, K = 1

Bn =2*3 + 2*2.5 = 11KHz

Type of emission: 11K0F3E

7.5 Test Plots:

For channel 462.6625MHz

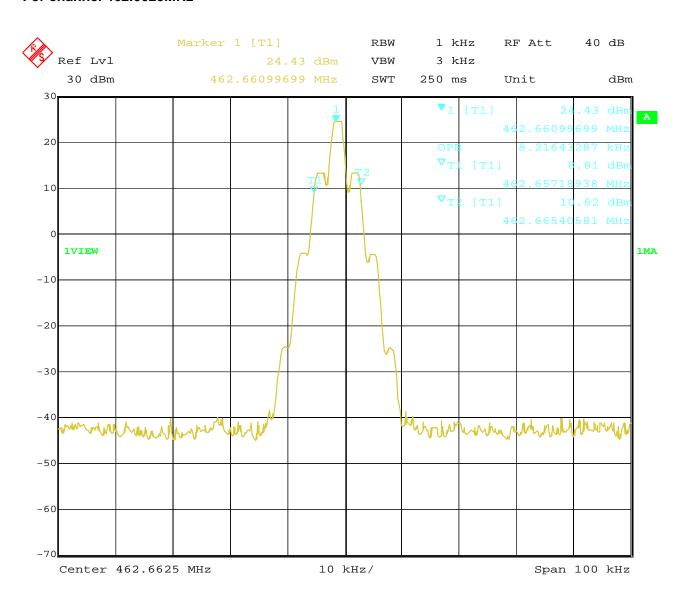


Page 17 of 46

Report No.: EMC1606026

Date: 2016-06-16



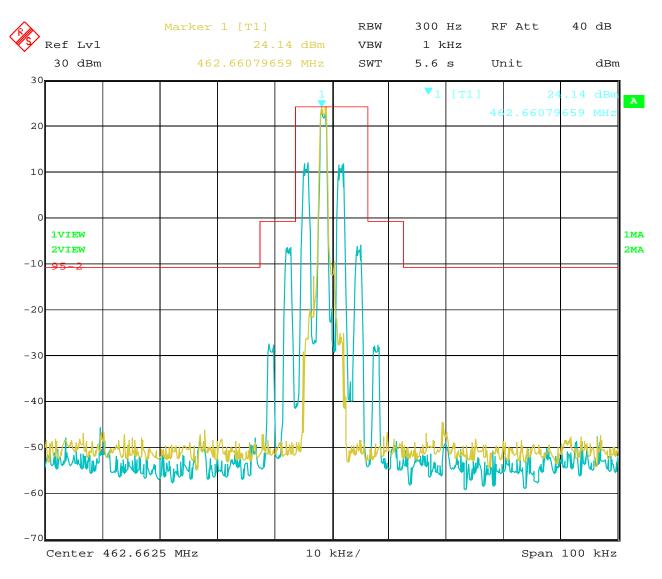


Report No.: EMC1606026 Page 18 of 46

Date: 2016-06-16



For channel 467.5625MHz

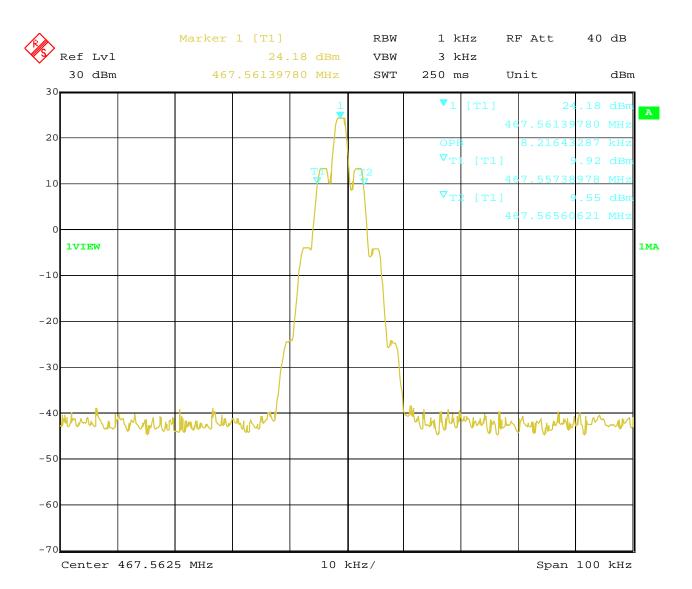


Page 19 of 46

Report No.: EMC1606026

Date: 2016-06-16



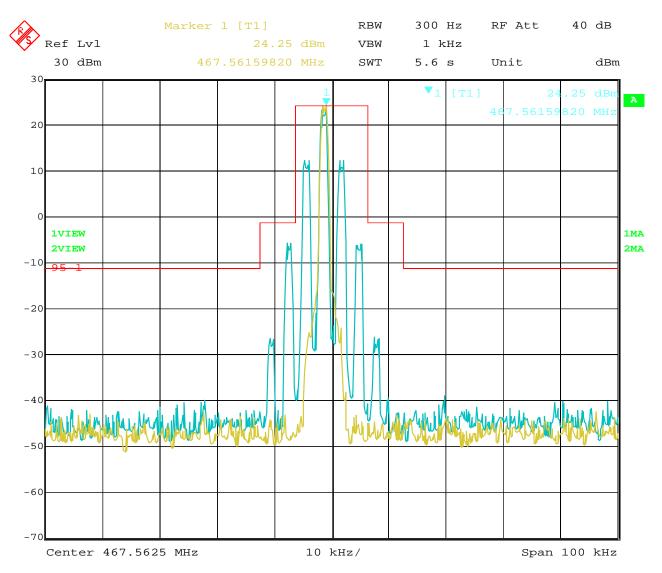


Report No.: EMC1606026 Page 20 of 46

Date: 2016-06-16




CH7

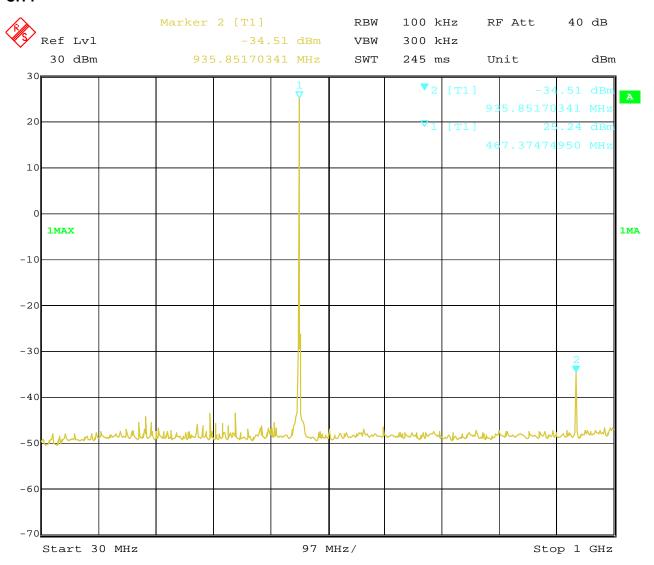

Report No.: EMC1606026 Page 21 of 46

Date: 2016-06-16



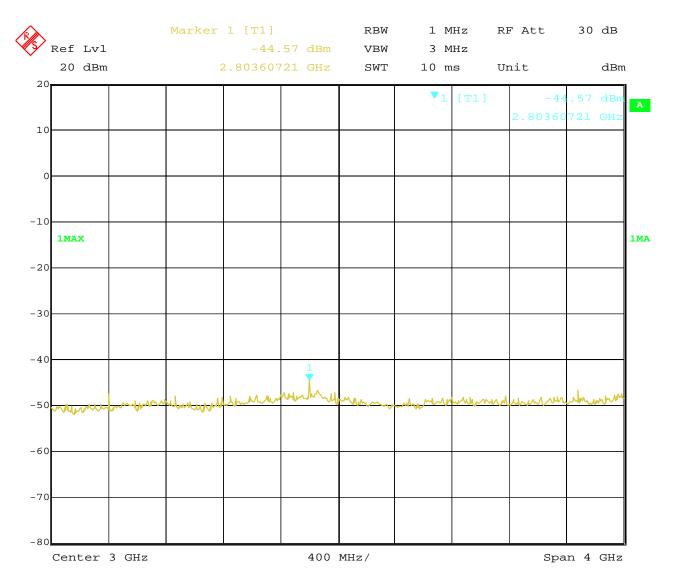


Report No.: EMC1606026 Page 22 of 46

Date: 2016-06-16




CH₀

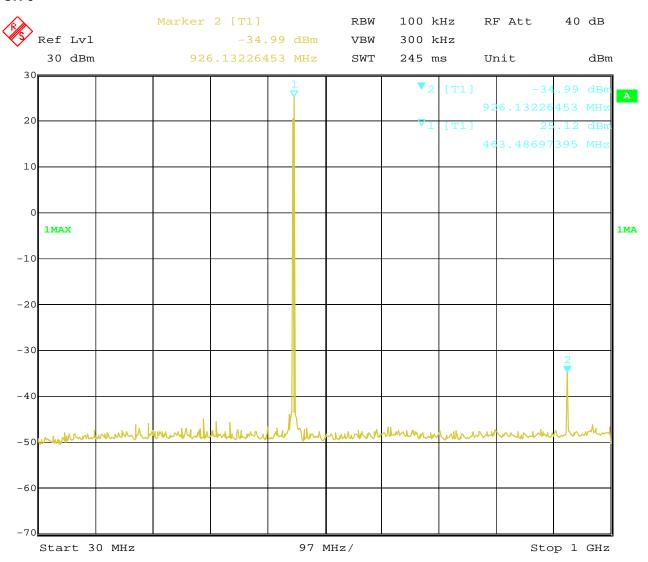

Report No.: EMC1606026 Page 23 of 46

Date: 2016-06-16



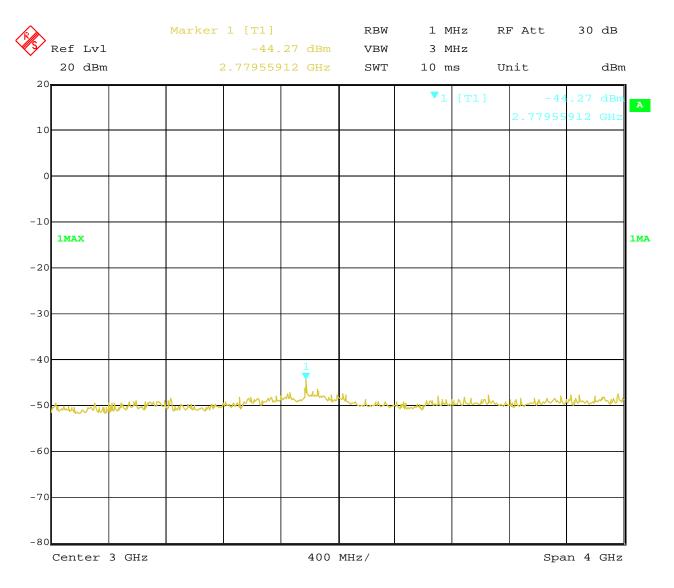

Date: 2016-06-16



Page 24 of 46

8. UNWANTED RADIATION

8.1 PROVISIONS APPLICABLE

FCC §2.1053 and §95.635

8.2 MEASUREMENT PROCEDURE (Radiated Emissions)

- (1). On a test site, the EUT shall be placed on a turntable, and in the position closest to the normal use as declared by the user.
- (2). The test antenna shall be oriented initially for vertical polarization located 3m from the EUT to correspond to the transmitter.
- (3). The output of the antenna shall be connected to the measuring receiver and either a peak or quasi-peak detector was used for the measurement as indicated on the report. The detector selection is based on how close the emission level was approaching the limit.
- (4). The transmitter shall be switched on; if possible, without the modulation and the measurement receiver shall be tuned to the frequency of the transmitter under test.
- (5). The test antenna shall be raised and lowered through the specified range of height until the measuring receiver detects a maximum signal level.
- (6). The transmitter shall than be rotated through 360° in the horizontal plane, until the maximum signal level is detected by the measuring receiver.
- (7). The test antenna shall be raised and lowered again through the specified range of height until the measuring receiver detects a maximum signal level.
- (8). The maximum signal level detected by the measuring receiver shall be noted.
- (9). The measurement shall be repeated with the test antenna set to horizontal polarization.
- (10). Replace the antenna with a proper Antenna (substitution antenna).
- (11). The substitution antenna shall be oriented for vertical polarization and, if necessary, the length of the substitution antenna shall be adjusted to correspond to the frequency of transmitting.
- (12). The substitution antenna shall be connected to a calibrated signal generator.
- (13). If necessary, the input attenuator setting of the measuring receiver shall be adjusted in order to increase the sensitivity of the measuring receiver.
- (14). The test antenna shall be raised and lowered through the specified range of the height to ensure that the maximum signal is received.
- (15). The input signal to substitution antenna shall be adjusted to the level that produces a level detected by the measuring receiver, that is equal to the level noted while the transmitter radiated power was measured, corrected for the change of input attenuation setting of the measuring receiver.
- (16). The input level to the substitution antenna shall be recorded as power level in dBm, corrected for any change of input attenuator setting of the measuring receiver.
- (17). The measurement shall be repeated with the test antenna and the substitution antenna oriented for horizontal polarization.

Page 25 of 46

Report No.: EMC1606026


Date: 2016-06-16



8.3 Substitution Method: (Radiated Emissions)

Radiated Below 1GHz


Ground Plane

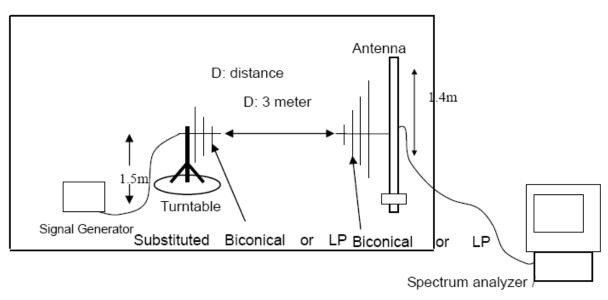

Radiated Above 1 GHz

Antenna mast

Ground plane

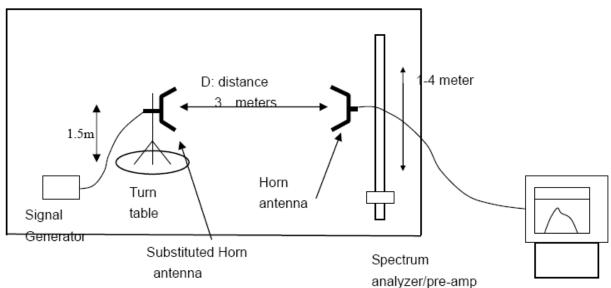

Report No.: EMC1606026 Page 26 of 46

Date: 2016-06-16



8.4 MEASUREMENT RESULTS:

Calculation: Limit (dBm)= EL-43-10log10 (T)=-13dBm

Notes: EL is the emission level of the Output Power expressed in dBm, in this application, the EL is 27

dBm

CH₀

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
925.325	Vertical	-37.04	-13
1387.988	Vertical	-42.15	-13
1850.65	Vertical	-46.96	-13
925.325	Horizontal	-40.62	-13
1387.988	Horizontal	-44.35	-13

CH7

Frequency (MHz)	Antennal Polarity	Emission (dBm)	Limit (dBm)
935.125	Vertical	-38.07	-13
1402.688	Vertical	-43.64	-13
1870.25	Vertical	-47.28	-13
935.125	Horizontal	-42.20	-13
1402.688	Horizontal	-45.75	-13

Note: ERP was recorded.

Date: 2016-06-16



Page 27 of 46

9. Modulation Characteristics

9.1 PROVISIONS APPLICABLE

According to CFR 47 section 2.1047(a), for Voice Modulation Communication Equipment, the frequency response of the audio modulation circuit over a range of 100 to 5000Hz shall be measured.

Part95.637: A FRS unit that transmits emission type F3E must not exceed a peak frequency deviation of plus or minus 2.5 kHz, and the audio frequency response must not exceed 3.125 kHz

9.2 MEASUREMENT METHOD

9.2.1 Modulation Limit

- (1). Configure the EUT as shown in figure 1, adjust the audio input for 60% of rated system deviation at 1KHz using this level as a reference (0dB) and vary the input level from –20 to +20dB. Record the frequency deviation obtained as a function of the input level.
- (2). Repeat step 1 with input frequency changing to 300, 1000, 1500 and 3000Hz in sequence.

9.2.2 Audio Frequency Response

- (1). The EUT and test equipment were set up as shown in figure 2.
- (2). Adjust the Modulation Analyzer for the following setting:

a) High-pass filter: offb) Low-pass filter: 15 kHzc) Detector: positive peak

d) Function: FM

- (3). The audio signal input was adjusted to obtain 20 % modulation at 1 kHz, and this point was taken as the 0 dB reference level.
- (4). With input levels held constant and below limiting at all frequencies, the audio signal generator was varied from 300 Hz to 5 kHz.
- (5). The response in dB relative to 1 kHz was then measured, using the Modulation Analyzer.

Report No.: EMC1606026 Page 28 of 46

Date: 2016-06-16



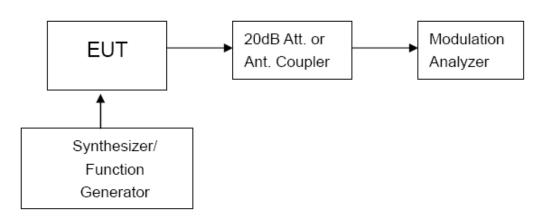


Figure 1: Modulation characteristic measurement configuration

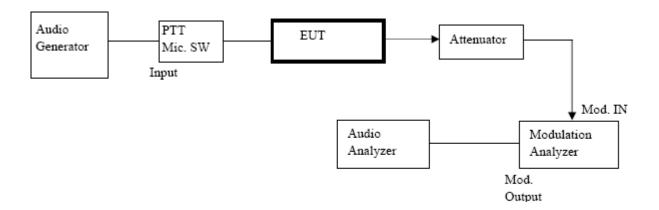


Figure 2: Audio Frequency Response Measurement Configure

Date: 2016-06-16




9.4 MEASUREMENT RESULT

(a). Modulation Limit:

CH7

Modulation Level (dB)	Peak Freq. Deviation At 300 Hz	Peak Freq. Deviation At 1000 Hz	Peak Freq. Deviation At 1500 Hz	Peak Freq. Deviation At 3000 Hz
-20	0.07	0.24	0.26	0.34
-15	0.13	0.28	0.35	0.57
-10	0.18	0.51	0.63	0.82
-5	0.26	0.79	0.84	1.25
0	0.35	1	1.26	1.56
5	0.47	1.22	1.52	1.76
10	0.53	1.35	1.66	1.93
15	0.66	1.57	1.8	2.15
20	0.7	1.68	1.92	2.33

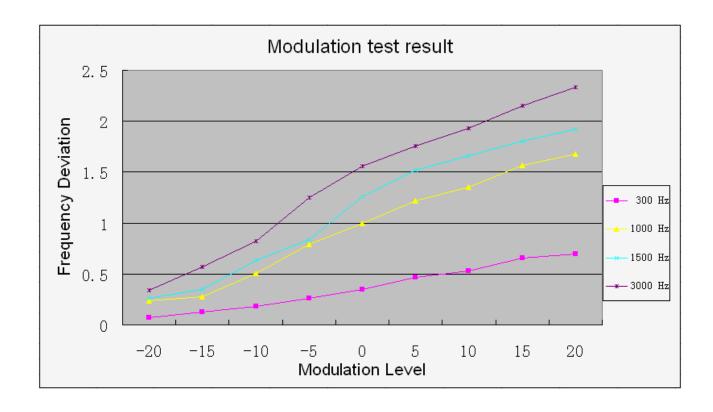


Page 30 of 46 Report No.: EMC1606026

Date: 2016-06-16



(b). Audio Frequency Response:

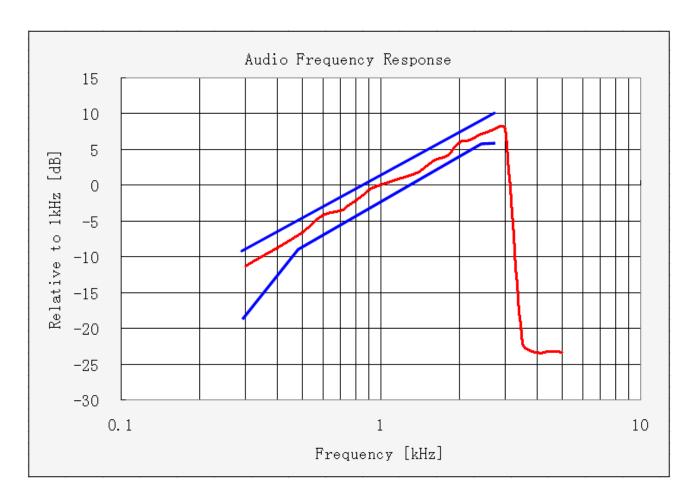

Report No.: EMC1606026 Page 31 of 46

Date: 2016-06-16



10. MAXIMUM TRANSMITTER POWER 10.1 PROVISIONS APPLICABLE

Per FCC §2.1046 and §95.639(d), No FRS Unit, under any condition of modulation, shall exceed a 0.5 W effective radiated power (ERP).

10.2 TEST PROCEDURE

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load, which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT .The test was performed by placing the EUT on 3-orthogonal axis.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the emissions were measured by the substitution.

10.3 TEST RESULT

Power Measurement Results			
Channel	Measurement Result (dBm)		
CH0(462.6625MHz)	23.11		
CH7(467.5625MHz)	23.02		

Note: ERP was recorded.

Conducted Power Measurement Results				
Channel	Measurement Result (dBm)			
Glaille	Peak	AV		
CH0(462.6625MHz)	25.31	24.27		
CH7(467.5625MHz)	25.28	24.25		

Date: 2016-06-16



Page 32 of 46

11. Radiated Emission on Receiving Mode

11.1 Provisions Applicable

FCC Part 15 Subpart B Section 15.109

11.2 TEST METHOD

ANSI C 63.4: 2014

11.4 MEASURE RESULT (MEASURED AT 3M USING FCC PART15 B LIMITS)


Date: 2016-06-16



Α Radiated Disturbance In Vertical (30MHz----1000MHz)

EUT set Condition: Receiving Level: Class B **PASS** Results:

Please refer to following diagram for individual

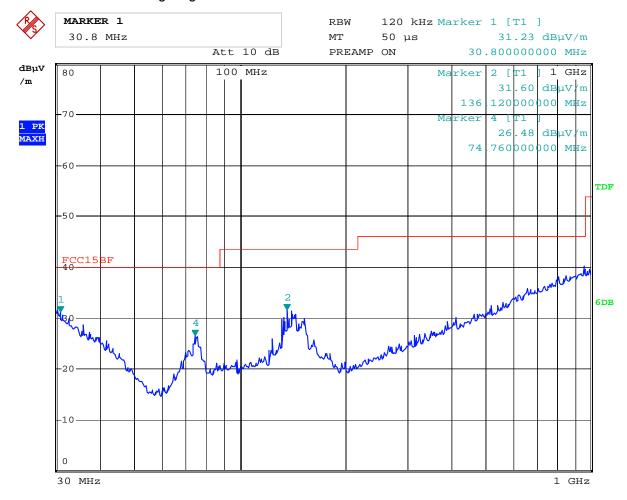

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
30.800	31.23	V	40.00
136.120	31.60	V	43.50
74.760	26.48	V	40.00

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt


Date: 2016-06-16



Radiated Disturbance In Horizontal (30MHz----1000MHz)

EUT set Condition: Receiving Level: Class B Results: **PASS**

Please refer to following diagram for individual

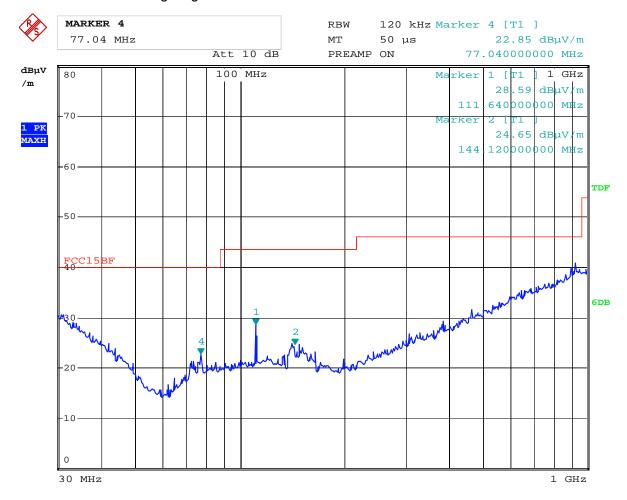

Frequency (MHz)	Level@3m (dBµV/m)	Antenna Polarity	Limit@3m (dBµV/m)
77.040	22.85	Н	40.00
111.640	28.59	Н	43.50
144.120	24.65	Н	43.50

The report refers only to the sample tested and does not apply to the bulk.

This report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt

Report No.: EMC1606026 Page 35 of 46

Date: 2016-06-16



12.0 FCC ID Label

FCC ID: 2AIOQ-FWAN20A

This device complies with part 95 of the FCC rules. Operation is subject to the following two conditions (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

The label must not be a stick-on paper label. The label on these products must be permanently affixed to the product and readily visible at the time of purchase and must last the expected lifetime of the equipment not be readily detachable.

Mark Location:



Page 36 of 46 Report No.: EMC1606026

Date: 2016-06-16



13.0 Photo of testing

13.1 Conducted test View--




Date: 2016-06-16



13.2 Radiated emission test view



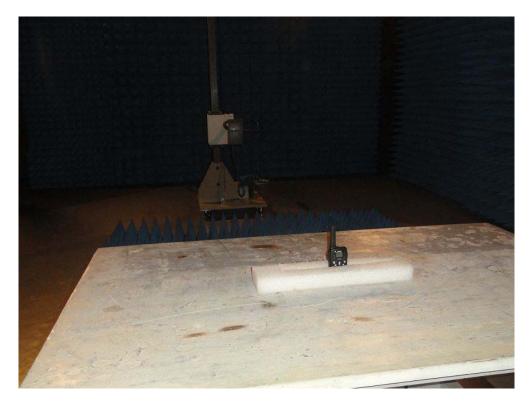

The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 38 of 46

Report No.: EMC1606026

Date: 2016-06-16



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 39 of 46

Report No.: EMC1606026

Date: 2016-06-16



Outside View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Report No.: EMC1606026 Page 40 of 46

Date: 2016-06-16



Outside View



Page 41 of 46

Report No.: EMC1606026

Date: 2016-06-16



Power Supply



Interior View



The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 42 of 46

Report No.: EMC1606026

Date: 2016-06-16



Interior View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 43 of 46

Report No.: EMC1606026

Date: 2016-06-16



Interior View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 44 of 46

Report No.: EMC1606026

Date: 2016-06-16



Interior View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 45 of 46

Report No.: EMC1606026

Date: 2016-06-16



Interior View





The report refers only to the sample tested and does not apply to the bulk.

This report is issued in confidence to the client and it will be strictly treated as such by the SHENZHEN TIMEWAY TESTING LABORATORIES. It may not be reproduced rather in its entirety or in part and it may not be used for adverting. The client to whom the report is issued may, however, show or send it . or a certified copy there of prepared by the SHENZHEN TIMEWAY TESTING LABORATORIES to his customer. Supplier or others persons directly concerned. SHENZHEN TIMEWAY TESTING LABORATORIES will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report.

In the event of the improper use of the report. SHENZHEN TIMEWAY TESTING LABORATORIES reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Page 46 of 46 Report No.: EMC1606026

Date: 2016-06-16



Interior View



End of the report