

**FCC 47 CFR PART 15 SUBPART C  
TEST REPORT****FOR****Smart Bag**

Model : SBXXXXXXXXXXXX (XXXXXXXXXXXX refers to  
Fabrication date, style, pattern type, leather color and type of  
charging cable)

Issued to

Flying Frog llc. ,  
16 Barnard Ave, Poughkeepsie, NY 12601, USA

Issued by

WH Technology Corp.



<b>Open Site</b>		<b>No.120, Ln. 5, Hudong St., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)</b>
<b>EMC Test Site</b>	<b>Xizhi Office and Lab</b>	<b>7F., No.262, Sec. 3, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)</b>
<b>Tel.: +886-2-7729-7707 Fax: +886-2- 8648-1311</b>		

*Note: This test refers exclusively to the test presented test model and sample. This report shall not be reproduced except in full, without the written approval of WH Technology Corp. This document may be altered or revised by WH Technology Corp. Personnel only, and shall be noted in the revision section of the document.*



---

<b>TABLE OF CONTENTS</b>	-----	2
<b>1. GENERAL INFORMATION</b>	-----	3
1.1 DESCRIPTION OF THE TESTED SAMPLES	-----	4
<b>2. TEST METHODOLOGY</b>	-----	6
2.1 GENERAL TEST PROCEDURES	-----	6
2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	-----	7
2.3 DESCRIPTION OF TEST MODES	-----	7
2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS	-----	8
<b>3. TEST AND MEASUREMENT EQUIPMENT</b>	-----	10
3.1 CALIBRATION	-----	10
3.2 EQUIPMENT	-----	10
<b>4. SECTION 15.249 REQUIREMENTS (FUNDAMENTAL/ HARMONICS)</b>	-----	12
4.1 TEST SETUP	-----	12
4.2 LIMIT	-----	12
4.3 RESULT: PASSED	-----	12
4.4 TEST DATA:	-----	12
<b>5. SECTION 15.205 REQUIREMENTS (BAND EDGE)</b>	-----	18
5.1 TEST SETUP	-----	18
5.2 LIMIT	-----	18
5.3 RESULT: PASSED	-----	19
5.4 TEST DATA:	-----	19
<b>6. SECTION 15.209 REQUIREMENTS (GENERAL RADIATED EMISSION)</b>	-----	22
6.1 TEST SETUP	-----	22
6.2 LIMIT	-----	23
6.3 TEST PROCEDURE	-----	24
6.4 RESULT: PASSED	-----	24
6.5 TEST DATA:	-----	25
<b>7. SECTION 15.207 REQUIREMENTS (POWERLINE CONDUCTED EMISSIONS)</b>	-----	29
<b>APPENDIX 1 PHOTOS OF TEST CONFIGURATION</b>		
<b>APPENDIX 2 PHOTOS OF EUT</b>		



## 1. GENERAL INFORMATION

**Applicant** : Flying Frog llc. ,  
**Address** : 16 Barnard Ave, Poughkeepsie, NY 12601, USA  
**Manufacturer** : Flying Frog llc. ,  
**Address** : 16 Barnard Ave, Poughkeepsie, NY 12601, USA  
**EUT** : Smart Bag  
**Model Name** : SBXXXXXXXXXXXX (XXXXXXXXXXXX refers to Fabrication date, style, pattern type, leather color and type of charging cable)

Is here with confirmed to comply with the requirements set out in the FCC Rules and Regulations Part 15 Subpart C and the measurement procedures were according to ANSI C63.4-2014. The said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment are within the compliance requirements.

### FCC part 15 subpart C

Receipt Date : 11/14/2016

Final Test Date : 12/14/2016

Tested by:

Bell Wei/ Engineer

Reviewed by:

Mike Lee / Manager

(Place)

(Date)

(Signature)

Designation Number: TW1083



## 1.1 DESCRIPTION OF THE TESTED SAMPLES

EUT Name : Smart Bag

Model Number :: SBXXXXXXXXXXXX (XXXXXXXXXXXX refers to Fabrication date, style, pattern type, leather color and type of charging cable)

FCCID Number : 2AIOTSBXXXXXXXXXXXX

Receipt Date : 11/14/2016

Input Voltage : 3.7Vdc From Li-ion Battery

Power From : Inside Outside  
Adaptor BATTERY AC Power Source  
DC Power Source Support Unit PC or NB

Operate Frequency : Refer to the channel list as described below

Modulation Technique : GFSK

Number of Channels : 39

Channel spacing : N/A  2 MHz

Operating Mode : Simplex  Half Duplex

Antenna Type : Integral antenna: PCB Printing  
a dedicated antenna

Antenna gain : 0 dBi



---

<b>Channel</b>	<b>Frequency(MHz)</b>	<b>Channel</b>	<b>Frequency(MHz)</b>
00	2402	20	2442
01	2404	21	2444
02	2406	22	2446
03	2408	23	2448
04	2410	24	2450
05	2412	25	2452
06	2414	26	2454
07	2416	27	2456
08	2418	28	2458
09	2420	29	2460
10	2422	30	2462
11	2424	31	2464
12	2426	32	2466
13	2428	33	2468
14	2430	34	2470
15	2432	35	2472
16	2434	36	2474
17	2436	37	2476
18	2438	38	2478
19	2440	39	2480



## 2. TEST METHODOLOGY

All testing as described bellowed were performed in accordance with ANSI C63.4:2014 and FCC CFR 47 Part 15 Subpart C.

### 2.1 GENERAL TEST PROCEDURES

#### Conducted Emissions

The EUT is placed on a wood table, which is at 0.8 m above ground plane acceding to clause 15.207 and requirements of ANSI C63.4:2014. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz are using CISPR Quasi-Peak / Average detectors.

#### Radiated Emissions

The EUT is a placed on a turn table, which is 0.8 m above ground plane. The turntable was rotated through 360 degrees to determine the position of maximum emission level. The EUT is placed at 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. Each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.



## 2.2 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

<b>MHz</b>	<b>MHz</b>	<b>MHz</b>	<b>GHz</b>
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
10.495 - 0.505	16.69475 -	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.69525	960 - 1240	7.25 - 7.75
4.125 - 4.128	16.80425 -	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	16.80475	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	25.5 - 25.67	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	37.5 - 38.25	73 - 74.6	10.6 - 12.7
6.26775 - 6.26825	1660 - 1710	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	74.8 - 75.2	2200 - 2300	14.47 - 14.5
8.291 - 8.294	108 - 121.94	2310 - 2390	15.35 - 16.2
8.362 - 8.366	123 - 138	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	149.9 - 150.05	2655 - 2900	22.01 - 23.12
8.41425 - 8.41475	156.52475 -	3260 - 3267	23.6 - 24.0
12.29 - 12.293	156.52525	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	156.7 - 156.9	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	162.0125 - 167.17	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41	167.72 - 173.2		
	240 - 285		
	322 - 335.4		

<sup>1</sup> Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

<sup>2</sup> Above 38.6

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

## 2.3 DESCRIPTION OF TEST MODES

The EUT was tested under following modes:

**Modes:**

1. Continuous transmitting

**Channels:**


1. 2.402 GHz (Lowest Channel)
2. 2.440 GHz (Middle Channel)
3. 2.480 GHz (Highest Channel)



## 2.4 DESCRIPTION OF THE SUPPORT EQUIPMENTS

### Setup Diagram

See test photographs attached in appendix 1 for the actual connections between EUT and support equipment.

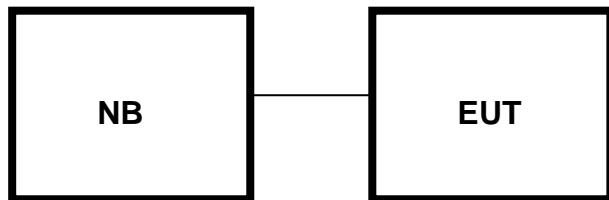



## Support Equipment

Peripherals Devices:

OUTSIDE SUPPORT EQUIPMENT							
No.	Equipment	Model	Serial No.	FCC ID/ BSMI ID	Trade name	Data Cable	Power Cord
1.	Notebook	HSTNN-Q 95C	5CD551 4JLJ	R3A304	HP	N/A	Unshielded 1.8m

**Note:** All the above equipment /cable were placed in worse case position to maximize emission signals during emission test

**Grounding:** Grounding was in accordance with the manufacturer's requirement and conditions for the intended use.



## 3. TEST AND MEASUREMENT EQUIPMENT

### 3.1 CALIBRATION

The measuring equipment utilized to perform the tests documented in the report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

### 3.2 EQUIPMENT

The following list contains measurement equipment used for testing. The equipment conforms to the requirement of CISPR 16-1, ANSI C63.2 and. Other required standards.

Calibration of all test and measurement, including any accessories that may effect such calibration, is checked frequently to ensure the accuracy. Adjustments are made and correction factors are applied in accordance with the instructions contained in the respective.



**Table 1 List of Test and Measurement Equipment**

Test Site	Instrument	Manufacturer	Model No.	S/N	Next Cal. Date
Conduction	Spectrum (9K--3GHz)	R&S	FSP3	833387/010	2017/09/20
	EMI Receiver	R&S	ESHS10	830223/008	2017/05/22
	LISN	Rolf Heine Hochfrequenztechnik	NNB-2/16z	98062	2017/05/25
	ISN	Schwarzbeck	8-Wire ISN CAT5	CAT5-8158-0094	2017/09/21
	RF Cable	N/A	N/A	EMI-3	2017/10/19
Radiation	Bilog antenna(30M-1G)	ETC	MCTD2786B	BLB16M04004/JB-5-004	2017/05/03
	Double Ridged Guide Horn antenna(1G-18G)	ETC	MCTD 1209	DRH15N02009	2017/11/23
	Horn antenna (18G-26G)	com-power	AH-826	81000	2017/08/15
	Pre amplifier (30M-1G)	EMC INSTRUMENT	EMC9135	980334	2017/05/04
	Microwave Preamplifier (1G-18G)	EMC INSTRUMENT	EMC051845	980108&AT-18001	2017/10/23
	Pre amplifier (18G~26G)	MITEQ	JS4-18002600-30-5A	808329	2017/08/10
	EMI Test Receiver	R&S	ESVS30 (20M-1000MHz)	863342/012	2017/11/28
	RF Cable (open site)	EMCI	N male on end of both sides (EMI4)	30m	2017/10/19
	RF CABLE (1~26.5G)	HARBOUR INDUSTRIES	LL142MI(4M+4M)	NA	2017/03/08
	RF CABLE (1~26.5G)	HARBOUR INDUSTRIES	LL142MI(7M)	NA	2017/08/11
	Spectrum (9K--7GHz)	R&S	FSP7	830180/006	2017/02/25
	Spectrum (9K--40GHz)	AGILENT	8564EC	4046A0032	2017/01/03
Software	e3	AUDIX	N/A	N/A	N/A

• CALIBRATION INTERVAL OF INSTRUMENTS LISTED ABOVE IS ONE YEAR



## 4. SECTION 15.249 REQUIREMENTS (FUNDAMENTAL/ HARMONICS)

### 4.1 TEST SETUP

Refer to paragraph 6.1.

### 4.2 LIMIT

Fundamental Frequency (MHz)	Field Strength of Fundamental (dB $\mu$ V/m at 3-meter)	Detector
902 - 928		
2400 – 2483	114	Peak
5725 - 5875		
902 - 928		
2400 – 2483	94	AV
5725 - 5875		

Fundamental Frequency (MHz)	Field Strength of Harmonics (dB $\mu$ V/m at 3-meter)	Detector
902 - 928		
2400 – 2483	74	Peak
5725 - 5875		
902 - 928		
2400 – 2483	54	AV
5725 - 5875		


### 4.3 RESULT: PASSED

### 4.4 TEST DATA:



## Fundamental

Horizontal

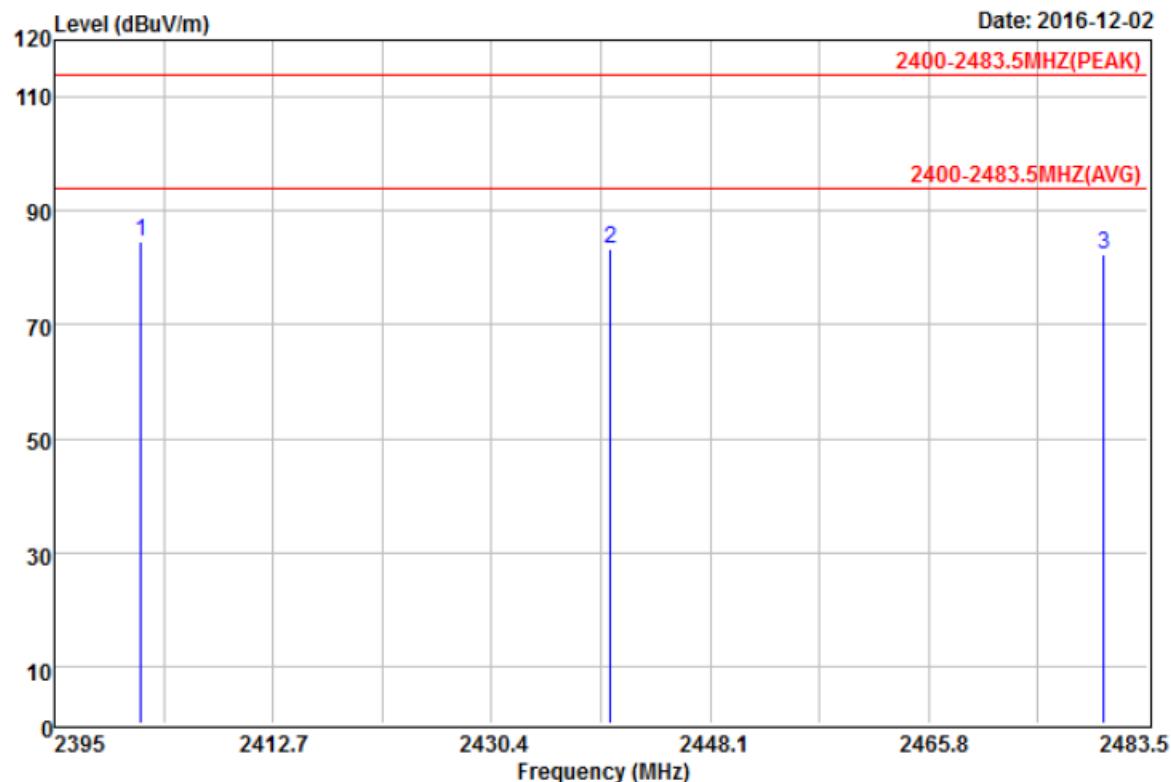

Site : open site  
Condition : 2400-2483.5MHZ(Peak) 3m MCTD-1209(1-18G)-105 HORIZONTAL

EUT : 16111403

Power : DC 5V from PC

Mode : TX-CH 2402 - MI 2440 - HI 2480MHz

Temperature : 20

Humidity : 69

Mode : Fundamental


-----:  
-----:

Remarks: : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor+Cable loss-  
: Amplifier Factor

	Read Freq MHz	Level dBuV	Factor dB/m	Level dBuV/m	Limit dBuV/m	Over Line dB	Over Limit dB	Remark
1 @	2402.00	98.80	-14.05	84.75	114.00	-29.25	Peak	
2	2440.00	97.39	-13.95	83.44	114.00	-30.56	Peak	
3	2480.00	96.21	-13.85	82.36	114.00	-31.64	Peak	



Vertical

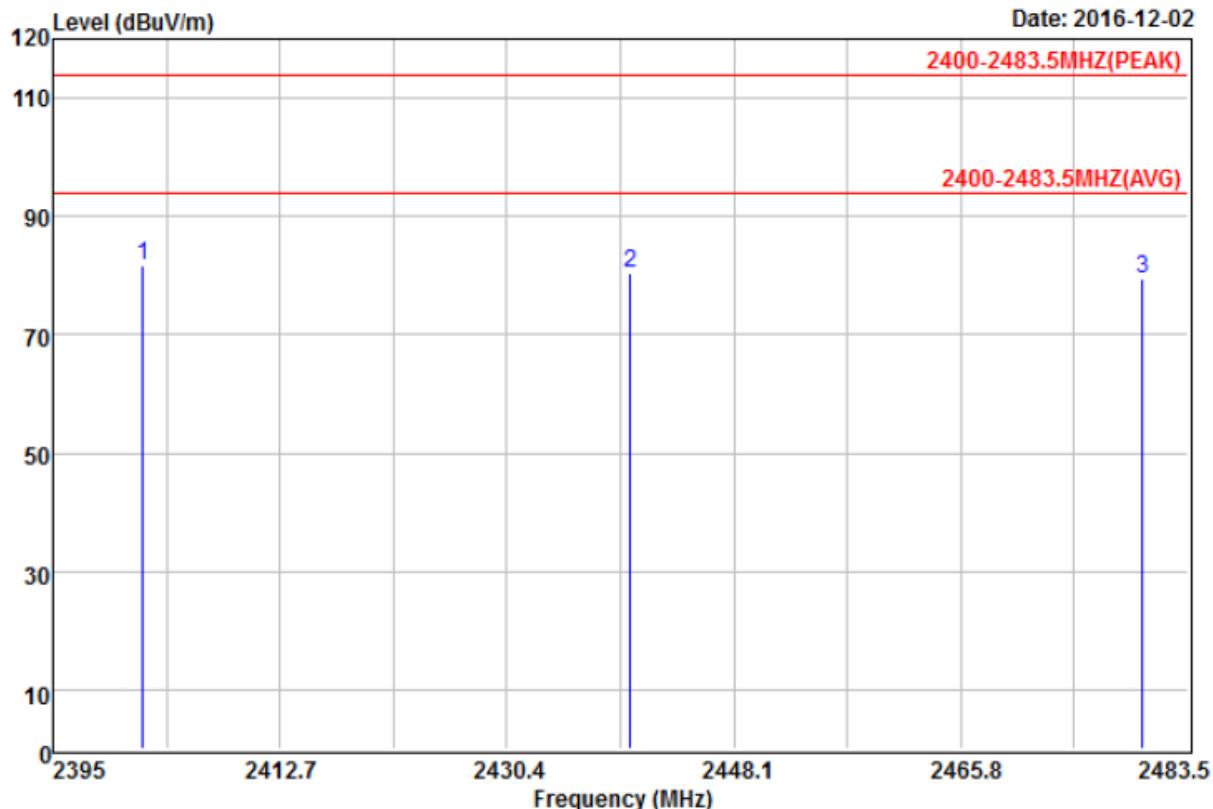

Site : open site  
Condition : 2400-2483.5MHZ(Peak) 3m MCTD-1209(1-18G)-105 VERTICAL  
EUT : 16111403  
Power : DC 5V from PC  
Mode : TX-CH 2402 - MI 2440 - HI 2480MHz  
Temperature : 20  
Humidity : 69  
Mode : Fundamental


-----:  
Remarks: : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor+Cable loss-  
: Amplifier Factor

	Read	Limit	Over			
	Freq	Level	Line	Limit	Remark	
	MHz	dBuV	dB/m	dBuV/m	dB	
1 @	2402.00	95.64	-14.05	81.59	114.00	-32.41 Peak
2	2440.00	94.30	-13.95	80.35	114.00	-33.65 Peak
3	2480.00	93.33	-13.85	79.48	114.00	-34.52 Peak



## Harmonics

### Horizontal

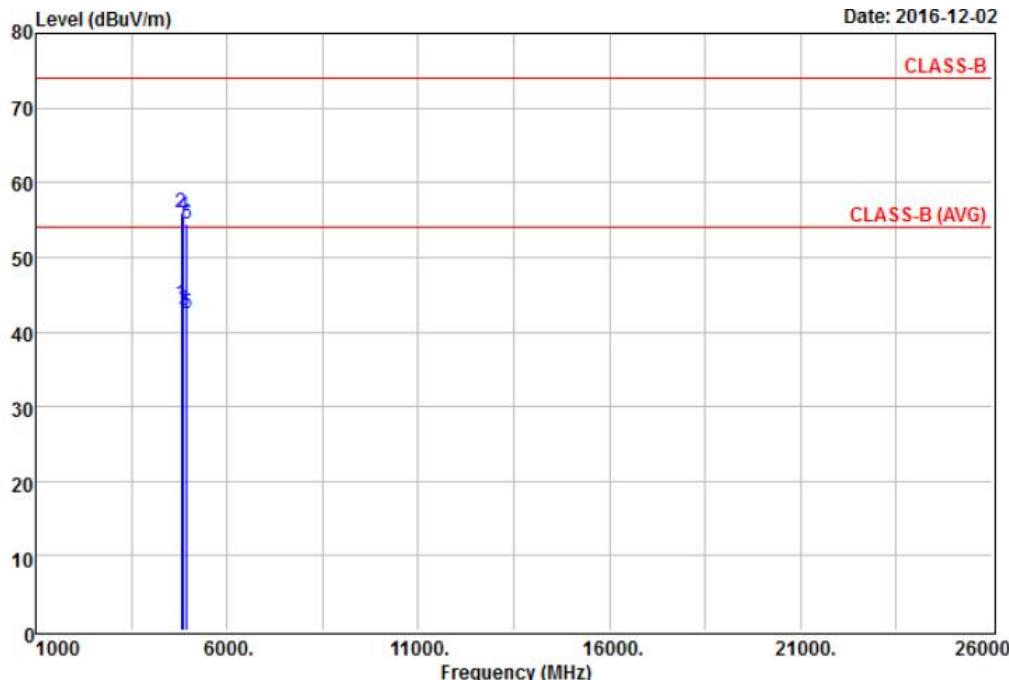


Site : open site  
Condition : CLASS-B 3m MCTD-1209(1-18G)-105 HORIZONTAL  
EUT : 16111403  
Power : DC 5V from PC  
Mode : TX-CH 2402 - MI 2440 - HI 2480MHz  
Temperature : 20  
Humidity : 69  
Mode : Harmonics

-----  
Remarks: : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor+Cable loss-  
: Amplifier Factor

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 @	4804.00	50.32	-6.64	43.68	54.00	-10.32 Average
2	4804.00	62.69	-6.64	56.05	74.00	-17.95 Peak
3	4880.00	49.50	-6.52	42.98	54.00	-11.02 Average
4	4880.00	62.05	-6.52	55.53	74.00	-18.47 Peak
5	4960.00	48.82	-6.38	42.44	54.00	-11.56 Average
6	4960.00	60.91	-6.38	54.53	74.00	-19.47 Peak



Vertical

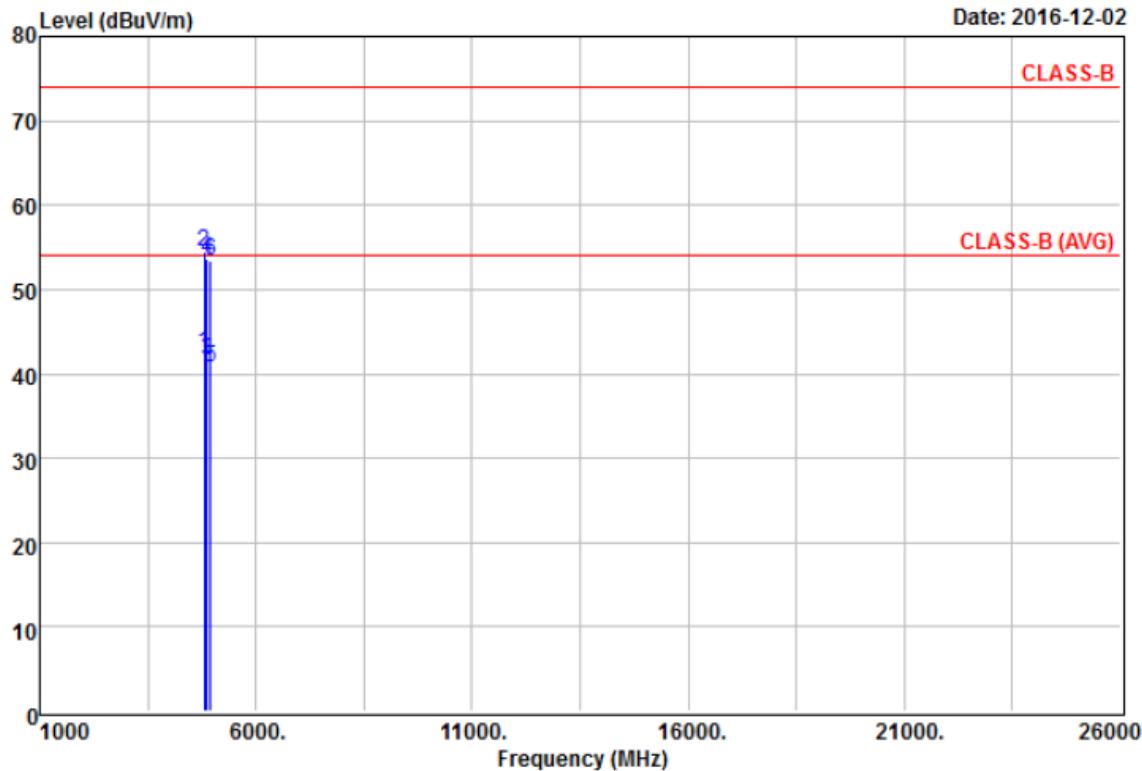

Site : open site  
Condition : CLASS-B 3m MCTD-1209(1-18G)-105 VERTICAL  
EUT : 16111403  
Power : DC 5V from PC  
Mode : TX-CH 2402 - MI 2440 - HI 2480MHz  
Temperature : 20  
Humidity : 69  
Mode : Harmonics

-----:  
Remarks: : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor+Cable loss-  
: Amplifier Factor

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1 @	4804.00	49.02	-6.64	42.38	54.00	-11.62 Average
2	4804.00	61.02	-6.64	54.38	74.00	-19.62 Peak
3	4880.00	48.12	-6.52	41.60	54.00	-12.40 Average
4	4880.00	60.23	-6.52	53.71	74.00	-20.29 Peak
5	4960.00	47.18	-6.38	40.80	54.00	-13.20 Average
6	4960.00	59.83	-6.38	53.45	74.00	-20.55 Peak



Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting: use a 1 MHz RBW, a 3 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10 Hz VBW
6. Peak detector measurement data will represent the worst case results.
7. “---” denotes the data which is not available.



## 5. SECTION 15.205 REQUIREMENTS (BAND EDGE)

### 5.1 TEST SETUP

Refer to paragraph 6.1.

### 5.2 LIMIT

Restricted Bands:

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42 - 16.423	399.9 - 410	4.5 - 5.15
<sup>1</sup> 0.495 - 0.505	16.69475 - 16.69525	608 - 614	5.35 - 5.46
2.1735 - 2.1905	16.80425 - 16.80475	960 - 1240	7.25 - 7.75
4.125 - 4.128	25.5 - 25.67	1300 - 1427	8.025 - 8.5
4.17725 - 4.17775	37.5 - 38.25	1435 - 1626.5	9.0 - 9.2
4.20725 - 4.20775	73 - 74.6	1645.5 - 1646.5	9.3 - 9.5
6.215 - 6.218	74.8 - 75.2	1660 - 1710	10.6 - 12.7
6.26775 - 6.26825	108 - 121.94	1718.8 - 1722.2	13.25 - 13.4
6.31175 - 6.31225	123 - 138	2200 - 2300	14.47 - 14.5
8.291 - 8.294	149.9 - 150.05	2310 - 2390	15.35 - 16.2
8.362 - 8.366	156.52475 - 156.52525	2483.5 - 2500	17.7 - 21.4
8.37625 - 8.38675	156.7 - 156.9	2690 - 2900	22.01 - 23.12
8.41425 - 8.41475	162.0125 - 167.17	3260 - 3267	23.6 - 24.0
12.29 - 12.293	167.72 - 173.2	3332 - 3339	31.2 - 31.8
12.51975 - 12.52025	240 - 285	3345.8 - 3358	36.43 - 36.5
12.57675 - 12.57725	322 - 335.4	3600 - 4400	( <sup>2</sup> )
13.36 - 13.41			

Operation within the bands:

902 - 928 MHz, 2400 - 2483.5 MHz, 5725 - 5875 MHz, and 24.0 - 24.25 GHz.


Frequency (Hz)	Field Strength ( $\mu$ V/m at 3-meter)	Field Strength (dB $\mu$ V/m at 3-meter)
1.705-30	30 (at 30-meter)	49.5
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54



## 5.3 RESULT: PASSED

## 5.4 TEST DATA:

Horizontal

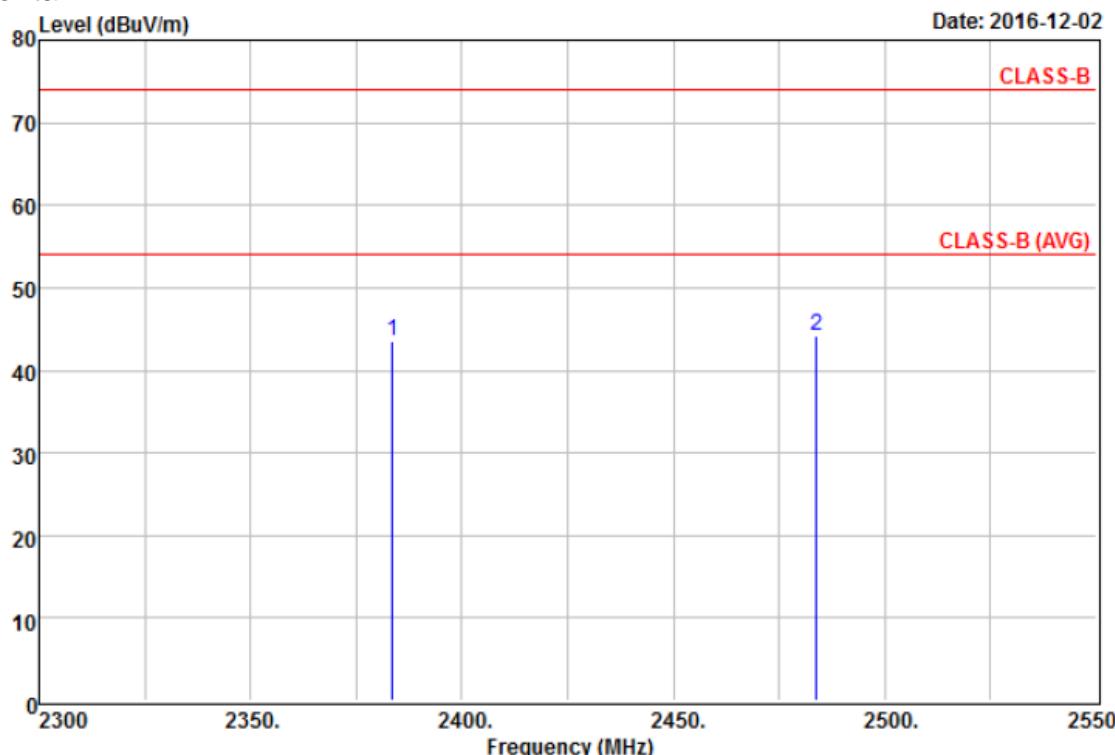

Site : open site

Condition : CLASS-B 3m MCTD-1209(1-18G)-105 HORIZONTAL

EUT : 16111403

Power : DC 5V from PC

Mode : CH LO & HI - Restricted Bands

Temperature : 20

Humidity : 69

Mode :

-----:

Remarks: : 1.Result=Read Value+Factor


: 2.Factor=Antenna Factor+Cable loss-

: Amplifier Factor

	Read		Limit	Over		
Freq	Level	Factor	Level	Line	Limit	Remark
MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	2383.50	57.61	-14.10	43.51	74.00	-30.49 Peak
2 @	2483.90	58.12	-13.84	44.28	74.00	-29.72 Peak



Vertical

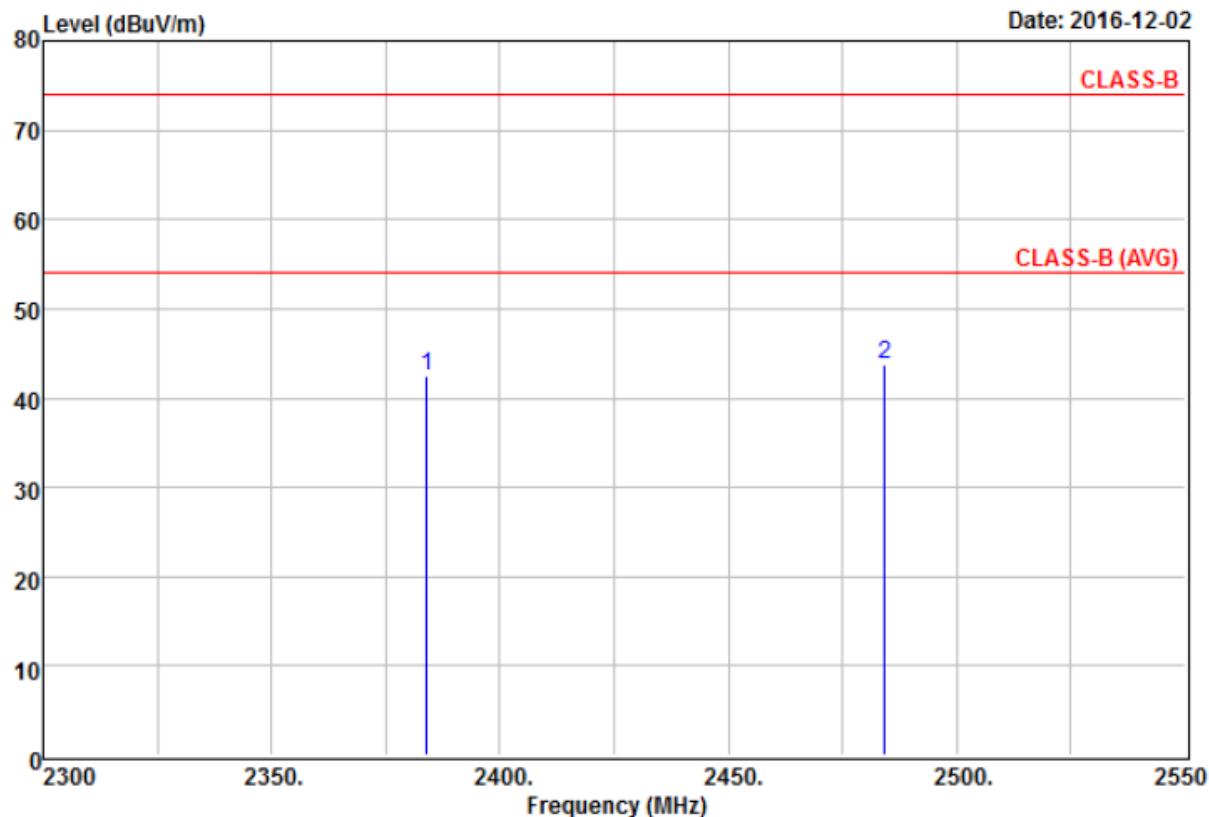

Site : open site

Condition : CLASS-B 3m MCTD-1209(1-18G)-105 VERTICAL

EUT : 16111403

Power : DC 5V from PC

Mode : CH LO & HI - Restricted Bands

Temperature : 20

Humidity : 69

Mode :

----- : -----

Remarks: : 1.Result=Read Value+Factor

: 2.Factor=Antenna Factor+Cable loss-

: Amplifier Factor

	Read Freq	Level MHz	Factor dBuV	Level dB/m	Limit dBuV/m	Line dBuV/m	Over Limit dB	Remark
1	2384.10	56.47	-14.10	42.37	74.00	-31.63	Peak	
2 @	2484.20	57.63	-13.83	43.80	74.00	-30.20	Peak	




Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements above 1000 MHz, Peak detector setting: use a 1 MHz RBW, a 3 MHz VBW.
5. Measurements above 1000 MHz, Average detector setting: 1 MHz RBW with 10 Hz VBW.
6. Peak detector measurement data will represent the worst case results.



## 6. SECTION 15.209 REQUIREMENTS (GENERAL RADIATED EMISSION)

### 6.1 TEST SETUP

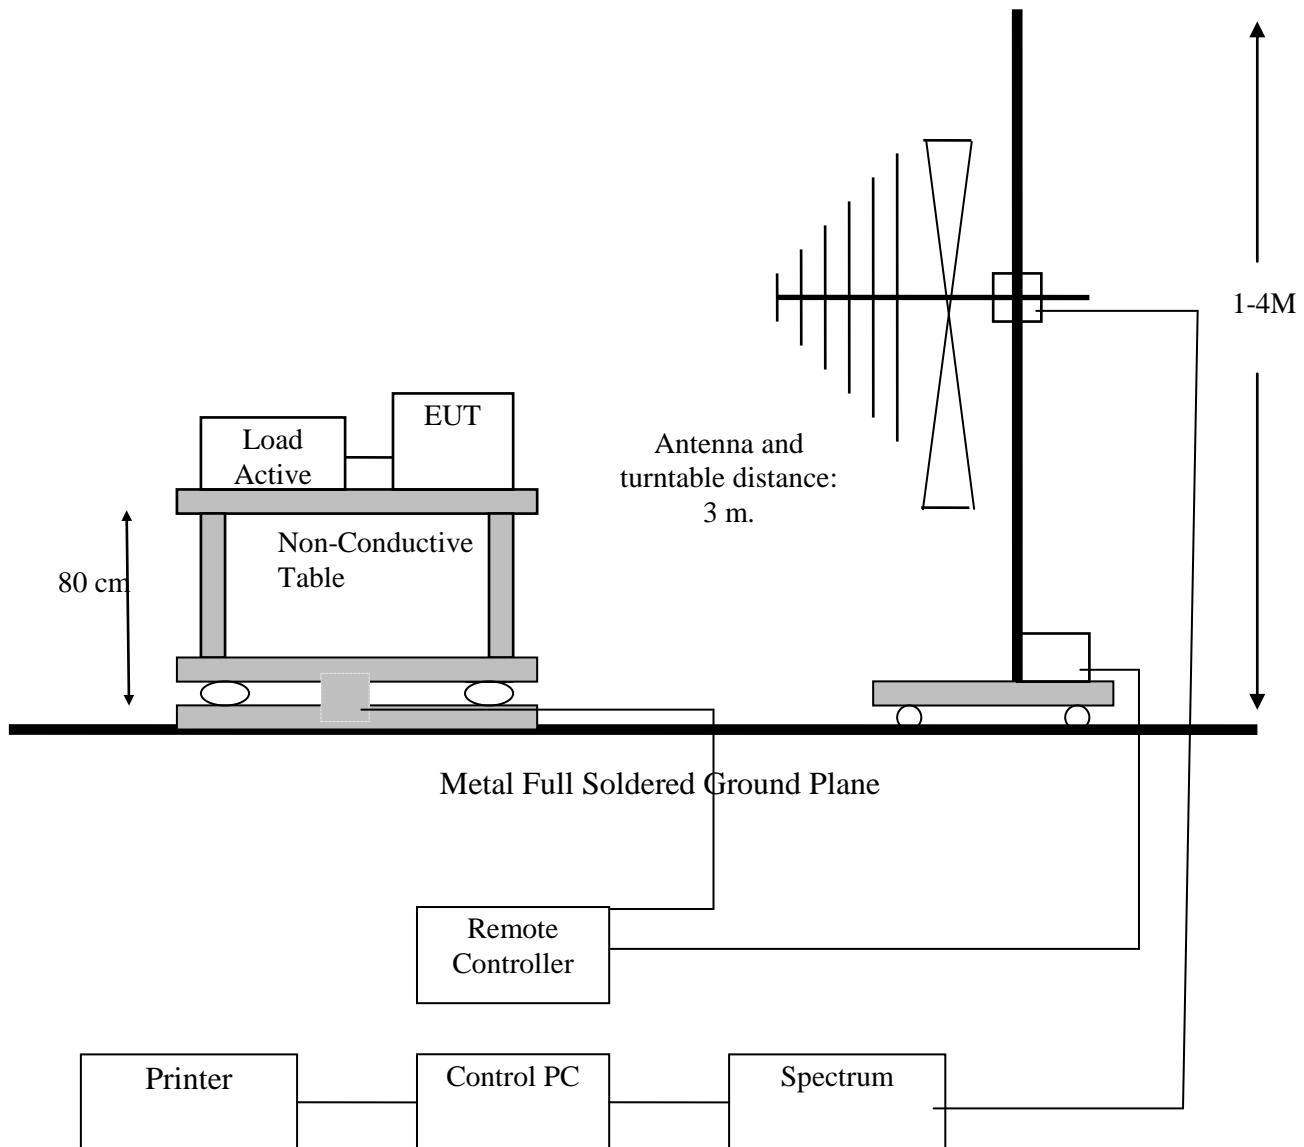



## 6.2 LIMIT

The field strength of any emissions which appear outside of this band shall not exceed the general radiated emission limits in section 15.209 as below.

Frequency (MHz)	Field Strength (mV/m)	Measurement Distance (m)
1.705-30	30	30
30-88	100*	3
88-216	150*	3
216-960	200*	3
Above 960	500*	3

*\*Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.*

*In the above emission table, the tighter limit applies at the band edges.*

Frequency (MHz)	Field Strength (µV/m at 3-meter)	Field Strength (dBµV/m at 3-meter)
1.705-30	30 (at 30-meter)	49.5
30-88	100	40
88-216	150	43
216-960	200	46
Above 960	500	54



## 6.3 TEST PROCEDURE

1. The EUT was placed on a turntable, which was 0.8m above ground plane.
2. The turntable was rotated for 360 degrees to determine the position of maximum emission level.
3. EUT was set at 3m away from the receiving antenna, which was varied from 1m to 4m to find out the highest emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was maximized by changing the polarization of receiving antenna, both horizontal and vertical.
6. Repeated above procedures until the measurements for all frequencies are completed.

## 6.4 RESULT: PASSED




## 6.5 TEST DATA:

All frequencies not described in this test report and within the range of the general radiated emission limits are not detectable significantly. The table as below is representing worst emissions found.



Horizontal(worst emissions found)

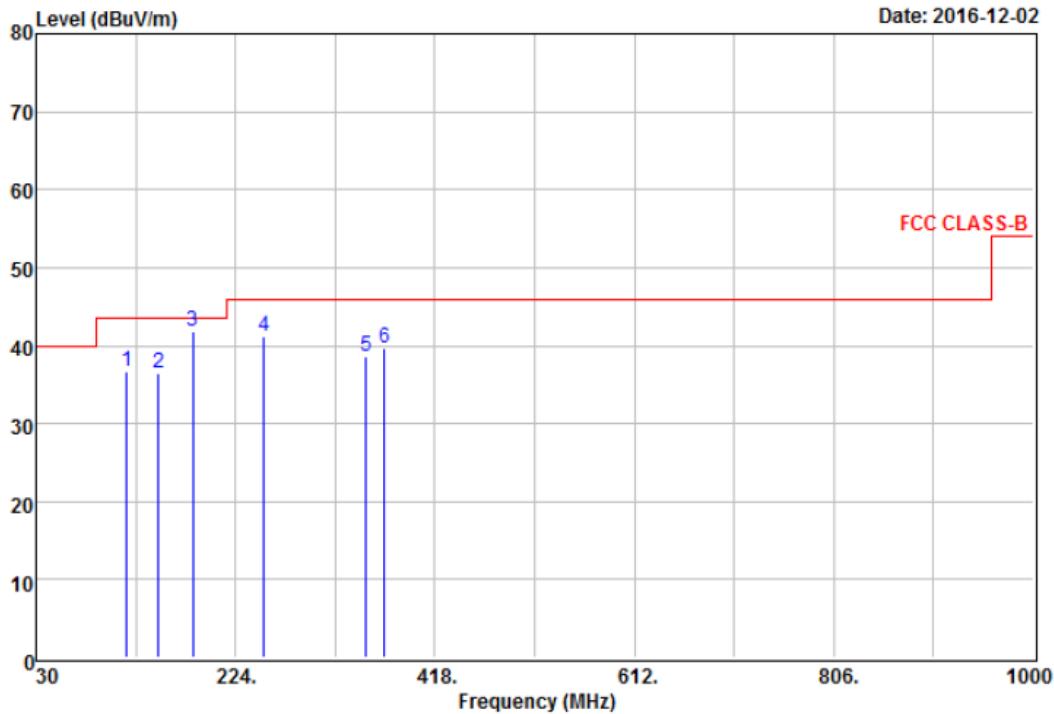


Site : open site  
Condition : FCC CLASS-B 3m MCTD2786B(30-1G)-105 HORIZONTAL  
EUT : 16111403  
Power : DC 5V from PC  
Mode : wireless charge & BT  
Temperature : 20  
Humidity : 69

-----:  
Remarks: : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor+Cable loss-  
: Amplifier Factor

		Read		Limit	Over	
	Freq	Level	Factor	Level	Line	Limit
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB
1	118.27	52.03	-15.40	36.63	43.50	-6.87 QP
2	149.31	53.00	-16.55	36.45	43.50	-7.05 QP
3 @	182.29	61.00	-19.14	41.86	43.50	-1.64 QP
4	252.13	56.93	-15.69	41.24	46.00	-4.76 QP
5	351.07	51.40	-12.80	38.60	46.00	-7.40 QP
6	368.53	51.82	-12.20	39.62	46.00	-6.38 QP



Vertical(worst emissions found)

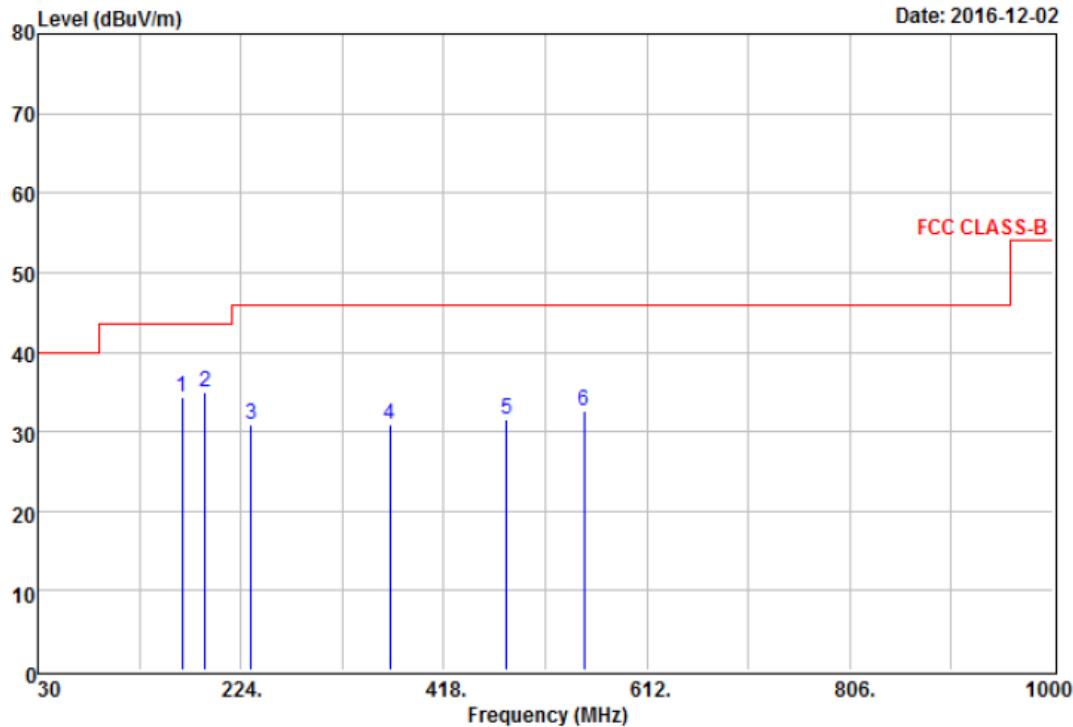

Site : open site  
Condition : FCC CLASS-B 3m MCTD2786B(30-1G)-105 VERTICAL  
EUT : 16111403  
Power : DC 5V from PC  
Mode : wireless charge & BT  
Temperature : 20  
Humidity : 69

-----  
Remarks: : 1.Result=Read Value+Factor  
: 2.Factor=Antenna Factor+Cable loss-  
: Amplifier Factor

	Read Freq	Level MHz	Factor dB <sub>UV</sub>	Level dB/m	Limit dB <sub>UV</sub> /m	Line dB <sub>UV</sub> /m	Over Limit dB	Over Limit Remark
1	167.74	52.65	-18.38	34.27	43.50	43.50	-9.23	QP
2 @	190.05	53.79	-18.91	34.88	43.50	43.50	-8.62	QP
3	233.70	47.62	-16.83	30.79	46.00	46.00	-15.21	QP
4	366.59	43.22	-12.27	30.95	46.00	46.00	-15.05	QP
5	478.14	41.79	-10.23	31.56	46.00	46.00	-14.44	QP
6	551.86	41.64	-9.02	32.62	46.00	46.00	-13.38	QP



Note:

1. Emission level = Reading level + Correction factor
2. Correction factor : Antenna factor, Cable loss, Pre-Amp, etc.
3. All emissions as described above were determining by rotating the EUT through three orthogonal axes to maximizing the emissions if the EUT belongs to hand-held or body-worn devices.
4. Measurements from 9 kHz to 150 kHz, Peak detector setting: 100 Hz RBW
5. Measurements from 150 kHz to 30MHz, Peak detector setting: 10 kHz RBW
6. Measurements from 30 MHz to 1000 MHz, Peak detector setting: 100 kHz RBW
7. Measurements from 9 kHz to 150 kHz, CISPR Quasi-Peak detector: 200 Hz RBW
8. Measurements from 150 kHz to 30MHz, CISPR Quasi-Peak detector: 9 kHz RBW
9. Measurements from 30 MHz to 1000 MHz, CISPR Quasi-Peak detector: 120 kHz RBW
10. Peak detector measurement data will represent the worst case results.



**7. SECTION 15.207 REQUIREMENTS (POWERLINE CONDUCTED EMISSIONS)**

The EUT is powered by the battery; therefore this test item is not applicable.



# APPENDIX 1

## PHOTOS OF TEST CONFIGURATION

Photograph – Radiated Emission Test Setup





---

## **APPENDIX 2**

## **PHOTOS OF EUT**





