

#01_GSM850_GPRS (3 Tx slots)_Right Cheek_Ch251


Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:2.77
Medium: HSL_850_181109 Medium parameters used: $f = 849$ MHz; $\sigma = 0.89$ S/m; $\epsilon_r = 41.834$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.39, 6.39, 6.39) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.208 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.17 V/m; Power Drift = -0.18 dB
Peak SAR (extrapolated) = 0.227 W/kg
SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.142 W/kg
Maximum value of SAR (measured) = 0.200 W/kg

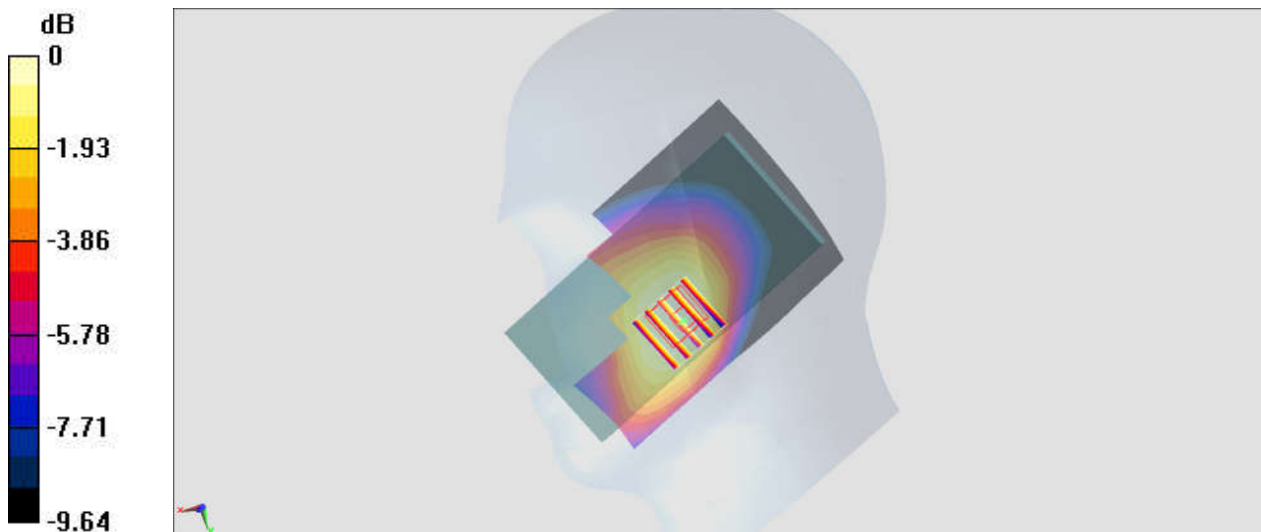

0 dB = 0.200 W/kg = -6.99 dBW/kg

#02_GSM1900_GPRS (4 Tx slots)_Right Cheek_Ch661


Communication System: PCS; Frequency: 1880 MHz; Duty Cycle: 1:2.08
Medium: HSL_1900_181108 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 41.38$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.27, 5.27, 5.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0640 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.636 V/m; Power Drift = 0.19 dB
Peak SAR (extrapolated) = 0.0890 W/kg
SAR(1 g) = 0.054 W/kg; SAR(10 g) = 0.032 W/kg
Maximum value of SAR (measured) = 0.0659 W/kg

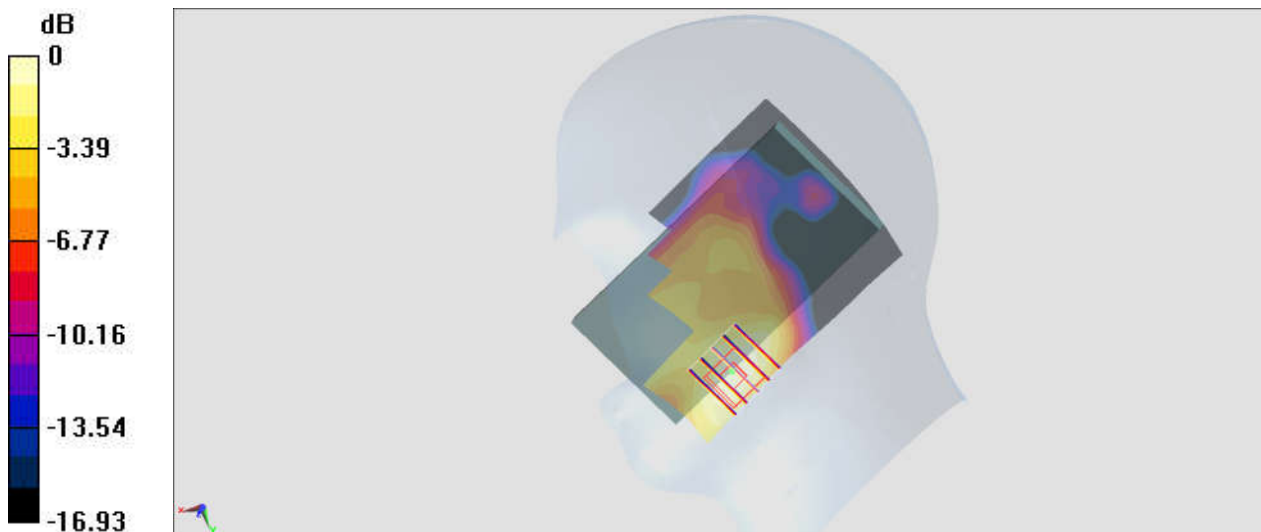

0 dB = 0.0659 W/kg = -11.81 dBW/kg

#03_WCDMA II_RMC 12.2Kbps_Right Cheek_Ch9262


Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1
 Medium: HSL_1900_181108 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.396$ S/m; $\epsilon_r = 41.485$; $\rho = 1000$ kg/m³
 Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.27, 5.27, 5.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.0564 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 6.214 V/m; Power Drift = 0.11 dB
 Peak SAR (extrapolated) = 0.0770 W/kg
SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.028 W/kg
 Maximum value of SAR (measured) = 0.0569 W/kg

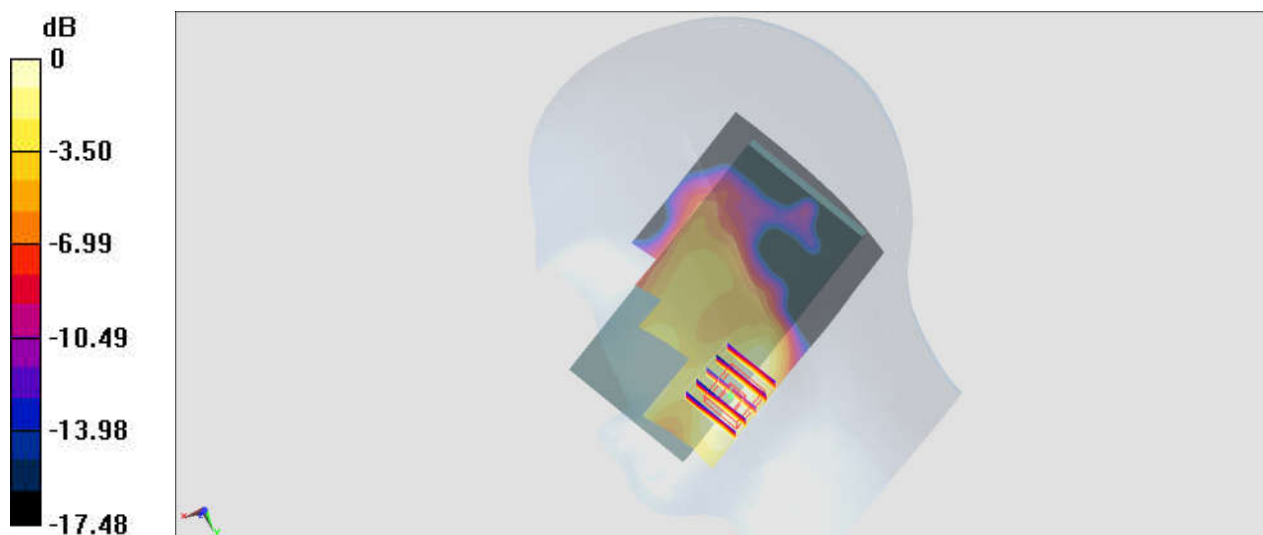

0 dB = 0.0569 W/kg = -12.45 dBW/kg

#04_WCDMA IV_RMC 12.2Kbps_Right Cheek_Ch1312


Communication System: WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1
Medium: HSL_1750_181108 Medium parameters used : $f = 1712.4$ MHz; $\sigma = 1.331$ S/m; $\epsilon_r = 41.047$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.48, 5.48, 5.48) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.100 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.998 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.124 W/kg
SAR(1 g) = 0.082 W/kg; SAR(10 g) = 0.052 W/kg
Maximum value of SAR (measured) = 0.0958 W/kg

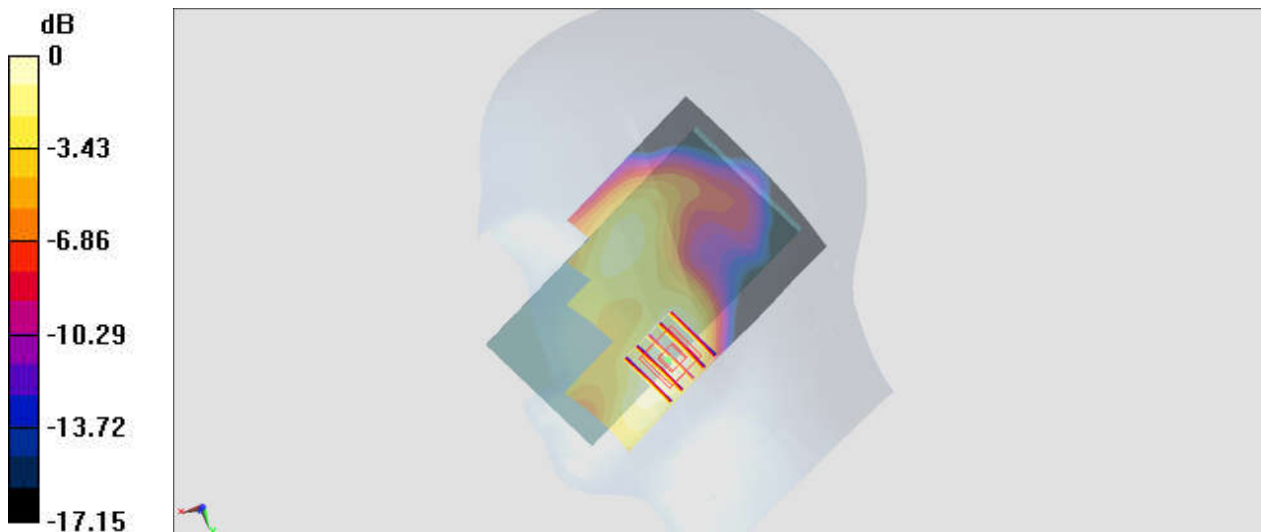

0 dB = 0.0958 W/kg = -10.19 dBW/kg

#05_WCDMA V_RMC 12.2Kbps_Right Cheek_Ch4182


Communication System: WCDMA; Frequency: 836.4 MHz; Duty Cycle: 1:1
Medium: HSL_850_181021 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.882$ S/m; $\epsilon_r = 41.718$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.39, 6.39, 6.39) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.203 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.91 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 0.233 W/kg
SAR(1 g) = 0.181 W/kg; SAR(10 g) = 0.139 W/kg
Maximum value of SAR (measured) = 0.198 W/kg

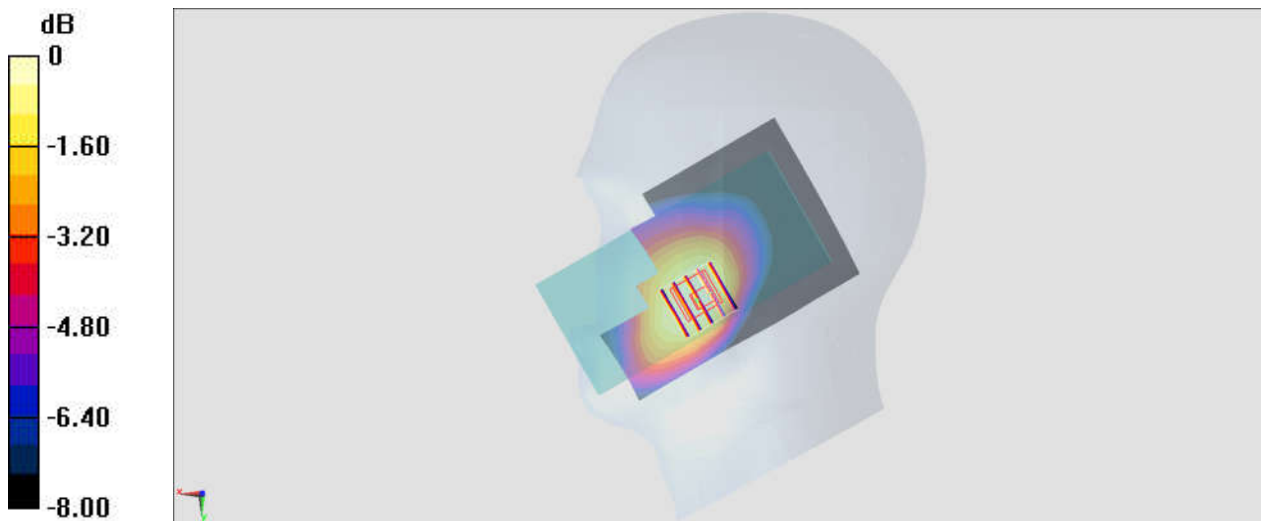

0 dB = 0.198 W/kg = -7.03 dBW/kg

#06_CDMA BC0_1xRTT RC3 SO55_Right Cheek_Ch384


Communication System: CDMA; Frequency: 836.52 MHz; Duty Cycle: 1:1
 Medium: HSL_850_181021 Medium parameters used: $f = 837 \text{ MHz}$; $\sigma = 0.882 \text{ S/m}$; $\epsilon_r = 41.65$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.39, 6.39, 6.39) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.242 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 16.27 V/m ; Power Drift = -0.03 dB
 Peak SAR (extrapolated) = 0.274 W/kg
SAR(1 g) = 0.216 W/kg ; SAR(10 g) = 0.167 W/kg
 Maximum value of SAR (measured) = 0.236 W/kg

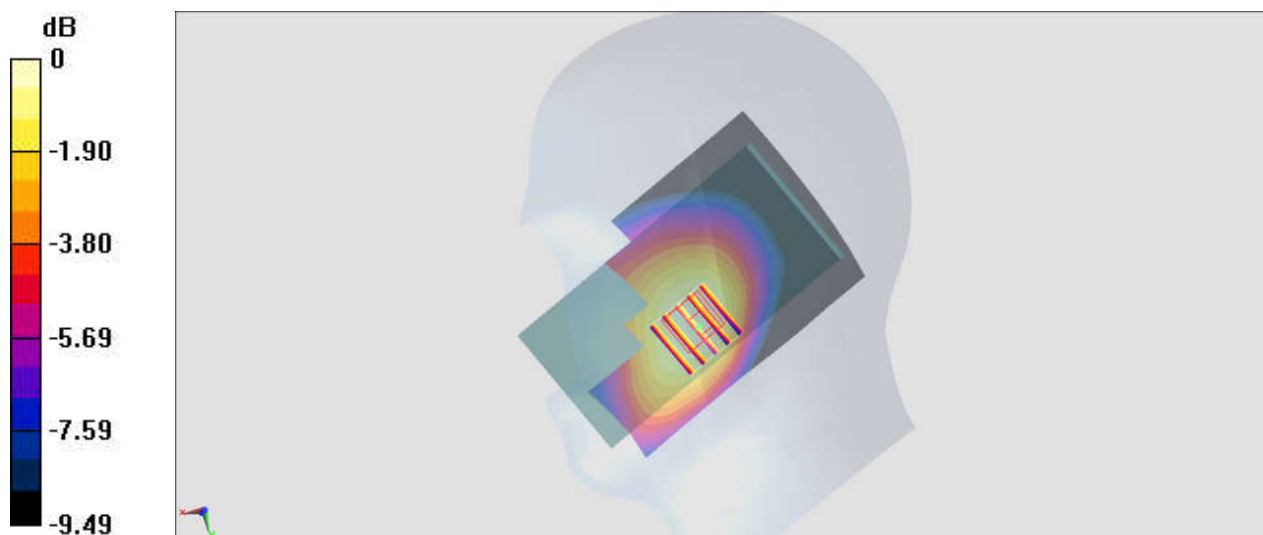

$0 \text{ dB} = 0.236 \text{ W/kg} = -6.27 \text{ dBW/kg}$

#07_CDMA BC1_1xRTT RC3 SO55_Right Cheek_Ch25


Communication System: CDMA ; Frequency: 1851.25 MHz;Duty Cycle: 1:1
Medium: HSL_1900_181108 Medium parameters used: $f = 1851.25$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 41.491$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.27, 5.27, 5.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0524 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.172 V/m; Power Drift = 0.15 dB
Peak SAR (extrapolated) = 0.0690 W/kg
SAR(1 g) = 0.044 W/kg; SAR(10 g) = 0.026 W/kg
Maximum value of SAR (measured) = 0.0524 W/kg

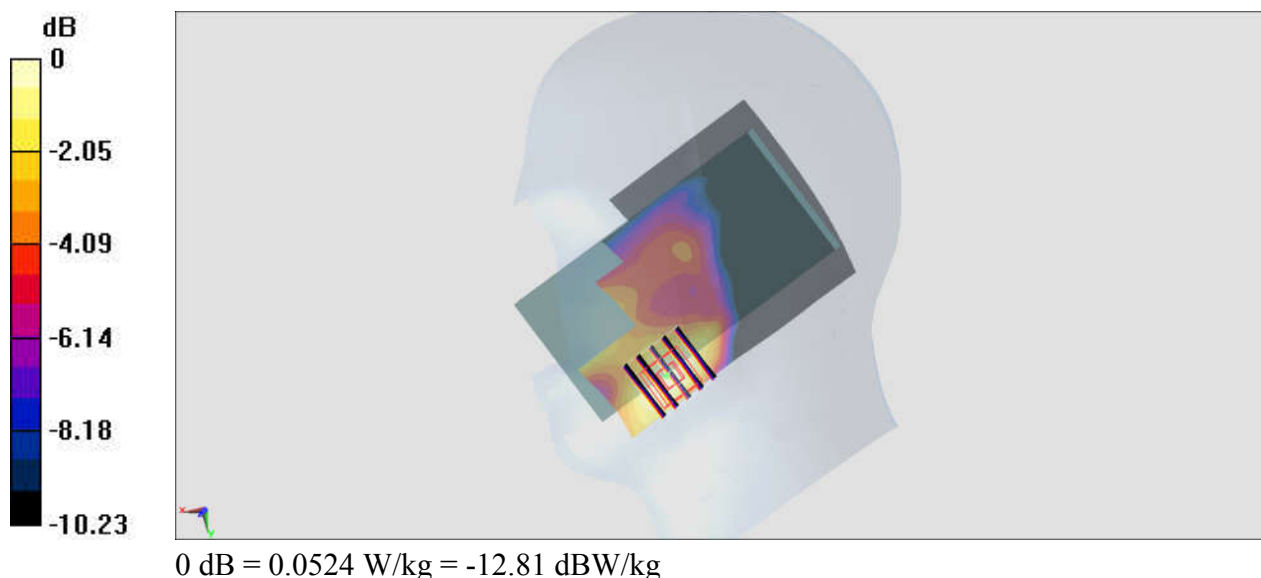

#08_CDMA BC10_1xRTT RC3 SO55_Right Cheek_Ch580


Communication System: CDMA; Frequency: 820.5 MHz; Duty Cycle: 1:1
 Medium: HSL_850_181021 Medium parameters used : $f = 820.5 \text{ MHz}$; $\sigma = 0.864 \text{ S/m}$; $\epsilon_r = 41.829$;
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.39, 6.39, 6.39) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.216 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 15.83 V/m ; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.244 W/kg
SAR(1 g) = 0.194 W/kg ; SAR(10 g) = 0.150 W/kg
 Maximum value of SAR (measured) = 0.210 W/kg

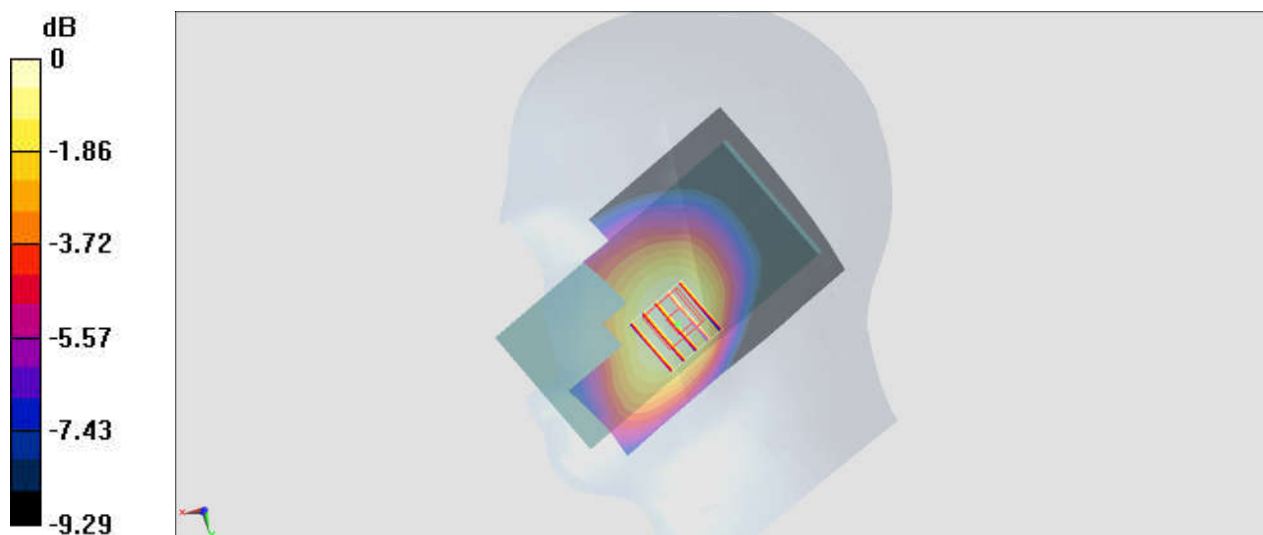

$0 \text{ dB} = 0.210 \text{ W/kg} = -6.78 \text{ dBW/kg}$

#09_LTE Band 7_20M_QPSK_1_0_Left Cheek_Ch20850


Communication System: LTE; Frequency: 2510 MHz; Duty Cycle: 1:1
 Medium: HSL_2600_181109 Medium parameters used: $f = 2510 \text{ MHz}$; $\sigma = 1.819 \text{ S/m}$; $\epsilon_r = 38.253$;
 $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.5, 4.5, 4.5) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (81x151x1): Interpolated grid: $dx=1.200 \text{ mm}$, $dy=1.200 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.0711 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
 Reference Value = 4.691 V/m ; Power Drift = 0.09 dB
 Peak SAR (extrapolated) = 0.0940 W/kg
SAR(1 g) = 0.053 W/kg ; SAR(10 g) = 0.028 W/kg
 Maximum value of SAR (measured) = 0.0666 W/kg

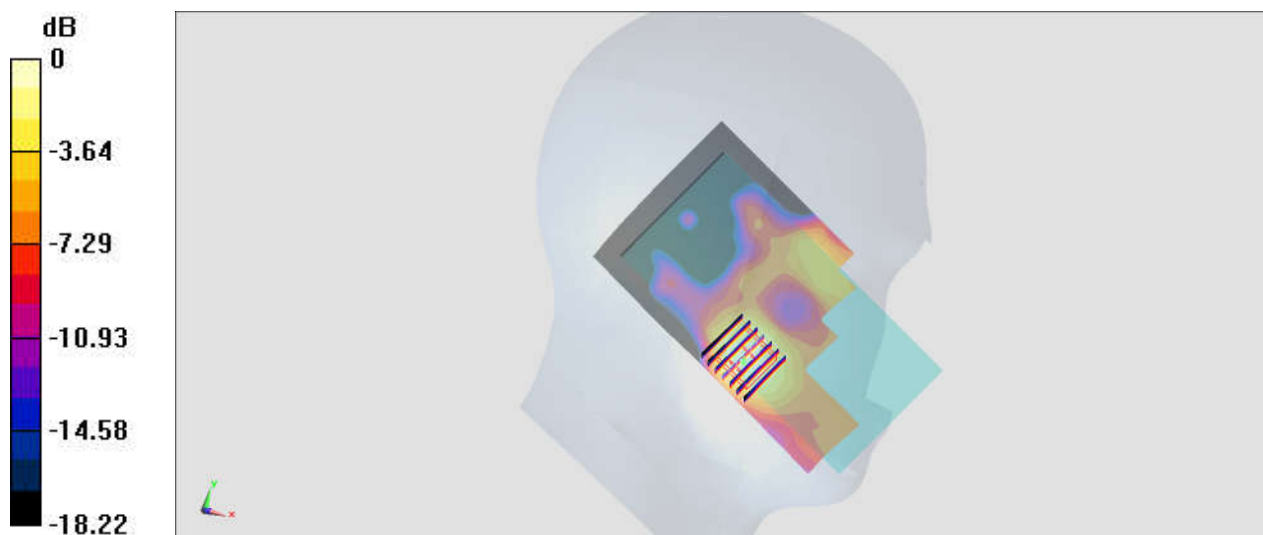

0 dB = $0.0666 \text{ W/kg} = -11.77 \text{ dBW/kg}$

#10_LTE Band 12_10M_QPSK_1_25_Right Cheek_Ch23095

Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL_750_181021 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.855$ S/m; $\epsilon_r = 43.421$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.56, 6.56, 6.56) ; Calibrated: 2018/5/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn495; Calibrated: 2018/5/24

- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431

- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0860 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.16 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.0920 W/kg

SAR(1 g) = 0.079 W/kg; SAR(10 g) = 0.064 W/kg

Maximum value of SAR (measured) = 0.0844 W/kg

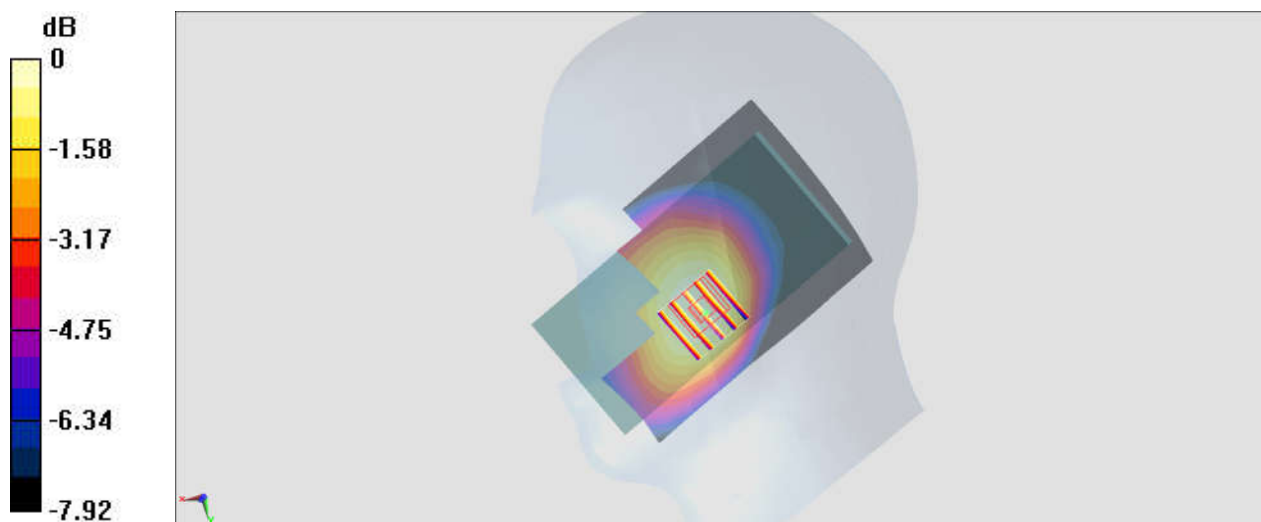

0 dB = 0.0844 W/kg = -10.74 dBW/kg

#11_LTE Band 13_10M_QPSK_1_25_Right Cheek_Ch23230

Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: HSL_750_181021 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.923 \text{ S/m}$; $\epsilon_r = 42.436$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.3 \text{ }^\circ\text{C}$; Liquid Temperature : $22.3 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.56, 6.56, 6.56) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.135 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 12.14 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.150 W/kg

SAR(1 g) = 0.123 W/kg ; SAR(10 g) = 0.098 W/kg

Maximum value of SAR (measured) = 0.133 W/kg

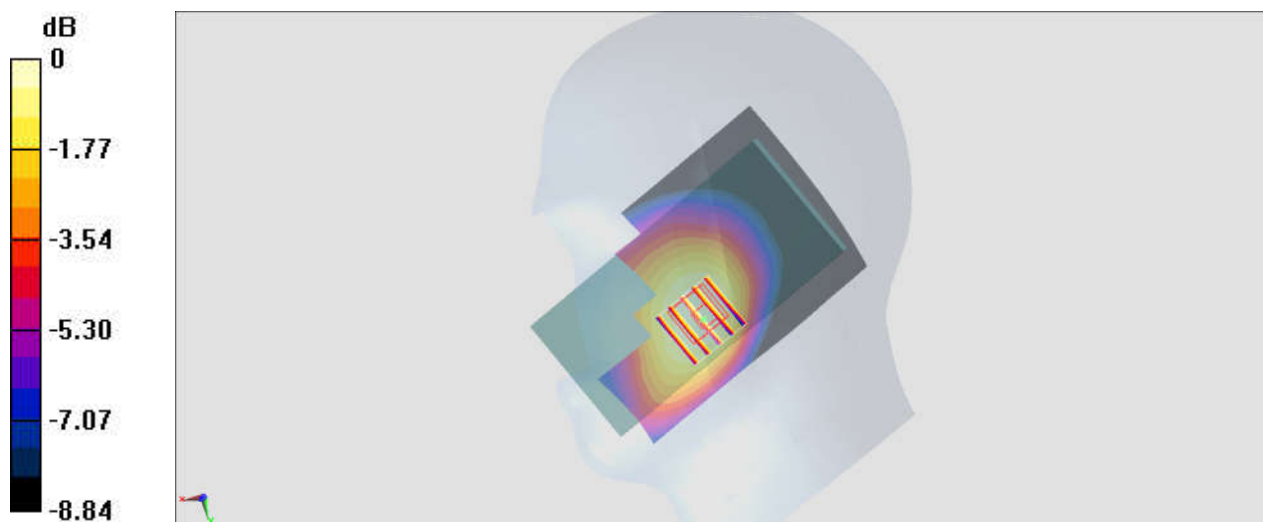

0 dB = 0.133 W/kg = -8.76 dBW/kg

#12_LTE Band 25_20M_QPSK_1_0_Right Cheek_Ch26340


Communication System: LTE; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: HSL_1900_181108 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.423$ S/m; $\epsilon_r = 41.38$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.27, 5.27, 5.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.0571 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 6.305 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 0.0770 W/kg
SAR(1 g) = 0.049 W/kg; SAR(10 g) = 0.029 W/kg
Maximum value of SAR (measured) = 0.0586 W/kg

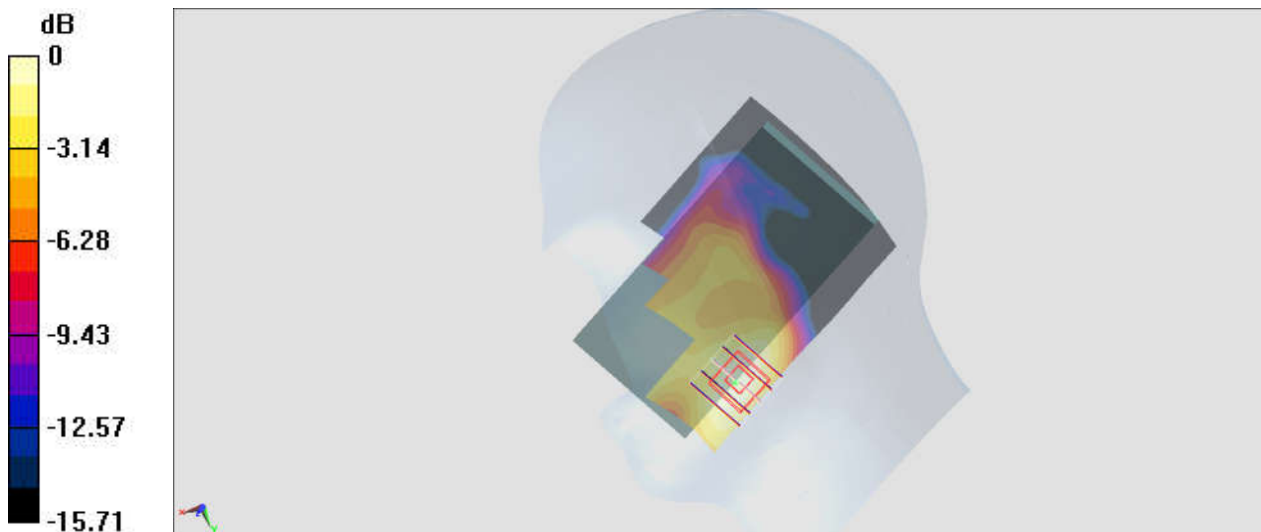

0 dB = 0.0586 W/kg = -12.32 dBW/kg

#13_LTE Band 26_15M_QPSK_1_0_Right Cheek_Ch26865


Communication System: LTE; Frequency: 831.5 MHz; Duty Cycle: 1:1
 Medium: HSL_850_181021 Medium parameters used : $f = 831.5$ MHz; $\sigma = 0.876$ S/m; $\epsilon_r = 41.768$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.39, 6.39, 6.39) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
 Maximum value of SAR (interpolated) = 0.181 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 14.28 V/m; Power Drift = 0.08 dB
 Peak SAR (extrapolated) = 0.206 W/kg
SAR(1 g) = 0.163 W/kg; SAR(10 g) = 0.126 W/kg
 Maximum value of SAR (measured) = 0.179 W/kg

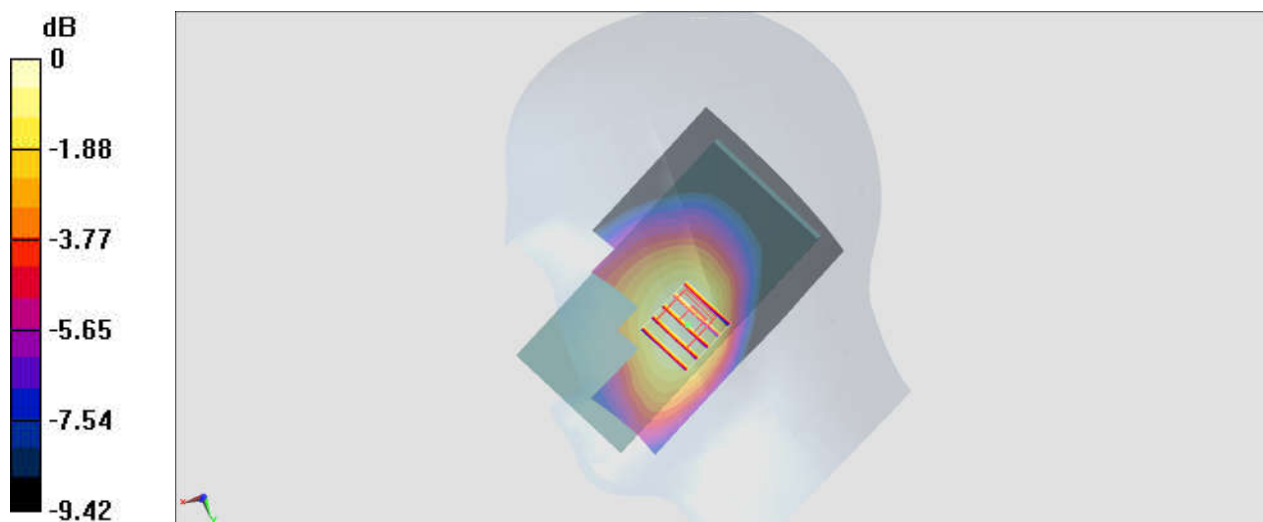

0 dB = 0.179 W/kg = -7.47 dBW/kg

#14_LTE Band 30_10M_QPSK_1_0_Right Cheek_Ch27710

Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL_2300_181021 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.683$ S/m; $\epsilon_r = 39.926$;
 $\rho = 1000$ kg/m³

Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.91, 4.91, 4.91) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (91x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.0819 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.880 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.114 W/kg

SAR(1 g) = 0.065 W/kg; SAR(10 g) = 0.036 W/kg

Maximum value of SAR (measured) = 0.0822 W/kg

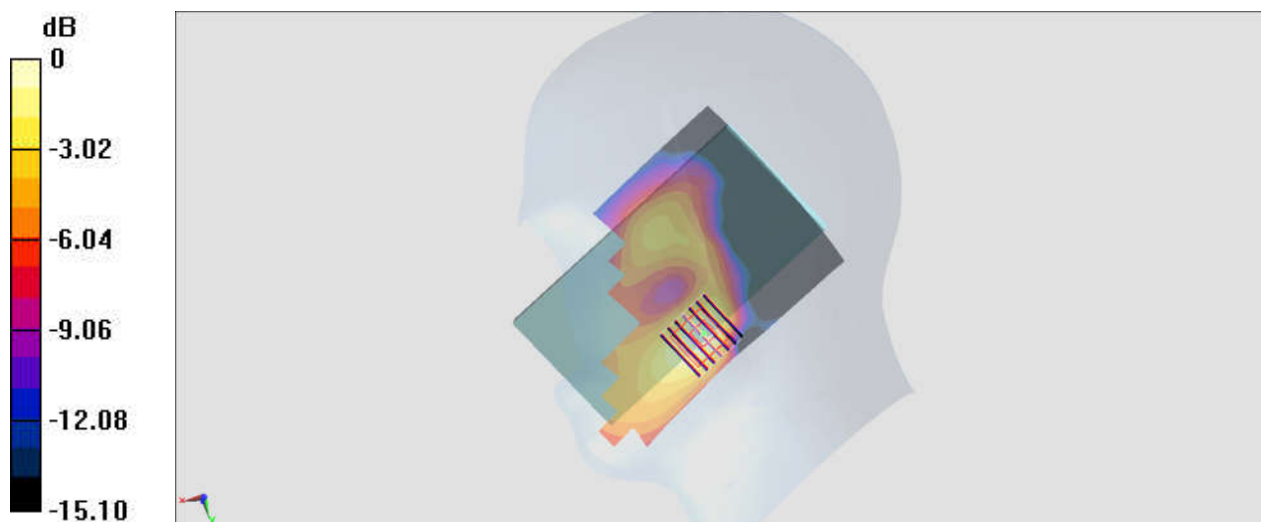

0 dB = 0.0822 W/kg = -10.85 dBW/kg

#15_LTE Band 66_20M_QPSK_1_0_Right Cheek_Ch132072

Communication System: LTE; Frequency: 1720 MHz; Duty Cycle: 1:1

Medium: HSL_1750_181108 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.339$ S/m; $\epsilon_r = 41.006$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.48, 5.48, 5.48) ; Calibrated: 2018/5/28

- Sensor-Surface: 3mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn495; Calibrated: 2018/5/24

- Phantom: SAM-Right; Type: SAM; Serial: TP-1503

- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x121x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0892 W/kg


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.398 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.111 W/kg

SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.047 W/kg

Maximum value of SAR (measured) = 0.0854 W/kg

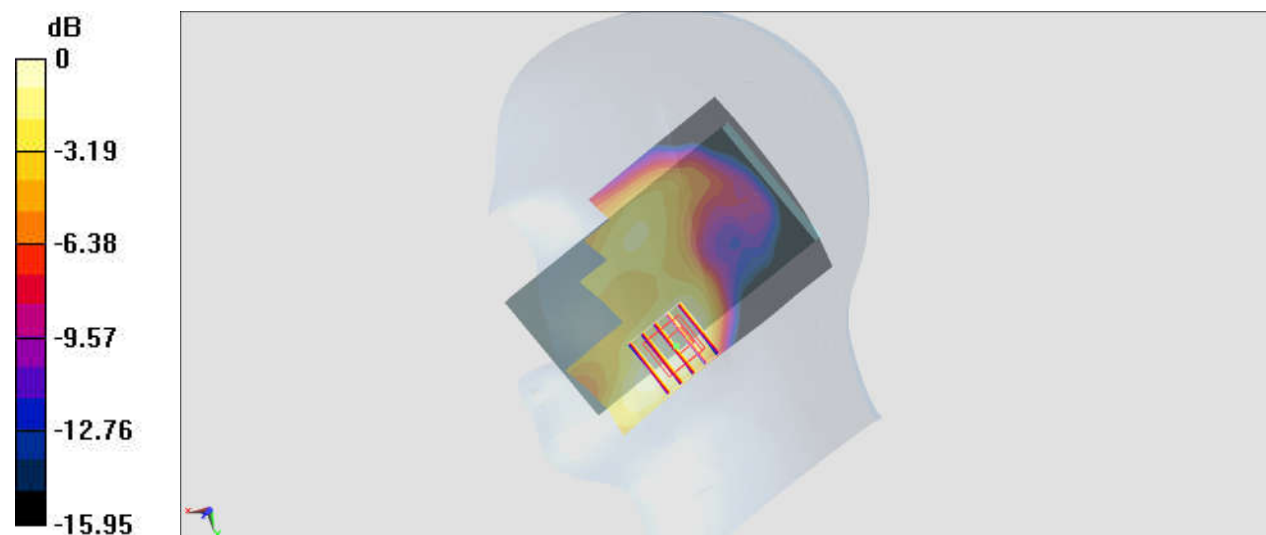

0 dB = 0.0854 W/kg = -10.69 dBW/kg

#16_LTE Band 41_20M_QPSK_1_0_Left Cheek_Ch40620


Communication System: LTE; Frequency: 2593 MHz; Duty Cycle: 1:1.59
 Medium: HSL_2600_181023 Medium parameters used : $f = 2593$ MHz; $\sigma = 1.944$ S/m; $\epsilon_r = 38.901$;
 $\rho = 1000$ kg/m³
 Ambient Temperature : 23.5 °C; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.5, 4.5, 4.5) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (91x141x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
 Maximum value of SAR (interpolated) = 0.143 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
 Reference Value = 7.540 V/m; Power Drift = 0.15 dB
 Peak SAR (extrapolated) = 0.197 W/kg
SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.058 W/kg
 Maximum value of SAR (measured) = 0.139 W/kg

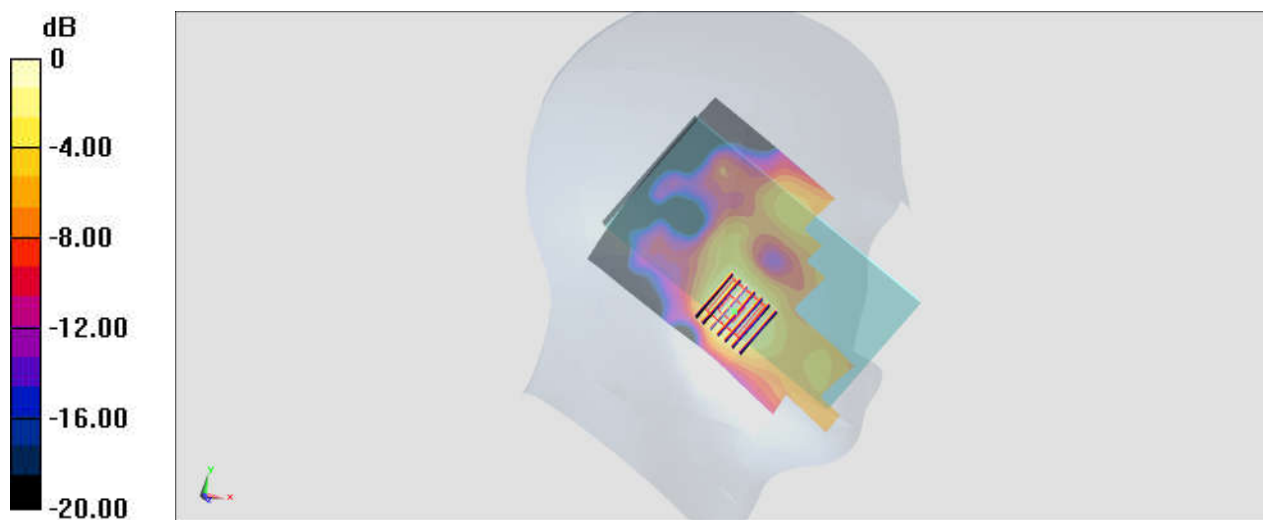

0 dB = 0.139 W/kg = -8.57 dBW/kg

#17_WLAN2.4GHz_802.11b 1Mbps_Left Cheek_Ch11;Chain 0

Communication System: 802.11b ; Frequency: 2462 MHz;Duty Cycle: 1:1.011

Medium: HSL_2450_181106 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.817$ S/m; $\epsilon_r = 39.7$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3931;ConvF(7.54, 7.54, 7.54) ;Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2018/6/21
- Phantom: SAM_Left; Type: QD000P40CD; Serial: S/N:1801
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (91x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.706 W/kg



Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 9.873 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.05 W/kg

SAR(1 g) = 0.427 W/kg; SAR(10 g) = 0.190 W/kg

Maximum value of SAR (measured) = 0.766 W/kg

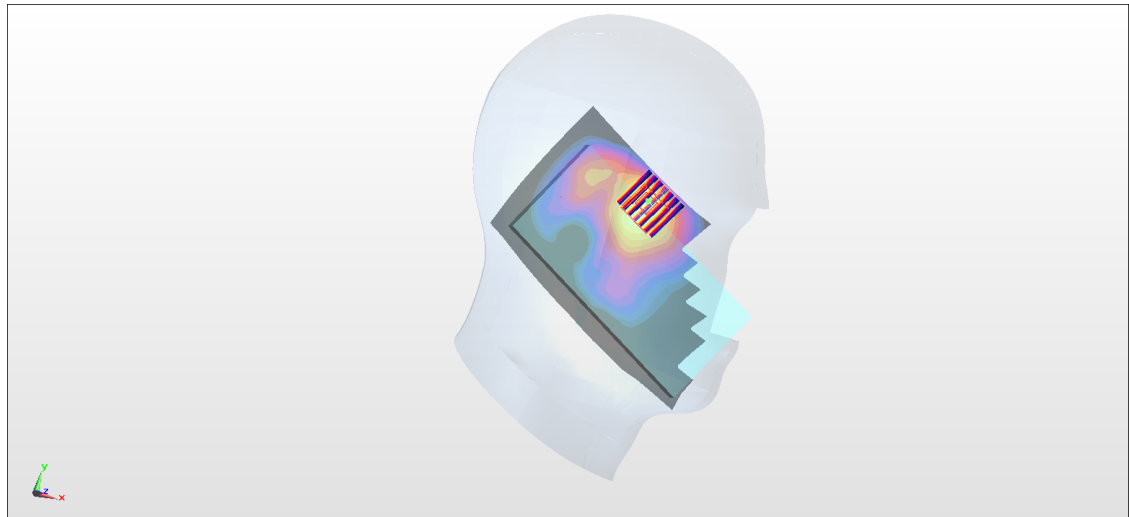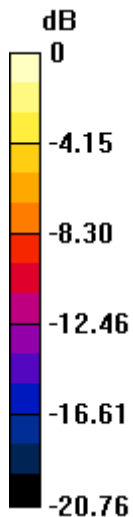

0 dB = 0.766 W/kg = -1.16 dBW/kg

#18_WLAN5GHz_802.11a 6Mbps_Left Cheek_Ch64;Chain 0

Communication System: 802.11a ; Frequency: 5320 MHz;Duty Cycle: 1:1.022

Medium: HSL_5G_181113 Medium parameters used: $f = 5320$ MHz; $\sigma = 4.635$ S/m; $\epsilon_r = 35.919$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(5.56, 5.56, 5.56) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.03 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.12 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.390 W/kg; SAR(10 g) = 0.113 W/kg

Maximum value of SAR (measured) = 0.959 W/kg

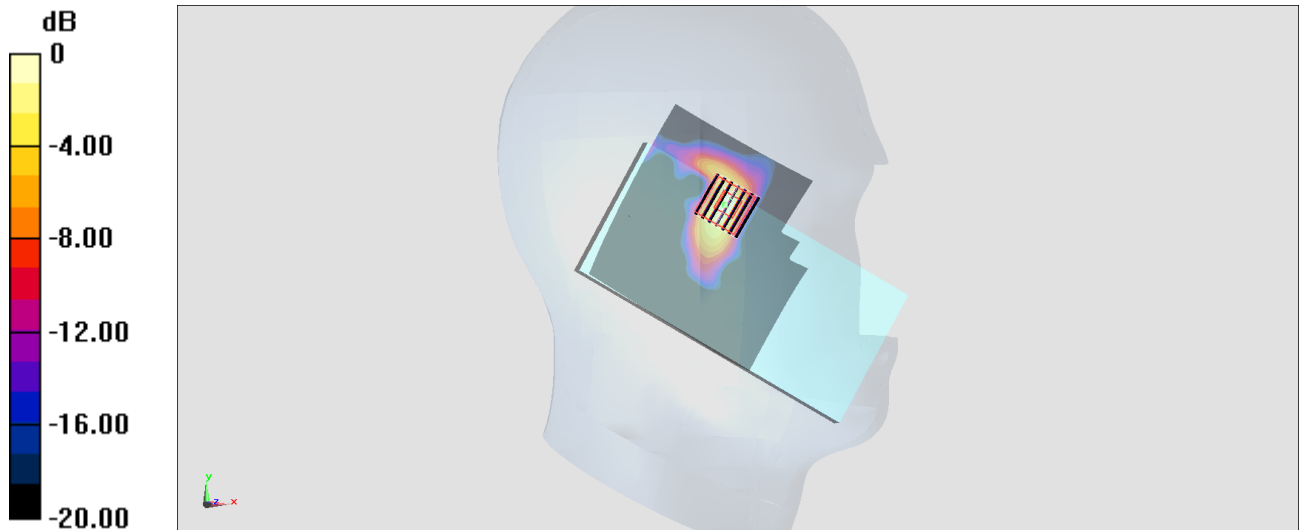

0 dB = 0.959 W/kg = -0.18 dBW/kg

#19_WLAN5GHz_802.11a 6Mbps_Left Cheek_Ch132;Chain 0

Communication System: 802.11a ; Frequency: 5660 MHz;Duty Cycle: 1:1.022

Medium: HSL_5G_181113 Medium parameters used: $f = 5660$ MHz; $\sigma = 4.973$ S/m; $\epsilon_r = 35.444$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.97, 4.97, 4.97) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.08 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.14 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.72 W/kg

SAR(1 g) = 0.400 W/kg; SAR(10 g) = 0.117 W/kg

Maximum value of SAR (measured) = 0.980 W/kg

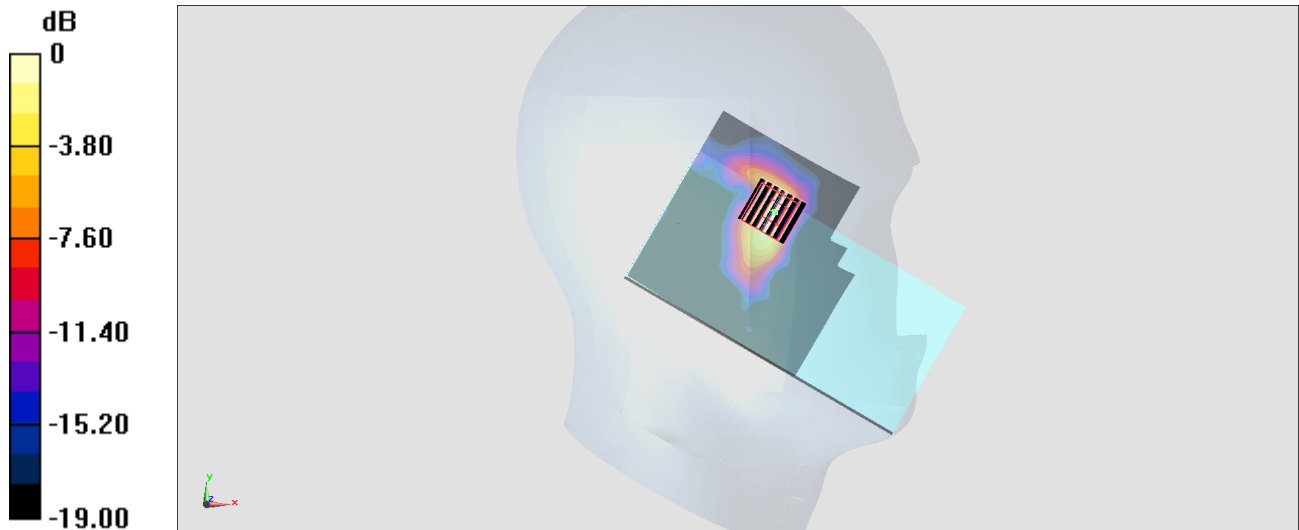

0 dB = 0.980 W/kg = -0.09 dBW/kg

#20_WLAN5GHz_802.11a 6Mbps_Left Cheek_Ch149;Chain 0

Communication System: 802.11a ; Frequency: 5745 MHz;Duty Cycle: 1:1.022

Medium: HSL_5G_181113 Medium parameters used : $f = 5745$ MHz; $\sigma = 5.062$ S/m; $\epsilon_r = 35.35$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(5.04, 5.04, 5.04) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1477
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Area Scan (101x101x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.905 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.265 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.099 W/kg

Maximum value of SAR (measured) = 0.849 W/kg

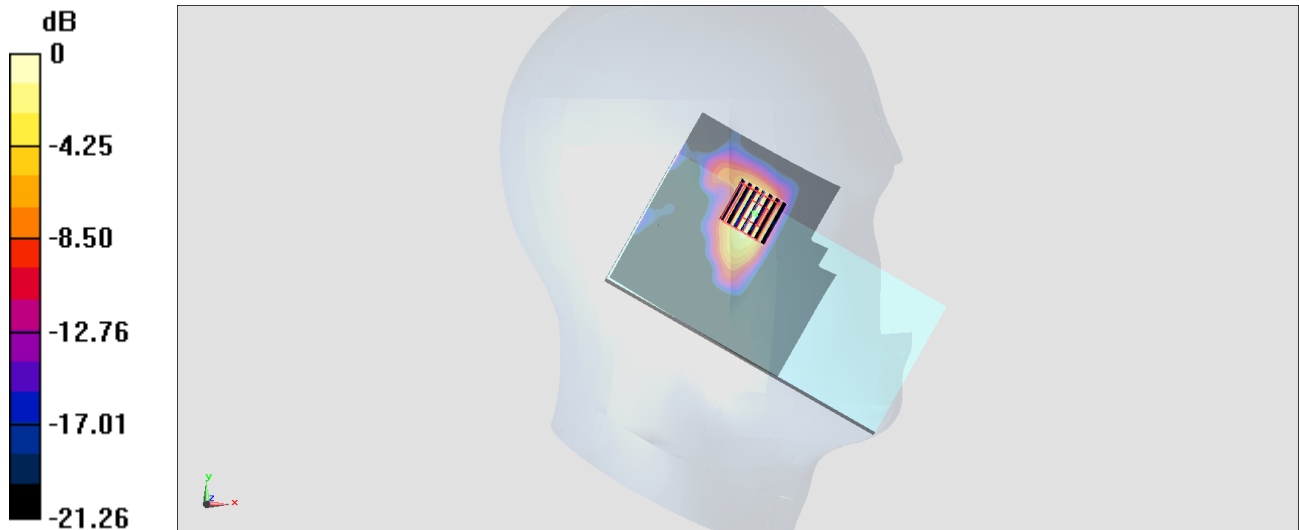

0 dB = 0.849 W/kg = -0.71 dBW/kg

#21_Bluetooth_1Mbps_Left Cheek_Ch78;Chain 0

Communication System: Bluetooth ; Frequency: 2480 MHz;Duty Cycle: 1:1.297

Medium: HSL_2450_181106 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.84$ S/m; $\epsilon_r = 39.695$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration

- Probe: EX3DV4 - SN3931;ConvF(7.54, 7.54, 7.54) ;Calibrated: 2018/9/27
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn910; Calibrated: 2018/6/21
- Phantom: SAM_Left; Type: QD000P40CD; Serial: S/N:1801
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (81x151x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.109 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.403 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.129 W/kg

SAR(1 g) = 0.046 W/kg; SAR(10 g) = 0.018 W/kg

Maximum value of SAR (measured) = 0.0939 W/kg

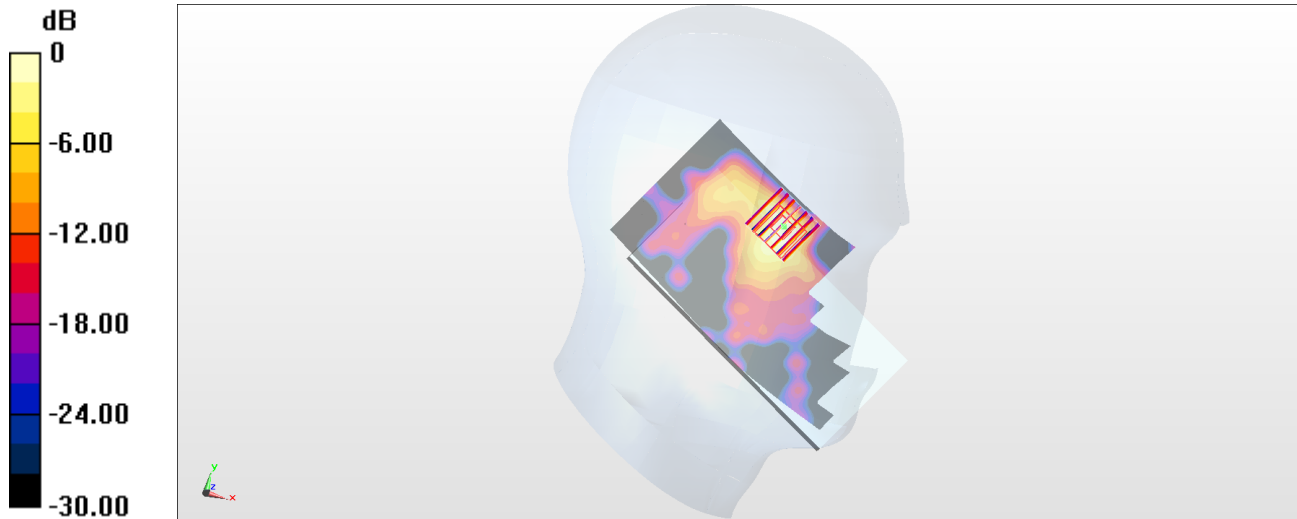

0 dB = 0.0939 W/kg = -10.27 dBW/kg

#22_GSM850_GPRS (3 Tx slots)_Front_10mm_Ch251


Communication System: GSM850 ; Frequency: 848.8 MHz;Duty Cycle: 1:2.77
Medium: MSL_850_181108 Medium parameters used: $f = 849$ MHz; $\sigma = 1.018$ S/m; $\epsilon_r = 56.029$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.228 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.22 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 0.300 W/kg
SAR(1 g) = 0.183 W/kg; SAR(10 g) = 0.109 W/kg
Maximum value of SAR (measured) = 0.219 W/kg

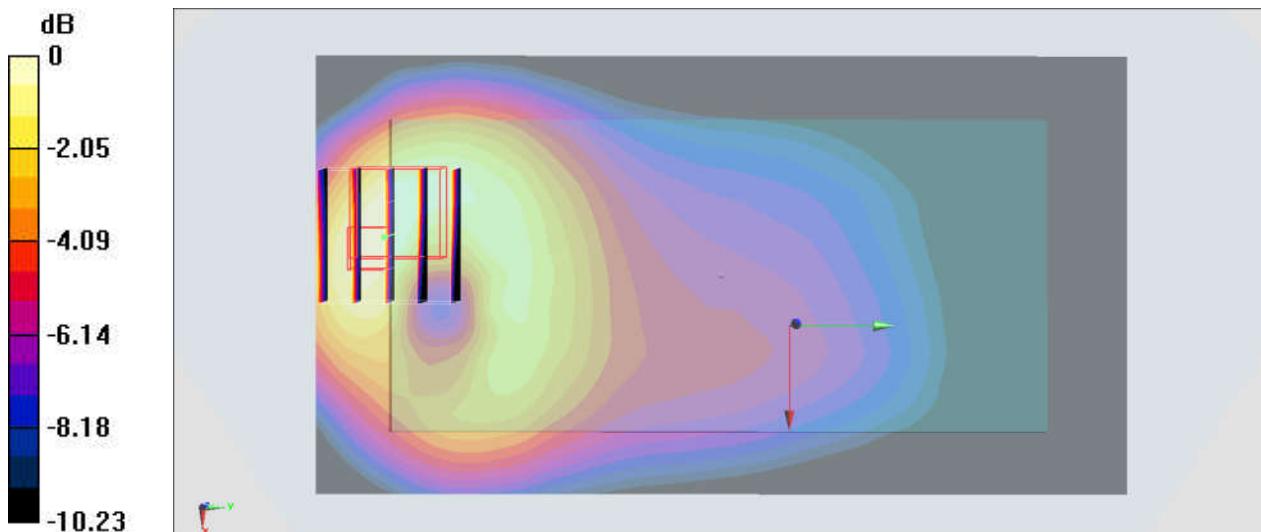

0 dB = 0.219 W/kg = -6.60 dBW/kg

#23_GSM1900_GPRS (4 Tx slots)_Bottom Side_10mm_Ch512


Communication System: PCS; Frequency: 1850.2 MHz; Duty Cycle: 1:2.08
Medium: MSL_1900_181107 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.489$ S/m; $\epsilon_r = 54.222$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.05 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 10.89 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 1.46 W/kg
SAR(1 g) = 0.869 W/kg; SAR(10 g) = 0.467 W/kg
Maximum value of SAR (measured) = 1.08 W/kg

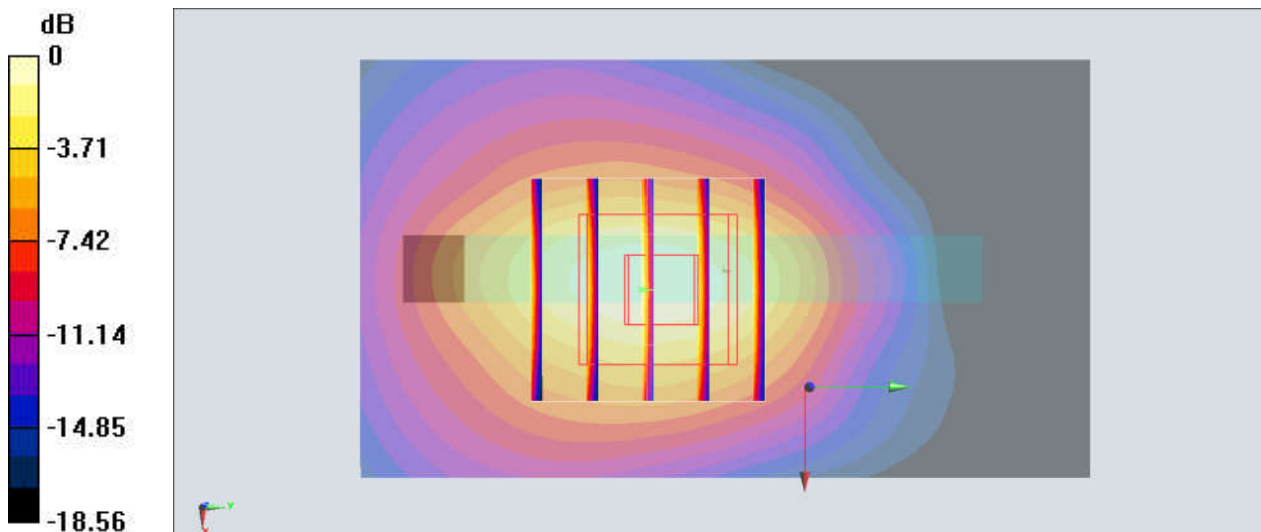

0 dB = 1.08 W/kg = 0.33 dBW/kg

#24_WCDMA II_RMC 12.2Kbps_Bottom Side_10mm_Ch9262


Communication System: WCDMA ; Frequency: 1852.4 MHz;Duty Cycle: 1:1
Medium: MSL_1900_181107 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.492$ S/m; $\epsilon_r = 54.215$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.865 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 23.84 V/m; Power Drift = -0.19 dB
Peak SAR (extrapolated) = 1.13 W/kg
SAR(1 g) = 0.699 W/kg; SAR(10 g) = 0.382 W/kg
Maximum value of SAR (measured) = 0.849 W/kg

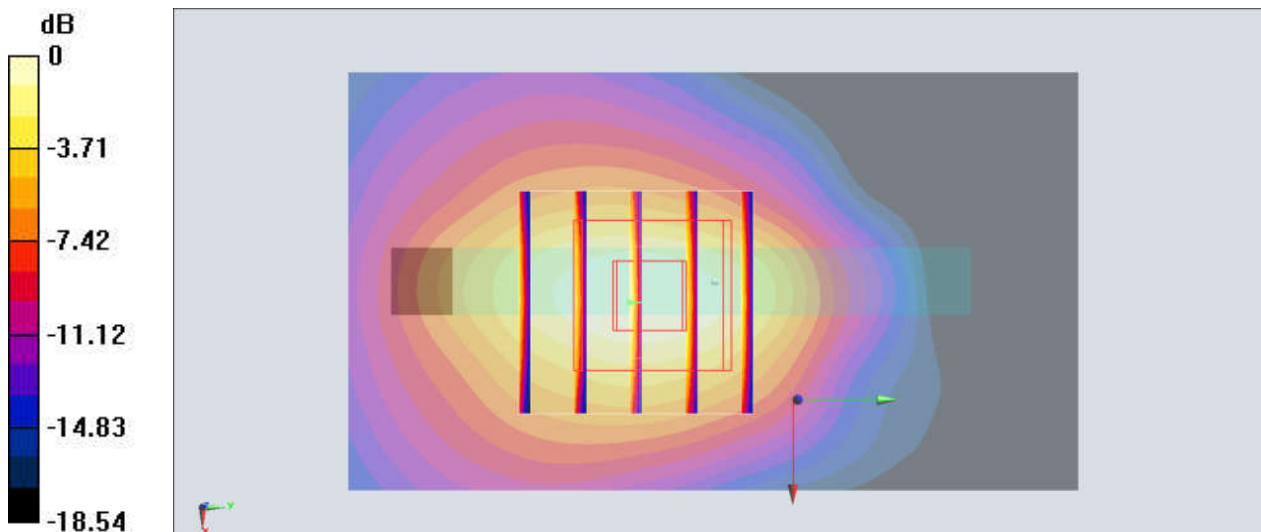

0 dB = 0.849 W/kg = -0.71 dBW/kg

#25_WCDMA IV_RMC 12.2Kbps_Bottom Side_10mm_Ch1413


Communication System: WCDMA ; Frequency: 1732.6 MHz;Duty Cycle: 1:1
Medium: MSL_1750_181106 Medium parameters used: $f = 1733 \text{ MHz}$; $\sigma = 1.477 \text{ S/m}$; $\epsilon_r = 52.793$;
 $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.06, 5.06, 5.06) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Area Scan (41x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 1.33 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 30.10 V/m ; Power Drift = -0.17 dB
Peak SAR (extrapolated) = 1.79 W/kg
SAR(1 g) = 1.08 W/kg ; SAR(10 g) = 0.587 W/kg
Maximum value of SAR (measured) = 1.34 W/kg

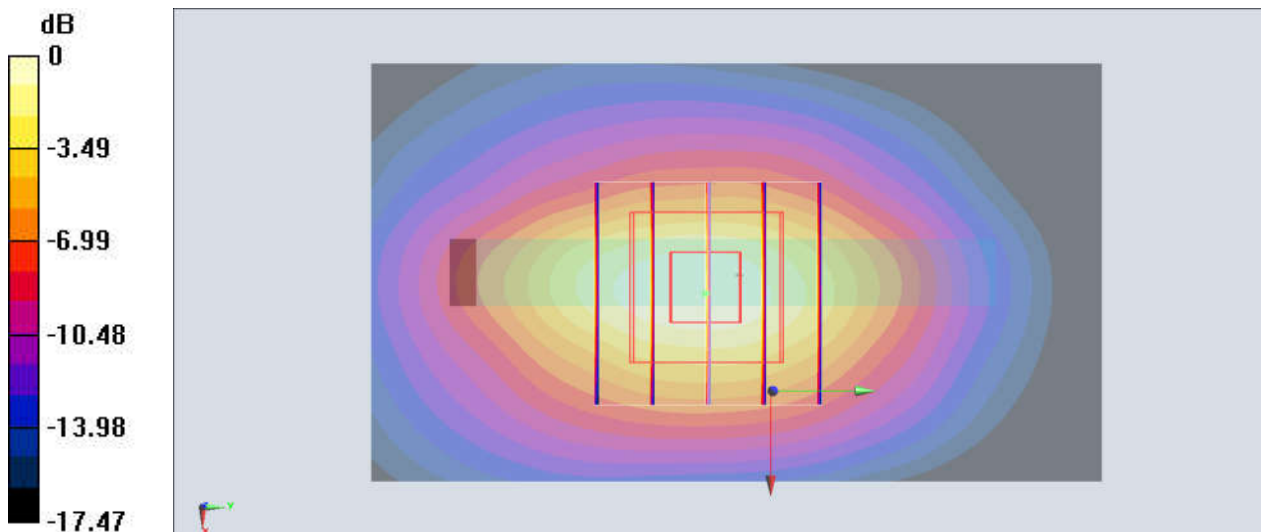

0 dB = $1.34 \text{ W/kg} = 1.27 \text{ dBW/kg}$

#26_WCDMA V_RMC 12.2Kbps_Front_10mm_Ch4182


Communication System: WCDMA ; Frequency: 836.4 MHz;Duty Cycle: 1:1
Medium: MSL_850_181019 Medium parameters used: $f = 836.4$ MHz; $\sigma = 1.006$ S/m; $\epsilon_r = 55.339$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.500 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.85 V/m; Power Drift = -0.00 dB
Peak SAR (extrapolated) = 0.669 W/kg
SAR(1 g) = 0.410 W/kg; SAR(10 g) = 0.252 W/kg
Maximum value of SAR (measured) = 0.488 W/kg

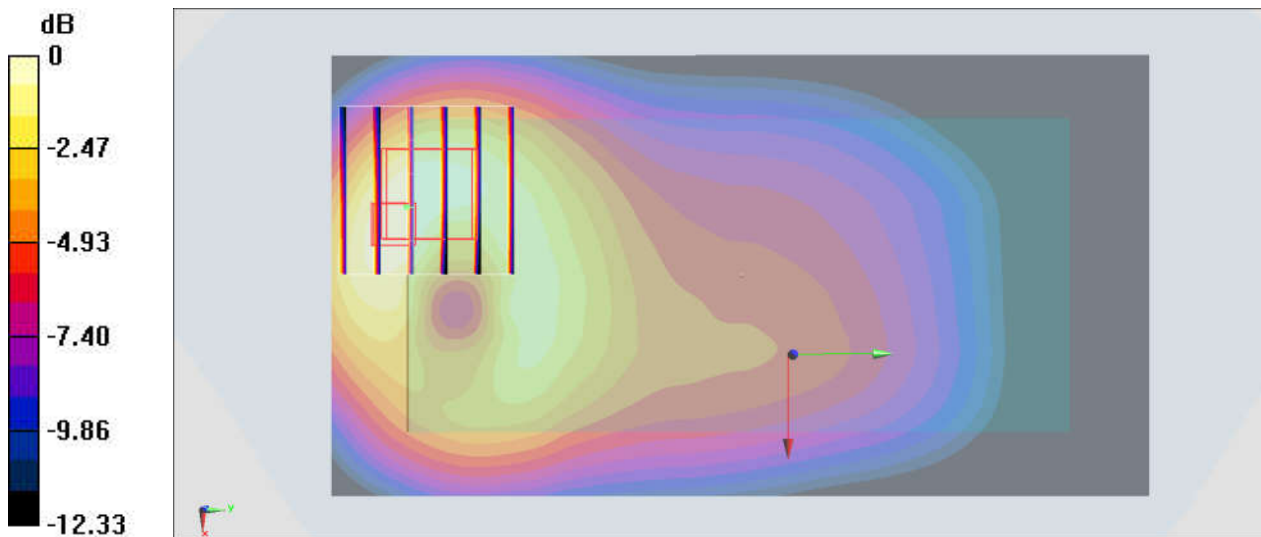

0 dB = 0.488 W/kg = -3.12 dBW/kg

#27_CDMA BC0_RTAP 153.6Kbps_Back_10mm_Ch777


Communication System: CDMA; Frequency: 848.31 MHz; Duty Cycle: 1:1
Medium: MSL_850_181019 Medium parameters used : $f = 848.31$ MHz; $\sigma = 0.983$ S/m; $\epsilon_r = 55.259$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.664 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.56 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.857 W/kg
SAR(1 g) = 0.535 W/kg; SAR(10 g) = 0.331 W/kg
Maximum value of SAR (measured) = 0.648 W/kg

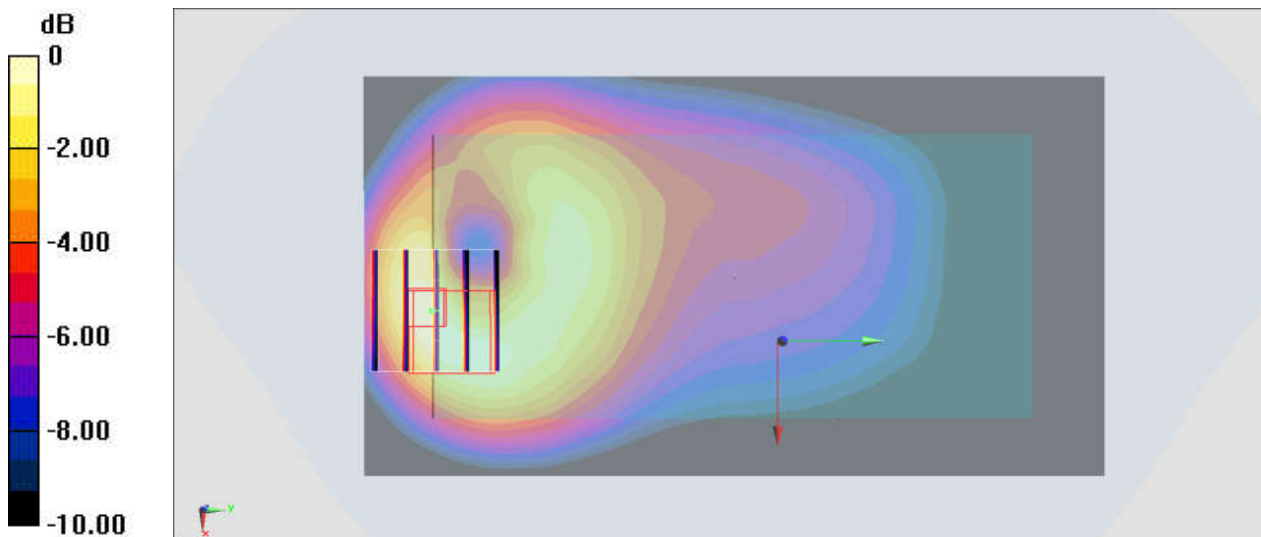

#28_CDMA BC1_RTAP 153.6Kbps_Bottom Side_10mm_Ch25


Communication System: CDMA; Frequency: 1851.25 MHz; Duty Cycle: 1:1
Medium: MSL_1900_181107 Medium parameters used : $f = 1851.25$ MHz; $\sigma = 1.49$ S/m; $\epsilon_r = 54.219$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.883 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.40 V/m; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 1.07 W/kg
SAR(1 g) = 0.664 W/kg; SAR(10 g) = 0.362 W/kg
Maximum value of SAR (measured) = 0.816 W/kg

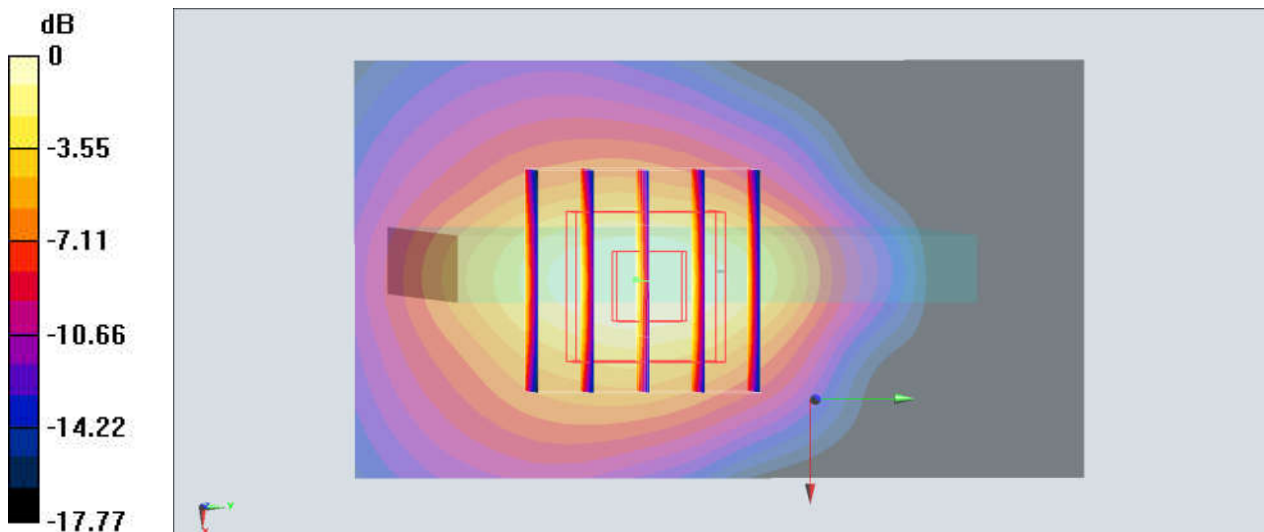

0 dB = 0.816 W/kg = -0.88 dBW/kg

#29_CDMA BC10_RTAP 153.6Kbps_Back_10mm_Ch580


Communication System: CDMA; Frequency: 820.5 MHz; Duty Cycle: 1:1
Medium: MSL_850_181019 Medium parameters used : $f = 820.5$ MHz; $\sigma = 1.002$ S/m; $\epsilon_r = 55.387$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.561 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.62 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 0.743 W/kg
SAR(1 g) = 0.462 W/kg; SAR(10 g) = 0.288 W/kg
Maximum value of SAR (measured) = 0.554 W/kg

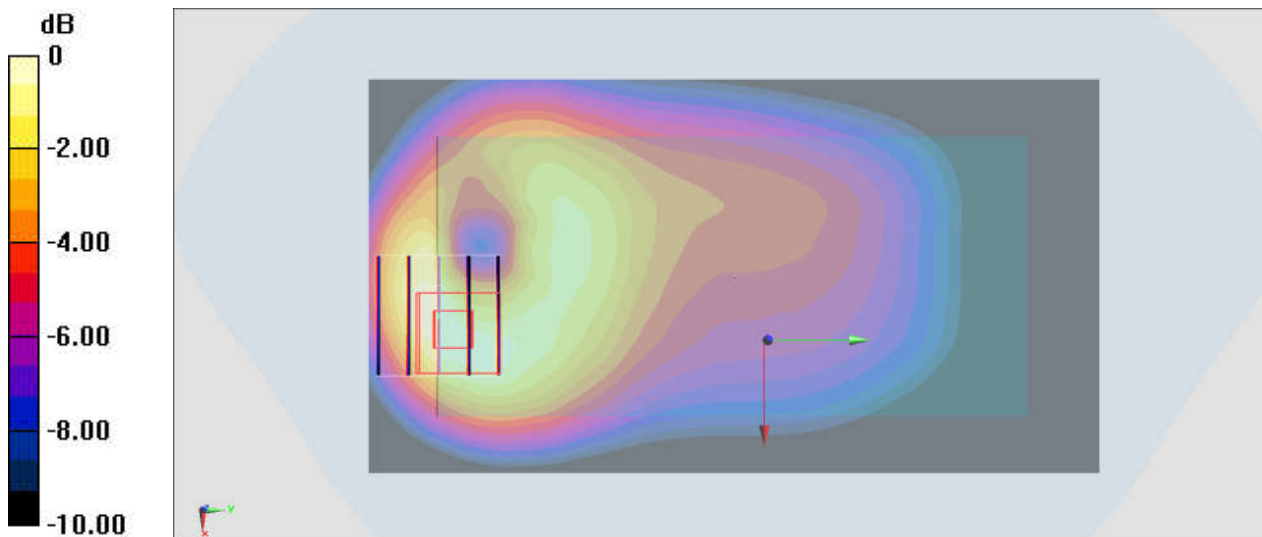

0 dB = 0.554 W/kg = -2.56 dBW/kg

#30_LTE Band 7_20M_QPSK_1_0_Bottom Side_10mm_Ch20850


Communication System: LTE ; Frequency: 2510 MHz;Duty Cycle: 1:1
Medium: MSL_2600_181106 Medium parameters used: $f = 2510$ MHz; $\sigma = 2.038$ S/m; $\epsilon_r = 51.976$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.27, 4.27, 4.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Area Scan (41x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.814 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 20.01 V/m; Power Drift = -0.07 dB
Peak SAR (extrapolated) = 1.37 W/kg
SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.303 W/kg
Maximum value of SAR (measured) = 0.814 W/kg

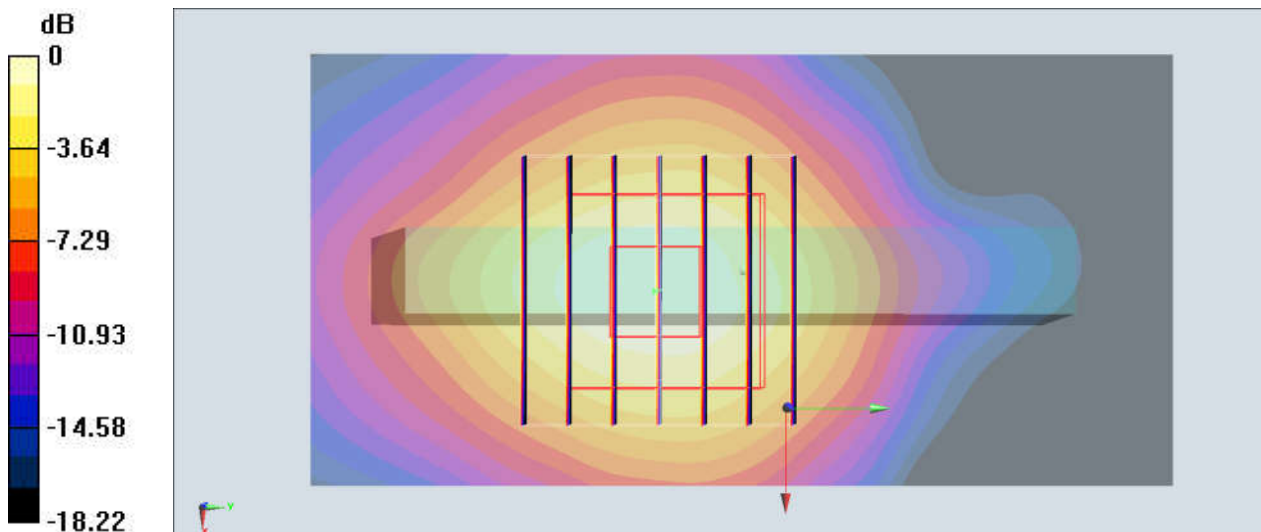

0 dB = 0.814 W/kg = -0.89 dBW/kg

#31_LTE Band 12_10M_QPSK_1_25_Back_10mm_Ch23095


Communication System: LTE; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: MSL_750_181020 Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.938$ S/m; $\epsilon_r = 54.774$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.3, 6.3, 6.3) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.237 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.45 V/m; Power Drift = -0.06 dB
Peak SAR (extrapolated) = 0.313 W/kg
SAR(1 g) = 0.207 W/kg; SAR(10 g) = 0.139 W/kg
Maximum value of SAR (measured) = 0.240 W/kg

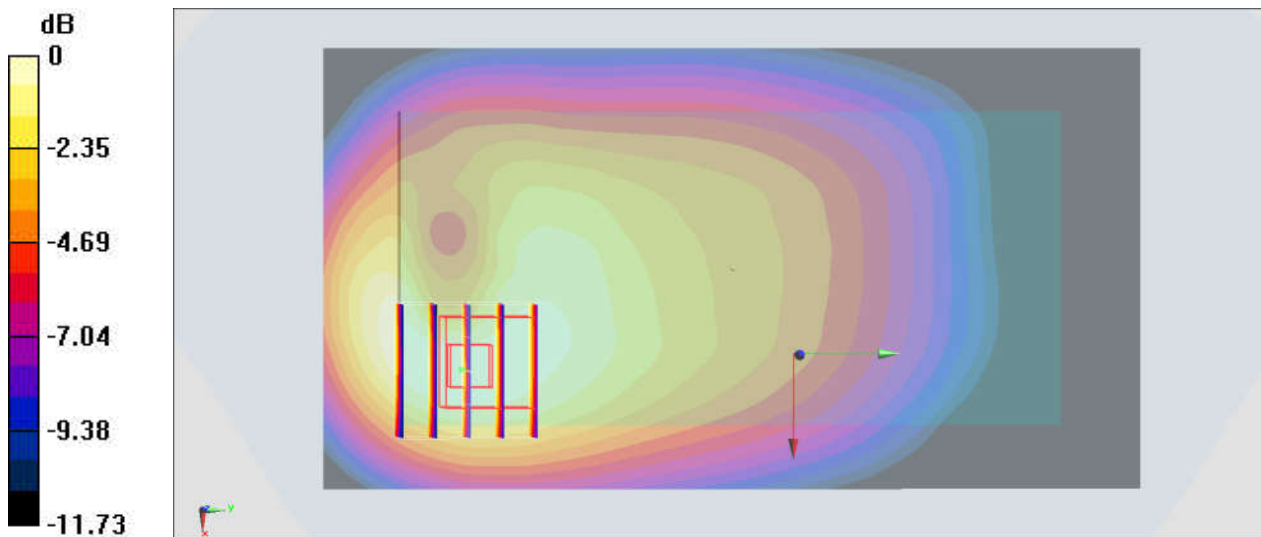

0 dB = 0.240 W/kg = -6.20 dBW/kg

#32_LTE Band 13_10M_QPSK_1_25_Front_10mm_Ch23230


Communication System: LTE; Frequency: 782 MHz; Duty Cycle: 1:1
Medium: MSL_750_181020 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 1.007 \text{ S/m}$; $\epsilon_r = 54.026$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.2 \text{ }^\circ\text{C}$; Liquid Temperature : $22.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.3, 6.3, 6.3) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (71x131x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.333 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.15 V/m ; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.458 W/kg
SAR(1 g) = 0.277 W/kg ; SAR(10 g) = 0.171 W/kg
Maximum value of SAR (measured) = 0.326 W/kg

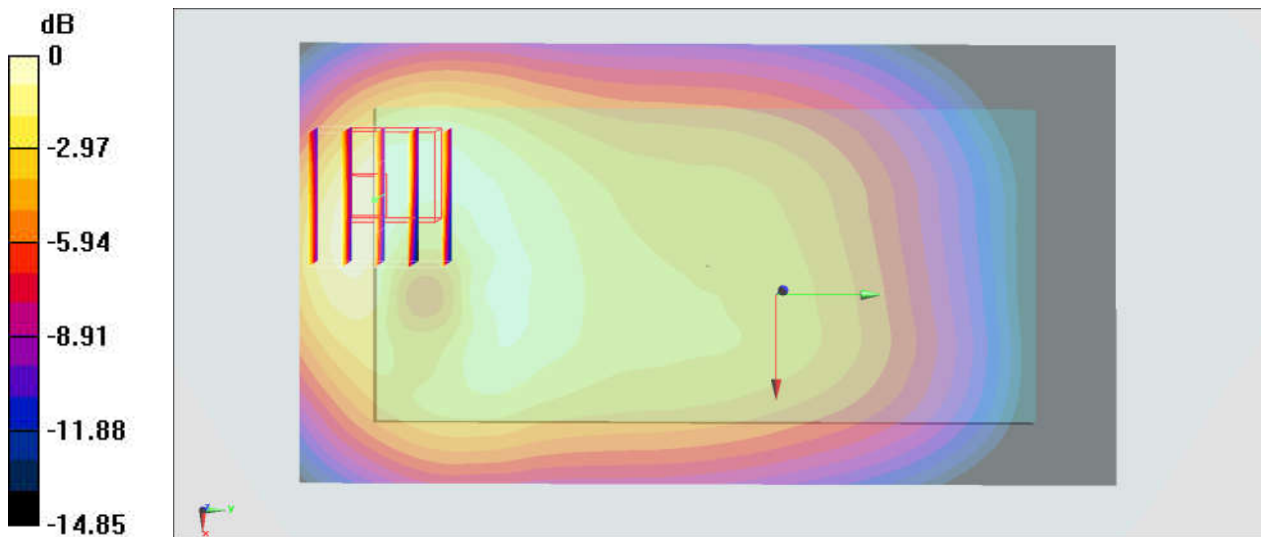

0 dB = $0.326 \text{ W/kg} = -4.87 \text{ dBW/kg}$

#33_LTE Band 25_20M_QPSK_1_0_Bottom Side_10mm_Ch26140


Communication System: LTE; Frequency: 1860 MHz; Duty Cycle: 1:1
Medium: MSL_1900_181107 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.5$ S/m; $\epsilon_r = 54.189$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.3 °C; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.8, 4.8, 4.8) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.861 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.08 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 1.12 W/kg
SAR(1 g) = 0.693 W/kg; SAR(10 g) = 0.377 W/kg
Maximum value of SAR (measured) = 0.857 W/kg

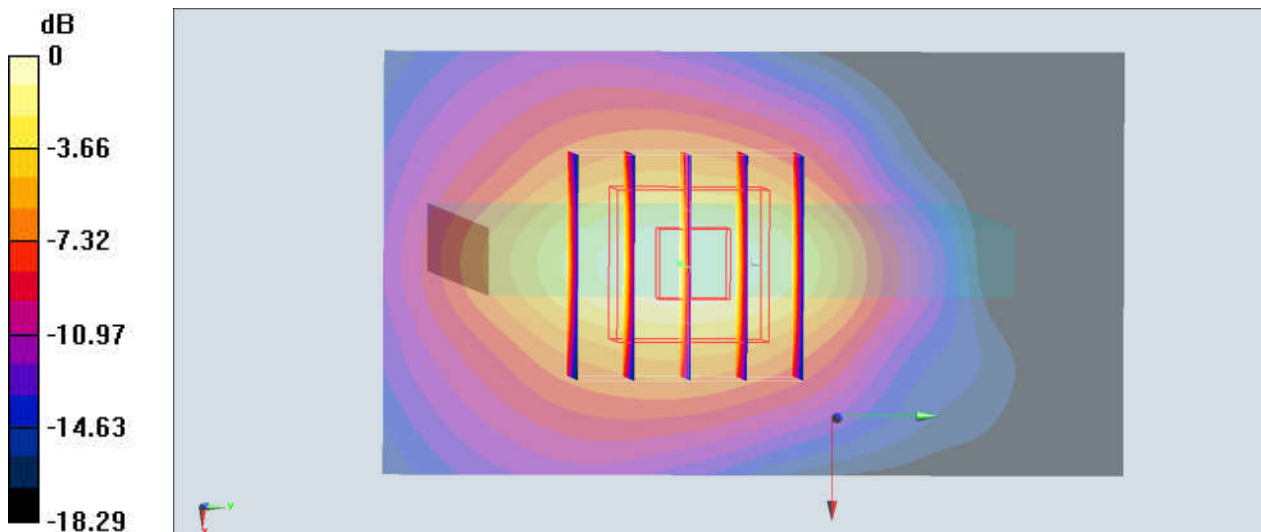

0 dB = 0.857 W/kg = -0.67 dBW/kg

#34_LTE Band 26_15M_QPSK_1_0_Back_10mm_Ch26865


Communication System: LTE ; Frequency: 831.5 MHz;Duty Cycle: 1:1
Medium: MSL_850_181019 Medium parameters used: $f = 831.5$ MHz; $\sigma = 1.004$ S/m; $\epsilon_r = 55.354$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C ; Liquid Temperature : 22.5 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(6.19, 6.19, 6.19) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM-Right; Type: SAM; Serial: TP-1503
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.403 W/kg

Zoom Scan (6x6x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.26 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 0.555 W/kg
SAR(1 g) = 0.341 W/kg; SAR(10 g) = 0.212 W/kg
Maximum value of SAR (measured) = 0.409 W/kg

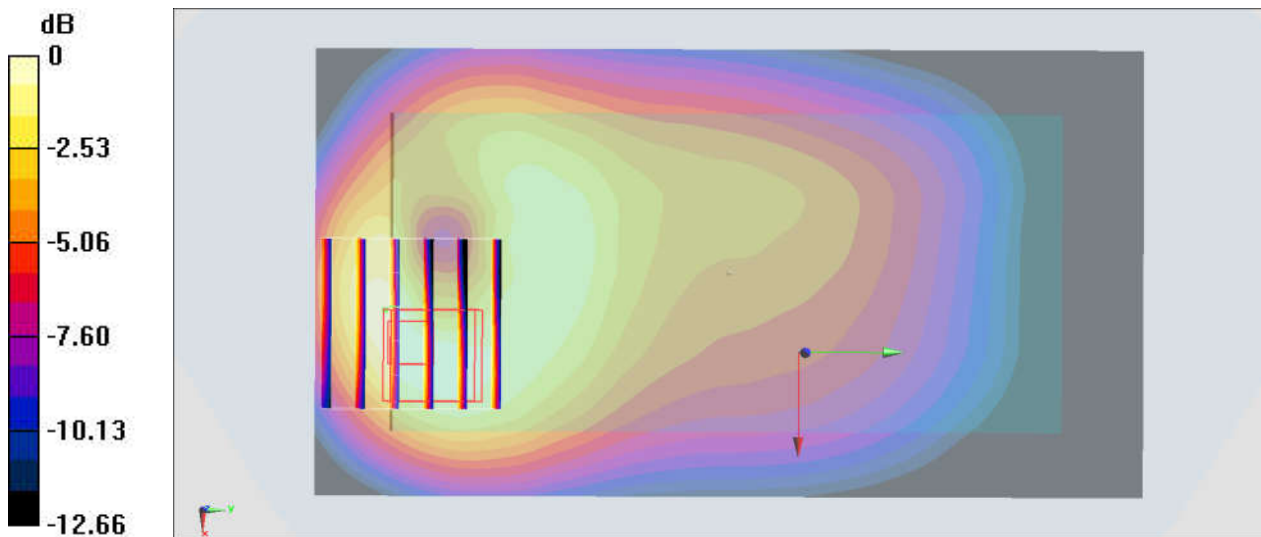

0 dB = 0.409 W/kg = -3.88 dBW/kg

#35_LTE Band 30_10M_QPSK_1_0_Bottom Side_10mm_Ch27710


Communication System: LTE; Frequency: 2310 MHz; Duty Cycle: 1:1
Medium: MSL_2300_181022 Medium parameters used: $f = 2310$ MHz; $\sigma = 1.807$ S/m; $\epsilon_r = 52.729$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.5, 4.5, 4.5) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (41x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.29 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 27.24 V/m; Power Drift = -0.08 dB
Peak SAR (extrapolated) = 1.85 W/kg
SAR(1 g) = 1.01 W/kg; SAR(10 g) = 0.527 W/kg
Maximum value of SAR (measured) = 1.26 W/kg

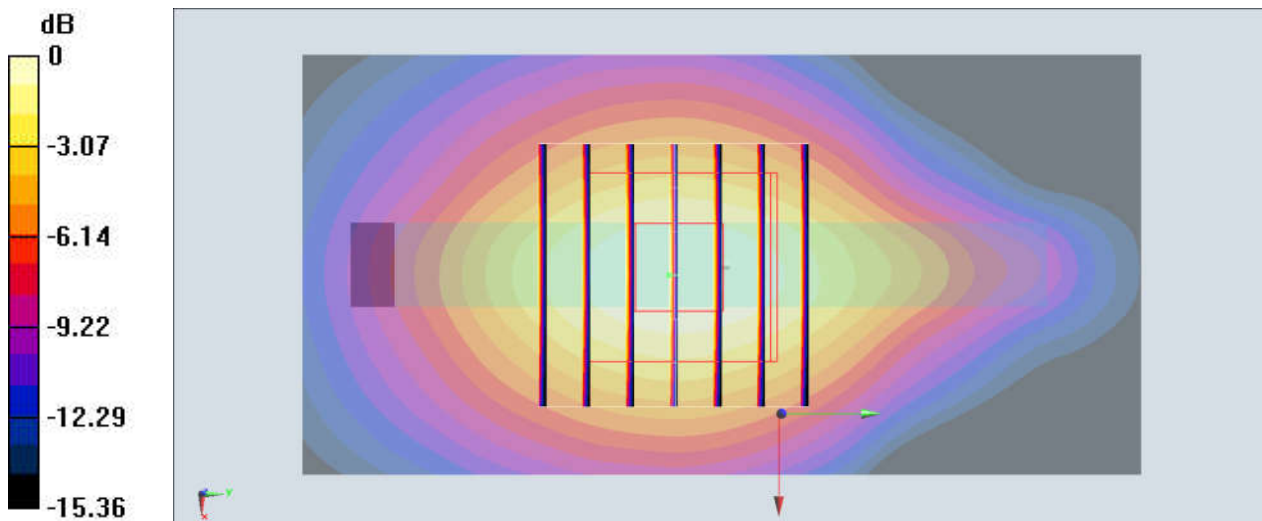

0 dB = 1.26 W/kg = 1.00 dBW/kg

#36_LTE Band 66_20M_QPSK_1_0_Bottom Side_10mm_Ch132572


Communication System: LTE; Frequency: 1770 MHz; Duty Cycle: 1:1
Medium: MSL_1750_181106 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.515$ S/m; $\epsilon_r = 52.673$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.2 °C ; Liquid Temperature : 22.2 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(5.06, 5.06, 5.06) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (41x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.27 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 28.56 V/m; Power Drift = -0.11 dB
Peak SAR (extrapolated) = 1.75 W/kg
SAR(1 g) = 1.05 W/kg; SAR(10 g) = 0.569 W/kg
Maximum value of SAR (measured) = 1.31 W/kg

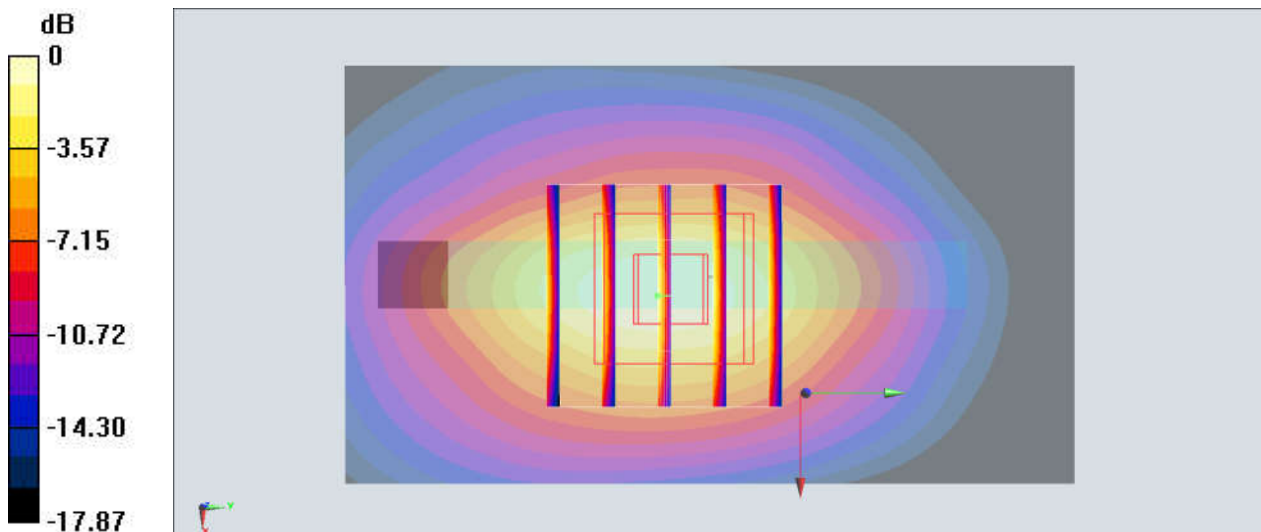

0 dB = 1.31 W/kg = 1.17 dBW/kg

#37_LTE Band 41_20M_QPSK_1_0_Bottom Side_10mm_Ch39750


Communication System: LTE ; Frequency: 2506 MHz;Duty Cycle: 1:1.59
Medium: MSL_2600_181022 Medium parameters used: $f = 2506$ MHz; $\sigma = 2.011$ S/m; $\epsilon_r = 52.143$;
 $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 22.4 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.27, 4.27, 4.27) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Left; Type: QD000P40CD; Serial: TP:1431
- Measurement SW: DASY52, Version 52.10 (1);SEMCAD X Version 14.6.11 (7439)

Area Scan (41x81x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 23.10 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.80 W/kg
SAR(1 g) = 0.881 W/kg; SAR(10 g) = 0.428 W/kg
Maximum value of SAR (measured) = 1.10 W/kg

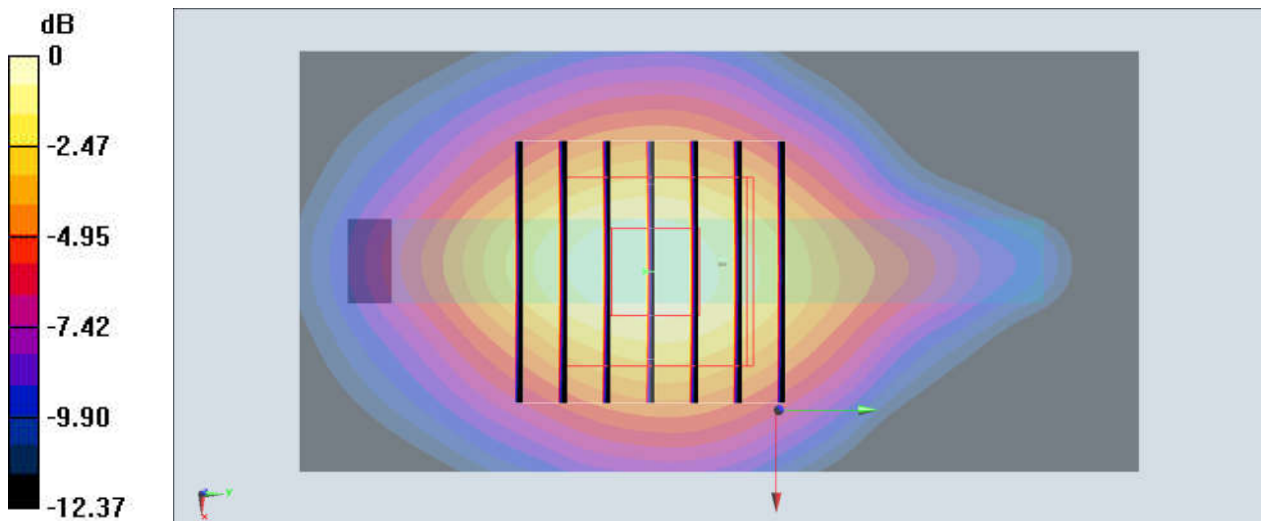

0 dB = 1.10 W/kg = 0.41 dBW/kg

#38_WLAN2.4GHz_802.11b 1Mbps_Right Side_10mm_Ch11;Chain 0

Communication System: 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1.011

Medium: MSL_2450_181030 Medium parameters used: $f = 2462$ MHz; $\sigma = 2.021$ S/m; $\epsilon_r = 53.636$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.3 °C ; Liquid Temperature : 22.3 °C

DASY5 Configuration:

- Probe: ES3DV3 - SN3169; ConvF(4.4, 4.4, 4.4) ; Calibrated: 2018/5/28
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn495; Calibrated: 2018/5/24
- Phantom: SAM_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (41x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.141 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.465 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.223 W/kg

SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.054 W/kg

Maximum value of SAR (measured) = 0.145 W/kg

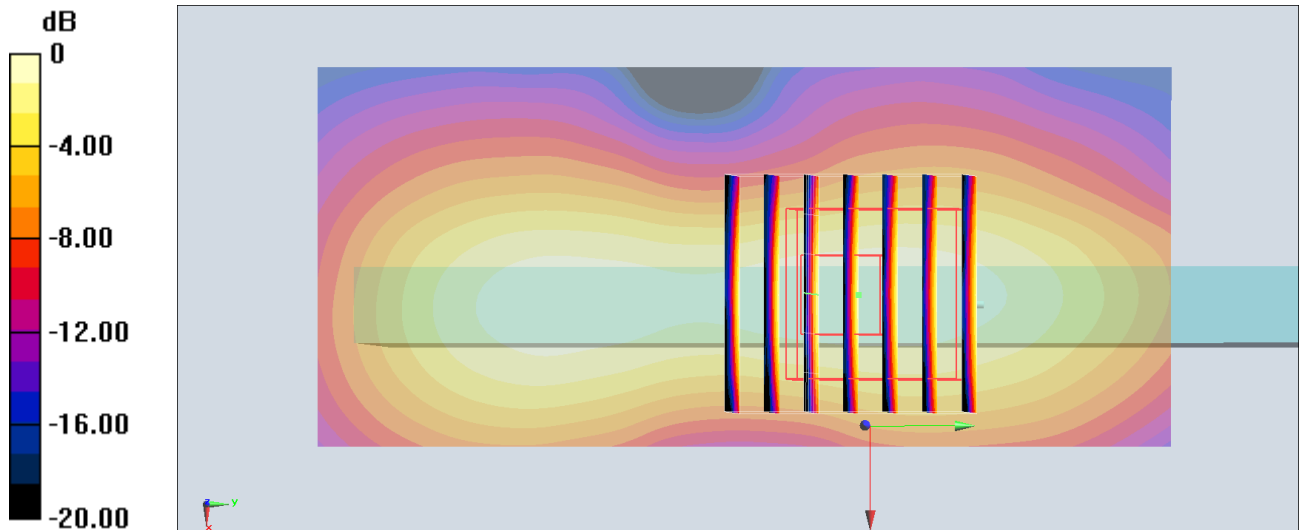

0 dB = 0.145 W/kg = -8.39 dBW/kg

#39_WLAN5GHz_802.11a 6Mbps_Back_10mm_Ch48;Chain 1

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1.022

Medium: MSL_5G_181114 Medium parameters used: $f = 5240$ MHz; $\sigma = 5.196$ S/m; $\epsilon_r = 49.485$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.92, 4.92, 4.92) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (101x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.282 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.392 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.455 W/kg

SAR(1 g) = 0.124 W/kg; SAR(10 g) = 0.046 W/kg

Maximum value of SAR (measured) = 0.276 W/kg

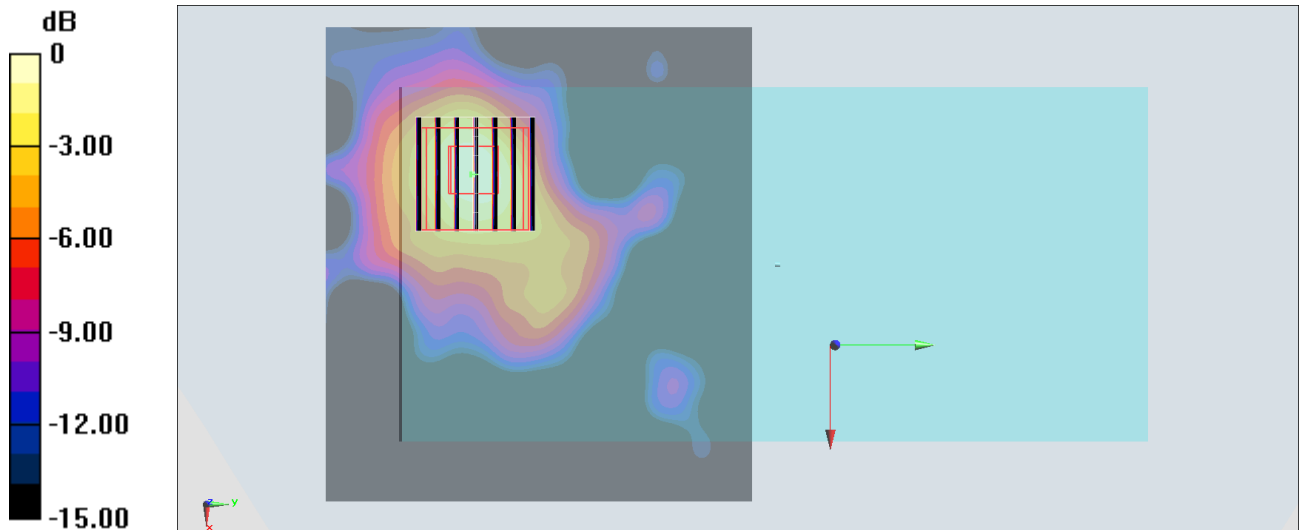

0 dB = 0.276 W/kg = -5.59 dBW/kg

#40_WLAN5GHz_802.11a_6Mbps_Back_10mm_Ch165;Chain 1

Communication System: 802.11a; Frequency: 5825 MHz; Duty Cycle: 1:1.022

Medium: MSL_5G_181114 Medium parameters used : $f = 5825$ MHz; $\sigma = 6.001$ S/m; $\epsilon_r = 48.585$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.6 °C ; Liquid Temperature : 22.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3976; ConvF(4.46, 4.46, 4.46) ; Calibrated: 2018/1/23
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1424; Calibrated: 2018/1/18
- Phantom: SAM_Right; Type: SAM; Serial: TP:1479
- Measurement SW: DASY52, Version 52.10 (1); SEMCAD X Version 14.6.11 (7439)

Area Scan (101x91x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.113 W/kg


Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 3.310 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.199 W/kg

SAR(1 g) = 0.040 W/kg; SAR(10 g) = 0.012 W/kg

Maximum value of SAR (measured) = 0.110 W/kg

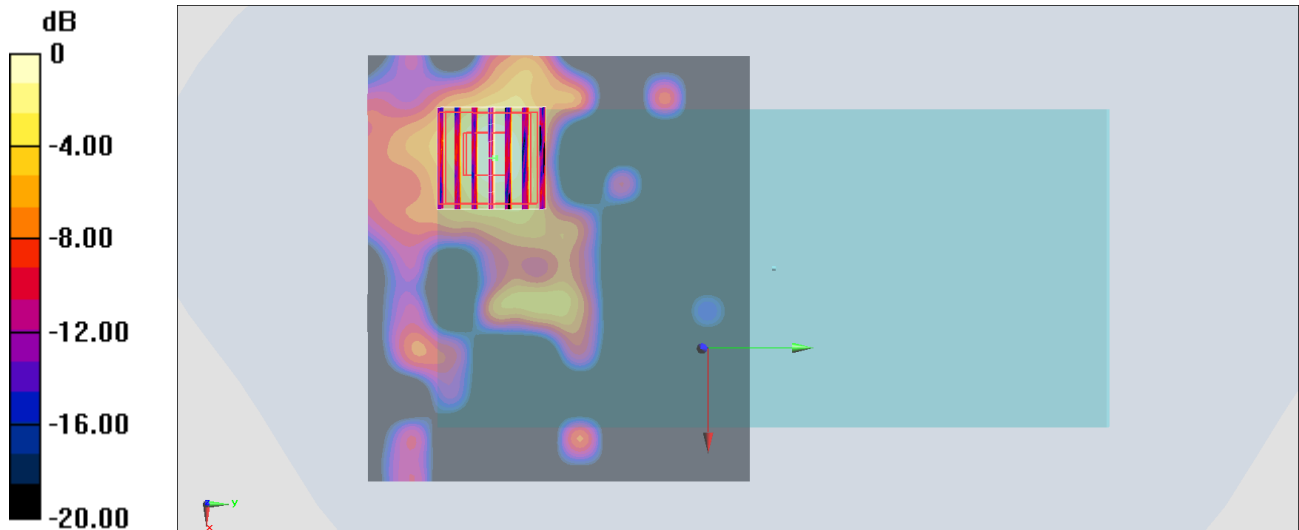

0 dB = 0.110 W/kg = -9.59 dBW/kg