

TEST REPORT

Reference No. : WTS16S0754956E
FCC ID..... : 2AIPV-BH71000
Applicant..... : Hoover, Inc.
Address : 7005 Cochran Road Glenwillow, OH 44139-4303 United States
Manufacturer : Shenzhen Silver Star Intelligent Technology Co., Ltd.
Address : Building D, Huiqing Science-park, Dafu Industrial Areas, Guanguang Road, Guanlan Town, Baoan District, Shenzhen, China
Product Name : Hoover Series 1000 robotic vacuum
Model No. : BH71000
Standards : FCC CFR47 Part 15 C Section 15.247:2015
Date of Receipt sample..... : Jul. 10, 2016
Date of Test..... : Jul. 10-Jul. 13, 2016
Date of Issue : Jul. 14, 2016
Test Result : **Pass**

Remarks:

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.
The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

Address: 1/F., Fukangtai Building, West Baima Road, Songgang Street, Baoan District, Shenzhen, Guangdong, China

Tel :+86-755-83551033

Fax:+86-755-83552400

Compiled by:



Zero Zhou / Test Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Radiated Emissions	15.247 15.205(a) 15.209(a)	PASS
Conducted Emissions	15.207(a)	PASS
6dB Bandwidth	15.247(a)(2)	PASS
Maximum Peak Output Power	15.247(b)(3),(4)	PASS
Power Spectral Density	15.247(e)	PASS
Band Edge	15.247(d)	PASS
Antenna Requirement	15.203	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE.....	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION.....	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 CHANNEL LIST	5
4.4 TEST MODE	6
4.5 TEST FACILITY	6
5 EQUIPMENT USED DURING TEST	7
5.1 EQUIPMENTS LIST	7
5.2 DESCRIPTION OF SUPPORT UNITS	8
5.3 MEASUREMENT UNCERTAINTY	8
5.4 TEST EQUIPMENT CALIBRATION	8
6 CONDUCTED EMISSION	9
6.1 E.U.T. OPERATION	9
6.2 EUT SETUP	9
6.3 MEASUREMENT DESCRIPTION	9
6.4 CONDUCTED EMISSION TEST RESULT	10
7 RADIATED EMISSIONS.....	12
7.1 EUT OPERATION.....	12
7.2 TEST SETUP	13
7.3 SPECTRUM ANALYZER SETUP	14
7.4 TEST PROCEDURE	15
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	15
7.6 SUMMARY OF TEST RESULTS	16
8 BAND EDGE MEASUREMENT	28
8.1 TEST PROCEDURE.....	28
8.2 TEST RESULT	29
9 6 DB BANDWIDTH MEASUREMENT	33
9.1 TEST PROCEDURE:	33
9.2 TEST RESULT:	33
10 MAXIMUM PEAK OUTPUT POWER	40
10.1 TEST PROCEDURE:.....	40
10.2 TEST RESULT:	40
11 POWER SPECTRAL DENSITY	47
11.1 TEST PROCEDURE:.....	47
11.2 TEST RESULT:	47
12 ANTENNA REQUIREMENT	54
13 RF EXPOSURE.....	55
13.1 REQUIREMENTS.....	55
13.2 THE PROCEDURES / LIMIT	55
13.3 MPE CALCULATION METHOD	56
14 PHOTOGRAPHS – MODEL BH71000 TEST SETUP	57
14.1 RADIATED EMISSION	57
14.2 CONDUCTED EMISSION AT TEST SITE 1#.....	58

15	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS	59
15.1	MODEL BH71000-EXTERNAL VIEW.....	59
15.2	MODEL BH71000-INTERNAL VIEW.....	64

4 General Information

4.1 General Description of E.U.T.

Product Name:	Hoover Series 1000 robotic vacuum
Model No.:	BH71000
Model Difference:	N/A
Operation Frequency:	802.11b/g/n HT20: 2412MHz ~ 2462MHz, 802.11n HT40: 2422MHz~2452MHz
The Lowest Oscillator:	:32.768 kHz
Antenna Gain:	:0dBi
Antenna installation	: Ceramic Antenna
Type of modulation:	IEEE 802.11b (CCK/QPSK/BPSK,11Mbps max.) IEEE 802.11g (BPSK/QPSK/16QAM/64QAM,54Mbps max.) IEEE 802.11n (BPSK/QPSK/16QAM/64QAM,HT20:72Mbps max., HT40:150Mbps max.)

4.2 Details of E.U.T.

Technical Data:	Main Body: DC 14.8V 2000-3600mAh 32.56-53.28Wh, By Li Battery input.
Adapter	Input: 100-240V, 50/60Hz 0.6A Output: 18V, 1.0A Model No.: NLD100180W1A4

4.3 Channel List

Channel No.	Frequency (MHz)						
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462	12	-

4.4 Test Mode

Table 1 Tests Carried Out Under FCC part 15.247

Test Items	Mode	Data Rate	Channel	TX/RX
Maximum Peak Output Power	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Power Spectral Density	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX
Frequency Range	802.11b	11 Mbps	1/11	TX
	802.11g	54 Mbps	1/11	TX
	802.11n HT20	108 Mbps	1/11	TX
	802.11n HT40	150 Mbps	3/9	TX
Transmitter Spurious Emissions	802.11b	11 Mbps	1/6/11	TX
	802.11g	54 Mbps	1/6/11	TX
	802.11n HT20	108 Mbps	1/6/11	TX
	802.11n HT40	150 Mbps	3/6/9	TX

Note :Parameters set by test software during channel & power tests, the software provided by the customer was used to set the operating channels as well as the output power level. The RF output power set is the power expected by the manufacturer and is going to be fixed on the firmware of the final product .

4.5 Test Facility

The test facility has a test site registered with the following organizations:

- IC – Registration No.: 7760A-1**
 Waltek Services(Shenzhen) Co., Ltd. Has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.
 Registration number 7760A-1, October 15, 2015.
- FCC Test Site 1#– Registration No.: 880581**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, April 29, 2014.
- FCC Test Site 2#– Registration No.: 328995**
 Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory `has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 328995, December 3, 2014.

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions Test Site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Sep.15,2015	Sep.14,2016
2.	LISN	R&S	ENV216	101215	Sep.15,2015	Sep.14,2016
3.	Cable	Top	TYPE16(3.5M)	-	Sep.15,2015	Sep.14,2016
Conducted Emissions Test Site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	101155	Sep.15,2015	Sep.14,2016
2.	LISN	SCHWARZBECK	NSLK 8128	8128-289	Sep.15,2015	Sep.14,2016
3.	Limitter	York	MTS-IMP-136	261115-001-0024	Sep.15,2015	Sep.14,2016
4.	Cable	LARGE	RF300	-	Sep.15,2015	Sep.14,2016
3m Semi-anechoic Chamber for Radiation Emissions Test site 1#						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1	EMC Analyzer	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Sep.15,2015	Sep.14,2016
3	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Apr.19,2016	Apr.18,2017
4	Coaxial Cable (below 1GHz)	Top	TYPE16(13M)	-	Sep.15,2015	Sep.14,2016
5	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Apr.19,2016	Apr.18,2017
6	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	335	Apr.19,2016	Apr.18,2017
7	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Mar.17,2016	Mar.16,2017
8	Coaxial Cable (above 1GHz)	Top	1GHz-25GHz	EW02014-7	Apr.10,2016	Apr.09,2017
3m Semi-anechoic Chamber for Radiation Emissions Test site 2#						
Item	Equipment	Manufacturer	Model No.	Serial No	Last Calibration Date	Calibration Due Date
1	Test Receiver	R&S	ESCI	101296	Sep.15,2015	Sep.14,2016
2	Trilog Broadband Antenna	SCHWARZBECK	VULB9160	9160-3325	Sep.15,2015	Sep.14,2016
3	Amplifier	Compliance pirection systems inc	PAP-0203	22024	Sep.15,2015	Sep.14,2016
4	Cable	HUBER+SUHNER	CBL2	525178	Sep.15,2015	Sep.14,2016

RF Conducted Testing						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer (9k~26.5GHz)	Agilent	E7405A	MY45114943	Sep.15,2015	Sep.14,2016
2.	Spectrum Analyzer (9k~6GHz)	R&S	FSL6	100959	Sep.15,2015	Sep.14,2016
3.	Signal Analyzer (9k~26.5GHz)	Agilent	N9010A	MY50520207	Sep.15,2015	Sep.14,2016

5.2 Description of Support Units

Equipment	Description	Model No.	Series No.
/	/	/	/

5.3 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Radiated Spurious Emissions test	± 5.03 dB (30M~1000MHz)
	± 5.47 dB (1000M~25000MHz)
Conducted Spurious Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.4 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.10:2013
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class/Severity:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth)

6.1 E.U.T. Operation

Operating Environment :


Temperature:	21.5 °C
Humidity:	51.9 % RH
Atmospheric Pressure:	101.2kPa

EUT Operation :

The test was performed in Transmitting mode, the test data were shown in the report.

6.2 EUT Setup

The conducted emission tests were performed using the setup accordance with the ANSI C63.10.

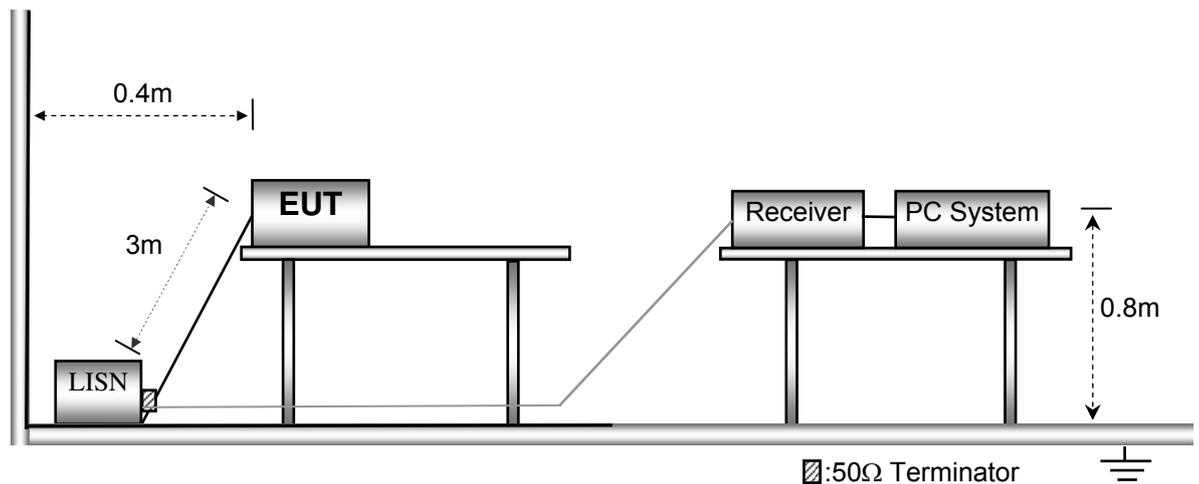


6.3 Measurement Description

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.4 Conducted Emission Test Result


An initial pre-scan was performed on the live and neutral lines.

Live line:

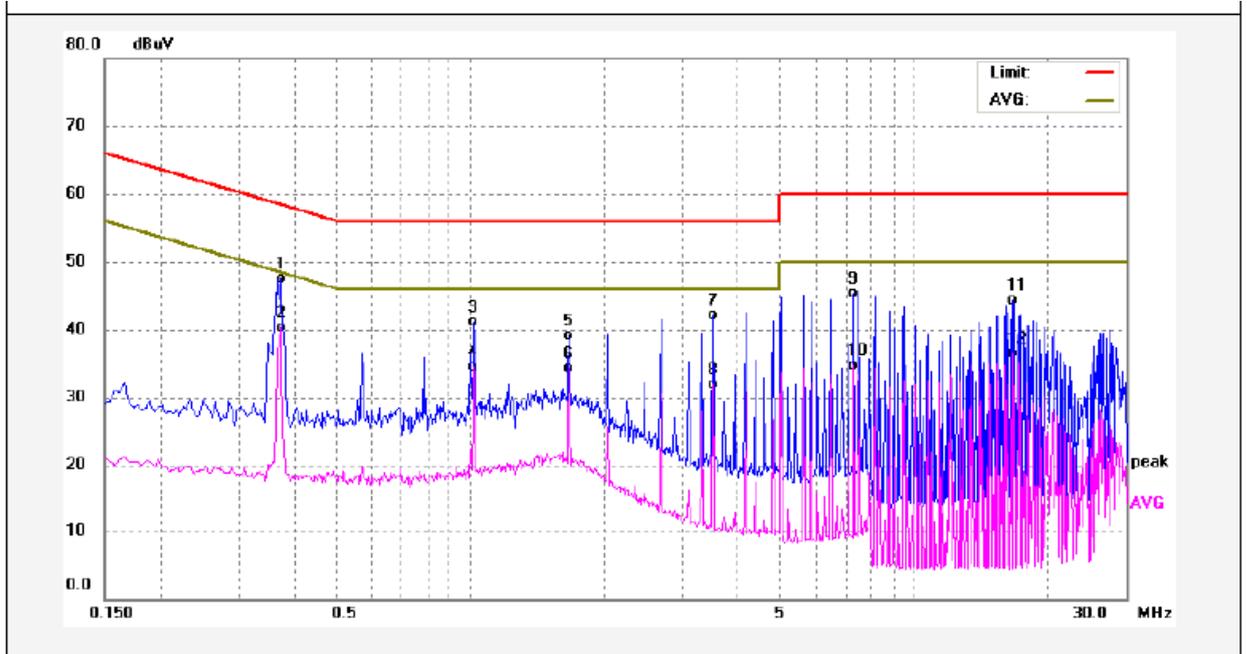

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.3740	37.17	10.28	47.45	58.41	-10.96	QP	
2	0.3740	30.02	10.28	40.30	48.41	-8.11	AVG	
3	1.0180	30.73	10.39	41.12	56.00	-14.88	QP	
4	1.0180	24.09	10.39	34.48	46.00	-11.52	AVG	
5	1.6700	28.67	10.44	39.11	56.00	-16.89	QP	
6	1.6700	23.91	10.44	34.35	46.00	-11.65	AVG	
7	3.5220	31.56	10.51	42.07	56.00	-13.93	QP	
8	3.5220	21.42	10.51	31.93	46.00	-14.07	AVG	
9	7.3220	34.73	10.65	45.38	60.00	-14.62	QP	
10	7.3220	23.98	10.65	34.63	50.00	-15.37	AVG	
11	16.5940	33.25	10.98	44.23	60.00	-15.77	QP	
12	16.5940	25.57	10.98	36.55	50.00	-13.45	AVG	

Neutral line:

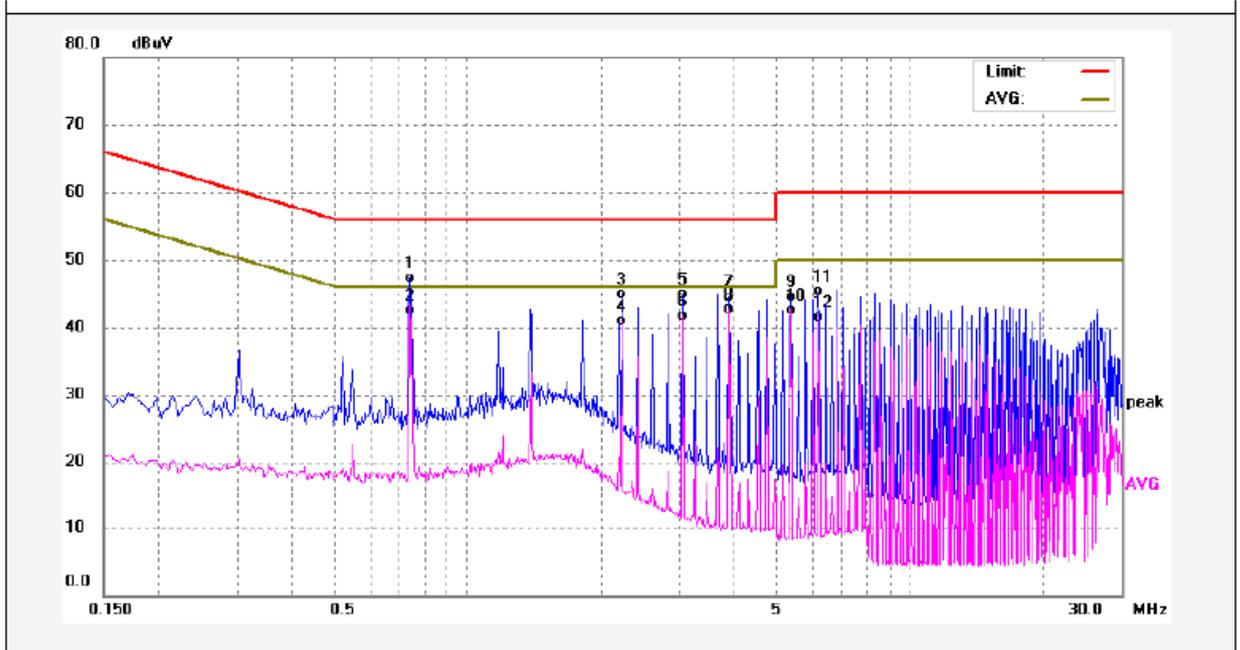

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.7420	36.87	10.36	47.23	56.00	-8.77	QP	
2	0.7420	32.20	10.36	42.56	46.00	-3.44	AVG	
3	2.2260	34.40	10.47	44.87	56.00	-11.13	QP	
4	2.2260	30.34	10.47	40.81	46.00	-5.19	AVG	
5	3.0579	34.46	10.50	44.96	56.00	-11.04	QP	
6	3.0579	31.26	10.50	41.76	46.00	-4.24	AVG	
7	3.8940	33.91	10.51	44.42	56.00	-11.58	QP	
8	3.8940	32.17	10.51	42.68	46.00	-3.32	AVG	
9	5.3780	34.03	10.55	44.58	60.00	-15.42	QP	
10	5.3780	32.05	10.55	42.60	50.00	-7.40	AVG	
11	6.2140	34.71	10.60	45.31	60.00	-14.69	QP	
12	6.2140	30.81	10.60	41.41	50.00	-8.59	AVG	

7 Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: ANSI C63.10:2013

Test Result: PASS

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation

Operating Environment :

Temperature: 23.5 °C

Humidity: 52.1 % RH

Atmospheric Pressure: 101.2kPa


EUT Operation :

The test was performed in transmitting mode, the test data were shown in the report.


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.10.


The test setup for emission measurement below 30MHz.

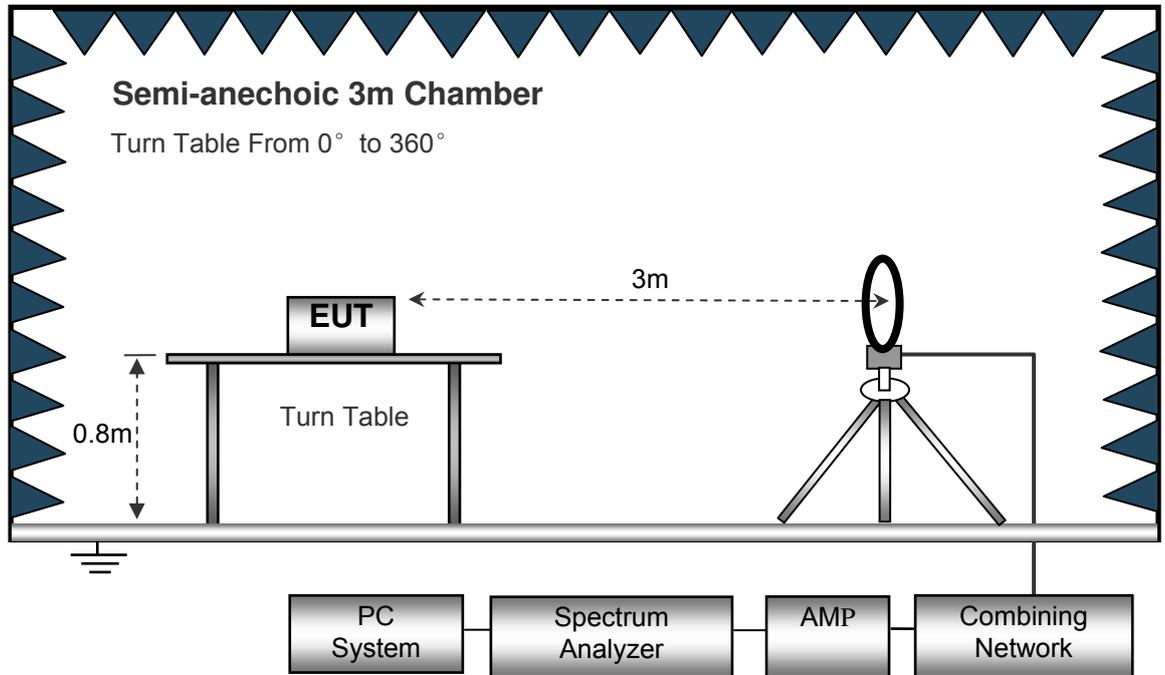

The test setup for emission measurement from 30 MHz to 1 GHz.

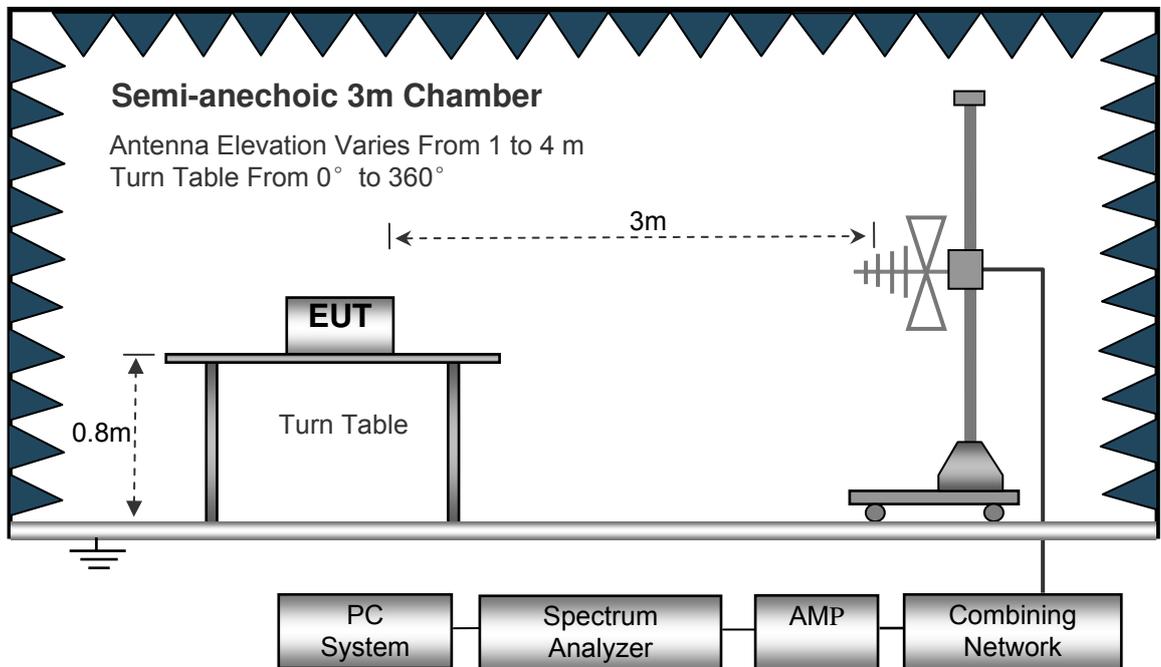

The test setup for emission measurement above 1 GHz.

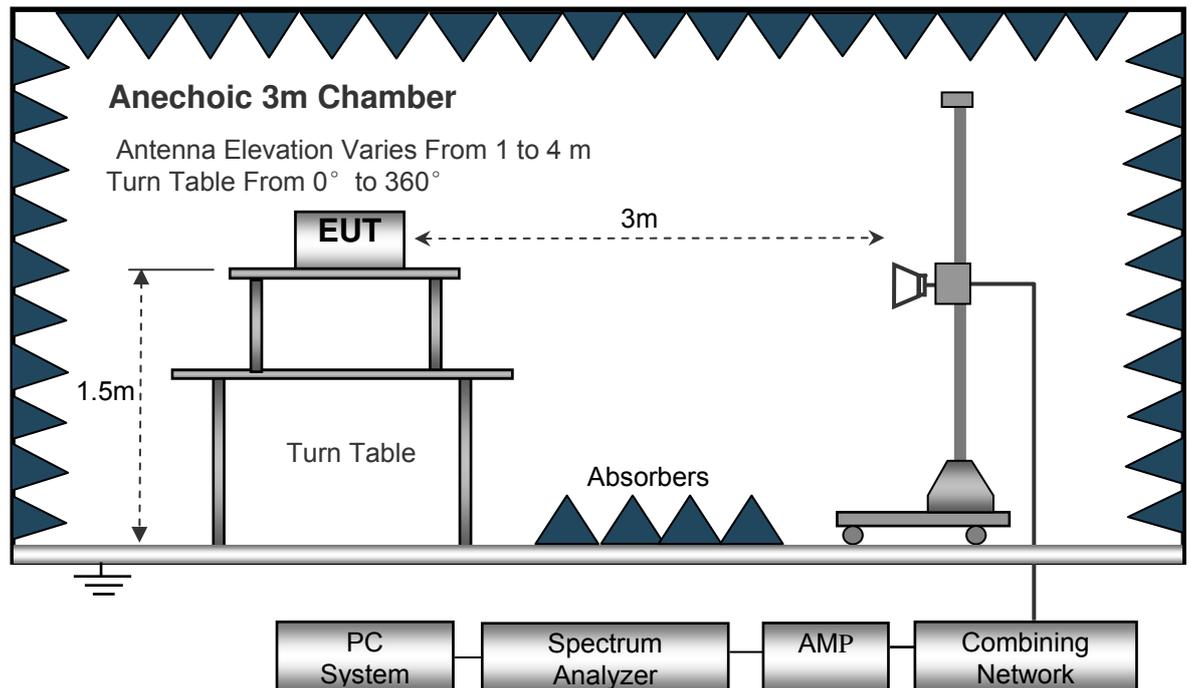

7.3 Spectrum Analyzer Setup

Below 30MHz

Sweep Speed Auto
 IF Bandwidth..... 10kHz
 Video Bandwidth..... 10kHz
 Resolution Bandwidth..... 10kHz

30MHz ~ 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 100kHz
 Video Bandwidth..... 300kHz

Above 1GHz

Sweep Speed Auto
 Detector PK
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 3MHz
 Detector Ave.
 Resolution Bandwidth..... 1MHz
 Video Bandwidth..... 10Hz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are performed in X,Y and Z axis positioning(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand),the worst condition was tested putting the eut in X axis,so the worst data were shown as follow.
8. A 2.4GHz high -pass filter is used druing radiated emissions above 1GHz measurement.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency : 32.768kHz ~ 30MHz

The measurements were more than 20 dB below the limit and not reported.

Test Frequency : 30MHz ~ 18GHz

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT 11b: Low Channel 2412MHz									
225.68	42.39	QP	37	1.6	H	-11.62	30.77	46.00	-15.23
225.68	37.45	QP	248	1.7	V	-11.62	25.83	46.00	-20.17
4824.00	50.00	PK	248	1.3	V	-1.06	48.94	74.00	-25.06
4824.00	45.16	Ave	248	1.3	V	-1.06	44.10	54.00	-9.90
7236.00	43.52	PK	186	1.5	H	1.33	44.85	74.00	-29.15
7236.00	40.58	Ave	186	1.5	H	1.33	41.91	54.00	-12.09
2346.77	46.99	PK	329	1.4	V	-13.19	33.80	74.00	-40.20
2346.77	38.17	Ave	329	1.4	V	-13.19	24.98	54.00	-29.02
2384.84	44.38	PK	124	1.6	H	-13.14	31.24	74.00	-42.76
2384.84	38.76	Ave	124	1.6	H	-13.14	25.62	54.00	-28.38
2492.42	42.26	PK	31	1.8	V	-13.08	29.18	74.00	-44.82
2492.42	38.76	Ave	31	1.8	V	-13.08	25.68	54.00	-28.32

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dBμV)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dBμV/m)	(dBμV/m)	(dB)
ANT 11b: Middle Channel 2437MHz									
225.68	41.72	QP	98	1.1	H	-11.62	30.10	46.00	-15.90
225.68	38.66	QP	64	2.0	V	-11.62	27.04	46.00	-18.96
4874.00	51.13	PK	53	1.7	V	-0.62	50.51	74.00	-23.49
4874.00	44.80	Ave	53	1.7	V	-0.62	44.18	54.00	-9.82
7311.00	43.52	PK	8	1.6	H	2.21	45.73	74.00	-28.27
7311.00	40.90	Ave	8	1.6	H	2.21	43.11	54.00	-10.89
2341.56	46.82	PK	183	1.8	V	-13.19	33.63	74.00	-40.37
2341.56	37.63	Ave	183	1.8	V	-13.19	24.44	54.00	-29.56
2360.51	42.73	PK	92	1.8	H	-13.14	29.59	74.00	-44.41
2360.51	38.02	Ave	92	1.8	H	-13.14	24.88	54.00	-29.12
2488.71	43.28	PK	88	1.1	V	-13.08	30.20	74.00	-43.80
2488.71	36.41	Ave	88	1.1	V	-13.08	23.33	54.00	-30.67

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT 11b: High Channel 2462MHz									
225.68	41.69	QP	100	1.5	H	-11.62	30.07	46.00	-15.93
225.68	38.77	QP	124	1.3	V	-11.62	27.15	46.00	-18.85
4924.00	51.72	PK	17	1.9	V	-0.24	51.48	74.00	-22.52
4924.00	44.48	Ave	17	1.9	V	-0.24	44.24	54.00	-9.76
7386.00	42.44	PK	352	1.9	H	2.84	45.28	74.00	-28.72
7386.00	40.36	Ave	352	1.9	H	2.84	43.20	54.00	-10.80
2318.80	46.79	PK	12	1.9	V	-13.19	33.60	74.00	-40.40
2318.80	38.33	Ave	12	1.9	V	-13.19	25.14	54.00	-28.86
2378.91	42.35	PK	64	1.3	H	-13.14	29.21	74.00	-44.79
2378.91	37.37	Ave	64	1.3	H	-13.14	24.23	54.00	-29.77
2493.28	44.13	PK	160	1.6	V	-13.08	31.05	74.00	-42.95
2493.28	37.66	Ave	160	1.6	V	-13.08	24.58	54.00	-29.42

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT 11g: Low Channel 2412MHz									
225.68	42.58	QP	35	1.3	H	-11.62	30.96	46.00	-15.04
225.68	39.98	QP	109	1.3	V	-11.62	28.36	46.00	-17.64
4824.00	50.41	PK	198	1.2	V	-1.06	49.35	74.00	-24.65
4824.00	43.92	Ave	198	1.2	V	-1.06	42.86	54.00	-11.14
7236.00	42.82	PK	331	1.0	H	1.33	44.15	74.00	-29.85
7236.00	41.64	Ave	331	1.0	H	1.33	42.97	54.00	-11.03
2334.22	46.19	PK	34	1.6	V	-13.19	33.00	74.00	-41.00
2334.22	37.96	Ave	34	1.6	V	-13.19	24.77	54.00	-29.23
2369.86	43.16	PK	312	1.0	H	-13.14	30.02	74.00	-43.98
2369.86	38.89	Ave	312	1.0	H	-13.14	25.75	54.00	-28.25
2496.24	43.82	PK	202	1.0	V	-13.08	30.74	74.00	-43.26
2496.24	38.53	Ave	202	1.0	V	-13.08	25.45	54.00	-28.55

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT 11g: Middle Channel 2437MHz									
225.68	42.11	QP	256	1.1	H	-11.62	30.49	46.00	-15.51
225.68	38.83	QP	99	1.1	V	-11.62	27.21	46.00	-18.79
4874.00	51.15	PK	246	1.5	V	-0.62	50.53	74.00	-23.47
4874.00	43.16	Ave	246	1.5	V	-0.62	42.54	54.00	-11.46
7311.00	42.79	PK	195	1.6	H	2.21	45.00	74.00	-29.00
7311.00	41.49	Ave	195	1.6	H	2.21	43.70	54.00	-10.30
2329.24	46.94	PK	96	1.5	V	-13.19	33.75	74.00	-40.25
2329.24	39.26	Ave	96	1.5	V	-13.19	26.07	54.00	-27.93
2377.04	43.76	PK	160	1.9	H	-13.14	30.62	74.00	-43.38
2377.04	36.08	Ave	160	1.9	H	-13.14	22.94	54.00	-31.06
2493.12	44.71	PK	26	1.4	V	-13.08	31.63	74.00	-42.37
2493.12	38.09	Ave	26	1.4	V	-13.08	25.01	54.00	-28.99

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT 11g: High Channel 2462MHz									
225.68	42.86	QP	270	1.0	H	-11.62	31.24	46.00	-14.76
225.68	38.18	QP	241	1.3	V	-11.62	26.56	46.00	-19.44
4924.00	51.36	PK	261	1.1	V	-0.24	51.12	74.00	-22.88
4924.00	41.85	Ave	261	1.1	V	-0.24	41.61	54.00	-12.39
7386.00	41.73	PK	119	1.5	H	2.84	44.57	74.00	-29.43
7386.00	42.67	Ave	119	1.5	H	2.84	45.51	54.00	-8.49
2345.86	45.53	PK	294	1.7	V	-13.19	32.34	74.00	-41.66
2345.86	37.04	Ave	294	1.7	V	-13.19	23.85	54.00	-30.15
2375.33	42.19	PK	147	1.9	H	-13.14	29.05	74.00	-44.95
2375.33	37.37	Ave	147	1.9	H	-13.14	24.23	54.00	-29.77
2491.11	44.95	PK	148	1.2	V	-13.08	31.87	74.00	-42.13
2491.11	37.58	Ave	148	1.2	V	-13.08	24.50	54.00	-29.50

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT n20: Low Channel 2412MHz									
225.68	41.89	QP	56	1.4	H	-11.62	30.27	46.00	-15.73
225.68	37.87	QP	118	1.2	V	-11.62	26.25	46.00	-19.75
4824.00	51.68	PK	121	1.9	V	-1.06	50.62	74.00	-23.38
4824.00	42.34	Ave	121	1.9	V	-1.06	41.28	54.00	-12.72
7236.00	43.02	PK	183	1.6	H	1.33	44.35	74.00	-29.65
7236.00	41.24	Ave	183	1.6	H	1.33	42.57	54.00	-11.43
2310.94	45.25	PK	116	1.0	V	-13.19	32.06	74.00	-41.94
2310.94	39.65	Ave	116	1.0	V	-13.19	26.46	54.00	-27.54
2364.11	44.29	PK	222	1.3	H	-13.14	31.15	74.00	-42.85
2364.11	37.09	Ave	222	1.3	H	-13.14	23.95	54.00	-30.05
2494.98	44.24	PK	242	1.2	V	-13.08	31.16	74.00	-42.84
2494.98	38.69	Ave	242	1.2	V	-13.08	25.61	54.00	-28.39

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT n20: Middle Channel 2437MHz									
225.68	42.09	QP	305	1.8	H	-11.62	30.47	46.00	-15.53
225.68	37.10	QP	171	1.3	V	-11.62	25.48	46.00	-20.52
4874.00	51.12	PK	284	1.2	V	-0.62	50.50	74.00	-23.50
4874.00	41.71	Ave	284	1.2	V	-0.62	41.09	54.00	-12.91
7311.00	44.00	PK	24	1.3	H	2.21	46.21	74.00	-27.79
7311.00	42.41	Ave	24	1.3	H	2.21	44.62	54.00	-9.38
2345.83	46.77	PK	11	1.7	V	-13.19	33.58	74.00	-40.42
2345.83	37.31	Ave	11	1.7	V	-13.19	24.12	54.00	-29.88
2370.43	43.67	PK	133	1.7	H	-13.14	30.53	74.00	-43.47
2370.43	37.25	Ave	133	1.7	H	-13.14	24.11	54.00	-29.89
2497.77	43.78	PK	295	1.8	V	-13.08	30.70	74.00	-43.30
2497.77	36.10	Ave	295	1.8	V	-13.08	23.02	54.00	-30.98

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT n20: High Channel 2462MHz									
225.68	41.64	QP	281	2.0	H	-11.62	30.02	46.00	-15.98
225.68	38.15	QP	210	1.1	V	-11.62	26.53	46.00	-19.47
4924.00	51.28	PK	275	1.8	V	-0.24	51.04	74.00	-22.96
4924.00	42.33	Ave	275	1.8	V	-0.24	42.09	54.00	-11.91
7386.00	44.71	PK	306	1.8	H	2.84	47.55	74.00	-26.45
7386.00	42.79	Ave	306	1.8	H	2.84	45.63	54.00	-8.37
2330.34	45.65	PK	234	1.9	V	-13.19	32.46	74.00	-41.54
2330.34	39.52	Ave	234	1.9	V	-13.19	26.33	54.00	-27.67
2355.40	43.26	PK	284	1.4	H	-13.14	30.12	74.00	-43.88
2355.40	37.25	Ave	284	1.4	H	-13.14	24.11	54.00	-29.89
2488.28	42.95	PK	350	1.5	V	-13.08	29.87	74.00	-44.13
2488.28	36.46	Ave	350	1.5	V	-13.08	23.38	54.00	-30.62

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT n40: Low Channel 2422MHz									
225.68	40.17	QP	267	1.7	H	-11.62	28.55	46.00	-17.45
225.68	37.18	QP	142	1.7	V	-11.62	25.56	46.00	-20.44
4844.00	49.48	PK	261	1.9	V	-1.06	48.42	74.00	-25.58
4844.00	39.61	Ave	261	1.9	V	-1.06	38.55	54.00	-15.45
7266.00	41.89	PK	88	1.4	H	1.33	43.22	74.00	-30.78
7266.00	40.97	Ave	88	1.4	H	1.33	42.30	54.00	-11.70
2336.16	45.03	PK	153	1.3	V	-13.19	31.84	74.00	-42.16
2336.16	37.72	Ave	153	1.3	V	-13.19	24.53	54.00	-29.47
2383.63	43.79	PK	277	1.3	H	-13.14	30.65	74.00	-43.35
2383.63	36.19	Ave	277	1.3	H	-13.14	23.05	54.00	-30.95
2488.08	42.70	PK	85	1.2	V	-13.08	29.62	74.00	-44.38
2488.08	37.17	Ave	85	1.2	V	-13.08	24.09	54.00	-29.91

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT n40: Middle Channel 2437MHz									
225.68	39.98	QP	166	1.0	H	-11.62	28.36	46.00	-17.64
225.68	37.08	QP	209	1.7	V	-11.62	25.46	46.00	-20.54
4874.00	49.85	PK	109	1.7	V	-0.62	49.23	74.00	-24.77
4874.00	38.83	Ave	109	1.7	V	-0.62	38.21	54.00	-15.79
7311.00	42.87	PK	106	1.5	H	2.21	45.08	74.00	-28.92
7311.00	41.63	Ave	106	1.5	H	2.21	43.84	54.00	-10.16
2335.54	46.53	PK	36	1.6	V	-13.19	33.34	74.00	-40.66
2335.54	38.88	Ave	36	1.6	V	-13.19	25.69	54.00	-28.31
2369.67	42.35	PK	289	1.5	H	-13.14	29.21	74.00	-44.79
2369.67	37.71	Ave	289	1.5	H	-13.14	24.57	54.00	-29.43
2497.13	42.86	PK	221	1.0	V	-13.08	29.78	74.00	-44.22
2497.13	36.37	Ave	221	1.0	V	-13.08	23.29	54.00	-30.71

Frequency	Receiver Reading	Detector	Turn table Angle	RX Antenna		Corrected Factor	Corrected Amplitude	FCC Part 15.247/209/205	
				Height	Polar			Limit	Margin
(MHz)	(dB μ V)	(PK/QP/Ave)	Degree	(m)	(H/V)	(dB)	(dB μ V/m)	(dB μ V/m)	(dB)
ANT n40: High Channel 2452MHz									
225.68	40.82	QP	205	1.7	H	-11.62	29.20	46.00	-16.80
225.68	36.66	QP	273	1.7	V	-11.62	25.04	46.00	-20.96
4904.00	49.61	PK	352	1.5	V	-0.24	49.37	74.00	-24.63
4904.00	38.54	Ave	352	1.5	V	-0.24	38.30	54.00	-15.70
7356.00	43.69	PK	267	1.7	H	2.84	46.53	74.00	-27.47
7356.00	40.94	Ave	267	1.7	H	2.84	43.78	54.00	-10.22
2325.57	46.17	PK	342	1.3	V	-13.19	32.98	74.00	-41.02
2325.57	39.24	Ave	342	1.3	V	-13.19	26.05	54.00	-27.95
2378.07	43.08	PK	195	1.8	H	-13.14	29.94	74.00	-44.06
2378.07	38.31	Ave	195	1.8	H	-13.14	25.17	54.00	-28.83
2488.91	43.40	PK	229	1.0	V	-13.08	30.32	74.00	-43.68
2488.91	36.42	Ave	229	1.0	V	-13.08	23.34	54.00	-30.66

Test Frequency: 18GHz~25GHz

The measurements were more than 20 dB below the limit and not reported.

8 Band Edge Measurement


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	558074 D01 DTS Meas Guidance v03r04
Test Limit:	Regulation 15.247 (d),In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
Test Mode:	Transmitting

8.1 Test Produce


1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

8.2 Test Result


Test result plots shown as follows:

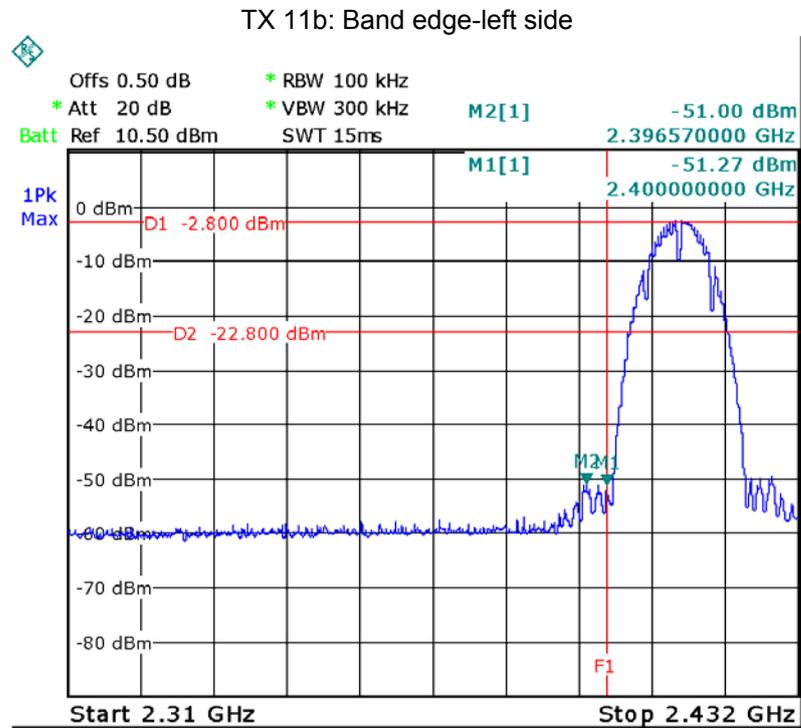


TX 11b: Band edge-right side

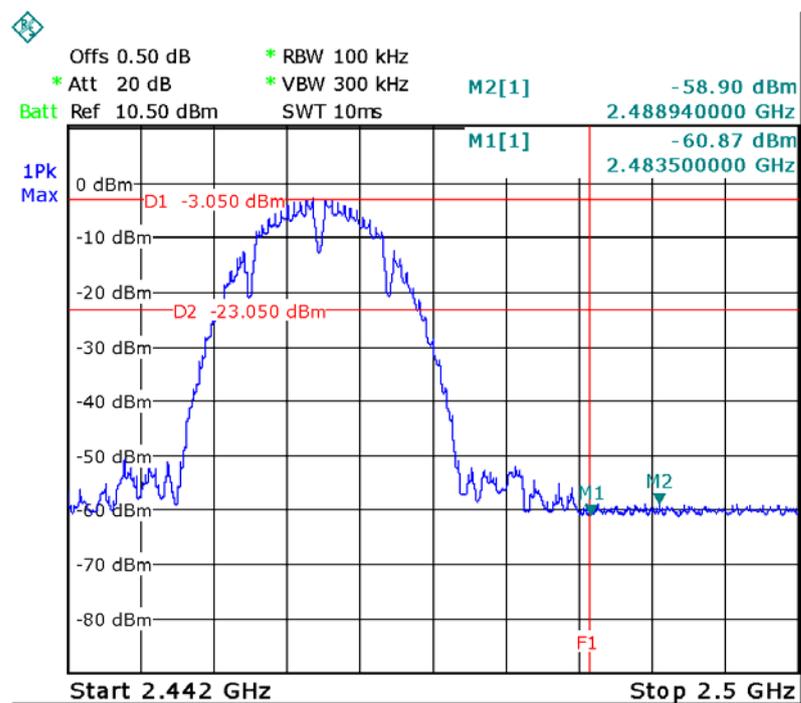


TX 11g: Band edge-left side

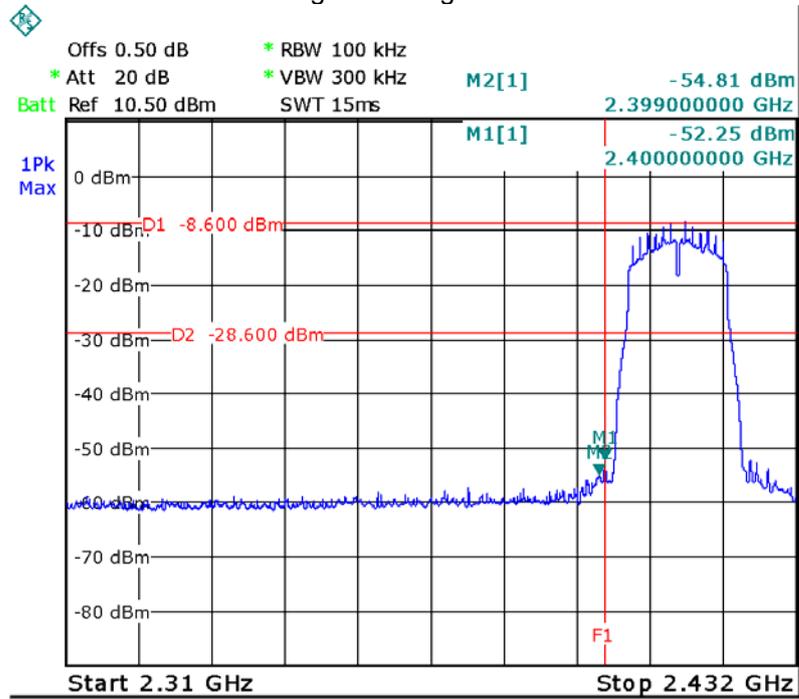


TX 11g: Band edge-right side

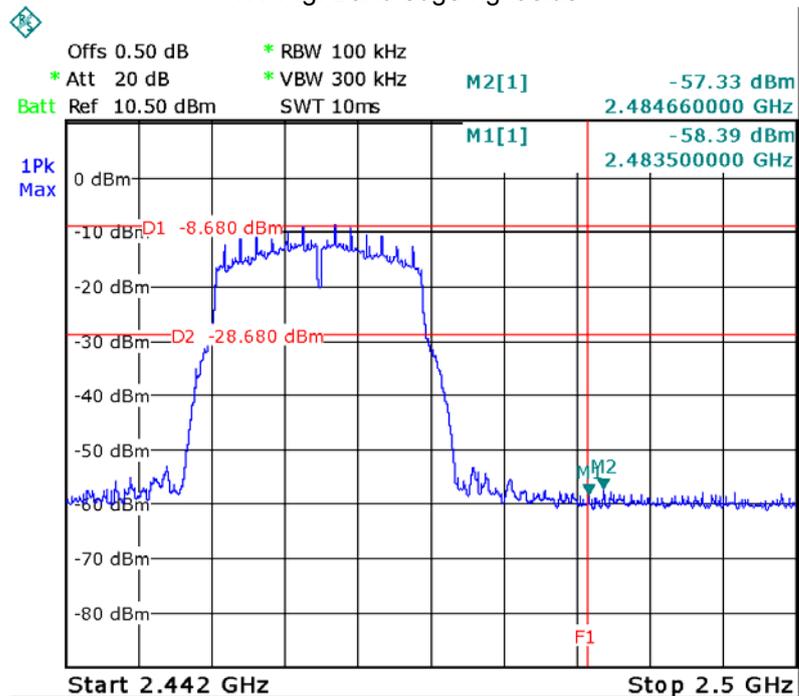


TX 11n HT20: Band edge-left side

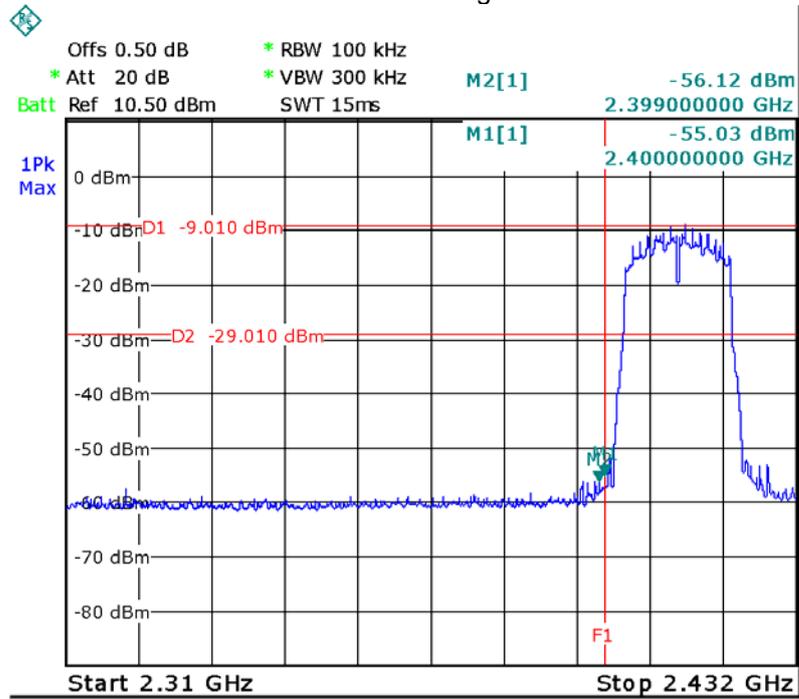


TX 11n HT20: Band edge-right side

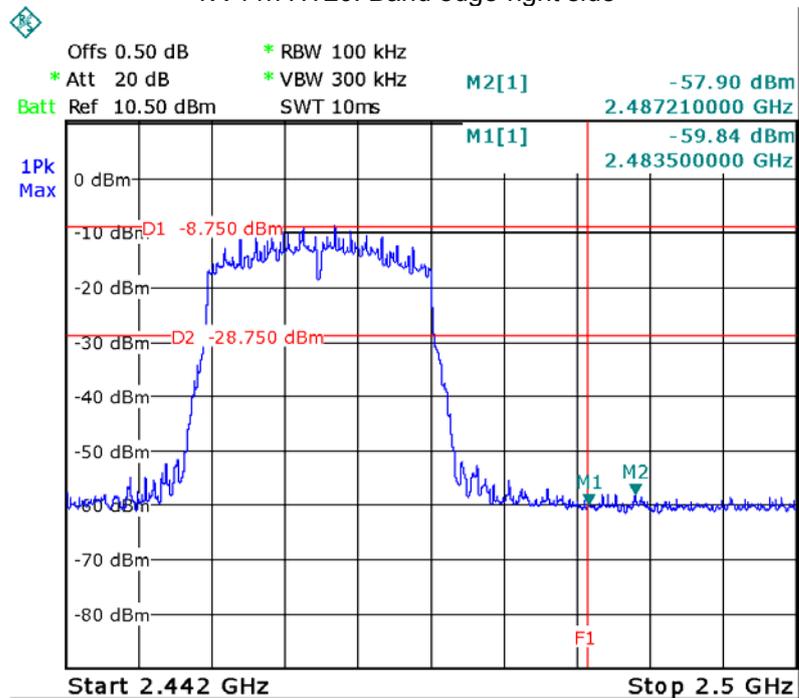

TX 11n HT40: Band edge-left side

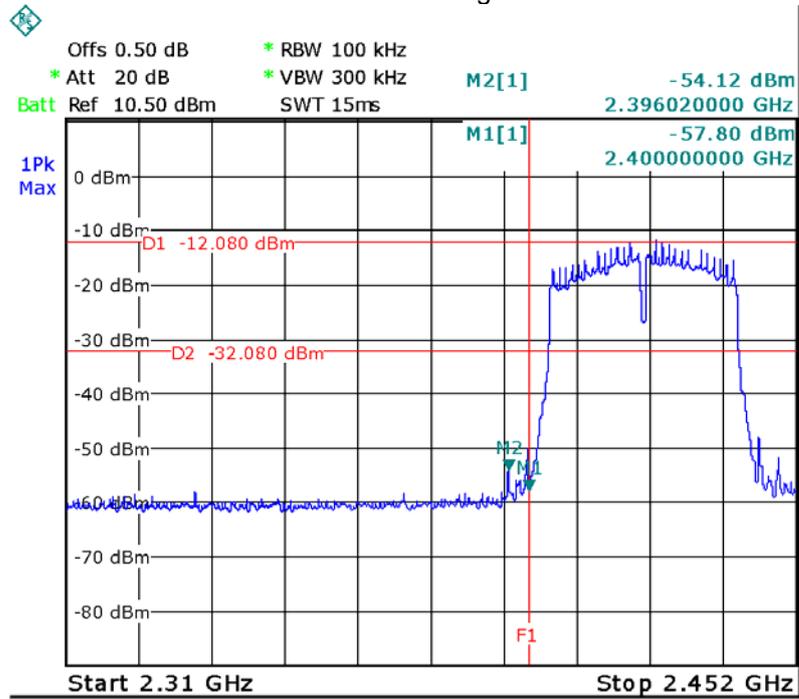

TX 11n HT40: Band edge-right side

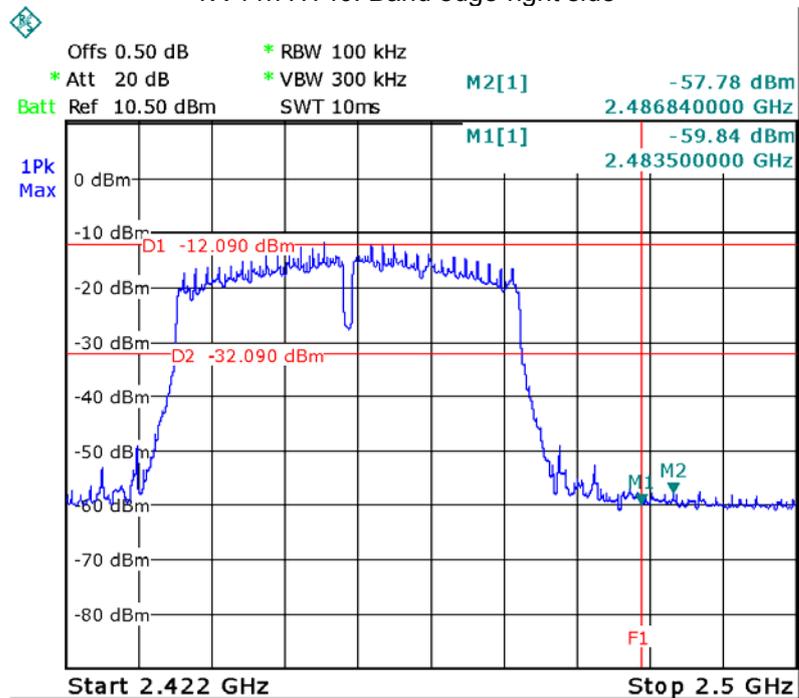

9 6 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r04



9.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


9.2 Test Result:

ANT	Operation mode	Bandwidth (MHz)		
		Low	Middle	High
ANT	11b	9.461	9.461	9.461
	11g	16.567	16.567	16.567
	11n HT20	17.838	17.838	17.838
	11n HT40	36.560	36.560	36.560


Test result plot as follows:

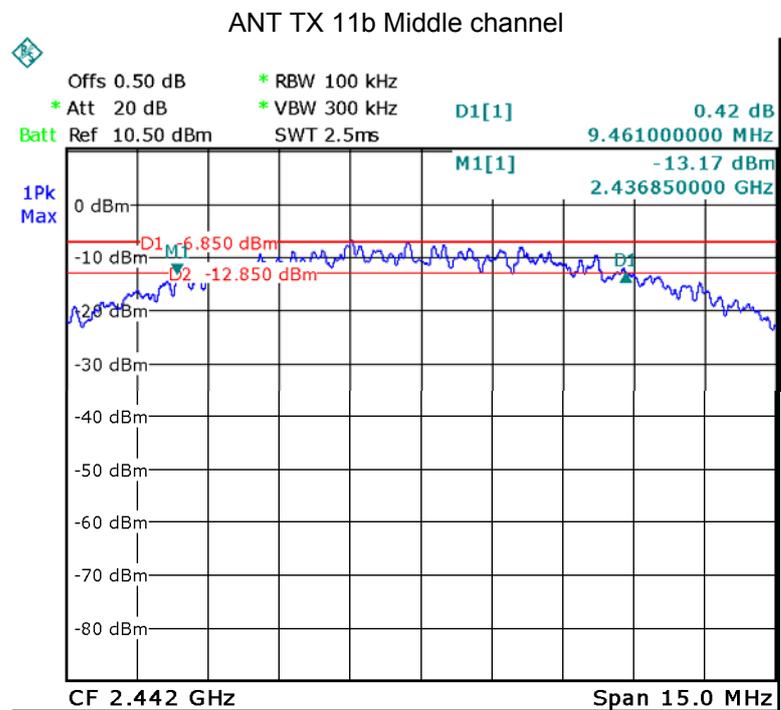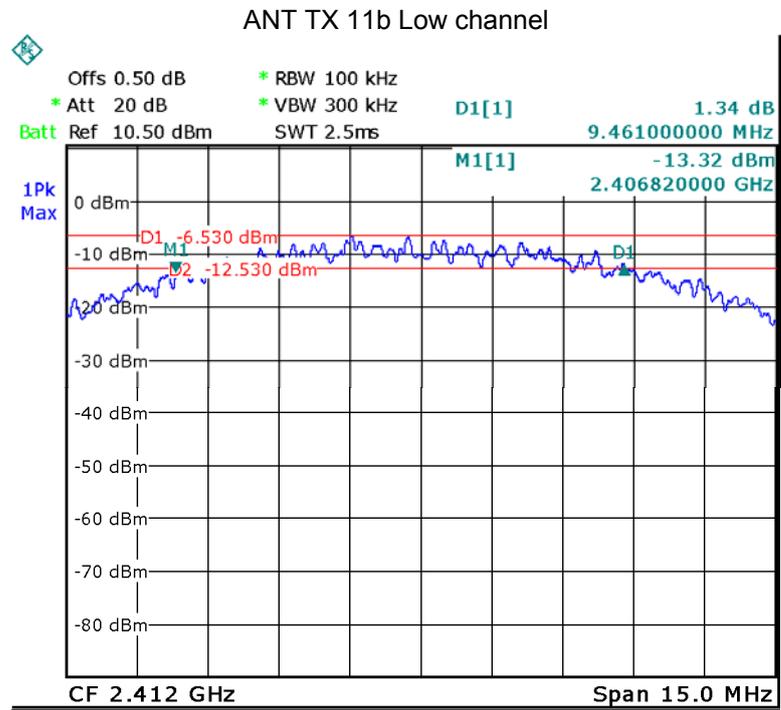


ANT TX 11b High channel

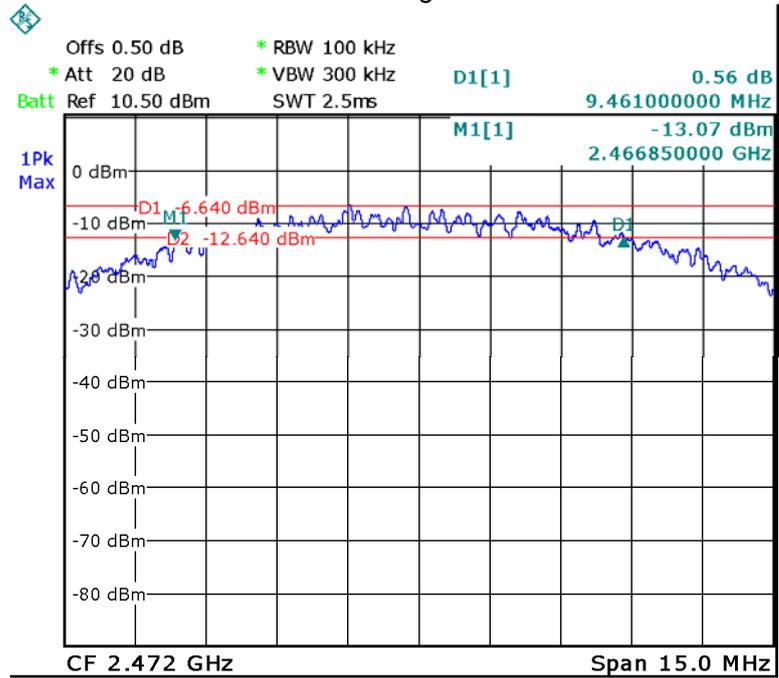


ANT TX 11g Low channel


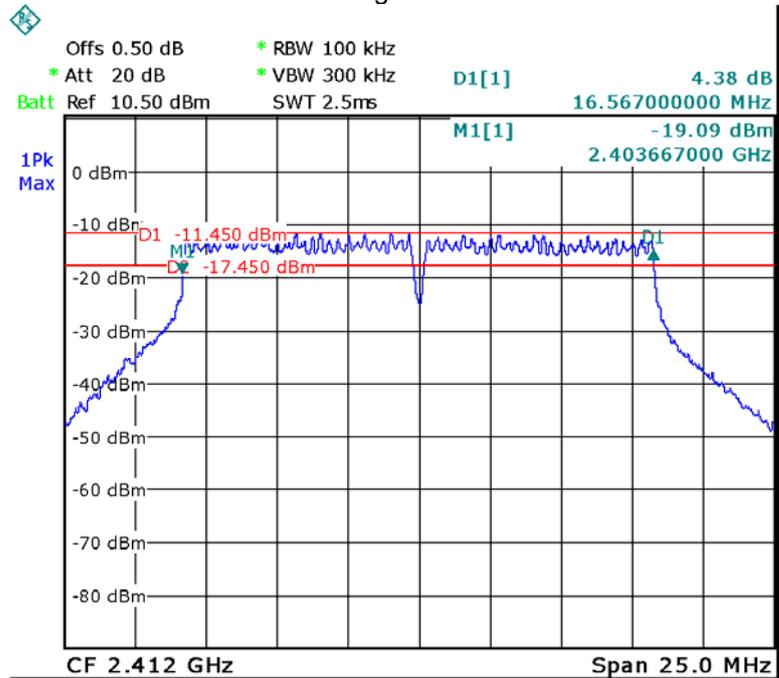




ANT TX 11g Middle channel


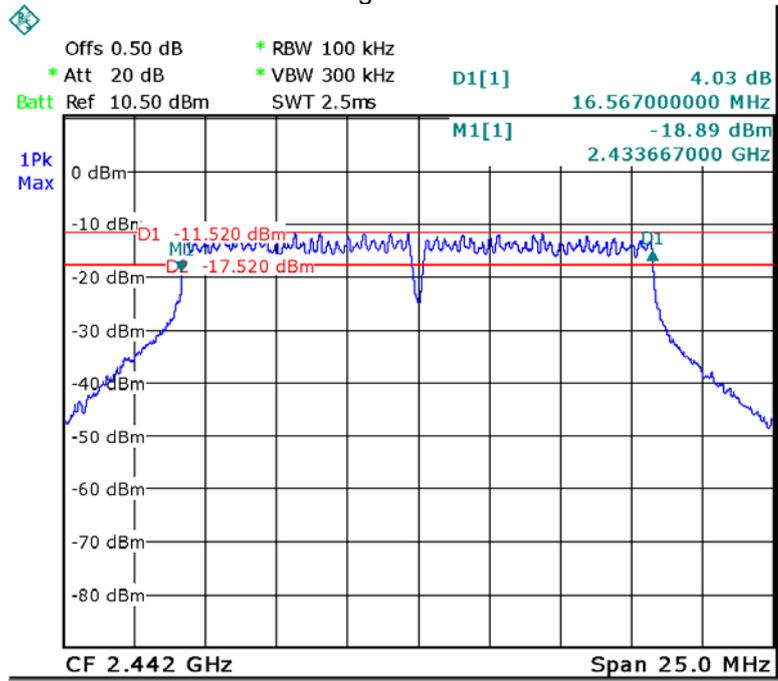


ANT TX 11g High channel

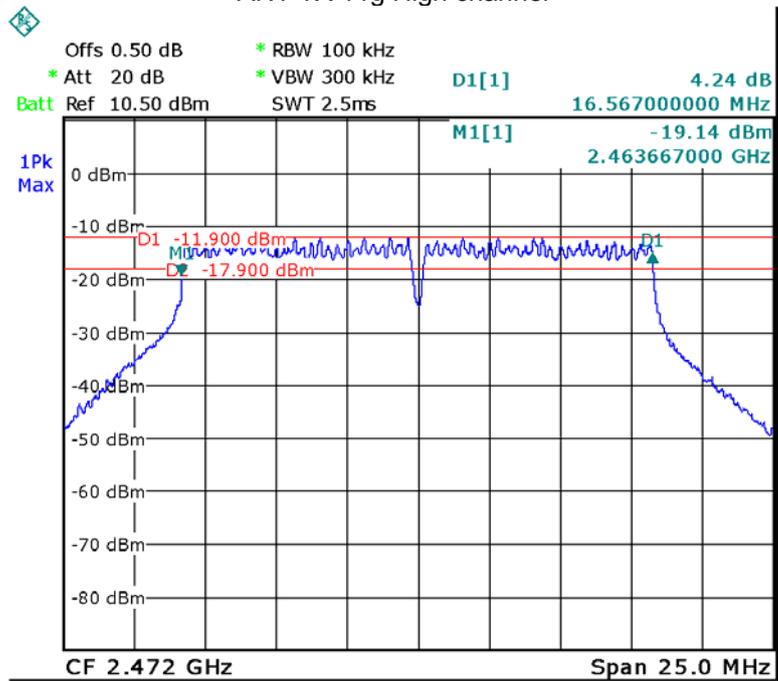

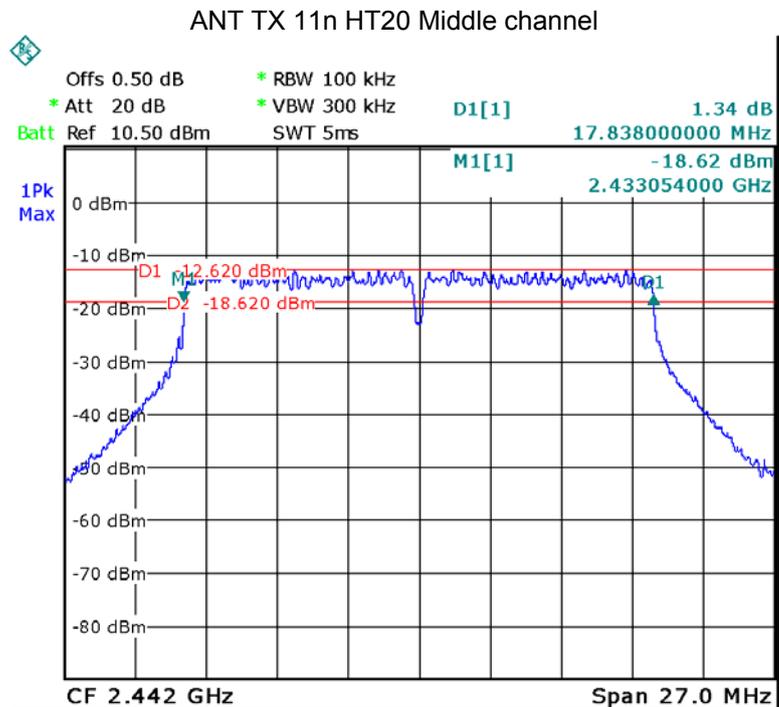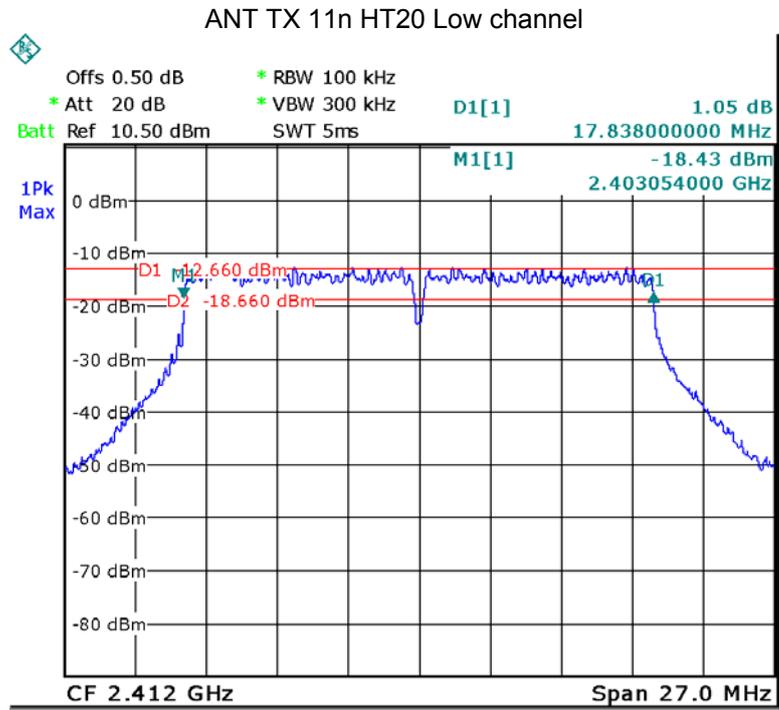

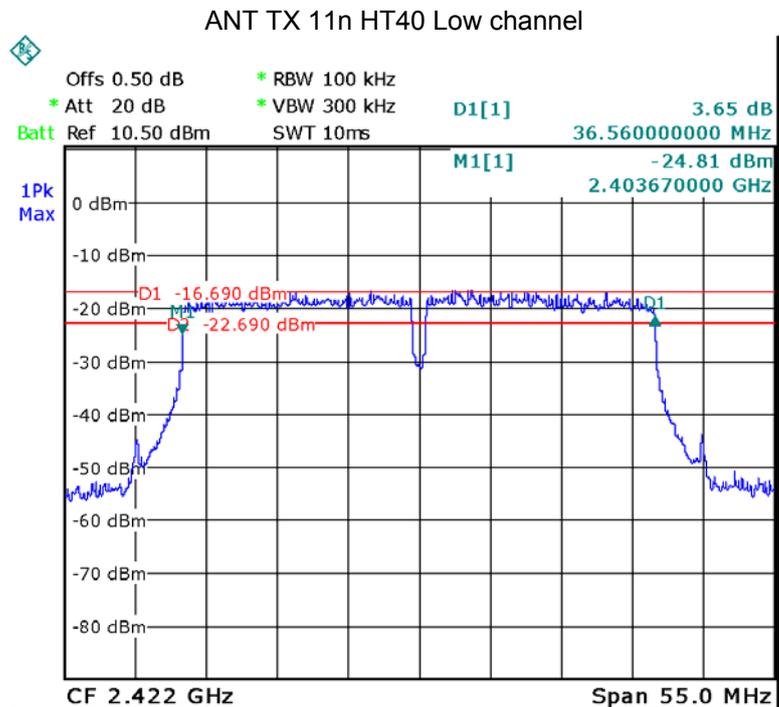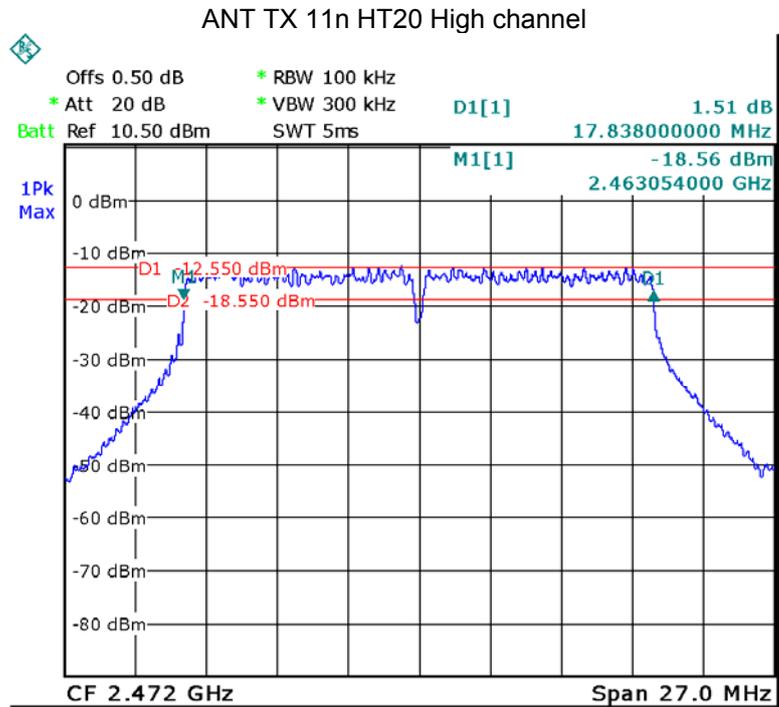

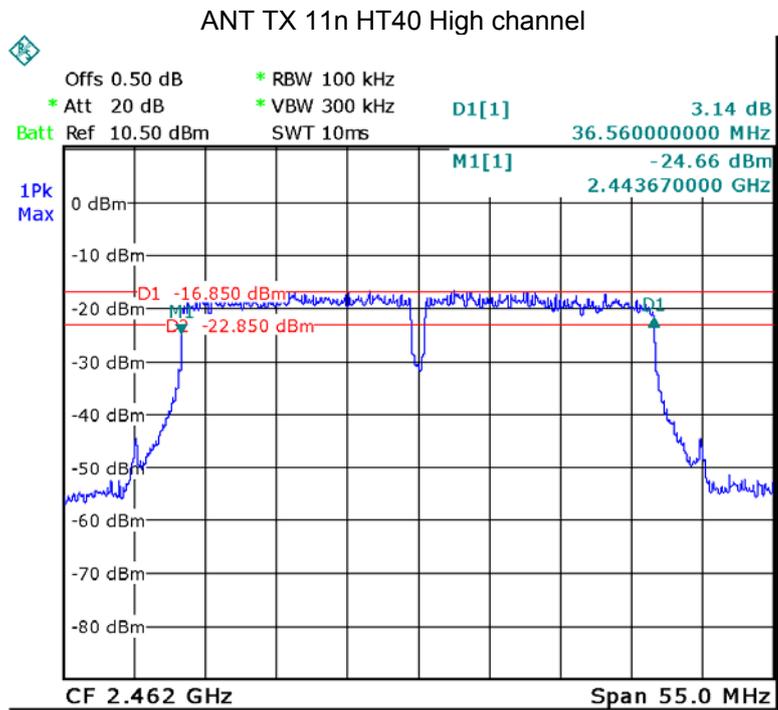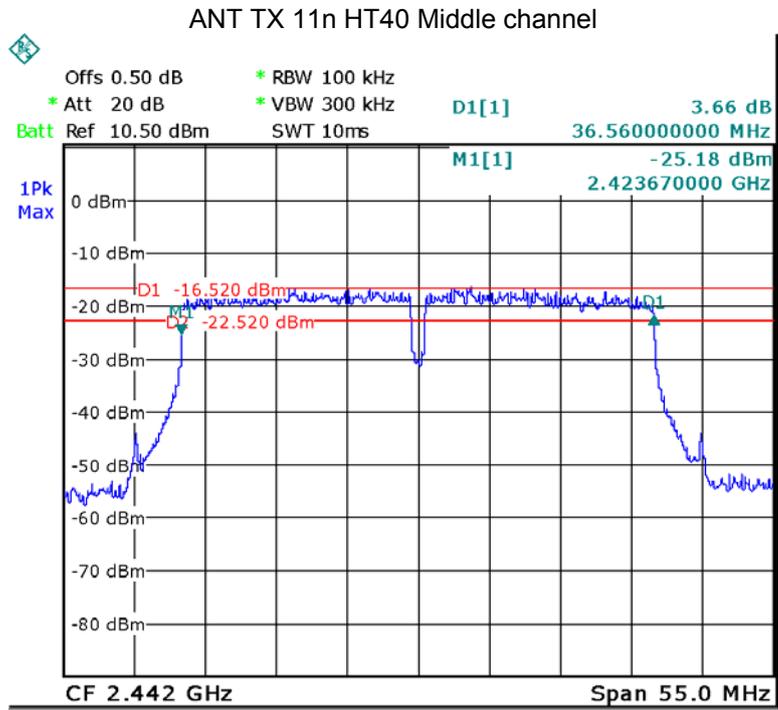

10 Maximum Peak Output Power

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r04

10.1 Test Procedure:


558074 D01 DTS Meas Guidance v03r04 section 9.1.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak, Set the span to fully encompass the DTS bandwidth.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


10.2 Test Result:

Operation mode	ANT	Maximum Peak Output Power (dBm)		
		Low	Middle	High
11b	ANT	8.72	8.46	8.58
11g	ANT	9.50	9.63	9.46
11n HT20	ANT	9.48	9.21	9.26
11n HT40	ANT	8.20	8.07	8.66
Limit				
1W/30dBm				


ANT TX 11b Low channel

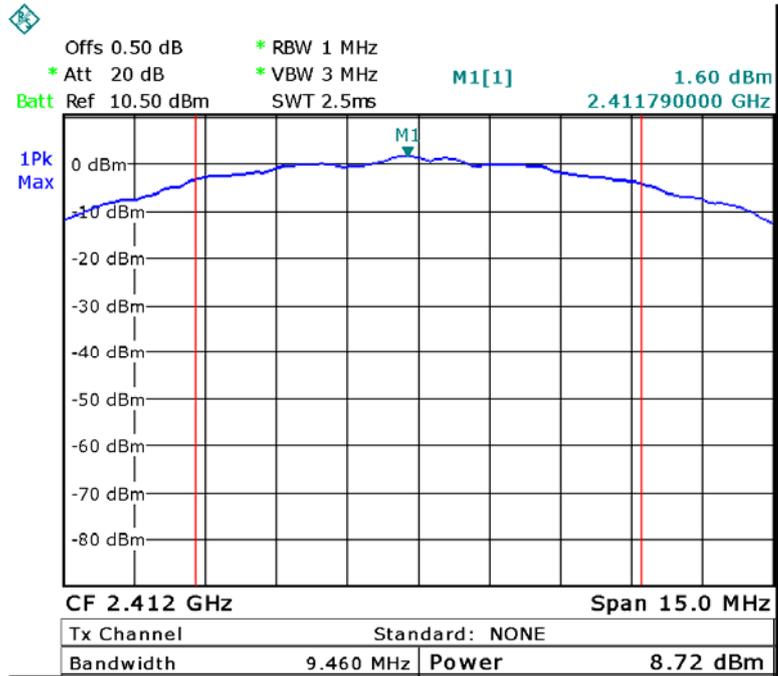


ANT TX 11b Middle channel

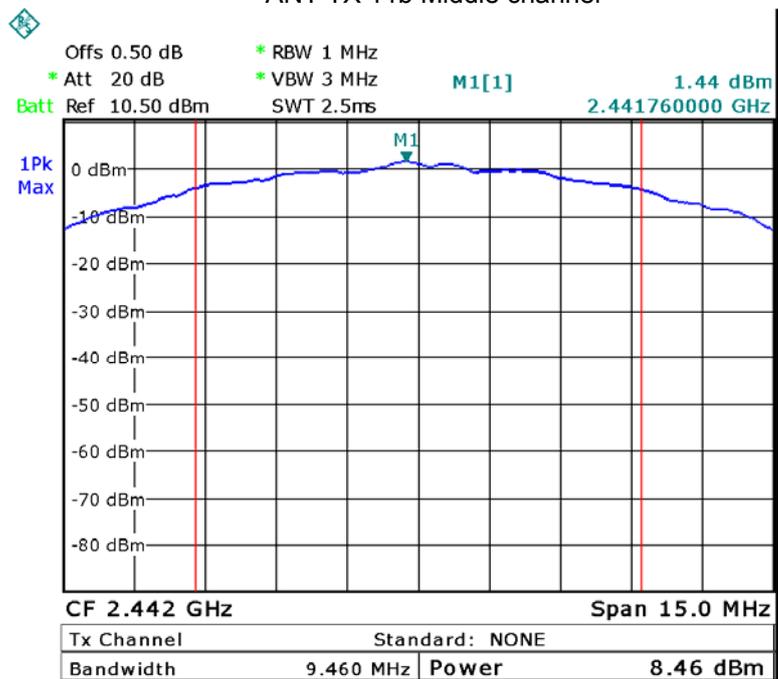


ANT TX 11b High channel

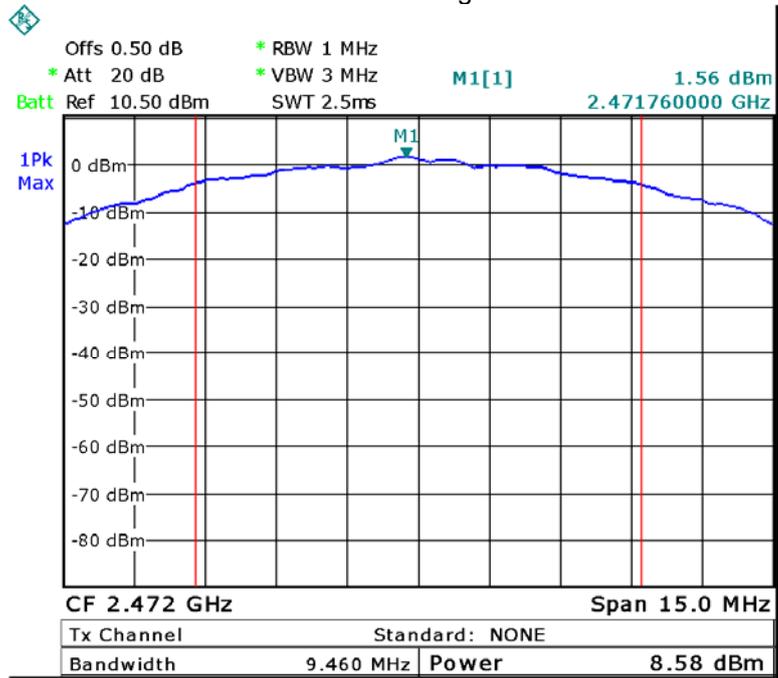


ANT TX 11g Low channel

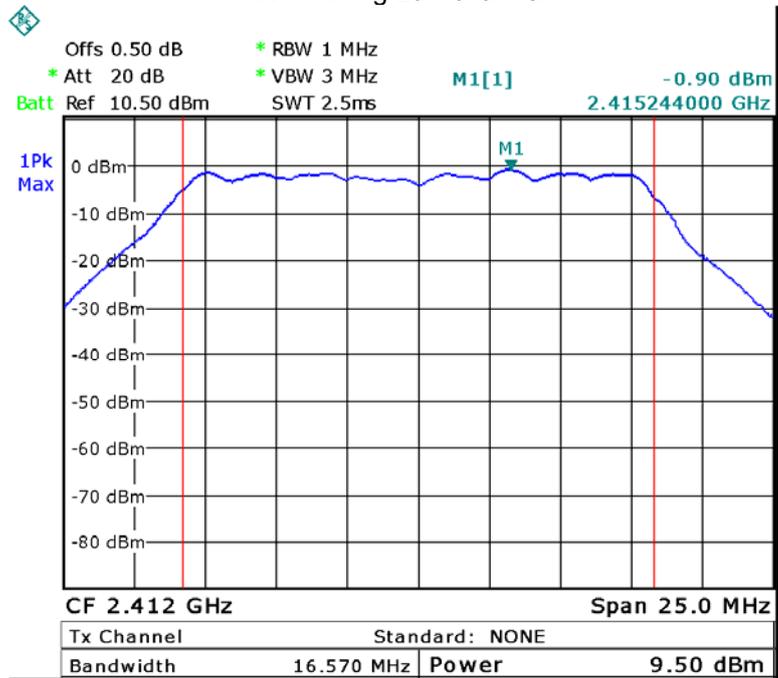


ANT TX 11g Middle channel

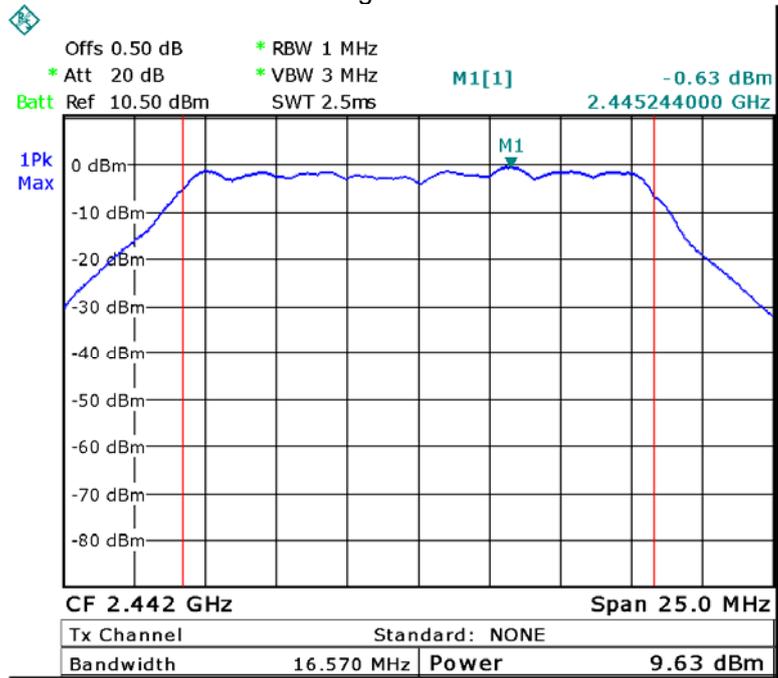


ANT TX 11g High channel

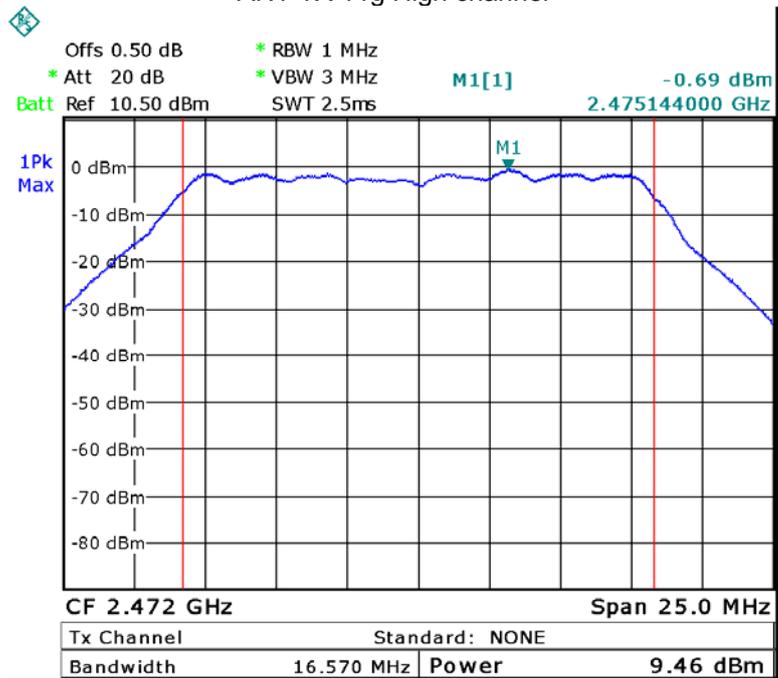


ANT TX 11n HT20 Low channel

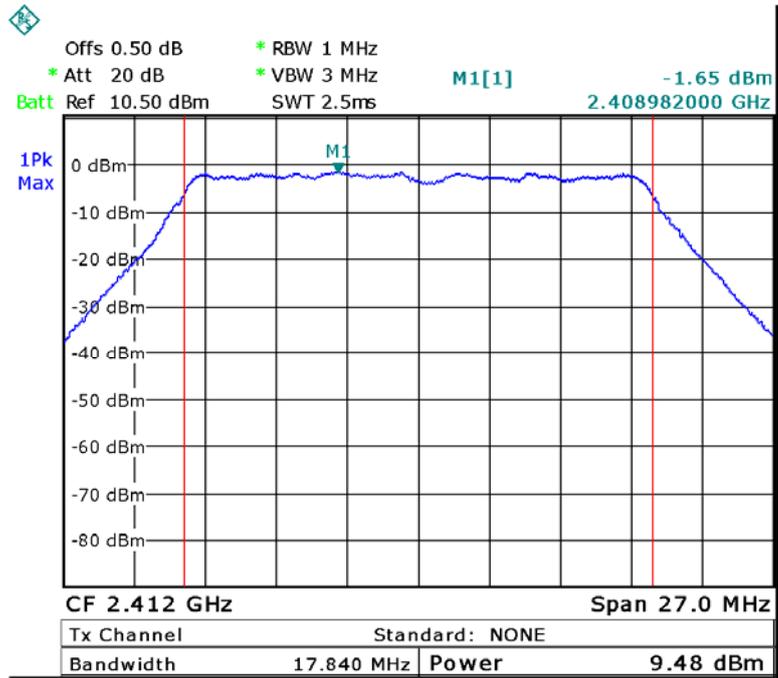


ANT TX 11n HT20 Middle channel

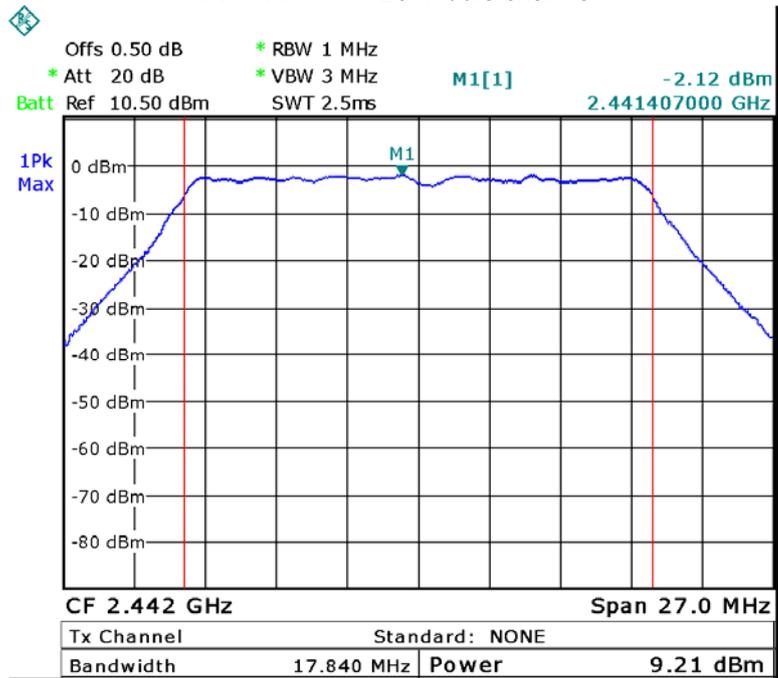


ANT TX 11n HT20 High channel

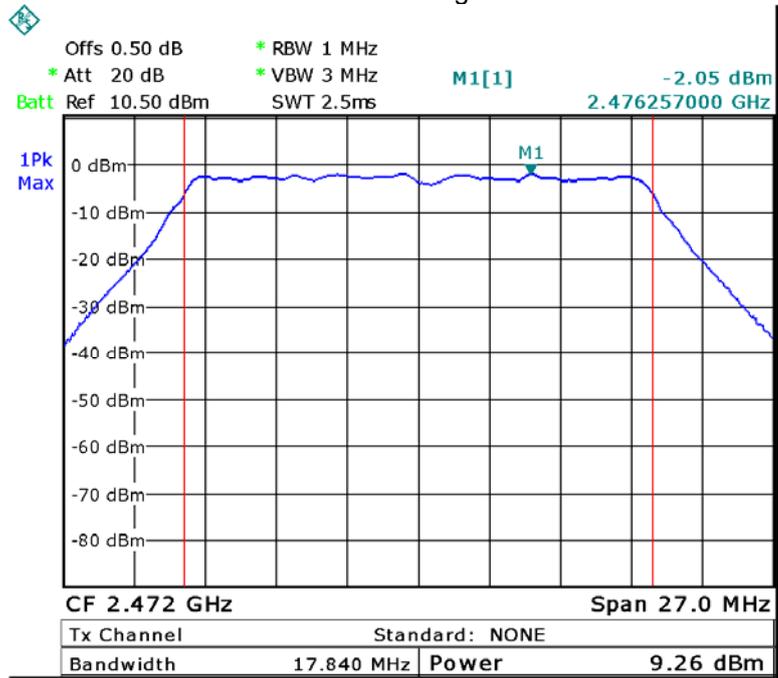


ANT TX 11n HT40 Low channel

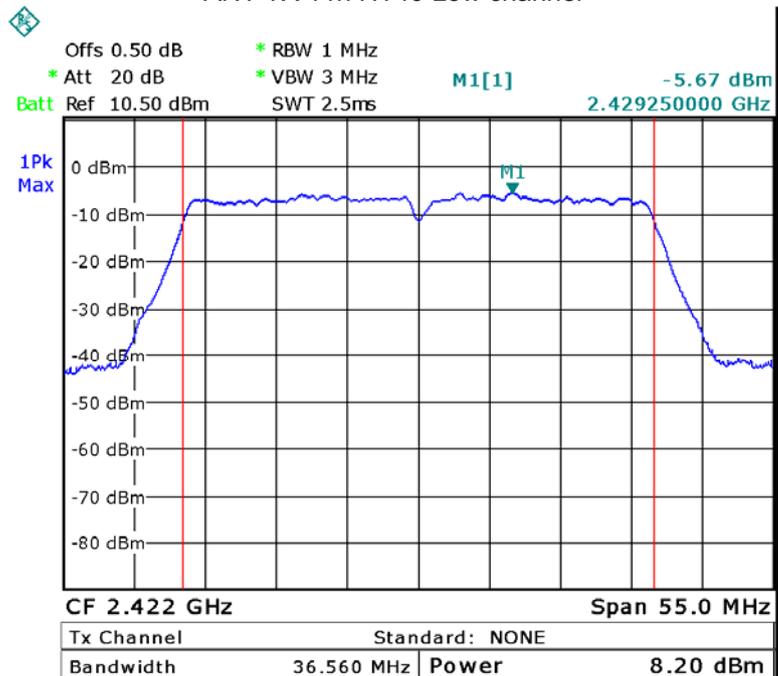

ANT TX 11n HT40 Middle channel

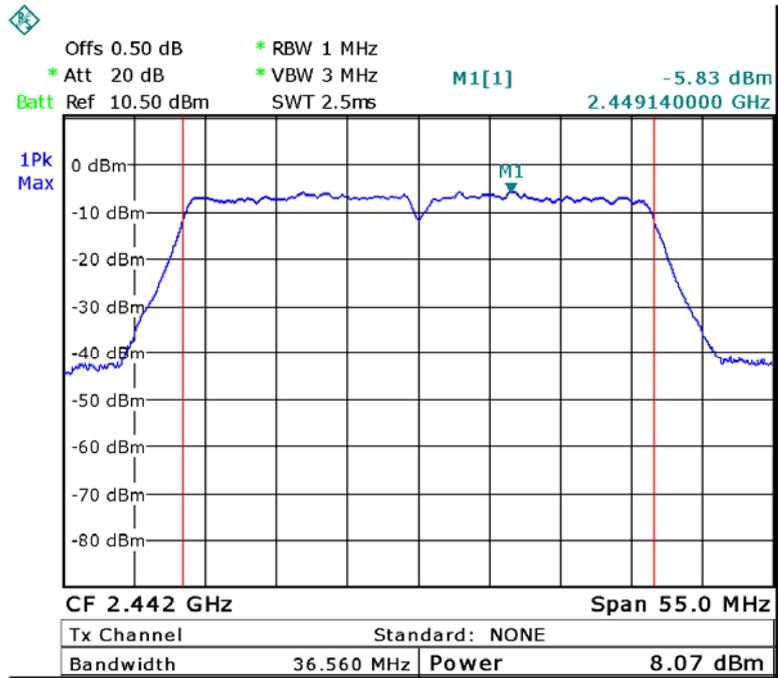

ANT TX 11n HT40 High channel

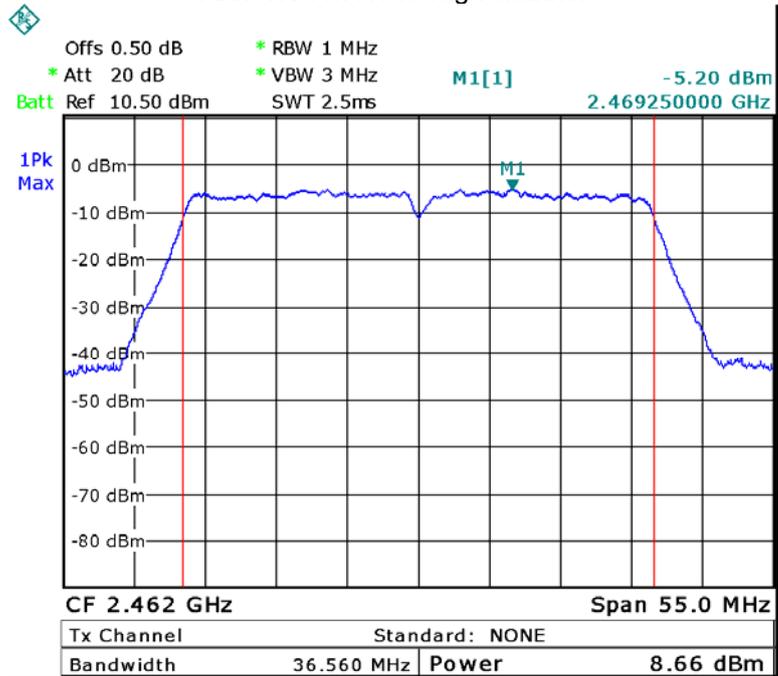

11 Power Spectral density

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: 558074 D01 DTS Meas Guidance v03r04

11.1 Test Procedure:


558074 D01 DTS Meas Guidance v03r04 section 10.2

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 3kHz. VBW = 10kHz , Span = 1.5 times the DTS channel bandwidth(6 dB bandwidth). Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


11.2 Test Result:

Operation mode	ANT	Maximum Peak Output Power (dBm per 3kHz)		
		Low	Middle	High
11b	ANT	-20.00	-20.79	-20.34
11g	ANT	-25.62	-25.90	-26.23
11n HT20	ANT	-26.47	-26.44	-26.10
11n HT40	ANT	-29.19	-29.73	-29.06
Limit				
8dBm per 3kHz				


ANT TX 11b Low channel

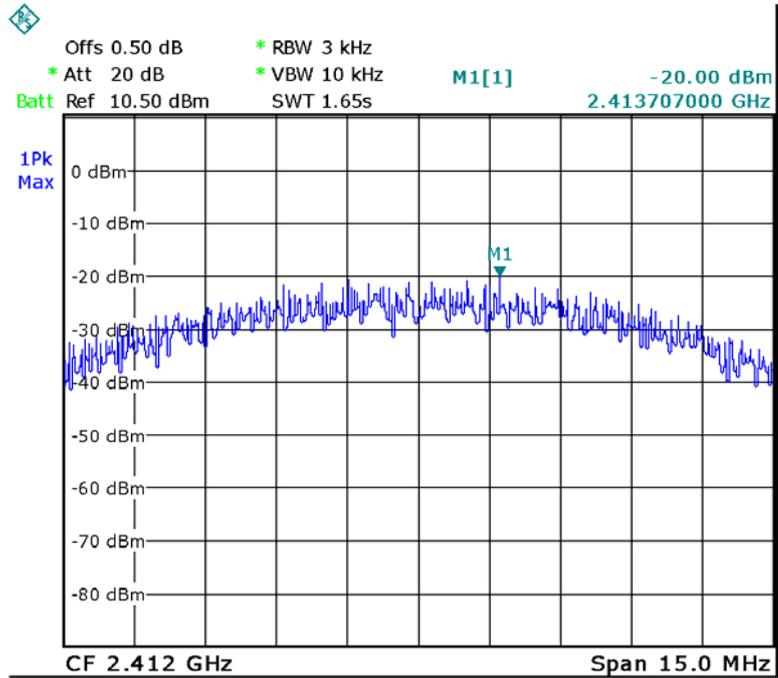


ANT TX 11b Middle channel

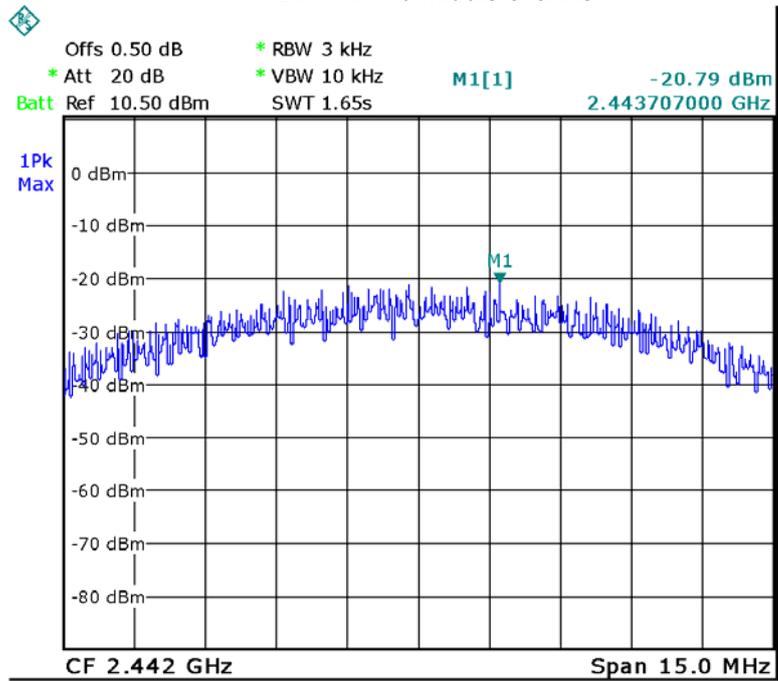


ANT TX 11b High channel

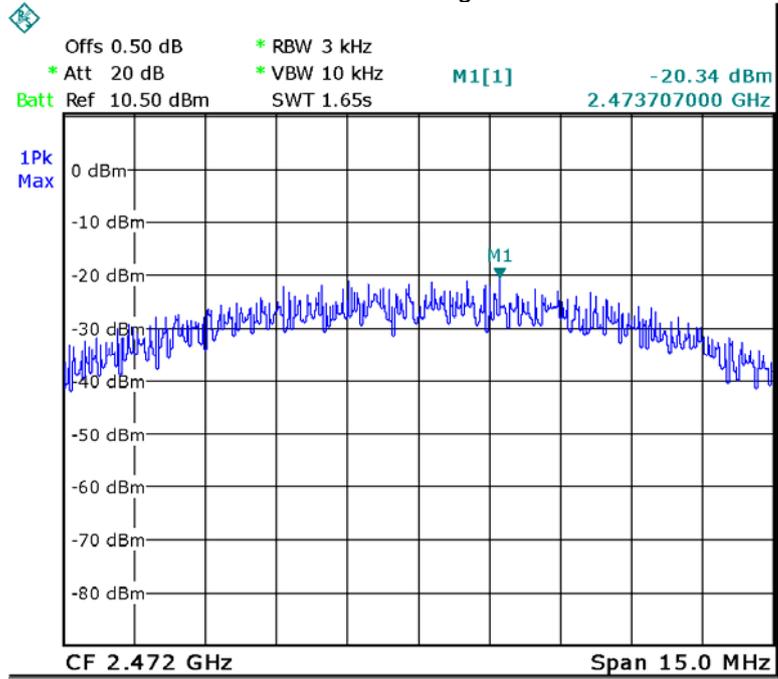


ANT TX 11g Low channel

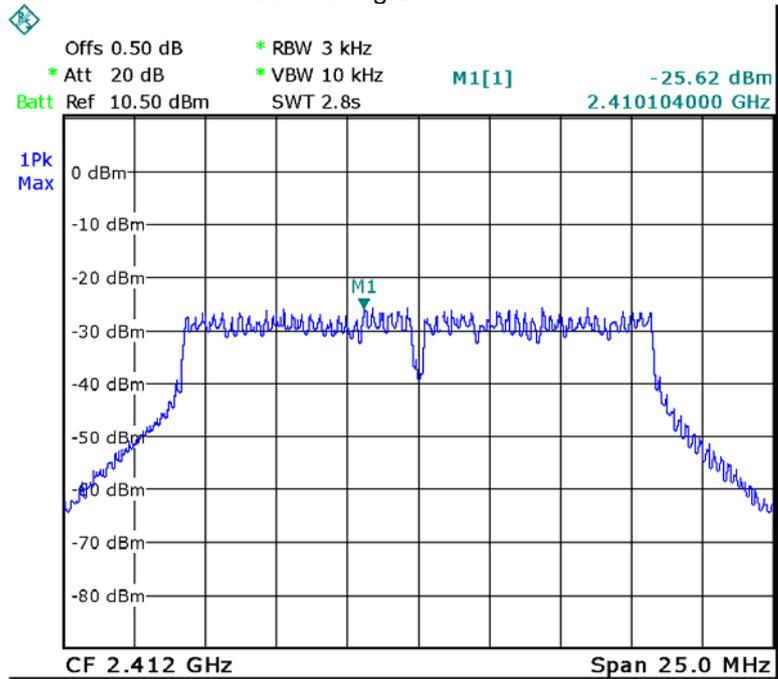


ANT TX 11g Middle channel

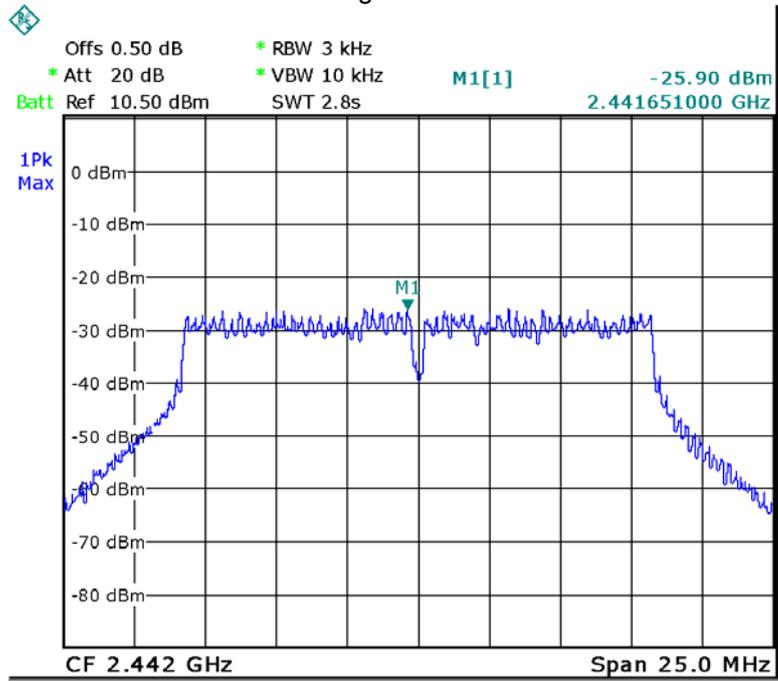


ANT TX 11g High channel

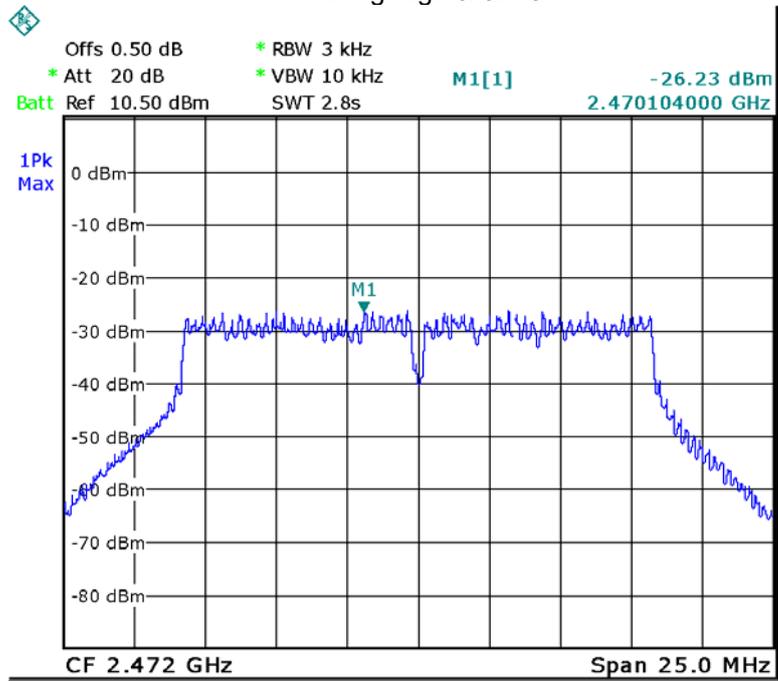


ANT TX 11n HT20 Low channel

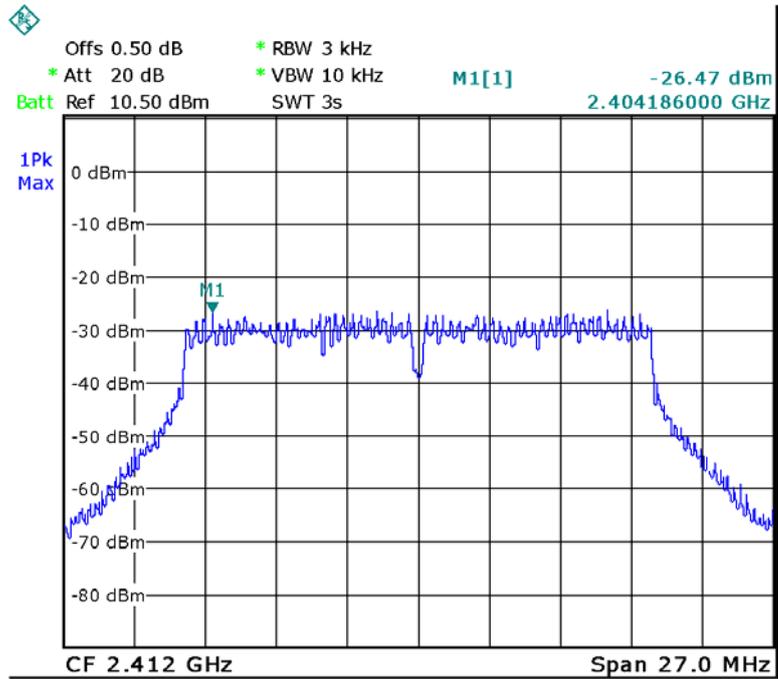


ANT TX 11n HT20 Middle channel

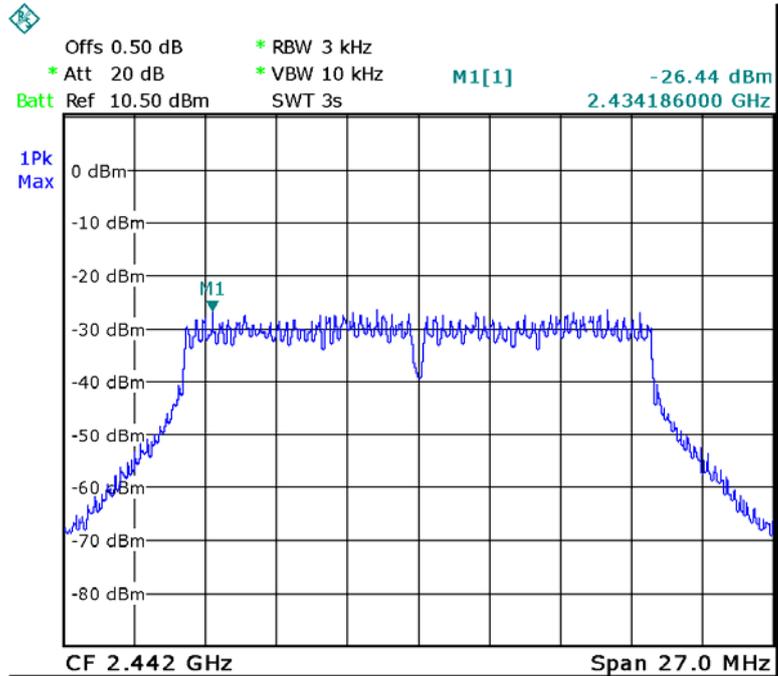


ANT TX 11n HT20 High channel

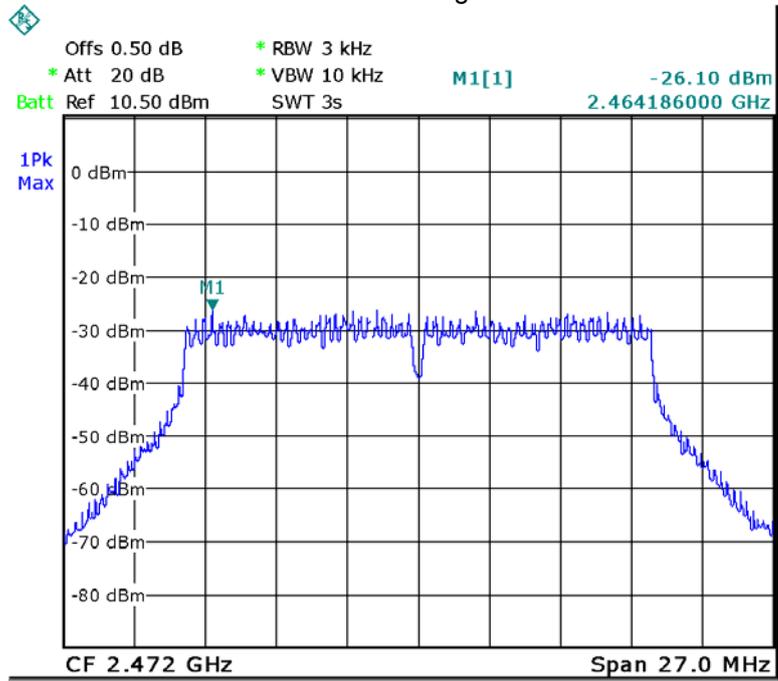


ANT TX 11n HT40 Low channel

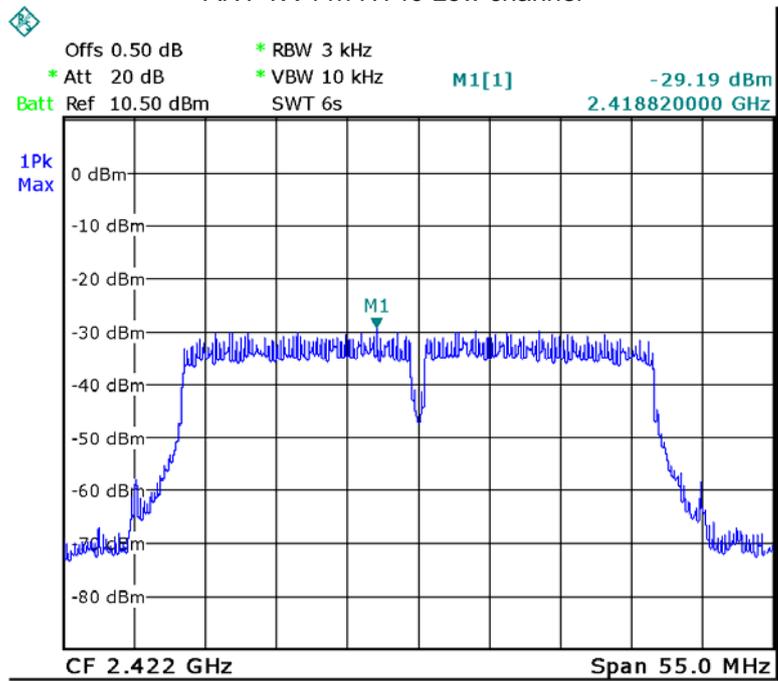

ANT TX 11n HT40 Middle channel

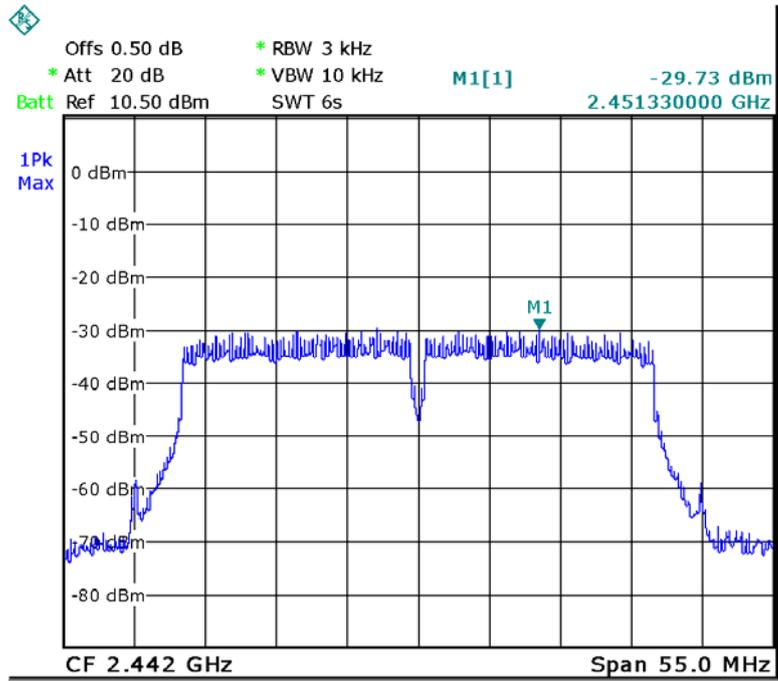

ANT TX 11n HT40 High channel

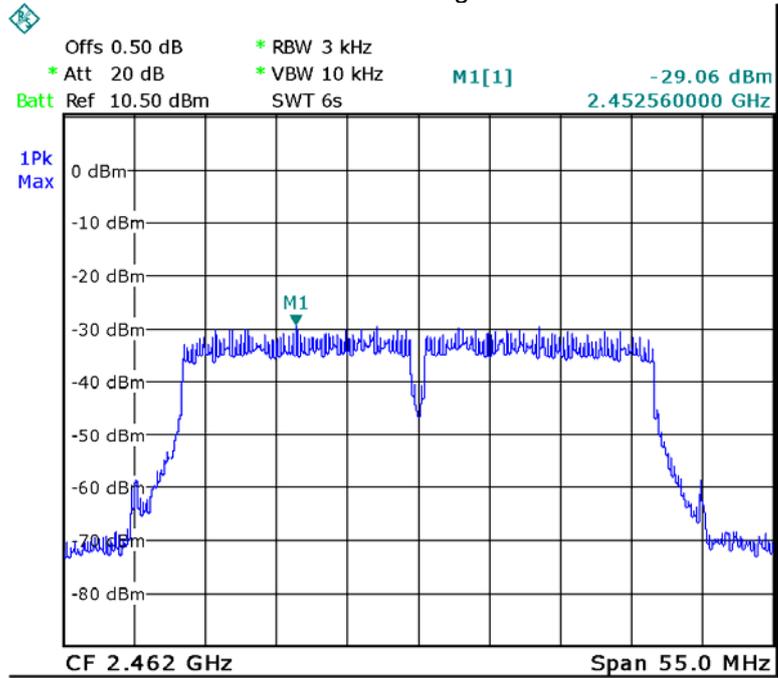

12 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a Internal integrated Ceramic Antenna fulfill the requirement of this section.

13 RF Exposure

Test Requirement: FCC Part 1.1307
 Evaluation Method: FCC Part 2.1091

13.1 Requirements

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

13.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

13.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$


From the peak EUT RF output power, the minimum mobile separation distance, $d=0.2\text{m}$, as well as the gain of the used antenna, the RF power density can be obtained

Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Peak Output Power (dBm)	Peak Output Power (mW)	Power Density (mW/cm ²)	Limit of Power Density (mW/cm ²)
0.00	1.000	9.63	9.18	0.001827	1


14 Photographs – Model BH71000 Test Setup

14.1 Radiated Emission

Test frequency below 30MHz at Test Site 2#

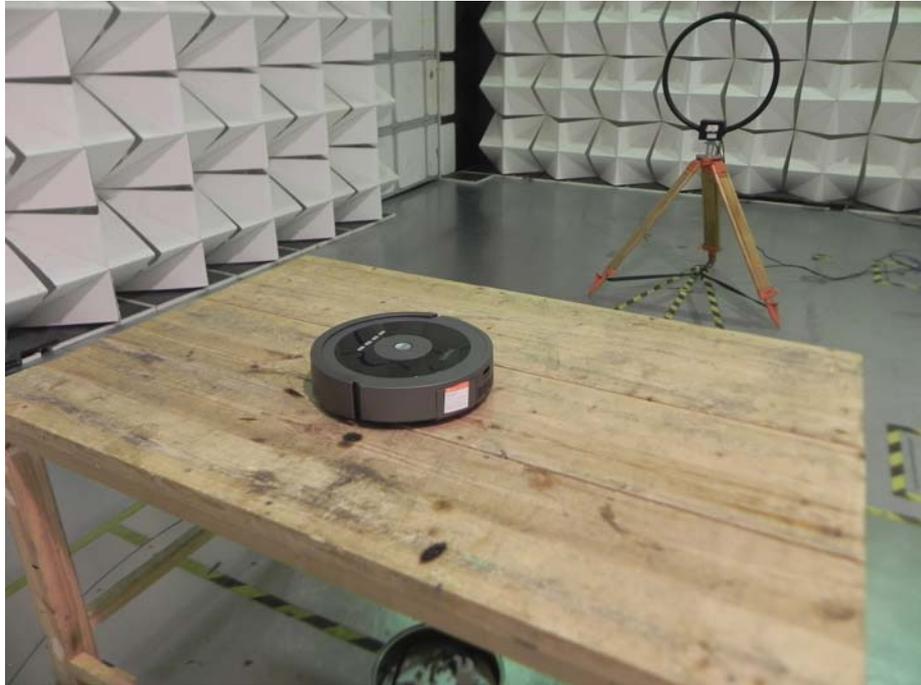

Test frequency from 30MHz to 1GHz at Test Site 2#

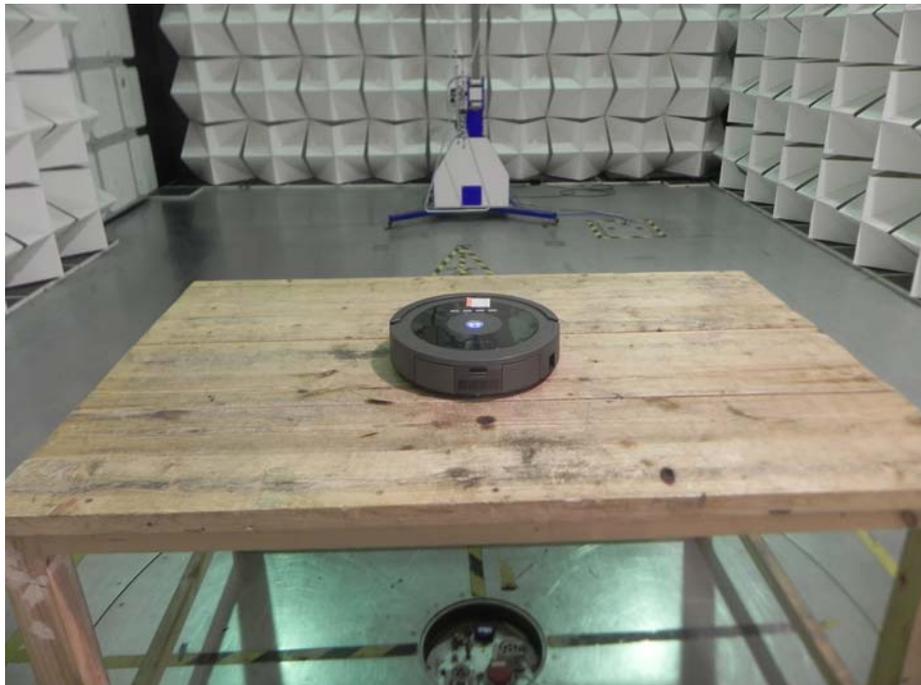

Test frequency above 1GHz at Test Site 1#




14.2 Conducted Emission at Test Site 1#




15 Photographs - Constructional Details

15.1 Model BH71000-External View






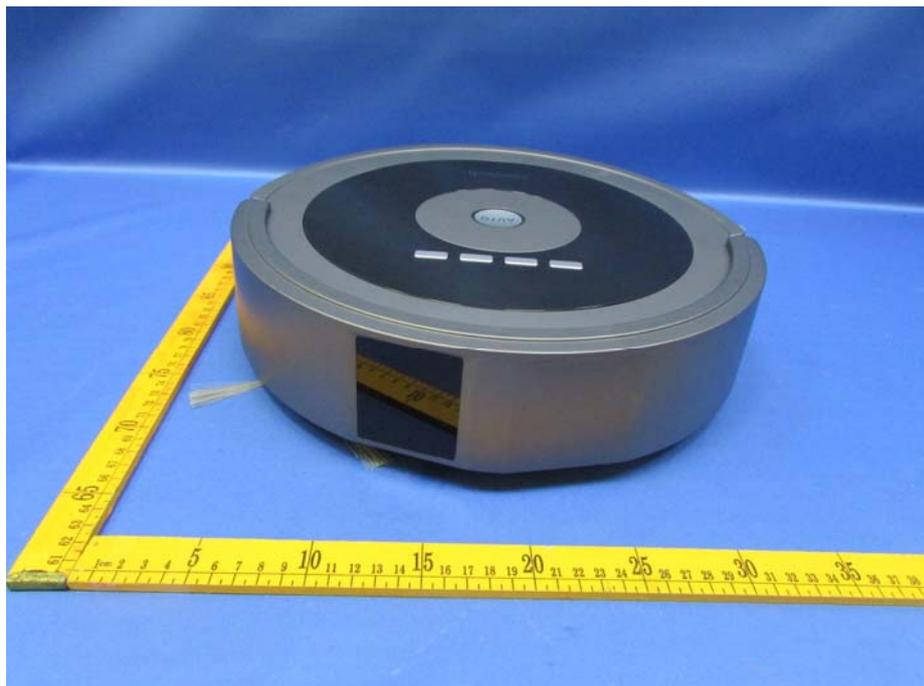



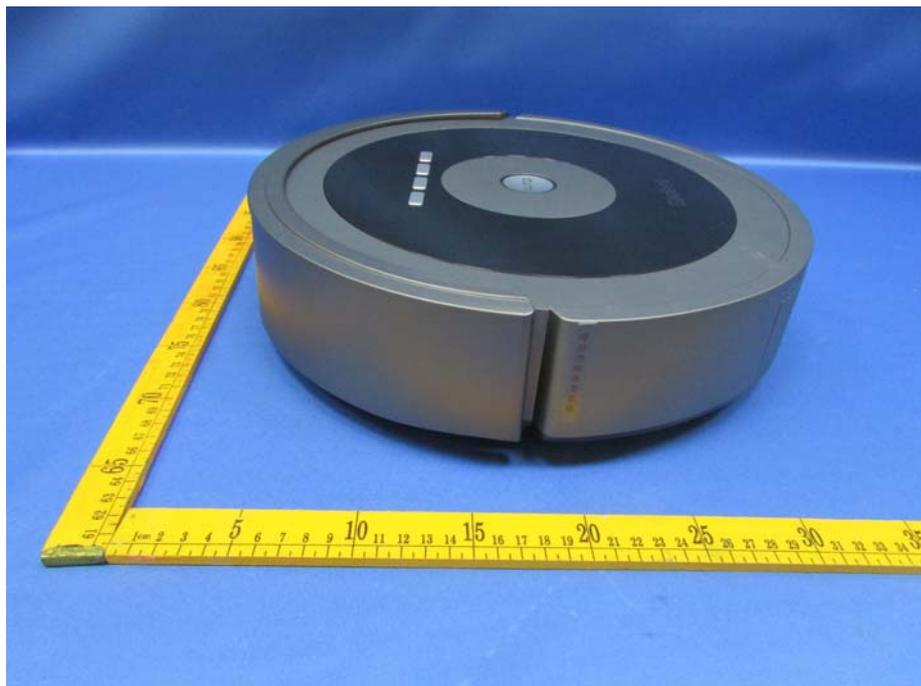








15.2 Model BH71000–Internal View

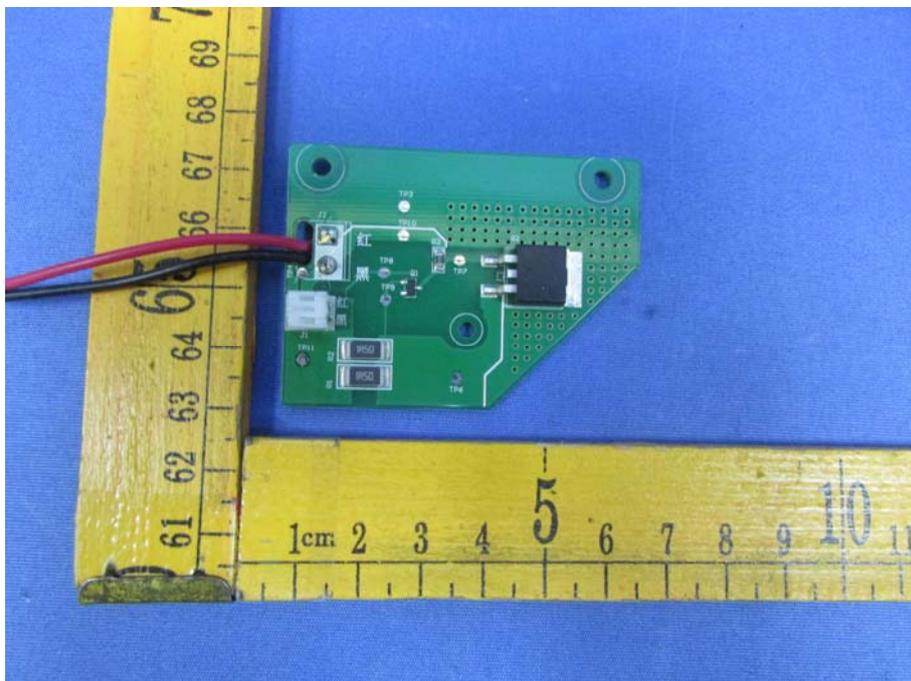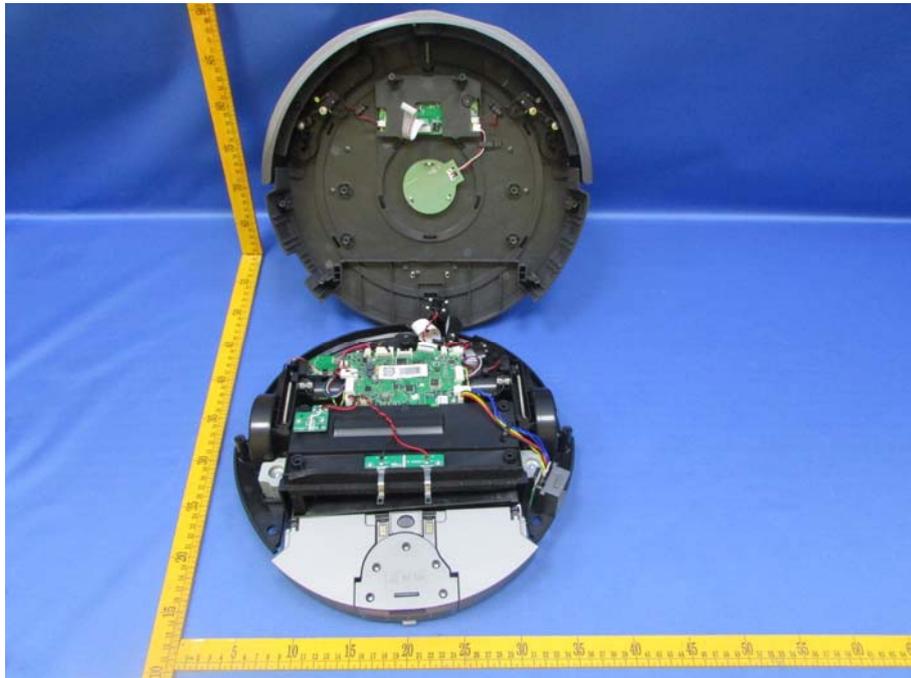


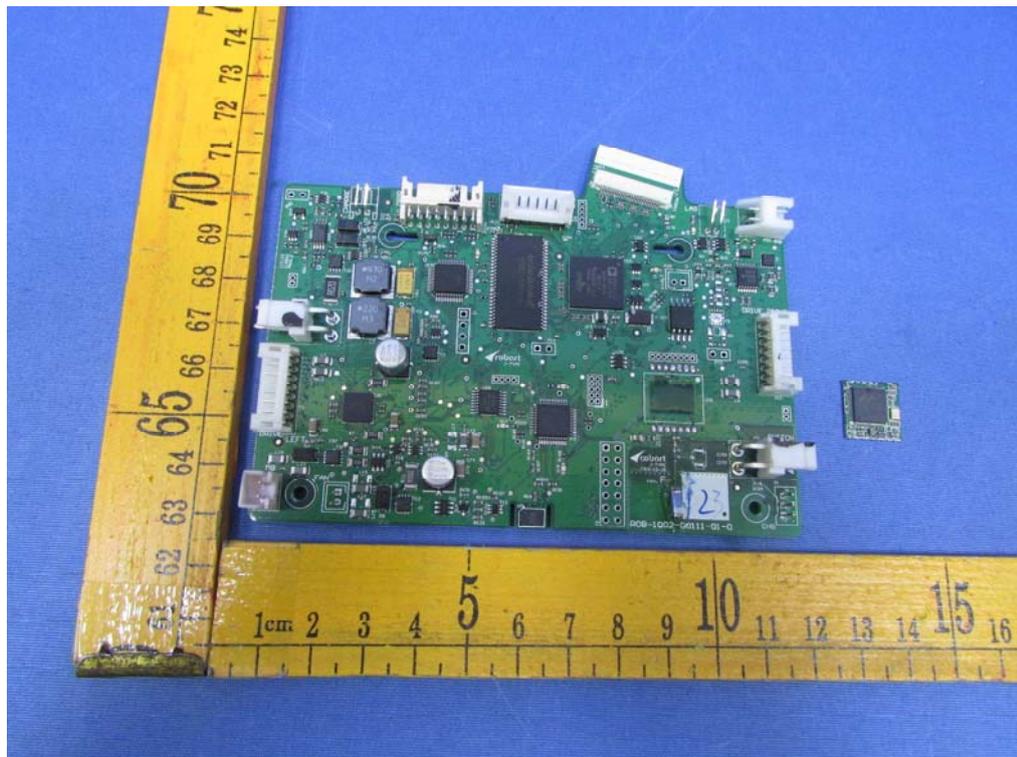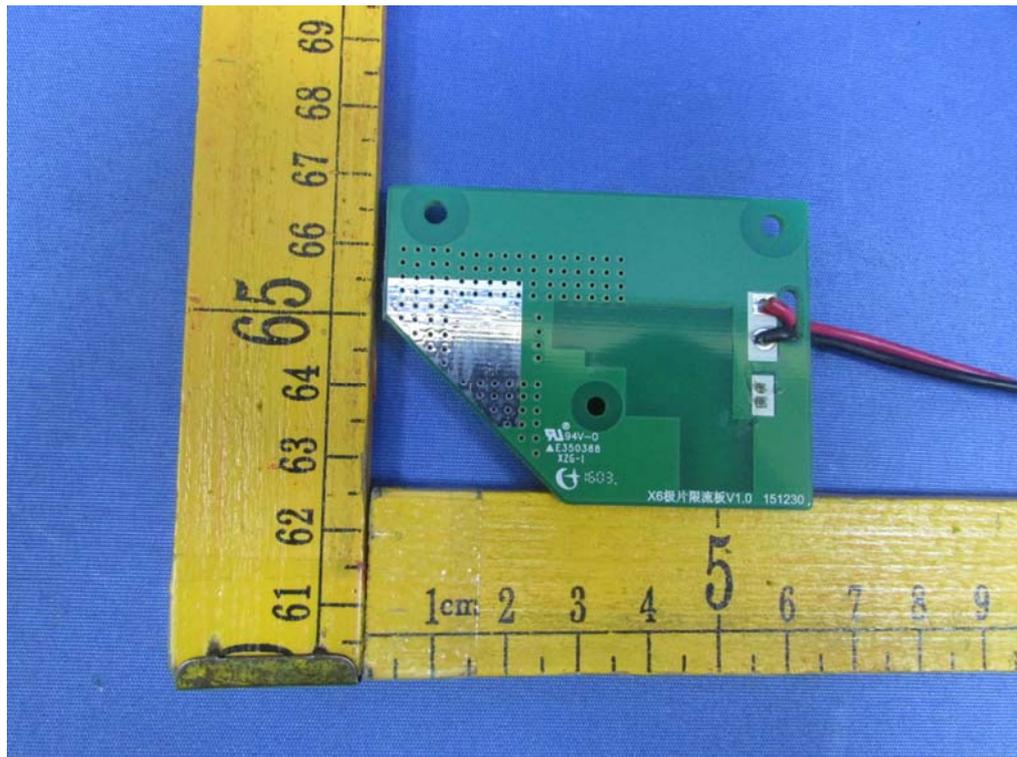

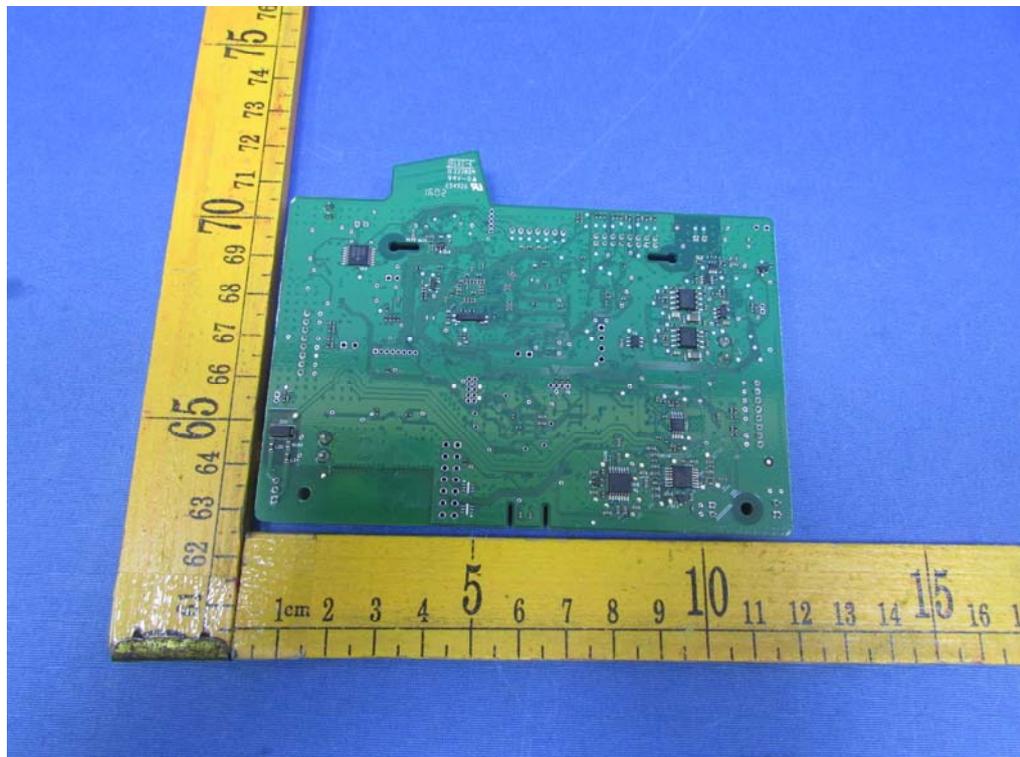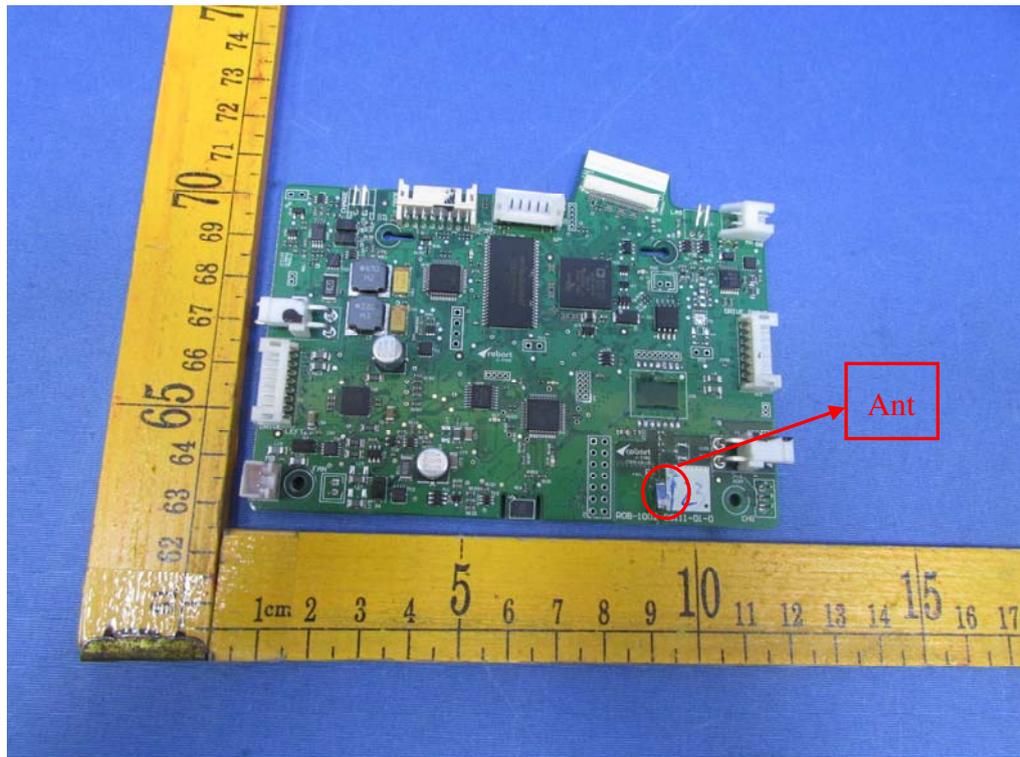

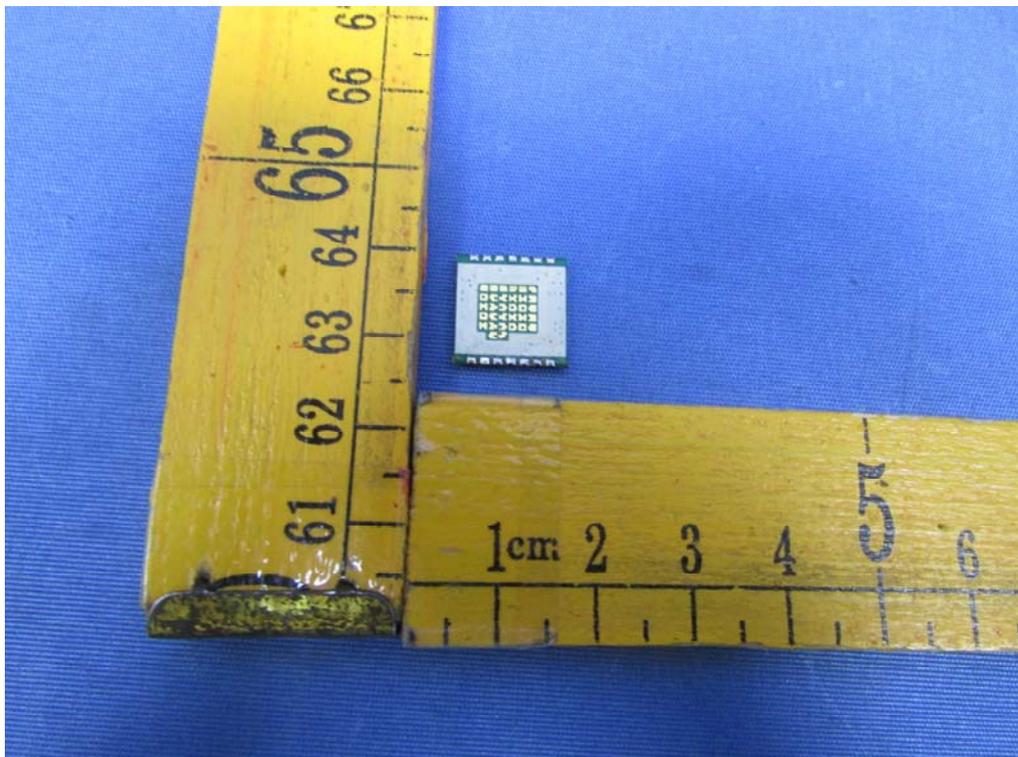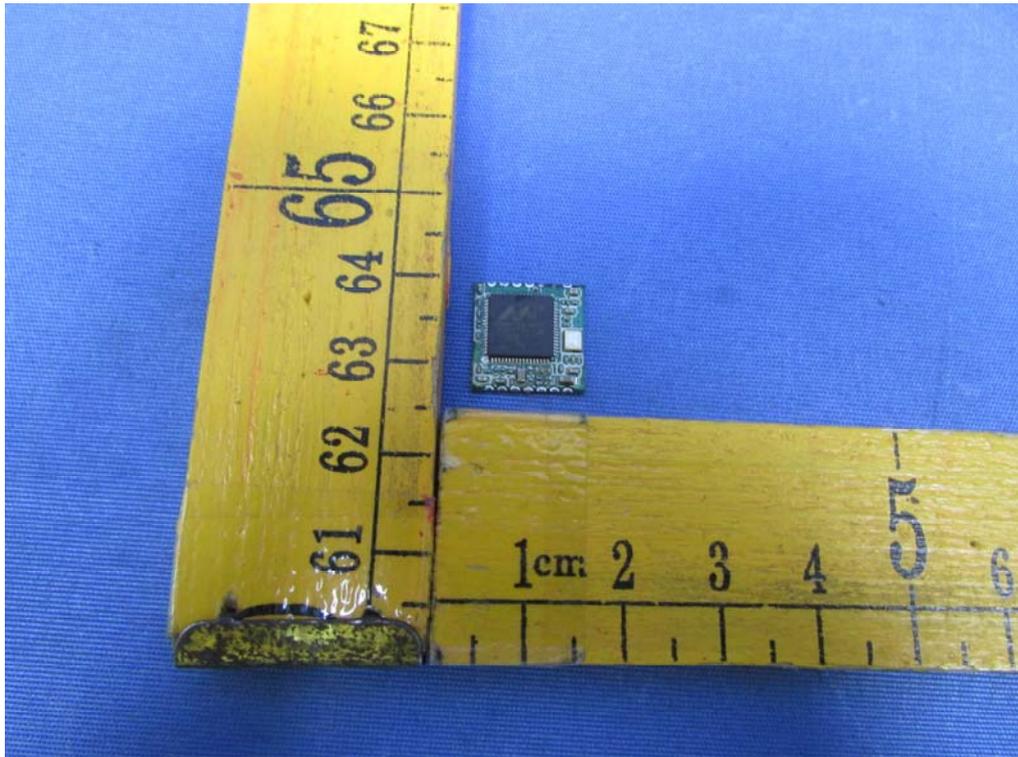

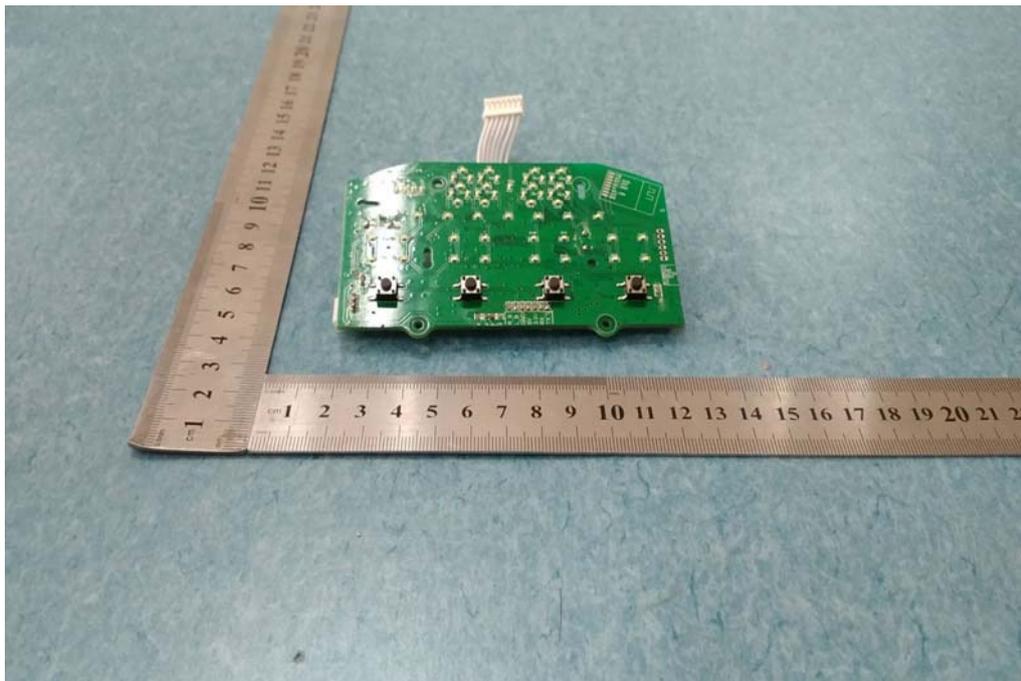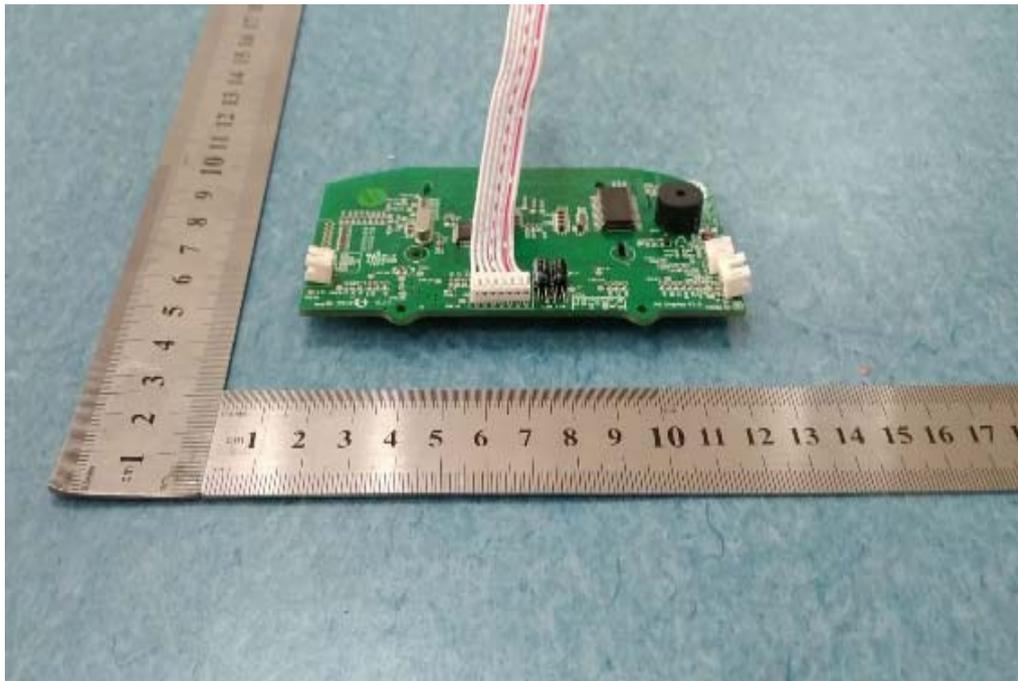

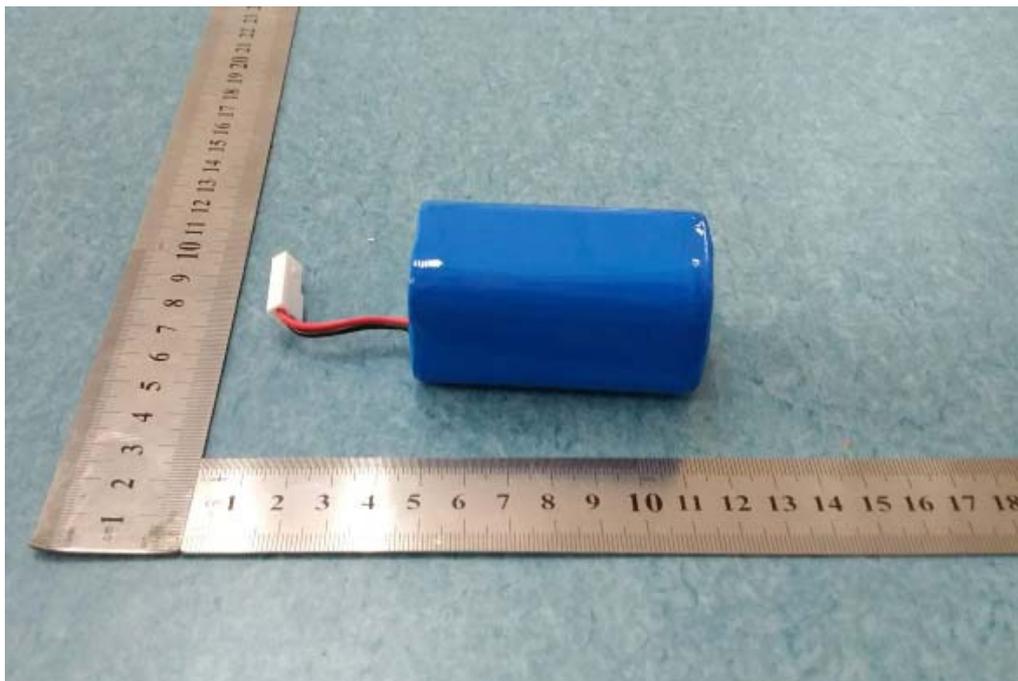



====End of Report====