mm,
mm, -177.588 mm
The state of the s
S Comments

Manufacturer
Address
Antenna Model
Number

WLAN 2.4G (Ch 1 - Ch 13)

Snap Inc.

WLAN 5G (Ch 36 - Ch 173)
WLAN 6E (Ch 1 - Ch 233)

WLAN 2.4G: 3.2 dBi

Max Antenna

Gain per Band

WLAN 5G: 3.6 dBi

WLAN 6E: 4.1 dBi


Manufacturer


Name


Supported


Antenna Type Internal, Inverted Multiple-L Antenna


-		1		2		3		4		5		6		7	7		8
	UNLE	ESS OTHERWI	SE SPECIFIE	:D:							REV A R		ECO/DESCRIF PRODUCTION		FFF	DATE 3 21 2024	APPROVER SNAP PD
A	1.	ALL GEOMET DRAWING SH TOLERANCES OTHERWISE	RY IS TO BE ALL BE USED ONLY AND S INDICATED	DERIVED FR TO INDICAT SHALL BE USE	XOM THE 3D C E CRITICAL D AS REFERE	AD DATABASE. DIMENSIONS AND NCE UNLESS					_ /x / ·		77100007707		1 66		301 15
	2.	FIRST ARTI	CLE INSPECT	TON TO BE C	ONDUCTED ON	DIMENSIONS											
	3.	STATISTICA BE USED FO	L PROCESS C	TION AND QU	THESE DIMEN JALIFICATION	ISIONS SHALL I OF PROCESS											
		THE PLANES X-Y PLANE Y-Z PLANE X-Z PLANE	OF THE ABS = DATUM A = DATUM B = DATUM C	SOLUTE COORD	INATE SYSTE	TUMS, THE GEOME M ARE THE DATUM	REFERENCE	S BASIC. PLANES:									
В	5.	FINAL PART INITIATIVE ARTICLE IN	S. CERTIFIC	OMPLIANT WIT	H THE FOLLO LIANCE REQU	WING ENVIRONMEN VIRED WITH FIRST	NTAL T										
_		* REACH * HALOGE * CA PRO	IRECTIVE 20 REGULATION N FREE IEC POSITION 65 FLICT FREE	EC 1907/200 61249-2-21	96										e	∍	
	6.	PART SHALL GREASE, MO	BE CLEAN A	ND FREE FRO	M FOREIGN M CONTAMINANTS	ATERIAL, DIRT,	OIL,										
С		REQUIREMEN (PPAP) PRO UNLESS PPA	TS PER SNAF 00013, SUF P IS APPROV E FOLLOWING	PRODUCTION PLIER MUST ED BY SNAP	TE PART QUA I PART APPRO NOT MAKE AN QA AND PD T IST BE SUBMI	LIFICATION WAL PROCESS IY SHIPMENTS EAMS. AT A TTED WITH PPAP											
	8.	b). CPK	REPORT E PACKAGED	APPROPRIATE BE APPROVED	LY TO PREVE BY SNAP PD	NT DAMAGE DURIN	NG SHIPMENT.			_							
	9.	FLASH NOT	TO EXCEED C	.03mm UNLES	S NOTED OTH	ERWISE.					1						
	10.	PARTING LI	NE MISMATCH	NOT TO EXC	EED 0.03mm.						1			I/			
	11.	EJECTOR PI	N MARKS TO	BE FLUSH WI	TH OR NO MO	RE THAN 0.05mm	BELOW SURFA	CE OF PART.						1			
D	12.	NO VISIBLE ANY OFFSET	SHOCK LINE BETWEEN MU	S, STRETCH LTIPLE STAG	MARKS, OR O ES TO BE LE	THER TOOLING AF	RTIFACTS TO	BE PRESENT.					/				
						JECTOR SIZE TO		BY SNAP PD.			20		21		22		
	14.	ALL BURRS	TO BE LESS	THAN 0.05mm	١.									TORQUE-TO-FAII	LURE (FAI)		
4	15	GATES TO B	E LOCATED I	N INIDICATE	D REGIONS.									SHEAR	PULL PAI		
	16	EJECTORS T	O BE LOCATE	ED ON INDICA	TED SURFACE	S ONLY.											
	17	CAVITY AND	REVISION N	MARKINGS TO	BE LOCATED	IN INDICATED RE	EGIONS.										
E	18	GRAIN/ROLL	ING DIRECTI	ON AS INDIC	CATED.												
	19	BURR DIREC	TION AS IND	DICATED.													
		PLASTIC HO FINISH: SP COLOR: BLA	I-B2	GUBISHI XANT	'AR LDS 3720	PC/ABS											
	21	INSERT-MOL * HARDNE * FINISH	DED METAL: SS: 260HV - : ELECTROLE	SUS 304, 1/ 320HV. ME SS NICKEL P	ZH, 0.15mm ASURE AT IN PLATING, SEM	THICK DICATED LOCATION II-BRIGHT, 20m-5	DN. 5um THICK (8	-12% P CONTEN	IT BY WEIGHT)					METRIC	Ic	Inc.	
F	22	* HARDNE * FINISH * MEASUR	SS: 260HV - : ELECTROLE E TORQUE-TO	SS NICKEL P)-FAILURE FO	ASURE AT IN LATING, SEM OR BOTH SCRE	DICATED LOCATION II-BRIGHT, 20m-5 W BOSS LOCATION RMAL TO A3 DATU	5um THICK (8 VS.MINIMUM	1-12% P CONTEN 0.70 kgf-cm. 20N.	IT BY WEIGHT)	POLICE	HIS DIGINEERING CRAWING CONTROL OF THE PRINT, TO COLLECT MY NOT SET THAN 11 THE PRINT, T	AND SPECIFICATION PROS SECRET, WHICH PROSPECT IN THE PROSPECT OF THE PROSPECT IN THE PROSPECT	FIRST RELI PREPAR	EASED 07/12/ ED BY SNAP PD ED BY SNAP PD ERWISE SPECIFIED, S ARE IN MILLIMET	WIFI	RISER,	7-01 A
L		1		2		3		4			HISCORED TO ANY THIRD PA	ARTY WITHOUT Shop In	ASME Y14.5-	THIRD PRO		SCALE DRAWING	SHEET 1 OF 5
		1	1	۷	1	3	J	7		_	1	0	-	,		4	0

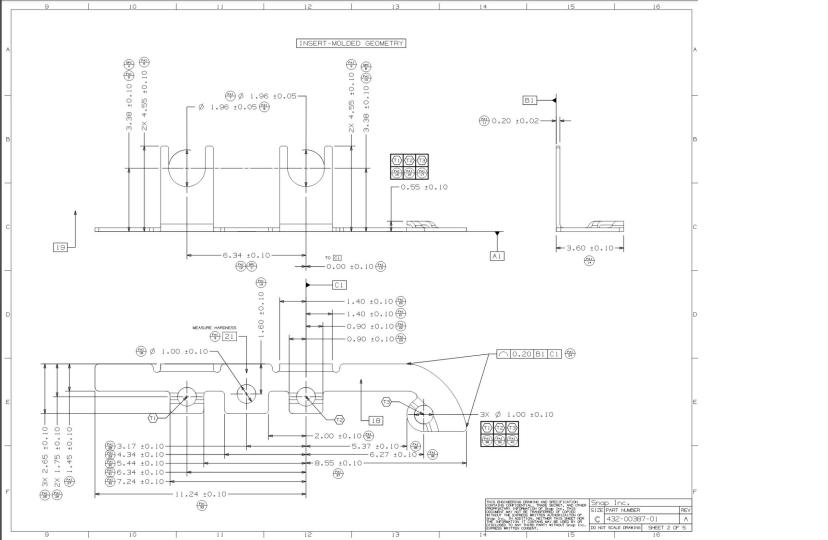

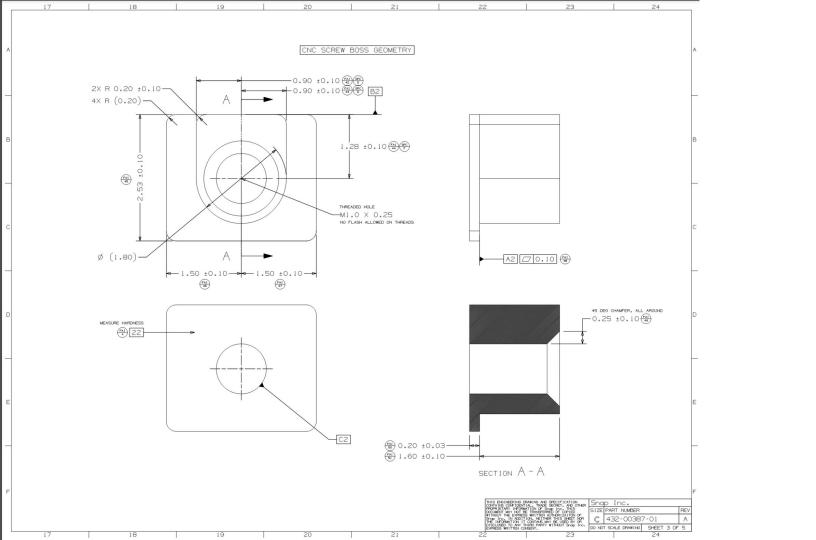

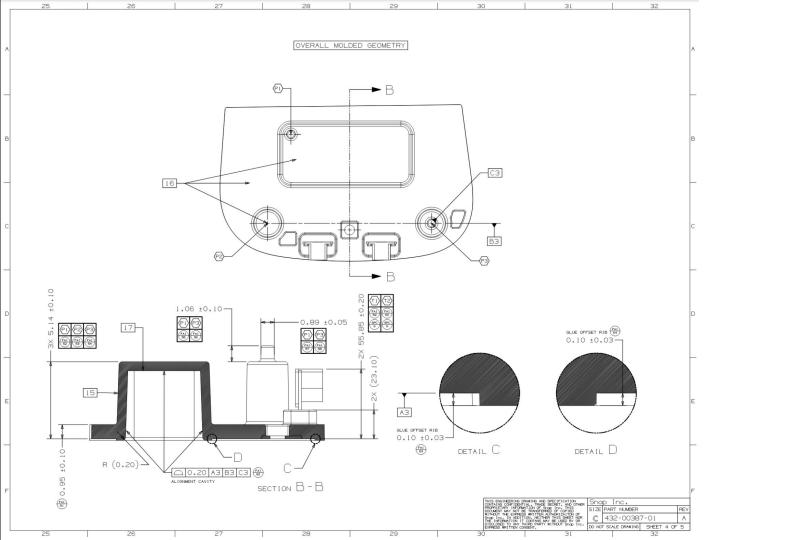

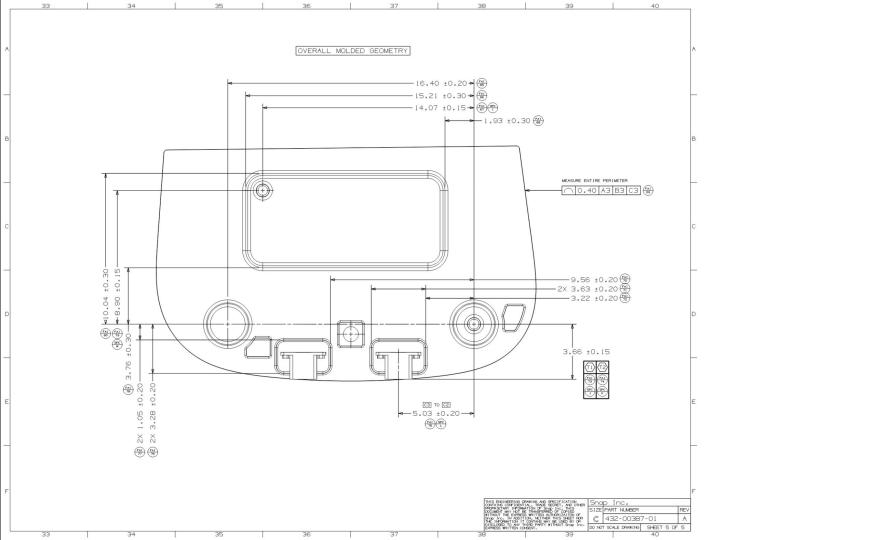


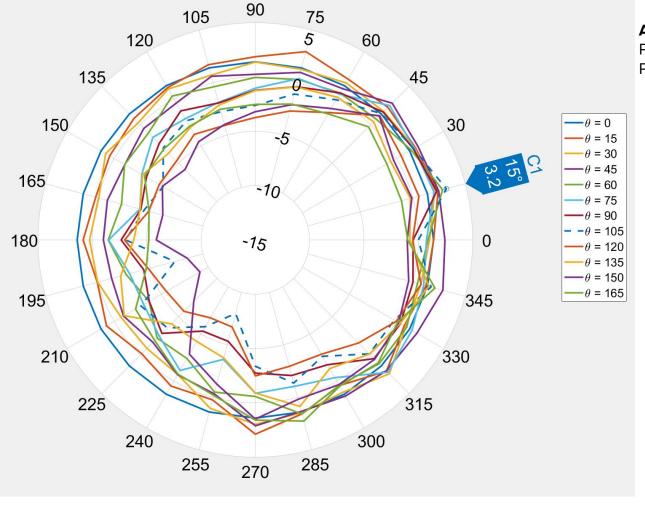


Antenna Radiation Pattern @2437 MHz

Peak Gain: 3.2 dBi

Peak Angle: Phi = 15 deg, Theta = 105 deg

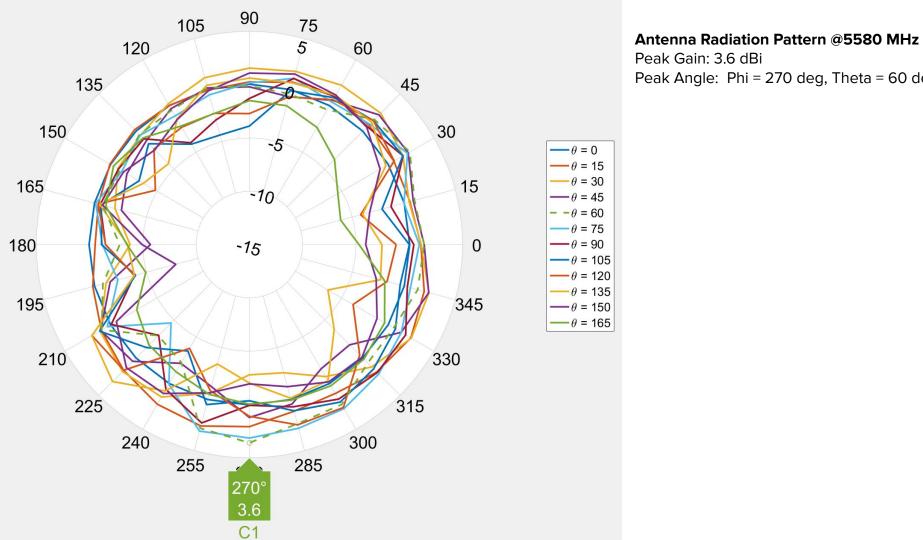

Peak Gain: 3.6 dBi Peak Angle: Phi = 270 deg, Theta = 60 deg

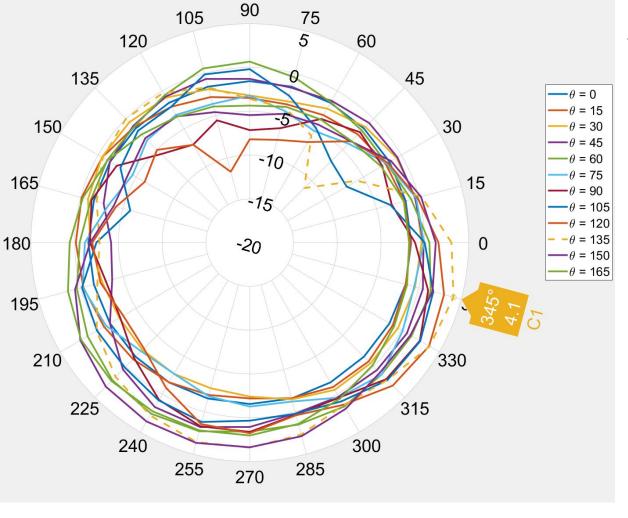

Antenna Radiation Pattern @6855 MHz

Peak Gain: 4.1 dBi

Peak Angle: Phi = 345 deg, Theta = 135 deg