



UL Korea Ltd.
Korea.ul.com

Order No.: 11592966
Report No.: 17-11592966-FCC2
Date: May 17, 2017
Model No.: RMBLE-M5
FCC ID : 2AISERMBLEM5
IC ID : 21613-RMBLEM5

FCC/IC RF Exposure Report

**in accordance with
FCC Part 1 Subpart I §1.1307(b) & §1.1310
RSS-102**

for

Bluetooth Low Energy Module

Honeywell Analytics Asia Pacific Co., Ltd.

7F SangAm IT Tower, 434 Worldcup Buk-ro, Mapo-gu, Seoul 03922, South Korea

Copyright © 2016 UL Korea Ltd.

UL Korea Ltd. authorizes the above-named company to reproduce this Report provided it is reproduced in its entirety.

Summary of Test Results:

The following tests were performed on a sample submitted for evaluation of compliance with FCC Part 1 Subpart I Section 1.1307(b) & 1.1310 and RSS-102

No	FCC Reference Clause No.	IC Reference Clause No.	Conformance Requirements	Result Verdict	Remark
1	1.1307(b)(1) 1.1310	RSS-102 Section 4	RF Exposure of Humans to RF Fields	Complied	

Conclusion:

The tests listed above have been performed and the results recorded by UL Korea Ltd. in accordance with the procedures stated in each test requirement and specification. The test items were determined to ensure the requirements set out in the FCC CFR 47 Part 1 Subpart I and RSS-102. As a result, the subject product has been verified to comply or not comply with each test specification. The test results relate only to the items tested.



Witness tested by
Hyunsik Yun, WiSE Laboratory Engineer
Consumer Technology Division
UL Korea Ltd.
May 17, 2017



Reviewed by
Changyoung Choi, WiSE Senior Engineer
Consumer Technology Division
UL Korea Ltd.
May 17, 2017

Test Report Details

Witnessed By: UL Korea Ltd.
26th FL. GFC Center, 737 Yeoksam-dong, Gangnam-gu, Seoul, 135-984, Korea

Test Site: ENG Co., Ltd
135-60 Gyeongchungdae-ro, Gonjiam-eup, Gwangju-si, Gyeonggi-do, Korea
464-942

Applicant: Honeywell Analytics Asia Pacific Co., Ltd.
7F SangAm IT Tower, 434 Worldcup Buk-ro, Mapo-gu, Seoul 03922, South
Korea

Manufacturer: RAE Systems by Honeywell
No.990E. Hwujwang Road, JIADING DISTRICT, Shanghai 201815, China

Applicant Contact: Hyun mook Kim
Title: Sr Quality Engineer
Phone: 82-2-6909-0371
E-mail: hyunmook.kim@honeywell.com

Product Type: Bluetooth Low Energy Module

Model Number: RMBLE-M5

Host Model Number: SPLI AA BAX B C NZZ

Application Purpose: FCC C2PC (Added Host to the LMA)

Trademark: N/A

Sample Serial Number: N/A

Test standards: FCC Part 1 Subpart I §1.1307(b) & §1.1310
IC RSS-102 Issue 5

Sample Receive Date: April 10, 2017

Testing Start Date: April 27, 2017

Testing Complete Date: May 11, 2017

Overall Results: **Pass**

The test reports apply only to the specific test samples and test results submitted for UL's review. All samples tested were in good operating condition throughout the entire test program. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. UL Korea Ltd. shall have no liability for any deductions, inferences or generalizations drawn by the client or others from UL Korea Ltd. issued reports. This report shall not be used to claim, constitute or imply product certification, approval, or any agency of the National Authorities. This report may contain test results that are not covered by the NVLAP or KOLAS accreditation.

Report Directory

1. GENERAL PRODUCT INFORMATION	5
1.1. EQUIPMENT DESCRIPTION:	5
1.2. DETAILS OF TEST EQUIPMENT (EUT)	5
1.3. EQUIPMENT CONFIGURATION	5
1.4. TECHNICAL DATA:	5
1.5. ANTENNA INFORMATION:	6
1.6. EQUIPMENT TYPE:	6
1.7. TECHNICAL DESCRIPTION AND DOCUMENTS:	6
1.8. EQUIPMENT MARKING PLATE.....	6
1.9. DESCRIPTION OF ADDITIONAL MODEL NAME.....	7
2. TEST SPECIFICATION.....	8
3. RF EXPOSURE EVALUATION.....	9
3.1. THE RESULT OF RF EXPOSURE EVALUATION	11

1. General Product Information

1.1. Equipment Description:

RMBLE-M5 is a Bluetooth Low Energy Module

1.2. Details of Test Equipment (EUT)

- Equipment Type : Bluetooth Low Energy Module
- Model No. : RMBLE-M5
- Type of test Equipment : Portable type
- Operating characteristic : Short range wireless device operating in the 2 400 MHz ~ 2 483.5 MHz ISM frequency band
- Manufacturer : RAE Systems by Honeywell
No.990E. Hwujwang Road, JIADING DISTRICT, Shanghai 201815, China

1.3. Equipment Configuration

The EUT is consisted of the following component provided by the manufacturer.

Use*	Product Type	Manufacturer	Model	Comments
EUT	Bluetooth Low Energy Module	RAE Systems by Honeywell	RMBLE-M5	-
Note: Use = EUT - Equipment Under Test, AE - Auxiliary/Associated Equipment. SIM - Simulator (Not Subjected to Test)				

1.4. Technical Data:

Item	Description
Frequency Ranges	2 402 MHz ~ 2 480 MHz
Output power	Max. -14.0 dBm
Kind of modulation (s)	GFSK
Channel	40 channels (Bluetooth Low Energy)
Antenna Gain	Max. -1.50 dBi
Working temperature	-40 ~ 60 °C
Supply Voltage	DC 3.30 V

Note ;

1. All the technical data described above were provided by the manufacturer.

1.5. Antenna Information:

Antenna Type : PCB Pattern antenna
Manufacturer : RAE Systems by Honeywell
Transmit Gain dBi : Max. -1.50 dBi

1.6. Equipment Type:

- Radio and ancillary equipment for fixed or semi-fixed use
- Radio and ancillary equipment for vehicular mounted use
- Radio and ancillary equipment for portable or handheld use

- Stand alone Host connected


- Self contained single unit Module with associated connection or interface

1.7. Technical description and documents:

No.	Document Title and Description
1	User Manual

Note: The following documents were provided by the manufacturer.

1.8. Equipment Marking Plate

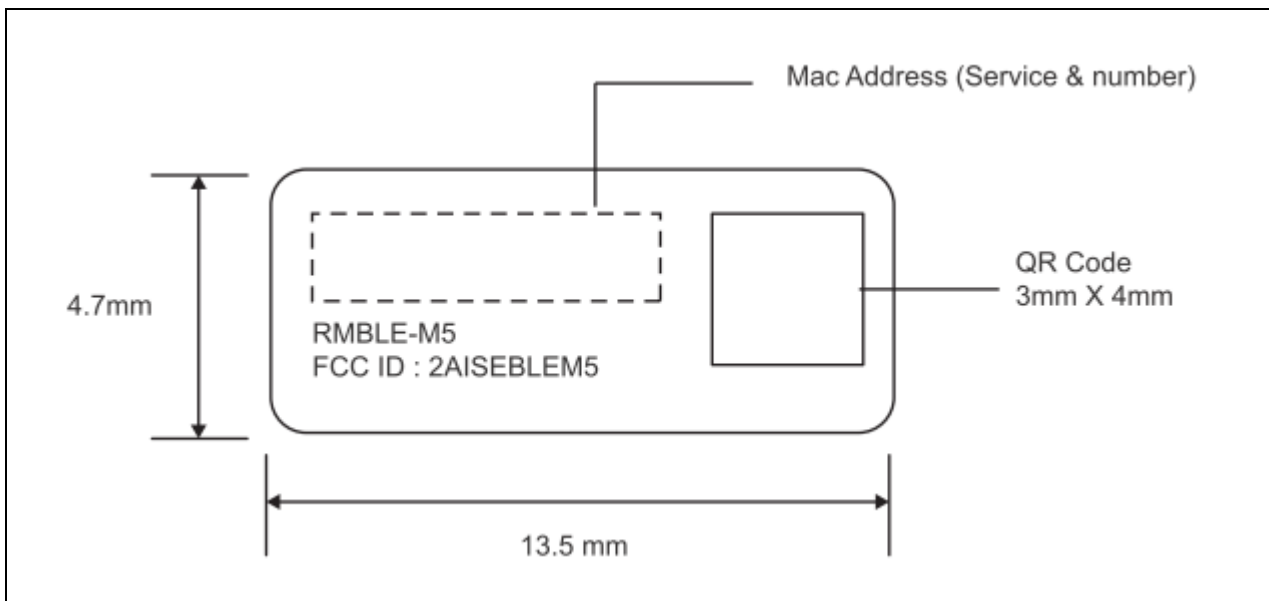

1.9. Description of host model name

Model name	Description of designation	Description of design
SPLI <u>AA</u> BAX <u>B</u> <u>C</u> NZZ	AA (Gas)	1) O1: O2 2) C1: CO 3) H1: H2S (L) 4) H2: H2S (H) 5) G1: H2 6) N1: NO2 7) F6: CH4 (CAT) 8) FR: CH4 (IR)
	B (Color)	C: Charcoal Y: Yellow
	C (Entry)	N: ¾ NPT M: M20

2. Test Specification

The following test specifications and standards have been applied and used for testing.

- 1) KDB 447498 D01 v06 : Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies
- 2) RSS 102 Issue 5: Radio Frequency (RF) Exposure Compliance of Radio communication Apparatus (All Frequency Bands)

3. RF Exposure Evaluation

Maximum Permissible Exposure

RF Exposure Evaluation of the EUT were measured according to the dictates in KDB 447498

Pd the limit of MPE, 1 mW/cm^2 . If we know the maximum gain of the antenna and the total power input to the antenna, through the calculation, we will know the distance where the MPE limit is reached.

Friis transmission formula: $P_d = (P_{out} * G) / (4 * \pi * R^2)$

Where P_d = power density in mW/cm^2

P_{out} = output power to antenna in mW

G = gain of antenna in linear scale

π = 3.1416

R = distance between observation point and center of the radiator in m

Limits

Environmental evaluation and exposure limit according to FCC Part 1, Subpart I, Section 1.1307(b) & 1.1310

According to Section 1.1310, The criteria listed in the following table shall be used to evaluate the environment impact of human exposure to radio frequency (RF) radiation as specified in §1.1307(b)

Frequency Range (MHz)	Electric Field Strength(V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm^2)	Average Time
(A) Limits for Occupational /Control Exposures				
300 – 1 500	--	--	F/300	6
1 500 – 100 000	--	--	5	6
(B) Limits for General Population/Uncontrol Exposures				
300 – 1 500	--	--	F/1500	6
1 500 – 100 000	--	--	1	30

Environmental evaluation and exposure limit according to RSS-102

RF Field Strength Limits for Devices Used by the General Public (Uncontrolled Environment)

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m^2)	Reference Period (minutes)
0.003-10 ²¹	83	90	-	Instantaneous*
0.1-10	-	0.73/ <i>f</i>	-	6**
1.1-10	87/ <i>f</i> ^{0.5}	4.9/ <i>f</i>	-	6**
10-20	27.46	0.0728	2	6
20-48	58.07/ <i>f</i> ^{0.5}	0.1540/ <i>f</i> ^{0.25}	8.944/ <i>f</i> ^{0.5}	6
48-300	22.06	0.05852	1.291	6
300-6000	3.141 <i>f</i> ^{0.3417}	0.008335 <i>f</i> ^{0.3417}	0.02619 <i>f</i> ^{0.6834}	6
6000-15000	61.4	0.163	10	6
15000-150000	61.4	0.163	10	616000/ <i>f</i> ^{1.2}
150000-300000	0.158 <i>f</i> ^{0.5}	4.21 x 10 ⁻⁴ <i>f</i> ^{0.5}	6.67 x 10 ⁻⁴ <i>f</i>	616000/ <i>f</i> ^{1.2}

Note: *f* is frequency in MHz.

*Based on nerve stimulation (NS).

** Based on specific absorption rate (SAR).

RF Field Strength Limits for Controlled Use Devices (Controlled Environment)

Frequency Range (MHz)	Electric Field (V/m rms)	Magnetic Field (A/m rms)	Power Density (W/m ²)	Reference Period (minutes)
0.003-10 ²³	170	180	-	Instantaneous*
0.1-10	-	1.6/ <i>f</i>	-	6**
1.29-10	193/ <i>f</i> ^{0.5}	-	-	6**
10-20	61.4	0.163	10	6
20-48	129.8/ <i>f</i> ^{0.25}	0.3444/ <i>f</i> ^{0.25}	44.72/ <i>f</i> ^{0.5}	6
48-100	49.33	0.1309	6.455	6
100-6000	15.60 <i>f</i> ^{0.25}	0.04138 <i>f</i> ^{0.25}	0.6455 <i>f</i> ^{0.5}	6
6000-15000	137	0.364	50	6
15000-150000	137	0.364	50	616000/ <i>f</i> ^{1.2}
150000-300000	0.354 <i>f</i> ^{0.5}	9.40 x 10 ⁻⁴ <i>f</i> ^{0.5}	3.33 x 10 ⁻⁴ <i>f</i>	616000/ <i>f</i> ^{1.2}

Note: *f* is frequency in MHz.

*Based on nerve stimulation (NS).

** Based on specific absorption rate (SAR).

3.1. The Result of RF Exposure Evaluation

3.1.1. Evaluation at 20 cm distance

Modulation Type	Frequency (MHz)	Max Power (dBm)	Antenna Gain (dBi)	Power Density at 20cm (mW/cm ²)	FCC Limit (mW/cm ²)	IC Limit (W/m ²)
GFSK	2 450	-14.0	- 1.5	0.000 01	1.0	5.42

Note :

1. EUT operated in 2.45 GHz frequency band.
2. The power density at a distance of 20cm calculated from the friis transmission formula is far below each limits.