




# EMC TEST REPORT



Report No.: 16070723-FCC-E1

Supersede Report No.: N/A

Applicant	SAINARA(HK)LTD	
Product Name	Speaker	
Model No.	LI-S246	
Serial No.	N/A	
Test Standard	FCC Part 15 Subpart B Class B:2015, ANSI C63.4: 2014	
Test Date	June 22 to September 17, 2016	
Issue Date	September 18, 2016	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

**SIEMIC (SHENZHEN-CHINA) LABORATORIES**

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: [China@siemic.com.cn](mailto:China@siemic.com.cn)

## Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	16070723-FCC-E1
Page	3 of 31

This page has been left blank intentionally.

# CONTENTS

1. REPORT REVISION HISTORY .....	5
2. CUSTOMER INFORMATION .....	5
3. TEST SITE INFORMATION .....	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION .....	6
5. TEST SUMMARY .....	7
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....	8
6.1 AC POWER LINE CONDUCTED EMISSIONS.....	8
6.2 RADIATED EMISSIONS.....	12
ANNEX A. TEST INSTRUMENT.....	17
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	18
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	27
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST .....	30
ANNEX E. DECLARATION OF SIMILARITY.....	31

## 1. Report Revision History

Report No.	Report Version	Description	Issue Date
16070723-FCC-E1	NONE	Original	September 18, 2016

## 2. Customer information

Applicant Name	SAINARA(HK)LTD
Applicant Add	6-6a hart ave , 7/f hody comm bldg , t.s.t, Hong Kong
Manufacturer	GUANGZHOU DIWEIQI SPEAKER MANUFACTORY
Manufacturer Add	No.32 Zhushui 1st Road, Shenshan, Jianggao Town, Baiyun District, Guangzhou, China

## 3. Test site information

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

## 4. Equipment under Test (EUT) Information

Description of EUT:	Speaker
Main Model:	LI-S246
Serial Model:	N/A
Date EUT received:	June 21, 2016
Test Date(s):	June 22 to September 17, 2016
Equipment Category :	CXX
Antenna Gain:	4dBi
Antenna Type:	PCB antenna
Type of Modulation:	GFSK, $\pi$ /4DQPSK, 8DPSK
RF Operating Frequency (ies):	2402-2480 MHz(TX/RX) 210.3MHz(Receiving frequency)
Number of Channels:	79CH
Port:	Power Port, MIC Port, Guitor Port, USB Port, Line input Port, SD/MMC Card Port
Input Power:	RMS:180W Voltage:100V-120V,50Hz/60Hz
Trade Name :	LAX-MAX
FCC ID:	2AIT5LI-S246

## 5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.107; ANSI C63.4: 2014	AC Power Line Conducted Emissions	Compliance
§15.109; ANSI C63.4: 2014	Radiated Emissions	Compliance

### Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge and Radiated Spurious Emissions	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

## 6. Measurements, Examination And Derived Results

### 6.1 AC Power Line Conducted Emissions

Temperature	23°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	September 12, 2016
Tested By :	Loren Luo

#### Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.107	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [μ] H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBμV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBμV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBμV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

Test Setup	<p>Note: 1. Support units were connected to second LISN. 2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>
------------	--


Test Report	16070723-FCC-E1
Page	9 of 31

Procedure	<ol style="list-style-type: none"> <li>1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table.</li> <li>2. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains.</li> <li>3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>4. All other supporting equipment were powered separately from another main supply.</li> <li>5. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.</li> <li>7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz.</li> <li>8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).</li> </ol>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data     Yes                       N/A

Test Plot      Yes (See below)             N/A

<b>Test Mode:</b>	<b>Receiver Mode</b>
-------------------	----------------------

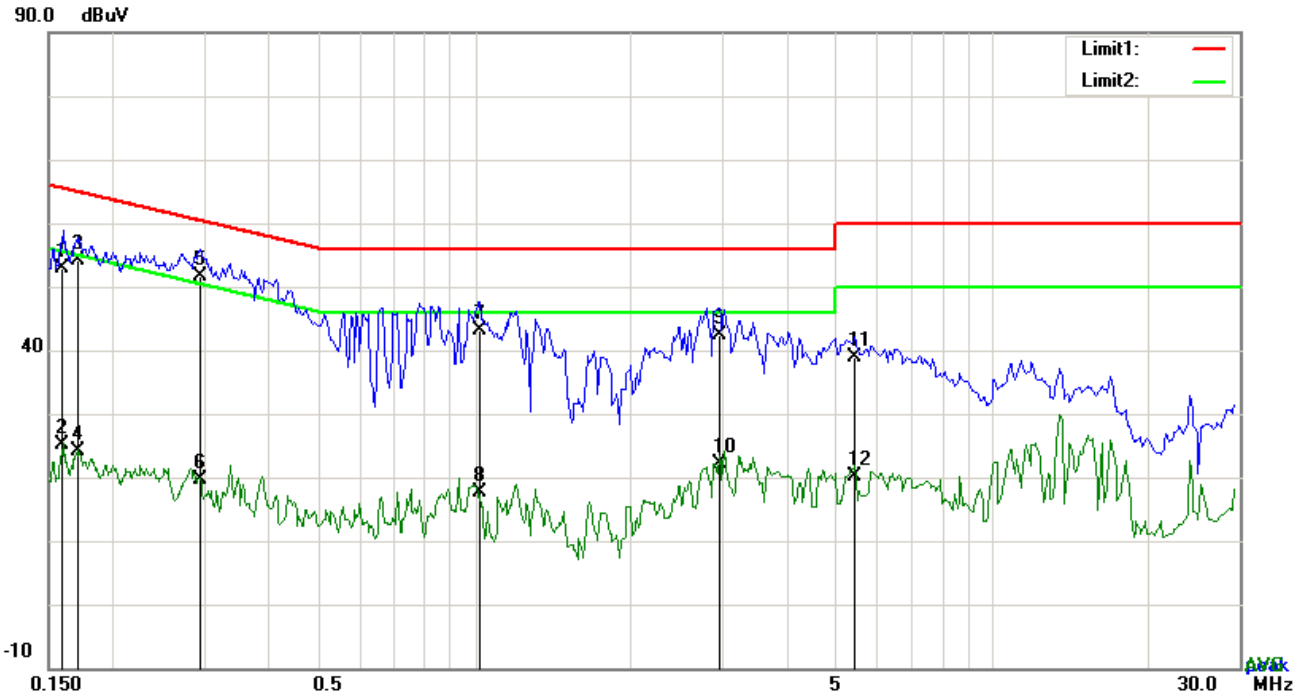


**Test Data**

**Phase Line Plot at 120Vac, 60Hz**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.1590	42.98	QP	10.02	53.00	65.52	-12.52
2	L1	0.1590	15.18	AVG	10.02	25.20	55.52	-30.32
3	L1	0.1712	43.99	QP	10.02	54.01	64.90	-10.89
4	L1	0.1712	14.18	AVG	10.02	24.20	54.90	-30.70
5	L1	0.2943	41.72	QP	10.02	51.74	60.40	-8.66
6	L1	0.2943	9.62	AVG	10.02	19.64	50.40	-30.76
7	L1	1.0211	33.05	QP	10.03	43.08	56.00	-12.92
8	L1	1.0211	7.49	AVG	10.03	17.52	46.00	-28.48
9	L1	2.9697	32.37	QP	10.05	42.42	56.00	-13.58
10	L1	2.9697	12.02	AVG	10.05	22.07	46.00	-23.93
11	L1	5.4297	28.69	QP	10.08	38.77	60.00	-21.23
12	L1	5.4297	10.09	AVG	10.08	20.17	50.00	-29.83

<b>Test Mode:</b>	<b>Receiver Mode</b>
-------------------	----------------------

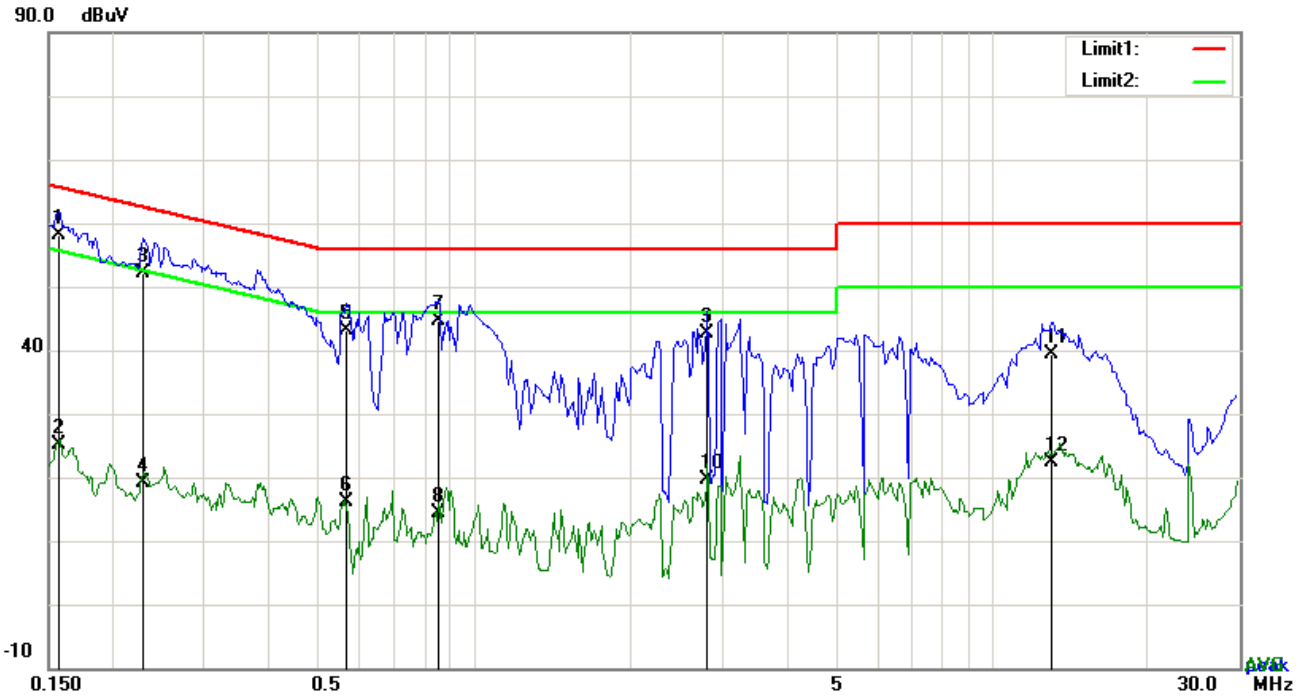

**Test Data**

**Phase Neutral Plot at 120Vac, 60Hz**


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB}	(dBuV)	(dBuV)	(dB)
1	N	0.1578	48.07	QP	10.02	58.09	65.58	-7.49
2	N	0.1578	15.22	AVG	10.02	25.24	55.58	-30.34
3	N	0.2280	42.02	QP	10.02	52.04	62.52	-10.48
4	N	0.2280	9.17	AVG	10.02	19.19	52.52	-33.33
5	N	0.5641	33.01	QP	10.02	43.03	56.00	-12.97
6	N	0.5641	6.01	AVG	10.02	16.03	46.00	-29.97
7	N	0.8520	34.63	QP	10.03	44.66	56.00	-11.34
8	N	0.8520	4.37	AVG	10.03	14.40	46.00	-31.60
9	N	2.8176	32.59	QP	10.05	42.64	56.00	-13.36
10	N	2.8176	9.68	AVG	10.05	19.73	46.00	-26.27
11	N	13.0386	29.16	QP	10.18	39.34	60.00	-20.66
12	N	13.0386	12.22	AVG	10.18	22.40	50.00	-27.60

## 6.2 Radiated Emissions

Temperature	23°C
Relative Humidity	53%
Atmospheric Pressure	1010mbar
Test date :	September 12, 2016
Tested By :	Loren Luo

### Requirement(s):

Spec	Item	Requirement	Applicable										
47CFR§15.107(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>										
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (<math>\mu\text{V}/\text{m}</math>)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength ( $\mu\text{V}/\text{m}$ )	30 – 88	100	88 – 216	150	216 960	200	Above 960	500
		Frequency range (MHz)		Field Strength ( $\mu\text{V}/\text{m}$ )									
		30 – 88		100									
		88 – 216		150									
216 960	200												
Above 960	500												

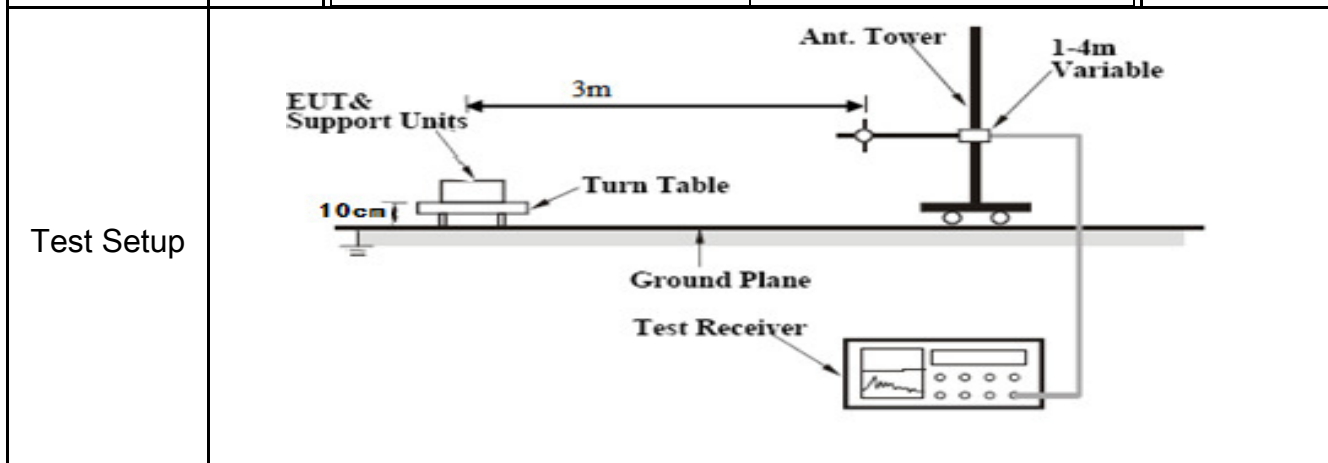

Procedure	<ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>Vertical or horizontal polarization (whichever gave the higher emission level</li> </ol> </li> </ol>
-----------	--

	<p>over a full rotation of the EUT) was chosen.</p> <p>b. The EUT was then rotated to the direction that gave the maximum emission.</p> <p>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</p> <p>3. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.</p> <p>4. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.</p> <p>The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth with Peak detection for Average Measurement as below at frequency above 1GHz.</p> <p>■ 1 kHz (Duty cycle &lt; 98%) □ 10 Hz (Duty cycle &gt; 98%)</p> <p>5. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</p>
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

<b>Test Mode:</b>	<b>Receiver Mode</b>
-------------------	----------------------

**Below 1GHz**

80.0 dBuV/m

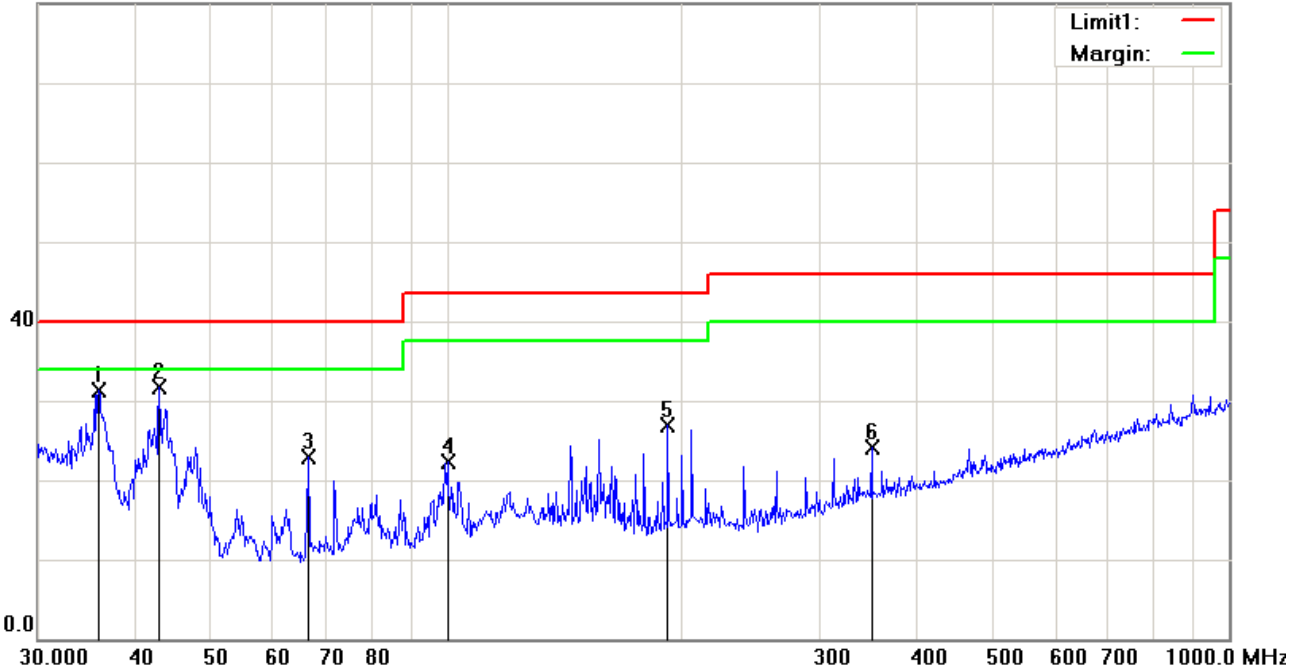


**Test Data**

**Horizontal Polarity Plot @3m**

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degree ( ° )
1	H	35.8747	35.79	peak	-4.58	31.21	40.00	-8.79	100	354
2	H	42.8998	41.25	peak	-9.53	31.72	40.00	-8.28	100	128
3	H	66.4989	36.80	peak	-13.86	22.94	40.00	-17.06	100	0
4	H	100.2286	33.09	peak	-10.76	22.33	43.50	-21.17	100	253
5	H	191.7450	36.04	peak	-9.14	26.90	43.50	-16.60	100	37
6	H	349.2500	29.54	peak	-5.48	24.06	46.00	-21.94	100	182

**Below 1GHz**

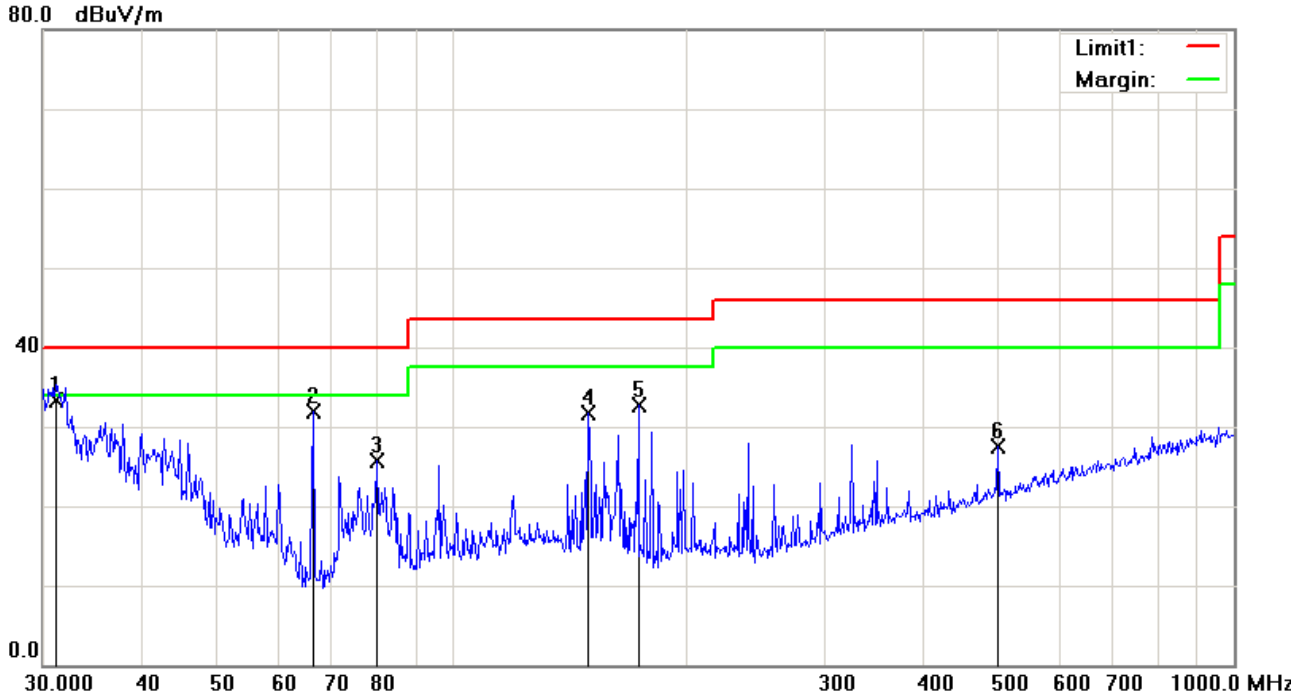

**Test Data**

**Vertical Polarity Plot @3m**

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin	Height	Degree
		(MHz)	(dBuV/m)		(dB/m)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	( ° )
1	V	31.1798	34.44	peak	-1.13	33.31	40.00	-6.69	100	120
2	V	66.4989	45.68	peak	-13.86	31.82	40.00	-8.18	100	59
3	V	80.0806	39.56	peak	-13.77	25.79	40.00	-14.21	100	360
4	V	149.4857	40.05	peak	-8.40	31.65	43.50	-11.85	100	196
5	V	173.2051	42.03	peak	-9.36	32.67	43.50	-10.83	100	214
6	V	499.4247	29.28	peak	-1.70	27.58	46.00	-18.42	100	78

***Above 1GHz***

Frequency (MHz)	Amplitude (dB $\mu$ V/m)	Azimuth	Height (cm)	Polarity (H/V)	Factors (dB)	Limit (dB $\mu$ V/m)	Margin (dB)	Detector (PK/AV)
1558.21	49.57	68	120	V	-22.58	74	-24.43	PK
2046.83	49.63	125	100	V	-22.31	74	-24.37	PK
1758.25	50.52	77	115	V	-21.67	74	-23.48	PK
2167.15	49.67	67	135	H	-22.89	74	-24.33	PK
2852.14	50.82	121	110	H	-22.55	74	-23.18	PK
1863.92	49.47	83	125	H	-21.67	74	-24.53	PK

*Note1: The highest frequency of the EUT is 2480 MHz, so the testing has been conformed to 5\*2480MHz=12,400MHz.*

*Note2: The frequency that above 3GHz is mainly from the environment noise.*

*Note3, X-Axis, Y-Axis and -Axis were investigated. The results above show only the worst case.*

*Note4: The AV measurement performed, more than 20dB below limit so AV test data was not presented.*

## Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
<b>AC Line Conducted Emissions</b>					
EMI test receiver	ESCS30	8471241027	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191106	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Line Impedance Stabilization Network	LI-125A	191107	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
LISN	ISN T800	34373	09/25/2015	09/24/2016	<input checked="" type="checkbox"/>
Transient Limiter	LIT-153	531118	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
<b>Radiated Emissions</b>					
EMI test receiver	ESL6	100262	09/17/2015	09/16/2016	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/24/2016	03/23/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/21/2015	09/20/2016	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna	AH-118	71259	09/24/2015	09/23/2016	<input checked="" type="checkbox"/>

## Annex B. EUT And Test Setup Photographs

### Annex B.i. Photograph: EUT External Photo



EUT - Front View



EUT - Rear View



EUT - Top View



EUT - Bottom View



EUT - Left View




EUT - Right View


**Annex B.ii. Photograph: EUT Internal Photo**




Cover Off - Top View 1

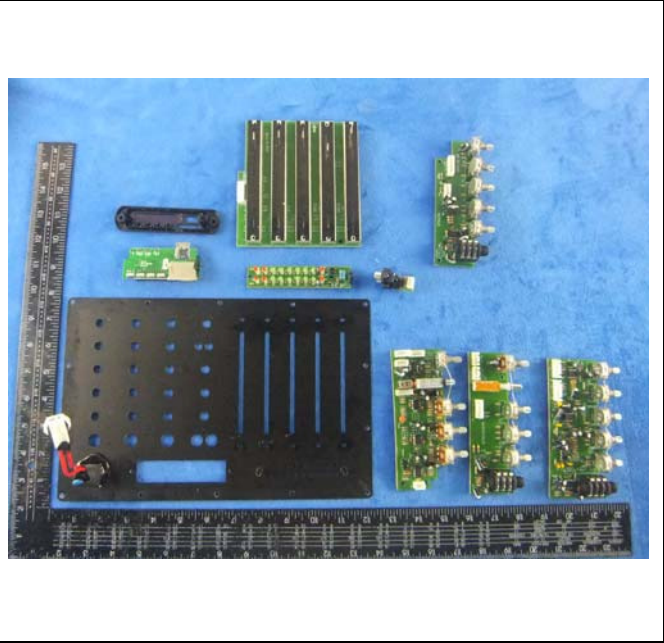



Cover Off - Top View 2

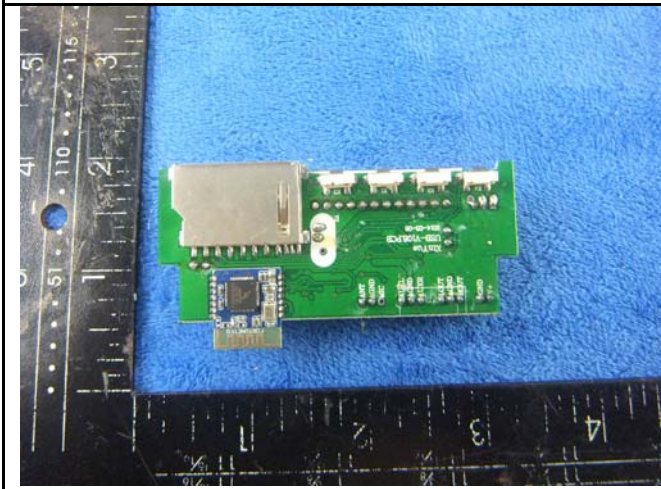


SD card board - Front View

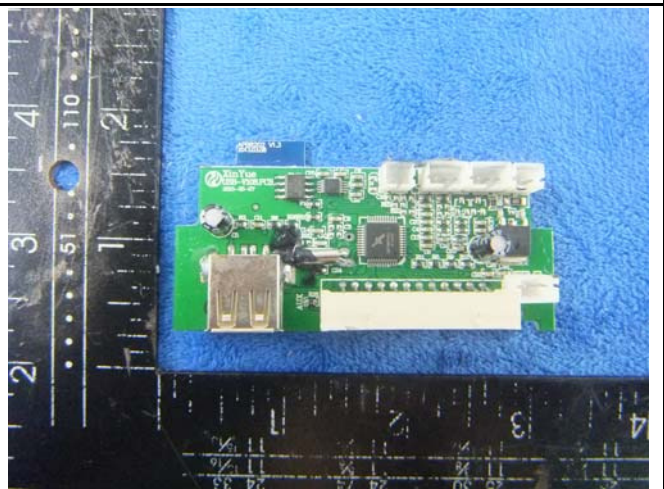


SD card board - Rear View

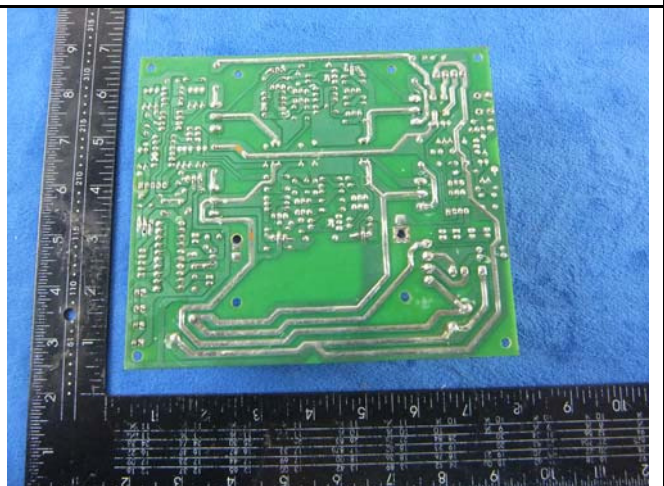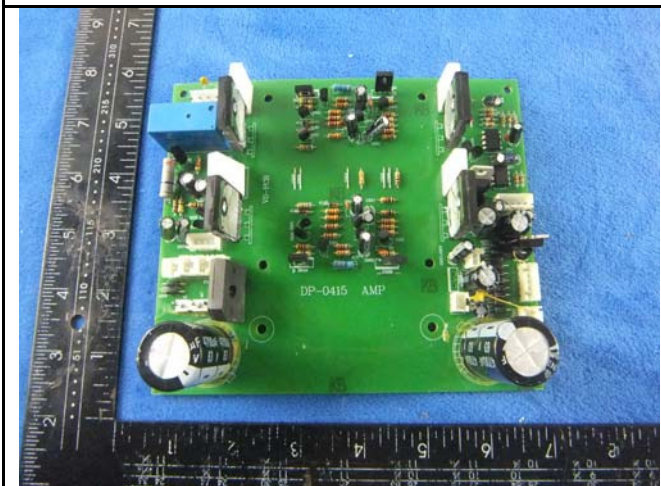


Power amplifier board - Front View

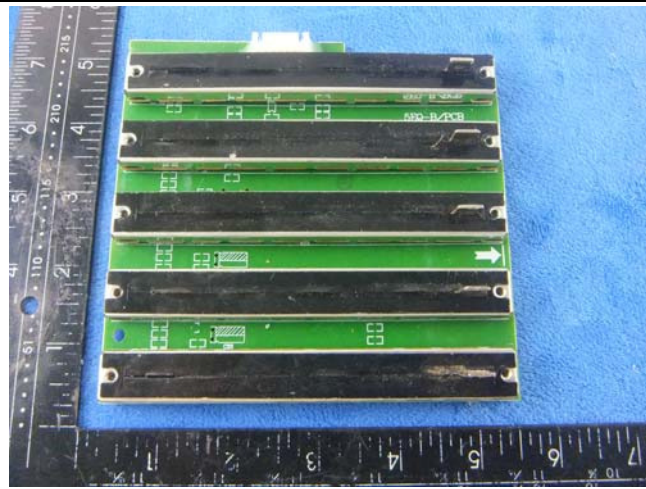


Power amplifier board - Rear View

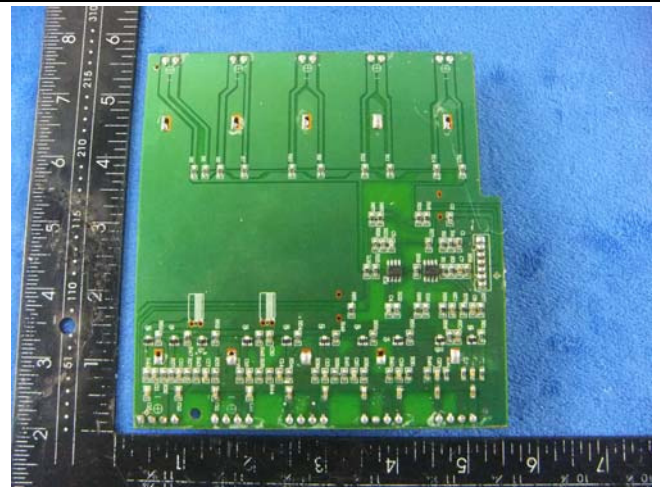


PCB board - Front View

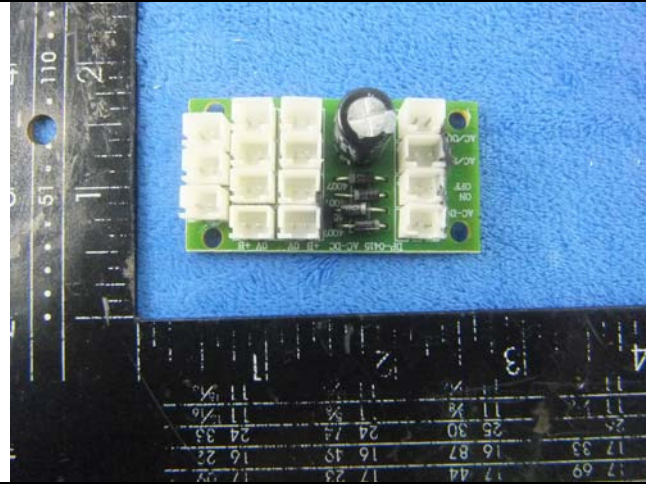


PCB board - Rear View

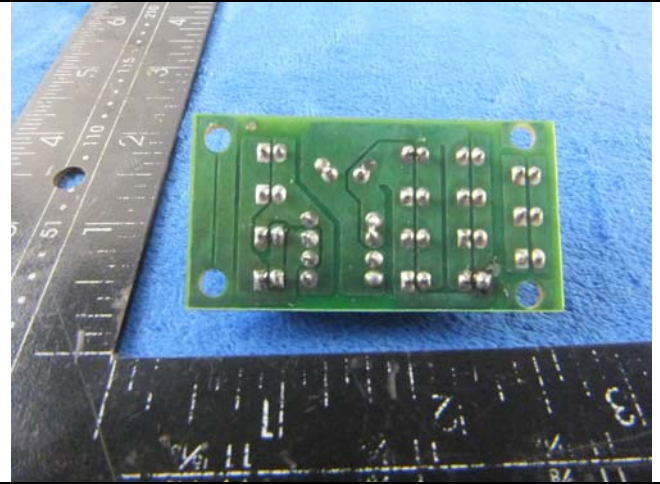

Connect board - Front View

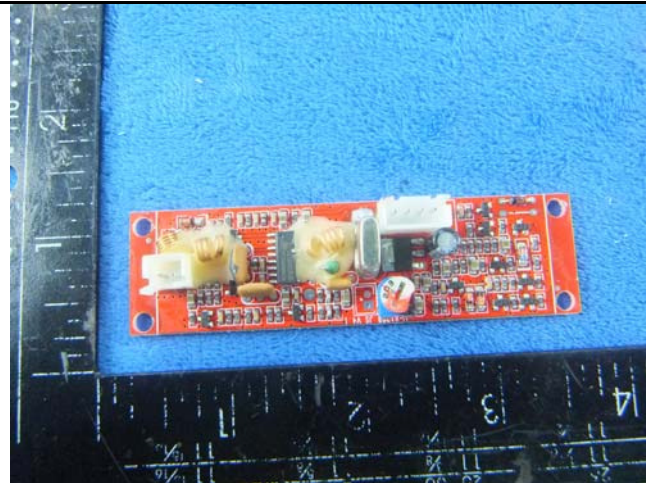

Connect board - Rear View

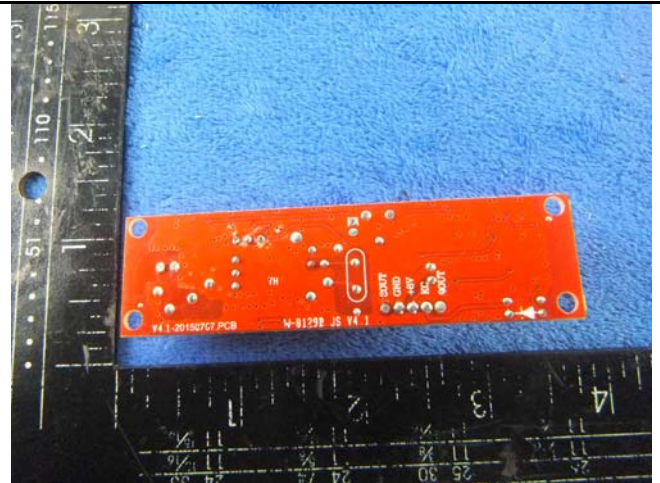

Receiver board - Front View




Receiver board - Rear View







MIC&Guitar in board - Front View

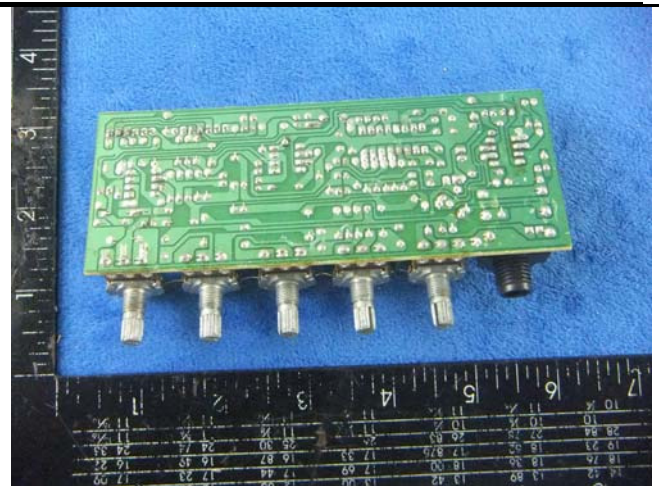


MIC&Guitar in board - Rear View

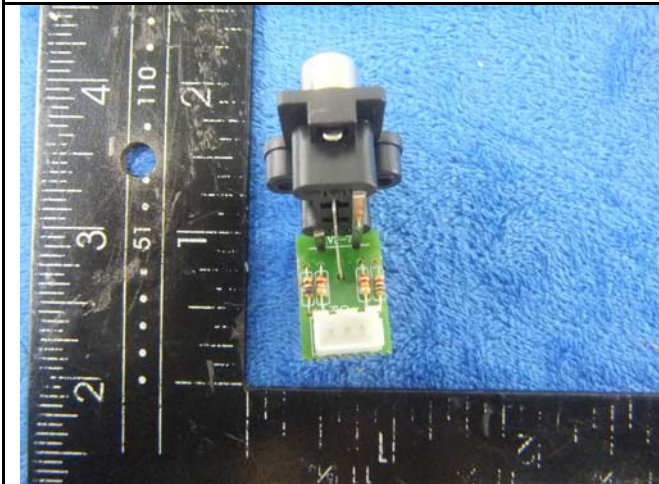


MIC board - Front View

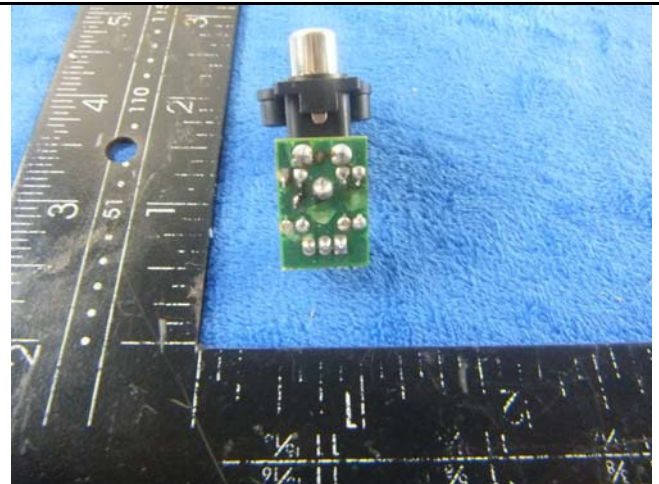


MIC board board - Rear View

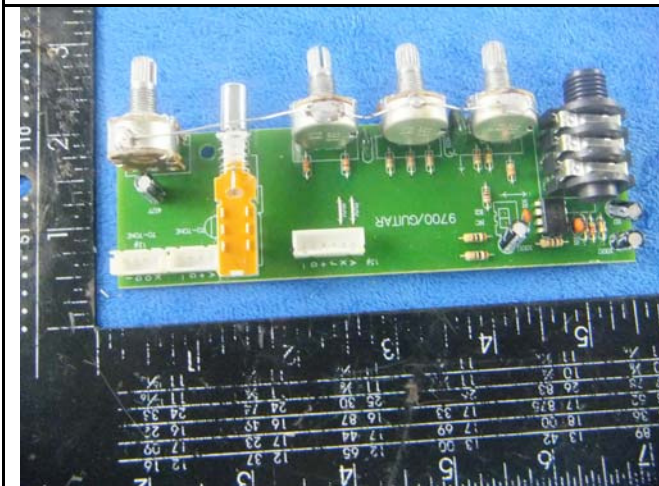


Button board – Front View

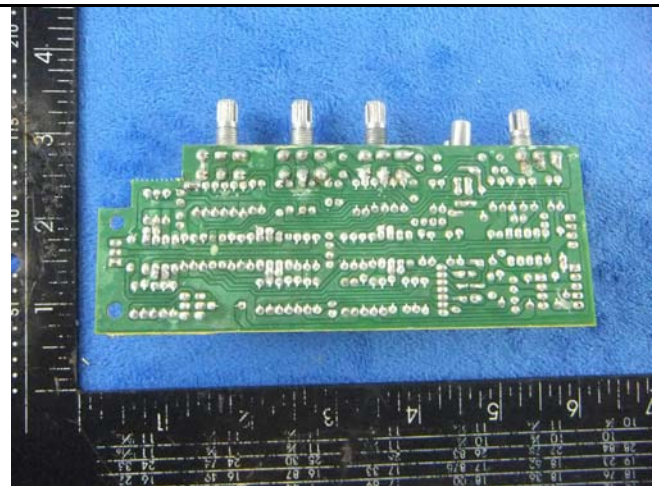


Button board – Rear View

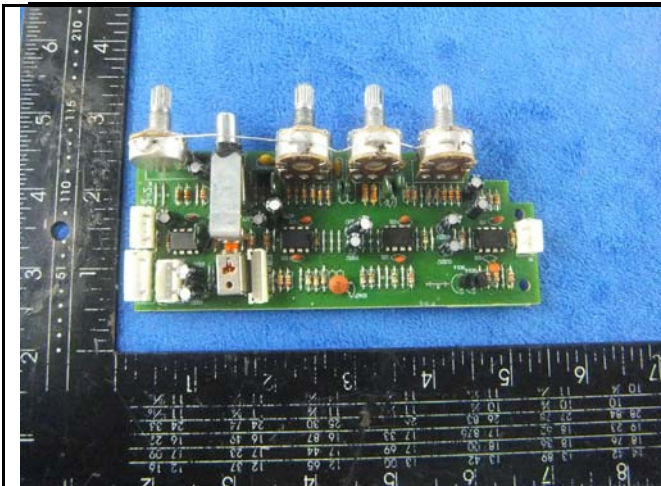


Adjustment board – Front View

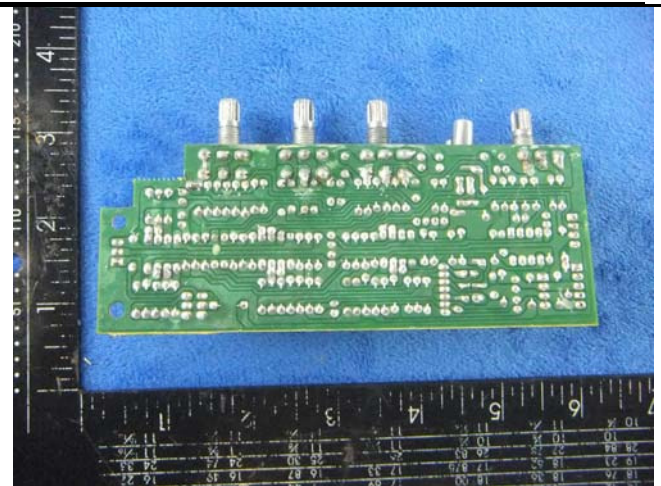


Adjustment board – Rear View

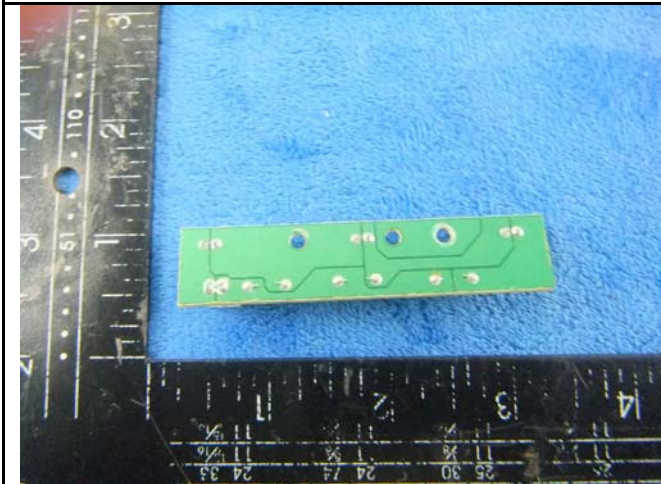


Connect board – Front View

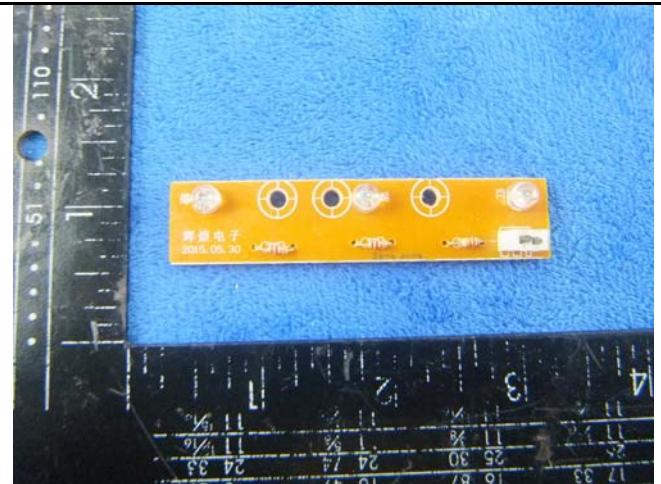


Connect board – Rear View

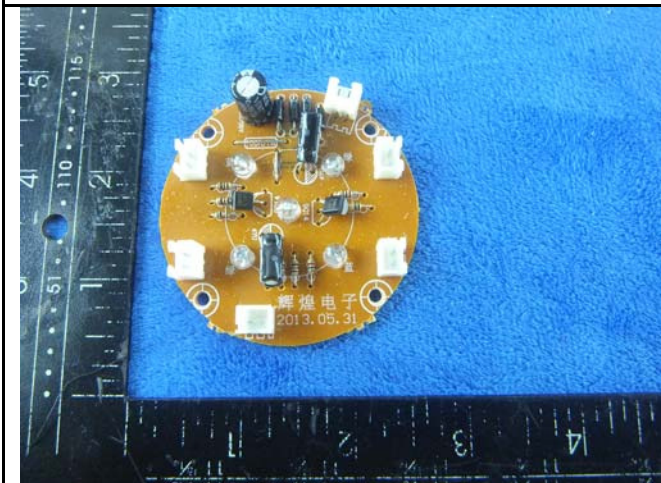


LCD board - Front View

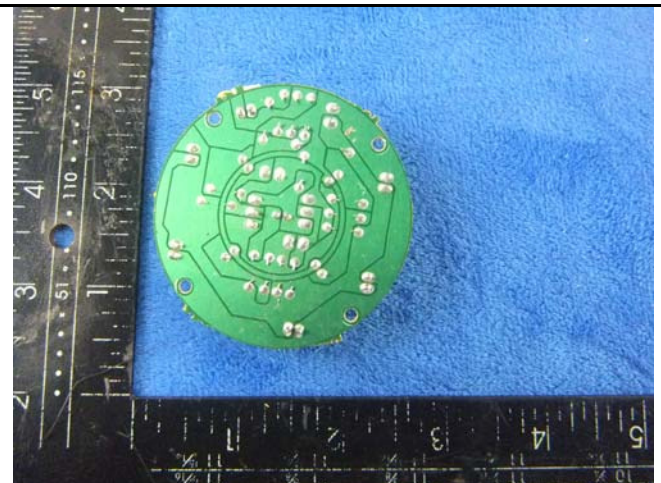


LCD board - Rear View

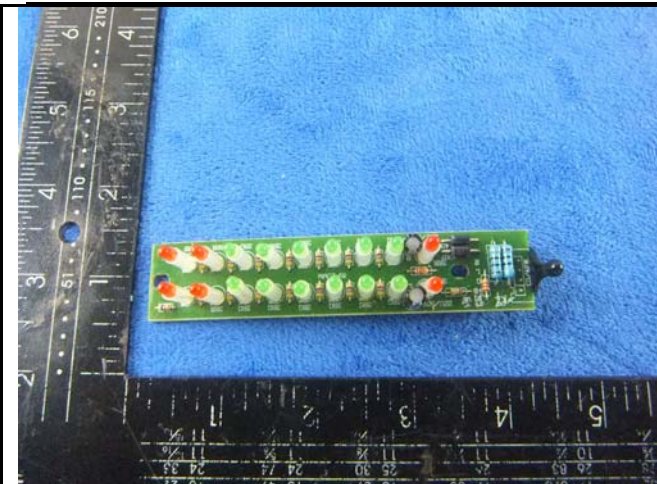


Small LCD board - Front View

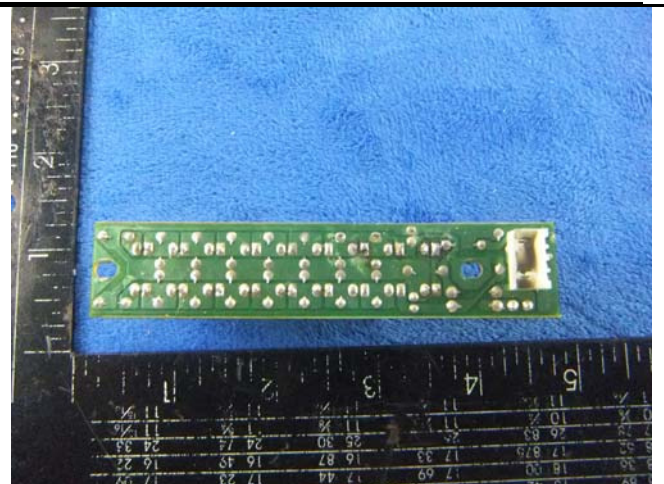

Small LCD board - Rear View

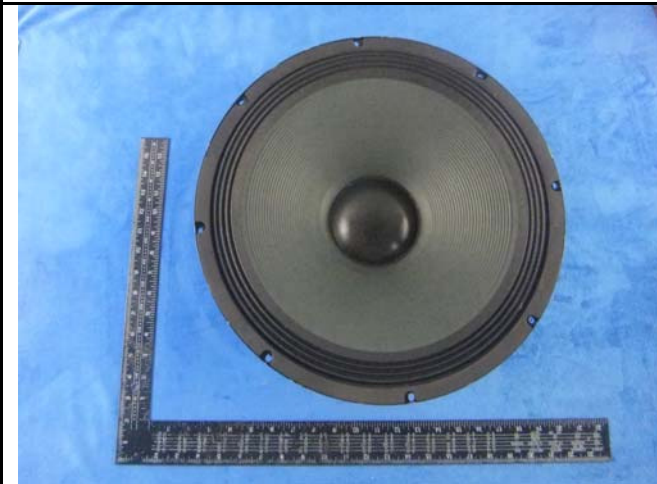

Speaker - Front View

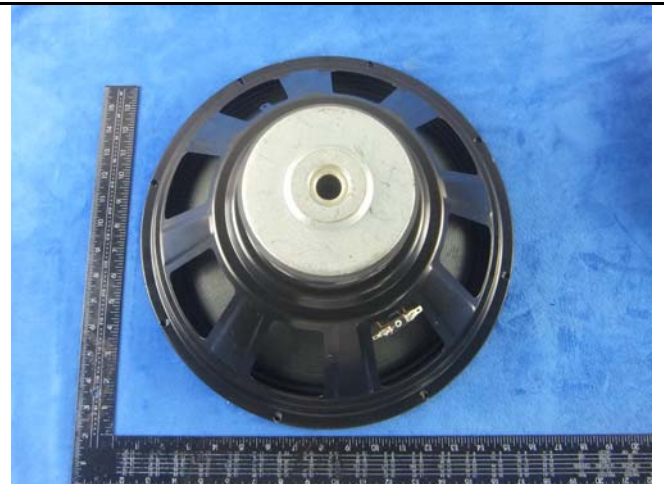


Speaker - Rear View



FM Antenan View



Receiving Antenan View

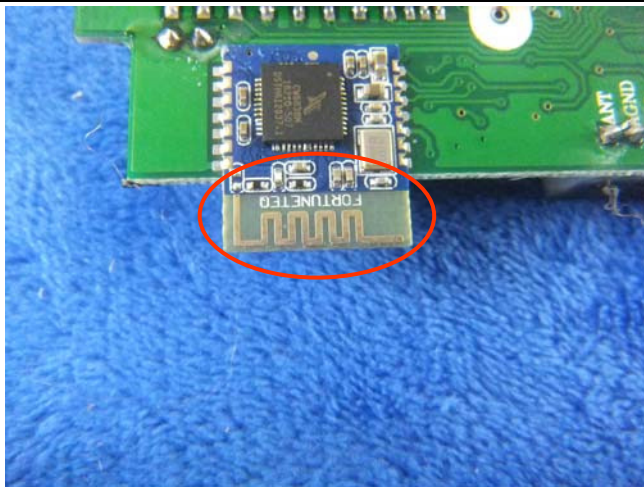

BT- Antenna View

**Annex B.iii. Photograph: Test Setup Photo**



Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View



Radiated Emissions Test Setup Below 1GHz




Radiated Emissions Test Setup Above 1GHz


## Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

### Annex C.ii. TEST SET UP BLOCK

#### Block Configuration Diagram for Conducted Emissions

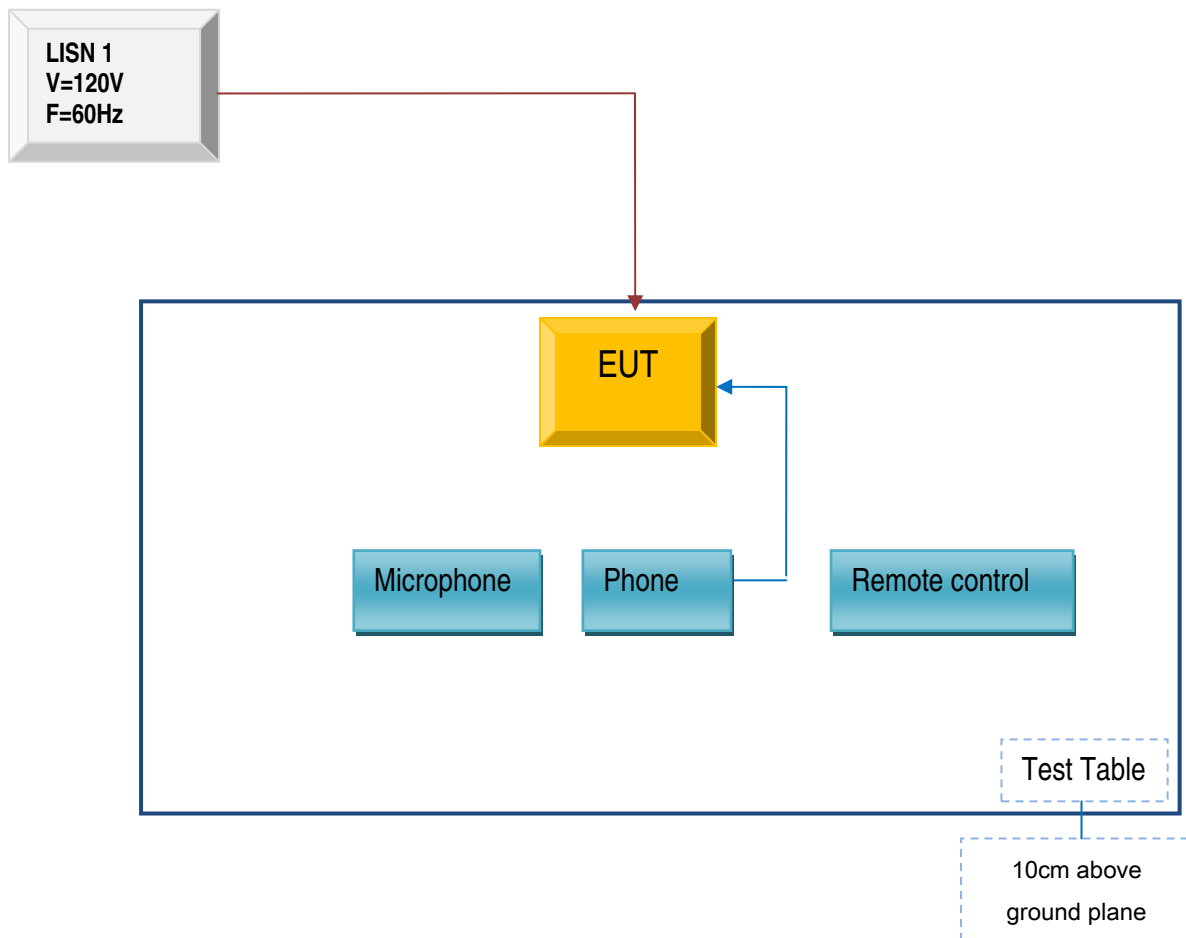

### Block Configuration Diagram for Radiated Emissions

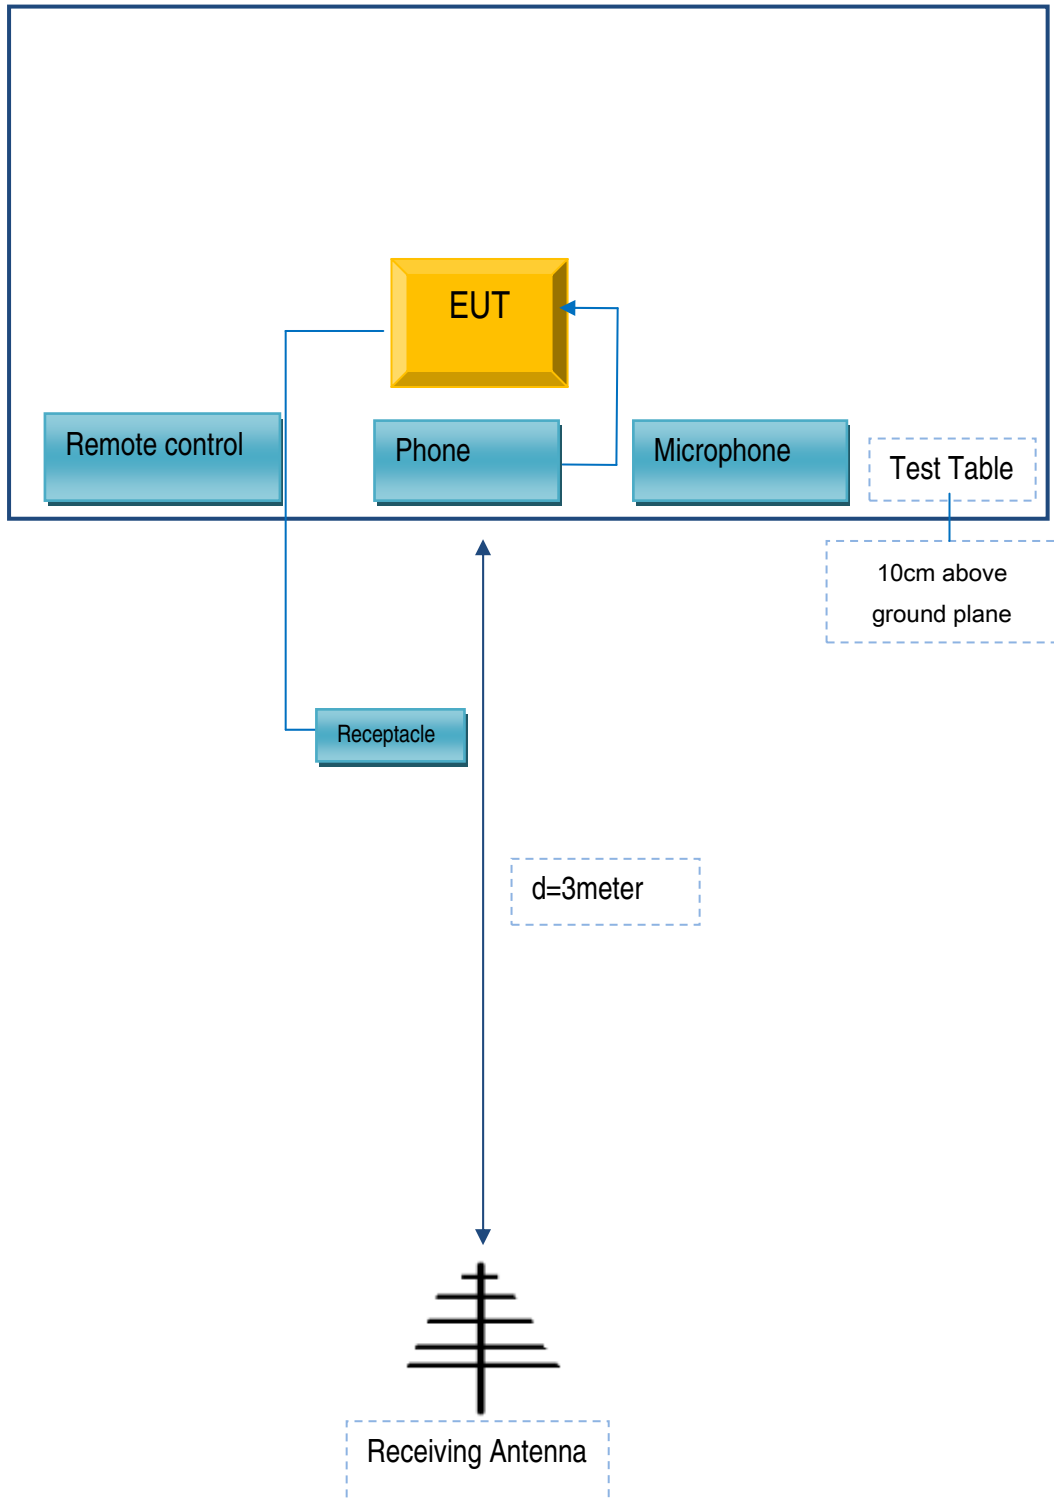

## Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

### Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
TCL	Telephone	TCL03	C30215

### Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	H0502313
Power Cable	Un-shielding	No	0.8m	XC003155

Test Report	16070723-FCC-E1
Page	30 of 31

**Annex D. User Manual / Block Diagram / Schematics / Partlist**

Please see attachment

Test Report	16070723-FCC-E1
Page	31 of 31

## Annex E. DECLARATION OF SIMILARITY

N/A