



TEST REPORT

APPLICANT : Powerstick.com Inc.
PRODUCT NAME : PowerPad
MODEL NAME : 804400
BRAND NAME : Powerstick.com Inc.
FCC ID : 2AITNPOWERPAD
STANDARD(S) : 47 CFR Part 15 Subpart C
RECEIPT DATE : 2019-09-16
TEST DATE : 2019-09-21 to 2019-09-28
ISSUE DATE : 2020-07-29

Edited by: He sinuo
He Sinuo(Rapporteur)
Approved by: Xiao Xiong
Xiao Xiong(Supervisor)

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Technical Information 3
- 1.1. Applicant and Manufacturer Information..... 3
- 1.2. Equipment Under Test (EUT) Description..... 3
- 1.3. Test Standards and Results 4
- 1.4. Environmental Conditions 4
- 2. 47 CFR Part 15C Requirements..... 5
- 2.1. Conducted Emission 5
- 2.2. Radiated Emission 9
- 2.3. 20dB Bandwidth 16
- Annex A Test Uncertainty 18
- Annex B Testing Laboratory Information..... 19

Change History		
Version	Date	Reason for change
1.0	2020-07-06	First edition
2.0	2020-07-29	Add voltage, power information and modes



1. Technical Information

Note: Provide by applicant.

1.1. Applicant and Manufacturer Information

Applicant:	Powerstick.com Inc.
Applicant Address:	29 Camelot Drive Ottawa Canada K2G 5W6
Manufacturer:	Powerstick.com Inc.
Manufacturer Address:	29 Camelot Drive Ottawa Canada K2G 5W6

1.2. Equipment Under Test (EUT) Description

Product Name:	PowerPad
Serial No:	(N/A, marked #1 by test site)
Hardware Version:	Rev 5.0
Software Version:	V1.0.0
Input Voltage:	5V/3A, 15W
Output Voltage:	5V/1A, 5W
Frequency Range:	110kHz ~ 205kHz

Note:

1. The PowerPad supports 110kHz ~ 205kHz.
2. For a more detailed description, please refer to specification or user's manual supplied by the applicant and/or manufacturer.

1.3. Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (110kHz ~ 205kHz Band) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Test Engineer	Result	Method determination Remark
1	15.203	Antenna Requirement	N/A	N/A	N/A	No deviation
2	15.207	Conducted Emission	2019.09.21	Lin Jiayong	PASS	No deviation
3	15.209	Radiated Emission	2019.09.27	Gao Jianrou	PASS	No deviation
4	15.215(c)	20dB Bandwidth	2019.09.28	Gao Jianrou	PASS	No deviation

Note 1: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013.

Note 2: Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table.

1.4. Environmental Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR Part 15C Requirements

2.1. Conducted Emission

2.1.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50μH/50Ω line impedance stabilization network (LISN).


Frequency Range (MHz)	Conducted Limit (dBμV)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5 - 30	60	50

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.1.2. Test Description

A. Test Setup:

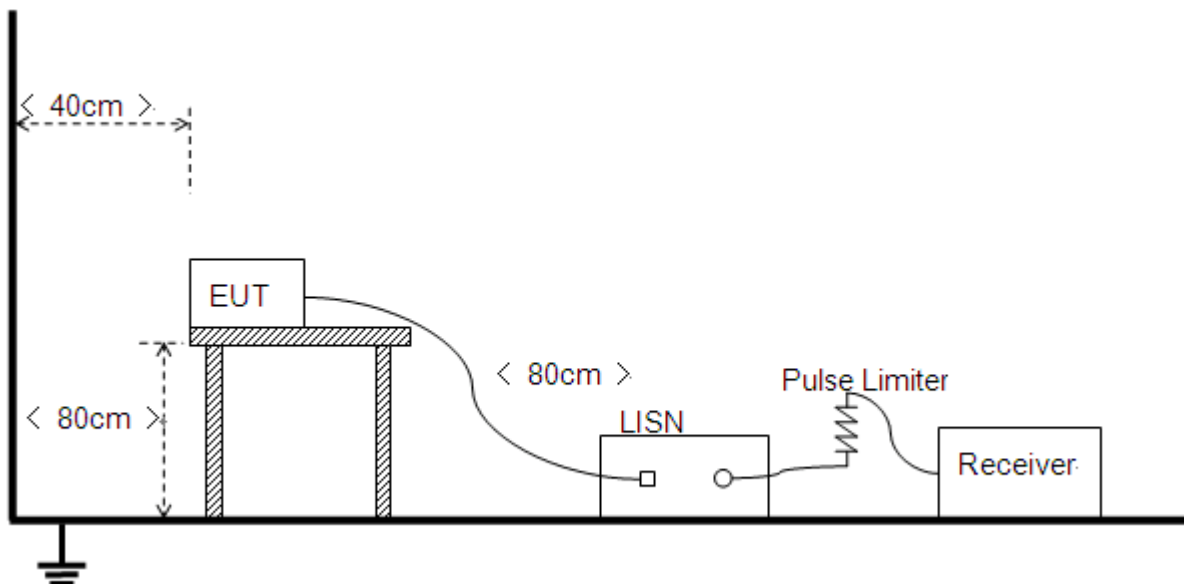

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference



Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

B. Equipments List:

Please reference ANNEX A(1.5).

2.1.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:

Mode 1: EUT + Adapter + USB Cable + Tablet + Load (Output 5V) + Tx

Mode 2: EUT + Adapter + USB Cable+ Mobile phone + Load (Output 5V) + Tx


Note 1: All test modes were tested, only the worse case (in boldface) was recorded in report.

Note 2: The load is provided by client only use for testing. The detail information of load as follow;


Load	
Input:	5W (5V/1A)
Efficiency:	75%
Operating distance:	6mm

Note 3: The test voltage is AC 120V/60Hz.

B. Test Plots:

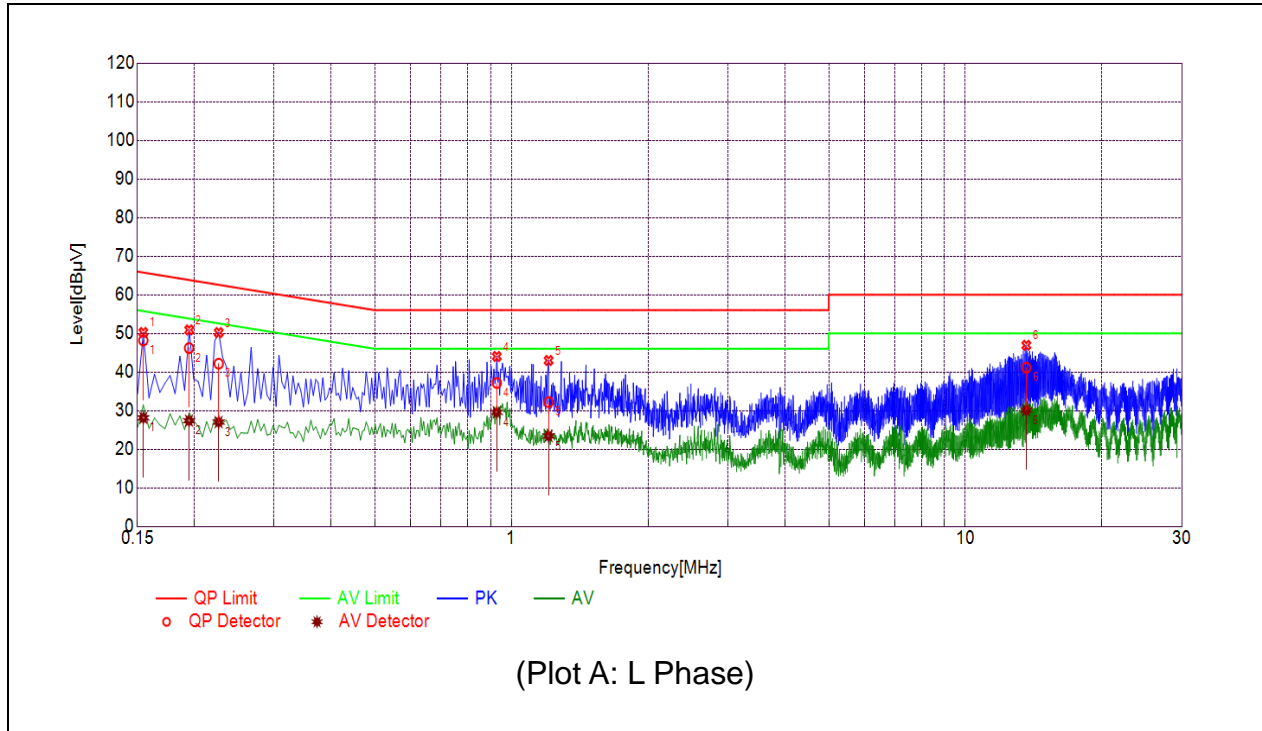

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1545	48.17	28.12	65.76	55.76	Line	PASS
2	0.1948	46.21	27.38	63.83	53.83		PASS
3	0.2264	42.16	27.01	62.58	52.58		PASS
4	0.9282	37.17	29.54	56.00	46.00		PASS
5	1.2072	32.20	23.42	56.00	46.00		PASS
6	13.6177	41.14	30.07	60.00	50.00		PASS

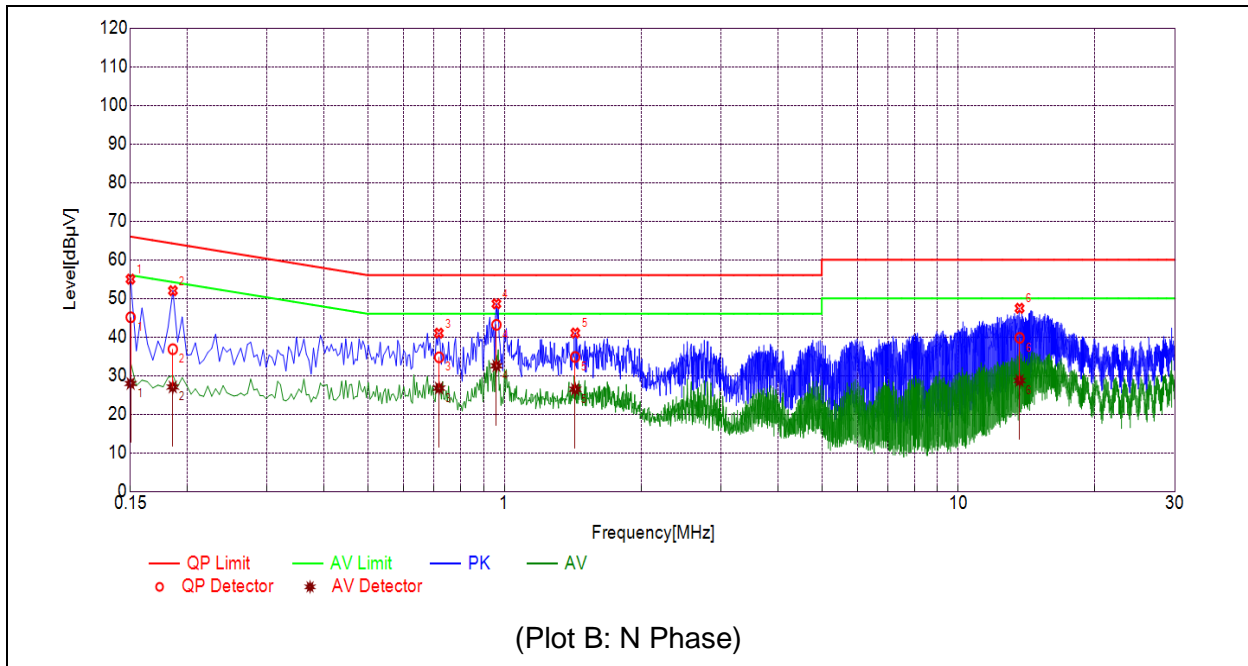

NO.	Fre. (MHz)	Emission Level (dBµV)		Limit (dBµV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.1501	45.11	27.95	66.00	56.00	Neutral	PASS
2	0.1859	36.85	27.04	64.22	54.22		PASS
3	0.7177	34.74	26.75	56.00	46.00		PASS
4	0.9600	43.15	32.54	56.00	46.00		PASS
5	1.4311	34.83	26.45	56.00	46.00		PASS
6	13.6415	39.78	28.72	60.00	50.00		PASS



2.2. Radiated Emission

2.2.1. Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.2.2. Test Description

A. Test Setup:

- 1) For radiated emissions from 9kHz to 30MHz

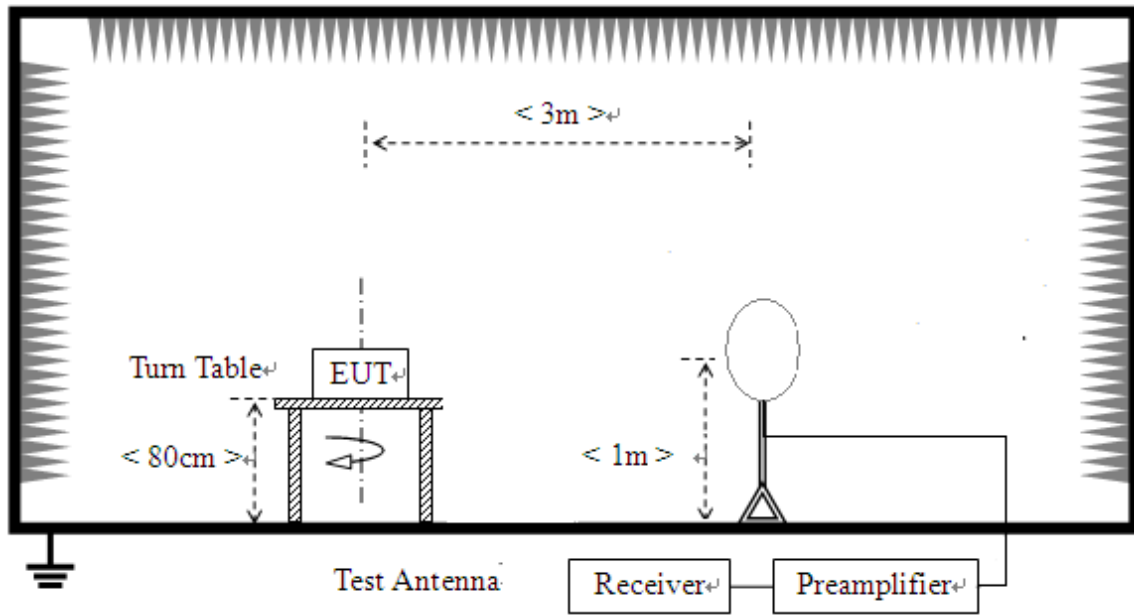

- 2) For radiated emissions from 30MHz to 1GHz

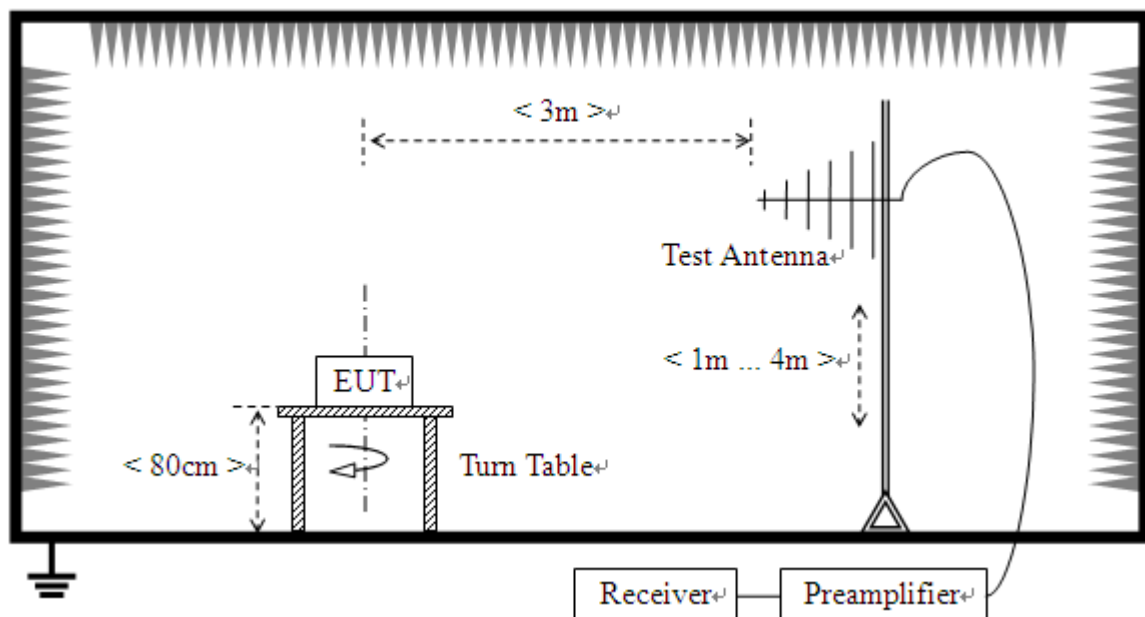



The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. All radiated emission tests were performed in three antenna orientations (parallel, perpendicular, and ground-parallel) only the worst orientation (parallel) was recorded in this test report.

For the Test Antenna:

- (a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- (b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) is used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.5).



2.2.3. Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading

G_{preamp} : Preamplifier Gain


A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.


Note:

All radiated emission tests were performed in full charging mode and 10% charging mode, only the worst mode (full charging mode) was recorded in this test report. And all of the three antenna orientations (parallel, perpendicular and ground-parallel) were tested, the worst case (perpendicular) was reported


A. Test Plots for the Whole Measurement Frequency Range:

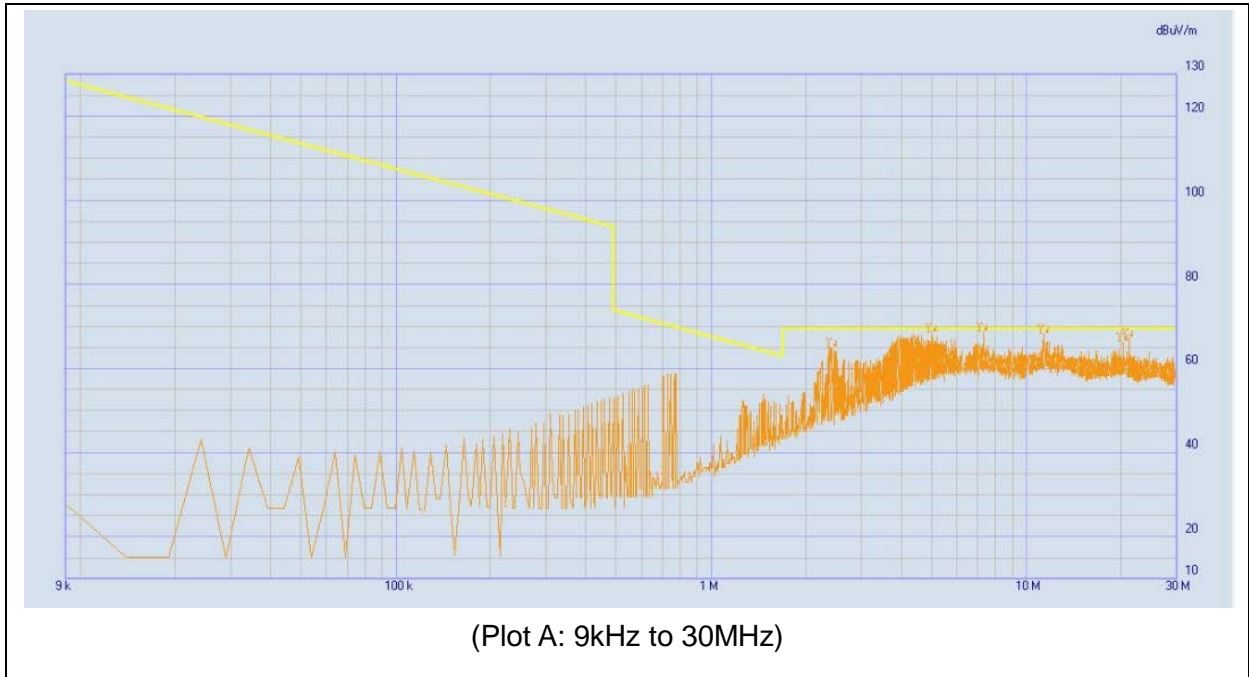

No.	Fre. (MHz)	Level(3m) (dBµV/m)	Limit(3m) (dBµV/m)	Verdict
1	2.404	64.93	69.54	PASS
2	4.979	68.34	69.54	PASS
3	7.279	68.64	69.54	PASS
4	11.374	68.08	69.54	PASS
5	20.139	66.24	69.54	PASS
6	21.024	67.19	69.54	PASS

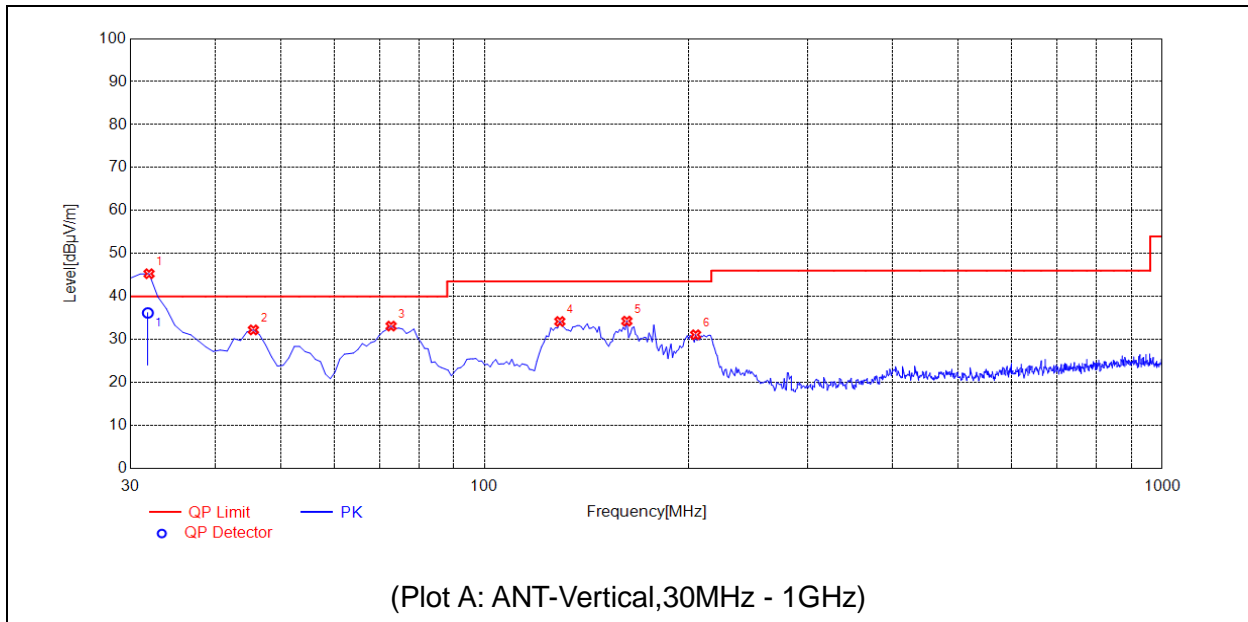

No.	Fre. MHz	Pk dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	31.9419	45.30	36.18	N/A	N/A	40.00	N/A	V	PASS
2	45.5355	32.24	N/A	N/A	N/A	40.00	N/A	V	PASS
3	72.7227	33.13	N/A	N/A	N/A	40.00	N/A	V	PASS
4	129.0390	34.20	N/A	N/A	N/A	43.50	N/A	V	PASS
6	162.0521	34.29	N/A	N/A	N/A	43.50	N/A	V	PASS
7	204.7748	31.11	N/A	N/A	N/A	43.50	N/A	V	PASS

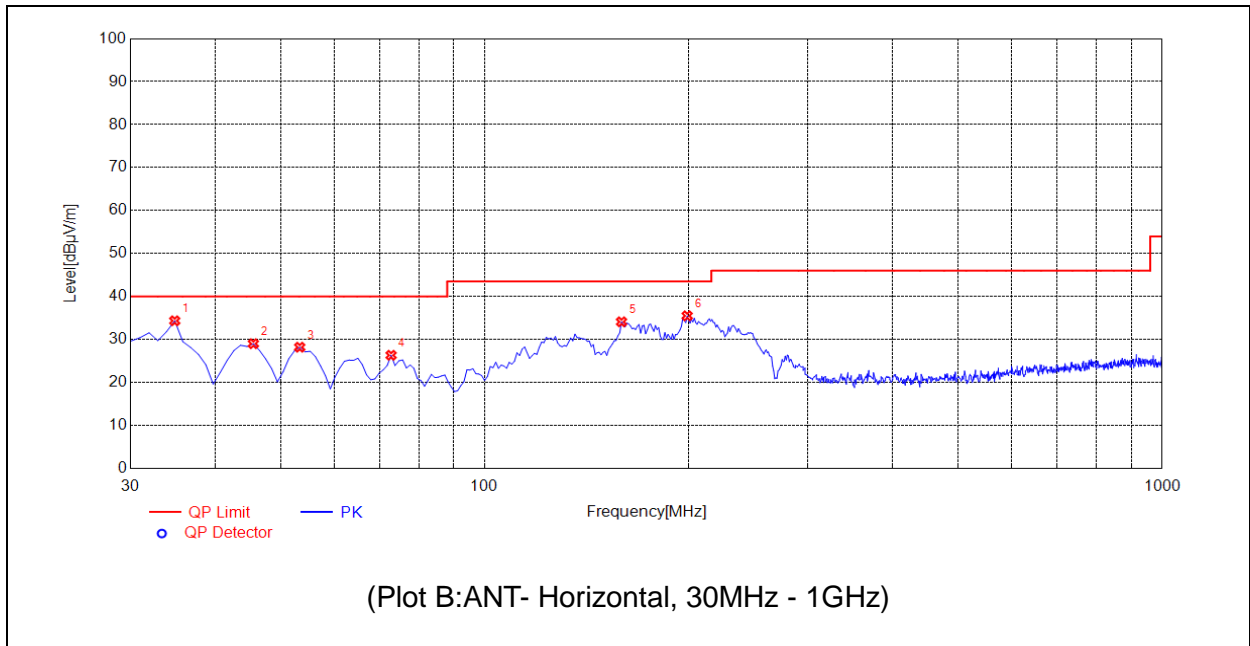


No.	Fre. MHz	Pk dBµV/m	QP dBµV/m	AV dBµV/m	Limit-PK dBµV/m	Limit-QP dBµV/m	Limit-AV dBµV/m	ANT	Verdict
1	34.8549	34.36	N/A	N/A	N/A	40.00	N/A	H	PASS
2	45.5355	29.03	N/A	N/A	N/A	40.00	N/A	H	PASS
3	53.3033	28.21	N/A	N/A	N/A	40.00	N/A	H	PASS
4	72.7227	26.34	N/A	N/A	N/A	40.00	N/A	H	PASS
5	159.1391	34.12	N/A	N/A	N/A	43.50	N/A	H	PASS
6	198.9489	35.51	N/A	N/A	N/A	43.50	N/A	H	PASS

2.3. 20dB Bandwidth

2.3.1. Standard Applicable

According to FCC section 15.215(c), the 20dB bandwidth should be contained within the frequency band designated in the rule section under which the EUT is operated, it was measured with a spectrum analyzer connected the EUT while the EUT is operating in transmission mode.

2.3.2. Test Setup

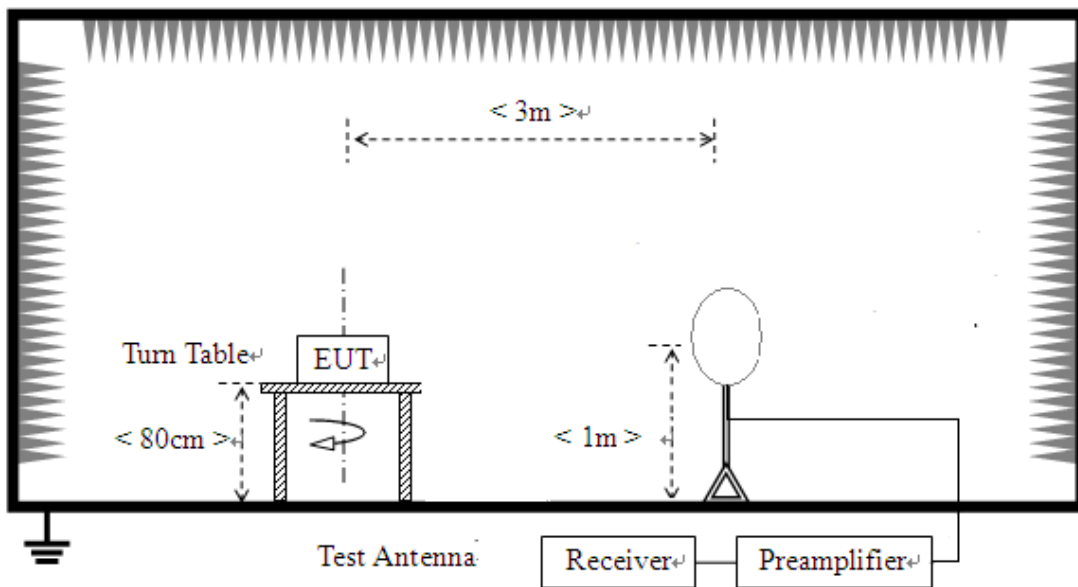




2.3.3. Test Result

20dB Bandwidth (kHz)	Verdict
0.466	Pass

Please refer to the following plot:

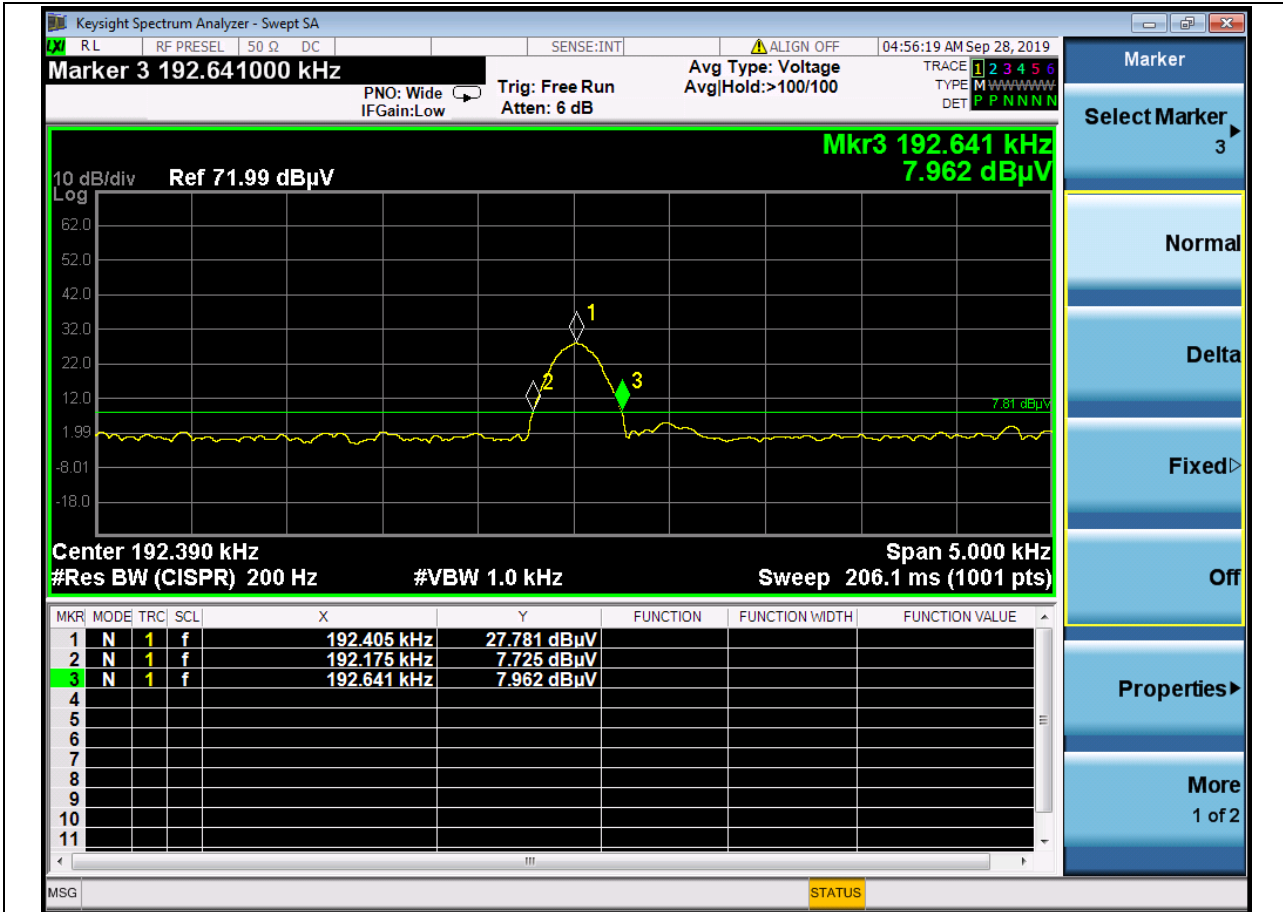

Annex A Test Uncertainty

The uncertainty is calculated using the methods suggested in the "Guide to the Expression of Uncertainty in Measurement" (GUM) published by ISO.

Uncertainty of Conducted Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	9kHz-150kHz	±4.1 dB
	150kHz-30MHz	±3.7dB

Uncertainty of Radiated Emission Measurement

Measuring Uncertainty for a Level of Confidence of 95%(U=2Uc(y))	9KHz-30MHz	±5.16dB
	30MHz-200MHz	±5.06dB
	200MHz-1000MHz	±5.24dB
	1GHz-6GHz	±5.18dB
	6GHz-18GHz	±5.48dB



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192. Test firm registration number is 226174.

4. Test Equipments Utilized

Description	Manufacturer	Model	Serial No.	Cal. Date	Due. Date
Test Receiver	R&S	ESPI	101052	2019.07.29	2020.07.28
LISN	Schwarzbeck	NSLK 8127	812744	2020.03.26	2021.03.25
Pulse Limiter (20dB)	Schwarzbeck	VTSD 9561-F	9537	2019.08.13	2020.08.12
Coaxial cable(BNC) (30MHz-26GHz)	Morlab	EMC01	CB01	N/A	N/A
MXE EMI Receiver	Agilent	N9038A	MY54130016	2019.07.29	2020.07.28
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-519	2019.05.24	2022.05.23



Test Antenna - Loop	Schwarzbeck	FMZB1519	1519-022	2019.02.14	2022.02.13
Coaxial cable (N male) (9KHz-30MHz)	Morlab	EMC04	CB04	N/A	N/A
Coaxial cable (N male) (30MHz-26GHz)	Morlab	EMC02	CB02	N/A	N/A
Coaxial cable(N male) (30MHz-26GHz)	Morlab	EMC03	CB03	N/A	N/A
Semi-Anechoic Chamber	CRT	9m*6m*6m	N/A	2020.01.06	2023.01.05

5.Ancillary Equipment Utilized

Description	Manufacturer	Model	Serial No.
Mobile Phone	HONOR	PLK-AL10	N/A
Tablet	Alldocube	iPlay 20	N/A
Adapter	Jiangsu Chenyang Electron Co. Ltd	A5325	N/A
Load	Shenzhen Oju Technology Co., Ltd.	Q7-T	N/A

————— END OF REPORT —————