



LCIE

# TEST REPORT

N°: 143132-689074-A(FILE#916879)

Version : 03

**Subject** Electromagnetic compatibility and Radio spectrum Matters (ERM) tests according to standards:  
FCC CFR 47 Part 15, Subpart C  
RSS-247 Issue 1.0

**Issued to** ITK SAS  
Avenue de L'Europe  
Cap Alpha Bic de Montpellier Agglomération  
34830 – CLAPIERS  
FRANCE

**Apparatus under test**  
↳ Product ITK SAS  
↳ Trade mark FLOW SENSOR  
↳ Manufacturer ITK SAS  
↳ Model under test FLOW001  
↳ Serial number 0138A7FA & 0138A842  
↳ FCCID 2AIUF-FLOW001

**Conclusion** See Test Program chapter  
**Test date** June 30, 2016 to July 4, 2016  
**Test location** MOIRANS  
**IC Test site** 6500A-1 & 6500A-3  
**Composition of document** 33 pages

**Document issued on** September 8, 2016

**Written by :**

Gaetan DESCHAMPS


Tests operator

This document shall not be reproduced, except in full, without the written approval of the LCIE. This document contains results related only to the items tested. It does not imply the conformity of the whole production to the items tested. Unless otherwise specified, the decision of conformity takes into account the uncertainty of measurement. This document doesn't anticipate any certification decision.

**Approved by :**

Anthony MERLIN

Technical manager

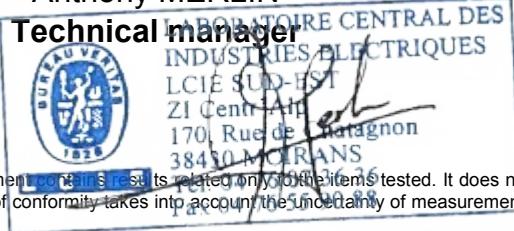

**LCIE**

Laboratoire Central des Industries Electriques  
Une société de Bureau Veritas

ZI Centr'Alp  
170 rue de Chatagnon  
38430 Moirans FRANCE

Tél : +33 4 76 07 36 36  
contact@lcie.fr  
www.lcie.fr



L C I E

## PUBLICATION HISTORY

Version	Date	Author	Modification
01	September 5, 2016	Gaetan DESCHAMPS	Creation of the document
02	September 8, 2016	Gaetan DESCHAMPS	Modification of product name
03	September 23, 2016	Gaetan DESCHAMPS	Update date calibration equipment



LCIE

## SUMMARY

1. TEST PROGRAM .....	4
2. SYSTEM TEST CONFIGURATION.....	5
3. RADIATED EMISSION DATA .....	8
4. BANDWIDTH (15.247) .....	13
5. MAXIMUM PEAK OUTPUT POWER (15.247) .....	16
6. POWER SPECTRAL DENSITY (15.247) .....	19
7. BAND EDGE MEASUREMENT (15.247) .....	22
8. OCCUPIED BANDWIDTH.....	25
9. ANNEX 1 (GRAPHS) .....	27
10. UNCERTAINTIES CHART .....	33



L C I E

## 1. TEST PROGRAM

**Standard:**

- FCC Part 15, Subpart C 15.247
- ANSI C63.10 (2013)
- RSS-247 Issue 1.0 – May 2015
- RSS-Gen Issue 4 – Nov 2014
- 558074 D01 DTS Measurement Guidance v03r05

EMISSION TEST	LIMITS			RESULTS
	Frequency	Quasi-peak value (dB $\mu$ V)	Average value (dB $\mu$ V)	
Limits for conducted disturbance at mains ports 150kHz-30MHz	150-500kHz	66 to 56	56 to 46	<input type="checkbox"/> PASS <input type="checkbox"/> FAIL <input checked="" type="checkbox"/> NA <input type="checkbox"/> NP
	0.5-5MHz	56	46	
	5-30MHz	60	50	
Radiated emissions 9kHz-30MHz CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-247 §5.5	<b>Measure at 300m</b> 9kHz-490kHz : 67.6dB $\mu$ V/m /F(kHz) <b>Measure at 30m</b> 490kHz-1.705MHz : 87.6dB $\mu$ V/m /F(kHz) 1.705MHz-30MHz : 29.5 dB $\mu$ V/m			<input type="checkbox"/> PASS <input type="checkbox"/> FAIL <input checked="" type="checkbox"/> NA <input type="checkbox"/> NP
Radiated emissions 30MHz-25GHz* CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-247 §5.5 <b>Highest frequency :32MHz</b> <i>(Declaration of provider)</i>	<b>Measure at 3m</b> 30MHz-88MHz : 40 dB $\mu$ V/m 88MHz-216MHz : 43.5 dB $\mu$ V/m 216MHz-960MHz : 46.0 dB $\mu$ V/m Above 960MHz : 54.0 dB $\mu$ V/m			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
Bandwidth 6dB CFR 47 §15.247 (a) (2) RSS-247 §5.2	<b>At least 500kHz</b>			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
Power spectral Density CFR 47 §15.247 (e) RSS-247 §5.2	<b>Limit: 8dBm/3kHz</b>			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
Maximum Peak Output Power CFR 47 §15.247 (b) RSS-247 §5.4	<b>Limit: 30dBm</b> Conducted or Radiated measurement			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
Band Edge Measurement CFR 47 §15.209 (a) CFR 47 §15.247 (d) RSS-247 §5.5	<b>Limit: -20dBc or</b> <b>Radiated emissions limits in restricted bands</b>			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
Occupied bandwidth RSS-Gen §4.6.1	<b>No limit</b>			<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL <input type="checkbox"/> NA <input type="checkbox"/> NP
Receiver Spurious Emission** RSS-Gen §4.10	<b>See RSS-Gen §4.10</b>			<input type="checkbox"/> PASS <input type="checkbox"/> FAIL <input checked="" type="checkbox"/> NA <input type="checkbox"/> NP

\*§15.33: The highest internal source of a testing device is defined like more the highest frequency generated or used in the testing device or on which the testing device works or agrees.

- If the highest frequency of the internal sources of the testing device is lower than 108 MHz, measurement must be only performed until 1GHz.
- If the highest frequency of the internal sources of the testing device ranges between 108 MHz and 500 MHz, measurement must be only performed until 2GHz.
- If the highest frequency of the internal sources of the testing device ranges between 500 MHz and 1 GHz, measurement must be only performed until 5GHz.
- If the highest frequency of the internal sources of the testing device is above 1 GHz, measurement must be only performed until 5 times the highest frequency or 40 GHz, while taking smallest of both.



LCIE


## 2. SYSTEM TEST CONFIGURATION

### 2.1. HARDWARE IDENTIFICATION (EUT AND AUXILIARIES):

#### Equipment under test (EUT):

FLOW001

Serial Number: 0138A7FA & 0138A842

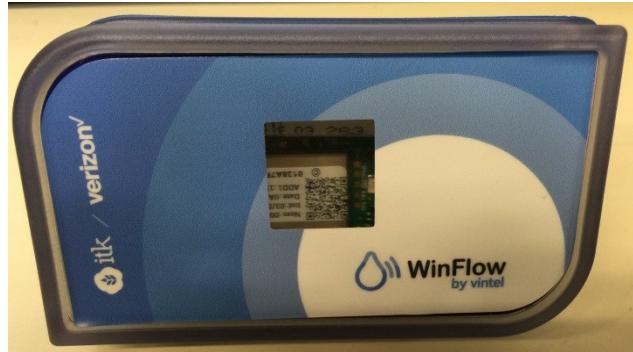

Photography of EUT

#### Power supply:

During all the tests, EUT is supplied by  $V_{nom}$ : 3.6VDC

For measurement with different voltage, it will be presented in test method.

Name	Type	Rating	Reference	Comments
Supply1	<input type="checkbox"/> AC <input type="checkbox"/> DC <input checked="" type="checkbox"/> Battery	3.6VDC	LS 14500	Lithium

#### Inputs/outputs - Cable:

Access	Type	Length used (m)	Declared <3m	Shielded	Under test	Comments
		None				

#### Auxiliary equipment used during test:

Type	Reference	Sn	Comments
Laptop	DELL	-	-
Flow Master	-	-	-



L C I E

**Equipment information:**

EUT information			
RF module:	Low Power Long Range LoRa Technology Transceiver Module		
Frequency Band	[903-927]MHz		
Antenna Type:	<input checked="" type="checkbox"/> Integral	<input type="checkbox"/> External	<input type="checkbox"/> Dedicated
Antenna gain:	2.4 dBi Helical Wire (Linx / ANT-916-HETH)		
Standby mode:	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No	
Equipment intended use:	<input checked="" type="checkbox"/> Fixed	<input type="checkbox"/> Mobile	
Equipment type:	<input type="checkbox"/> Production model	<input checked="" type="checkbox"/> Pre-production model	
Type of power source:	<input type="checkbox"/> AC power supply	<input type="checkbox"/> DC power supply	<input checked="" type="checkbox"/> Battery

**Channel details:**

Channels	CH0	CH1	CH2	CH3	CH4	CH5	CH6	CH7	CH8	CH9	CH10	CH11	CH12	CH13	CH14	CH15
Freq	903	903,8	904,6	905,4	906,2	907	907,8	908,6	909,4	910,2	911	911,8	912,6	913,4	914,2	915
Channels	CH16	CH17	CH18	CH19	CH20	CH21	CH22	CH23	CH24	CH25	CH26	CH27	CH28	CH29	CH30	-
Freq	915,8	916,6	917,4	918,2	919	919,8	920,6	921,4	922,2	923	923,8	924,6	925,4	926,2	927	-

**2.2. EUT CONFIGURATION**

The EUT is set in the following modes during tests with simulator / software (Cloverflow version C0101):

- Permanent emission with modulation on a fixed channel in the data rate that produced the highest power
- Permanent reception

All tests are performed at Cmin, Cmid and Cmax.

The power command is set at 86("hexadecimal") by software and not "0E".

Following commands with the specific test software are used to set the product:

```
# 1- Time before starting test (60s)
# 5- Time of a CloverMaster Test (120s)
# 9 –Time of a FlowSensor Test (63s (max 63s))
=====FCC FlowMeter=====
# 50 – Timed TX (0A) channel 00, power 86
# 51 – Timed TX (0A) channel 15, power 86
# 52 – Timed TX (0A) channel 30, power 86
# 53 – Timed TX (0A) channel 00, power 86
# 54 – Timed TX (0A) channel 15, power 86
# 55 – Timed TX (0A) channel 30, power 86
=====FCC Modem=====
# 60 – Timed TX (0A) channel 00 (903 Mhz) ,power 87
# 61 – Timed TX (0A) channel 15 (915 Mhz), power 87
# 62 – Timed TX (0A) channel 30 (927 Mhz), power 87
# 63 – Timed TX (0A) channel 00 (903 Mhz), power 87
# 64 – Timed TX (0A) channel 15 (915 Mhz), power 87
# 65 – Timed TX (0A) channel 30 (927 Mhz), power 87
=====
# q – exit
=====
```

There are 2 configurations tests (cf §3):

- Configuration 1: The EUT is in TX mode.
- Configuration 2: The EUT is in IDLE mode.

**2.3. EQUIPMENT MODIFICATIONS**

None       Modification:



## 2.4. FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follow:

$$FS = RA + AF + CF - AG$$

Where  
FS = Field Strength  
RA = Receiver Amplitude  
AF = Antenna Factor  
CF = Cable Factor  
AG = Amplifier Gain

Assume a receiver reading of 52.5dB $\mu$ V is obtained. The antenna factor of 7.4 and a cable factor of 1.1 are added. The amplifier gain of 29dB is subtracted, giving a field strength of 32 dB $\mu$ V/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dB}\mu\text{V/m}$$

The 32 dB $\mu$ V/m value can be mathematically converted to its corresponding level in  $\mu$ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m.}$$

## 2.5. CALIBRATION DATE

The calibration intervals are extended at 12+2 months. This extended interval is based on the fact that there is sufficient calibration data to statistically establish a trend or based on experience of use of the test equipment to assure good measurement results for a longer period



LCIE

### 3. RADIATED EMISSION DATA

#### 3.1. ENVIRONMENTAL CONDITIONS

Date of test : June 30, 2016  
Test performed by : Gaëtan DESCHAMPS  
Atmospheric pressure (hPa) : 999  
Relative humidity (%) : 32  
Ambient temperature (°C) : 23

#### 3.2. TEST SETUP

The installation of EUT is identical for pre-characterization measures in a 3 meters semi- anechoic chamber and for measures on the 10 meters Open site.




The EUT and auxiliaries are set:

- 80cm above the ground on the non-conducting table (Table-top equipment) - Below 1GHz
- 150cm above the ground on the non-conducting table (Table-top equipment) - Above 1GHz
- 10cm above the ground on isolating support (Floor standing equipment)

The EUT is powered by  $V_{nom}$ .



Test setup in anechoic chamber Axis XY:

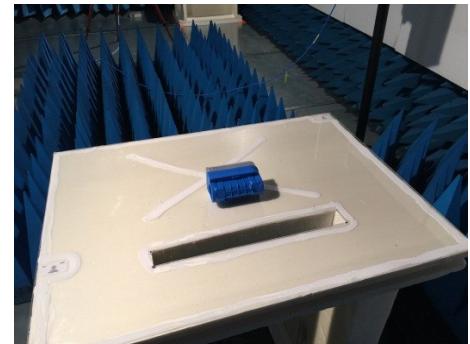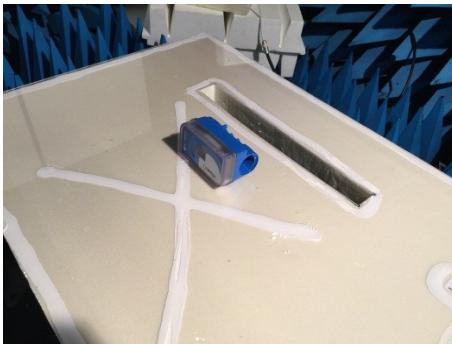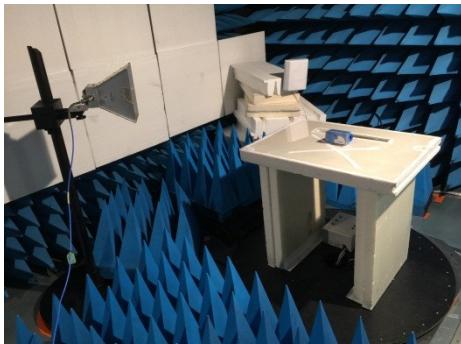

Test setup in anechoic chamber Axis Z:



LCIE



Worst case in Axis Z above 1GHz:

### 3.3. TEST METHOD

The product has been tested according to ANSI C63.10, FCC part 15 subpart C.

#### Pre-characterisation measurement: (9kHz – 10GHz)

A pre-scan of all the setup has been performed in a 3 meters semi-anechoic chamber for frequency from 30MHz to 10GHz. Test is performed in horizontal (H) and vertical (V) polarization, the loop antenna was rotated during the test to maximize the emission measurement. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on all axis of EUT used in normal configuration.

The pre-characterization graphs are obtained in PEAK detection and PEAK/AVERAGE from 1GHz to 10GHz.

#### Characterization on 10 meters open site from 9kHz to 1GHz:

Radiated Emissions were measured on an open area test site. A description of the facility is on file with the FCC. The product has been tested at a distance of **10 meters** from the antenna and compared to the FCC part 15 subpart C limits. Measurement bandwidth was 9kHz below 30MHz and 120kHz from 30 MHz to 1GHz. Test is performed in horizontal (H) and vertical (V) polarization, the loop antenna was rotated during the test to maximize the emission measurement. The height antenna is varied from 1m to 4m. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on all axis of EUT used in normal configuration. A summary of the worst case emissions found in all test configurations and modes is shown.

Frequency list has been created with anechoic chamber pre-scan results.

#### Characterization on 3 meters full anechoic chamber from 1GHz to 10GHz:

The product has been tested at a distance of **3 meters** from the antenna and compared to the FCC part 15 subpart C limits. Measurement bandwidth was 1MHz from 1GHz to 10GHz.

Test is performed in horizontal (H) and vertical (V) polarization. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on all axis of EUT used in normal configuration. A summary of the worst case emissions found in all test configurations and modes is shown. The height antenna is

On mast, varied from 1m to 4m

Fixed and centered on the EUT (EUT smaller than the beamwidth of the measurement antenna, ANSI C63.10 §6.6.5)

Frequency list has been created with anechoic chamber pre-scan results.



LCIE

### 3.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Antenna Bi-log	CHASE	CBL6111A	C2040051	04/14	04/16
Antenna horn	EMCO	3115	C2042027	11/15	11/16
Cable Measure @3m 18GHz	-	-	A5329038	08/14	08/15
Cable substitution (OATS)	-	-	A5329057	05/16	05/17
Cable substitution (OATS)	-	-	A5329059	05/16	05/17
Cable Measure @3m	-	-	A5329206	04/16	04/17
Cable (OATS)	-	-	A5329623	01/16	01/17
Cable Measure @1m	STORMFLEX	0	A5329680	01/16	01/17
Cable Measure @1m	STORMFLEX	0	A5329682	01/16	01/17
Semi-Anechoic chamber #3	SIEPEL	-	D3044017	03/16	03/19
Radiated emission comb generator	BARDET	-	A3169050	-	-
HF Radiated emission comb generator	LCIE SUD EST	-	A3169088	-	-
High Pass (1-15GHz)	WAINRIGHT	WHKX 1.03/15G-10SS	A7484035	03/15	03/17
OATS	-	-	F2000409	06/15	06/16
Receiver 20-1000MHz	ROHDE & SCHWARZ	ESVS30	A2642006	05/15	05/16
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	01/15	01/16
BAT EMC	NEXIO	v3.9.0.10	L1000115	-	-
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	09/15	09/16
Turntable chamber (Cage#3)	ETS Lingren	Model 2165	F2000371	-	-
Turntable / Mast controller (OATS)	ETS Lindgren	Model 2066	F2000372	-	-
Antenna mast (OATS)	ETS Lindgren	2071-2	F2000392	-	-
Turntable (OATS)	ETS Lindgren	Model 2187	F2000403	-	-
Table	MATURO GmbH	-	F2000437	-	-
Table	LCIE	-	F2000461	-	-
Turntable controller (Cage#3)	ETS Lingren	Model 2090	F2000444	-	-

### 3.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

Divergence:



L C I E

### 3.6. TEST RESULTS

#### 3.6.1. Pre-characterization at 3 meters [30MHz-1GHz]

See graphs for 30MHz-1GHz:

Graph identifier	Polarization	Mode	EUT position	Channel	Comments
Emr# 1	H/V	TX	Axis XY	Min	See annex 1
Emr# 2	H/V	TX	Axis XY	Max	See annex 1
Emr# 3	H/V	IDLE	Axis XY	Mid	See annex 1
Emr# 4	H/V	TX	Axis Z	Min	See annex 1
Emr# 5	H/V	TX	Axis Z	Max	See annex 1
Emr# 6	H/V	IDLE	Axis Z	Mid	See annex 1

#### 3.6.2. Characterization on 10 meters open site from 30MHz to 1GHz

##### Worst case final data result:

Frequency list has been created with semi-anechoic chamber pre-scan results.

Measurements are performed using a QUASI-PEAK detection.

No significant suspect frequency observed



LCIE

### 3.6.3. Characterization on 3meters anechoic chamber from 1GHz to 10GHz

#### Worst case final data result:

The frequency list is created from the results obtained during the pre-characterization in anechoic chamber. Measurements are performed using a PEAK and AVERAGE detection.

Test Frequency (MHz)	Meter Reading dB(µV)	Detector (Pk/QP/Av)	Polarity (V/H)	Azimuth (Degrees)	Antenna Height (cm)	Gain/Loss Factor (dB)	Transducer Factor (dB)	Level (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2709.000	20.0	Pk	V	130	150	-	31.7	51.7	74.0	-22.3
2745.000	20.8	Pk	V	0	150	-	31.9	52.7	74.0	-21.3
2781.000	21.0	Pk	V	360	150	-	32.0	53.0	74.0	-21.0
3612.000	22.2	Pk	V	32	150	-	33.8	56.0	74.0	-18.0
3660.000	20.2	Pk	V	0	150	-	34.0	54.2	74.0	-19.8
3708.000	18.0	Pk	V	110	150	-	34.1	52.1	74.0	-21.9
4515.000	28.2	Pk	V	0	150	-	35.3	63.5	74.0	-10.5
4575.000	21.8	Pk	V	0	150	-	35.4	57.2	74.0	-16.8
4635.000	19.2	Pk	V	0	150	-	35.6	54.8	74.0	-19.2
2709.000	9.2	Av	V	130	150	-	31.7	40.9	54.0	-13.1
2745.000	11.3	Av	V	0	150	-	31.9	43.2	54.0	-10.8
2781.000	12.5	Av	V	360	150	-	32.0	44.5	54.0	-9.5
3612.000	12.4	Av	V	32	150	-	33.8	46.2	54.0	-7.8
3660.000	9.1	Av	V	0	150	-	34.0	43.1	54.0	-10.9
3708.000	5.9	Av	V	110	150	-	34.1	40.0	54.0	-14.0
4515.000	9.8	Av	V	0	150	-	35.3	45.1	54.0	-8.9
4575.000	6.6	Av	V	0	150	-	35.4	42.0	54.0	-12.0
4635.000	4.6	Av	V	0	150	-	35.6	40.2	54.0	-13.8

Note: Measures have been done at 3m distance.

## 3.7. CONCLUSION

Radiated emission data measurement performed on the sample of the product **FLOW001**, SN: 0138A7FA & 0138A842, in configuration and description presented in this test report, show levels below the FCC CFR 47 Part 15 and RSS-247 limits.



LCIE

## 4. BANDWIDTH (15.247)

### 4.1. TEST CONDITIONS

Date of test : June 30, 2016  
Test performed by : Gaëtan DESCHAMPS  
Atmospheric pressure (hPa) : 999  
Relative humidity (%) : 32  
Ambient temperature (°C) : 23

### 4.2. SETUP

#### **Conducted measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.


Offset: Attenuator+cable 10.1dB

#### **Radiated measurement:**

The EUT is placed in an anechoic chamber; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete, a delta marker is used to measure the frequency difference as the emission bandwidth.

#### **Measurement Procedure: §8.1 Option 1 (DTS Measurement Guidance)**

1. Set resolution bandwidth (RBW) = 100kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission. Compare the resultant bandwidth with the RBW setting of the analyzer.

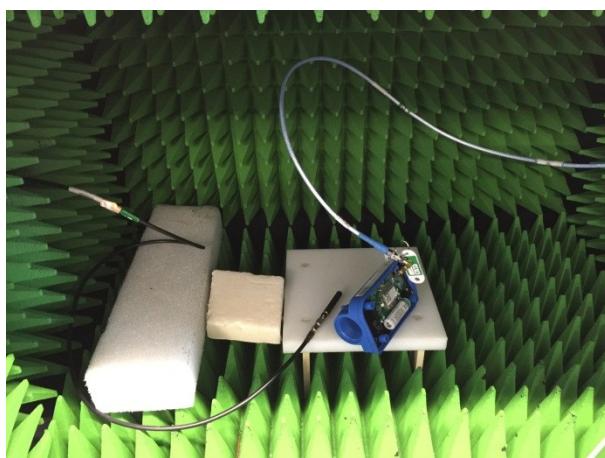



LCIE

#### 4.3. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	-	A7122269	08/16	08/17
Cable Measure @1m	STORMFLEX	0	A5329682	01/16	01/17
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	08/16	08/17
RSCommander	R&S	v1.6.4	L1000116	-	-
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	09/15	09/16

#### 4.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None

Divergence:



L C I E

#### 4.5. TEST SEQUENCE AND RESULTS

Channel	Channel Frequency (MHz)	6dB Bandwidth (MHz)	Bandwidth Limit (MHz)
Cmin	903	<b>0.785</b>	<b>&gt;0.5</b>
Cmid	915	<b>0.836</b>	<b>&gt;0.5</b>
Cmax	927	<b>0.840</b>	<b>&gt;0.5</b>

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		902.82182 MHz	7.61 dBm	ndB down	785.920000000 kHz
T1	1		902.521825 MHz	1.41 dBm	ndB	6.00 dB
T2	1		903.32417 MHz	1.65 dBm	Q factor	1148.7

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		915.13019 MHz	7.71 dBm	ndB down	836.720000000 kHz
T1	1		914.53165 MHz	1.30 dBm	ndB	6.00 dB
T2	1		915.369365 MHz	1.82 dBm	Q factor	1093.7

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1	1		927.014200 MHz	7.58 dBm	ndB down	840.720000000 kHz
T1	1		926.52165 MHz	1.50 dBm	ndB	6.00 dB
T2	1		927.36256 MHz	1.56 dBm	Q factor	1102.6

#### 4.6. CONCLUSION

Bandwidth measurement performed on the sample of the product **FLOW001**, SN: 0138A7FA, in configuration and description presented in this test report, show levels below the FCC CFR 47 Part 15 and RSS-247 limits.



LCIE

## 5. MAXIMUM PEAK OUTPUT POWER (15.247)

### 5.1. TEST CONDITIONS

Date of test : June 30, 2016  
Test performed by : Gaëtan DESCHAMPS  
Atmospheric pressure (hPa) : 999  
Relative humidity (%) : 32  
Ambient temperature (°C) : 23

### 5.2. SETUP

#### **Conducted measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency.

Offset: Attenuator+cable 10.1dB

#### **Radiated measurement:**

The EUT is placed in an anechoic chamber; the center frequency of the spectrum analyzer is set to the fundamental frequency.

The product has been tested at a distance of 3 meters from the antenna. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown on following table. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.


To demonstrate compliance with peak output power requirement of section 15.247 (b), the transmitter's peak output power is calculated using the following equation:

$$E = \frac{\sqrt{30PG}}{d}$$

Where:

- E is the measured maximum fundamental field strength in V/m.
- G is the numeric gain of the transmitting antenna with reference to an isotropic radiator.
- d is the distance in meters from which the field strength was measured.
- P is the power in watts for which you are solving:

$$P = \frac{(Ed)^2}{30G}$$

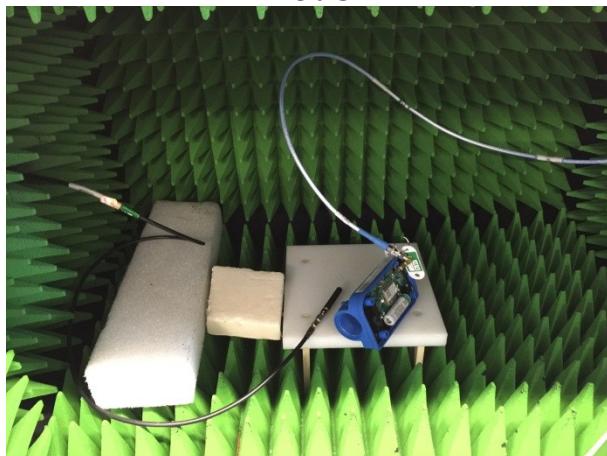



LCIE

### **Maximum peak conducted output power**

One of the following procedures may be used to determine the maximum peak conducted output power of a DTS EUT.

- **RBW ≥ DTS bandwidth      §9.1.1 (DTS Measurement Guidance)**

This procedure shall be used when the measurement instrument has available a resolution bandwidth that is greater than the DTS bandwidth.

- Set the RBW  $\geq$  DTS bandwidth.
- Set VBW  $\geq 3 \times$  RBW.
- Set span  $\geq 3 \times$  RBW
- Sweep time = auto couple.
- Detector = peak.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use peak marker function to determine the peak amplitude level.

- **Integrated band power method**

This procedure may be used when the maximum available RBW of the measurement instrument is less than the DTS bandwidth.

- Set the RBW = 1 MHz.
- Set the VBW  $\geq 3 \times$  RBW
- Set the span  $\geq 1.5 \times$  DTS bandwidth.
- Detector = peak.
- Sweep time = auto couple.
- Trace mode = max hold.
- Allow trace to fully stabilize.
- Use the instrument's band/channel power measurement function with the band limits set equal to the DTS bandwidth edges

### **5.3. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	-	A7122269	08/16	08/17
Cable Measure @1m	STORMFLEX	0	A5329682	01/16	01/17
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	08/16	08/17
RSCommander	R&S	v1.6.4	L1000116	-	-
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	09/15	09/16

### **5.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION**

None

Divergence:




L C I E

## 5.5. TEST SEQUENCE AND RESULTS

### Modulation:

Channel	Channel Frequency (MHz)	Peak Output Power (dBm)	Power Limit (dBm)
Cmin	903	<b>7.59</b>	30.0
Cmid	915	<b>7.60</b>	30.0
Cmax	927	<b>7.64</b>	30.0

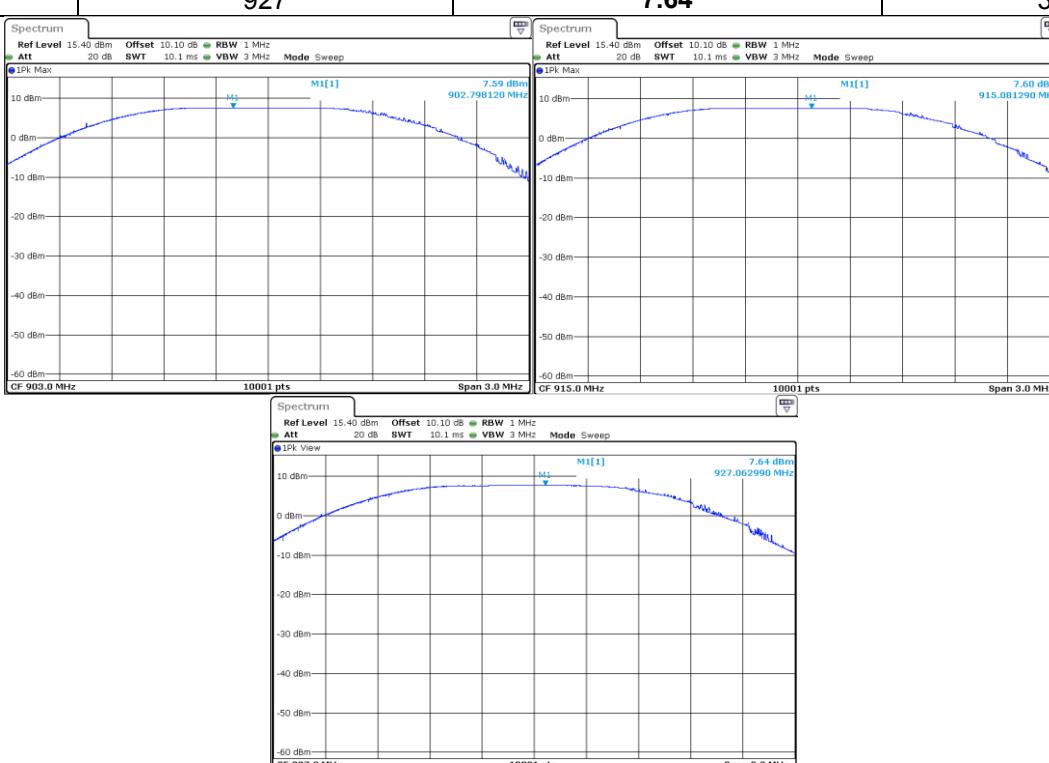

## 5.6. CONCLUSION

Maximum Peak Output Power measurement performed on the sample of the product **FLOW001**, SN: 0138A7FA, in configuration and description presented in this test report, show levels below the FCC CFR 47 Part 15 and RSS-247 limits.



LCIE

## 6. POWER SPECTRAL DENSITY (15.247)

### 6.1. TEST CONDITIONS


Date of test : June 30, 2016  
Test performed by : Gaëtan DESCHAMPS  
Atmospheric pressure (hPa) : 999  
Relative humidity (%) : 32  
Ambient temperature (°C) : 23

### 6.2. SETUP

#### **Conducted measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency.

Offset: Attenuator+cable 10.1dB

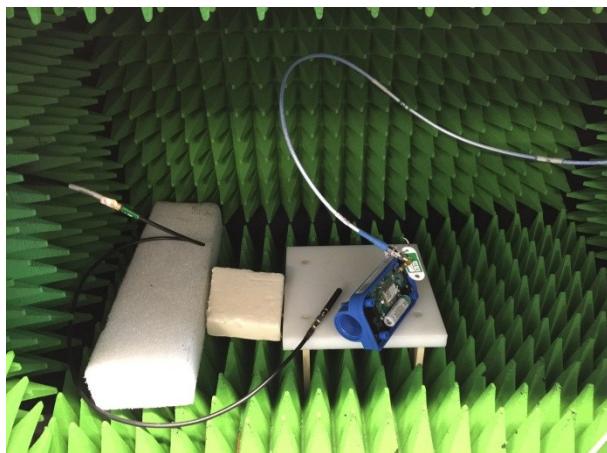

#### **Radiated measurement:**

The EUT is placed in an anechoic chamber; the center frequency of the spectrum analyzer is set to the fundamental frequency.

The product has been tested at a distance of 3 meters from the antenna. Continuous linear turntable azimuth search was performed with 360 degrees range. Measurement performed on 3 axis of EUT. A summary of the worst case emissions found in all test configurations and modes is shown on following table. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

To demonstrate compliance with peak output power requirement of section 15.247 (b), the transmitter's peak output power is calculated using the following equation:

$$E = \frac{\sqrt{30PG}}{d}$$

Where:

- E is the measured maximum fundamental field strength in V/m.
- G is the numeric gain of the transmitting antenna with reference to an isotropic radiator.
- d is the distance in meters from which the field strength was measured.

- P is the power in watts for which you are solving:

$$P = \frac{(Ed)^2}{30G}$$

**Measurement Procedure PKPSD: §10.2 (DTS Measurement Guidance)**

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to: 3 kHz.
- d) Set the VBW  $\geq$  3 x RBW.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

**6.3. TEST EQUIPMENT LIST**

DESCRIPTION	MANUFACTURER	MODEL	Nº LCIE	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	-	A7122269	08/16	08/17
Cable Measure @1m	STORMFLEX	0	A5329682	01/16	01/17
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	08/16	08/17
RSCommander	R&S	v1.6.4	L1000116	-	-
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	09/15	09/16

**6.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION**

None       Divergence:



L C I E

## 6.5. TEST SEQUENCE AND RESULTS

### Modulation:

Channel	Channel Frequency (MHz)	Power Spectral Density (dBm)	PSD Limit (dBm)
Cmin	903	6.27	8.0
Cmid	915	3.92	8.0
Cmax	927	4.24	8.0

## 6.6. CONCLUSION

Power Spectral Density measurement performed on the sample of the product **FLOW001**, SN: 0138A7FA, in configuration and description presented in this test report, show levels below the FCC CFR 47 Part 15 and RSS-247 limits.



LCIE

## 7. BAND EDGE MEASUREMENT (15.247)


### 7.1. TEST CONDITIONS

Date of test : June 30, 2016  
Test performed by : Gaëtan DESCHAMPS  
Atmospheric pressure (hPa) : 999  
Relative humidity (%) : 32  
Ambient temperature (°C) : 23

### 7.2. LIMIT

#### **RF antenna conducted test: § 11 (DTS Measurement Guidance)**

Set RBW = 100 kHz, Video bandwidth (VBW) > RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. Note: If the device complies with the use of power option 2 the attenuation under this paragraph shall be 30 dB instead of 20 dB. *For -20dBc limit, lowest power output level is considered, worst case.*

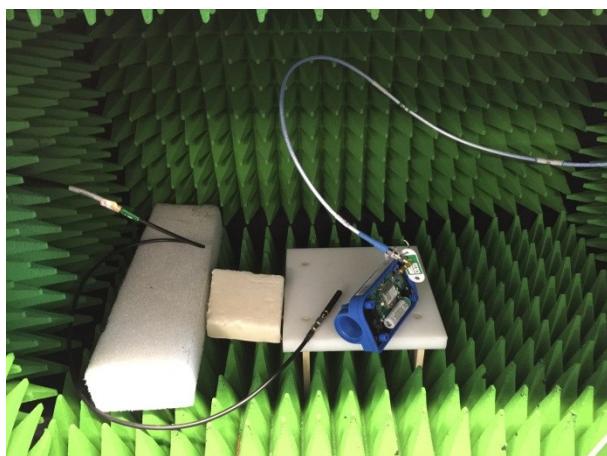

#### **Radiated emission test: § 12 (DTS Measurement Guidance)**

Applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. For measurements above 1 GHz, set RBW = 1MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation; use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See results in Radiated emissions section before.

### 7.3. SETUP

The EUT is placed in an anechoic chamber; levels have been corrected to be in compliant with Peak Output Power measurement. The EUT is turn ON; the graphs of the restrict frequency band are recorded with a display line indicating the highest level and other the 20dB offset below to show compliance with 15.247 (d) and 15.205. The emissions in restricted bands are compared to 15.209 limits.

RBW: 100kHz

VBW: 300kHz



LCIE

#### 7.4. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	-	A7122269	08/16	08/17
Cable Measure @1m	STORMFLEX	0	A5329682	01/16	01/17
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	08/16	08/17
RSCommander	R&S	v1.6.4	L1000116	-	-
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	09/15	09/16


#### 7.5. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None       Divergence:


#### 7.6. TEST SEQUENCE AND RESULTS

Offset: Attenuator+cable 10.1dB

GRAPH / MODULATION.

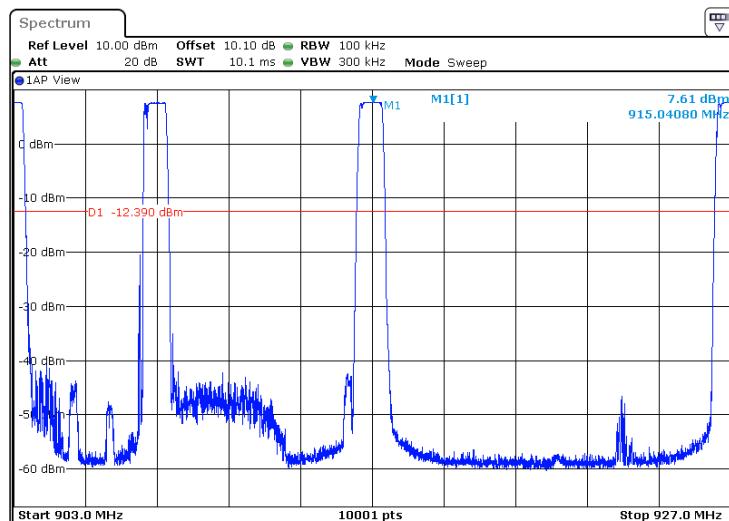


Worst case/ Cmid, display line at -12.39dBm.

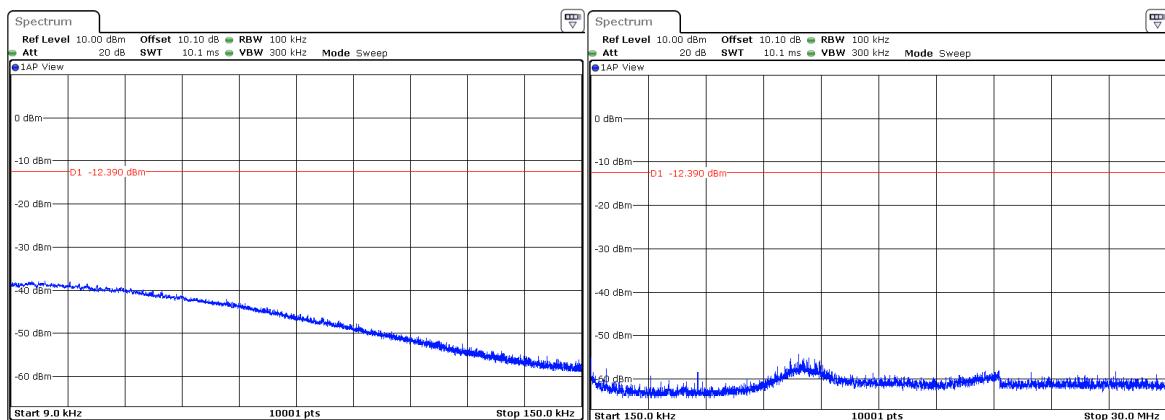



L C I E

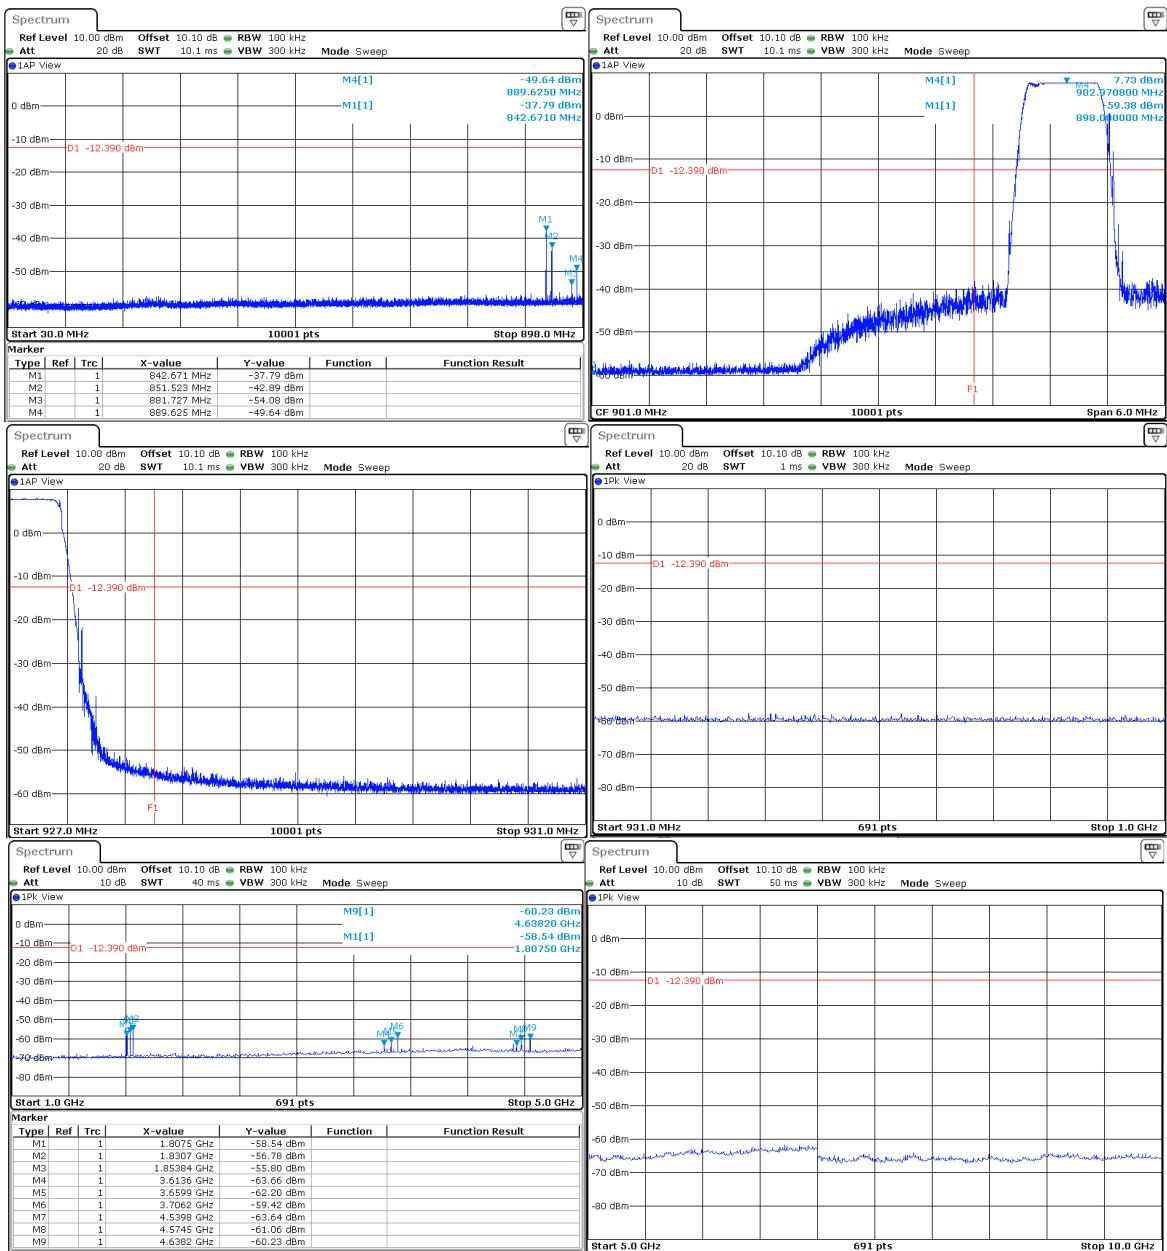

## 7.7. CONCLUSION

Band Edge Measurement performed on the sample of the product **FLOW001**, SN: 0138A7FA, in configuration and description presented in this test report, show levels below the FCC CFR 47 Part 15 and RSS-247 limits.



LCIE

## 8. OCCUPIED BANDWIDTH

### 8.1. TEST CONDITIONS


Date of test : July 1, 2016  
Test performed by : Gaëtan DESCHAMPS  
Atmospheric pressure (hPa) : 999  
Relative humidity (%) : 32  
Ambient temperature (°C) : 23

### 8.2. SETUP

**Conducted measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

Offset: Attenuator+cable 10.1dB

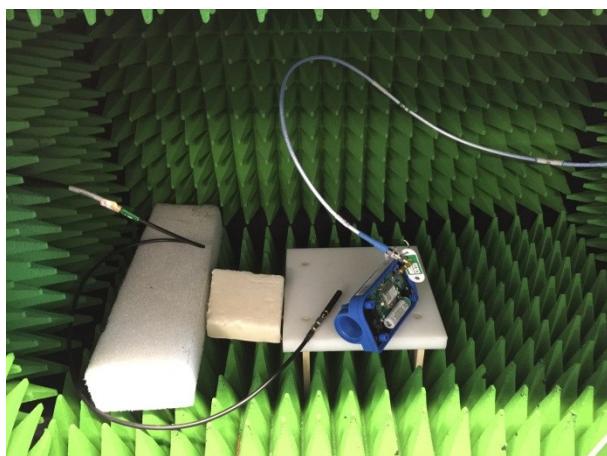

**Radiated measurement:**

The EUT is turned ON and connected to measurement instrument; the center frequency of the spectrum analyzer is set to the fundamental frequency. The captured power is measured and recorded; the measurement is repeated until all frequencies required were complete.

**Measurement Procedure:**

- a) RBW shall be in the range of 1% to 5% of the anticipated occupied bandwidth
- b) Set the video bandwidth (VBW)  $\geq 3 \times$  RBW
- c) SPAN = Capture all products of the modulation process
- d) Detector = Peak.
- e) Trace mode = max hold.
- f) Sweep = auto couple.
- g) Allow the trace to stabilize.
- h) OBW 99% function of spectrum analyzer used



L C I E


### 8.3. TEST EQUIPMENT LIST

DESCRIPTION	MANUFACTURER	MODEL	N° LCIE	Cal_Date	Cal_Due
Attenuator 10dB	AEROFLEX	-	A7122269	08/16	08/17
Cable Measure @1m	STORMFLEX	0	A5329682	01/16	01/17
Spectrum analyzer	ROHDE & SCHWARZ	FSV 30	A4060050	08/16	08/17
RSCommander	R&S	v1.6.4	L1000116	-	-
Thermo-hygrometer (PM2)	OREGON	BAR916HG-G	B4206011	09/15	09/16

### 8.4. DIVERGENCE, ADDITION OR SUPPRESSION ON THE TEST SPECIFICATION

None       Divergence:

### 8.5. TEST SEQUENCE AND RESULTS

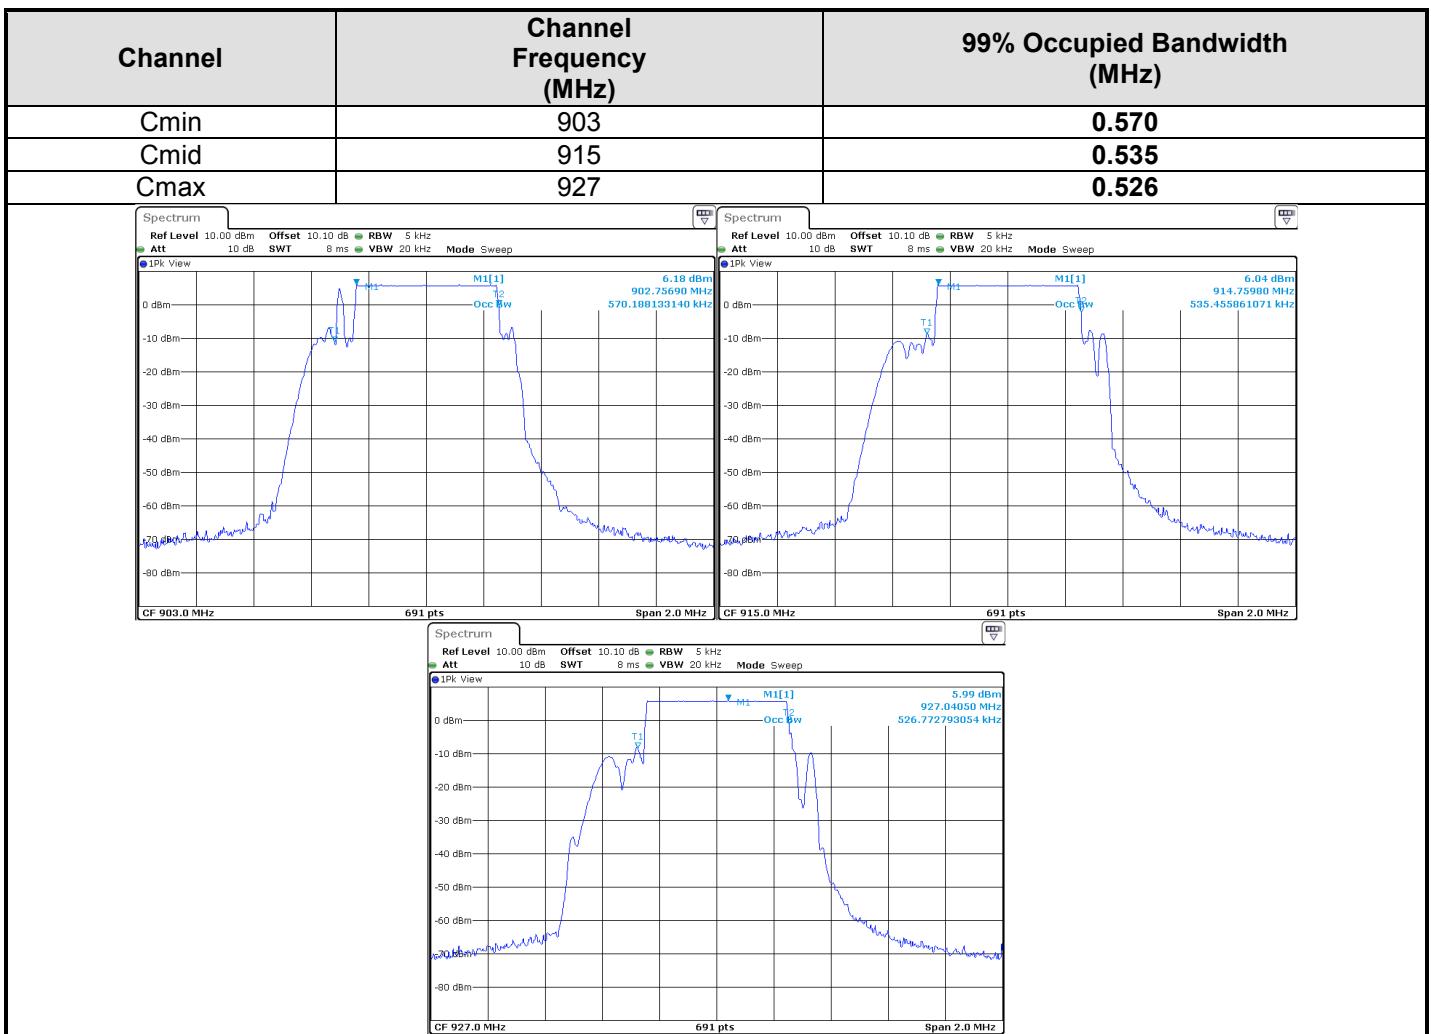




L C I E

## 9. ANNEX 1 (GRAPHS)

### RADIATED EMISSIONS

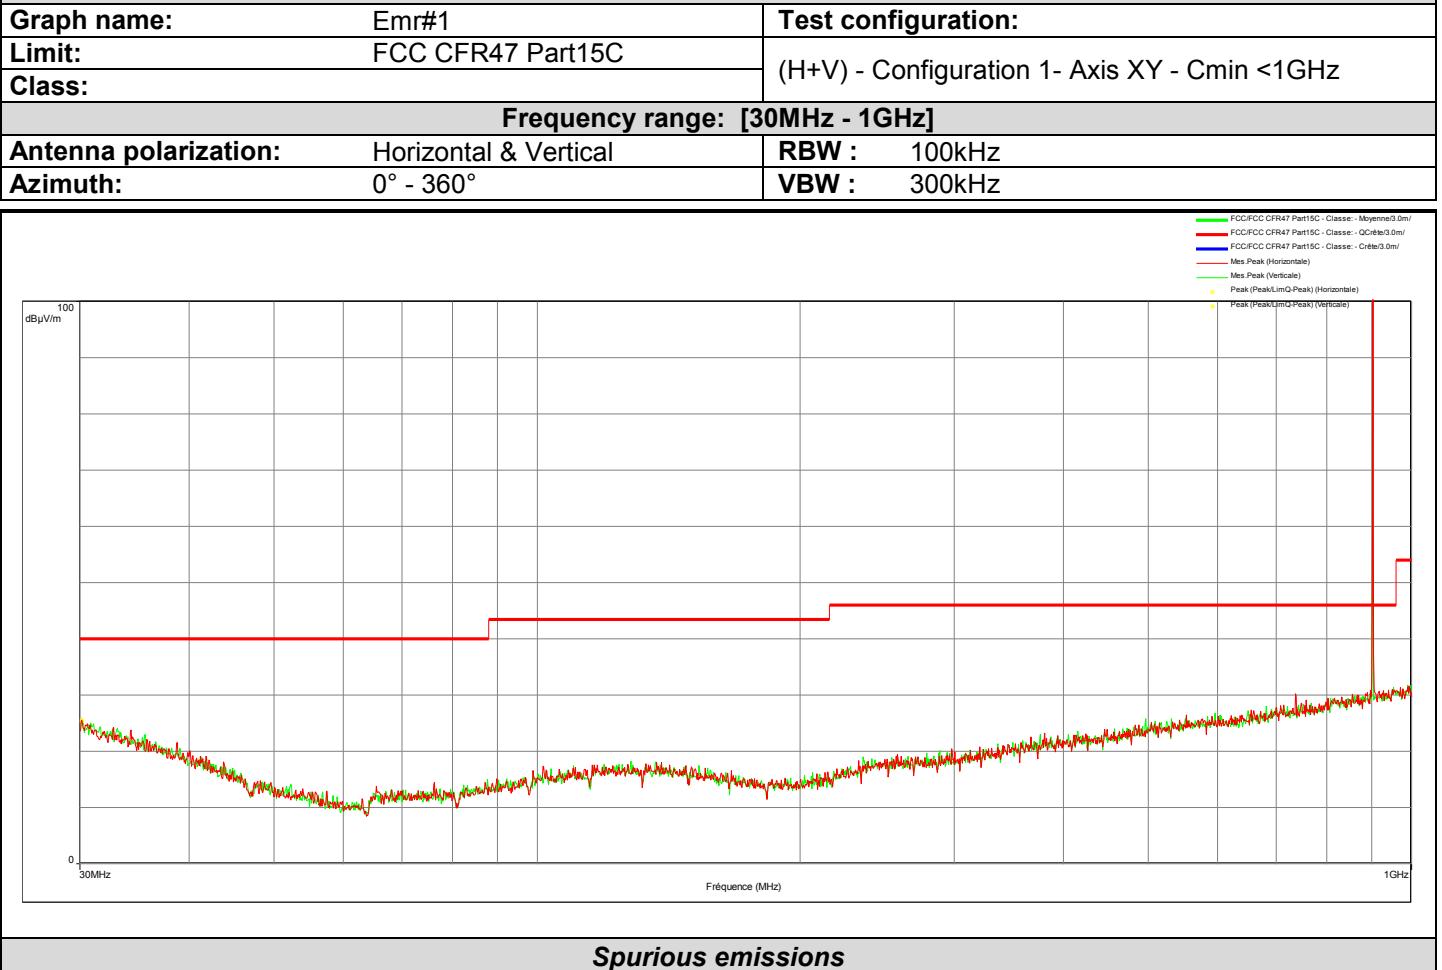

### Spurious emissions


Frequency (MHz)	Peak (dB $\mu$ V/m)	LimQP (dB $\mu$ V/m)	Peak-LimQP (dB)	Polarization
30.136	25.6	40.0	-14.4	Horizontal
30.170	25.3	40.0	-14.7	Vertical



L C I E

### RADIATED EMISSIONS

Graph name:	Emr#2	Test configuration:
Limit:	FCC CFR47 Part15C	(H+V) - Configuration 1- Axis XY - Cmax <1GHz
Class:		
<b>Frequency range: [30MHz - 1GHz]</b>		
Antenna polarization:	Horizontal & Vertical	RBW : 100kHz
Azimuth:	0° - 360°	VBW : 300kHz

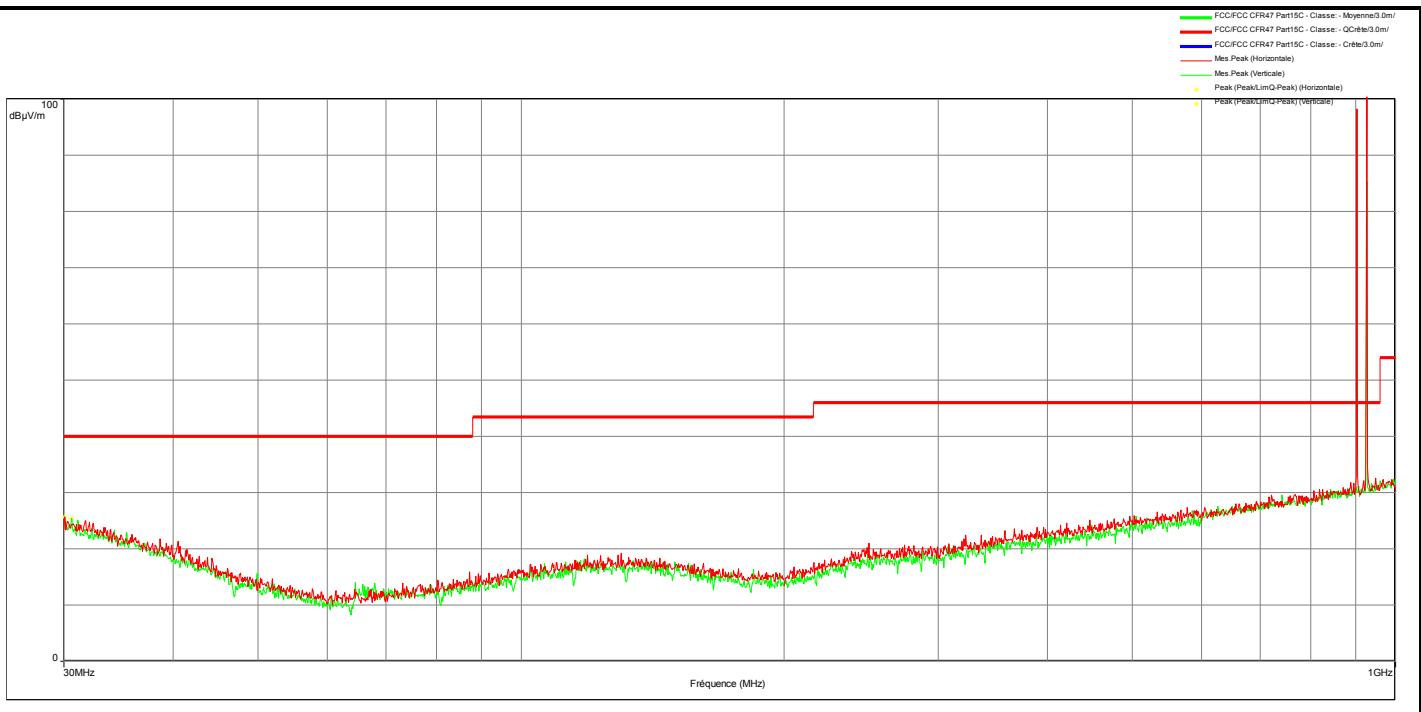


Frequency (MHz)	Peak (dB $\mu$ V/m)	LimQP (dB $\mu$ V/m)	Peak-LimQP (dB)	Polarization
30.068	25.7	40.0	-14.3	Horizontal
30.612	25.4	40.0	-14.6	Vertical



L C I E

### RADIATED EMISSIONS

Graph name:	Emr#3	Test configuration:
Limit:	FCC CFR47 Part15C	(H+V) - Configuration 2 - Axis XY - IDLE <1GHz
Class:		
<b>Frequency range: [30MHz - 1GHz]</b>		
Antenna polarization:	Horizontal & Vertical	RBW : 100kHz
Azimuth:	0° - 360°	VBW : 300kHz

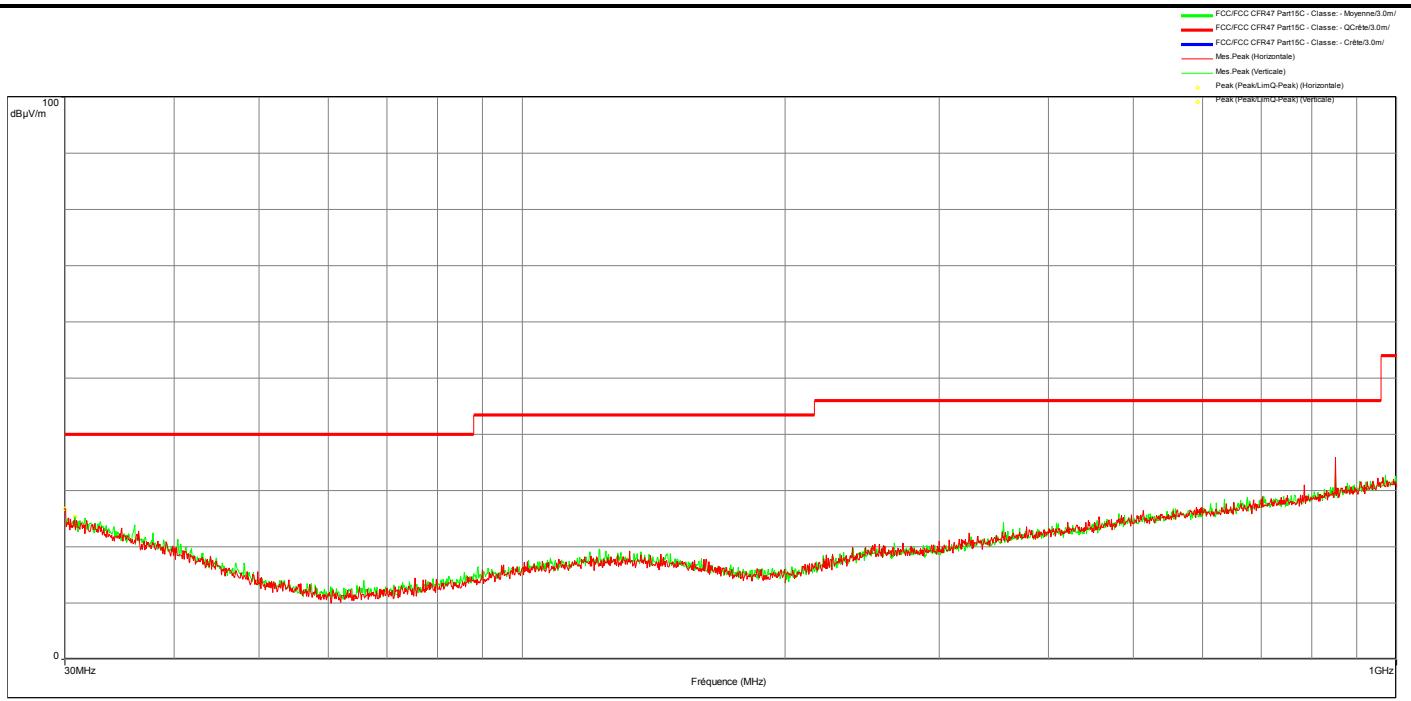

### Spurious emissions


Frequency (MHz)	Peak (dB $\mu$ V/m)	LimQP (dB $\mu$ V/m)	Peak-LimQP (dB)	Polarization
30.017	26.8	40.0	-13.2	Horizontal
30.799	25.3	40.0	-14.7	Vertical



L C I E

### RADIATED EMISSIONS

Graph name:	Emr#4	Test configuration:
Limit:	FCC CFR47 Part15C	(H+V) - Configuration 1 - Axis Z- Cmin <1GHz
Class:		
<b>Frequency range: [30MHz - 1GHz]</b>		
Antenna polarization:	Horizontal & Vertical	RBW : 100kHz
Azimuth:	0° - 360°	VBW : 300kHz

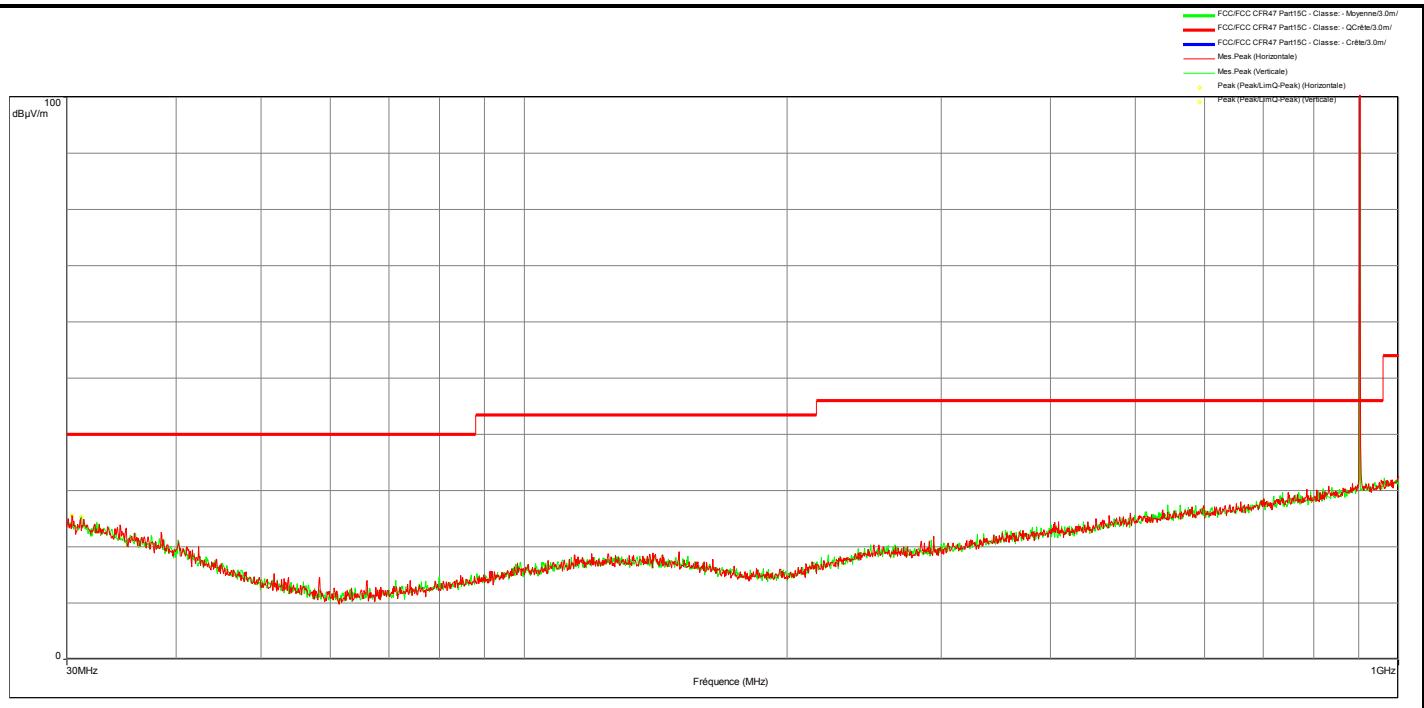

### Spurious emissions


Frequency (MHz)	Peak (dB $\mu$ V/m)	LimQP (dB $\mu$ V/m)	Peak-LimQP (dB)	Polarization
30.408	25.5	40.0	-14.5	Horizontal
31.173	25.4	40.0	-14.6	Vertical



L C I E

### RADIATED EMISSIONS

Graph name:	Emr#5	Test configuration:
Limit:	FCC CFR47 Part15C	(H+V) - Configuration 1 - Axis Z - Cmax <1GHz
Class:		
<b>Frequency range: [30MHz - 1GHz]</b>		
Antenna polarization:	Horizontal & Vertical	RBW : 100kHz
Azimuth:	0° - 360°	VBW : 300kHz

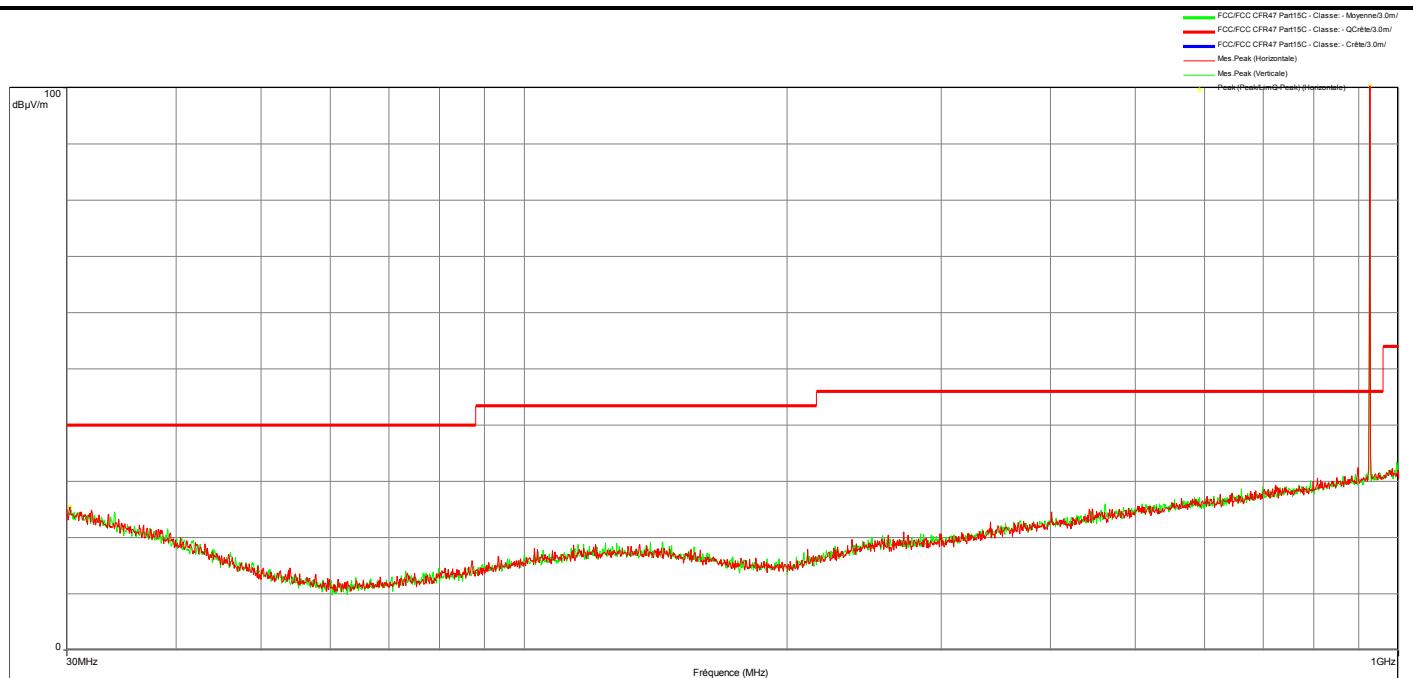

### Spurious emissions


Frequency (MHz)	Peak (dB $\mu$ V/m)	LimQP (dB $\mu$ V/m)	Peak-LimQP (dB)	Polarization
30.238	25.4	40.0	-14.6	Horizontal
927.040	100.1	46.0	54.0	Horizontal



L C I E

### RADIATED EMISSIONS

<b>Graph name:</b>	Emr#6	<b>Test configuration:</b>
<b>Limit:</b>	FCC CFR47 Part15C	(H+V) - Configuration 2 - Axis Z - IDLE <1GHz
<b>Class:</b>		
<b>Frequency range: [30MHz - 1GHz]</b>		
<b>Antenna polarization:</b>	Horizontal & Vertical	<b>RBW :</b> 100kHz
<b>Azimuth:</b>	0° - 360°	<b>VBW :</b> 300kHz

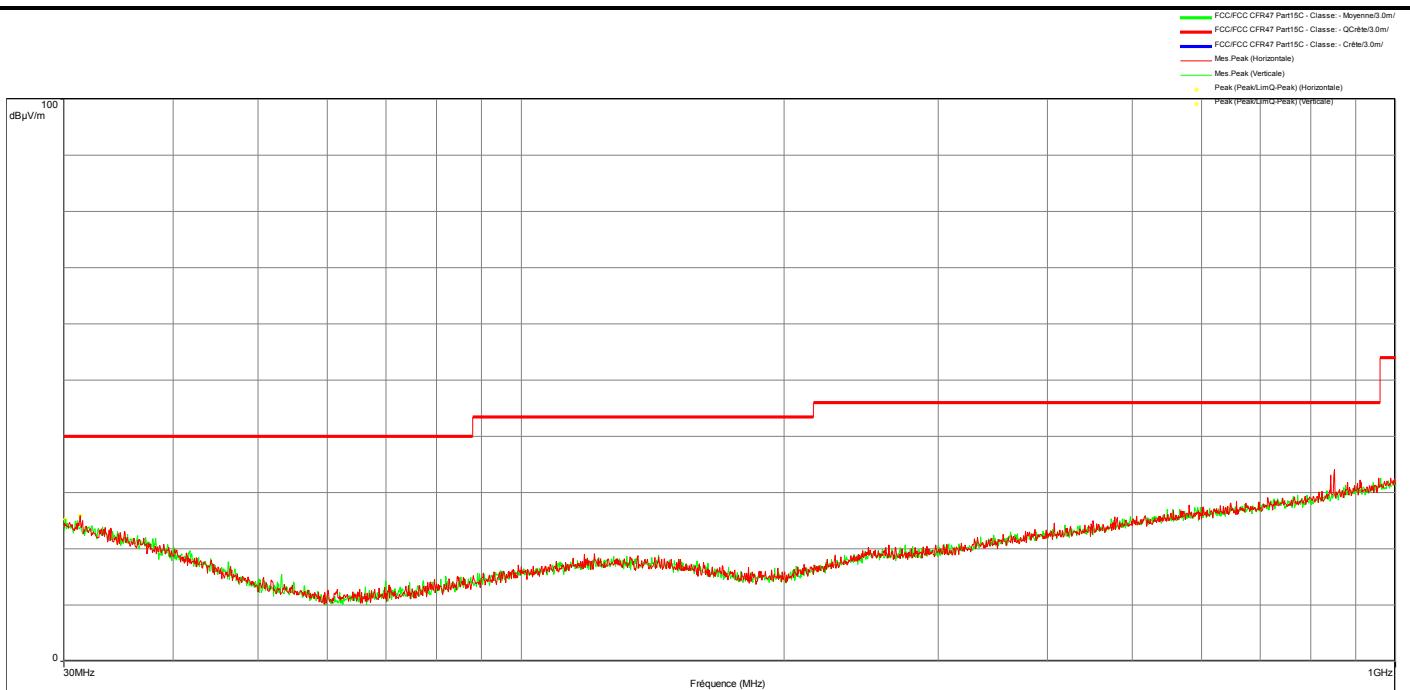

Frequency (MHz)	Peak (dB $\mu$ V/m)	LimQP (dB $\mu$ V/m)	Peak-LimQP (dB)	Polarization
31.309	25.8	40.0	-14.2	Horizontal
30.119	25.2	40.0	-14.8	Vertical



L C I E

## 10. UNCERTAINTIES CHART

Type de mesure / Kind of measurement	Incertitude élargie laboratoire / Wide uncertainty laboratory (k=2) ± x	Incertitude limite du CISPR / CISPR uncertainty limit ± y
Mesure des perturbations conduites en tension sur le réseau d'énergie <i>Measurement of conducted disturbances in voltage on the power port</i>	3.57 dB	3.6 dB
Mesure des perturbations conduites en tension sur le réseau de télécommunication <i>Measurement of conducted disturbances in voltage on the telecommunication port.</i>	3.28 dB	A l'étude / Under consid.
Mesure des perturbations discontinues conduites en tension <i>Measurement of discontinuous conducted disturbances in voltage</i>	3.47 dB	3.6 dB
Mesure des perturbations conduites en courant <i>Measurement of conducted disturbances in current</i>	2.90 dB	A l'étude / Under consid.
Mesure du champ électrique rayonné sur le site en espace libre de Moirans <i>Measurement of radiated electric field on the Moirans open area test site</i>	5.07 dB	5.2 dB

Les valeurs d'incertitudes calculées du laboratoire étant inférieures aux valeurs d'incertitudes limites établies par la norme, la conformité de l'échantillon est établie directement par les niveaux limites applicables. / The uncertainty values calculated by the laboratory are lower than limit uncertainty values defined by the standard. The conformity of the sample is directly established by the applicable limits values.