



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



SAR TEST REPORT

Applicant: Inrico Technologies Co., Ltd

Address: 3/F, Building No.118, High Tech Industrial Park, 72 Guowei Road,
Luohu District, Shenzhen, China

FCC ID: 2AIV6-2-S300

Product Name: Smart Phone

Model Number: S300

Standard(s): 47 CFR Part 2(2.1093)

The above equipment has been tested and found compliance with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR21120023-SAA1

Date Of Issue: 2021-12-13

Reviewed By: Sun Zhong

Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)
No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

SAR TEST RESULTS SUMMARY

Operation Frequency Bands	Highest Reported 1g SAR (W/kg)			Limits (W/kg)
	Head	Face Up (Gap 10mm)	Body-Worn (Gap 5mm)	
GSM 850	0.08	0.51	1.44	1.6
PCS 1900	0.18	0.75	1.30	
WCDMA Band 2	0.23	0.48	0.79	
WCDMA Band 4	0.22	0.26	0.36	
WCDMA Band 5	0.09	0.18	0.44	
LTE Band 2	0.21	0.62	1.32	
LTE Band 7	0.58	0.18	1.38	
LTE Band 12&17	0.37	0.46	0.71	
LTE Band 66&4	0.27	0.29	0.49	
Maximum Simultaneous Transmission SAR				
Items	Head	Face Up	Body-Worn	Limits
Sum SAR(W/kg)	0.71	0.82	1.57	1.6
SPLSR	N/A	N/A	N/A	0.04

Note: The test data of 2G/3G/4G, please refer to FCC ID:2AIV6-S300, SAR report of RDG200601011-20, issued by Bay Area Compliance Laboratories Corp. (Dongguan) on 2020-08-11.

Note:

EUT is electrical identical with the product Smart Phone (model: S300, FCC ID: 2AIV6-S300) under Inrico Technologies Co., Ltd. The difference between those two products is EUT is enable the BT&Wi-Fi function by software and memory chips are different, and the current device had been tested and verified the SAR results of WWAN consistently with the original device, test data of these items please refer to the test report: RDG200601011-20.

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

SAR TEST RESULTS SUMMARY 2
 TEST FACILITY 3
 DECLARATIONS..... 3
1. GENERAL INFORMATION 5
 1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 5
 1.2.2 Test Specification, Methods and Procedures 6
 MAXIMUM TARGET OUTPUT POWER..... 7
 TEST RESULTS: 7
 ANTENNAS LOCATION:..... 9
 STANDALONE SAR TEST EXCLUSION CONSIDERATIONS..... 9
 STANDALONE SAR ESTIMATION: 10
SAR SIMULTANEOUS TRANSMISSION DESCRIPTION 11

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

Device Type:	Portable
Exposure Category:	Population / Uncontrolled
Antenna Type(s):	Internal Antenna
DTM Type:	Class B
Multi-slot Class:	GPRS(Class 12); EGPRS(Class 12)
Body-Worn Accessories:	None
Face-Head Accessories:	None
Operation Mode :	GSM Voice, GPRS/EDGE Data, WCDMA(R99 (Voice+Data), HSDPA/HSUPA/DC-HSDPA/HSPA+), FDD-LTE, Wi-Fi and Bluetooth
Frequency Band:	GSM 850: 824-849 MHz(TX); 869-894 MHz(RX) PCS 1900: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) WCDMA Band 4: 1710-1755 MHz(TX); 2110-2155 MHz(RX) WCDMA Band 5: 824-849 MHz(TX); 869-894 MHz(RX) LTE Band 2: 1850-1910 MHz(TX); 1930-1990 MHz(RX) LTE Band 4: 1710-1755 MHz(TX) ; 2110-2155 MHz(RX) LTE Band 7: 2500-2570 MHz(TX); 2620-2690 MHz(RX) LTE Band 12: 699-716 MHz(TX); 729-746 MHz(RX) LTE Band 17: 704-716 MHz(TX); 734-746 MHz(RX) LTE Band 66: 1710-1780 MHz(TX); 2110-2200 MHz(RX) Wi-Fi 2.4G: 2412 -2472 MHz/2422 -2462 MHz Bluetooth: 2402 -2480 MHz
Conducted RF Power:	GSM 850: 31.90 dBm*; PCS 1900: 28.95 dBm* WCDMA Band 2: 21.95 dBm*; WCDMA Band 4: 21.96 dBm* WCDMA Band 5: 23.29 dBm* LTE Band 2: 22.39 dBm*; LTE Band 4: 22.47 dBm* LTE Band 7: 24.52 dBm*; LTE Band 12: 23.87 dBm* LTE Band 17: 23.79 dBm*; LTE Band 66: 22.51 dBm* Wi-Fi 2.4G: 4.24 dBm Bluetooth(BDR/EDR): 0.65 dBm BLE: 0.53dBm
Power Source:	3.8 VDC Rechargeable Battery
Normal Operation:	Head, Face Up and Body-worn

*Note:** The test data of WWAN, please refer to FCC ID:2AIV6-S300, SAR report of RDG200601011-20, issued by Bay Area Compliance Laboratories Corp. (Dongguan) on 2020-08-11.

1.2.2 Test Specification, Methods and Procedures

The tests documented in this report were performed in accordance with FCC 47 CFR § 2.1093, IEEE 1528-2013, the following FCC Published RF exposure KDB procedures:

KDB 447498 D01 General RF Exposure Guidance v06
KDB 648474 D04 Handset SAR v01r03
KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
KDB 865664 D02 RF Exposure Reporting v01r02
KDB 941225 D01 3G SAR Procedures v03r01
KDB 941225 D05 SAR for LTE Devices v02r05

TCB Workshop April 2019: RF Exposure Procedures

Maximum Target Output Power

Max Target Power(dBm)			
Mode/Band	Channel		
	Low	Middle	High
WLAN 2.4G(802.11b)	5	5	5
WLAN 2.4G(802.11g)	5	5	5
WLAN 2.4G(802.11n20)	5	5	5
WLAN 2.4G(802.11n40)	5	5	5
Bluetooth BDR/EDR	1	1	1
BLE_1M	1	1	1

Test Results:**Wi-Fi 2.4G:**


Mode	Channel frequency (MHz)	Data Rate	Conducted Average Output Power(dBm) (dBm)
802.11b	2412	1Mbps	4.13
	2442		4.24
	2472		4.11
802.11g	2412	6Mbps	4.05
	2442		4.12
	2472		4.11
802.11n HT20	2412	MCS0	4.17
	2442		4.10
	2472		4.18
802.11n HT40	2422	MCS0	4.02
	2442		4.02
	2462		4.19

Bluetooth:

Mode	Channel frequency (MHz)	RF Output Power (dBm)
BDR(GFSK)	2402	0.42
	2441	0.47
	2480	0.65
EDR($\pi/4$ -DQPSK)	2402	-0.53
	2441	-0.47
	2480	-0.54
EDR(8DPSK)	2402	-0.46
	2441	-0.48
	2480	-0.65
BLE_1M	2402	0.53
	2440	0.42
	2480	0.45

Note: * The test data of WWAN, please refer to FCC ID:2AIV6-S300, SAR report of RDG200601011-20, issued by Bay Area Compliance Laboratories Corp. (Dongguan) on 2020-08-11.

Antennas Location:

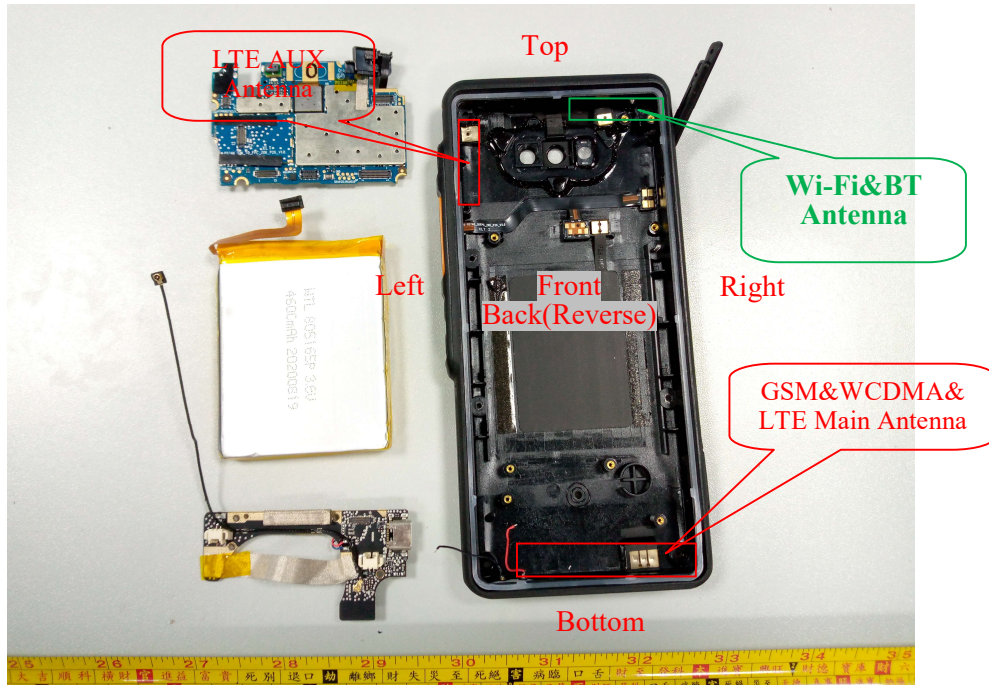

Note: The LTE DIV antenna can not transmit, and is receiving only.

Standalone SAR test exclusion considerations

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Calculated value	Threshold (1-g)	SAR Test Exclusion
2.4G WLAN	2472	5	3.16	0	1.0	3	Yes
BT	2480	1	1.26	0	0.4	3	Yes

Note: The bluetooth based peak power for calculation, and Wi-Fi based average power for calculation.

NOTE:

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0 \text{ for 1-g SAR and } \leq 7.5 \text{ for 10-g extremity SAR, where}$$

1. f(GHz) is the RF channel transmit frequency in GHz.
2. Power and distance are rounded to the nearest mW and mm before calculation.
3. The result is rounded to one decimal place for comparison.
4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

Standalone SAR estimation:

Mode	Frequency (MHz)	Pavg (dBm)	Pavg (mW)	Distance (mm)	Estimated 1-g (W/kg)
WLAN Head	2472	5	3.16	0	0.13
WLAN Face Up	2472	5	3.16	10	0.07
WLAN Body	2472	5	3.16	5	0.13
BT Head	2480	1	1.26	0	0.05
BT Face Up	2480	1	1.26	10	0.03
BT Body	2480	1	1.26	5	0.05

Note: The bluetooth based peak power for calculation, and Wi-Fi based average power for calculation.

When standalone SAR test exclusion applies to an antenna that transmits simultaneously with other antennas, the standalone SAR must be estimated according to following to determine simultaneous transmission SAR test exclusion:

$$\left[\frac{\text{max. power of channel, including tune-up tolerance, mW}}{(\text{min. test separation distance, mm})} \right] \cdot \left[\frac{f(\text{GHz})}{x} \right]$$

W/kg for test separation distances ≤ 50 mm;

where $x = 7.5$ for 1-g SAR.

When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion

SAR SIMULTANEOUS TRANSMISSION DESCRIPTION

Simultaneous Transmission:

Description of Simultaneous Transmit Capabilities		
Transmitter Combination	Simultaneous?	Hotspot?
WWAN(GSM/WCDMA/LTE) + Bluetooth	√	×
WWAN(GSM/WCDMA/LTE) + WLAN	√	×
WLAN + Bluetooth	×	×

Simultaneous SAR test exclusion considerations:

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+Bluetooth	Head Left Cheek	0.08	0.05	0.13
	Head Left Tilt	0.04	0.05	0.09
	Head Right Cheek	0.06	0.05	0.11
	Head Right Tilt	0.04	0.05	0.09
	Face Up	0.51	0.03	0.54
	Body Worn Back	0.67	0.05	0.72
	Body Back	1.44	0.05	1.49
	Body Bottom	0.78	0.05	0.83
PCS 1900+ Bluetooth	Head Left Cheek	0.18	0.05	0.23
	Head Left Tilt	0.08	0.05	0.13
	Head Right Cheek	0.11	0.05	0.16
	Head Right Tilt	0.10	0.05	0.15
	Face Up	0.75	0.03	0.78
	Body Worn Back	0.46	0.05	0.51
	Body Back	1.17	0.05	1.22
	Body Bottom	1.30	0.05	1.35
WCDMA Band 2+ Bluetooth	Head Left Cheek	0.23	0.05	0.28
	Head Left Tilt	0.09	0.05	0.14
	Head Right Cheek	0.10	0.05	0.15
	Head Right Tilt	0.10	0.05	0.15
	Face Up	0.48	0.03	0.51
	Body Back	0.57	0.05	0.62
	Body Bottom	0.79	0.05	0.84
WCDMA Band 4+ Bluetooth	Head Left Cheek	0.22	0.05	0.27
	Head Left Tilt	0.12	0.05	0.17
	Head Right Cheek	0.18	0.05	0.23
	Head Right Tilt	0.15	0.05	0.20
	Face Up	0.26	0.03	0.29
	Body Back	0.36	0.05	0.41
	Body Bottom	0.35	0.05	0.40

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
WCDMA Band 5+ Bluetooth	Head Left Cheek	0.09	0.05	0.14
	Head Left Tilt	0.04	0.05	0.09
	Head Right Cheek	0.05	0.05	0.10
	Head Right Tilt	0.04	0.05	0.09
	Face Up	0.18	0.03	0.21
	Body Back	0.40	0.05	0.45
	Body Bottom	0.44	0.05	0.49
LTE Band 2+ Bluetooth	Head Left Cheek	0.21	0.05	0.26
	Head Left Tilt	0.09	0.05	0.14
	Head Right Cheek	0.16	0.05	0.21
	Head Right Tilt	0.13	0.05	0.18
	Face Up	0.62	0.03	0.65
	Body Back	0.70	0.05	0.75
	Body Bottom	1.32	0.05	1.37
LTE Band 7+ Bluetooth	Head Left Cheek	0.34	0.05	0.39
	Head Left Tilt	0.21	0.05	0.26
	Head Right Cheek	0.58	0.05	0.63
	Head Right Tilt	0.18	0.05	0.23
	Face Up	0.18	0.03	0.21
	Body Back	1.38	0.05	1.43
	Body Bottom	1.38	0.05	1.43
LTE Band 12&17+ Bluetooth	Head Left Cheek	0.37	0.05	0.42
	Head Left Tilt	0.20	0.05	0.25
	Head Right Cheek	0.34	0.05	0.39
	Head Right Tilt	0.24	0.05	0.29
	Face Up	0.46	0.03	0.49
	Body Back	0.71	0.05	0.76
	Body Bottom	0.42	0.05	0.47
LTE Band 66&4+ Bluetooth	Head Left Cheek	0.20	0.05	0.25
	Head Left Tilt	0.15	0.05	0.20
	Head Right Cheek	0.27	0.05	0.32
	Head Right Tilt	0.14	0.05	0.19
	Face Up	0.29	0.03	0.32
	Body Back	0.39	0.05	0.44
	Body Bottom	0.49	0.05	0.54

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
GSM 850+Wi-Fi 2.4G	Head Left Cheek	0.08	0.13	0.21
	Head Left Tilt	0.04	0.13	0.17
	Head Right Cheek	0.06	0.13	0.19
	Head Right Tilt	0.04	0.13	0.17
	Face Up	0.51	0.07	0.58
	Body Worn Back	0.67	0.13	0.80
	Body Back	1.44	0.13	1.57
	Body Bottom	0.78	0.13	0.91
PCS 1900+ Wi-Fi 2.4G	Head Left Cheek	0.18	0.13	0.31
	Head Left Tilt	0.08	0.13	0.21
	Head Right Cheek	0.11	0.13	0.24
	Head Right Tilt	0.10	0.13	0.23
	Face Up	0.75	0.07	0.82
	Body Worn Back	0.46	0.13	0.59
	Body Back	1.17	0.13	1.30
	Body Bottom	1.30	0.13	1.43
WCDMA Band 2+ Wi-Fi 2.4G	Head Left Cheek	0.23	0.13	0.36
	Head Left Tilt	0.09	0.13	0.22
	Head Right Cheek	0.10	0.13	0.23
	Head Right Tilt	0.10	0.13	0.23
	Face Up	0.48	0.07	0.55
	Body Back	0.57	0.13	0.70
	Body Bottom	0.79	0.13	0.92
WCDMA Band 4+ Wi-Fi 2.4G	Head Left Cheek	0.22	0.13	0.35
	Head Left Tilt	0.12	0.13	0.25
	Head Right Cheek	0.18	0.13	0.31
	Head Right Tilt	0.15	0.13	0.28
	Face Up	0.26	0.07	0.33
	Body Back	0.36	0.13	0.49
	Body Bottom	0.35	0.13	0.48
WCDMA Band 5+ Wi-Fi 2.4G	Head Left Cheek	0.09	0.13	0.22
	Head Left Tilt	0.04	0.13	0.17
	Head Right Cheek	0.05	0.13	0.18
	Head Right Tilt	0.04	0.13	0.17
	Face Up	0.18	0.07	0.25
	Body Back	0.40	0.13	0.53
	Body Bottom	0.44	0.13	0.57

Mode(SAR1+SAR2)	Position	Reported SAR(W/kg)		Σ SAR < 1.6W/kg
		SAR1	SAR2	
LTE Band 2+ Wi-Fi 2.4G	Head Left Cheek	0.21	0.13	0.34
	Head Left Tilt	0.09	0.13	0.22
	Head Right Cheek	0.16	0.13	0.29
	Head Right Tilt	0.13	0.13	0.26
	Face Up	0.62	0.07	0.69
	Body Back	0.70	0.13	0.83
	Body Bottom	1.32	0.13	1.45
LTE Band 7+ Wi-Fi 2.4G	Head Left Cheek	0.34	0.13	0.47
	Head Left Tilt	0.21	0.13	0.34
	Head Right Cheek	0.58	0.13	0.71
	Head Right Tilt	0.18	0.13	0.31
	Face Up	0.18	0.07	0.25
	Body Back	1.38	0.13	1.51
	Body Bottom	1.38	0.13	1.51
LTE Band 12&17+ Wi-Fi 2.4G	Head Left Cheek	0.37	0.13	0.50
	Head Left Tilt	0.20	0.13	0.33
	Head Right Cheek	0.34	0.13	0.47
	Head Right Tilt	0.24	0.13	0.37
	Face Up	0.46	0.07	0.53
	Body Back	0.71	0.13	0.84
	Body Bottom	0.42	0.13	0.55
LTE Band 66&4+ Wi-Fi 2.4G	Head Left Cheek	0.20	0.13	0.33
	Head Left Tilt	0.15	0.13	0.28
	Head Right Cheek	0.27	0.13	0.40
	Head Right Tilt	0.14	0.13	0.27
	Face Up	0.29	0.07	0.36
	Body Back	0.39	0.13	0.52
	Body Bottom	0.49	0.13	0.62

*Note: * The test results of WWAN, please refer to FCC ID:2AIV6-S300, SAR report of RDG200601011-20, issued by Bay Area Compliance Laboratories Corp. (Dongguan) on 2020-08-11.*

Conclusion:

Sum of SAR: Σ SAR \leq 1.6 W/kg therefore simultaneous transmission SAR with Volume Scans is **not required**.

******* END OF REPORT *******