



TEST REPORT

Applicant Name : Inrico Technologies Co., Ltd
Address : 3/F, Building No.118, High Tech Industrial Park, 72 Guowei Road, Luohu District, Shenzhen, China
Report Number : SZGMA210719-29774E-RF-00AA1
FCC ID: 2AIV6-2-S300

Test Standard (s)

FCC PART 15.247

Sample Description

Product Type: Smart Phone
Model No.: S300
Trade Mark: Inrico
Date Received: 2021/07/19
Date of Test: 2021/07/26~2021/10/19
Report Date: 2021/11/29

Test Result:	Pass*
--------------	-------

* In the configuration tested, the EUT complied with the standards above.

Prepared and Checked By:

Black Ding

Black Ding
EMC Engineer

Approved By:

Candy Li

Candy Li
EMC Engineer

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

Shenzhen Accurate Technology Co., Ltd. is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk "★". Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China
Tel: +86 755-26503290 Fax: +86 755-26503396 Web: www.atc-lab.com

TABLE OF CONTENTS

GENERAL INFORMATION	4
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	4
OBJECTIVE	4
TEST METHODOLOGY	4
MEASUREMENT UNCERTAINTY	5
TEST FACILITY	5
SYSTEM TEST CONFIGURATION	6
DESCRIPTION OF TEST CONFIGURATION	6
EUT EXERCISE SOFTWARE	6
SPECIAL ACCESSORIES	6
EQUIPMENT MODIFICATIONS	6
SUPPORT EQUIPMENT LIST AND DETAILS	6
EXTERNAL I/O CABLE	6
BLOCK DIAGRAM OF TEST SETUP	7
SUMMARY OF TEST RESULTS	9
TEST EQUIPMENT LIST	10
FCC§15.247 (I), §1.1307 (B) (1) &§2.1093 – RF EXPOSURE	12
APPLICABLE STANDARD	12
FCC §15.203 – ANTENNA REQUIREMENT	13
APPLICABLE STANDARD	13
ANTENNA CONNECTOR CONSTRUCTION	13
FCC §15.207 (A) – AC LINE CONDUCTED EMISSIONS	14
APPLICABLE STANDARD	14
EUT SETUP	14
EMI TEST RECEIVER SETUP	14
TEST PROCEDURE	14
TRANSD FACTOR & MARGIN CALCULATION	15
TEST DATA	15
FCC §15.205, §15.209 & §15.247(D) – RADIATED EMISSIONS	18
APPLICABLE STANDARD	18
EUT SETUP	18
EMI TEST RECEIVER & SPECTRUM ANALYZER SETUP	19
TEST PROCEDURE	19
FACTOR & MARGIN CALCULATION	19
TEST DATA	19
FCC §15.247(A) (1)-CHANNEL SEPARATION TEST	24
APPLICABLE STANDARD	24
TEST PROCEDURE	24
TEST DATA	24
FCC §15.247(A) (1) – 20 DB EMISSION BANDWIDTH	27
APPLICABLE STANDARD	27
TEST PROCEDURE	27
TEST DATA	28

FCC §15.247(A) (1) (III)-QUANTITY OF HOPPING CHANNEL TEST	34
APPLICABLE STANDARD	34
TEST PROCEDURE	34
TEST DATA	34
FCC §15.247(A) (1) (III) - TIME OF OCCUPANCY (DWELL TIME).....	37
APPLICABLE STANDARD	37
TEST PROCEDURE	37
TEST DATA	37
FCC §15.247(B) (1) - PEAK OUTPUT POWER MEASUREMENT	43
APPLICABLE STANDARD	43
TEST PROCEDURE	43
TEST DATA	43
FCC §15.247(D) - BAND EDGES TESTING.....	49
APPLICABLE STANDARD	49
TEST PROCEDURE	49
TEST DATA	49

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Frequency Range	Bluetooth: 2402-2480MHz
Maximum conducted peak output power	Bluetooth: 0.52dBm
Modulation Technique	Bluetooth: GFSK, $\pi/4$ -DQPSK, 8DPSK
Antenna Specification*	1.5dBi(It is provided by the applicant)
Voltage Range	DC5V from adapter or DC 3.8V From Battery
Sample number	SZGMA210719-29774E-RFA1-S1 (CE&RE) SZGMA210719-29774E-RFA1-S2 (RF Conducted Test) (Assigned by ATC)
Sample/EUT Status	Good condition
Adapter information	Model: HJ-0502000W2-US Input: AC 100-240V, 50/60Hz, 0.3A Output: DC 5.0V, 2000mA

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A and C of the Federal Communication Commission rules.

The tests were performed in order to determine compliance with FCC Part 15, Subpart C, section 15.203, 15.205, 15.207, 15.209 and 15.247 rules.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

All emissions measurement was performed at Shenzhen Accurate Technology Co., Ltd. The radiated testing was performed at an antenna-to-EUT distance of 3 meters.
Each test item follows test standards and with no deviation.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5%
RF output power, conducted		0.73dB
Unwanted Emission, conducted		1.6dB
AC Power Lines Conducted Emissions		2.72dB
Emissions, Radiated	30MHz - 1GHz	4.28dB
	1GHz - 18GHz	4.98dB
	18GHz - 26.5GHz	5.06dB
Temperature		1 °C
Humidity		6%
Supply voltages		0.4%

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the 1/F., Building A, Changyuan New Material Port, Science & Industry Park, Nanshan District, Shenzhen, Guangdong, P.R. China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 708358, the FCC Designation No.: CN1189. Accredited by American Association for Laboratory Accreditation (A2LA) The Certificate Number is 429 7.01.

Listed by Innovation, Science and Economic Development Canada (ISED), the Registration Number is 5077A.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in an engineering mode.

EUT Exercise Software

EUT is tested in engineering mode and the power level is maximum level*. The power level was provided by the manufacturer.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Earphone	Unknown	Unknown

External I/O Cable


Cable Description	Length (m)	From Port	To
Un-shielding Un-Detachable AC Cable	1.2	LISN	Receptacle
Un-shielding Detachable USB Cable	1.0	Adapter	EUT
Un-shielding Detachable Earphone Cable	1.0	EUT	Earphone

Block Diagram of Test Setup


For conducted emission:

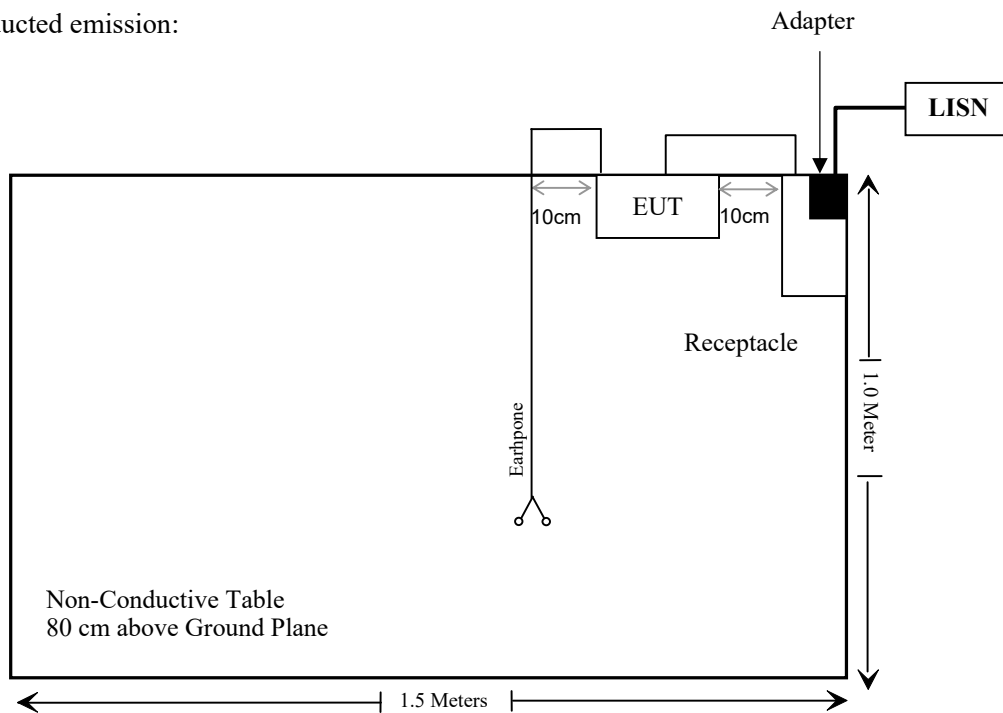

For Radiated Emissions(RE Below 1G)

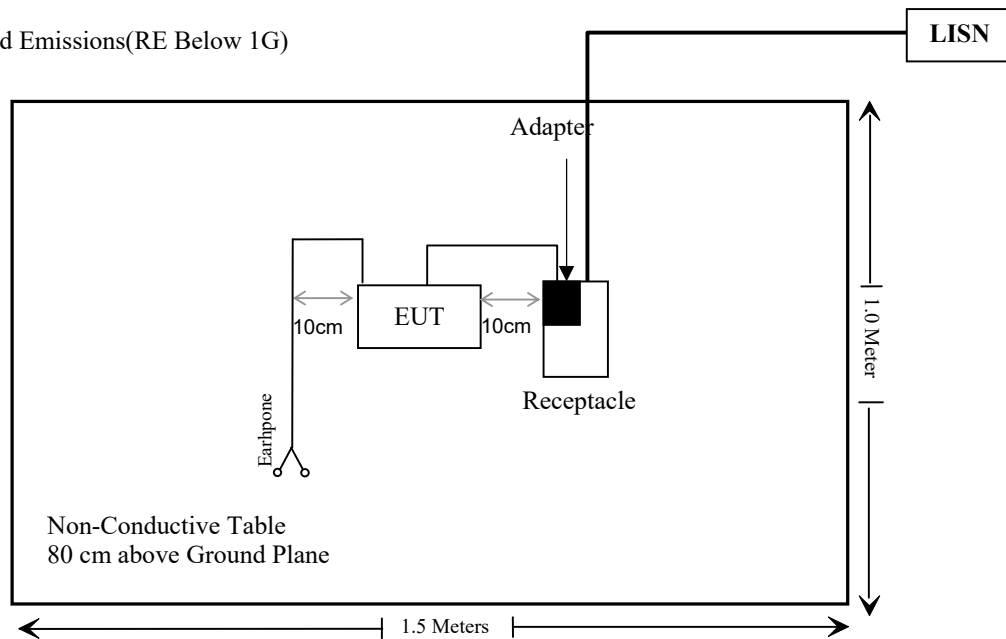

For Radiated Emissions(RE Above 1G)

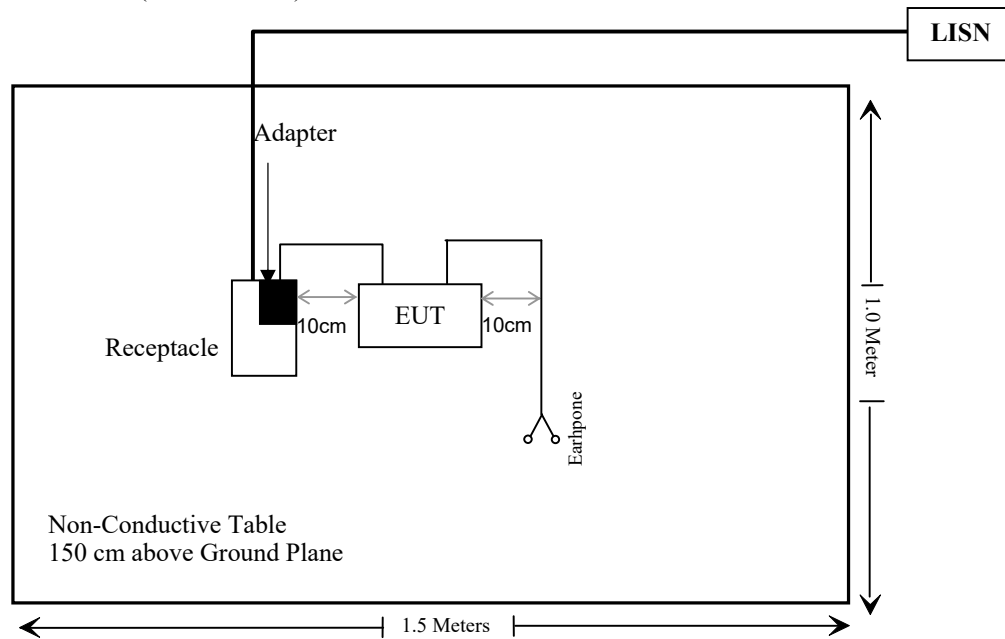

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§15.247 (i), §1.1307 (b) (1)& §2.1093	RF Exposure	Compliant
§15.203	Antenna Requirement	Compliant
§15.207(a)	AC Line Conducted Emissions	Compliant
§15.205, §15.209 & §15.247(d)	Radiated Emissions	Compliant
§15.247(a)(1)	20 dB Emission Bandwidth	Compliant
§15.247(a)(1)	Channel Separation Test	Compliant
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliant
§15.247(a)(1)(iii)	Quantity of hopping channel Test	Compliant
§15.247(b)(1)	Peak Output Power Measurement	Compliant
§15.247(d)	Band edges	Compliant

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Conducted Emissions Test					
Rohde& Schwarz	Test Receiver	ESPI3	100396	2020/12/24	2021/12/23
R & S	L.I.S.N.	ENV216	101314	2020/12/25	2021/12/24
Anritsu Corp	50Ω Coaxial Switch	MP59B	6200506474	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-2m	No.2	2020/12/25	2021/12/24
Conducted Emission Test Software: ES-K1 V1.71					
Radiated Emissions Test					
Rohde& Schwarz	Test Receiver	ESR	101817	2020/12/24	2021/12/23
Rohde&Schwarz	Spectrum Analyzer	FSV40	101495	2020/12/24	2021/12/23
SONOMA INSTRUMENT	Amplifier	310 N	186131	2020/12/25	2021/12/24
A.H. Systems, inc.	Preamplifier	PAM-0118P	531	2021/07/08	2022/07/07
Quinstar	Amplifier	QLW-18405536-J0	15964001002	2020/11/28	2021/11/27
Anritsu Corp	50 Coaxial Switch	MP59B	6100237248	2020/12/25	2021/12/24
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2020/01/05	2023/01/04
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-1067	2020/01/05	2023/01/04
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2020/01/05	2023/01/04
Unknown	RF Coaxial Cable	N-5m	No.3	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-5m	No.4	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.5	2020/12/25	2021/12/24
Unknown	RF Coaxial Cable	N-1m	No.6	2020/12/25	2021/12/24
Wainwright	High Pass Filter	WHKX3.6/18G-10SS	5	2020/12/25	2021/12/24
Radiated Emission Test Software: EZ EMC V 1.1.4.2					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101495	2020/12/24	2021/12/23
Rohde & Schwarz	Open Switch and Control Unit	OSP120 + OSP-B157	101244 + 100866	2020/12/24	2021/12/23
WEINSCHL	10dB Attenuator	5324	AU 3842	2020/12/25	2021/12/24

* **Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC§15.247 (i), §1.1307 (b) (1) & §2.1093 – RF EXPOSURE

Applicable Standard

According to FCC §2.1093 and §1.1307(b) (1), systems operating under the provisions of this section shall be operated in a manner that ensure that the public is not exposed to radio frequency energy level in excess of the Commission's guideline.

According to KDB 447498 D01 General RF Exposure Guidance

The 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

$[(\text{max. power of channel, including tune-up tolerance, mW})/(\text{min. test separation distance, mm})] \cdot$

$[\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR, where

1. $f(\text{GHz})$ is the RF channel transmit frequency in GHz.

2. Power and distance are rounded to the nearest mW and mm before calculation.

3. The result is rounded to one decimal place for comparison.

4. When the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test Exclusion.

For worst case:

Mode	Frequency (MHz)	Maximum Tune-up power		Calculated Distance (mm)	Calculated Value	Threshold (1-g SAR)	SAR Test Exclusion
		(dBm)	(mW)				
BDR/EDR	2480	1.0	1.26	5	0.4	3.0	Yes

Result: Compliant.

FCC §15.203 – ANTENNA REQUIREMENT

Applicable Standard

According to FCC § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

Antenna Connector Construction

The EUT has one internal antenna arrangement which was permanently attached and the antenna gain is 1.5 dBi, fulfill the requirement of this section. Please refer to the EUT photos.


Result: Compliant.

FCC §15.207 (a) – AC LINE CONDUCTED EMISSIONS

Applicable Standard

FCC §15.207(a)

EUT Setup

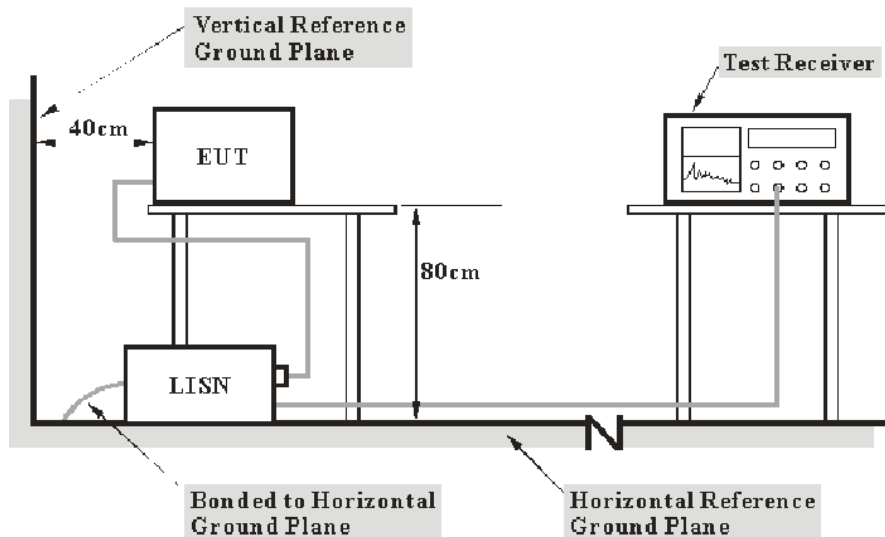

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with ANSI C63.10-2013. The related limit was specified in FCC Part 15.207.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All final data was recorded in the Quasi-peak and average detection mode.

Transd Factor & Margin Calculation

The Transd factor is calculated by adding LISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Transd Factor} = \text{LISN VDF} + \text{Cable Loss}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{level}$$

$$\text{Level} = \text{reading level} + \text{Transd Factor}$$

Test Data


Environmental Conditions

Temperature:	24 °C
Relative Humidity:	48 %
ATM Pressure:	101.0 kPa

The testing was performed by Bin Duan on 2021-10-19.

EUT operation mode: Transmitting (worst case GFSK Mode, Middle channel)

AC 120V/60 Hz, Line

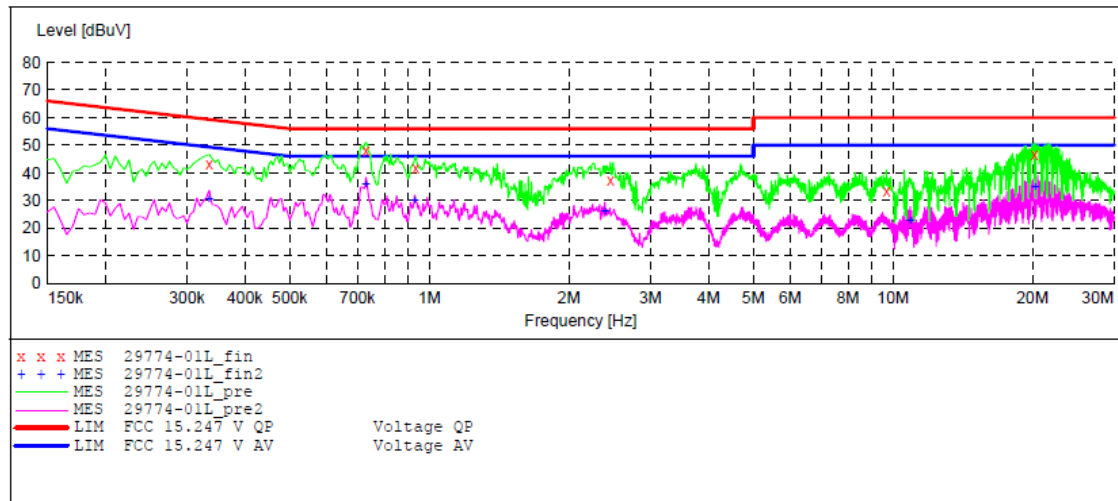**MEASUREMENT RESULT: "29774-01L_fin"**


2021-10-19 10:54

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.335000	43.30	10.9	59	16.7	QP	L1	GND
0.730000	48.20	11.1	56	7.8	QP	L1	GND
0.935000	41.70	11.1	56	14.3	QP	L1	GND
2.460000	37.40	11.3	56	18.6	QP	L1	GND
9.680000	33.30	11.6	60	26.7	QP	L1	GND
20.200000	46.80	11.7	60	13.2	QP	L1	GND

MEASUREMENT RESULT: "29774-01L_fin2"

2021-10-19 10:54

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.335000	30.50	10.9	49	18.5	AV	L1	GND
0.730000	35.90	11.1	46	10.1	AV	L1	GND
0.930000	29.90	11.1	46	16.1	AV	L1	GND
2.390000	26.30	11.3	46	19.7	AV	L1	GND
10.900000	22.80	11.6	50	27.2	AV	L1	GND
20.275000	34.80	11.7	50	15.2	AV	L1	GND

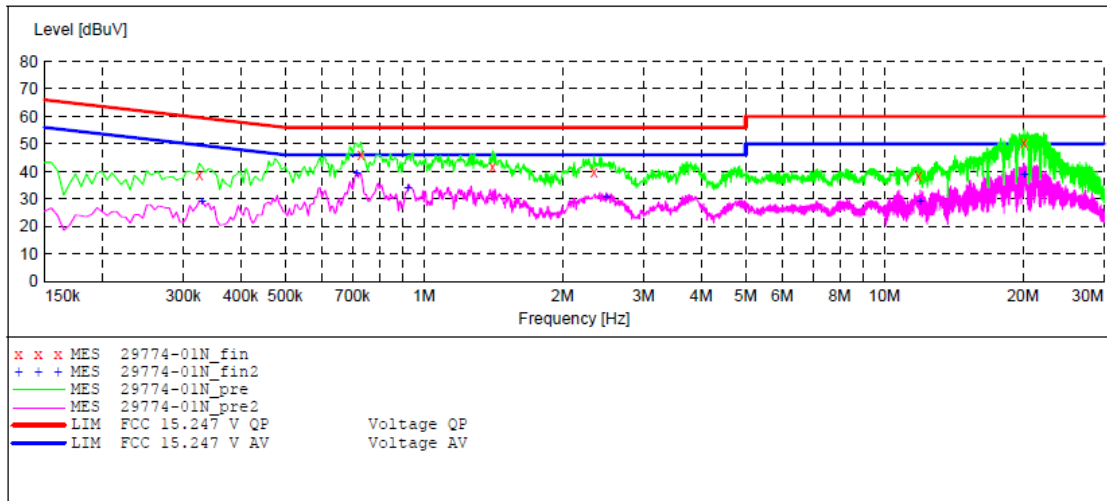AC 120V/60 Hz, Neutral**MEASUREMENT RESULT: "29774-01N_fin"**

2021-10-19 10:50

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.325000	39.00	10.9	60	21.0	QP	N	GND
0.730000	46.30	11.1	56	9.7	QP	N	GND
1.410000	41.90	11.2	56	14.1	QP	N	GND
2.340000	39.70	11.3	56	16.3	QP	N	GND
11.850000	38.30	11.6	60	21.7	QP	N	GND
20.100000	50.50	11.7	60	9.5	QP	N	GND

MEASUREMENT RESULT: "29774-01N_fin2"

2021-10-19 10:50

Frequency MHz	Level dBuV	Transd dB	Limit dBuV	Margin dB	Detector	Line	PE
0.330000	28.80	10.9	50	21.2	AV	N	GND
0.715000	39.10	11.1	46	6.9	AV	N	GND
0.925000	33.70	11.1	46	12.3	AV	N	GND
2.490000	30.60	11.3	46	15.4	AV	N	GND
11.975000	29.10	11.6	50	20.9	AV	N	GND
20.125000	38.70	11.7	50	11.3	AV	N	GND


FCC §15.205, §15.209 & §15.247(d) – RADIATED EMISSIONS

Applicable Standard


FCC §15.205; §15.209; §15.247(d)

EUT Setup

Below 1 GHz:

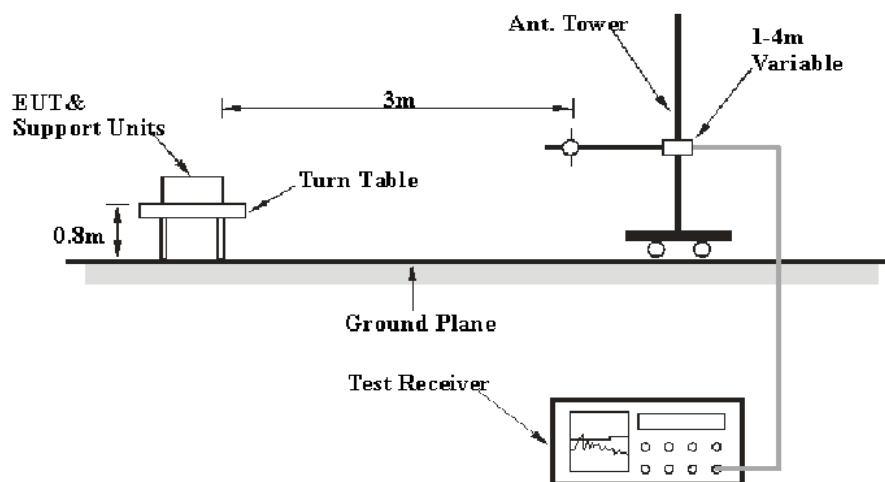

Above 1GHz:

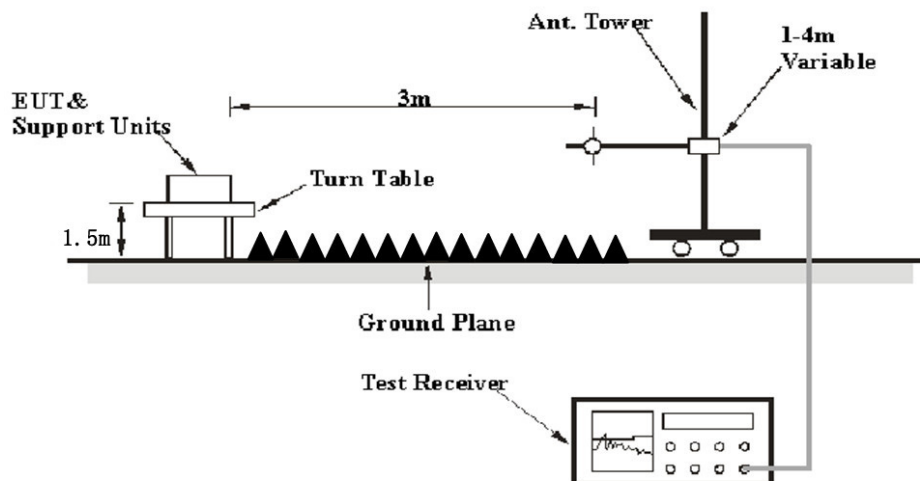

The radiated emission tests were performed in the 3 meters, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209 and FCC 15.247 limits.

EMI Test Receiver & Spectrum Analyzer Setup

The EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	/	Average

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All final data was recorded in Quasi-peak detection mode for frequency range of 30 MHz -1 GHz and peak and Average detection modes for frequencies above 1 GHz.

Factor & Margin Calculation

The Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Factor} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

$$\begin{aligned} \text{Margin} &= \text{Result} / \text{Corrected Amplitude} - \text{Limit} \\ \text{Result} / \text{Corrected Amplitude} &= \text{Reading} + \text{Factor} \end{aligned}$$



Test Data

Environmental Conditions

Temperature:	23~25 °C
Relative Humidity:	48~50 %
ATM Pressure:	101.0~103.0 kPa

The testing was performed by Chao Mo on 2021-10-21.

Test mode: Transmitting (Pre-scan in the X,Y and Z axes of orientation, the worst case X-axis of orientation was recorded)

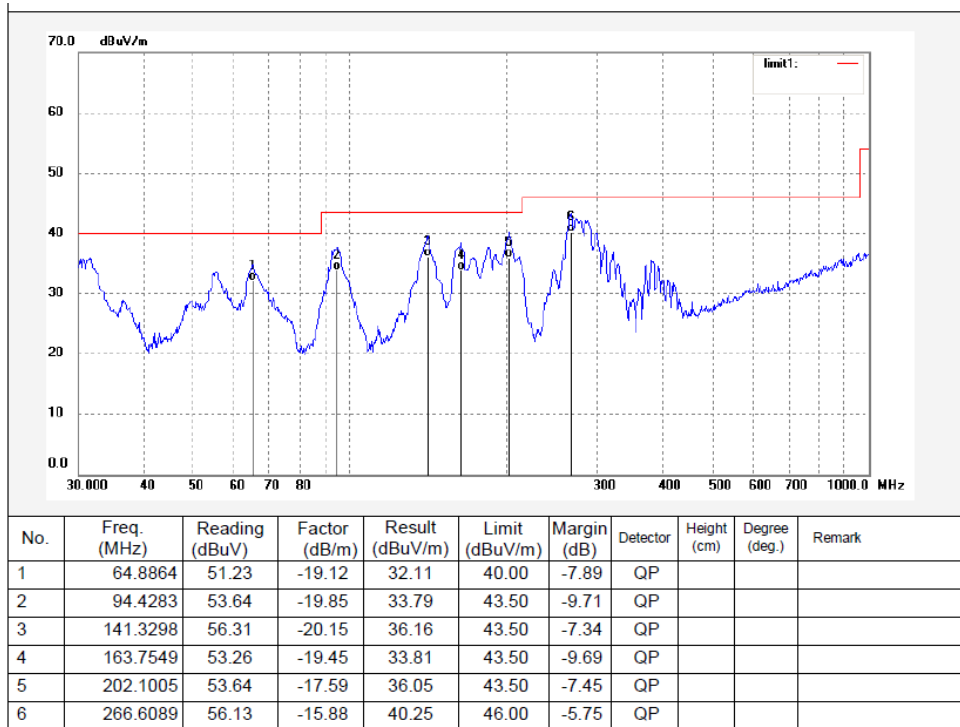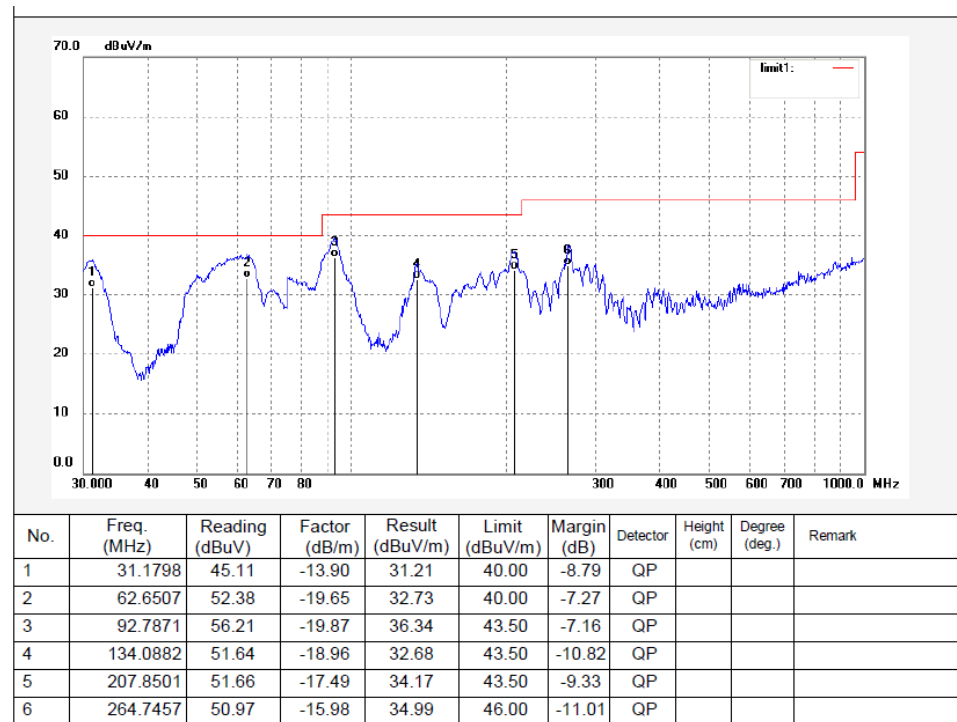30MHz-1GHz: (worst case GFSK Mode, Middle channel)**Horizontal:****Vertical**

Above 1GHz: (worst case 8DPSK Mode)

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	PK/Ave.		Height (m)	Polar (H/V)				
Low Channel (2402 MHz)									
2310	57.71	PK	147	1.4	H	-6.84	50.87	74	-23.13
2310	59.46	PK	353	1.9	V	-6.84	52.62	74	-21.38
2390	56.33	PK	85	1.2	H	-6.44	49.89	74	-24.11
2390	57.7	PK	173	1.8	V	-6.44	51.26	74	-22.74
4804	40.97	PK	149	1.4	H	2.81	43.78	74	-30.22
4804	40.48	PK	304	1.8	V	2.81	43.29	74	-30.71
Middle Channel (2441 MHz)									
4882	39.44	PK	264	1.7	H	3.04	42.48	74	-31.52
4882	41.21	PK	23	1.0	V	3.04	44.25	74	-29.75
High Channel (2480 MHz)									
2483.5	55.11	PK	166	1.4	H	-5.96	49.15	74	-24.85
2483.5	56.53	PK	191	2.1	V	-5.96	50.57	74	-23.43
2500	54.04	PK	171	1.6	H	-5.88	48.16	74	-25.84
2500	54.92	PK	145	1.7	V	-5.88	49.04	74	-24.96
4960	44.57	PK	161	1.3	H	3.29	47.86	74	-26.14
4960	44.9	PK	255	1.2	V	3.29	48.19	74	-25.81

Note:

Corrected Factor = Antenna factor (RX) + Cable Loss – Amplifier Factor

Corrected Amplitude = Corrected Factor + Reading

Margin = Corrected. Amplitude - Limit

The other spurious emission which is in the noise floor level was not recorded.


The test result of peak was less than the limit of average, so just peak value were recorded.

1-18GHz


Pre-scan for Peak

High Channel

Horizontal:

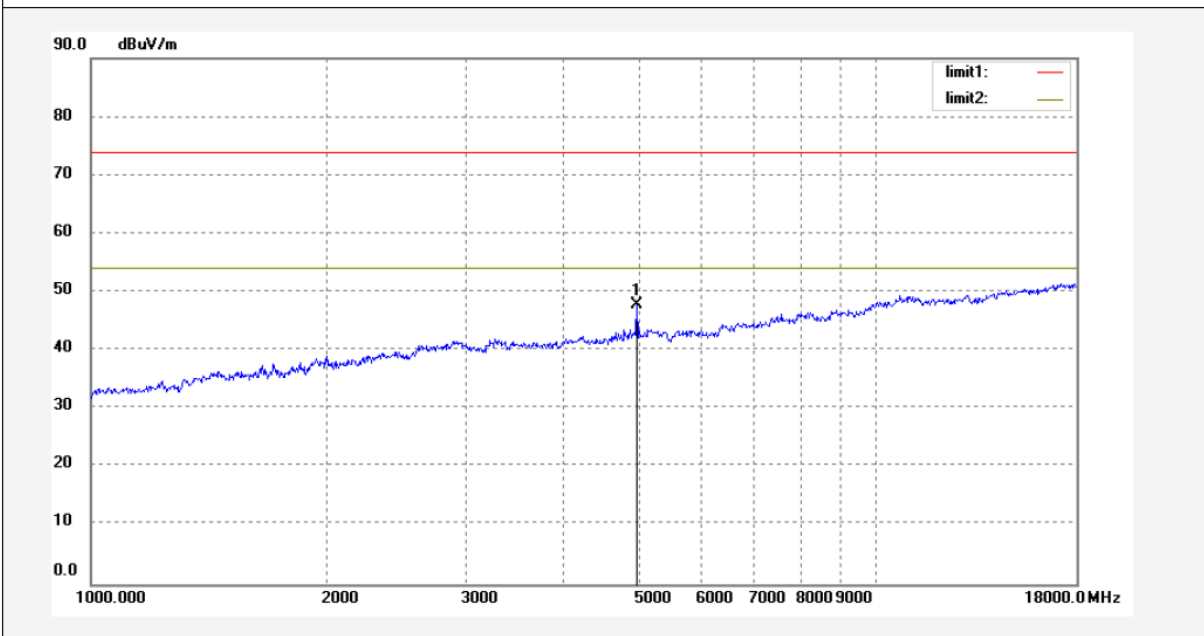

Vertical:

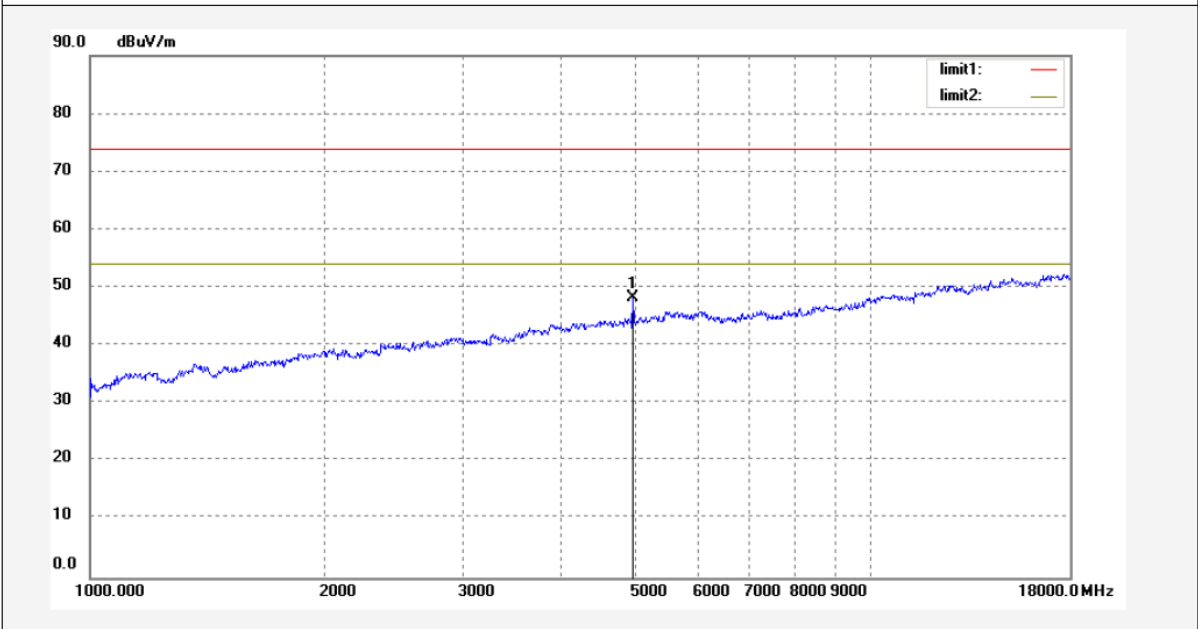


18-25GHz


Pre-scan for Peak

High Channel

Horizontal:

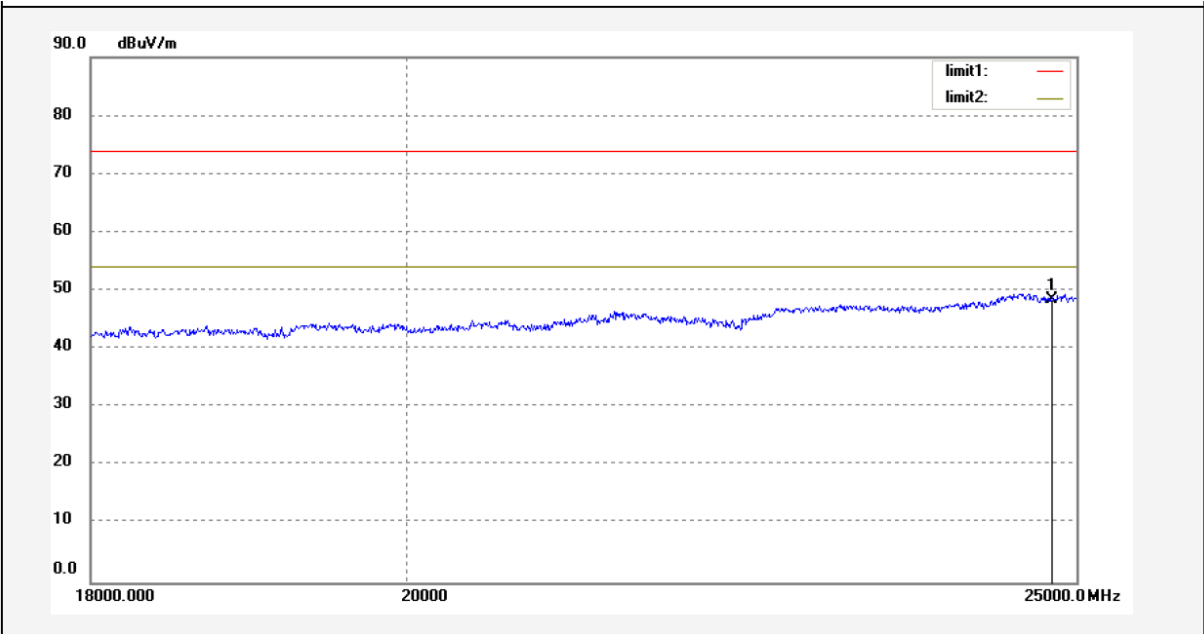

Vertical:

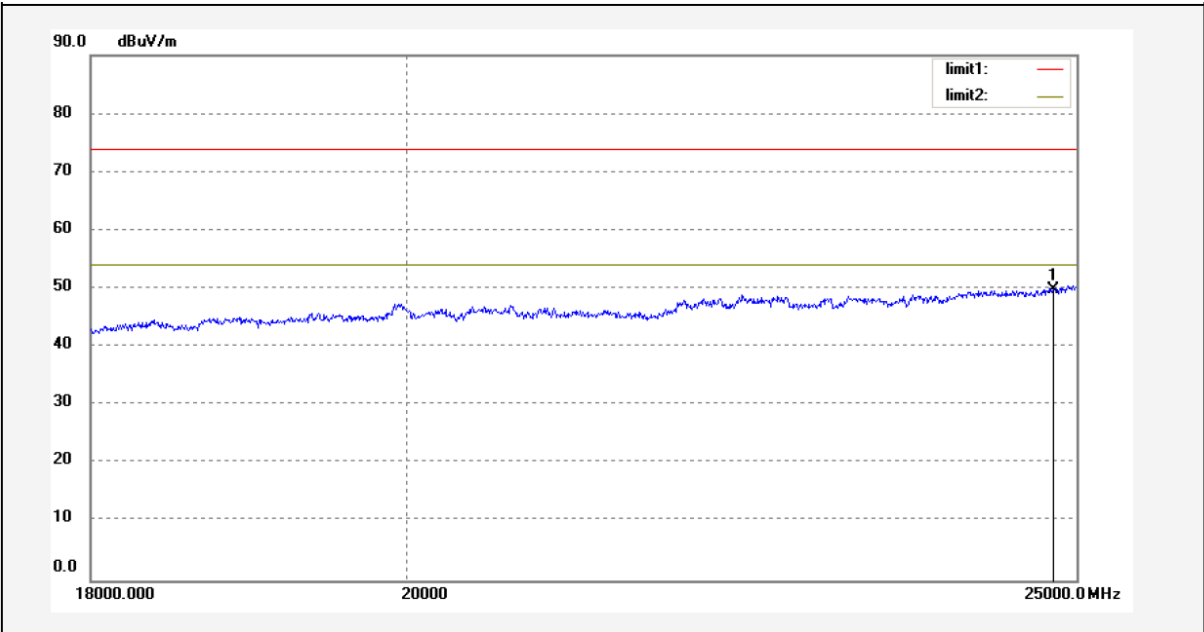

FCC §15.247(a) (1)-CHANNEL SEPARATION TEST

Applicable Standard

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

Test Procedure

1. Set the EUT in transmitting mode, maxhold the channel.
2. Set the adjacent channel of the EUT and maxhold another trace.
3. Measure the channel separation.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Fan Yang on 2021-07-26.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to following table and plots.

Test Mode	Channel Separation (MHz)	20 dBc BW (MHz)	Two-thirds of the 20 dB bandwidth (MHz)	Channel Separation Limit	Result
BDR(GFSK)					
Hopping	1.001	0.892	0.595	> two-thirds of the 20 dB bandwidth	Compliance
EDR($\pi/4$-DQPSK)					
Hopping	1.001	1.126	0.751	> two-thirds of the 20 dB bandwidth	Compliance
EDR(8DPSK)					
Hopping	1.001	1.161	0.774	> two-thirds of the 20 dB bandwidth	Compliance

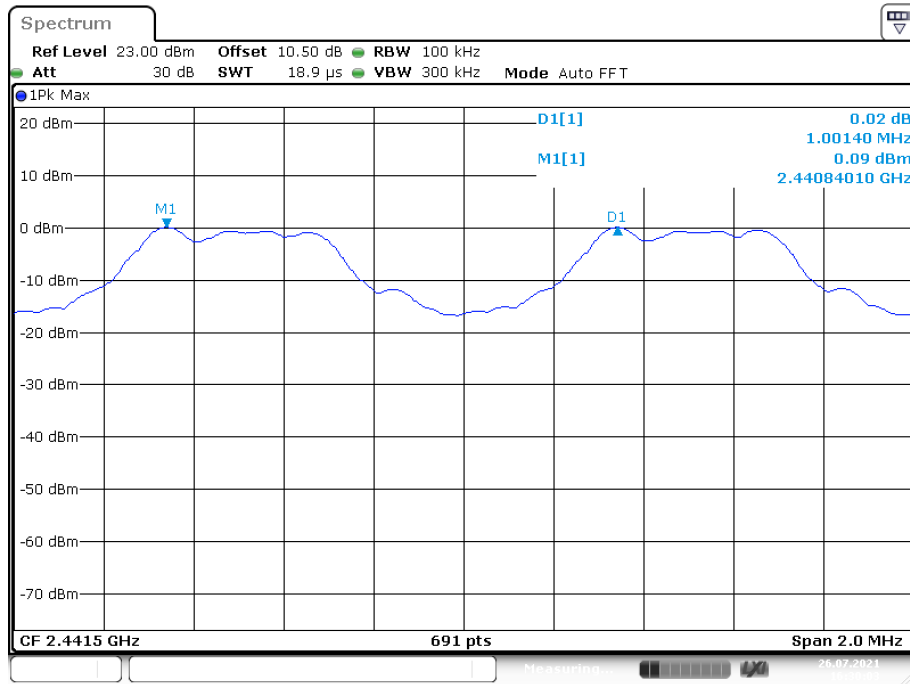
BDR(GFSK)

Date: 26.JUL.2021 16:30:03

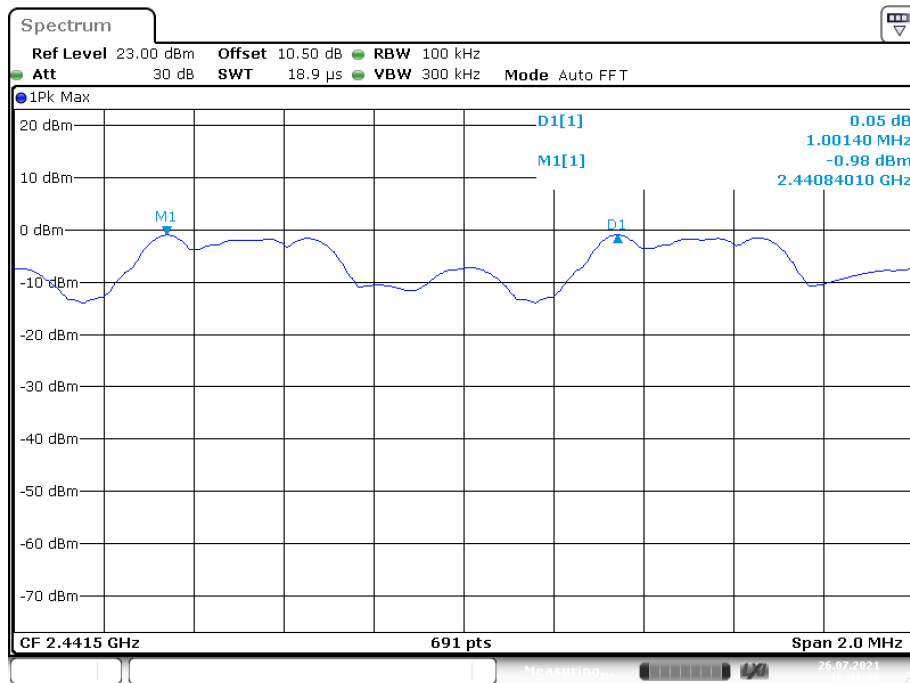EDR ($\pi/4$ -DQPSK)

Date: 26.JUL.2021 16:41:09

EDR (8DPSK)

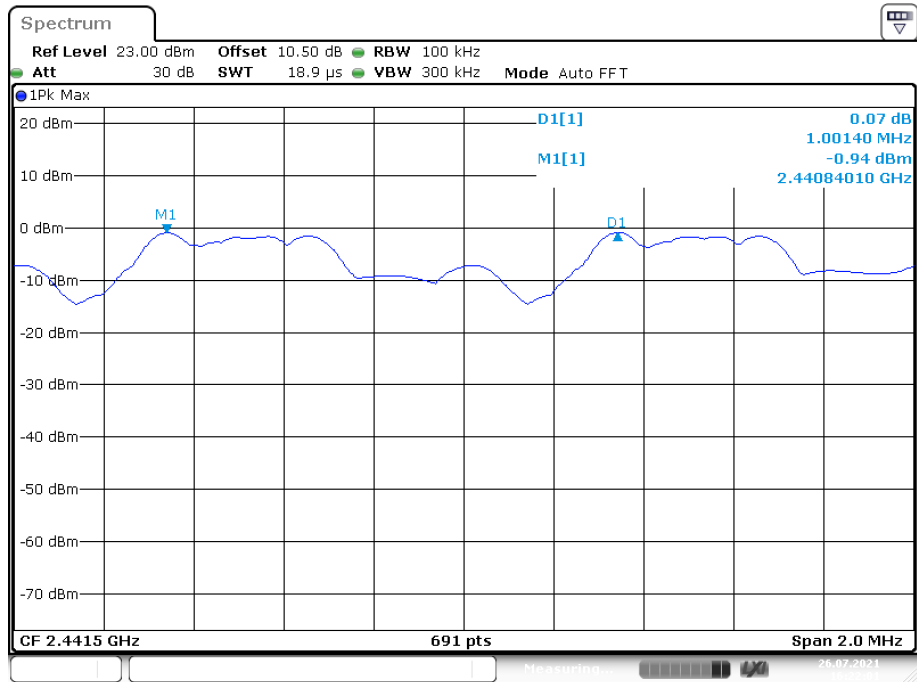

Date: 26.JUL.2021 16:22:02

FCC §15.247(a) (1) – 20 dB EMISSION BANDWIDTH

Applicable Standard

Alternatively, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Test Procedure

The following conditions shall be observed for measuring the occupied bandwidth and 20 dB bandwidth:

- The transmitter shall be operated at its maximum carrier power measured under normal test conditions.
- The span of the spectrum analyzer shall be set large enough to capture all products of the modulation process, including the emission skirts, around the carrier frequency, but small enough to avoid having other emissions (e.g. on adjacent channels) within the span.
- The detector of the spectrum analyzer shall be set to “Sample”. However, a peak, or peak hold, may be used in place of the sampling detector since this usually produces a wider bandwidth than the actual bandwidth (worst-case measurement). Use of a peak hold (or “Max Hold”) may be necessary to determine the occupied / 20 dB bandwidth if the device is not transmitting continuously.
- The resolution bandwidth (RBW) shall be in the range of 1% to 5% of the actual occupied / 20 dB bandwidth and the video bandwidth (VBW) shall not be smaller than three times the RBW value. Video averaging is not permitted.

Note: It may be necessary to repeat the measurement a few times until the RBW and VBW are in compliance with the above requirement.

For the 99% emission bandwidth, the trace data points are recovered and directly summed in linear power level terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached, and that frequency recorded. The process is repeated for the highest frequency data points (starting at the highest frequency, at the right side of the span, and going down in frequency). This frequency is then recorded. The difference between the two recorded frequencies is the occupied bandwidth (or the 99% emission bandwidth).



Test Data**Environmental Conditions**


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Fan Yang on 2021-07-26.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to following table and plots.


Mode	Channel	Frequency (MHz)	20 dB Emission Bandwidth (MHz)
BDR (GFSK)	Low	2402	0.892
	Middle	2441	0.892
	High	2480	0.892
EDR ($\pi/4$-DQPSK)	Low	2402	1.123
	Middle	2441	1.123
	High	2480	1.126
EDR (8DPSK)	Low	2402	1.161
	Middle	2441	1.161
	High	2480	1.161

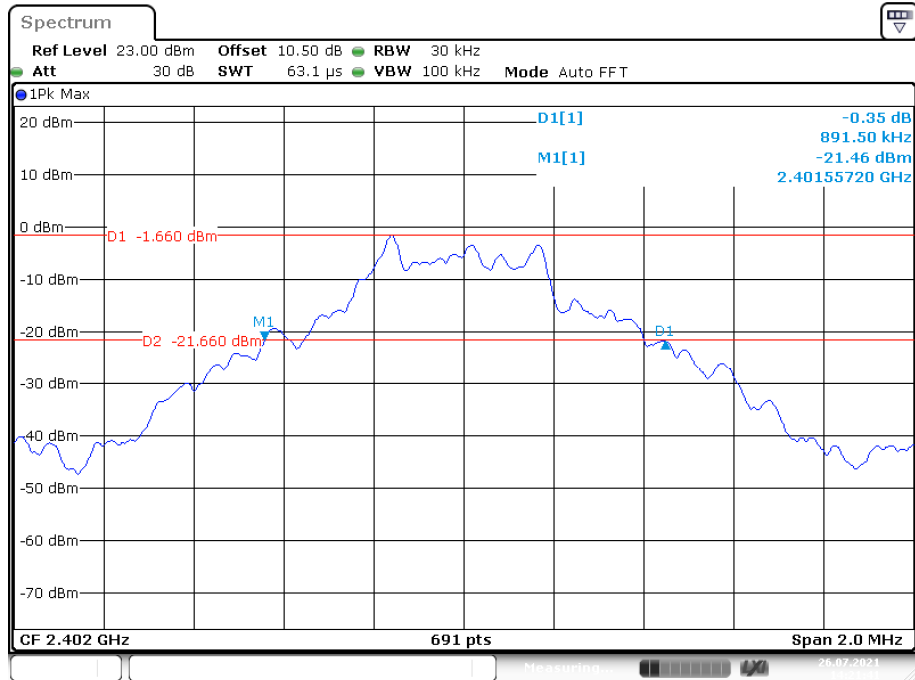BDR(GFSK) : Low Channel


Date: 26.JUL.2021 14:21:41

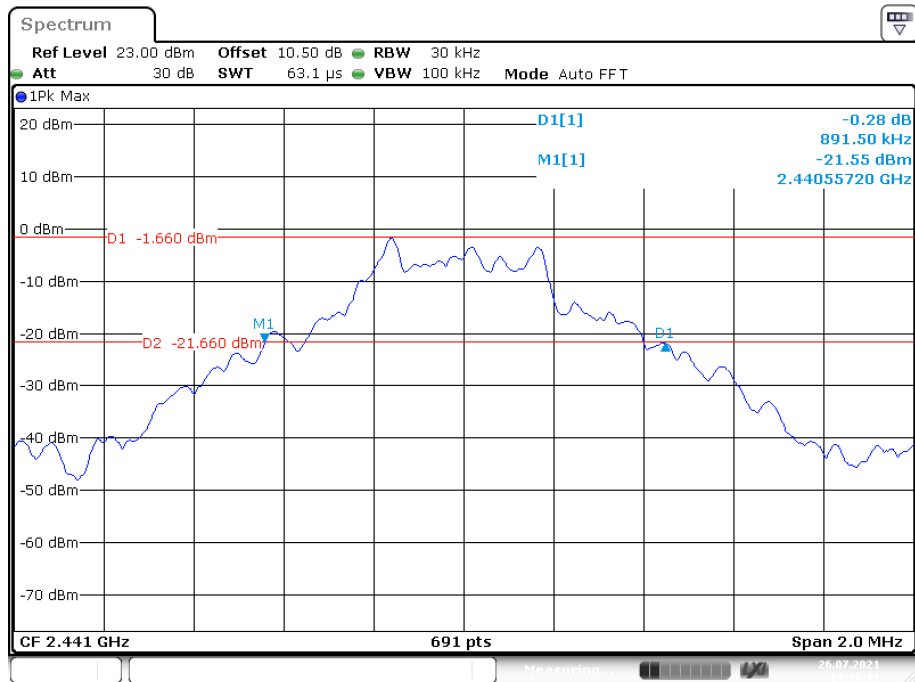BDR(GFSK) : Middle Channel


Date: 26.JUL.2021 14:27:11

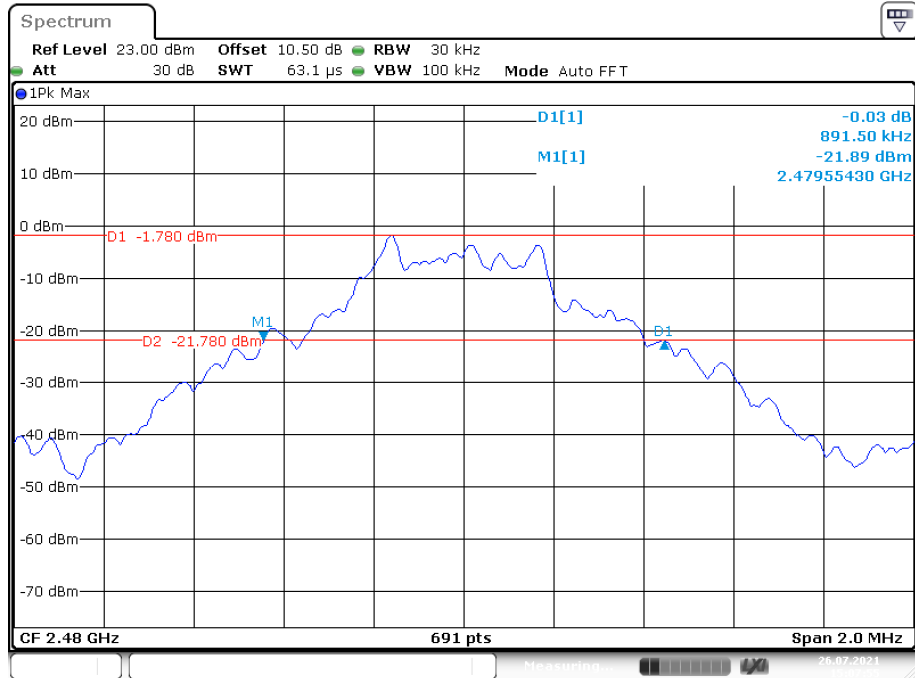BDR(GFSK) : High Channel


Date: 26.JUL.2021 15:07:55

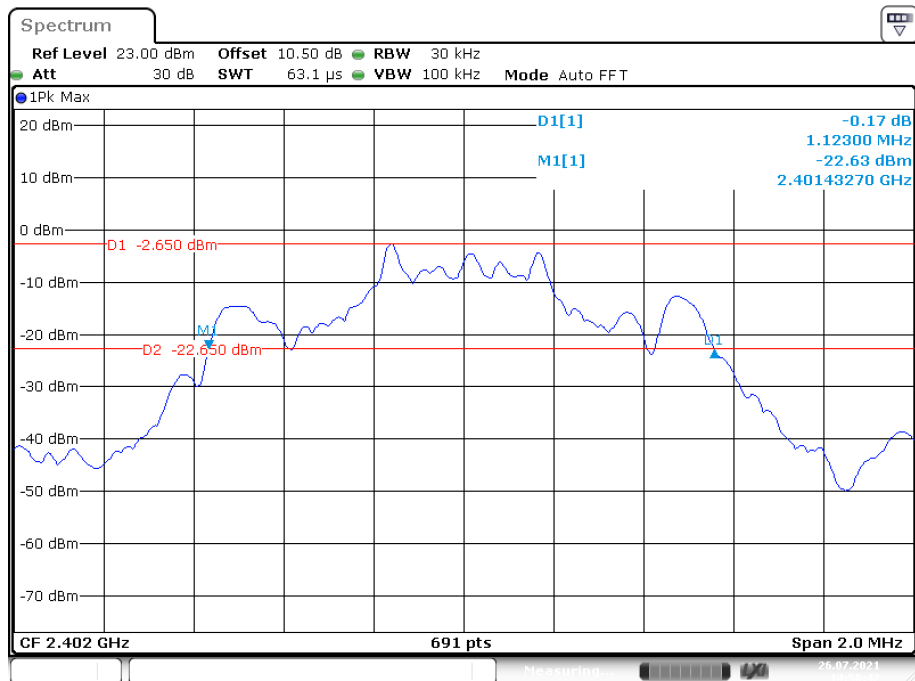EDR ($\pi/4$ -DQPSK): Low Channel


Date: 26.JUL.2021 14:58:42

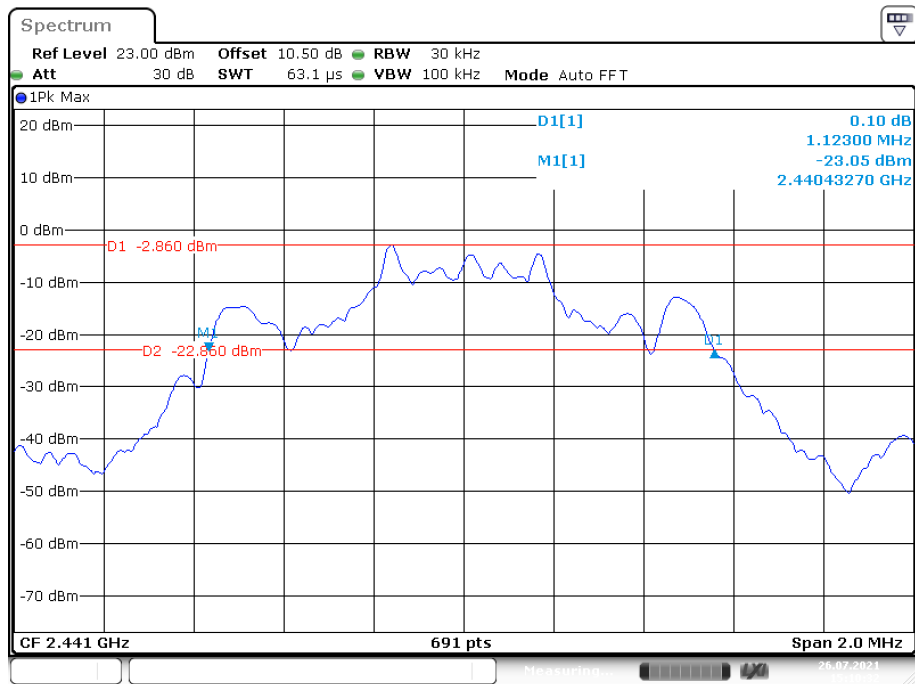EDR ($\pi/4$ -DQPSK): Middle Channel


Date: 26.JUL.2021 15:10:32

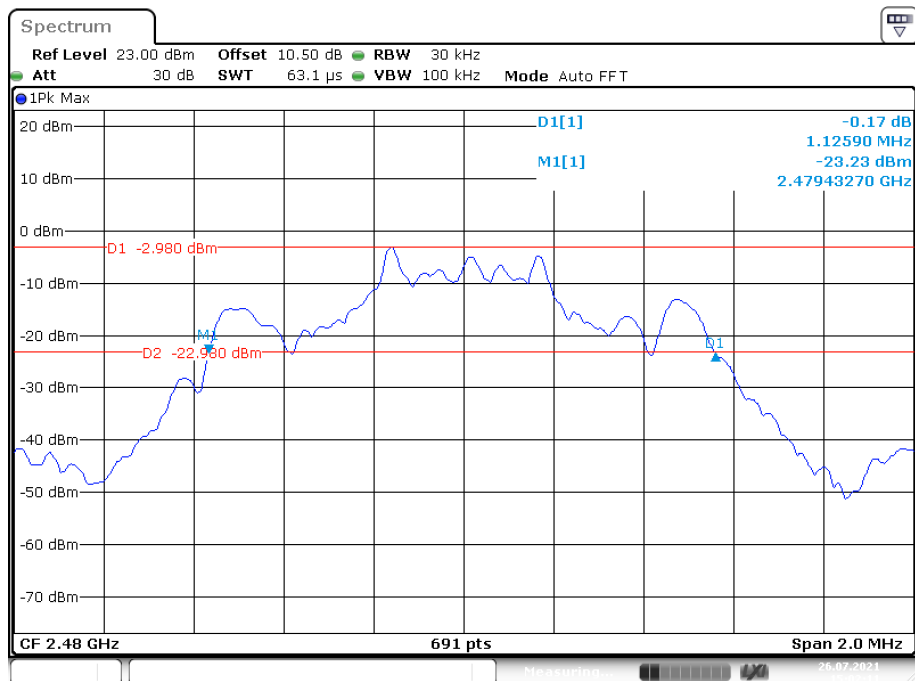EDR ($\pi/4$ -DQPSK): High Channel

Date: 26.JUL.2021 15:02:11

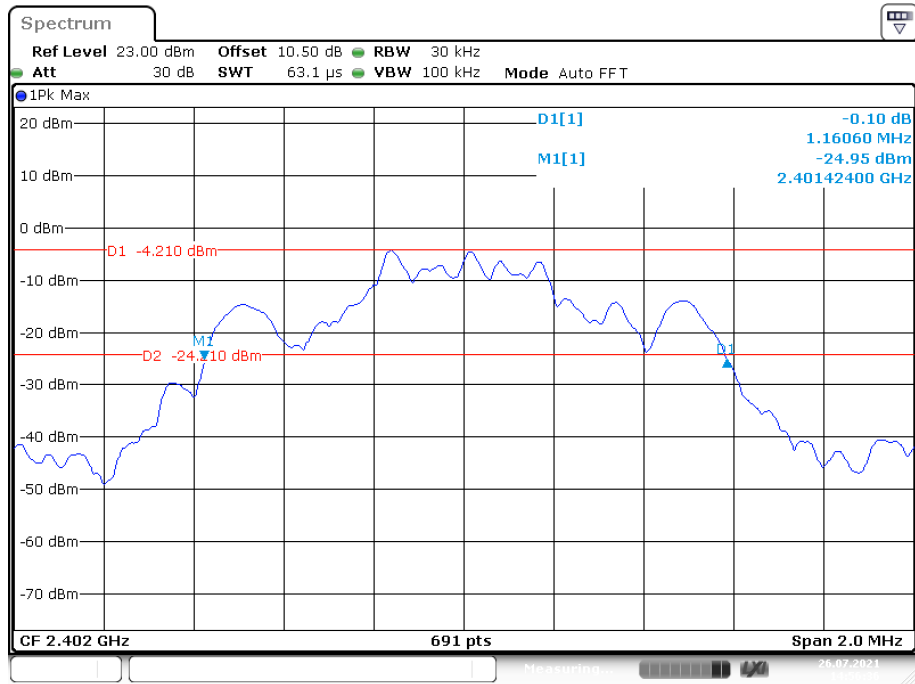
EDR (8DPSK): Low Channel

Date: 26.JUL.2021 14:56:36

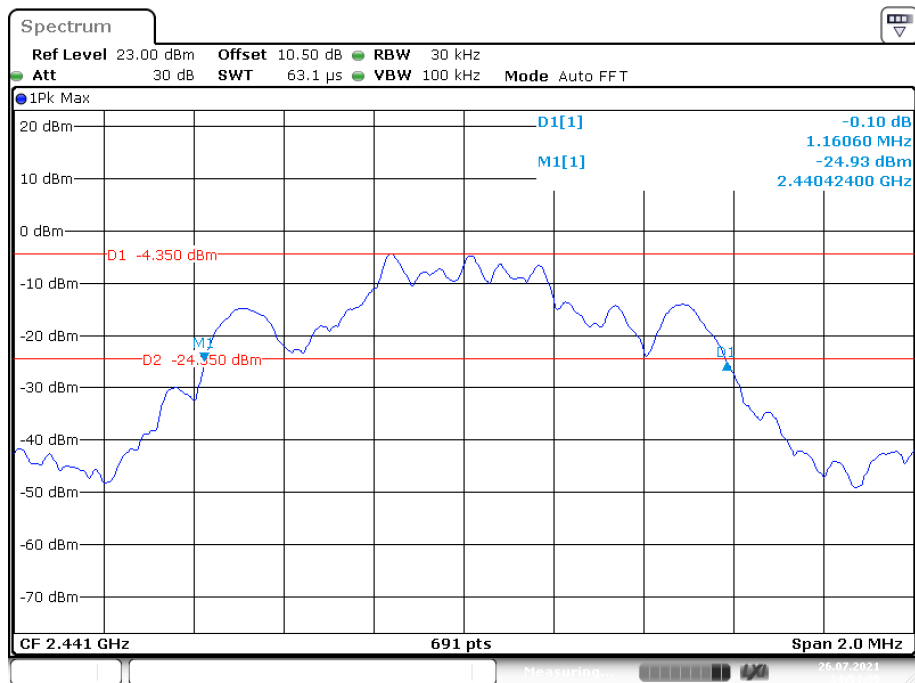EDR (8DPSK): Middle Channel

Date: 26.JUL.2021 14:54:39

EDR (8DPSK): High Channel

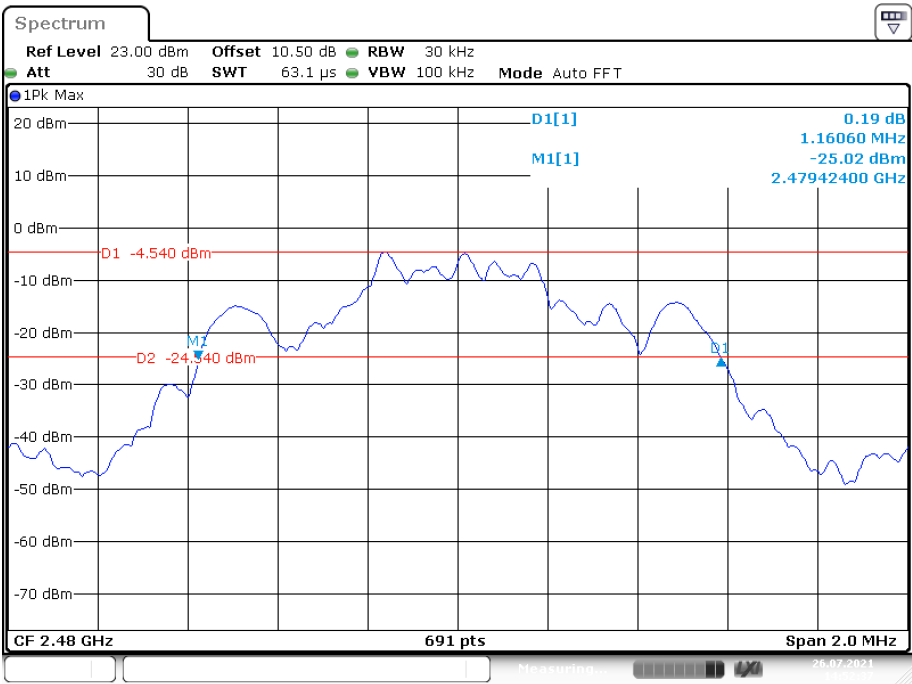

Date: 26.JUL.2021 14:52:37

FCC §15.247(a) (1) (iii)-QUANTITY OF HOPPING CHANNEL TEST

Applicable Standard

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Set the EUT in hopping mode from first channel to last.
3. By using the max-hold function record the quantity of the channel.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Fan Yang on 2021-07-26.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to following table and plots.

Mode	Frequency Range (MHz)	Number of Hopping Channel (CH)	Limit (CH)
BDR (GFSK)	2400-2483.5	79	≥15
EDR (π/4-DQPSK)	2400-2483.5	79	≥15
EDR (8DPSK)	2400-2483.5	79	≥15

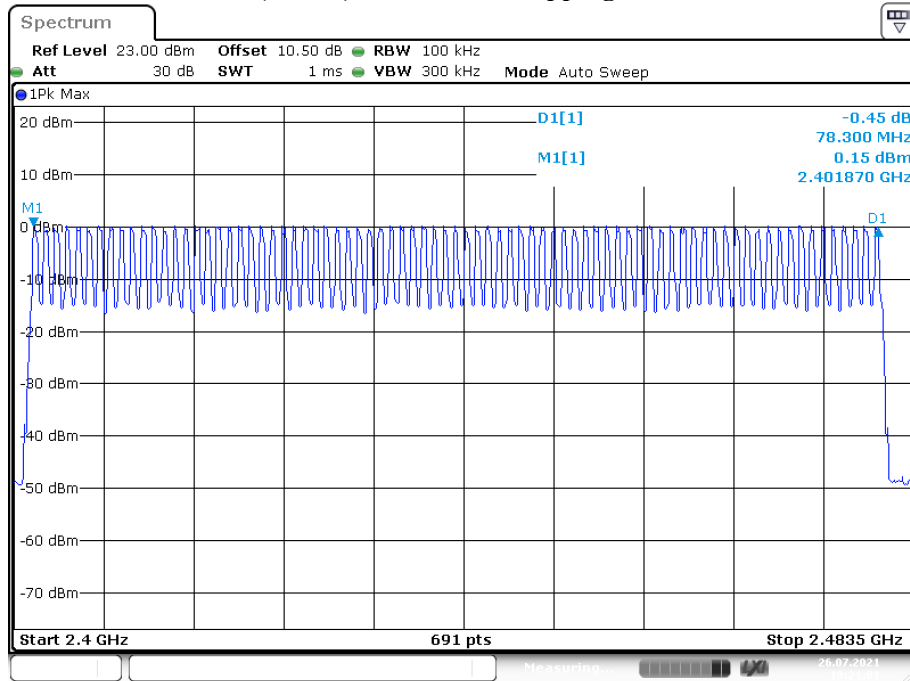
BDR (GFSK): Number of Hopping Channels

Date: 26.JUL.2021 18:21:02

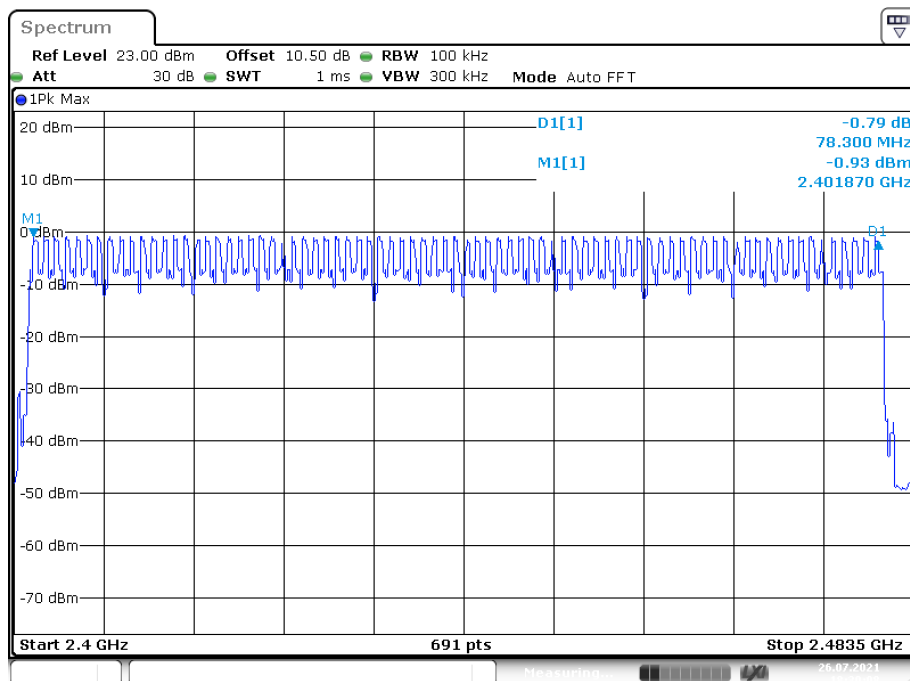EDR ($\pi/4$ -DQPSK): Number of Hopping Channels

Date: 26.JUL.2021 18:30:09

EDR (8DPSK): Number of Hopping Channels

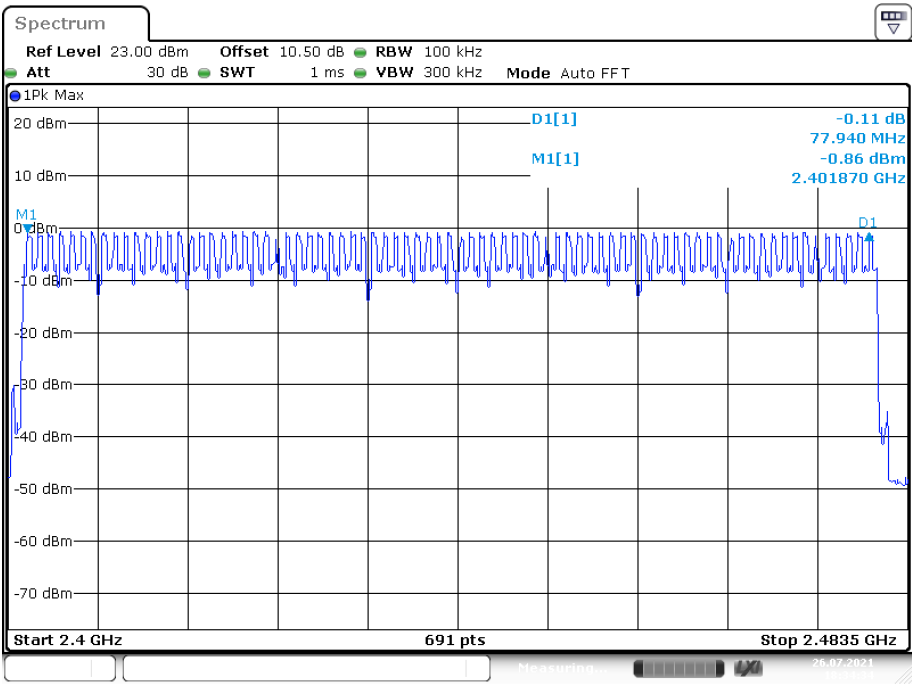

Date: 26.JUL.2021 18:34:35

FCC §15.247(a) (1) (iii) - TIME OF OCCUPANCY (DWELL TIME)

Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

Test Procedure

1. The EUT was worked in channel hopping.
2. Set the RBW to: 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Set the span to 0Hz.
5. Detector = peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Recorded the time of single pulses

Test Data

Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Fan Yang on 2021-08-06.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to following table and plots


Test Mode	Channel	Pulse Time [ms]	Result[s]	Limit[s]	Verdict
DH1	Hop	0.38	0.122	≤ 0.4	PASS
DH3	Hop	1.65	0.264	≤ 0.4	PASS
DH5	Hop	2.91	0.310	≤ 0.4	PASS
2DH1	Hop	0.39	0.125	≤ 0.4	PASS
2DH3	Hop	1.65	0.264	≤ 0.4	PASS
2DH5	Hop	2.91	0.310	≤ 0.4	PASS
3DH1	Hop	0.39	0.125	≤ 0.4	PASS
3DH3	Hop	1.65	0.264	≤ 0.4	PASS
3DH5	Hop	2.91	0.310	≤ 0.4	PASS

Note 1:


DH1: Result=Pulse Time $\times (1600/2/79) \times 31.6s$

DH3: Result=Pulse Time $\times (1600/4/79) \times 31.6s$

DH5: Result=Pulse Time $\times (1600/6/79) \times 31.6s$

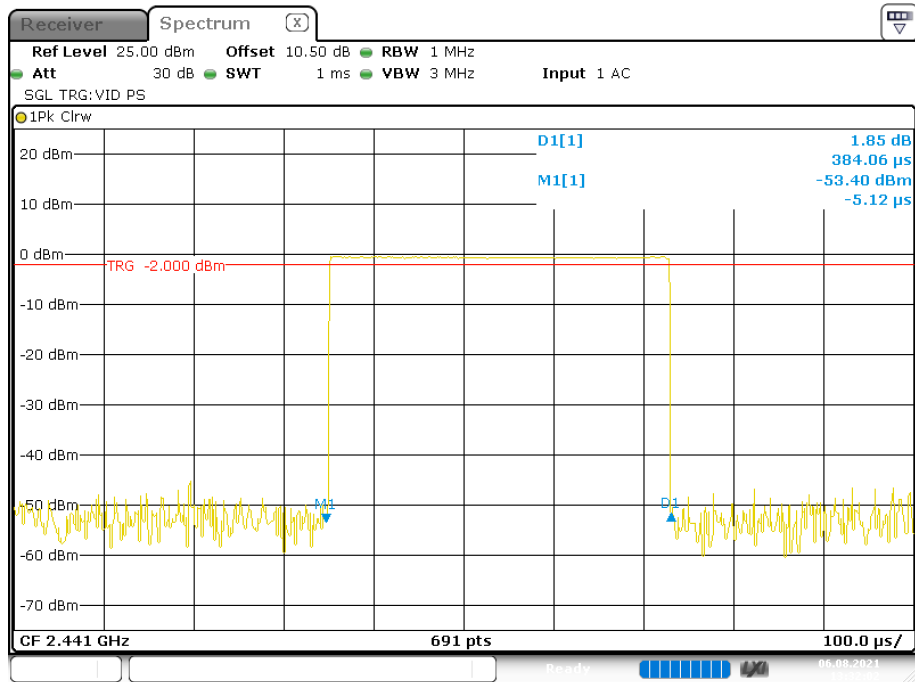
BDR (GFSK):**Pulse time, DH1**

Date: 6.AUG.2021 13:32:02

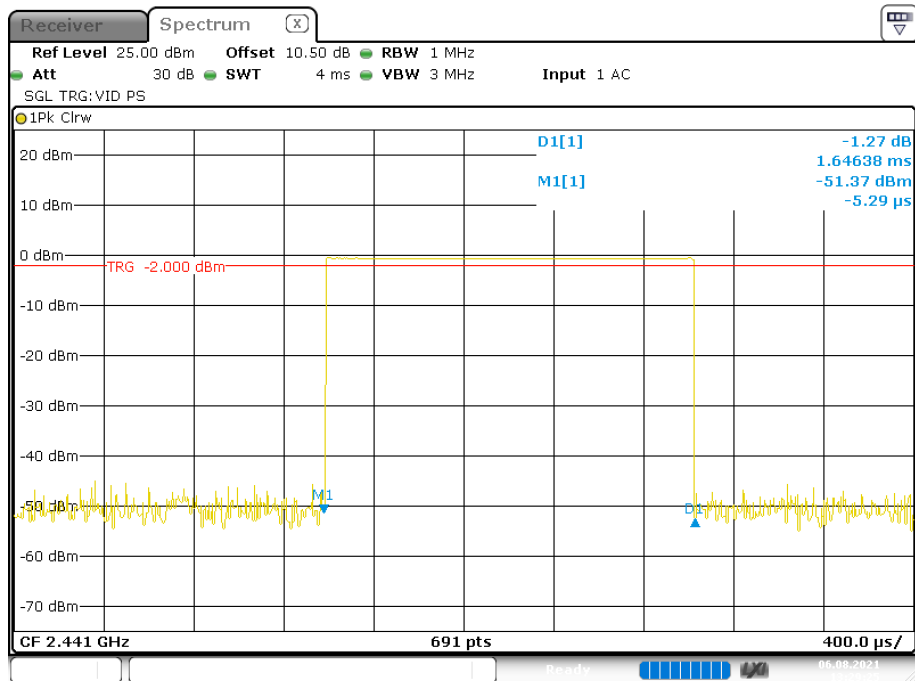Pulse time, DH3

Date: 6.AUG.2021 13:29:24


Pulse time, DH5

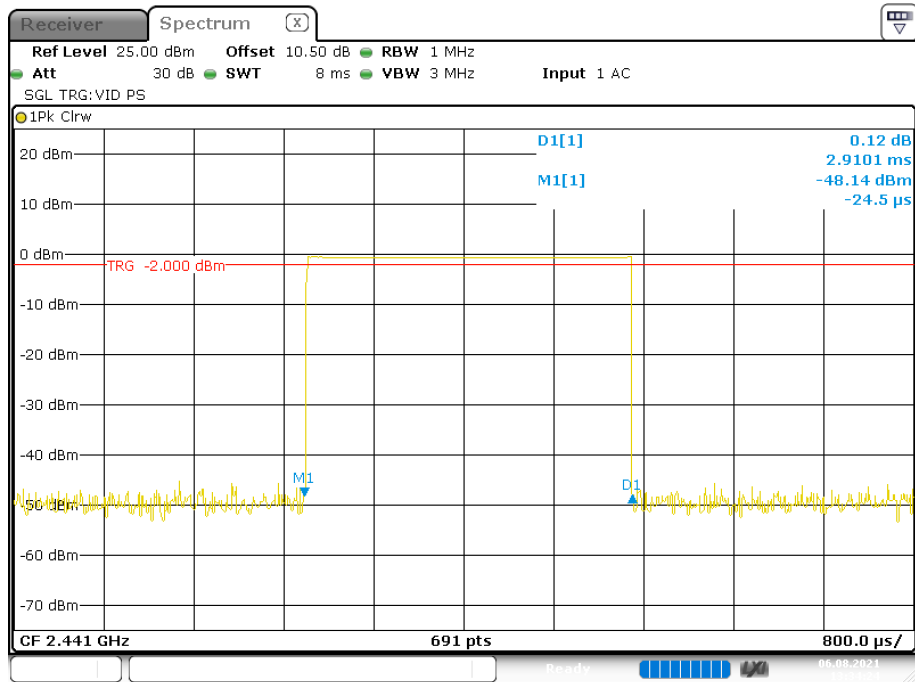

Date: 6.AUG.2021 13:34:23


EDR ($\pi/4$ -DQPSK):

Pulse time, 2DH1

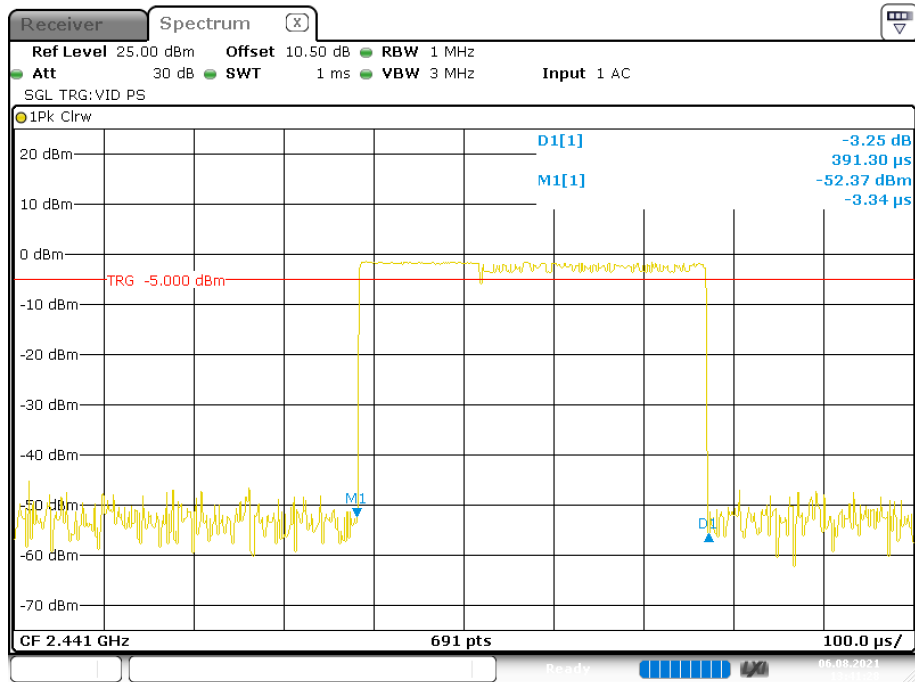


Date: 6.AUG.2021 13:41:28

Pulse time, 2DH3

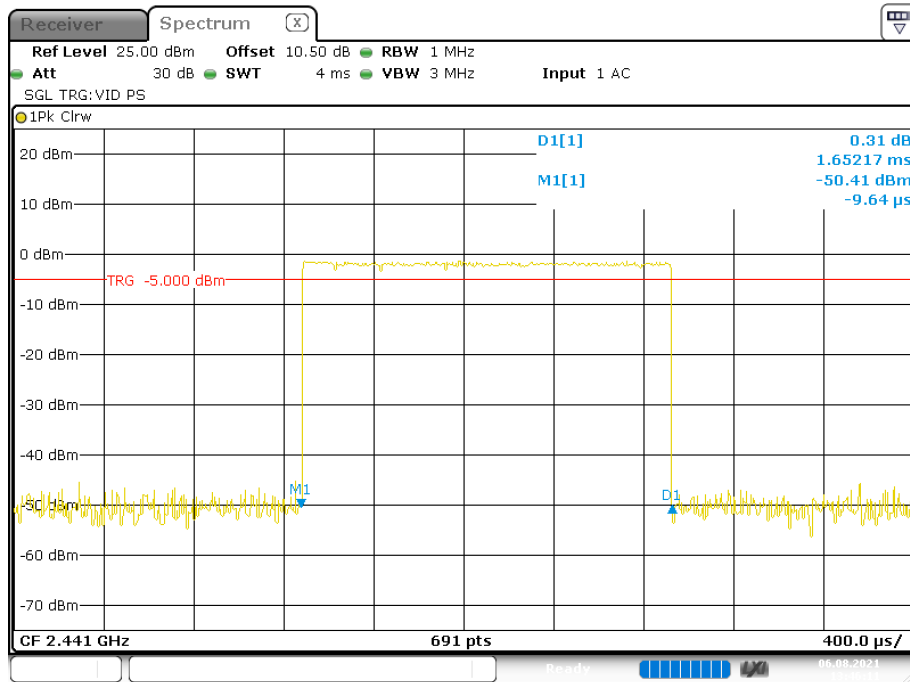

Date: 6.AUG.2021 13:46:11


Pulse time, 2DH5

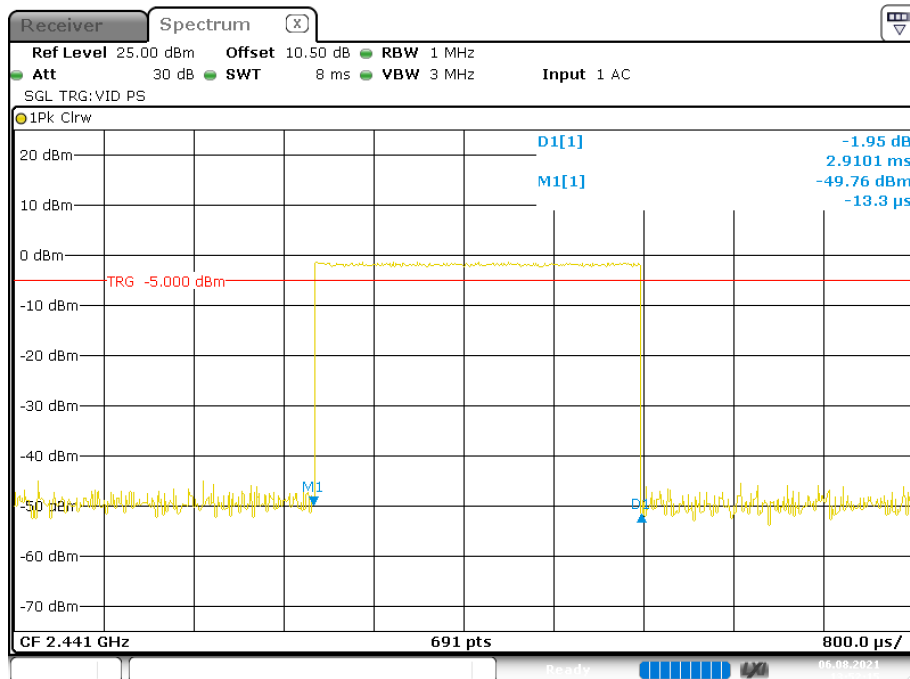

Date: 6.AUG.2021 13:52:15


EDR (8DPSK)

Pulse time, 3DH1

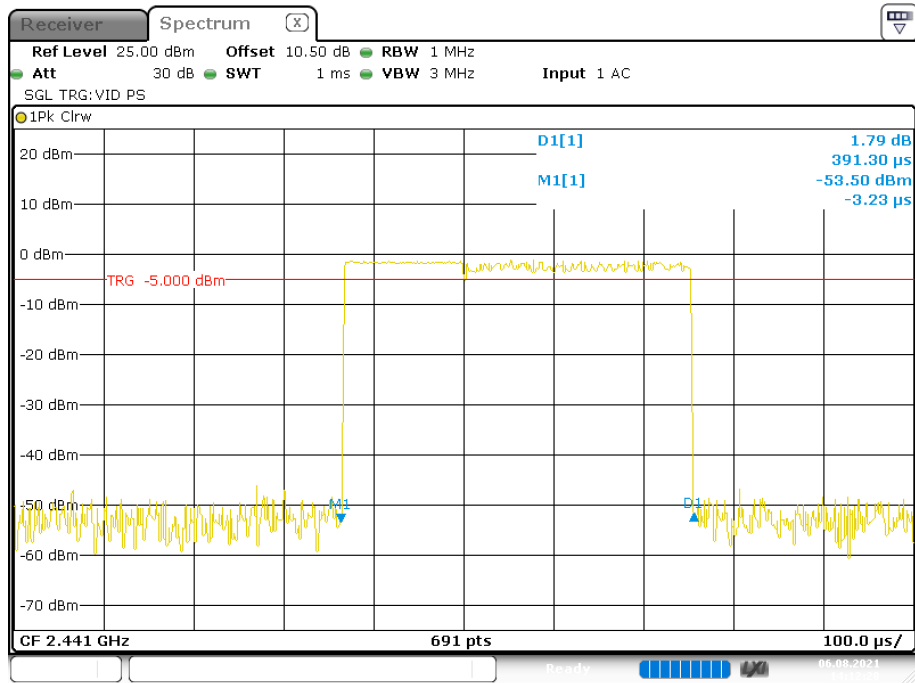


Date: 6.AUG.2021 14:12:28

Pulse time, 3DH3

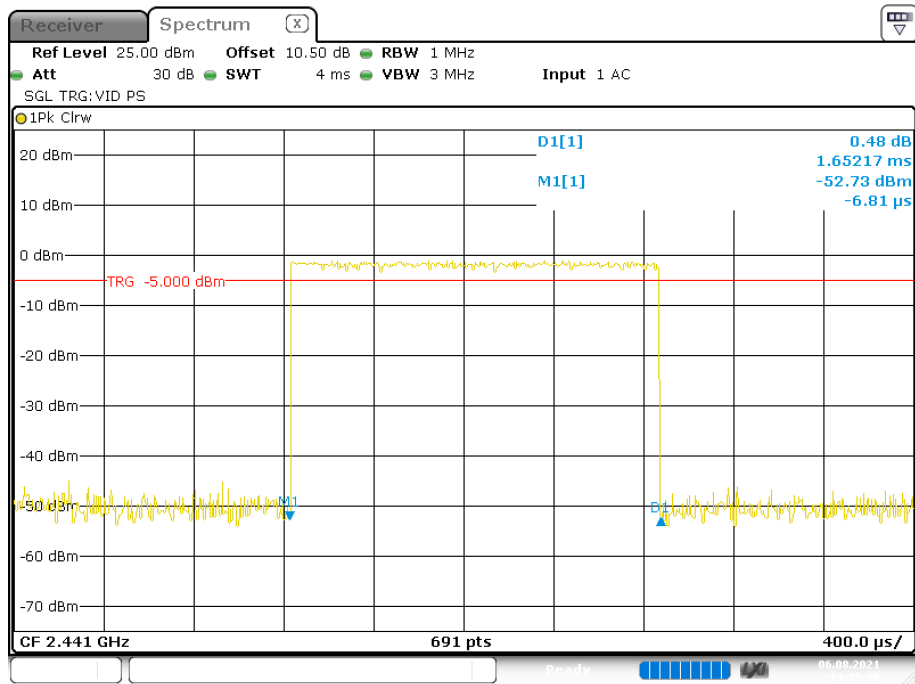

Date: 6.AUG.2021 14:15:30

Pulse time, 3DH5

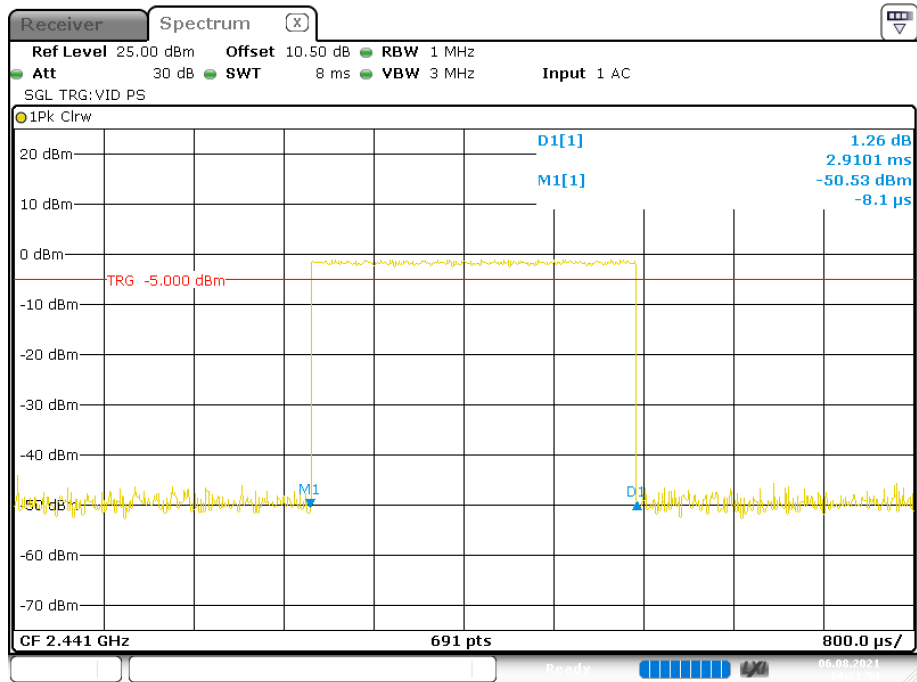

Date: 6.AUG.2021 14:21:55

FCC §15.247(b) (1) - PEAK OUTPUT POWER MEASUREMENT

Applicable Standard

According to §15.247(b) (1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. And for all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

Test Procedure

1. Place the EUT on a bench and set in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to one test equipment.
3. Add a correction factor to the display.

Test Data

Environmental Conditions


Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa

The testing was performed by Fan Yang on 2021-07-26.


EUT operation mode: Transmitting

Test Result: Compliant. Please refer to following table.


Mode	Channel	Frequency (MHz)	Peak Output Power	Limit (dBm)
			(dBm)	
BDR (GFSK)	Low	2402	0.44	21
	Middle	2441	0.49	21
	High	2480	0.52	21
EDR ($\pi/4$ -DQPSK)	Low	2402	-0.50	21
	Middle	2441	-0.48	21
	High	2480	-0.52	21
EDR (8DPSK)	Low	2402	-0.47	21
	Middle	2441	-0.50	21
	High	2480	-0.60	21

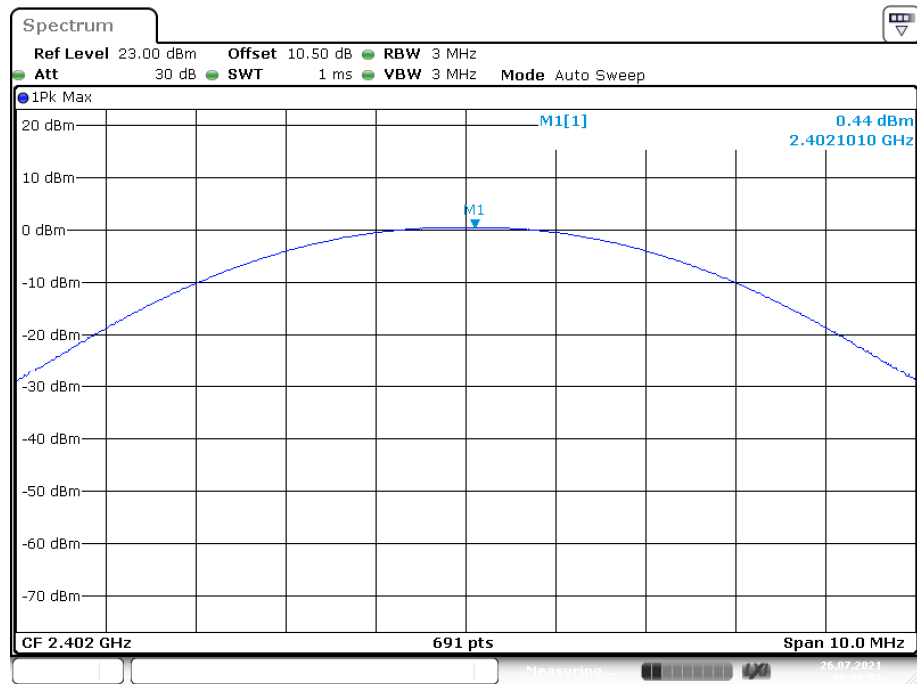BDR(GFSK) : Low Channel


Date: 26.JUL.2021 18:36:53

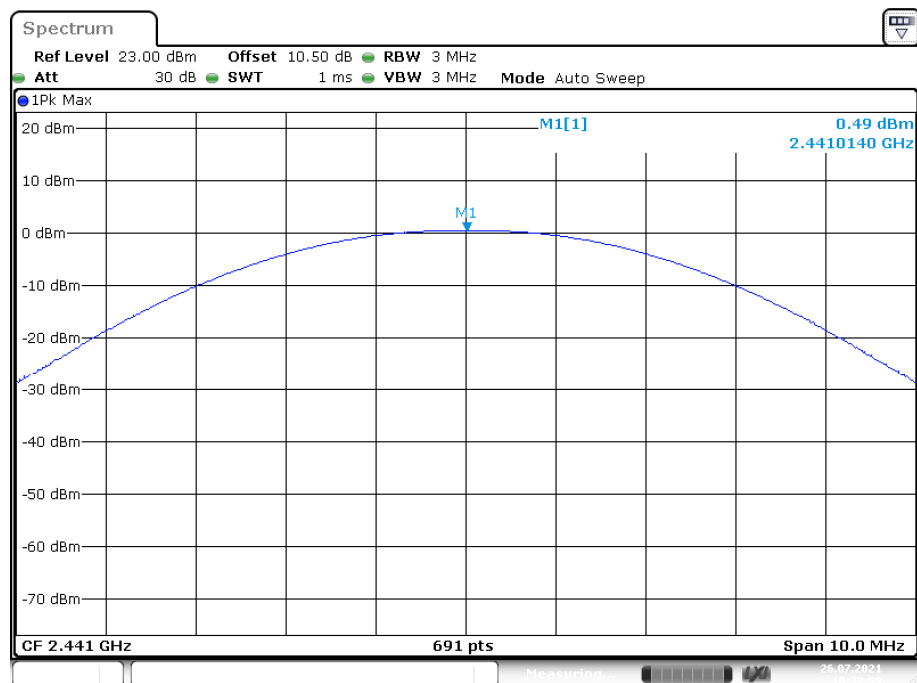BDR(GFSK) : Middle Channel


Date: 26.JUL.2021 18:37:59

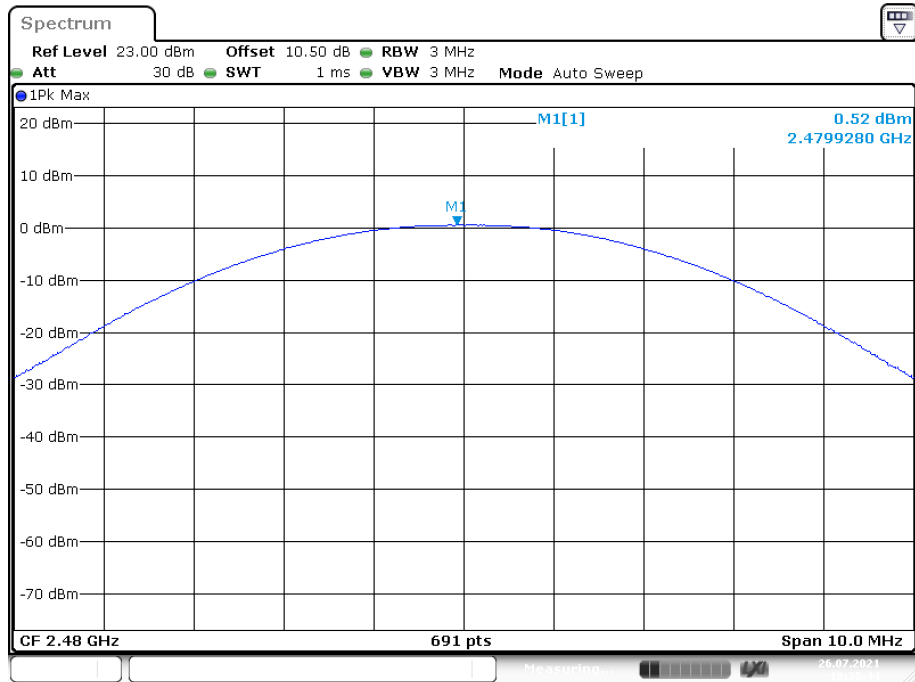BDR(GFSK) : High Channel


Date: 26.JUL.2021 18:38:43

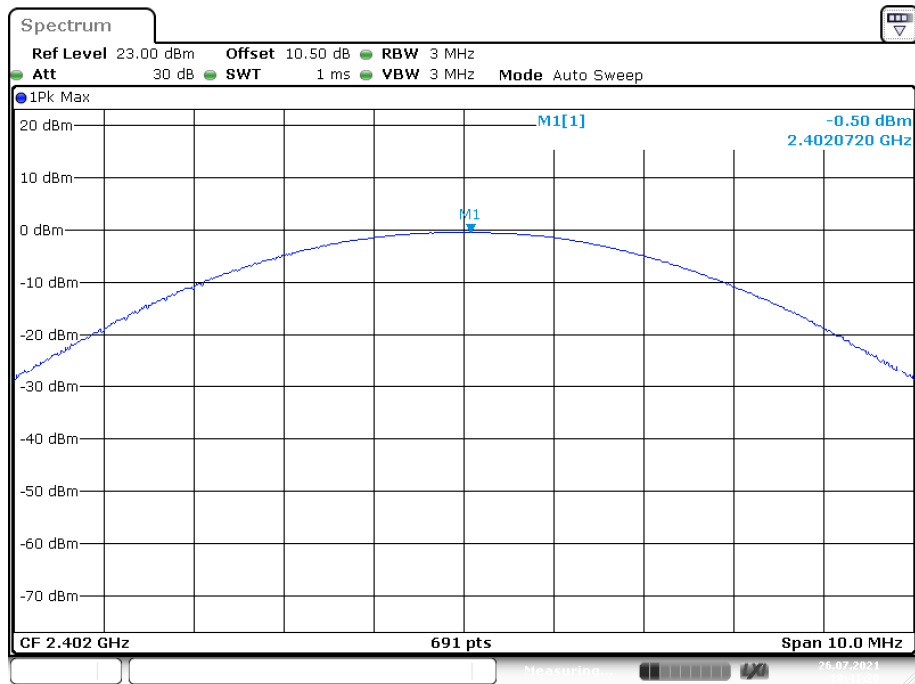EDR ($\pi/4$ -DQPSK): Low Channel

Date: 26.JUL.2021 18:41:20

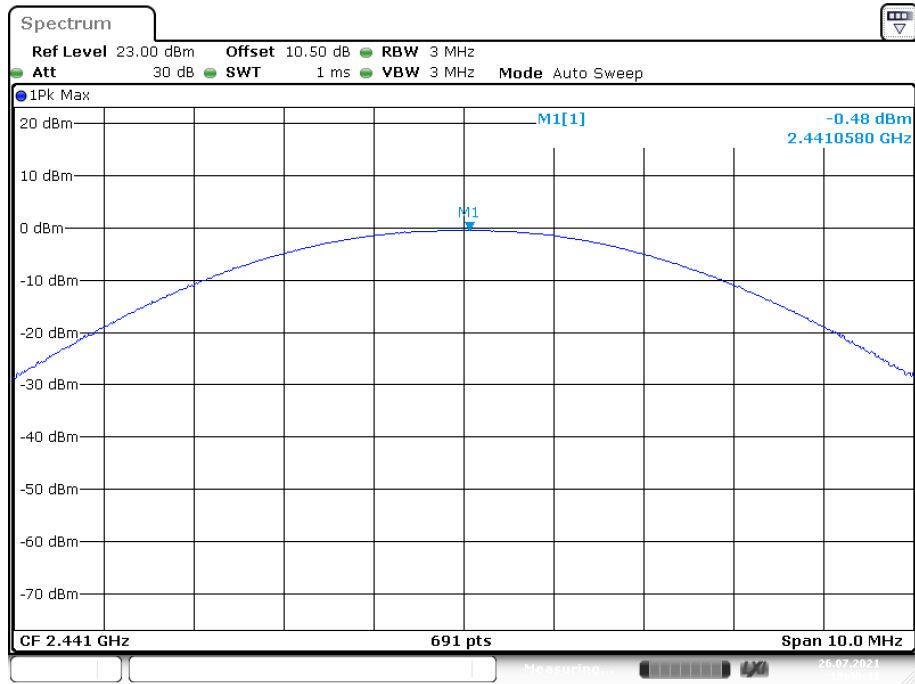
EDR ($\pi/4$ -DQPSK): Middle Channel

Date: 26.JUL.2021 18:40:41

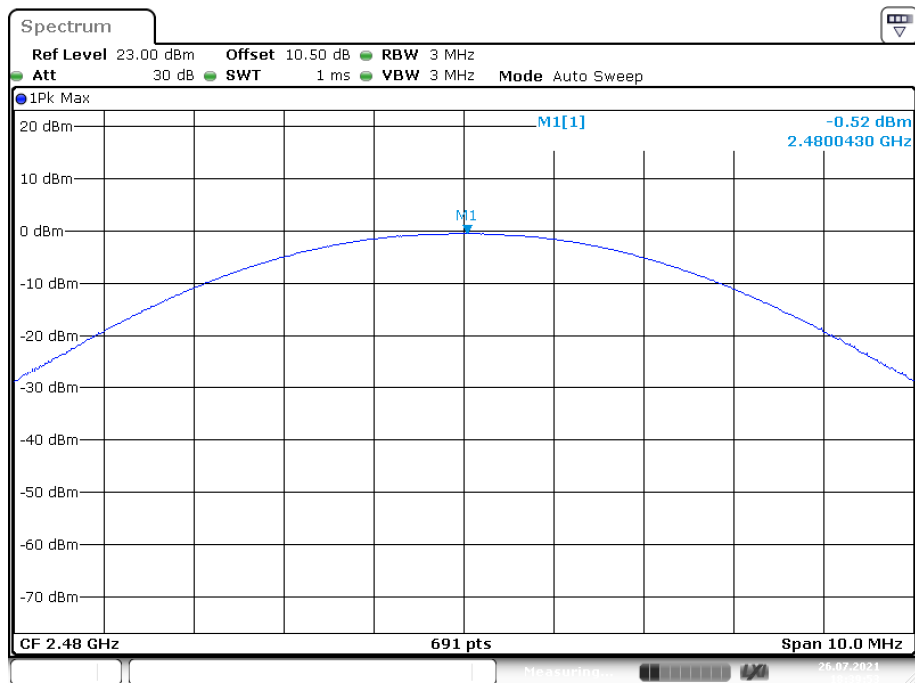EDR ($\pi/4$ -DQPSK): High Channel


Date: 26.JUL.2021 18:39:53

EDR (8DPSK): Low Channel

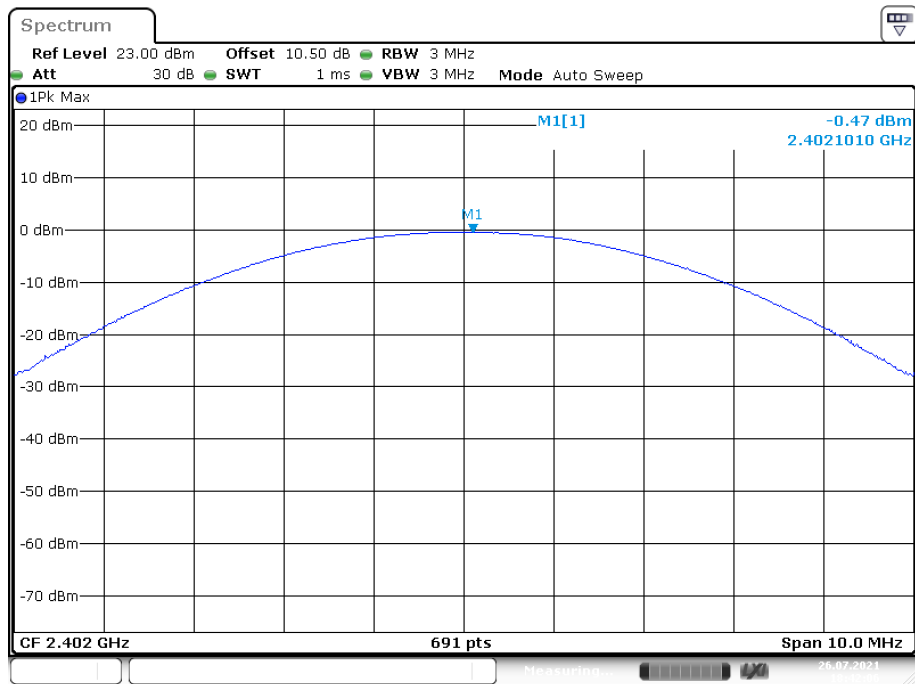


Date: 26.JUL.2021 18:42:06

EDR (8DPSK): Middle Channel

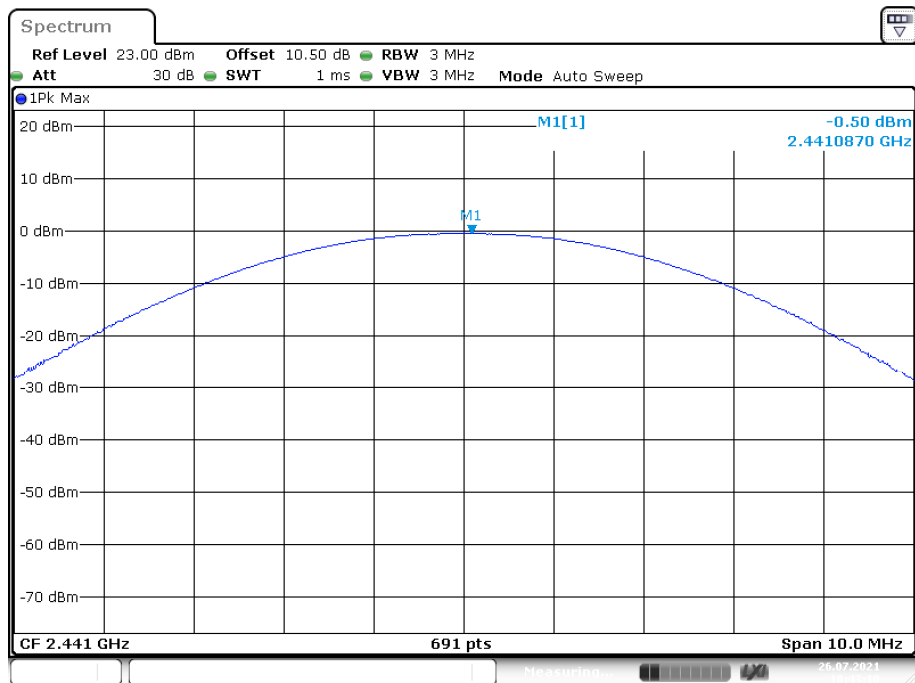

Date: 26.JUL.2021 18:43:10

EDR (8DPSK): High Channel

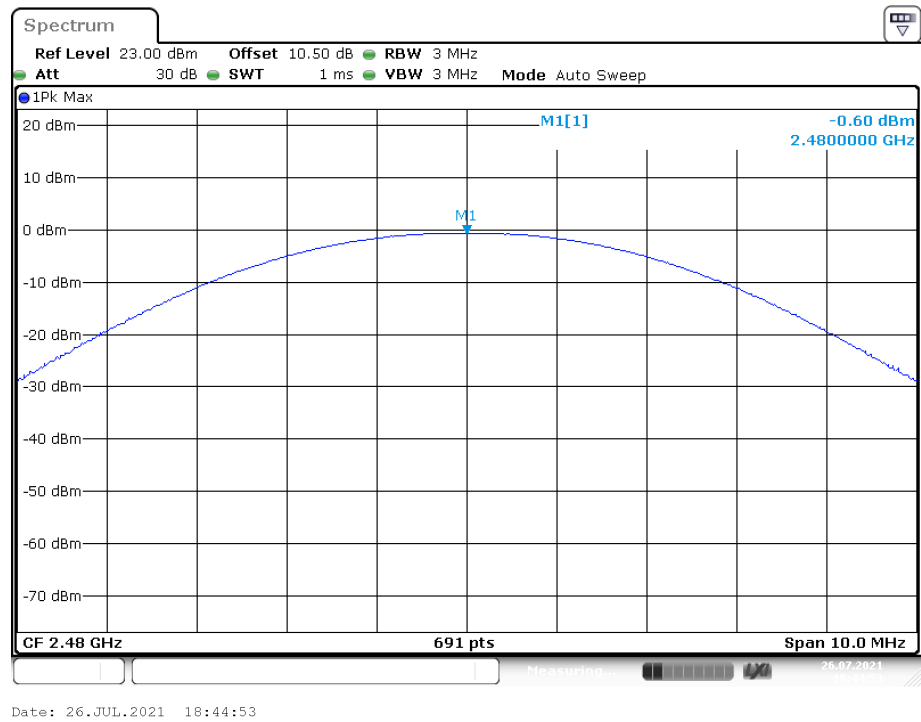

FCC §15.247(d) - BAND EDGES TESTING

Applicable Standard

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Remove the antenna from the EUT and then connect to a low loss RF cable from the antenna port to a EMI test receiver, then turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	56 %
ATM Pressure:	101.0 kPa


The testing was performed by Fan Yang on 2021-07-26.

EUT operation mode: Transmitting

Test Result: Compliant. Please refer to following plots.

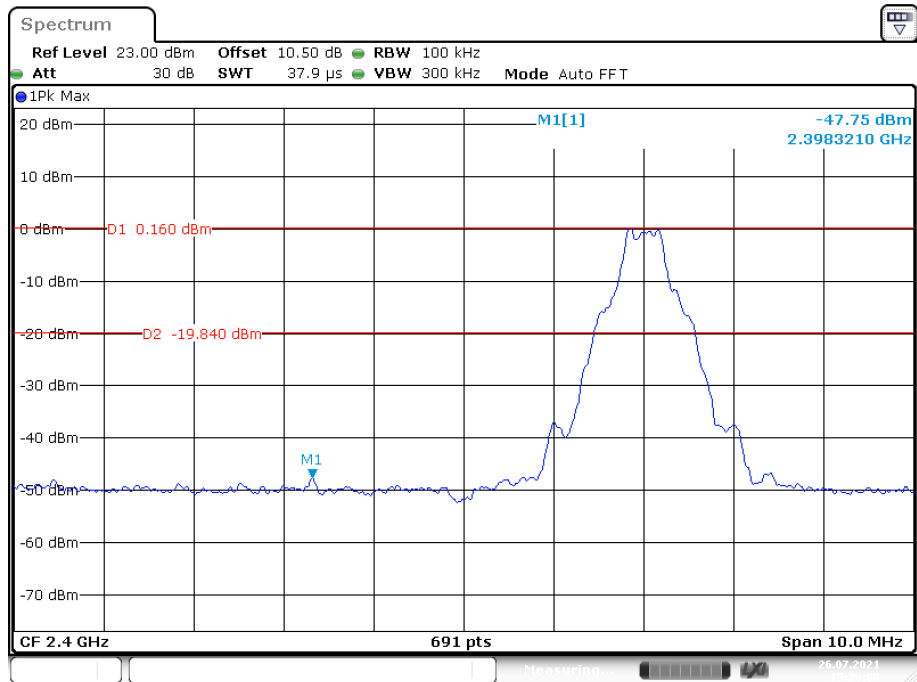
BDR (GFSK): Band Edge-Left Side**Single**

Date: 26.JUL.2021 15:26:08

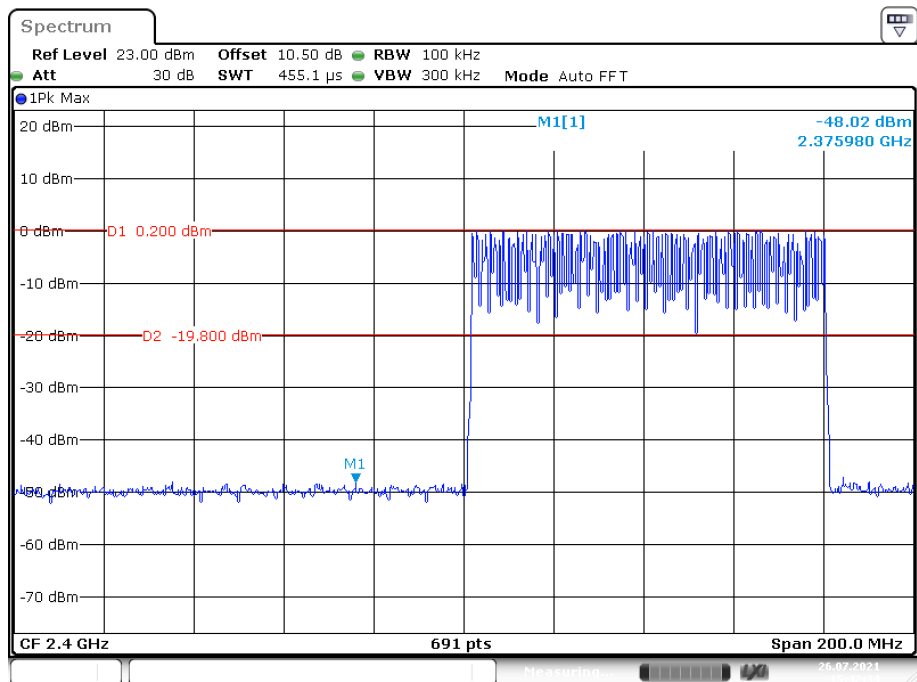Hopping


Date: 26.JUL.2021 15:42:34

BDR (GFSK): Band Edge-Right Side Single

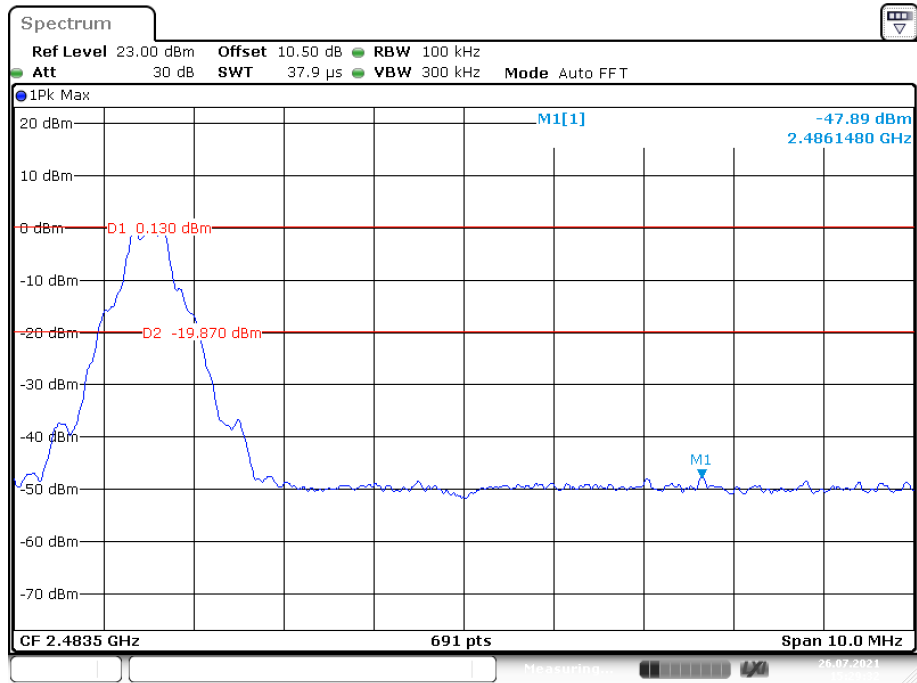


Date: 26.JUL.2021 15:29:32

Hopping

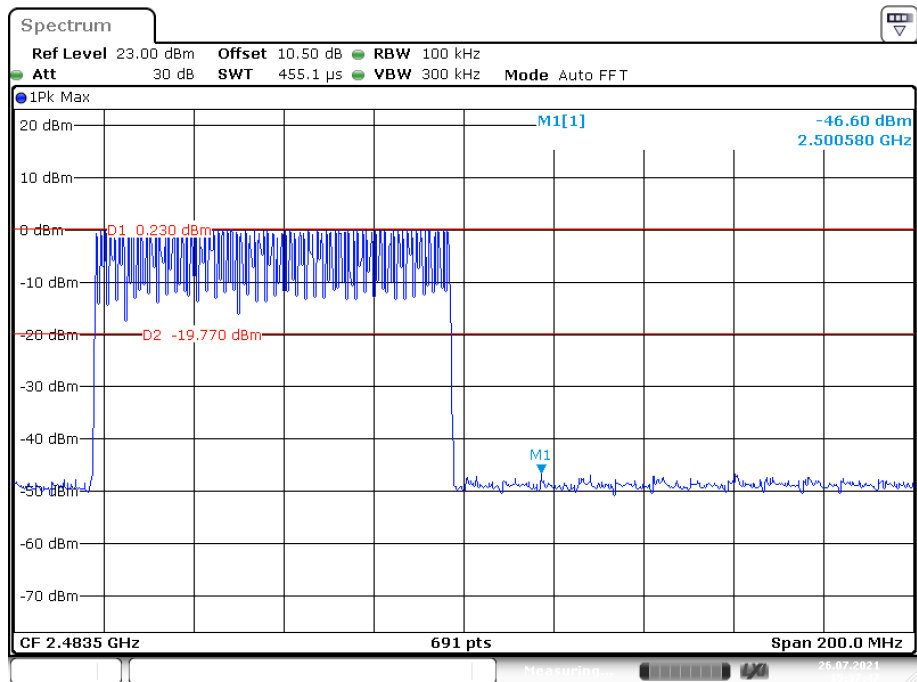


Date: 26.JUL.2021 15:37:47

EDR ($\pi/4$ -DQPSK): Band Edge-Left Side Single

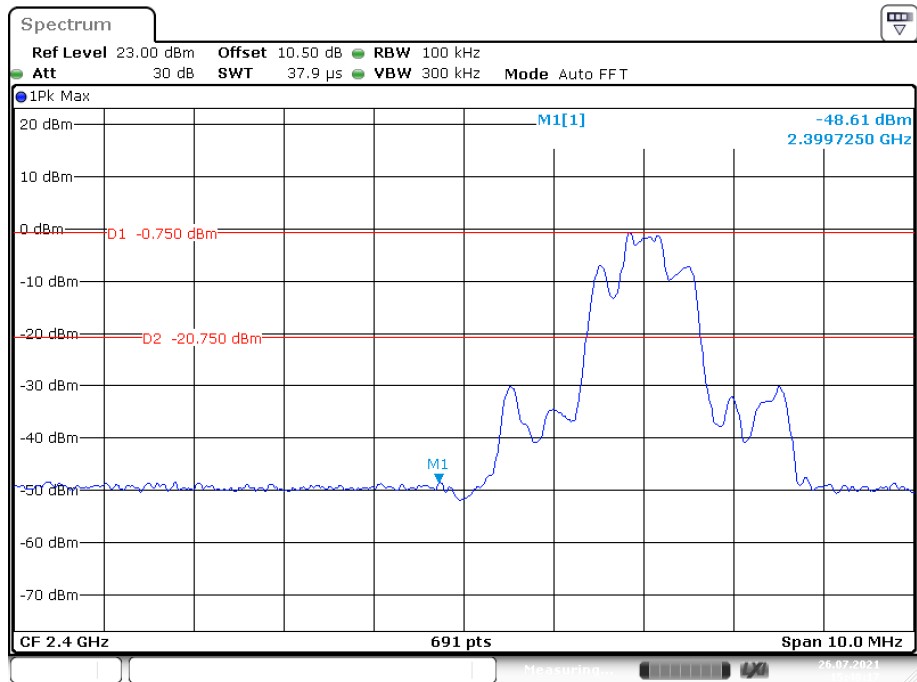

Date: 26.JUL.2021 15:48:17


Hopping

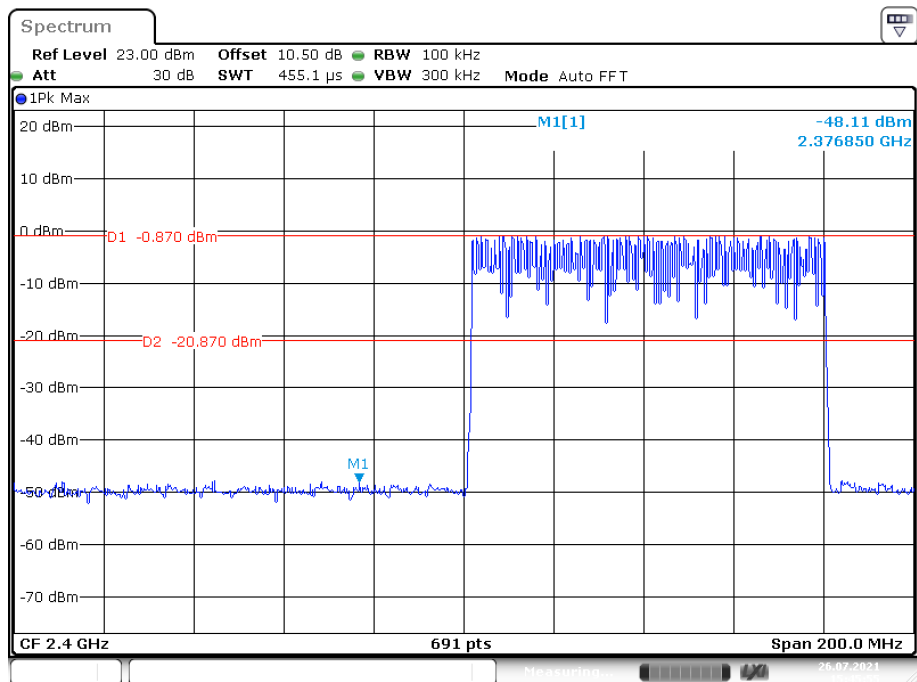

Date: 26.JUL.2021 15:45:55


EDR ($\pi/4$ -DQPSK): Band Edge-Right Side

Single

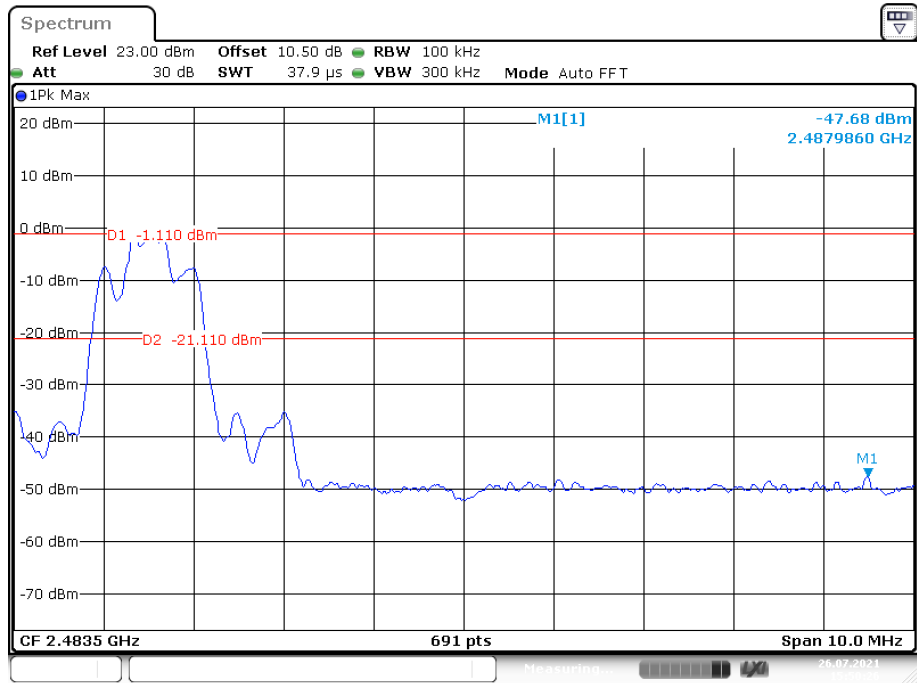


Date: 26.JUL.2021 15:50:26

Hopping

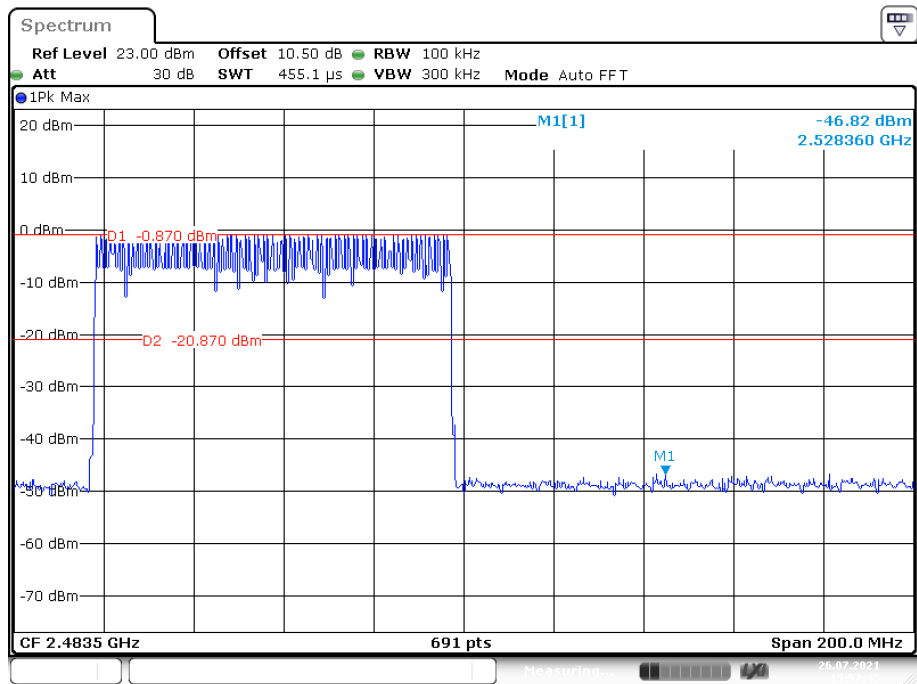


Date: 26.JUL.2021 15:57:46

EDR (8DPSK): Band Edge-Left Side Single

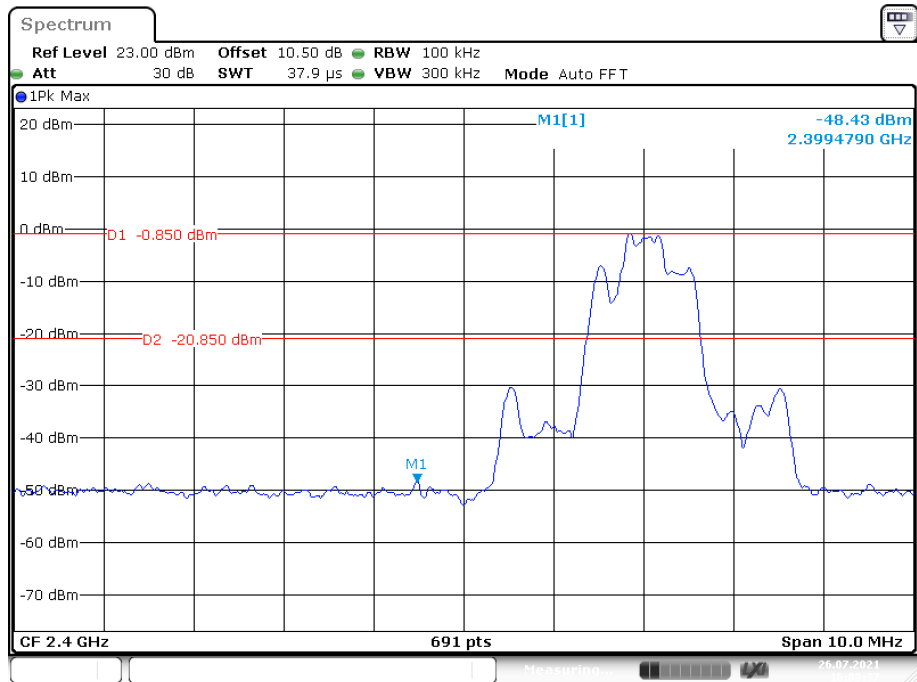


Date: 26.JUL.2021 16:08:37

Hopping

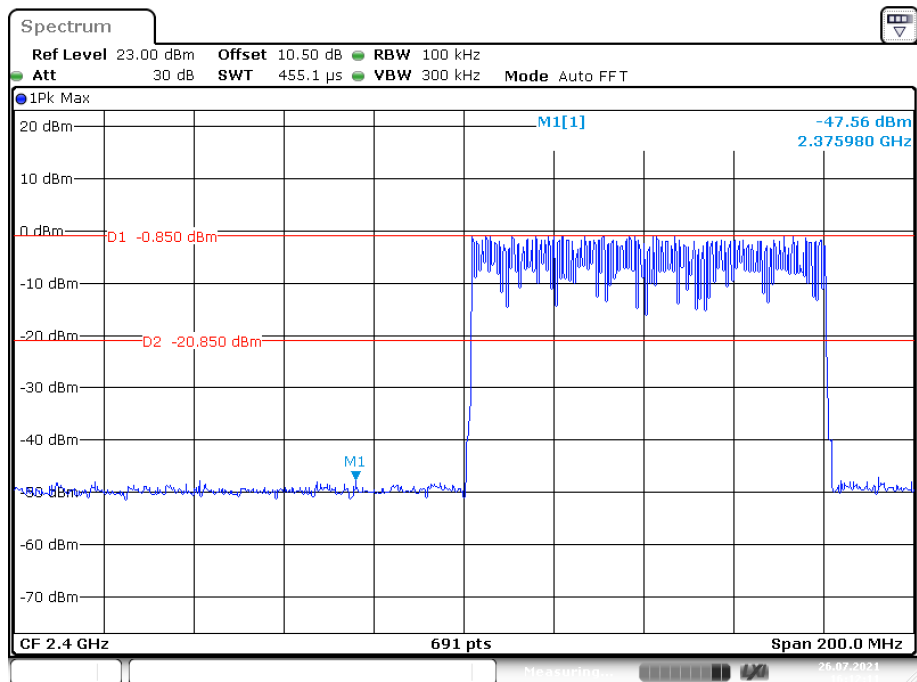


Date: 26.JUL.2021 16:12:11

EDR (8DPSK): Band Edge-Right Side Single

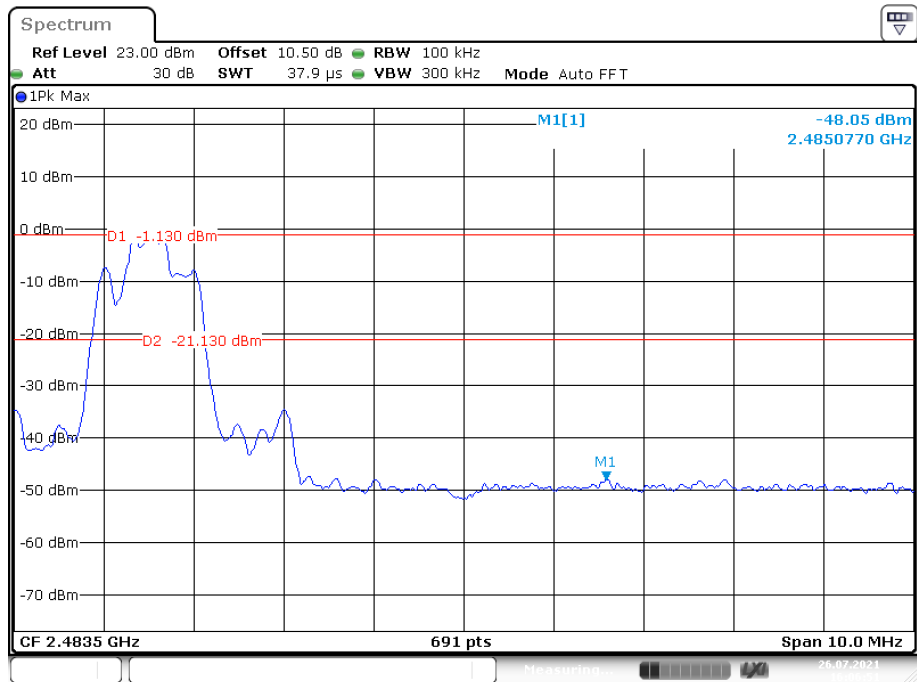

Date: 26.JUL.2021 16:06:51

Hopping

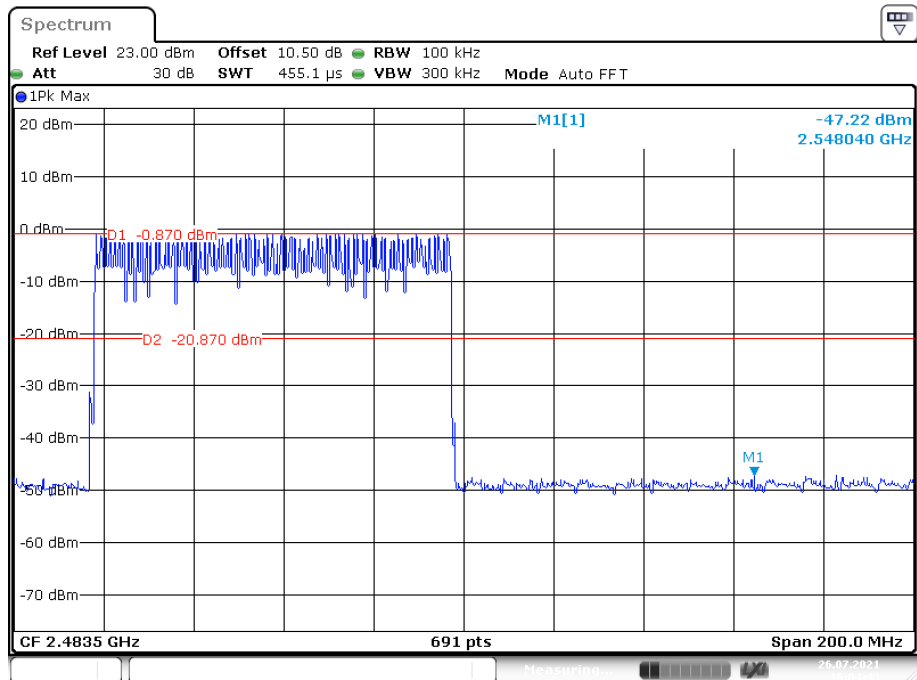

Date: 26.JUL.2021 16:04:43

***** END OF REPORT *****