

# FCC Part 22H & 24E & 27 Measurement and Test Report

For

Shenzhen Inrico Electronics Co., LTD

3/F, Building NO.118, High Tech Industrial Park, 72 Guowei Road, Luohu

District, Shenzhen, China

**FCC ID: 2AIV6-T520**

**FCC Rules:** FCC Part 22H, FCC Part 24E, FCC Part 27

**Product Description:** walkie talkie

**Tested Model:** T520

**Report No.:** STR18108145I-1

**Sample Receipt Date:** 2018-10-18

**Tested Date:** 2018-10-18 to 2019-01-02

**Issued Date:** 2019-01-02

**Tested By:** Mike Shi / Engineer

*Mike Shi*

**Reviewed By:** Silin Chen / EMC Manager

*Silin Chen*

**Approved & Authorized By:** Jandy So / PSQ Manager

*Jandy So*

**Prepared By:**

**Shenzhen SEM Test Technology Co., Ltd.**

1/F, Building A, Hongwei Industrial Park, Liuxian 2nd Road,

Bao'an District, Shenzhen, P.R.C. (518101)

Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permitted by Shenzhen SEM Test Technology Co., Ltd.

**TABLE OF CONTENTS**

<b>1. GENERAL INFORMATION.....</b>	<b>3</b>
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	5
1.3 TEST METHODOLOGY.....	5
1.4 TEST FACILITY.....	5
1.5 EUT SETUP AND TEST MODE.....	6
1.6 MEASUREMENT UNCERTAINTY.....	7
1.7 TEST EQUIPMENT LIST AND DETAILS.....	7
<b>2. SUMMARY OF TEST RESULTS.....</b>	<b>9</b>
<b>3. RF EXPOSURE.....</b>	<b>10</b>
3.1 STANDARD APPLICABLE.....	10
3.2 TEST RESULT.....	10
<b>4. RF OUTPUT POWER.....</b>	<b>11</b>
4.1 STANDARD APPLICABLE.....	11
4.2 TEST PROCEDURE.....	11
4.3 SUMMARY OF TEST RESULTS/PLOTS.....	11
<b>5. PEAK-TO-AVERAGE RATIO (PAR) OF TRANSMITTER.....</b>	<b>17</b>
5.1 STANDARD APPLICABLE.....	17
5.2 TEST PROCEDURE.....	17
5.3 SUMMARY OF TEST RESULTS.....	17
<b>6. EMISSION BANDWIDTH.....</b>	<b>19</b>
6.1 STANDARD APPLICABLE.....	19
6.2 TEST PROCEDURE.....	19
6.3 SUMMARY OF TEST RESULTS/PLOTS.....	19
<b>7. OUT OF BAND EMISSIONS AT ANTENNA TERMINAL.....</b>	<b>37</b>
7.1 STANDARD APPLICABLE.....	37
7.2 TEST PROCEDURE.....	37
7.3 SUMMARY OF TEST RESULTS/PLOTS.....	37
<b>8. SPURIOUS RADIATED EMISSIONS.....</b>	<b>74</b>
8.1 STANDARD APPLICABLE.....	74
8.2 TEST PROCEDURE.....	74
8.3 SUMMARY OF TEST RESULTS/PLOTS.....	74
<b>9. FREQUENCY STABILITY.....</b>	<b>88</b>
9.1 STANDARD APPLICABLE.....	88
9.2 TEST PROCEDURE.....	88
9.3 SUMMARY OF TEST RESULTS/PLOTS.....	88
<b>10. MODULATION CHARACTERISTICS.....</b>	<b>92</b>
10.1 STANDARD APPLICABLE.....	92
10.2 TEST PROCEDURE.....	92
10.3 SUMMARY OF TEST RESULTS/PLOTS.....	92

## 1. GENERAL INFORMATION

### 1.1 Product Description for Equipment Under Test (EUT)

#### Client Information

Applicant: Shenzhen Inrico Electronics Co., LTD  
Address of applicant: 3/F, Building NO.118, High Tech Industrial Park, 72 Guowei Road, Luohu District, Shenzhen, China

Manufacturer: Shenzhen Inrico Electronics Co., LTD  
Address of manufacturer: 3/F, Building NO.118, High Tech Industrial Park, 72 Guowei Road, Luohu District, Shenzhen, China

General Description of EUT:	
Product Name:	walkie talkie
Brand Name:	Inrico
Model No.:	T520
Adding Model(s):	/
Rated Voltage:	DC3.8V
Battery:	4000mAh
Adapter Model:	Model:HJ-0502000W2-US Input:AC100~240V 50/60Hz 0.3A Output:DC5V,2000mA
Software Version:	/
Hardware Version:	/
<i>Note: The test data is gathered from a production sample provided by the manufacturer.</i>	

<b>Technical Characteristics of EUT:</b>	
<b>2G</b>	
Support Networks:	GSM, GPRS, EDGE
Support Band:	GSM850/PCS1900
Uplink Frequency:	GSM/GPRS/EDGE 850: 824~849MHz GSM/GPRS/EDGE 1900: 1850~1910MHz
Downlink Frequency:	GSM/GPRS/EDGE 850: 869~894MHz GSM/GPRS/EDGE 1900: 1930~1990MHz
Max RF Output Power:	GSM850: 32.94dBm, GSM1900: 29.7dBm EDGE850: 29.1dBm, EDGE1900: 26.86dBm
Type of Emission:	GSM850: 248KGXW, GSM1900: 251KGXW EDGE850: 249KG7W, EDGE1900: 256KG7W
Type of Modulation:	GMSK, 8PSK
Type of Antenna:	Integral Antenna
Antenna Gain:	GSM850: -0.3dBi; GSM1900: 1.25 dBi
GPRS/EDGE Class:	Class 12
<b>3G</b>	
Support Networks:	WCDMA, HSDPA, HSUPA
Support Band:	WCDMA Band 2, WCDMA Band 4, WCDMA Band 5
Uplink Frequency:	WCDMA Band 2: 1850~1910MHz WCDMA Band 4: 1710~1755MHz WCDMA Band 5: 824~849MHz
Downlink Frequency:	WCDMA Band 2: 1930~1990MHz WCDMA Band 4: 2110~2155MHz WCDMA Band 5: 869~894MHz
RF Output Power:	WCDMA Band 2: 23dBm, WCDMA Band 4: 22.46dBm WCDMA Band 5: 22.53dBm
Type of Emission:	WCDMA Band 2: 4M27F9W WCDMA Band 4: 4M16F9W WCDMA Band 5: 4M24F9W
Type of Modulation:	BPSK,QPSK
Antenna Type:	Integral Antenna
Antenna Gain:	WCDMA Band 2: -0.67 dBi, WCDMA Band 4: 0.05dBi, WCDMA Band 5: -0.71dBi

## 1.2 Test Standards

The tests were performed according to following standards:

**FCC Rules Part 2:** FREQUENCY ALLOCATIONS AND RADIO TREATY MATTERS; GENERAL RULES AND REGULATIONS

**FCC Rules Part 22:** PRIVATE LAND MOBILE RADIO SERVICES.

**FCC Rules Part 24:** PUBLIC MOBILE SERVICES

**FCC Rules Part 27:** MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

**TIA/EIA 603 E March 2016:** Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

**ANSI C63.26-2015:** American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

**KDB 971168 D01 Power Meas License Digital Systems v03r01:** MEASUREMENT GUIDANCE FOR CERTIFICATION OF LICENSED DIGITAL TRANSMITTERS

**Maintenance of compliance** is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission, should be checked to ensure compliance has been maintained.

## 1.3 Test Methodology

All measurements contained in this report were conducted with TIA/EIA 603 E/ KDB 971168/ ANSI C63.26

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions.

## 1.4 Test Facility

### **FCC – Registration No.: 125990**

Shenzhen SEM Test Technology Co., Ltd. Laboratory has been recognized to perform compliance testing on equipment subject to the Commissions Declaration Of Conformity (DOC). The Designation Number is CN5010, and Test Firm Registration Number is 125990.

### **Industry Canada (IC) Registration No.: 11464A**

The 3m Semi-anechoic chamber of Shenzhen SEM Test Technology Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 11464A.

## 1.5 EUT Setup and Test Mode

The EUT was operated in the engineering mode to fix the Tx frequency that was for the purpose of the measurements. All testing shall be performed under maximum output power condition, and to measure its highest possible emissions level, more detailed description as follows:

Test Mode List		
Test Mode	Description	Remark
TM1	GSM 850	Low, Middle, High Channels
TM2	GPRS 850	Low, Middle, High Channels
TM3	EDGE 850	Low, Middle, High Channels
TM4	GSM 1900	Low, Middle, High Channels
TM5	GPRS 1900	Low, Middle, High Channels
TM6	EDGE 1900	Low, Middle, High Channels
TM7	WCDMA Band 5	Low, Middle, High Channels
TM8	HSDPA Band 5	Low, Middle, High Channels
TM9	HSUPA Band 5	Low, Middle, High Channels
TM10	WCDMA Band 4	Low, Middle, High Channels
TM11	HSDPA Band 4	Low, Middle, High Channels
TM12	HSUPA Band 4	Low, Middle, High Channels
TM13	WCDMA Band 2	Low, Middle, High Channels
TM14	HSDPA Band 2	Low, Middle, High Channels
TM15	HSUPA Band 2	Low, Middle, High Channels

Testing Configure			
Support Band	Support Standard	Channel Frequency	Channel Number
GSM 850	GSM/GPRS/EDGE	824.2 MHz	128
		836.6 MHz	190
		848.8 MHz	251
PCS 1900	GSM/GPRS/EDGE	1850.2 MHz	512
		1880.0 MHz	661
		1909.8 MHz	810
WCDMA Band 5	WCDMA/HSDPA/HSUPA	826.4 MHz	4132
		836.6 MHz	4183
		846.6 MHz	4233
WCDMA Band 4	WCDMA/HSDPA/HSUPA	1712.4 MHz	1312
		1732.4 MHz	1412
		1752.6 MHz	1513
WCDMA Band 2	WCDMA/HSDPA/HSUPA	1852.4 MHz	9262
		1880.0 MHz	9400
		1907.6 MHz	9538

Note: the transmitter has been tested on the communications mode of GSM, GPRS, EDGE, WCDMA, HSDPA, HSUPA compliance test and record the worst case.

Test Conditions	
Temperature:	22~25 °C
Relative humidity	50~55 %.
ATM Pressure:	1019 mbar

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
USB Cable	1.2	Unshielded	Without Ferrite

Special Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
/	/	/	/

## 1.6 Measurement Uncertainty

Measurement uncertainty		
Parameter	Conditions	Uncertainty
RF Output Power	Conducted	$\pm 0.42\text{dB}$
Occupied Bandwidth	Conducted	$\pm 1.5\%$
Frequency Stability	Conducted	2.3%
Transmitter Spurious Emissions	Conducted	$\pm 0.42\text{dB}$
Transmitter Spurious Emissions	Radiated	30-200MHz $\pm 4.52\text{dB}$
		0.2-1GHz $\pm 5.56\text{dB}$
		1-6GHz $\pm 3.84\text{dB}$
		6-18GHz $\pm 3.92\text{dB}$

## 1.7 Test Equipment List and Details

No.	Description	Manufacturer	Model	Serial No.	Cal Date	Due. Date
SEMT-1075	Communication Tester	Rohde & Schwarz	CMW500	148650	2018-05-22	2019-05-21
SEMT-1063	GSM Tester	Rohde & Schwarz	CMU200	114403	2018-05-22	2019-05-21
SEMT-1072	Spectrum Analyzer	Agilent	E4407B	MY41440400	2018-05-22	2019-05-21
SEMT-1079	Spectrum Analyzer	Agilent	N9020A	US47140102	2018-05-22	2019-05-21
SEMT-1080	Signal Generator	Agilent	83752A	3610A01453	2018-05-22	2019-05-21

SEMT-1081	Vector Signal Generator	Agilent	N5182A	MY47070202	2018-05-22	2019-05-21
SEMT-1028	Power Divider	Weinschel	1506A	PM204	2018-05-22	2019-05-21
SEMT-1082	Power Divider	RF-Lambda	RFLT4W5M18G	14110400027	2018-05-22	2019-05-21
SEMT-1031	Spectrum Analyzer	Rohde & Schwarz	FSP30	836079/035	2018-05-22	2019-05-21
SEMT-1007	EMI Test Receiver	Rohde & Schwarz	ESVB	825471/005	2018-05-22	2019-05-21
SEMT-1008	Amplifier	Agilent	8447F	3113A06717	2018-05-22	2019-05-21
SEMT-1043	Amplifier	C&D	PAP-1G18	2002	2018-05-22	2019-05-21
SEMT-1069	Loop Antenna	Schwarz beck	FMZB 1516	9773	2017-06-08	2020-06-07
SEMT-1068	Broadband Antenna	Schwarz beck	VULB9163	9163-333	2017-06-08	2020-06-07
SEMT-1042	Horn Antenna	ETS	3117	00086197	2017-06-08	2020-06-07
SEMT-1121	Horn Antenna	Schwarzbeck	BBHA 9170	BBHA9170582	2017-06-08	2020-06-07
SEMT-1168	Pre-amplifier	Direction Systems Inc.	PAP-0126	14141-12838	2018-05-22	2019-05-21
SEMT-1169	Pre-amplifier	Direction Systems Inc.	PAP-2640	14145-14153	2018-05-22	2019-05-21
SEMT-1163	Spectrum Analyzer	Rohde & Schwarz	FSP40	100612	2018-05-22	2019-05-21
SEMT-1170	DRG Horn Antenna	A.H. SYSTEMS	SAS-574	571	2018-03-19	2021-03-18
SEMT-1166	Power Limiter	Agilent	N9356B	MY45450376	2018-05-22	2019-05-21
SEMT-1048	RF Limiter	ATTEN	AT-BSF-2400~2500	/	2018-05-22	2019-05-21
SEMT-1076	RF Switcher	Top Precision	RCS03-A2	/	2018-05-22	2019-05-21
SEMT-C001	Cable	Zheng DI	LL142-07-07-10M(A)	/	2018-03-19	2019-03-18
SEMT-C002	Cable	Zheng DI	ZT40-2.92J-2.92J-6M	/	2018-03-19	2019-03-18
SEMT-C003	Cable	Zheng DI	ZT40-2.92J-2.92J-2.5M	/	2018-03-19	2019-03-18
SEMT-C004	Cable	Zheng DI	2M0RFC	/	2018-03-19	2019-03-18
SEMT-C005	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18
SEMT-C006	Cable	Zheng DI	1M0RFC	/	2018-03-19	2019-03-18



## 2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test Item	Result
§ 1.1307, § 2.1093	RF Exposure	Compliant
§ 22.913 (a), § 24.232 (c), §27.50(d)	RF Output Power	Compliant
§ 24.51, § 27.50	Peak-to-average Ratio (PAR) of Transmitter	Compliant
§ 22.917 (b), § 24.238 (b), § 27.53	Emission Bandwidth	Compliant
§ 22.917 (a), § 24.238 (a), § 27.53(h)	Spurious Emissions at Antenna Terminal	Compliant
§ 22.917 (a), § 24.238 (a), § 27.53(h)	Spurious Radiation Emissions	Compliant
§ 22.917 (a), § 24.238 (a), § 27.53(h)	Out of Band Emissions	Compliant
§ 22.355, § 24.235, § 27.54	Frequency Stability	Compliant

### **3. RF Exposure**

---

#### **3.1 Standard Applicable**

According to § 1.1307 and § 2.1093, the portable transmitter must comply the RF exposure requirements.

#### **3.2 Test Result**

This product complied with the requirement of the RF exposure, please see the SAR report.

## 4. RF Output Power

---

### 4.1 Standard Applicable


According to §22.913(a)(2), The ERP of mobile and portable stations transmitters and auxiliary test transmitters must not exceed 7 Watts.

According to §24.232 (c), Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to §27.50(d)(4), Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

### 4.2 Test Procedure

- Conducted output power test method:

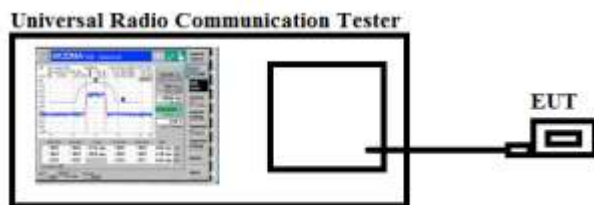

- Radiated power test method:

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

### 4.3 Summary of Test Results/Plots

## &gt; Max. Radiated Power

Mode	Channel	Antenna Polar	ERP (dBm)	Limit (dBm)	Result
GSM850	128	V	30.24	<38.45	Pass
		H	30.49		
	190	V	30.68		
		H	30.32		
	251	V	28.59		
		H	28.04		
GPRS850	128	V	29.93	<38.45	Pass
		H	30.78		
	190	V	30.72		
		H	30.53		
	251	V	28.38		
		H	28.21		
EGPRS850	128	V	27.01	<38.45	Pass
		H	26.95		
	190	V	26.40		
		H	26.43		
	251	V	25.92		
		H	26.20		

Mode	Channel	Antenna Polar	EIRP (dBm)	Limit (dBm)	Result
PCS1900	512	V	28.50	<33.00	Pass
		H	27.99		
	661	V	28.56		
		H	28.12		
	810	V	28.38		
		H	28.50		
GPRS1900	512	V	27.49	<33.00	Pass
		H	27.74		
	661	V	27.93		
		H	27.49		
	810	V	27.12		
		H	27.50		
EGPRS1900	512	V	24.26	<33.00	Pass
		H	24.16		
	661	V	23.89		
		H	24.54		
	810	V	23.85		
		H	24.14		

Mode	Channel	Antenna Polar	ERP	Limit (dBm)	Result
WCDMA Band V	4132	V	21.12	<38.45	Pass
		H	20.89		
	4183	V	21.03		
		H	21.07		
	4233	V	20.96		
		H	21.25		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band IV	1312	V	20.46	<30.00	Pass
		H	20.68		
	1412	V	19.97		
		H	20.50		
	1513	V	20.42		
		H	20.26		

Mode	Channel	Antenna Polar	EIRP	Limit (dBm)	Result
WCDMA Band II	9262	V	20.27	<33.00	Pass
		H	20.67		
	9400	V	20.15		
		H	20.66		
	9538	V	20.16		
		H	20.47		

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

➤ **Max. Conducted Power (Average power)**

Conducted Average power (dBm)						
Band	GSM850			PCS1900		
Channel	128	190	251	512	661	810
Frequency(MHz)	824.20	836.60	848.80	1850.20	1880.00	1909.80
GSM	32.88	32.93	32.82	29.70	29.15	28.99
GPRS(1Slot)	32.87	32.94	32.85	29.69	29.15	29.00
EGPRS(1Slot)	28.79	29.01	29.10	26.34	26.50	26.86

Conducted Average power (dBm)						
Band	WCDMA Band V			WCDMA Band II		
Channel	4132	4183	4233	9262	9400	9538
Frequency(MHz)	826.4	836.6	846.6	1852.4	1880.0	1907.6
RMC 12.2k	22.33	22.28	22.53	22.91	22.42	23.00
HSDPA Subtest-1	21.48	21.45	21.75	21.82	21.49	22.15
HSDPA Subtest-2	21.30	21.29	21.52	21.72	21.26	21.97
HSDPA Subtest-3	21.24	21.23	21.51	21.63	21.34	21.93
HSDPA Subtest-4	21.31	21.21	21.56	21.60	21.26	22.00
HSUPA Subtest-1	21.44	21.25	21.63	21.89	21.48	22.21
HSUPA Subtest-2	21.32	21.14	21.46	21.73	21.28	22.10
HSUPA Subtest-3	21.28	21.14	21.43	21.76	21.25	22.00
HSUPA Subtest-4	21.24	21.01	21.44	21.64	21.34	21.96
HSUPA Subtest-5	21.31	21.09	21.52	21.74	21.26	22.00

Conducted Average power (dBm)						
Band	WCDMA Band IV					
Channel	1312	1412	1513			
Frequency(MHz)	1712.4	1733.4	1752.6			
RMC 12.2k	22.34	22.46	22.33			
HSDPA Subtest-1	21.55	21.63	21.43			
HSDPA Subtest-2	21.41	21.47	21.29			
HSDPA Subtest-3	21.45	21.49	21.30			
HSDPA Subtest-4	21.42	21.49	21.23			
HSUPA Subtest-1	21.57	21.85	21.31			
HSUPA Subtest-2	21.40	21.66	21.13			
HSUPA Subtest-3	21.45	21.64	21.21			
HSUPA Subtest-4	21.42	21.63	21.14			
HSUPA Subtest-5	21.44	21.61	21.14			



## 5. Peak-to-average Ratio (PAR) of Transmitter

### 5.1 Standard Applicable

According to §24.232(d), Power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with paragraph (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of §24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.


According to §27.50(B), the peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

### 5.2 Test Procedure

According with KDB 971168

1. The signal analyzer's CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal "RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the "on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

Test Configuration for the emission bandwidth testing:

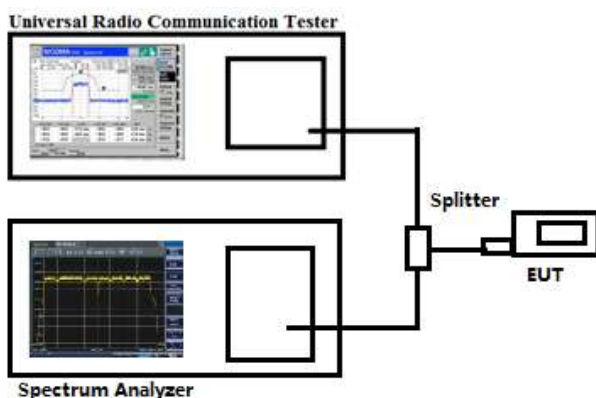

### 5.3 Summary of Test Results

PCS1900				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
GSM	661	1850.2	3.39	13
GPRS(1 Slot)	661	1850.2	4.90	13
EDGE(1 Slot)	661	1850.2	6.12	13

WCDMA Band IV				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	1312	1712.4	5.45	13
	1412	1732.4	6.45	13
	1513	1752.6	3.78	13

WCDMA Band II				
Test Mode	Channel	Frequency (MHz)	PAR (dB)	Limit (dB)
WCDMA	9262	1852.4	6.31	13
	9400	1880.0	4.24	13
	9538	1907.6	3.61	13

Note: Only the worst case was selected to record.

## 6. Emission Bandwidth

### 6.1 Standard Applicable

According to §22.917(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


According to §24.238(b), The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

According to §27.53, The emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.

### 6.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 10kHz for GSM mode and 100kHz for WCDMA mode, VBW shall be at least 3 times the RBW, and the 26dB bandwidth was recorded.

Test Configuration for the emission bandwidth testing:

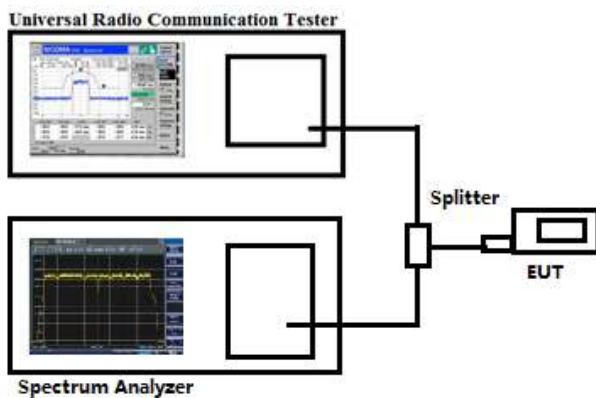


### 6.3 Summary of Test Results/Plots

EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (kHz)	-26dB bandwidth (kHz)
GSM 850 (GMSK)	128	824.20	242.7907	319.040
	190	836.60	247.8210	314.058
	251	848.80	246.9372	320.299
GPRS850 (GMSK,1Slot)	128	824.20	245.4545	319.770
	190	836.60	238.0910	315.599
	251	848.80	245.8951	316.413
EGPRS850 (8PSK,1Slot)	128	824.20	249.1536	315.772
	190	836.60	248.4562	318.977
	251	848.80	243.1548	318.632
PCS1900 (GMSK)	512	1850.20	246.6138	315.105
	661	1880.00	243.5325	313.719
	810	1909.80	247.3157	311.866
GPRS1900 (GMSK,1Slot)	512	1850.20	250.8117	322.887
	661	1880.00	246.0566	311.221
	810	1909.80	245.5476	313.832
EGPRS1900 (8PSK,1Slot)	512	1850.20	243.6843	318.190
	661	1880.00	255.2457	322.687
	810	1909.80	256.1805	318.892


EUT Mode	Channel	Frequency (MHz)	99% Occupy bandwidth (MHz)	-26dB bandwidth (MHz)
WCDMA Band V	4132	826.40	4.2083	4.839
	4183	836.60	4.2101	4.861
	4233	846.60	4.2389	4.924
HSDPA	4132	826.40	4.2094	4.849
	4183	836.60	4.1934	4.855
	4233	846.60	4.2233	4.812
HSUPA	4132	826.40	4.2214	4.847
	4183	836.60	4.2080	4.880
	4233	846.60	4.2351	4.860
WCDMA Band IV	1312	1712.4	4.1529	4.672
	1412	1733.4	4.1452	4.670
	1513	1752.6	4.1574	4.670
HSDPA	1312	1712.4	4.1375	4.677
	1412	1733.4	4.1562	4.683
	1513	1752.6	4.1503	4.682
HSUPA	1312	1712.4	4.1614	4.671
	1412	1733.4	4.1551	4.700
	1513	1752.6	4.1524	4.695
WCDMA Band II	9262	1852.40	4.2229	4.877
	9400	1880.00	4.2129	4.849
	9538	1907.60	4.2701	4.828
HSDPA	9262	1852.40	4.2112	4.853
	9400	1880.00	4.2110	4.835
	9538	1907.60	4.2258	4.852
HSUPA	9262	1852.40	4.2157	4.883
	9400	1880.00	4.2132	4.827
	9538	1907.60	4.2098	4.865

GSM900


Low Channel

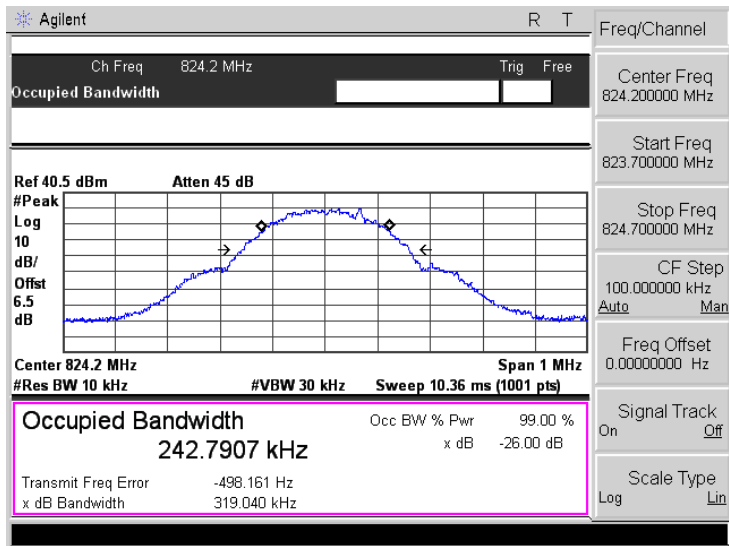

Middle Channel

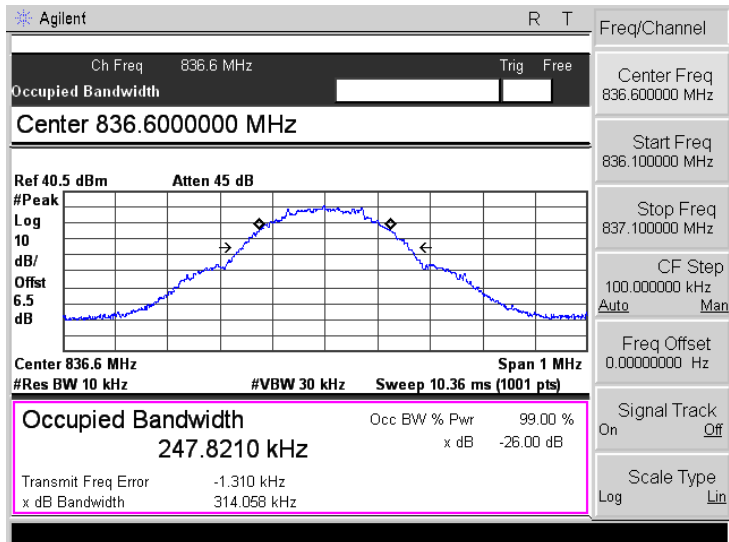


High Channel

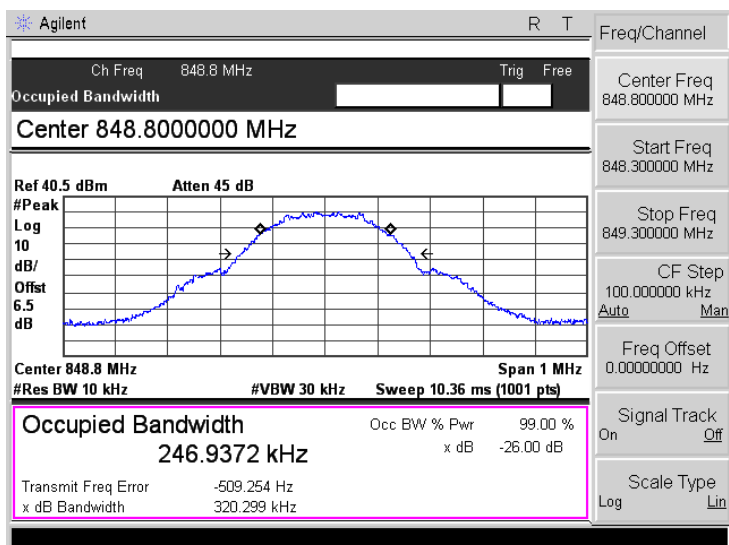


GPRS900


Low Channel

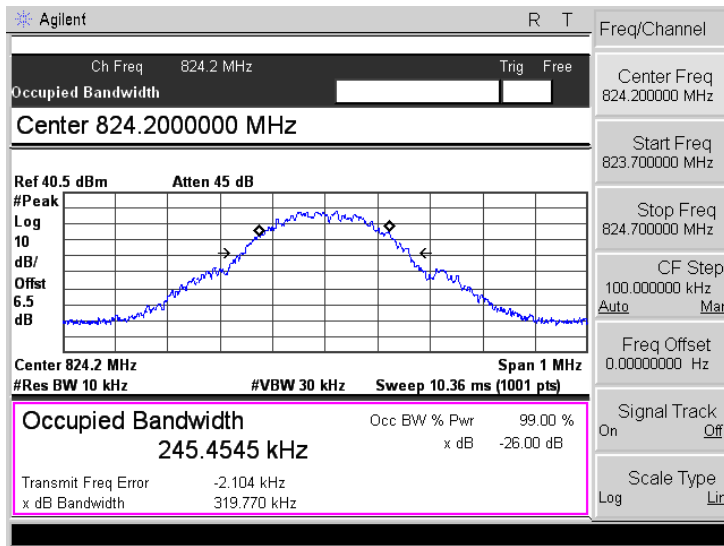

Middle Channel

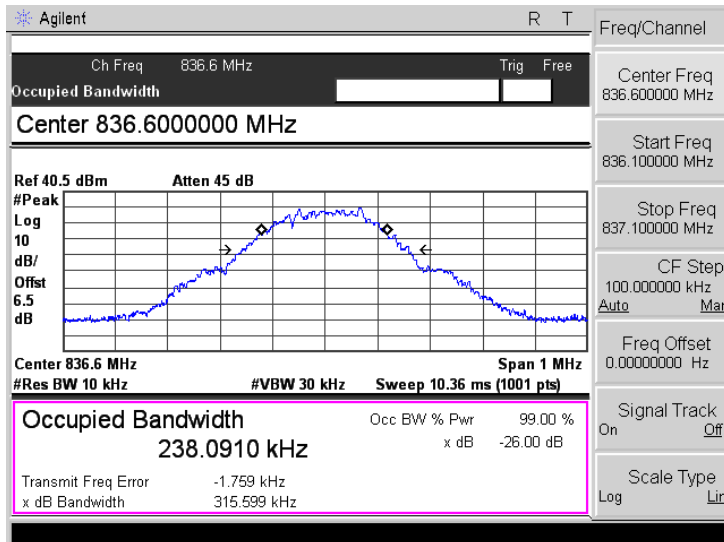


High Channel

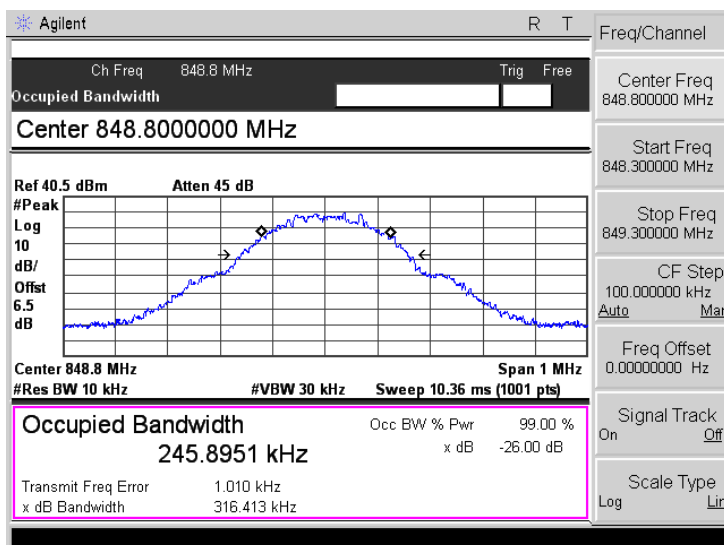


## EGPRS900


Low Channel

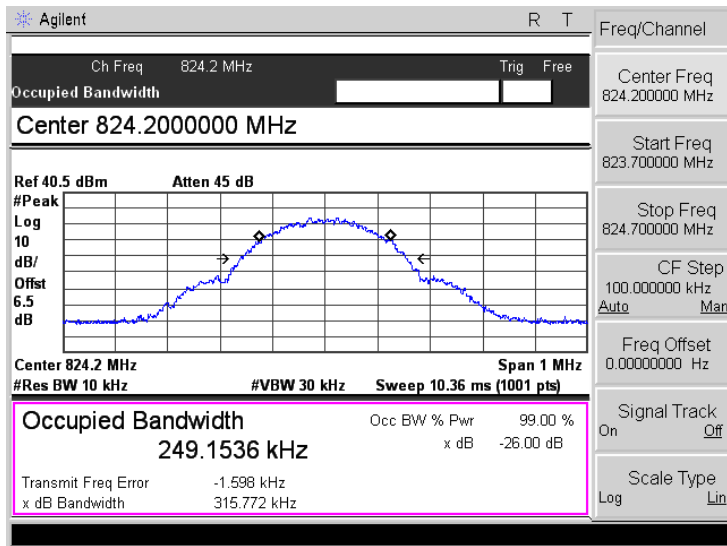

Middle Channel

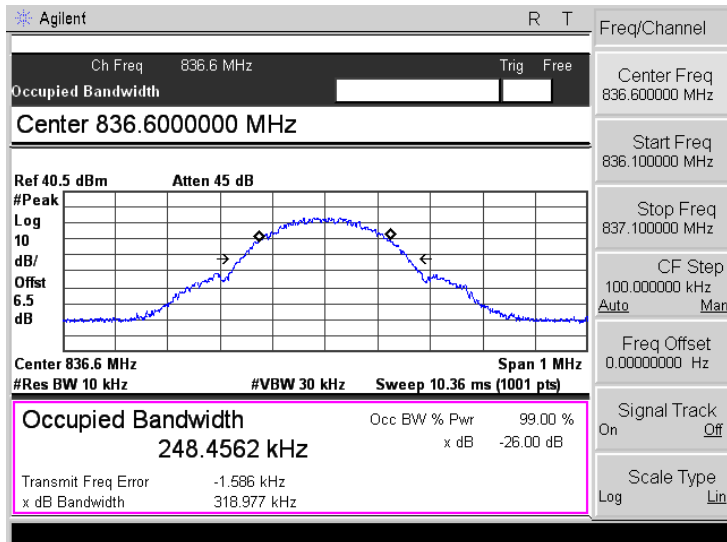


High Channel

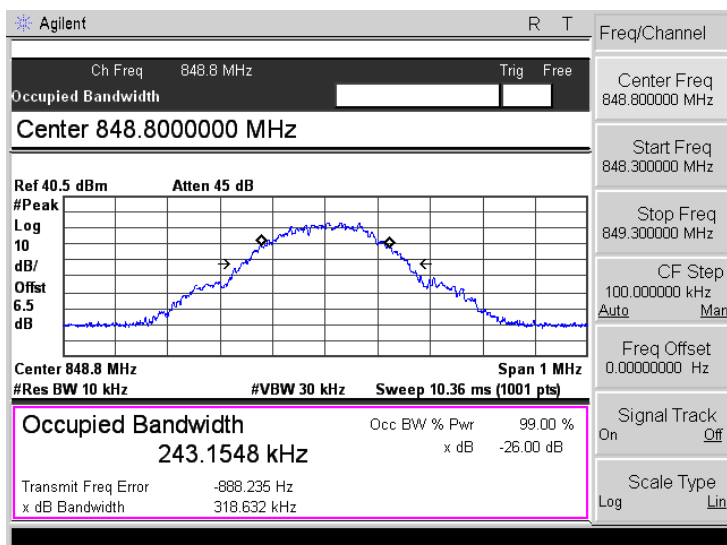




PCS1900


Low Channel

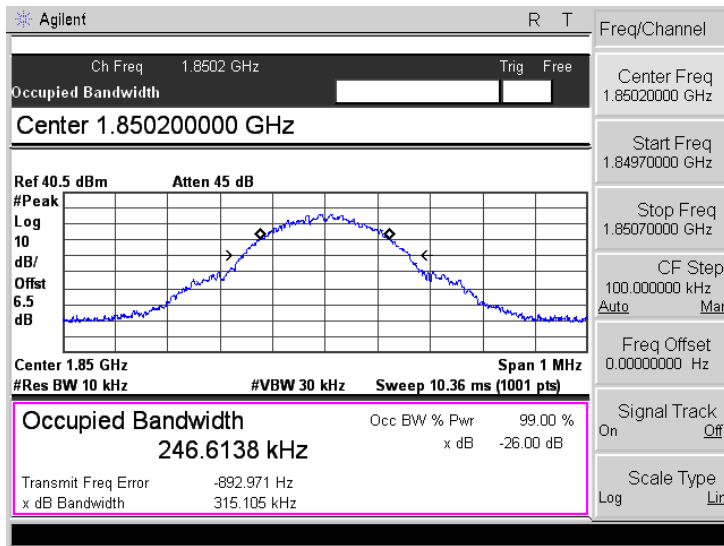

Middle Channel

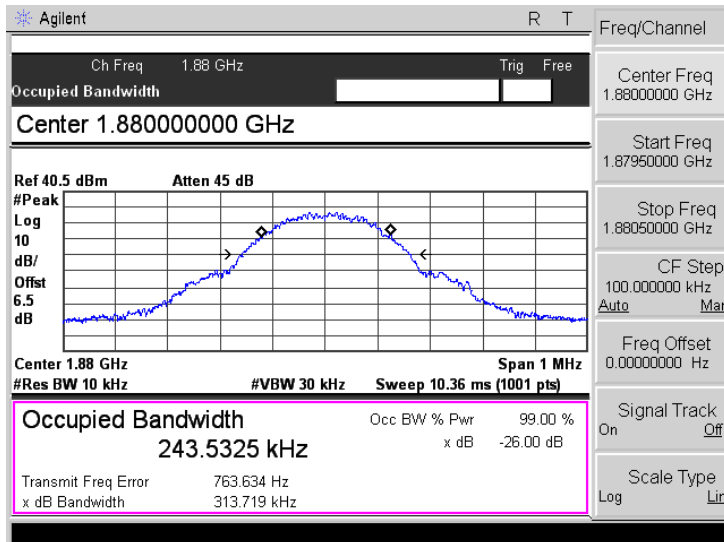


High Channel

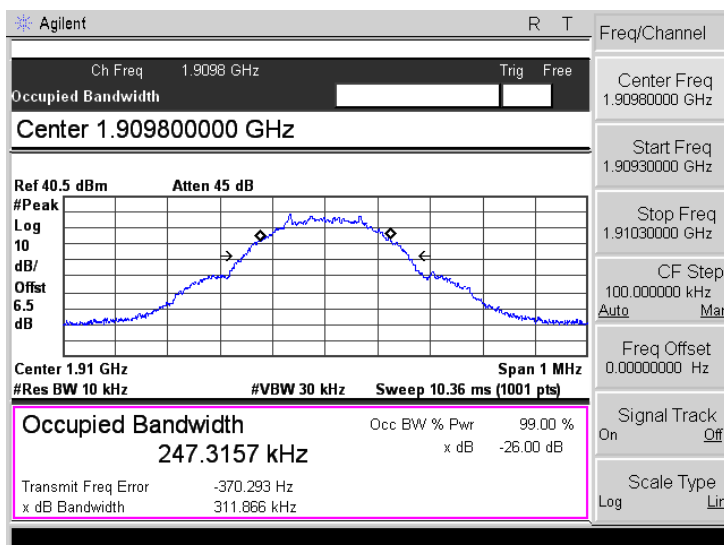


## GPRS1900


Low Channel

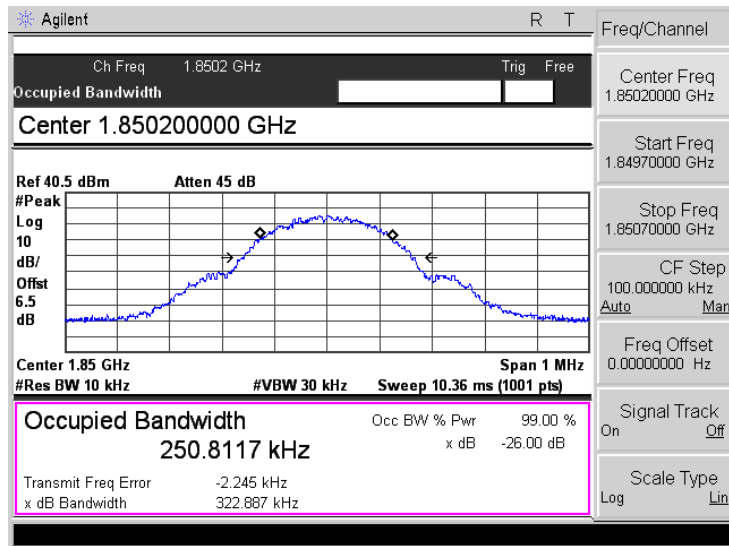

Middle Channel

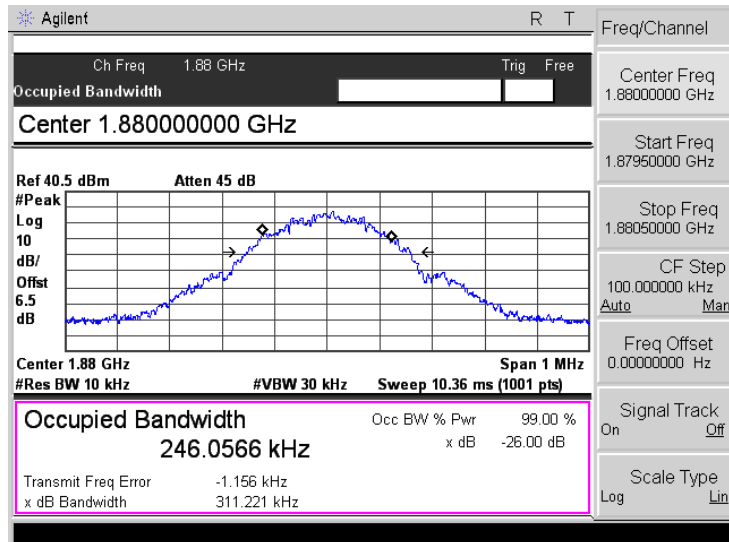


High Channel

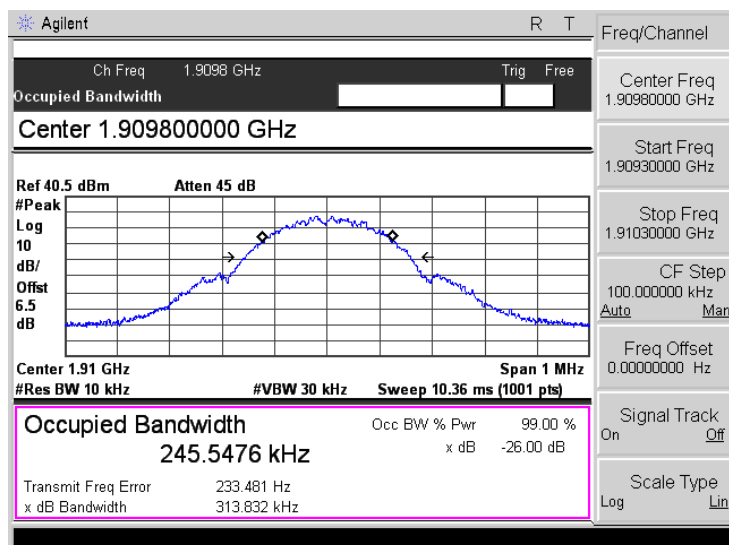


EGPRS1900


Low Channel

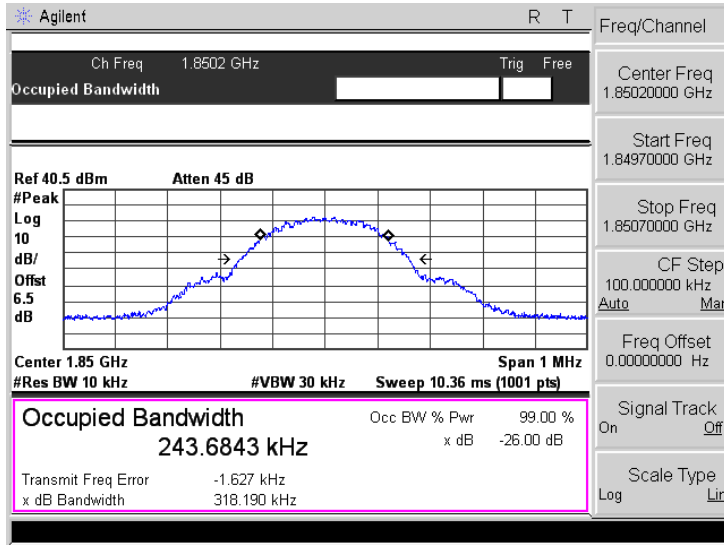

Middle Channel

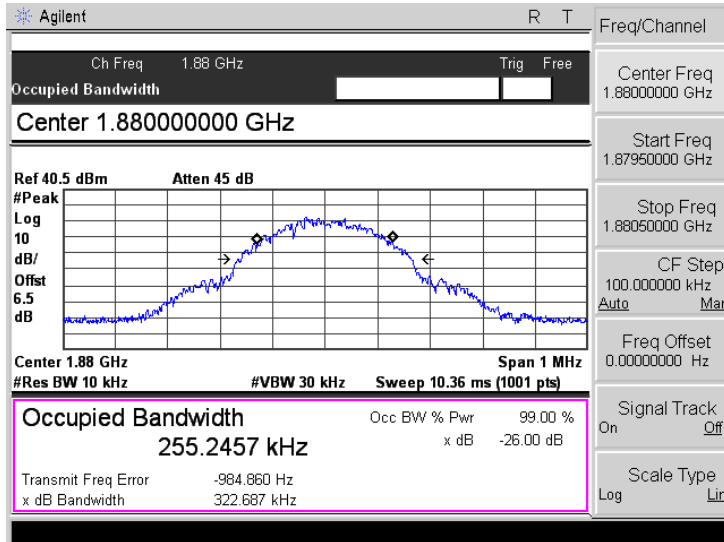


High Channel

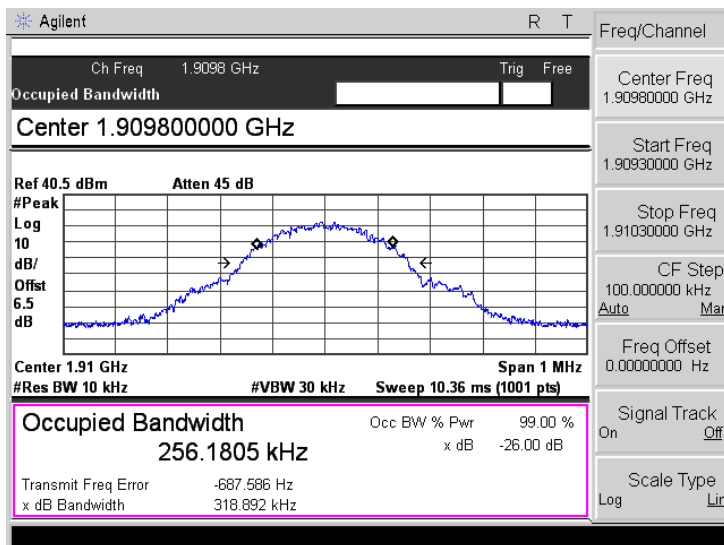


WCDMA Band V


Low Channel

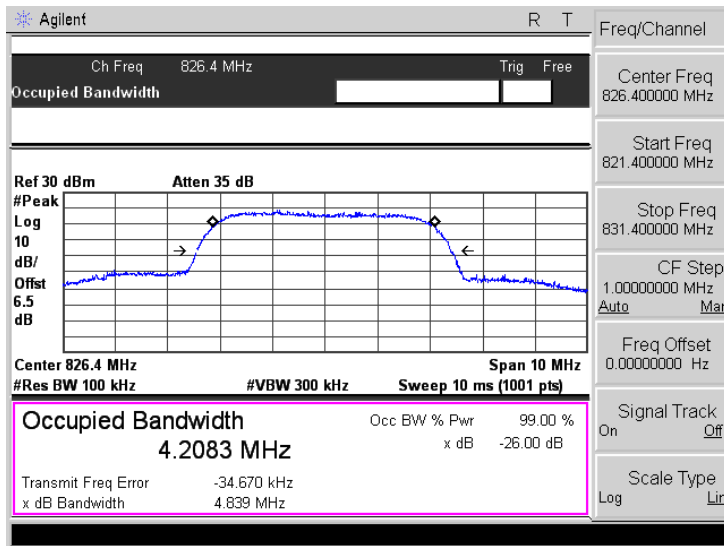

Middle Channel

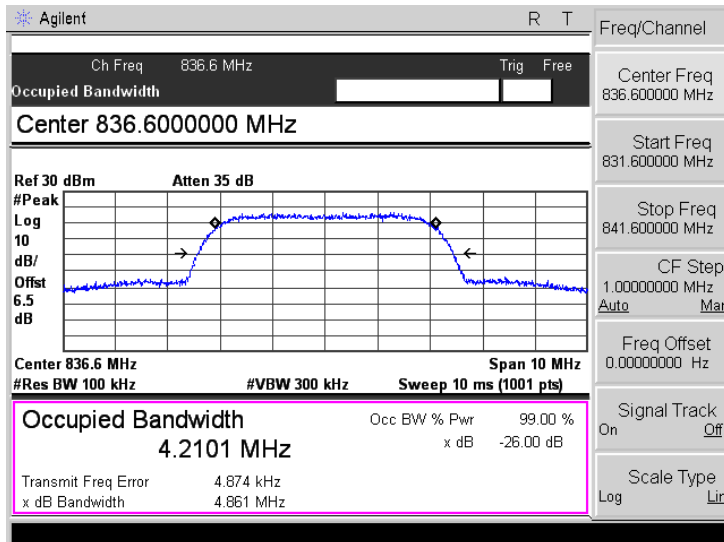


High Channel

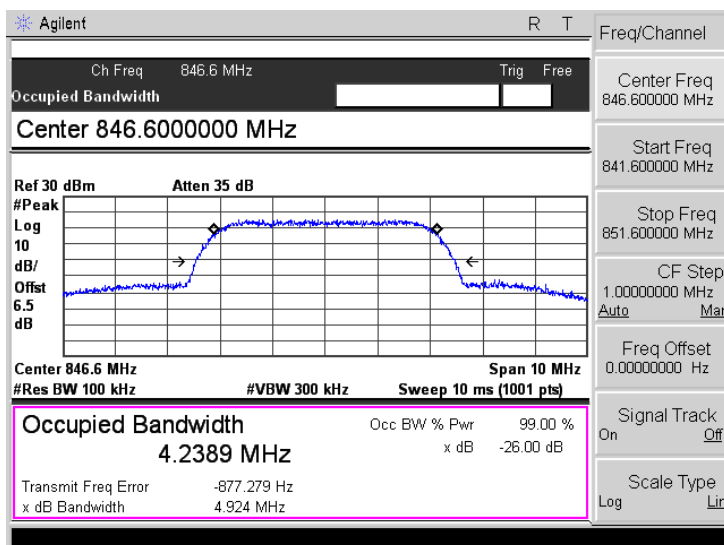


WCDMA Band V- HSDPA


Low Channel

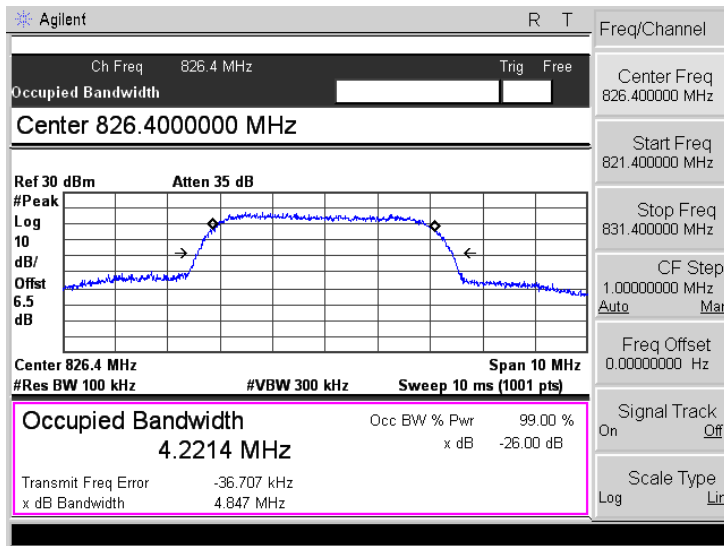

Middle Channel

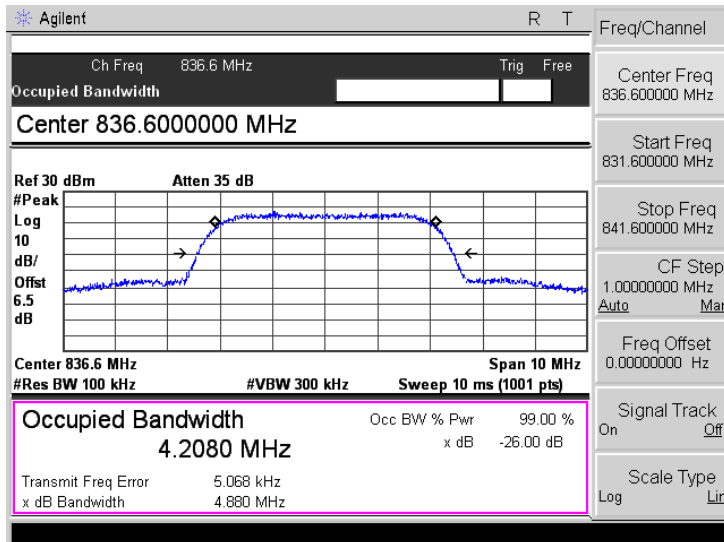


High Channel

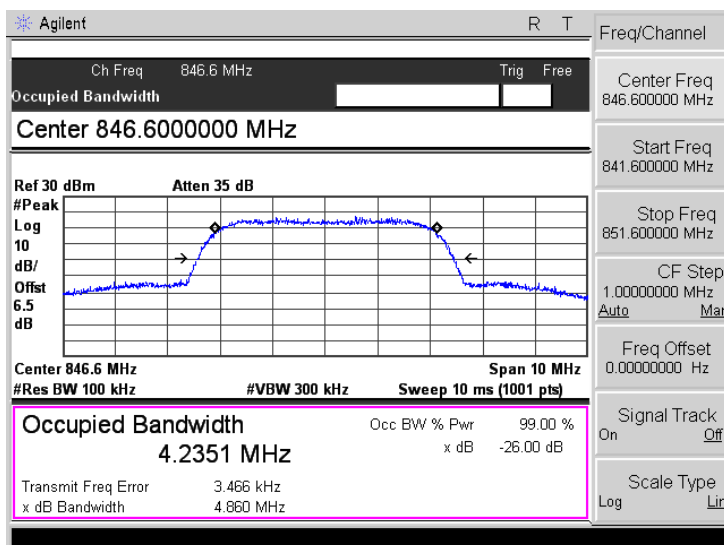


## WCDMA Band V- HSUPA


Low Channel

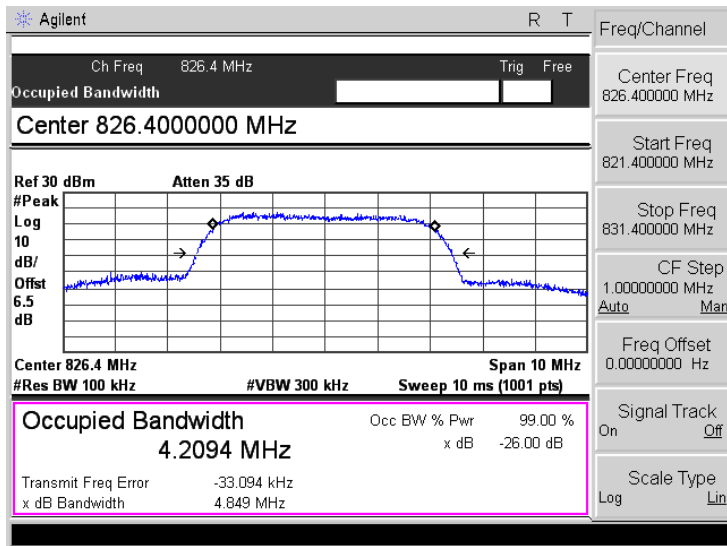

Middle Channel

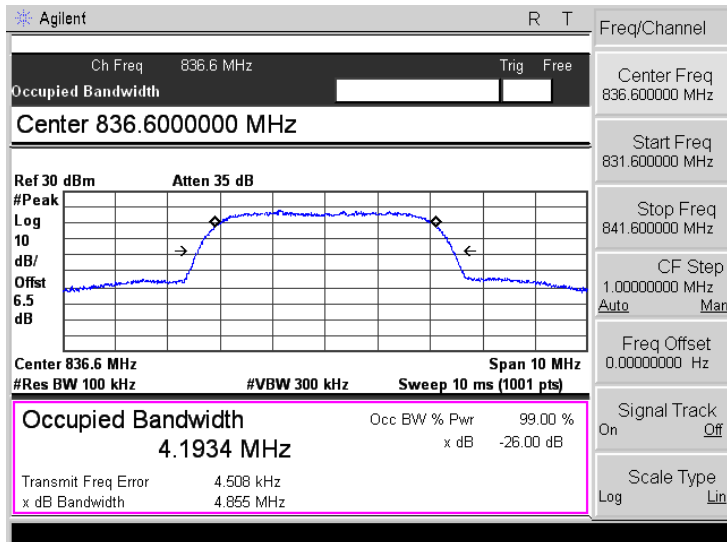


High Channel

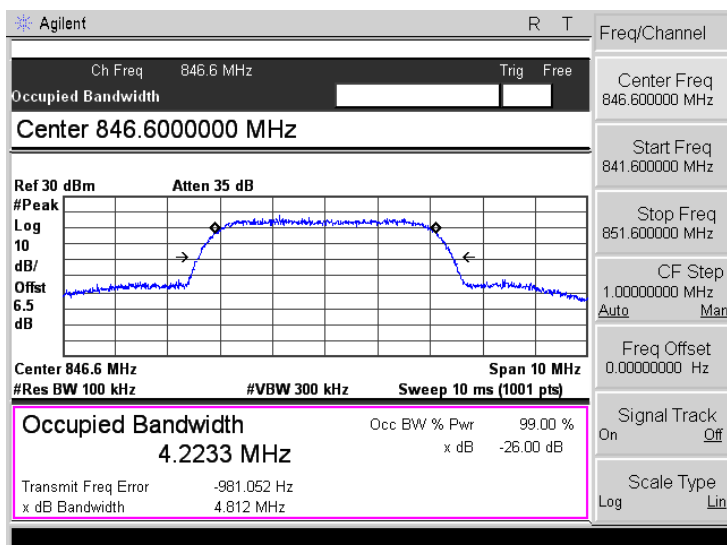


WCDMA Band IV


Low Channel

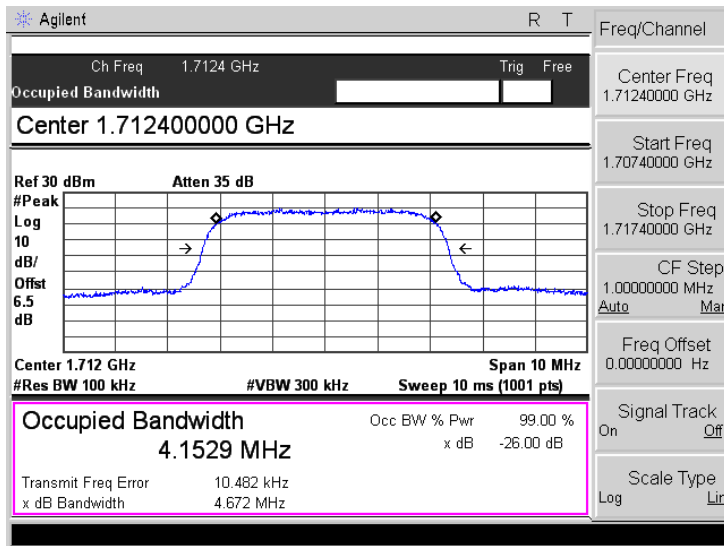

Middle Channel

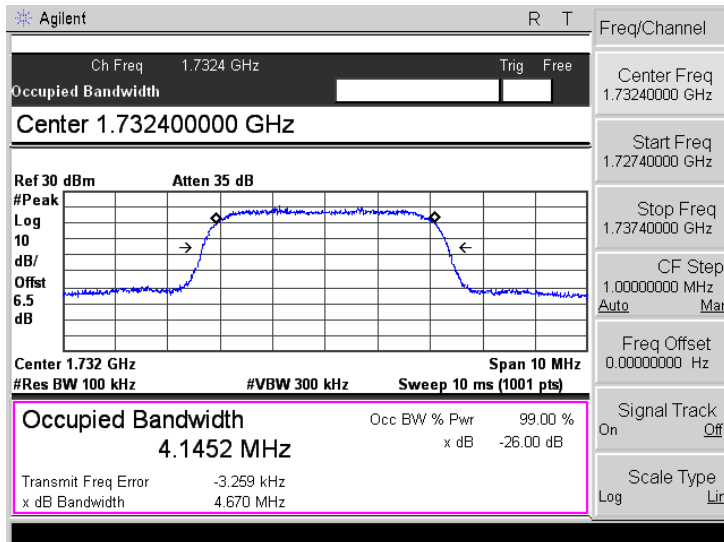


High Channel

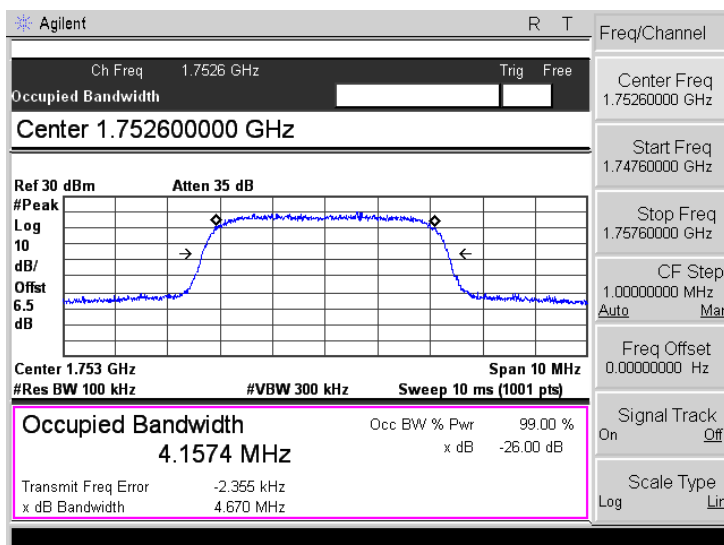


## WCDMA Band IV- HSDPA


Low Channel

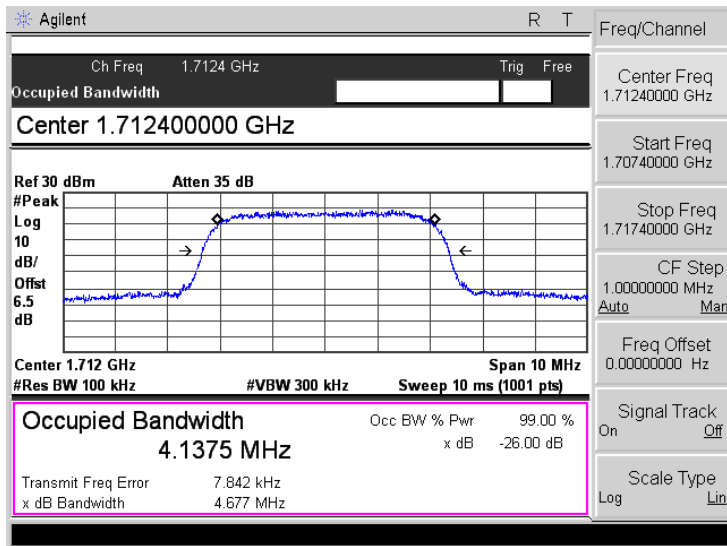

Middle Channel

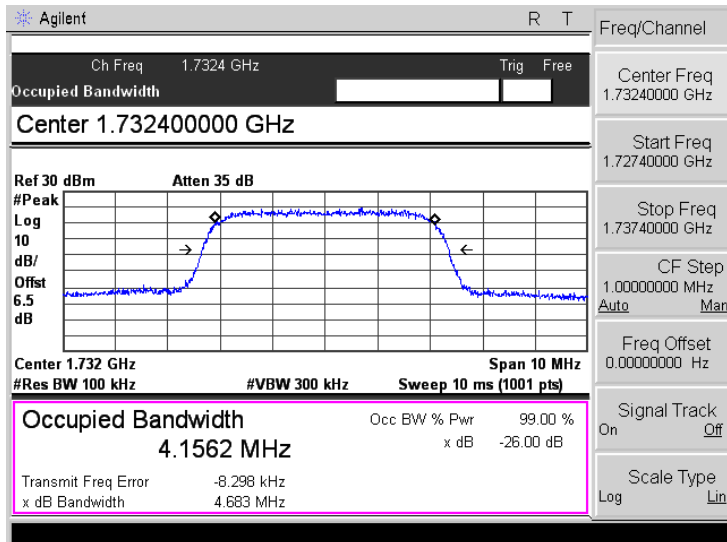


High Channel

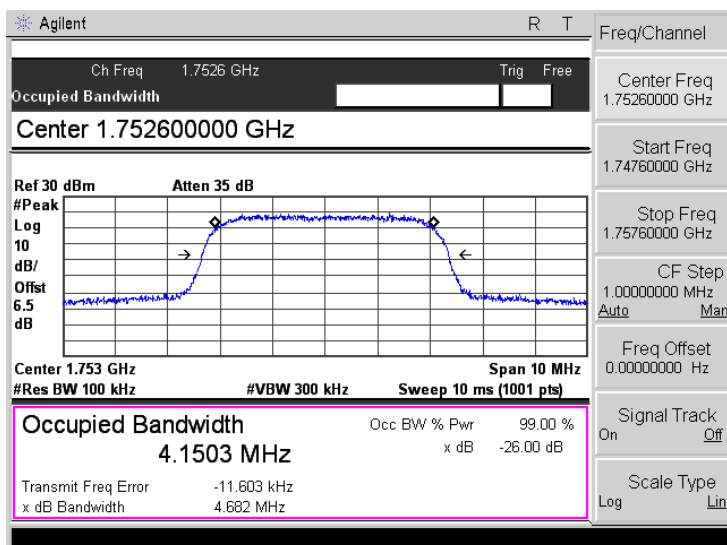




## WCDMA Band IV- HSUPA


Low Channel

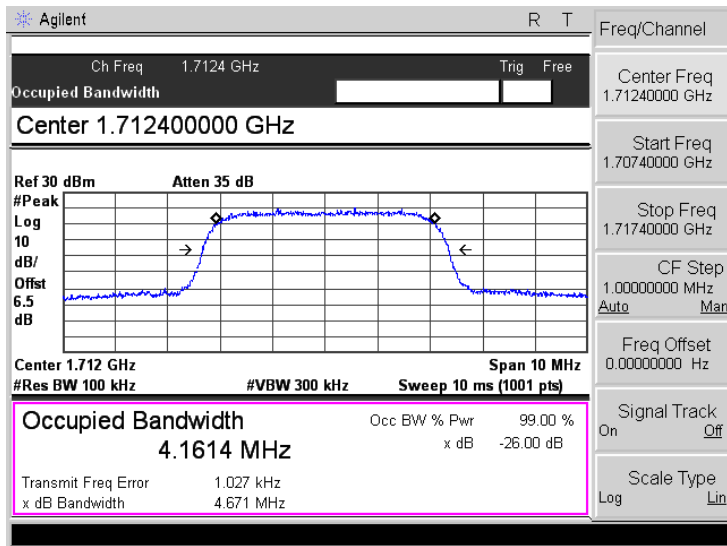

Middle Channel

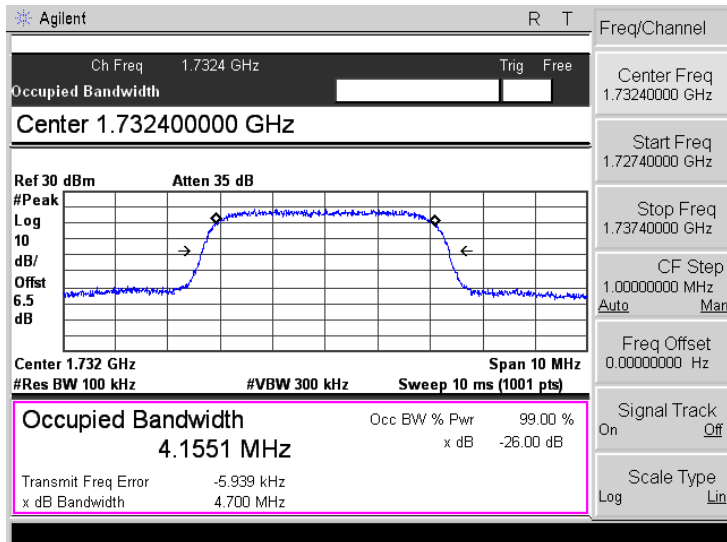


High Channel

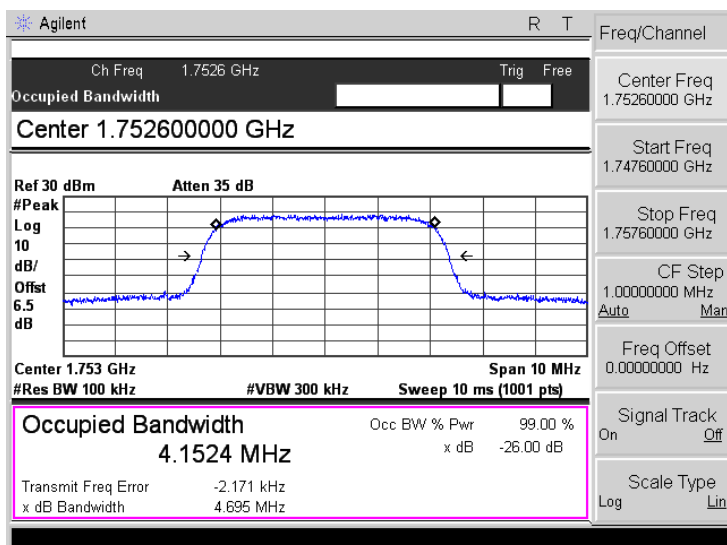


## WCDMA Band II


Low Channel

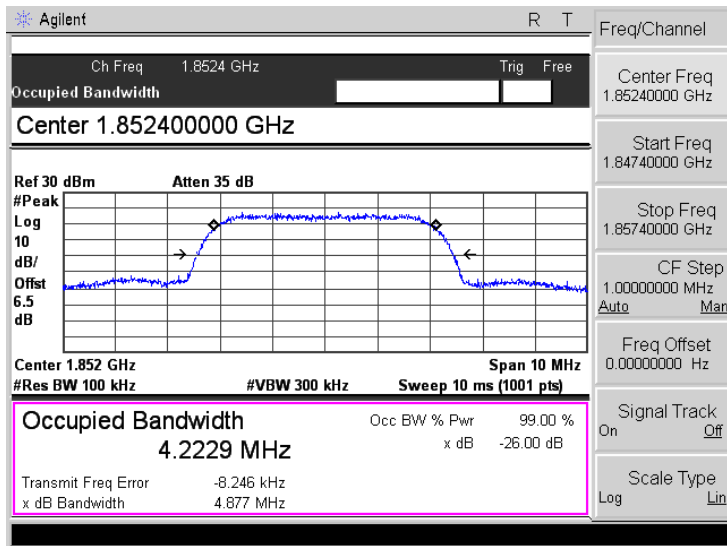

Middle Channel

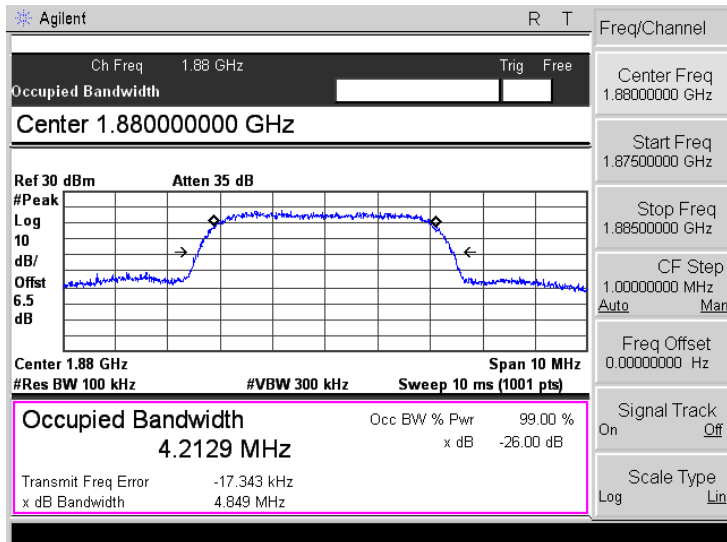


High Channel

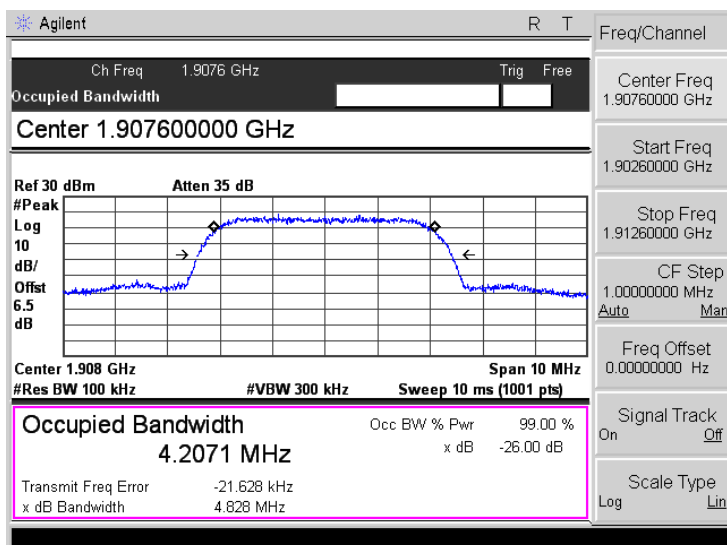


## WCDMA Band II- HSDPA


Low Channel

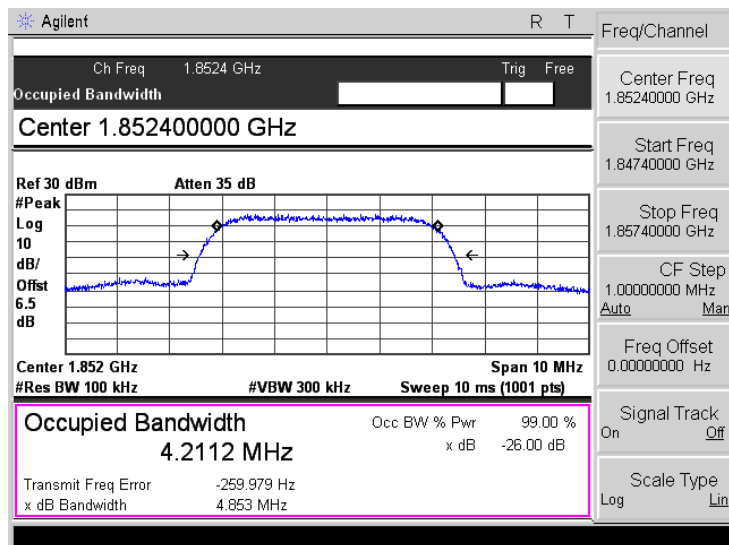

Middle Channel

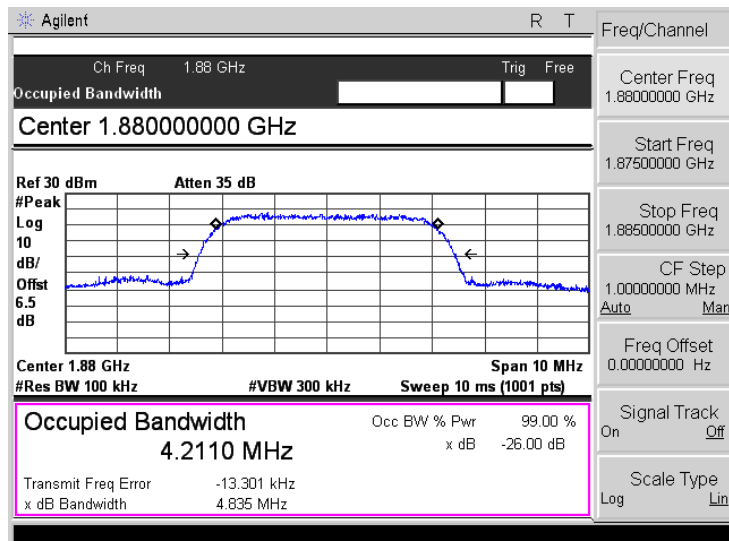


High Channel

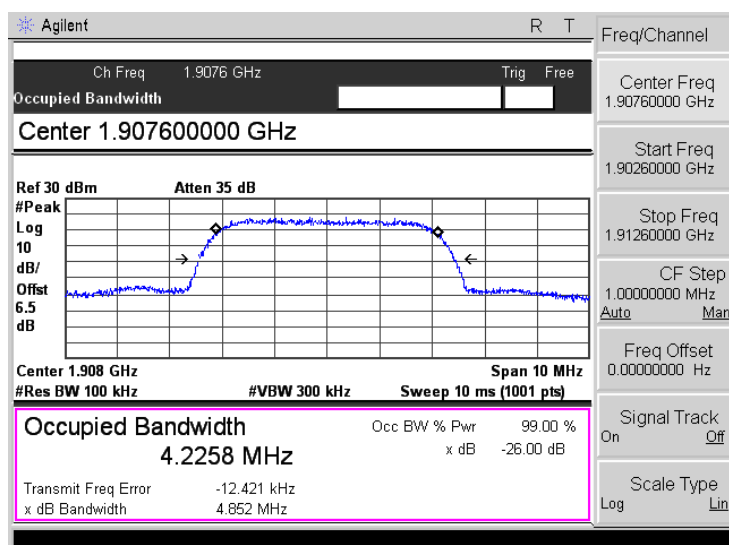


## WCDMA Band II- HSUPA


Low Channel

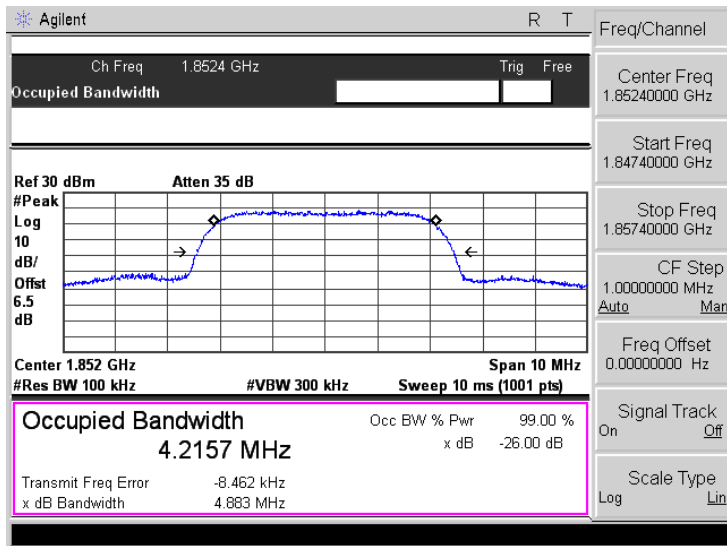

Middle Channel

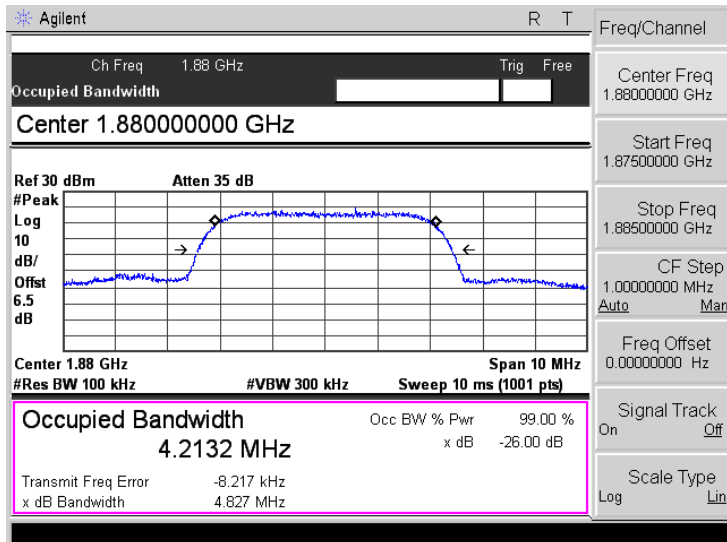

High Channel

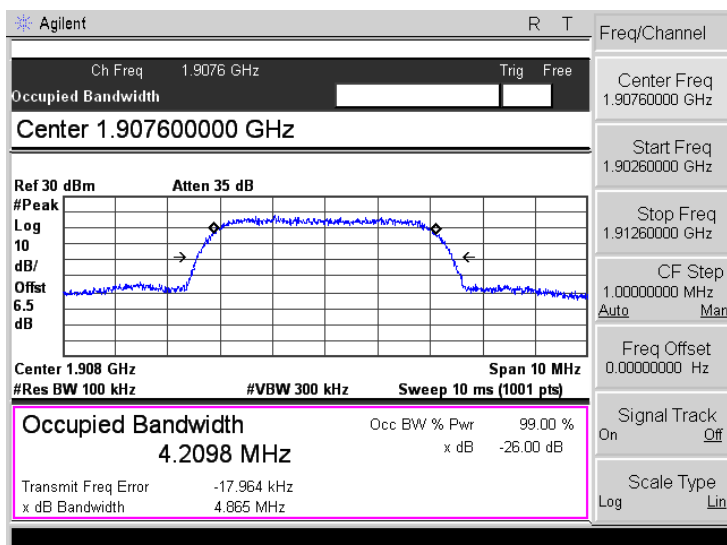

## 7. Out of Band Emissions at Antenna Terminal

### 7.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 7.2 Test Procedure

The RF output terminal of the transmitter was connected to the input of the spectrum analyzer via a suitable attenuation. The RBW of the spectrum analyzer was set to 100kHz and 1MHz for the scan frequency from 30MHz to 1GHz and the scan frequency from 1GHz to up to 10<sup>th</sup> harmonic.

Test Configuration for the out of band emissions testing:

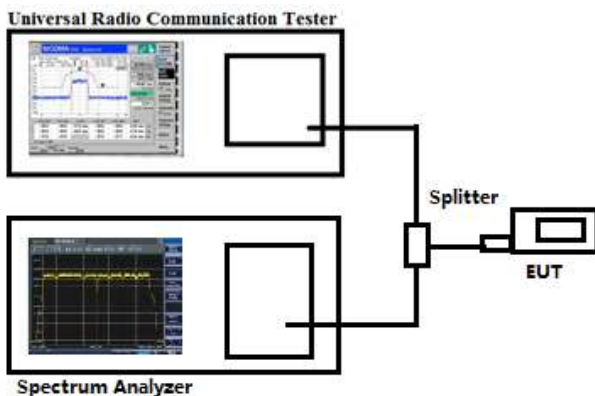



### 7.3 Summary of Test Results/Plots

Note: Pre-scan mode WCDMA/HSDPA/HSUPA find the worst case at WCDMA mode and recorded in the test report.

Please refer to the following test plots



GSM850

Low Channel

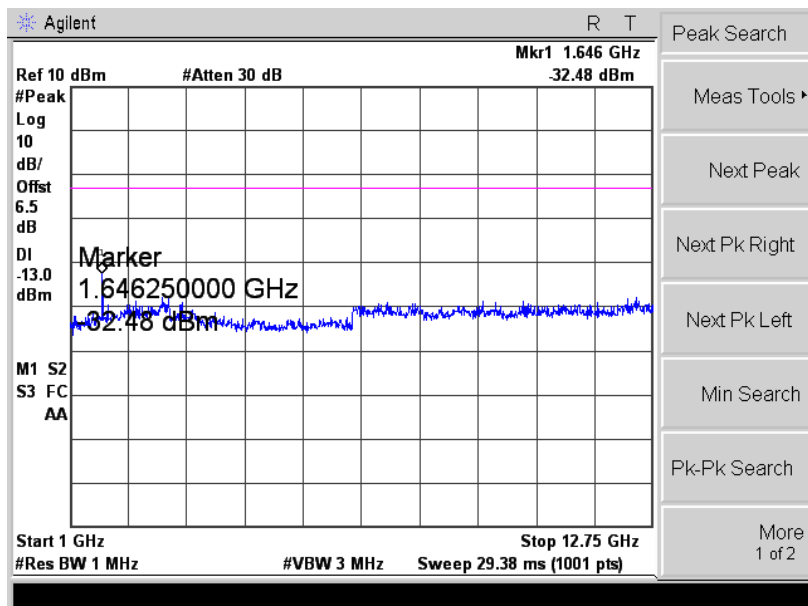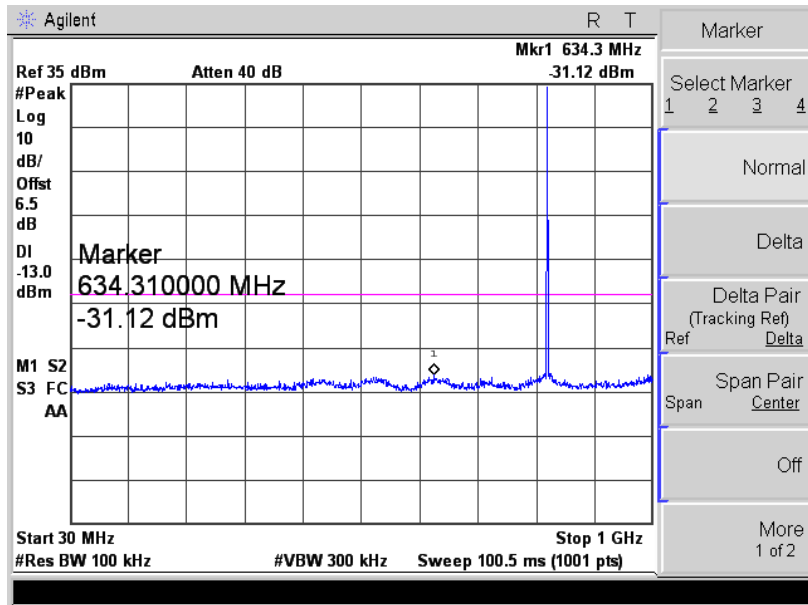



GSM850

Middle Channel

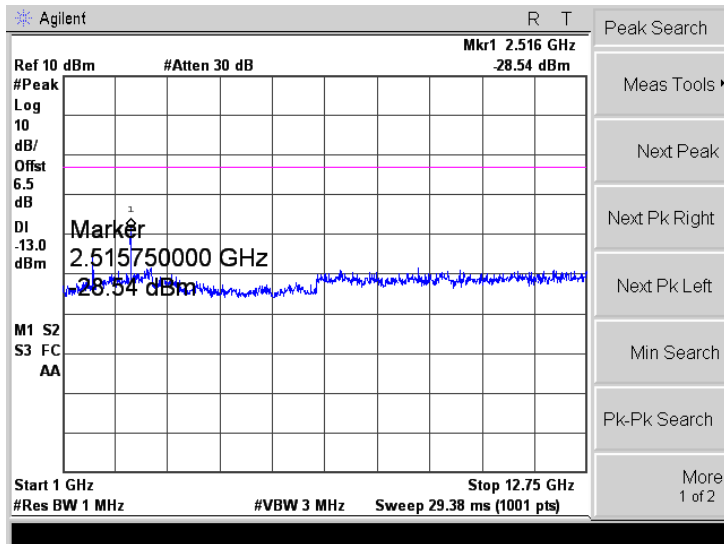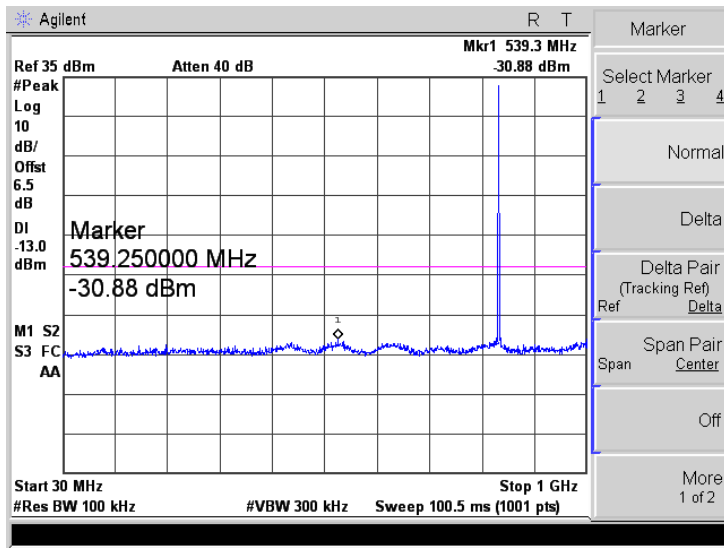

GSM850


High Channel

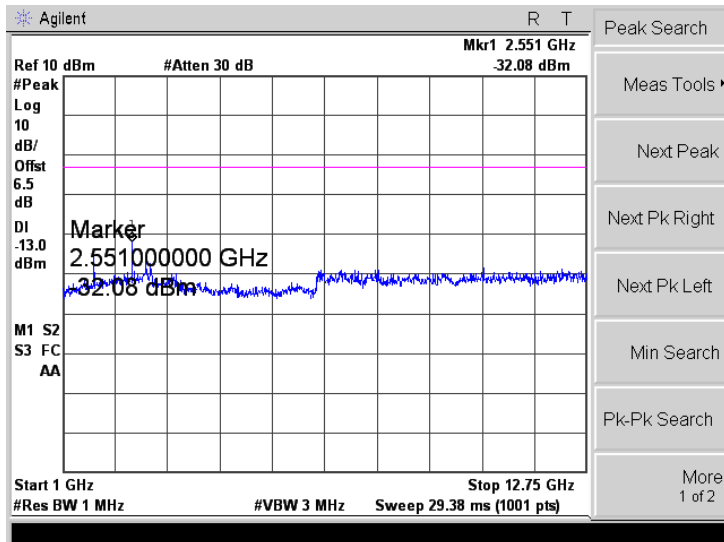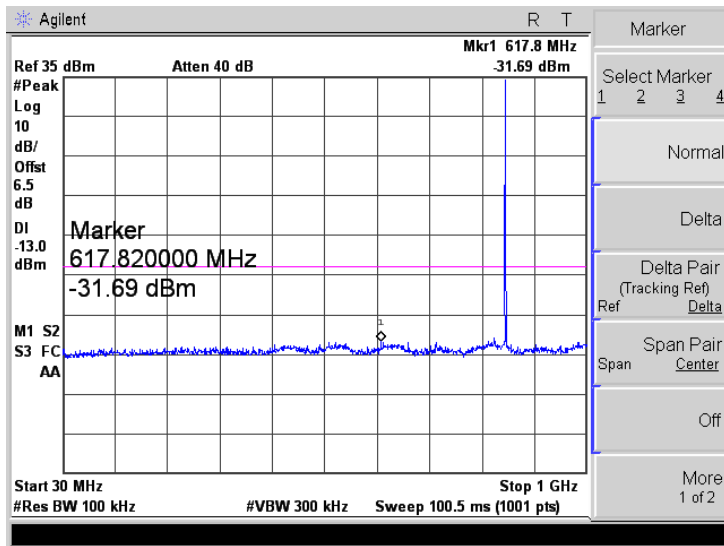




GSM850

Low Band Emission


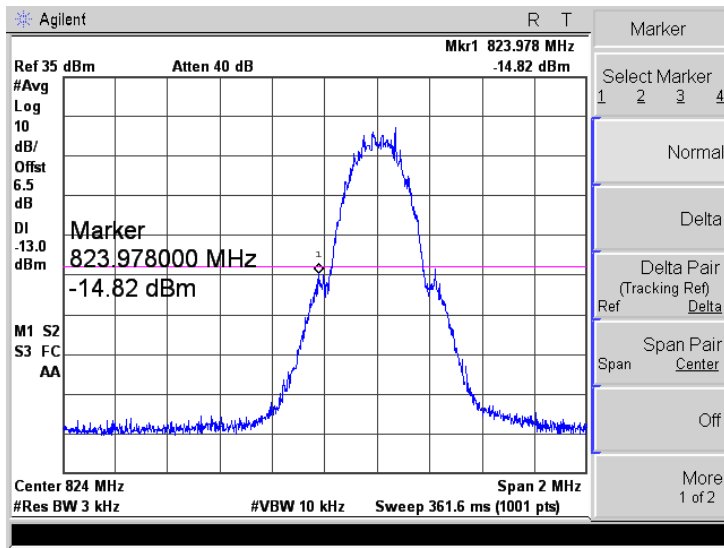


High Band Emission

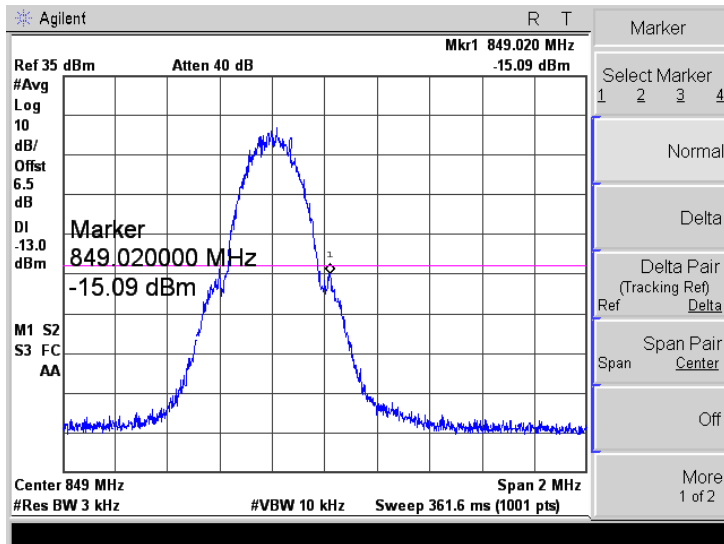



For Cellular Band

GPRS Low Channel

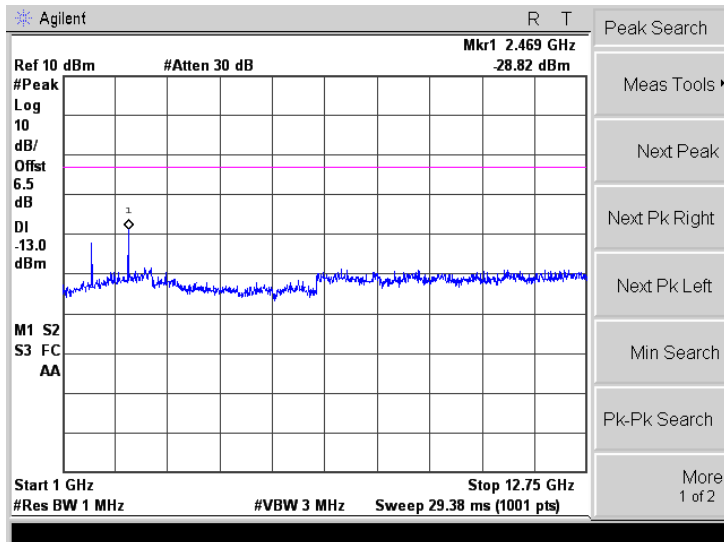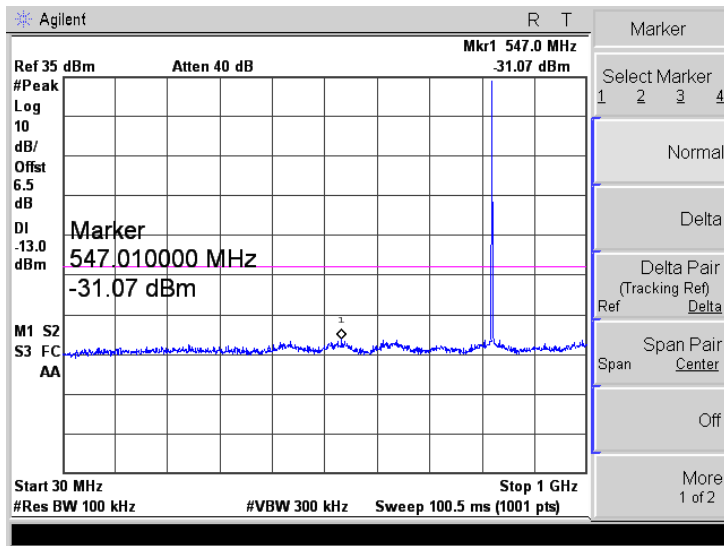



GPRS850

Middle Channel

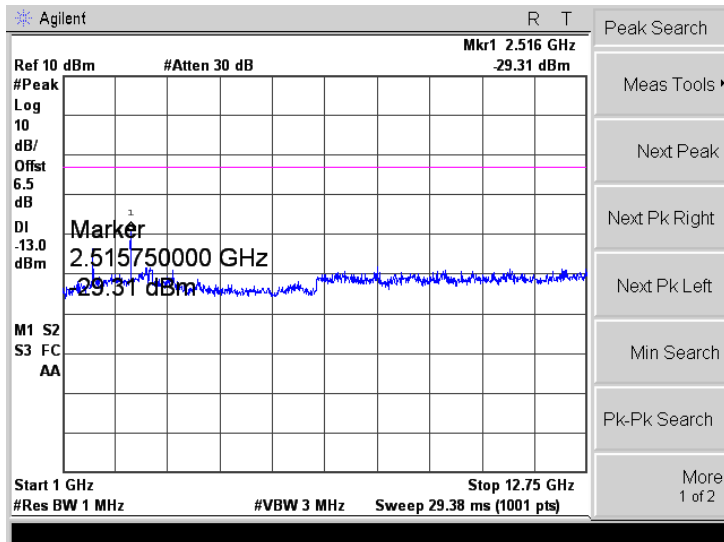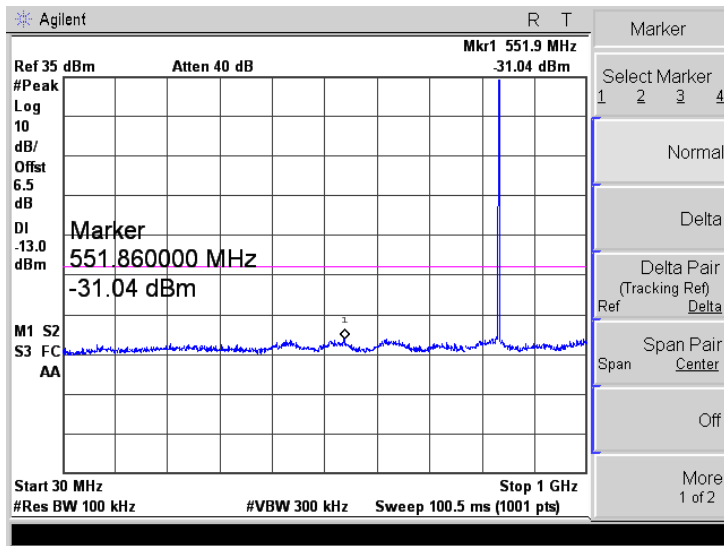


GPRS850

High Channel

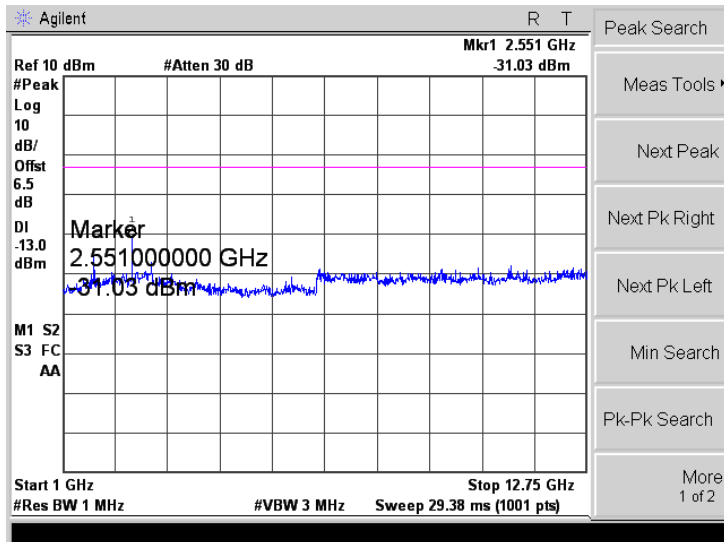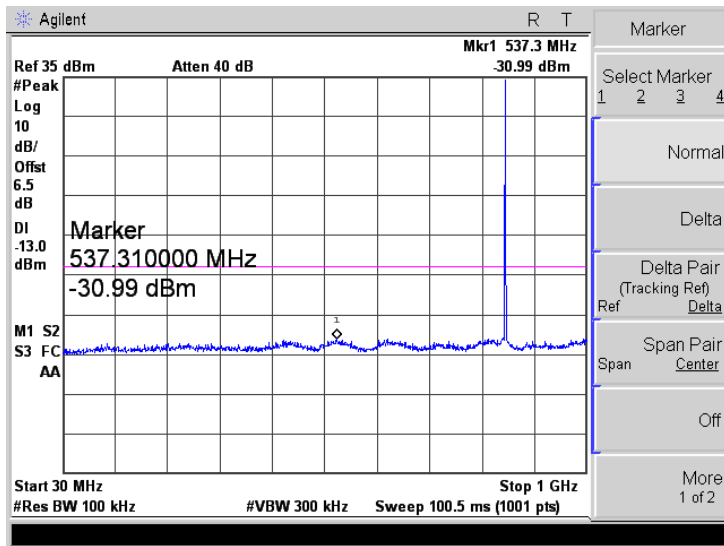


GPRS850

Low Band Emission


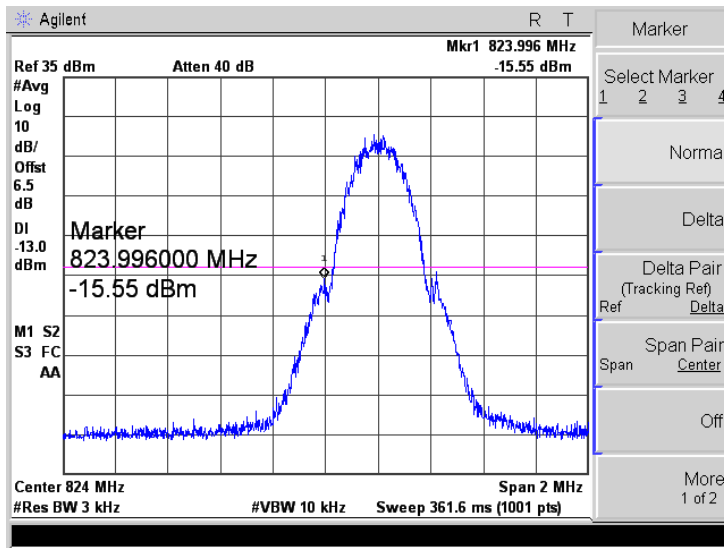


High Band Emission

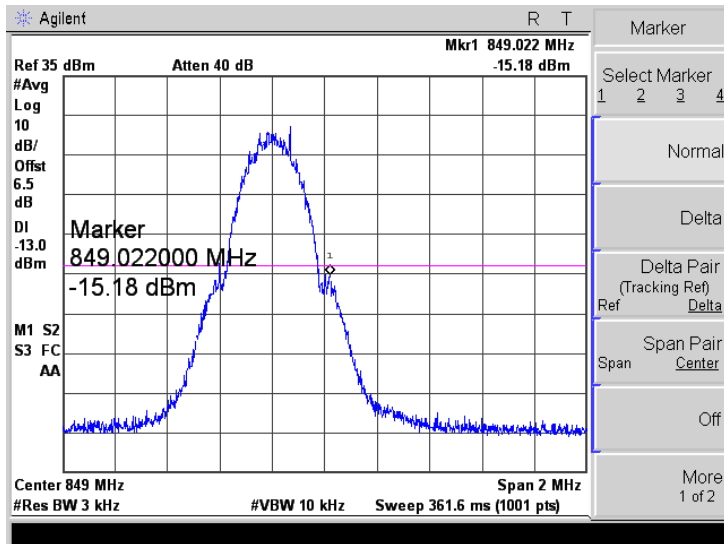



EGPRS850

Low Channel

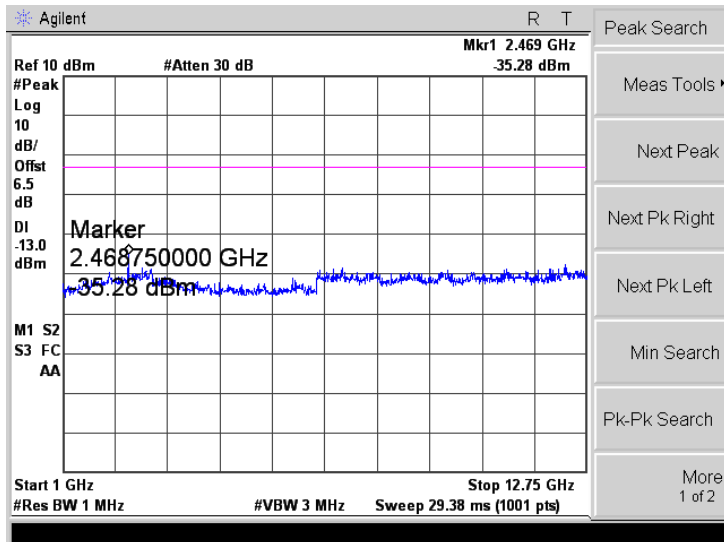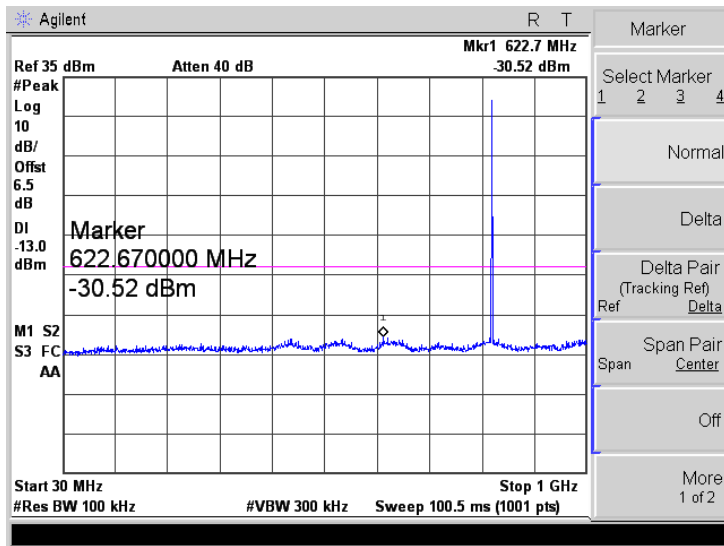



EGPRS850

Middle Channel

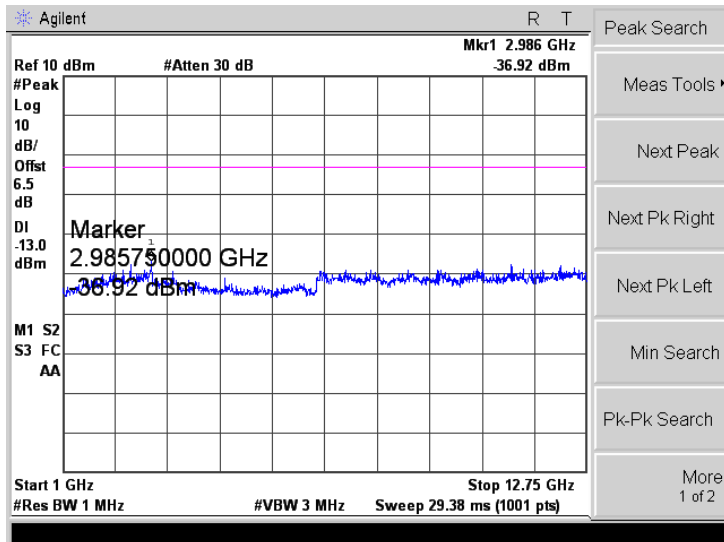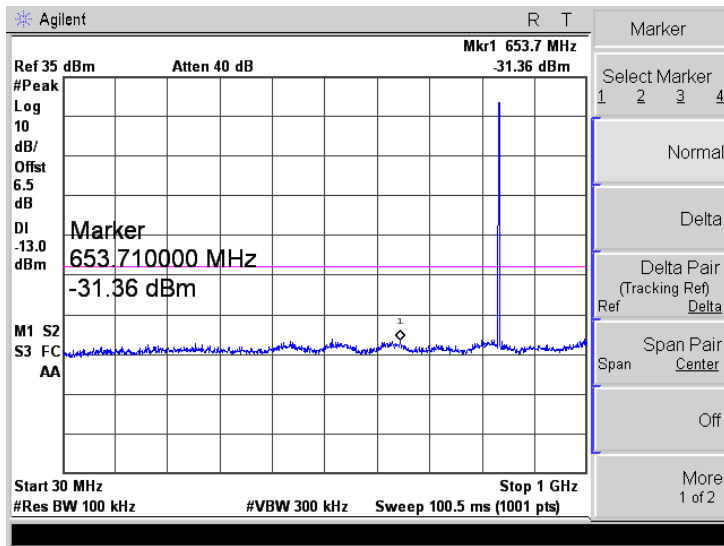

EGPRS850

High Channel

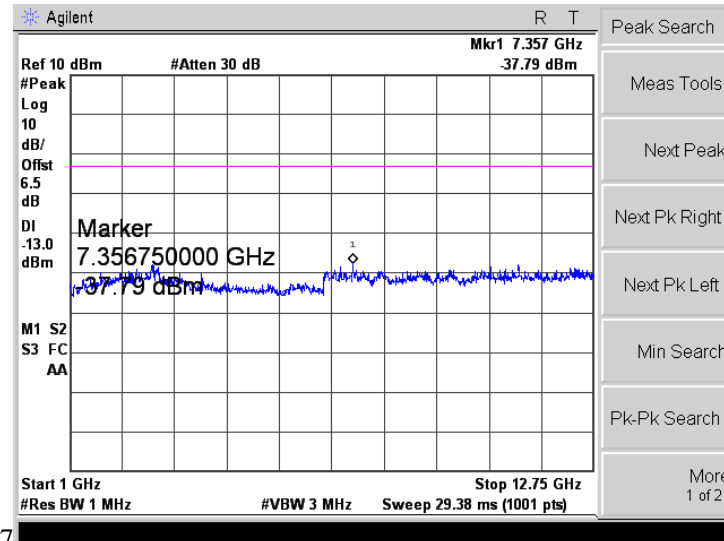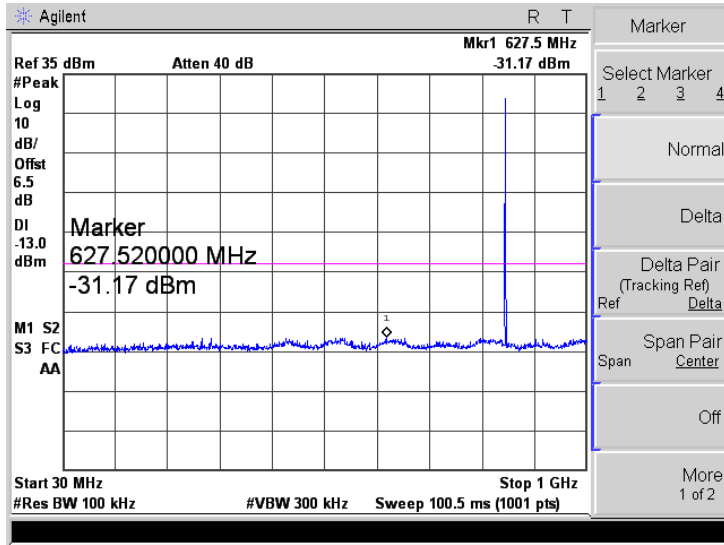


7




EGPRS850

Low Band Emission



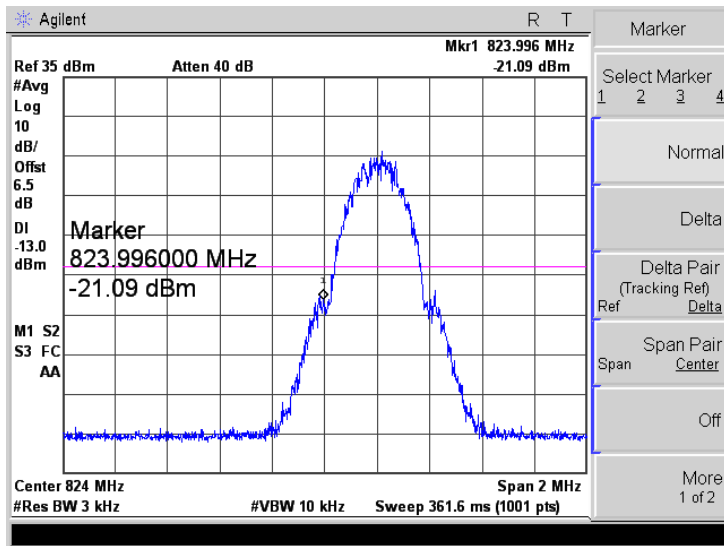


High Band Emission

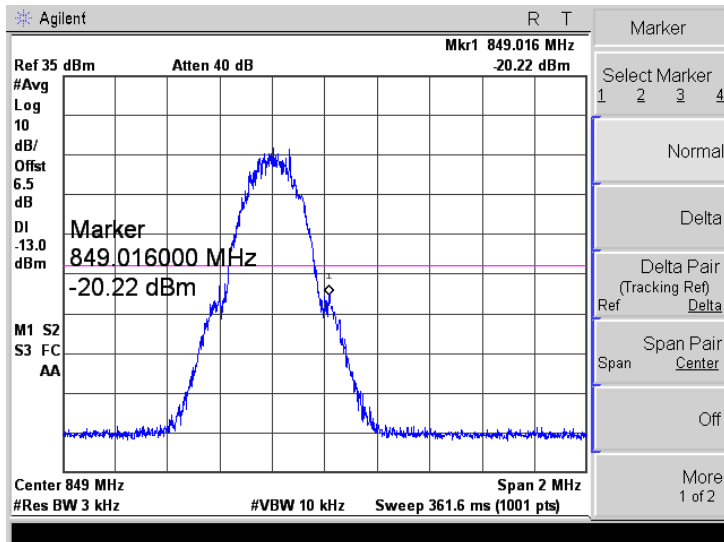




PCS1900

Low Channel

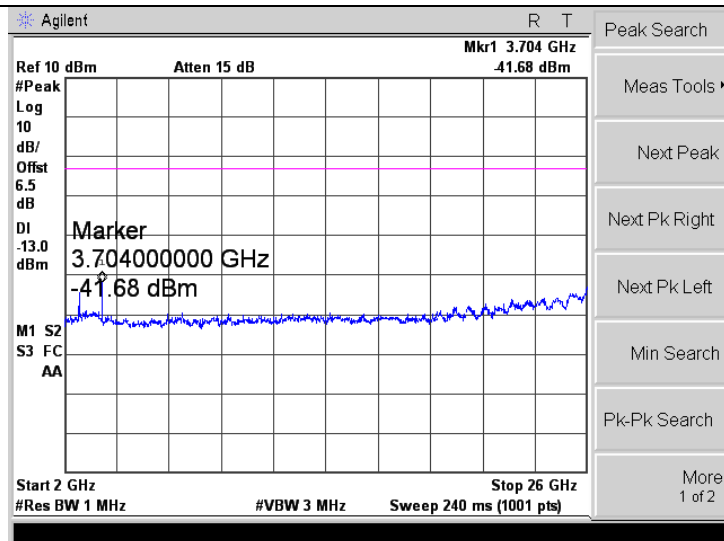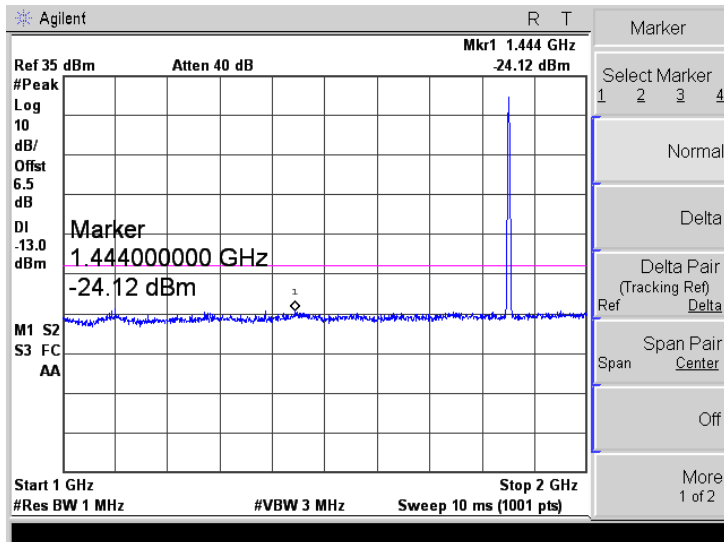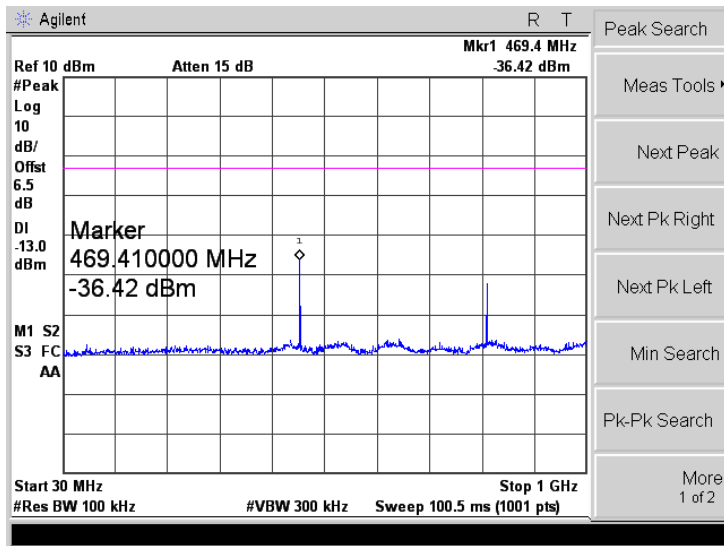




PCS1900

Middle Channel

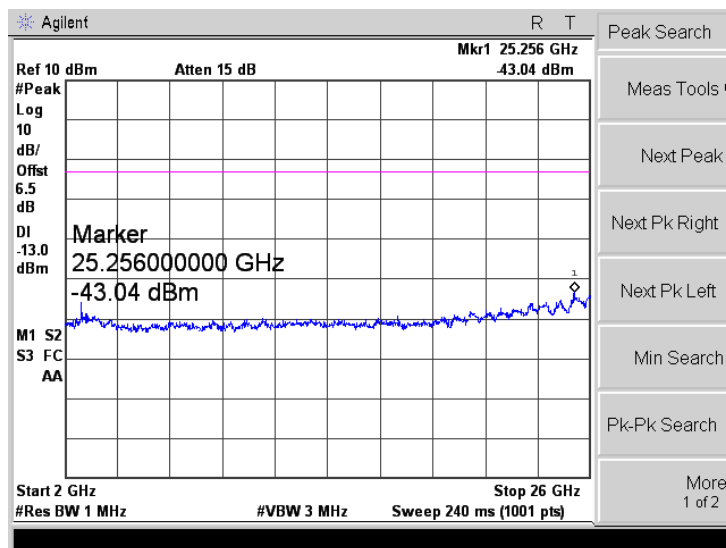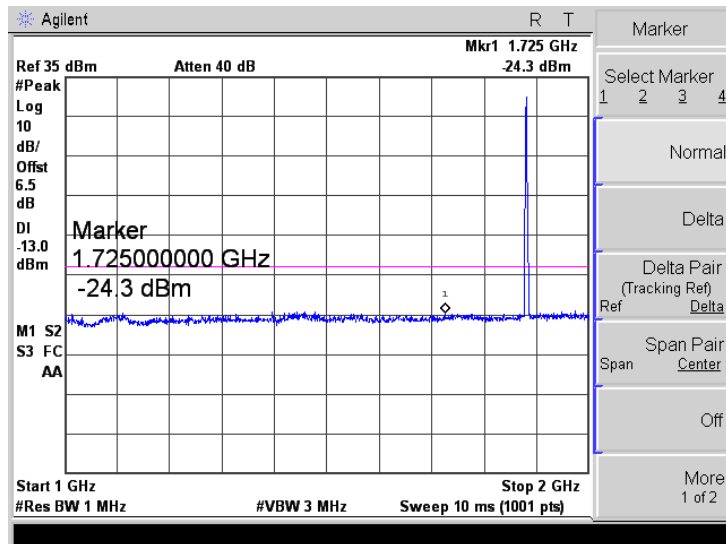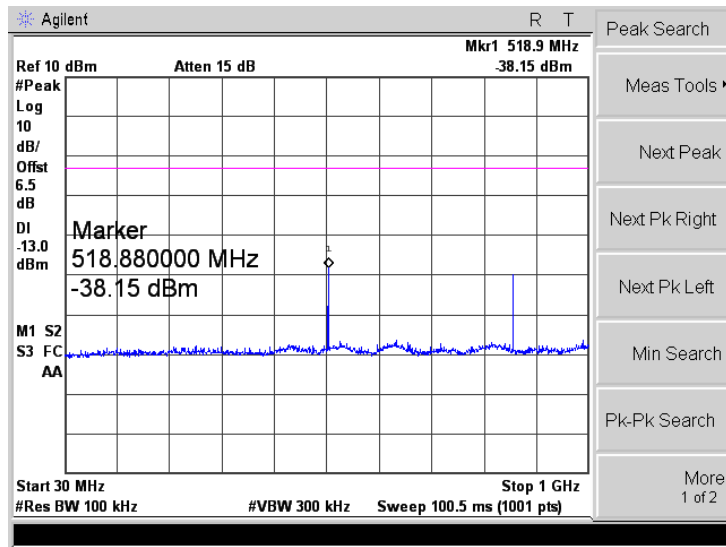


PCS1900

High Channel

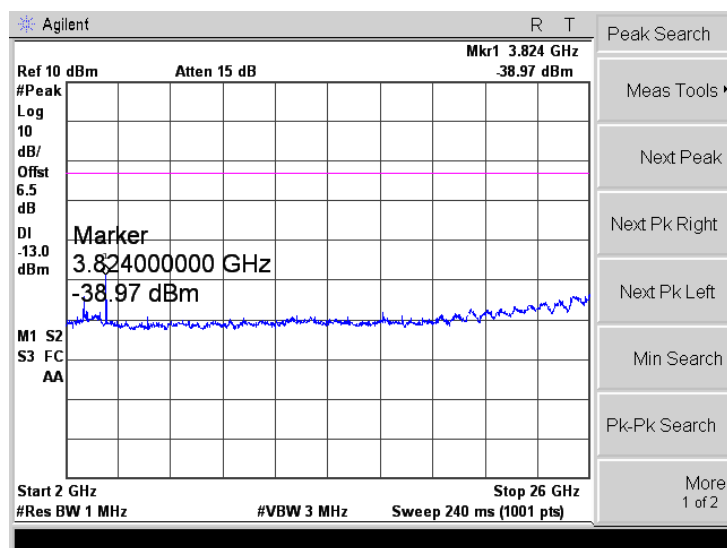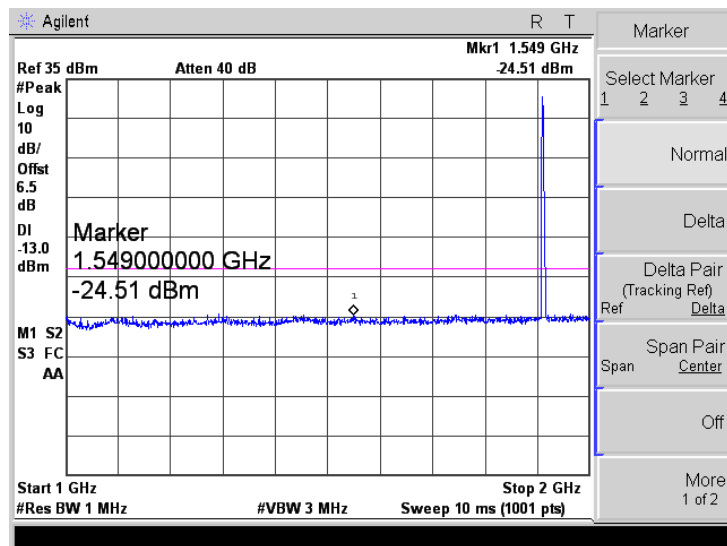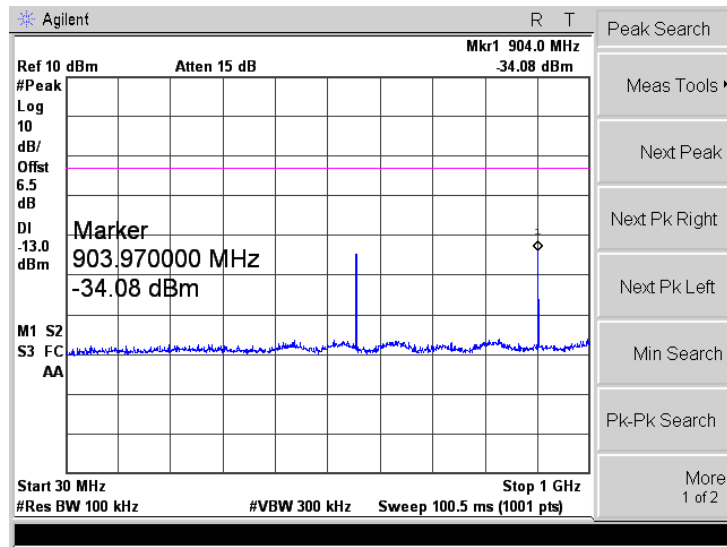


PCS1900

Low Band Emission



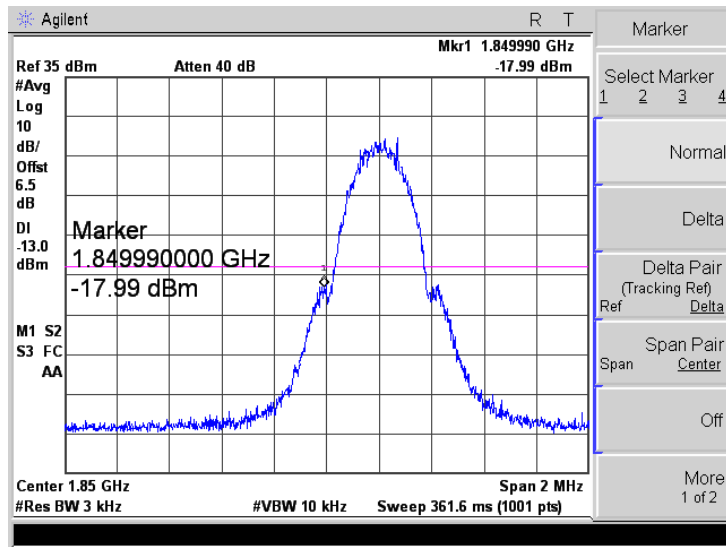


High Band Emission

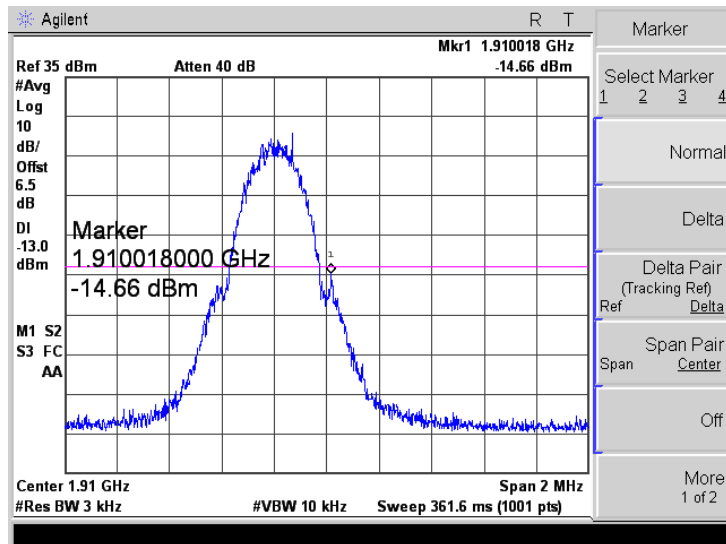




GPRS1900

Low Channel

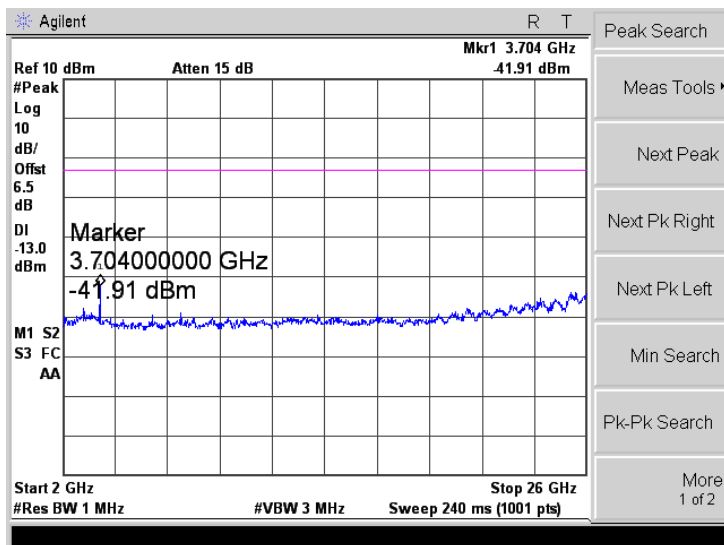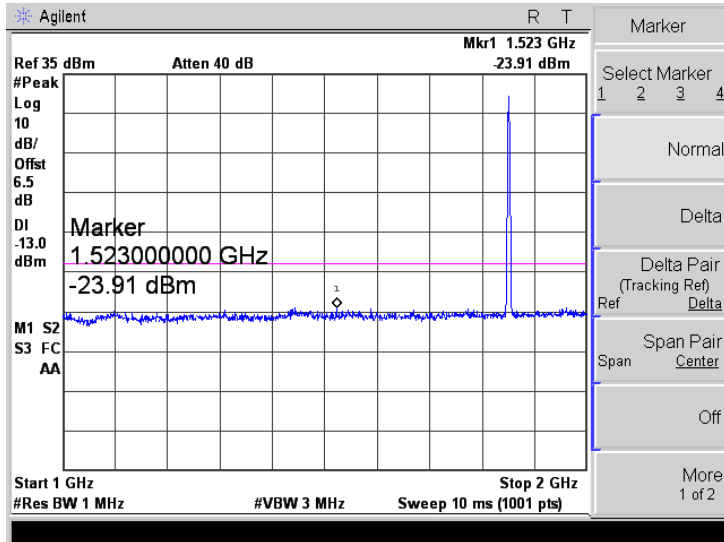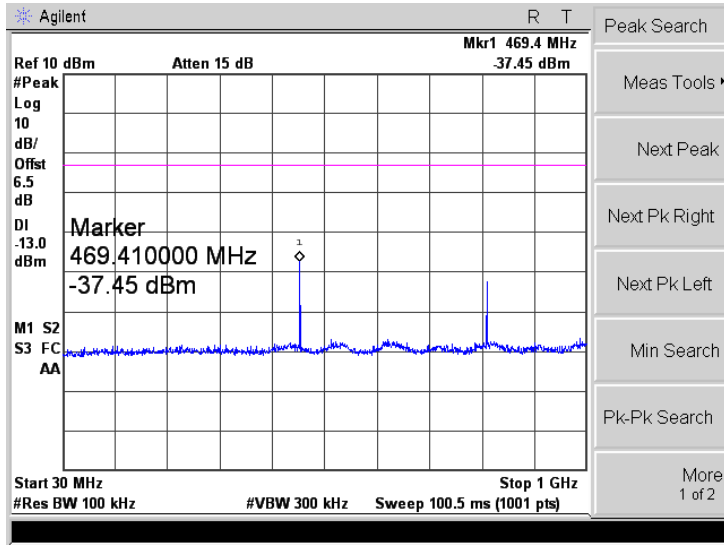




GPRS1900

Middle Channel

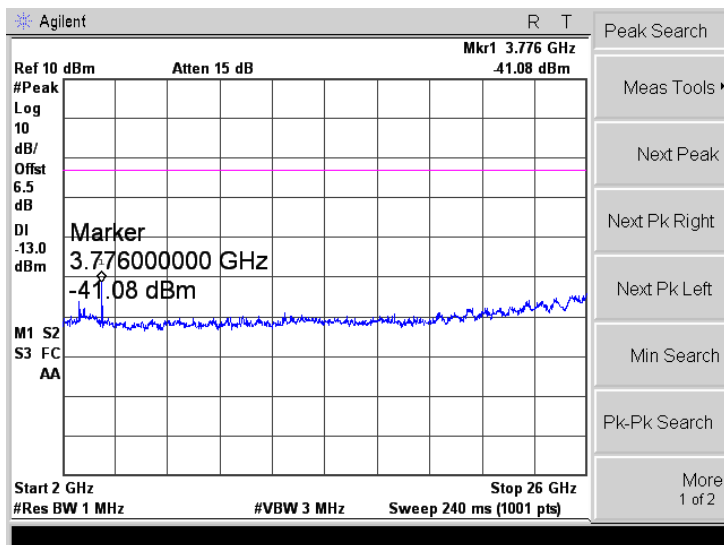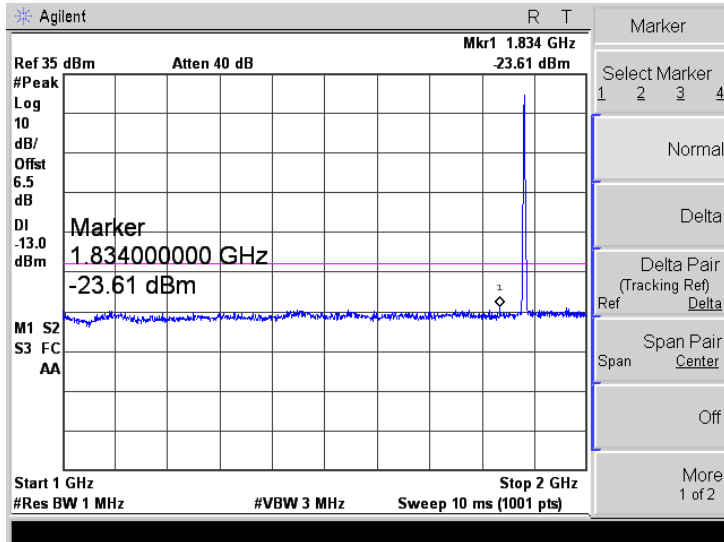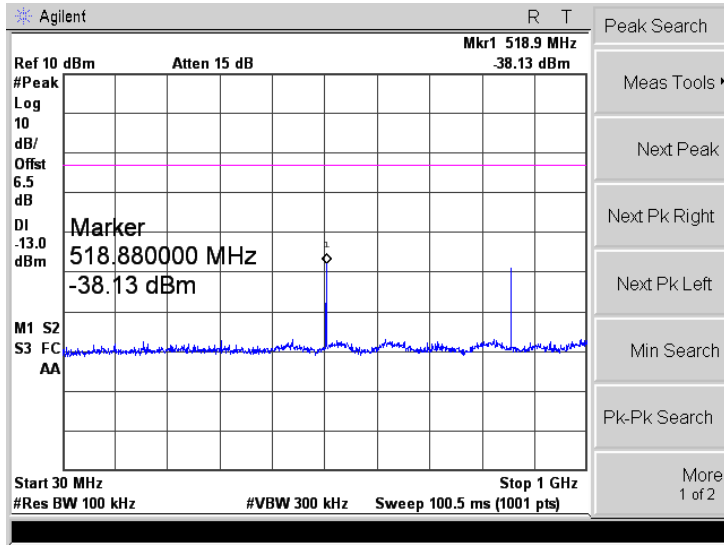

GPRS1900


High Channel

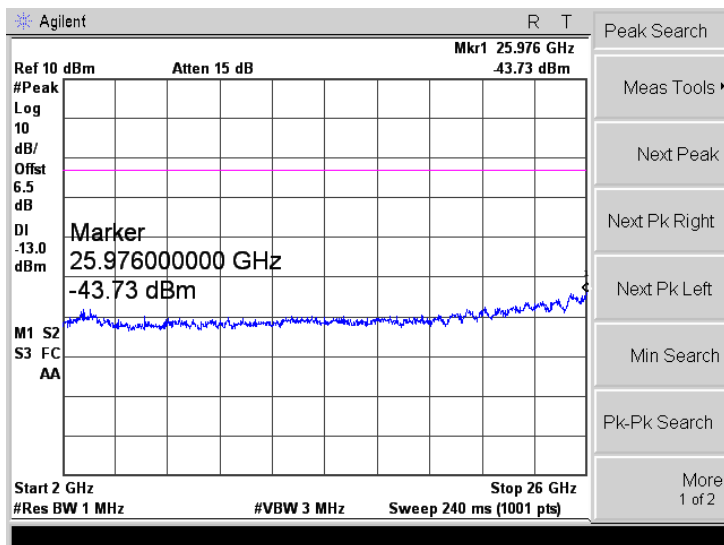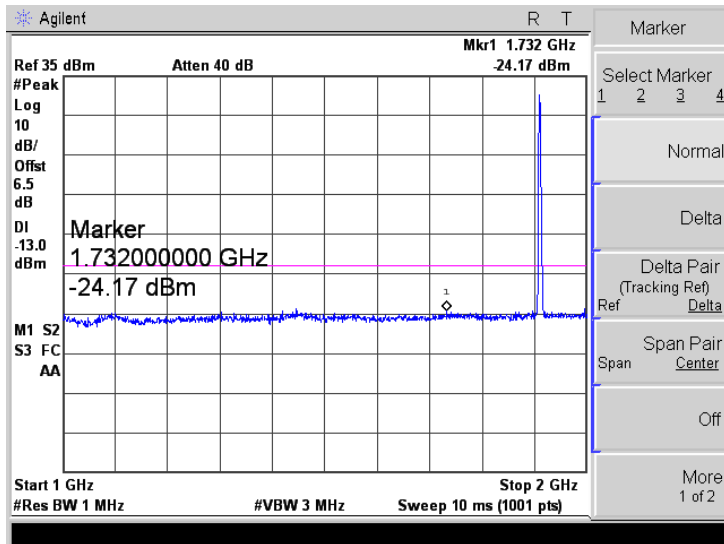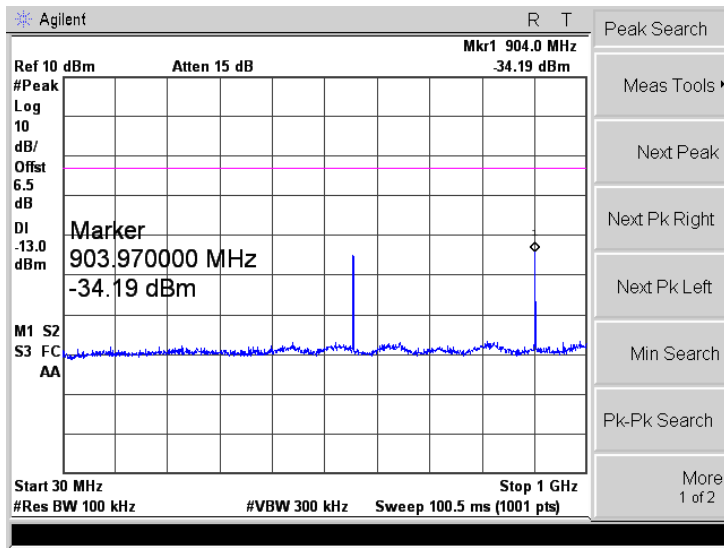




GPRS1900

Low Band Emission



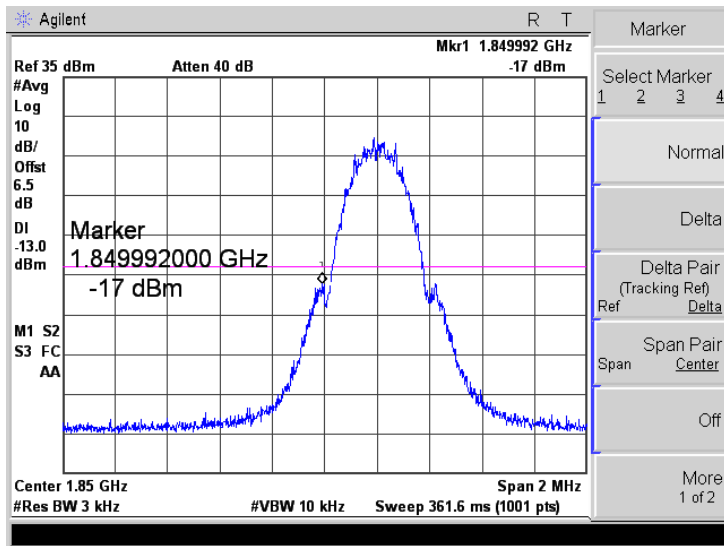


High Band Emission

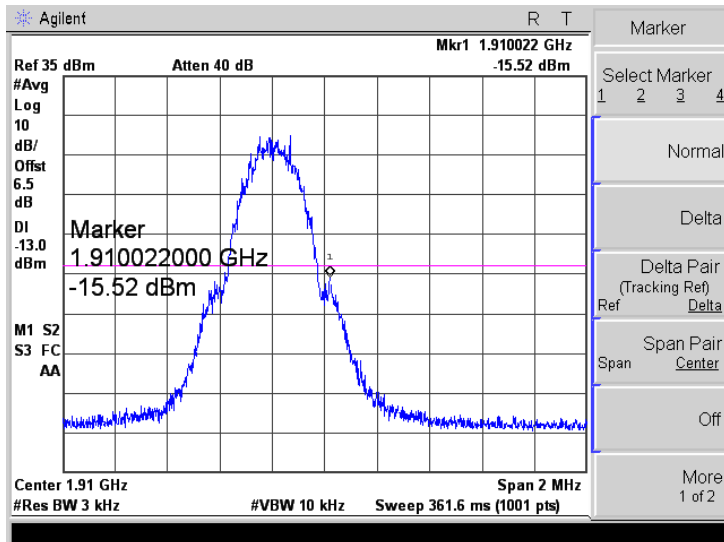




EGPRS1900

Low Channel

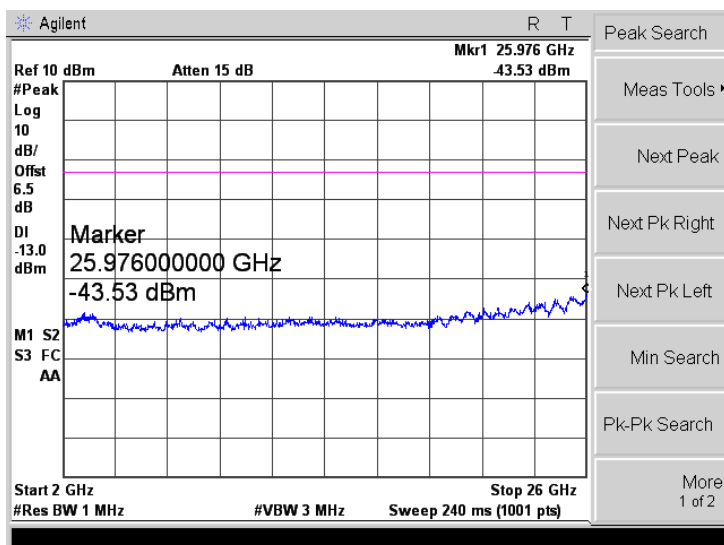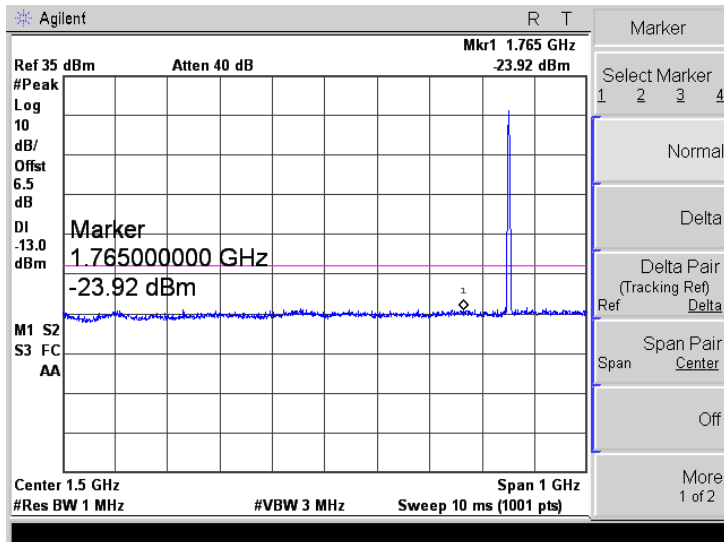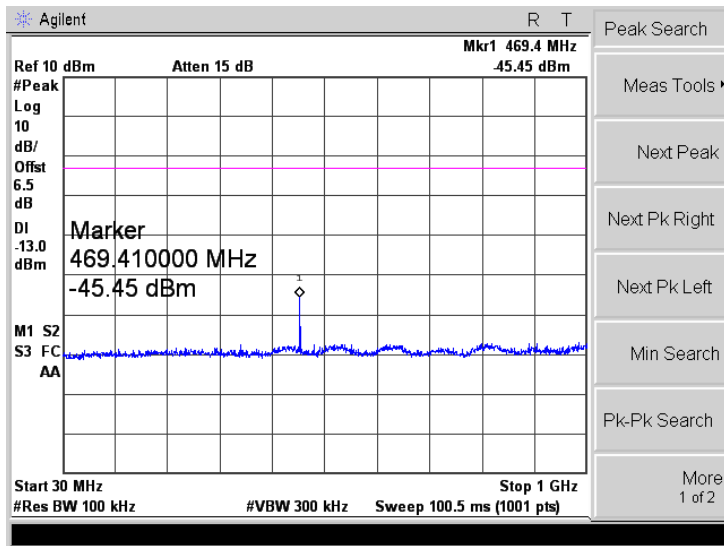




EGPRS1900

Middle Channel

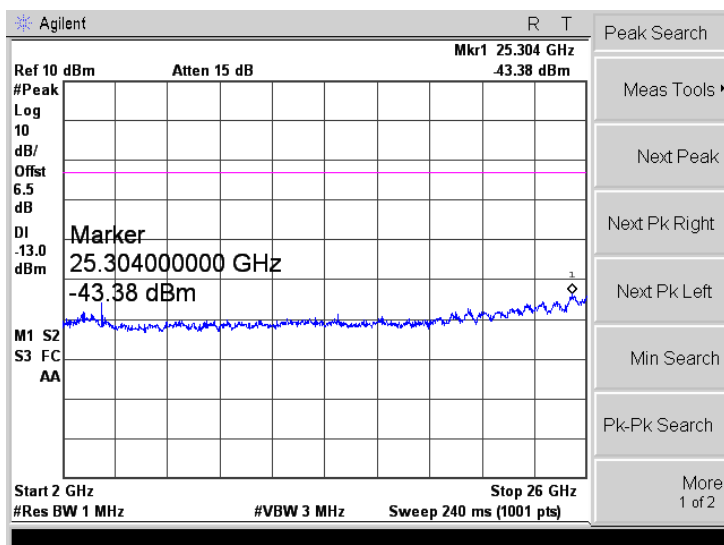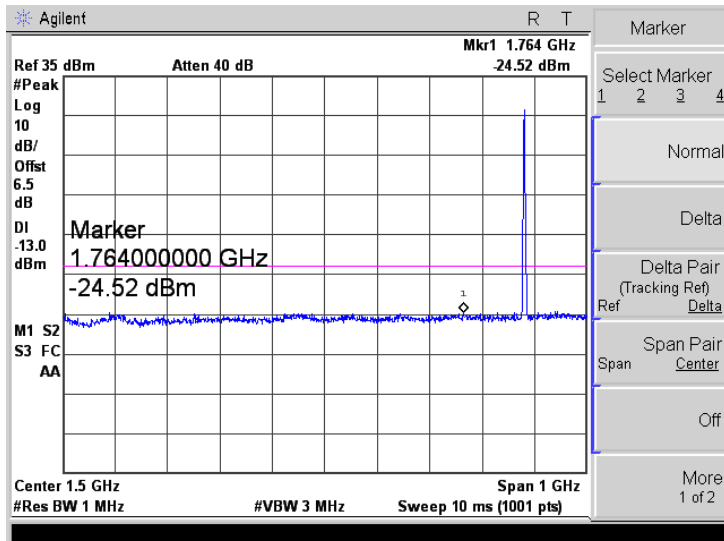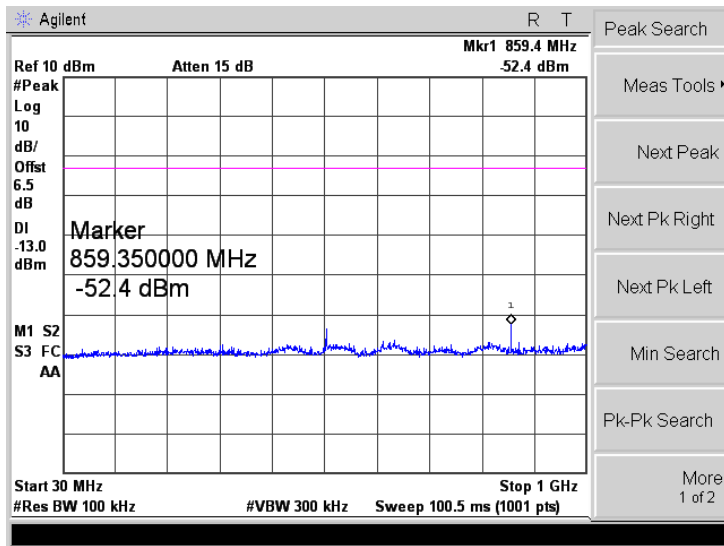


EGPRS1900

High Channel

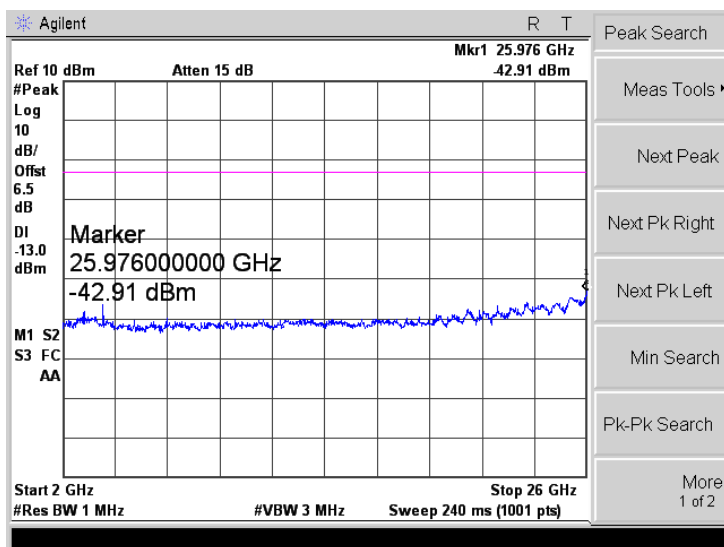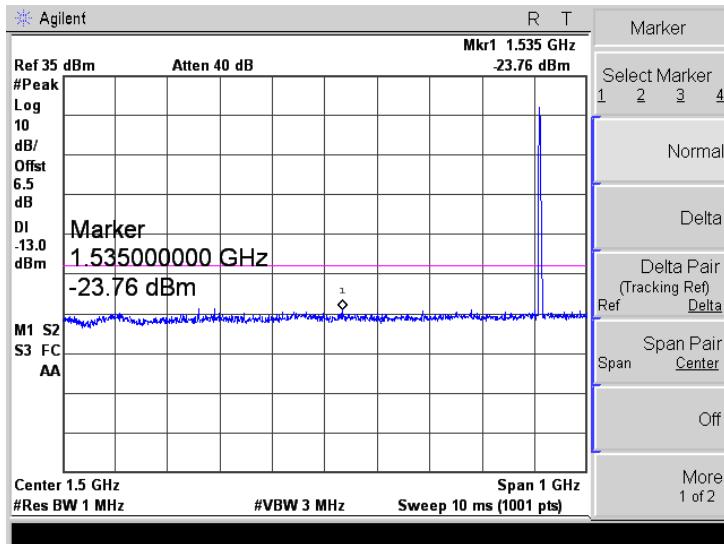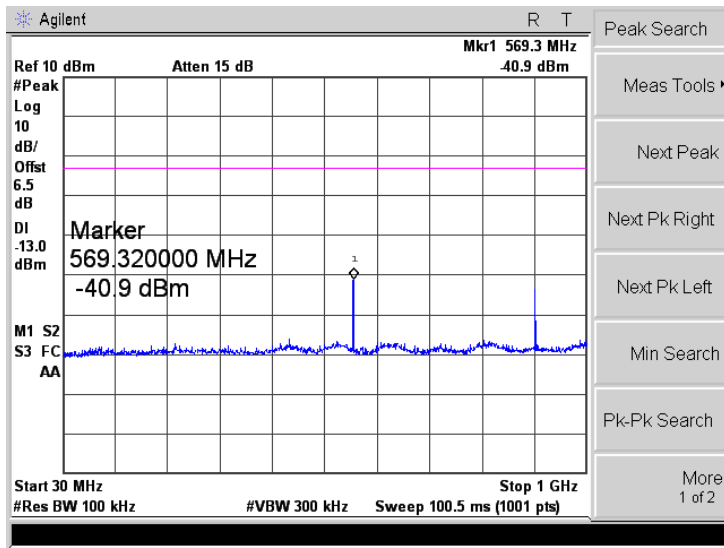


EGPRS1900

Low Band Emission


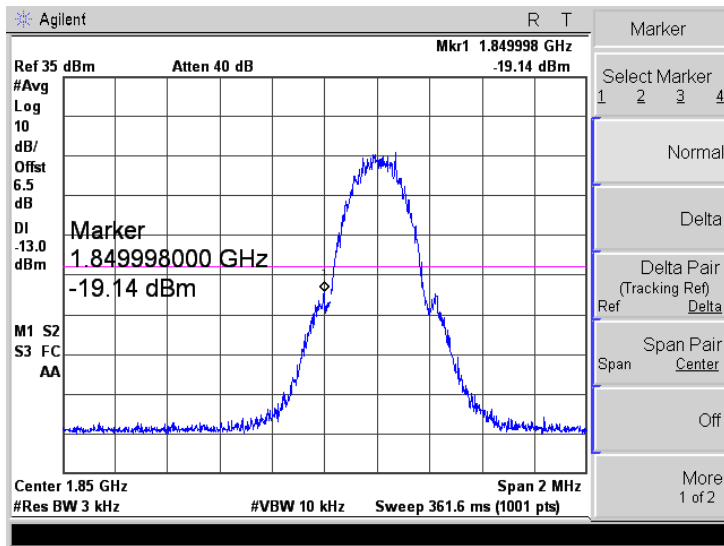


High Band Emission

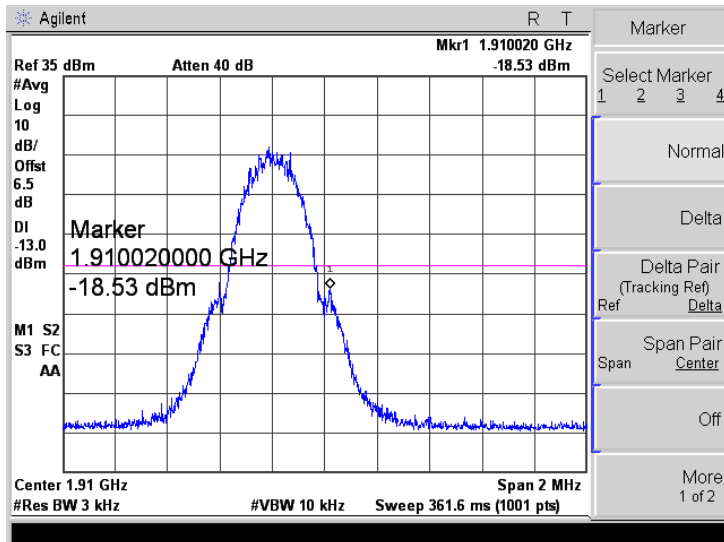



WCDMA Band V

Low Channel

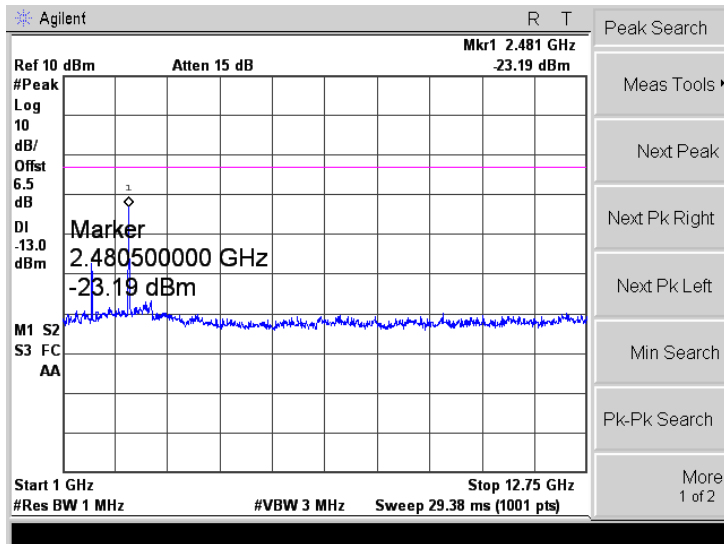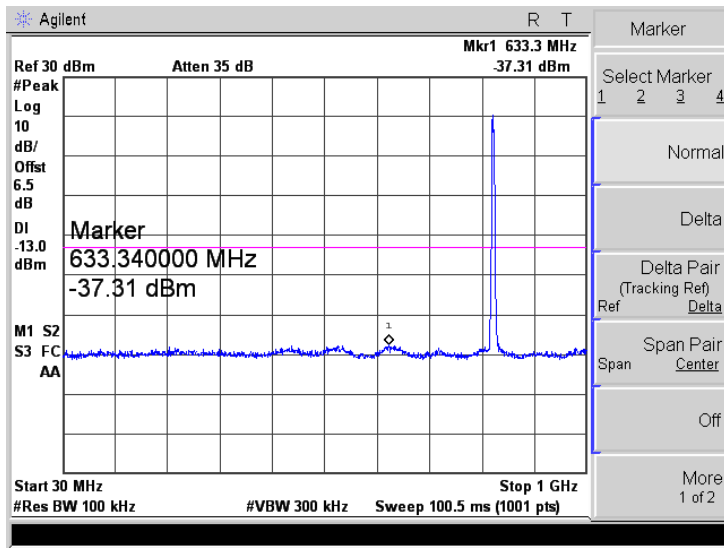



WCDMA Band V

Middle Channel

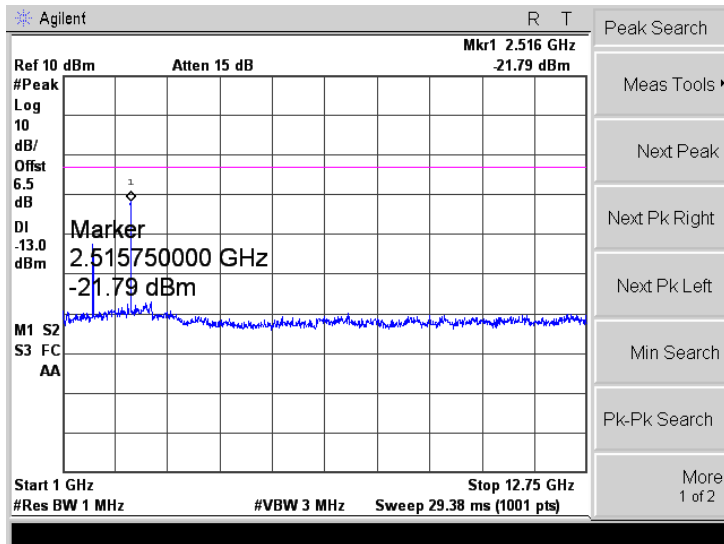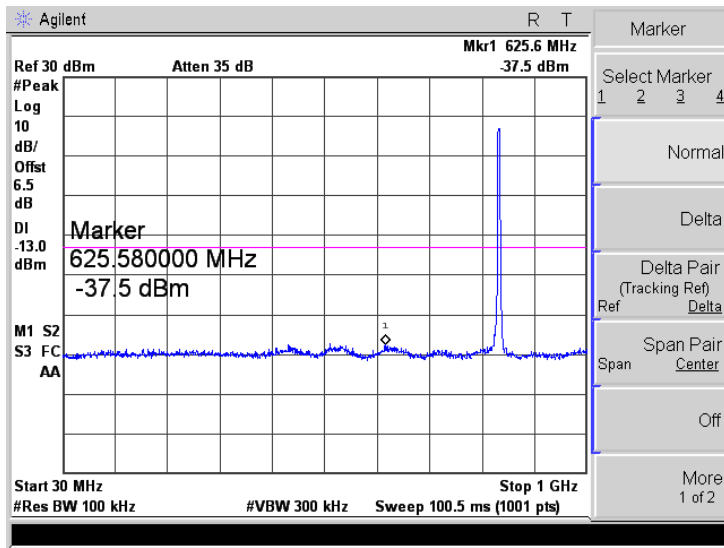

WCDMA Band V


High Channel

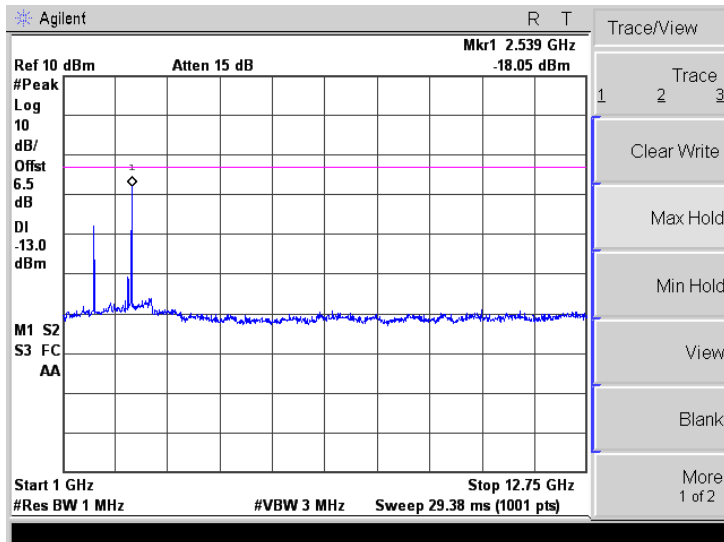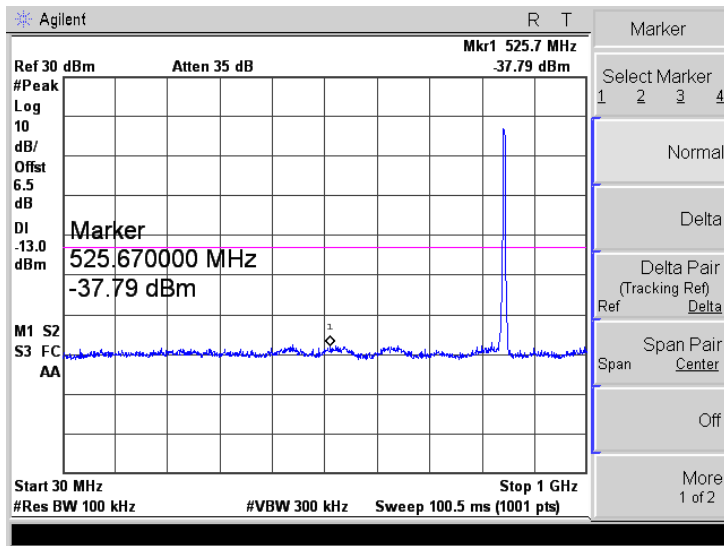




WCDMA Band V

Low Band Emission



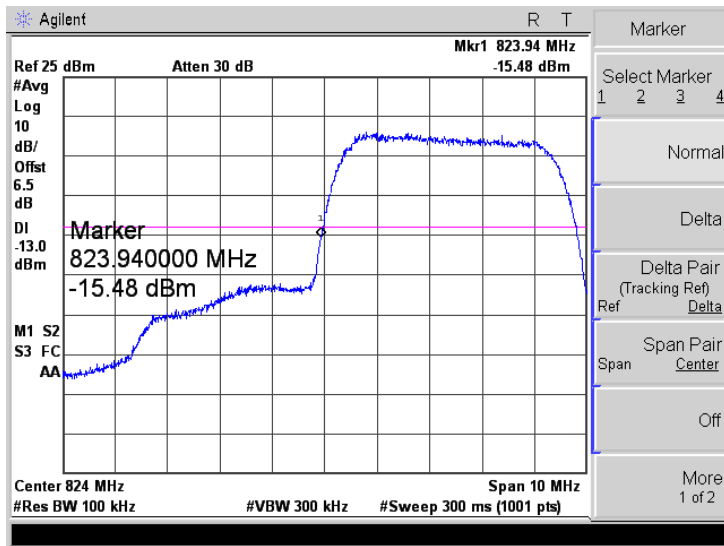


High Band Emission

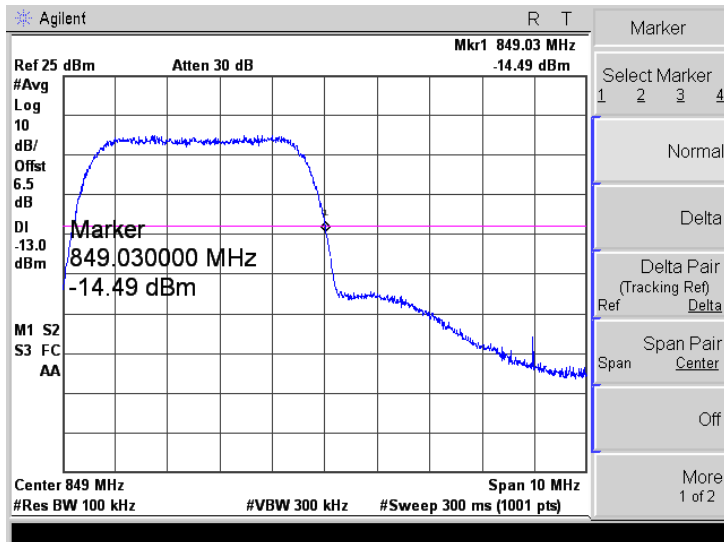




WCDMA Band IV

Low Channel

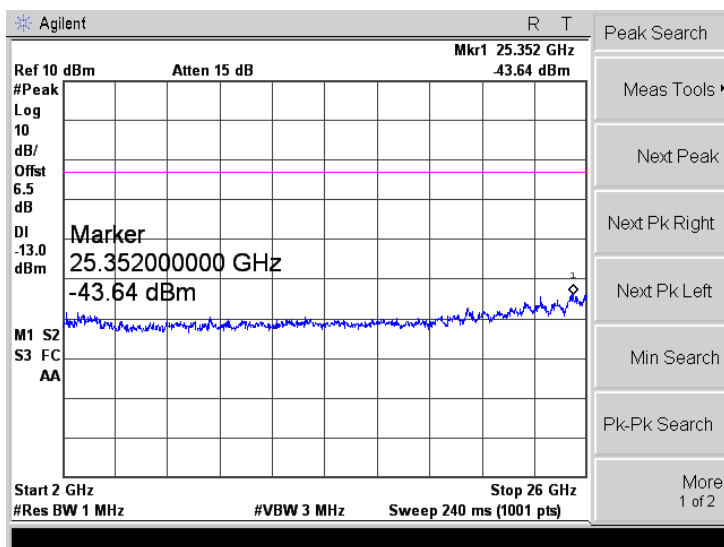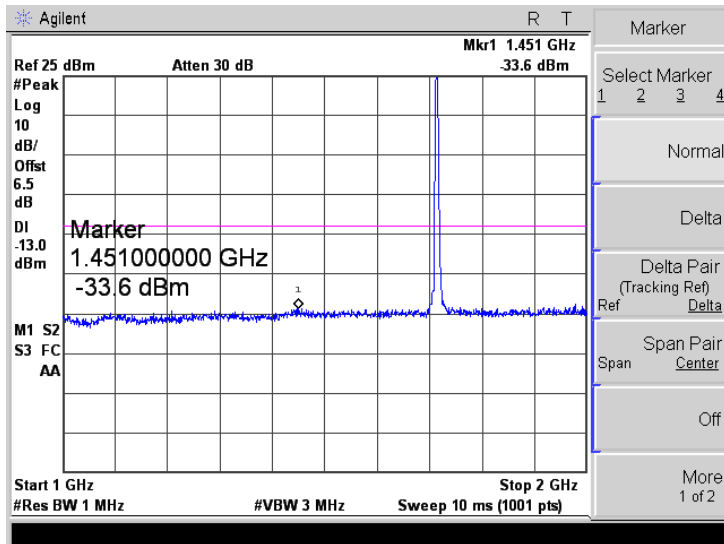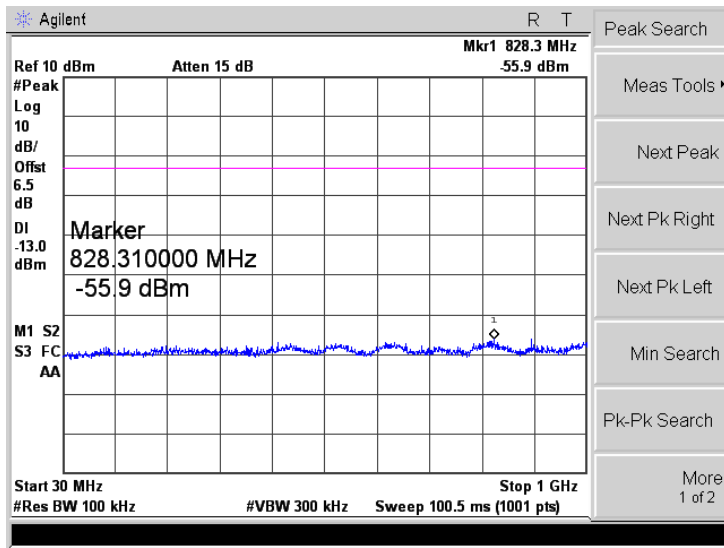




WCDMA Band IV

Middle Channel

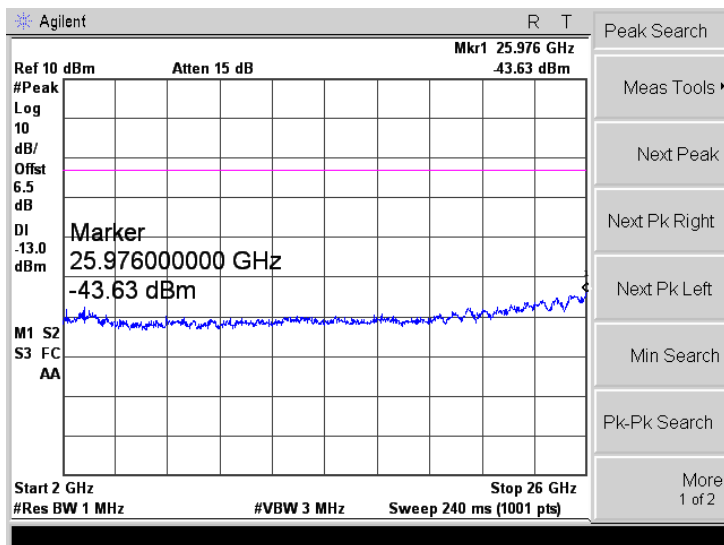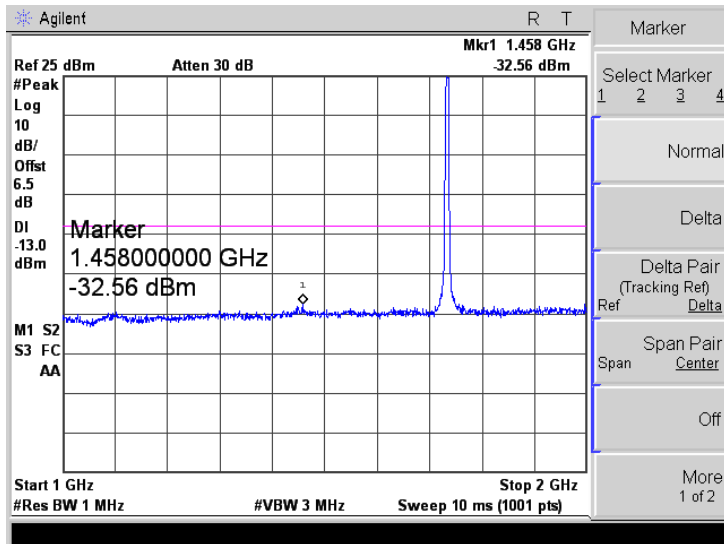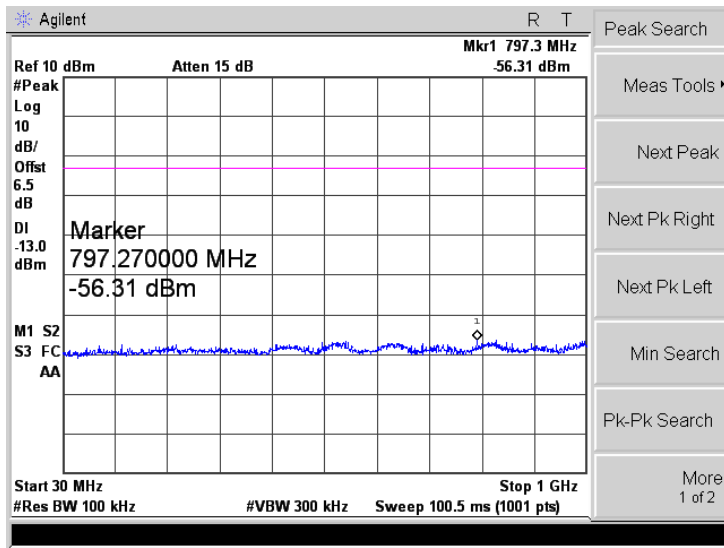


WCDMA Band IV

High Channel

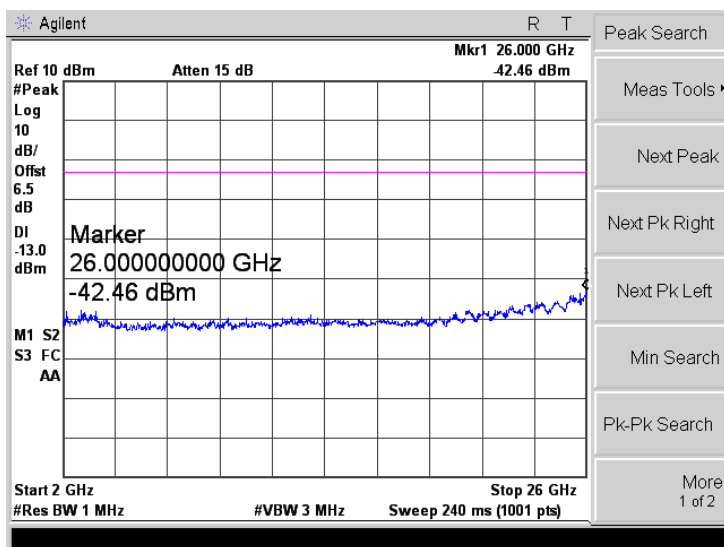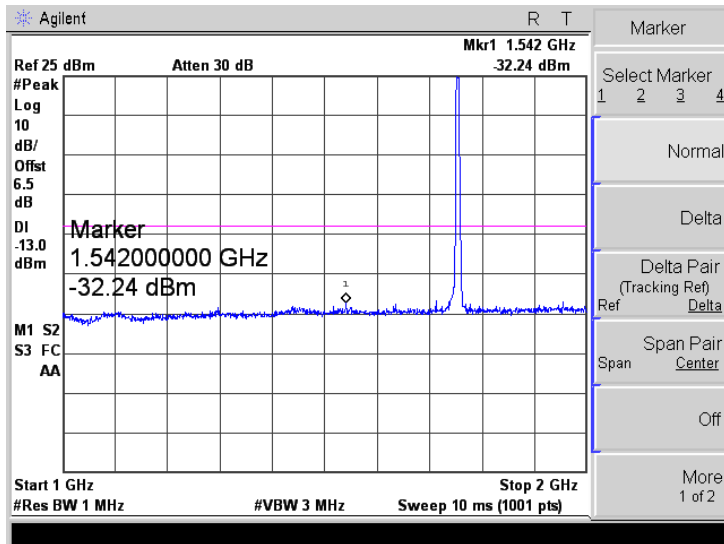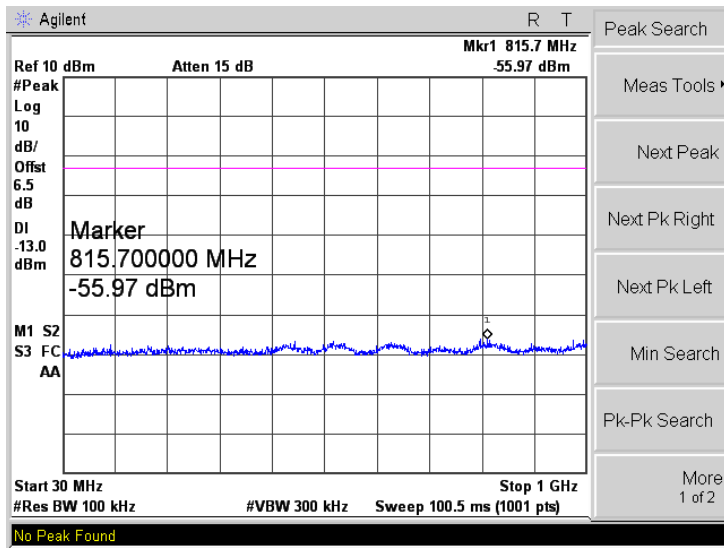


WCDMA Band IV

Low Band Emission



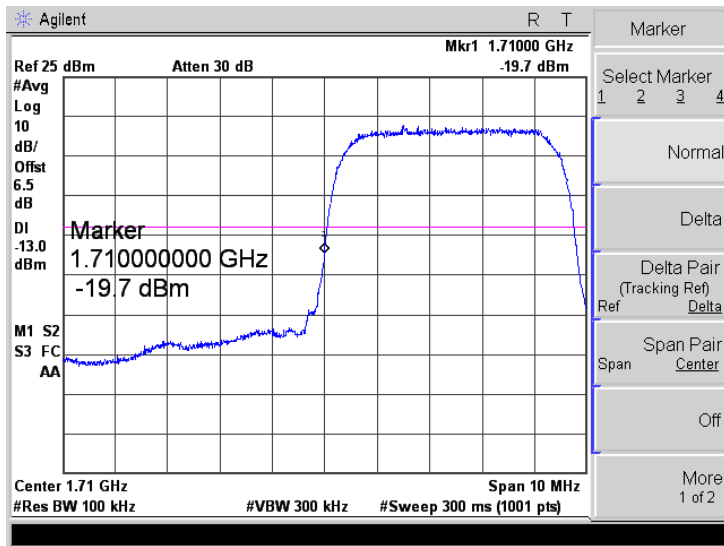


High Band Emission

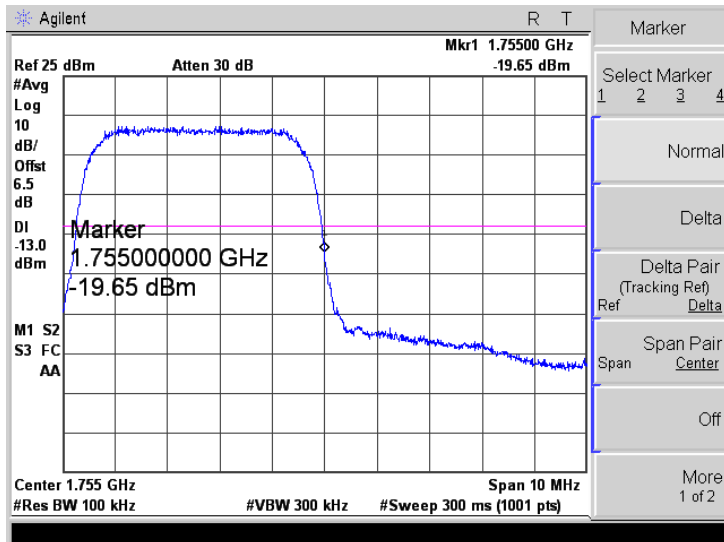




WCDMA Band II

Low Channel

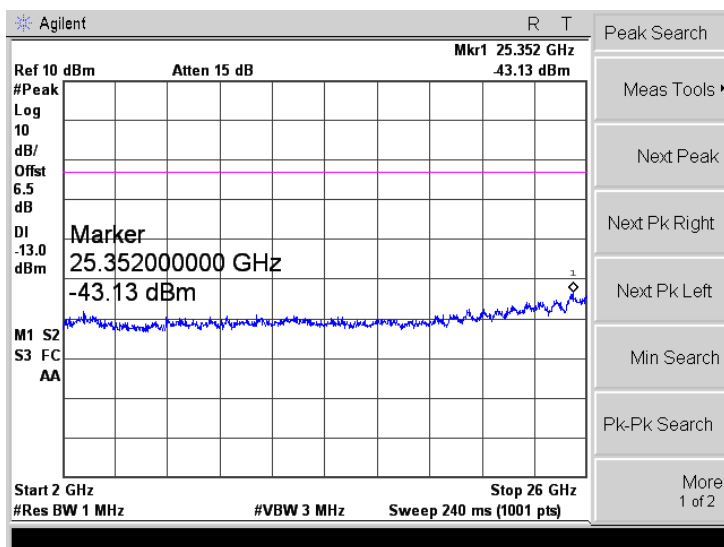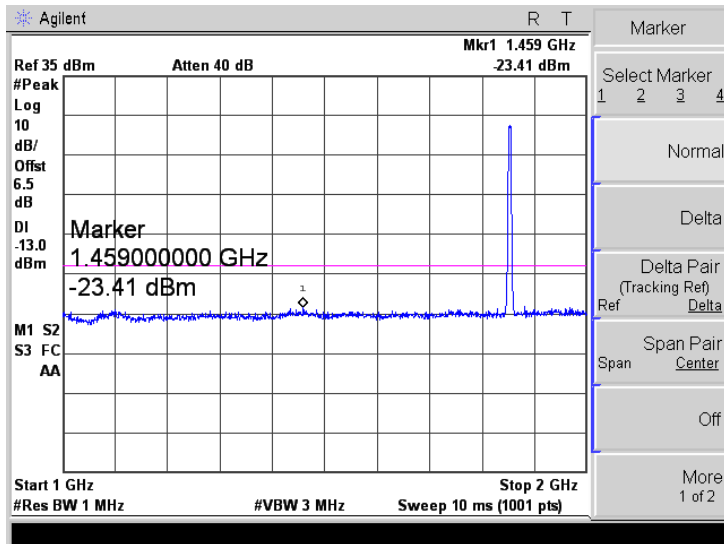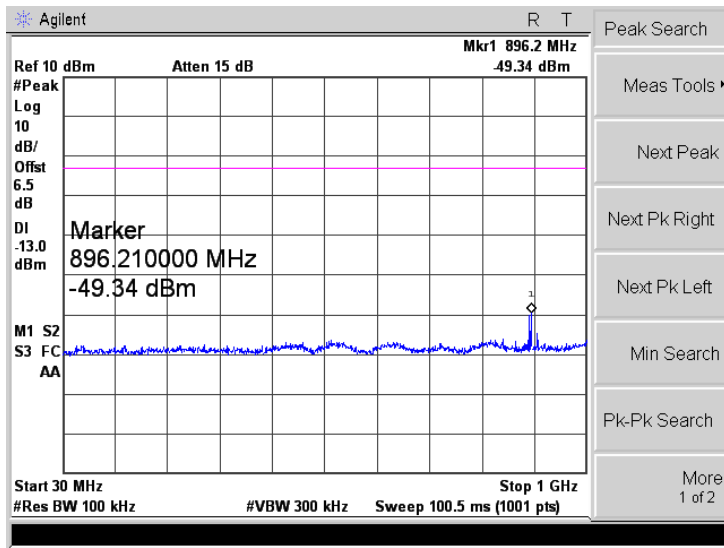




WCDMA Band II

Middle Channel

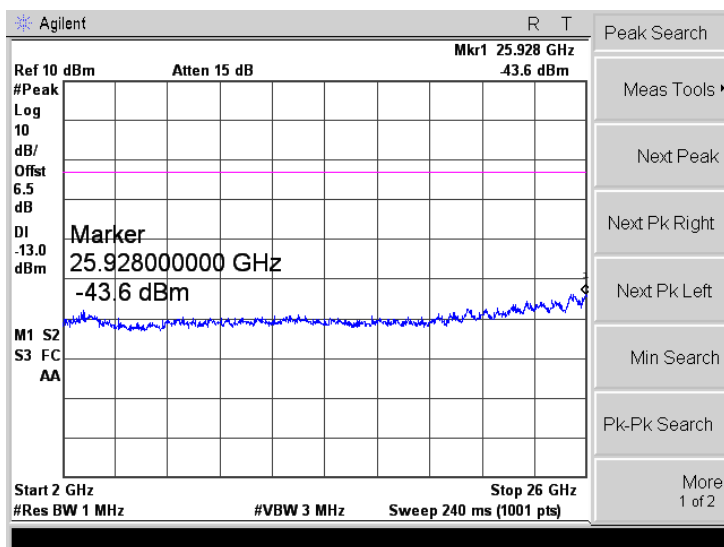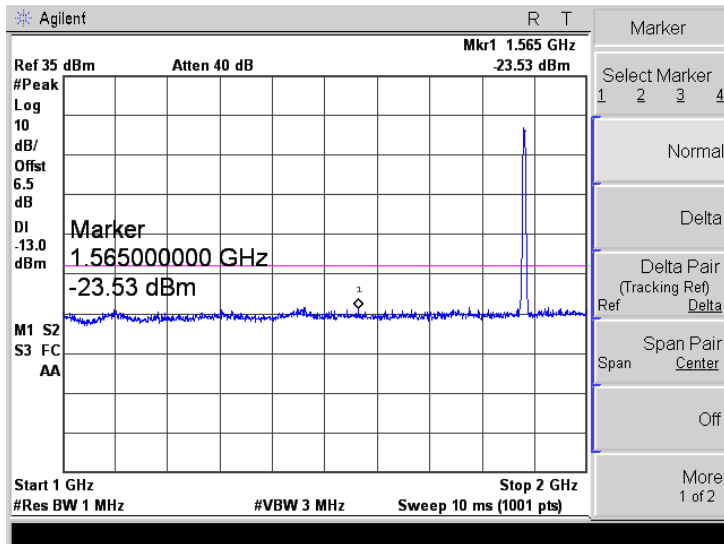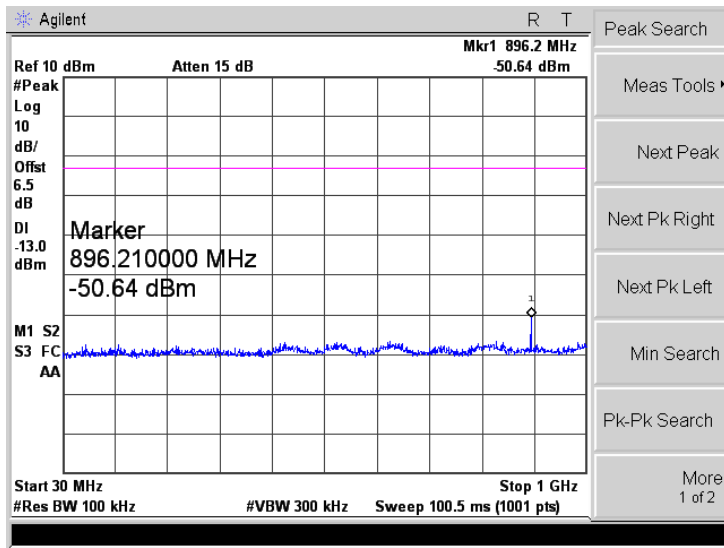

WCDMA Band II


High Channel

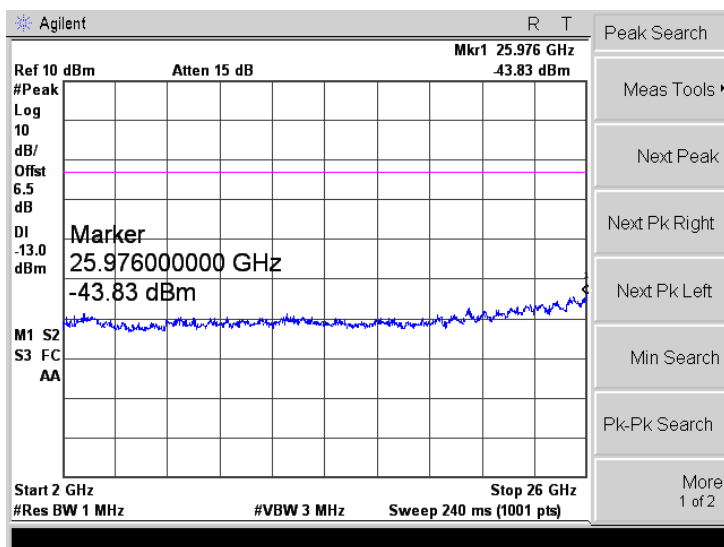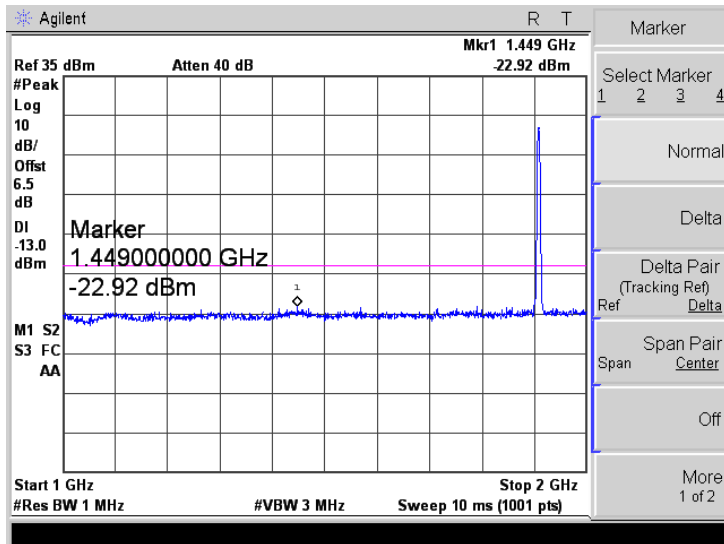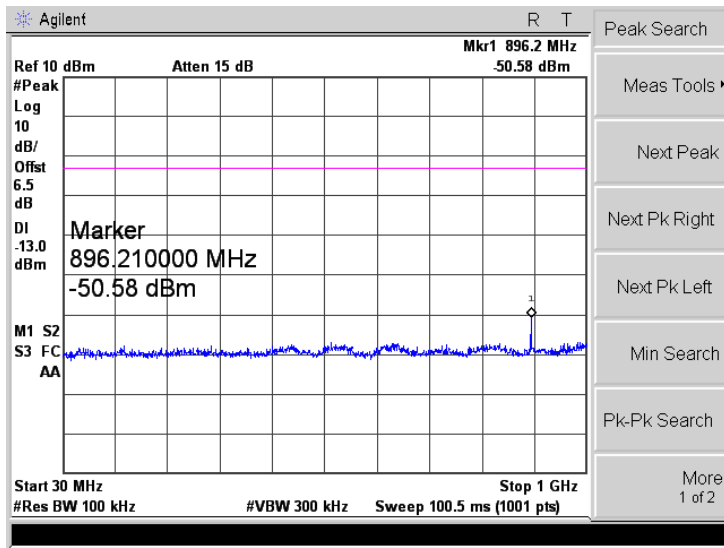




WCDMA Band II

Low Band Emission

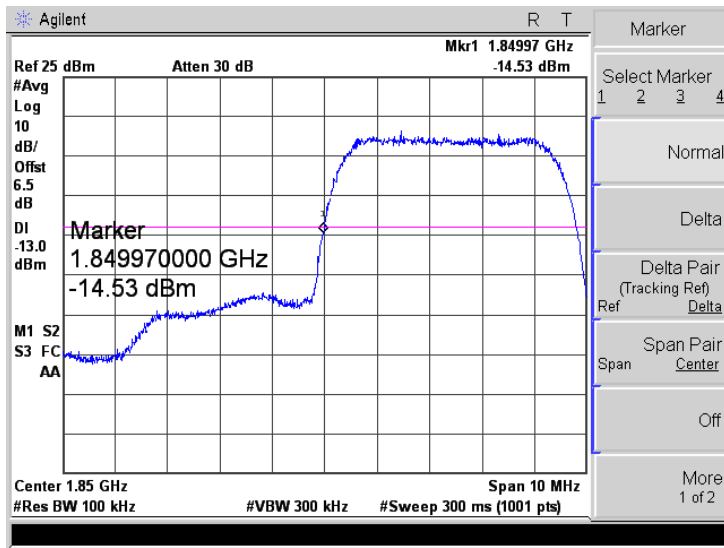

High Band Emission

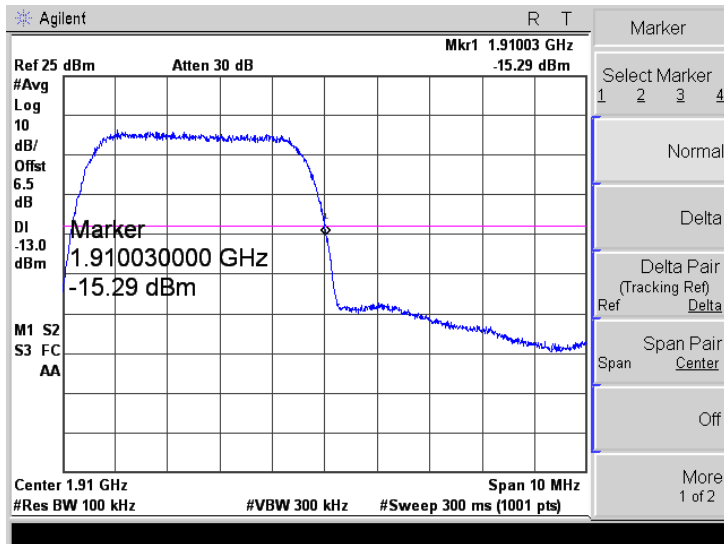

---

## 8. Spurious Radiated Emissions

---

### 8.1 Standard Applicable

According to §22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

According to §27.53 (h), the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least  $43 + 10 \log_{10}(P)$  dB.

### 8.2 Test Procedure

1. The setup of EUT is according with per ANSI/TIA Standard 603E and ANSI C63.26 measurement procedure.
2. The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.
3. The frequency range up to tenth harmonic of the fundamental frequency was investigated.
4. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.


$$\text{Spurious attenuation limit in dB} = 43 + 10 \log_{10}(\text{power out in Watts})$$

### 8.3 Summary of Test Results/Plots

*Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.*


➤ Spurious Emissions Below 1GHz

For Cellular Band			
Test Channel	GSM850	Polarity:	Horizontal

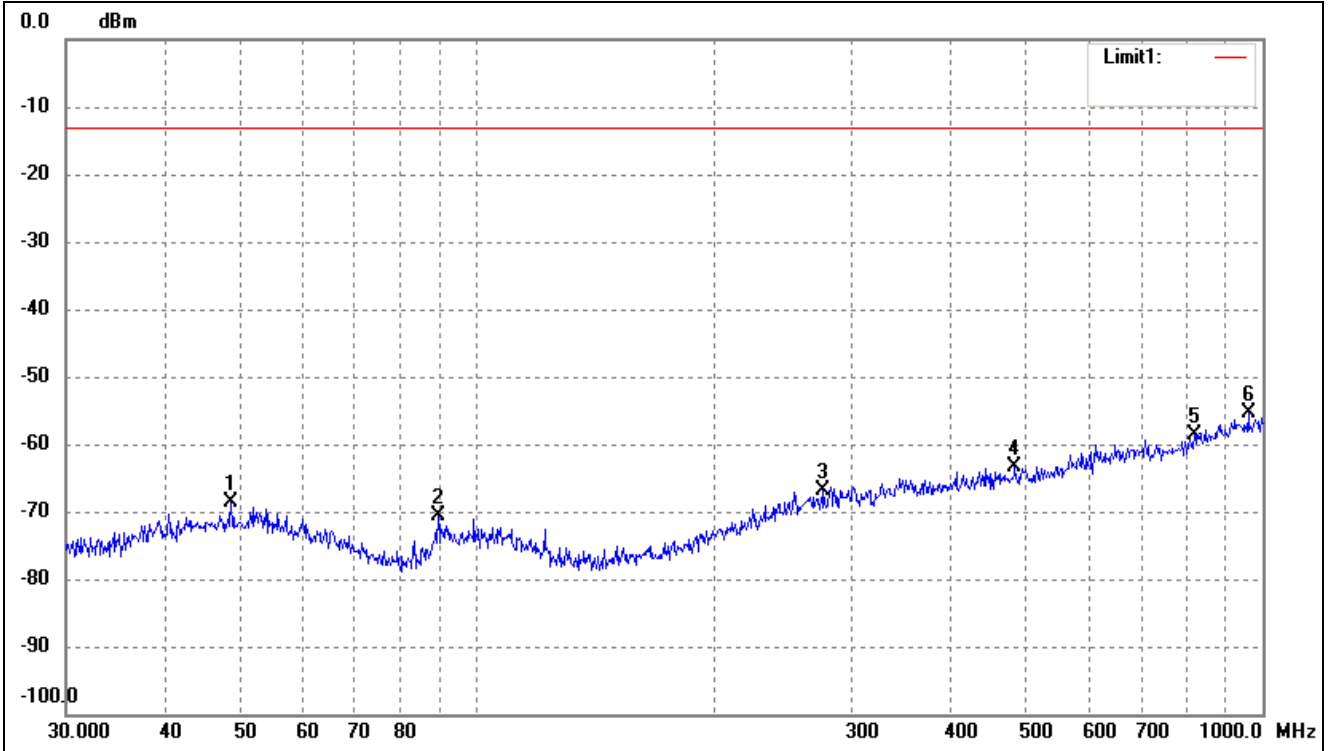


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	48.6719	-68.88	0.16	-68.72	-13.00	-55.72	ERP
2	89.2764	-68.48	-2.16	-70.64	-13.00	-57.64	ERP
3	276.1236	-69.83	2.85	-66.98	-13.00	-53.98	ERP
4	483.9094	-69.38	6.11	-63.27	-13.00	-50.27	ERP
5	818.8341	-69.99	11.42	-58.57	-13.00	-45.57	ERP
6	958.7943	-69.08	13.60	-55.48	-13.00	-42.48	ERP

For Cellular Band			
Test Channel	GSM850	Polarity:	Vertical

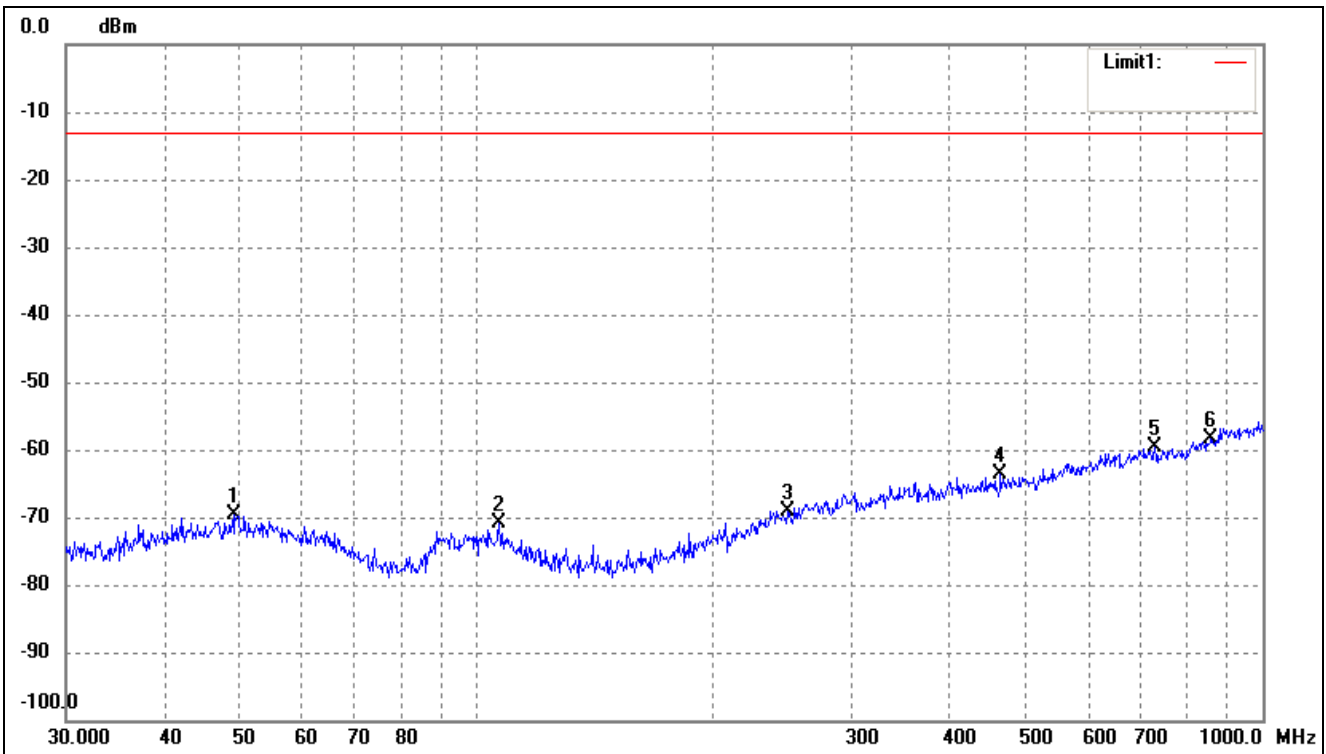


No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	49.1866	-69.80	0.17	-69.63	-13.00	-56.63	ERP
2	106.7587	-69.01	-1.75	-70.76	-13.00	-57.76	ERP
3	248.5519	-71.04	1.90	-69.14	-13.00	-56.14	ERP
4	463.9696	-69.35	5.76	-63.59	-13.00	-50.59	ERP
5	729.3583	-69.40	9.74	-59.66	-13.00	-46.66	ERP
6	860.0352	-70.31	11.89	-58.42	-13.00	-45.42	ERP

For Cellular Band			
Test Channel	GSM1900	Polarity:	Horizontal

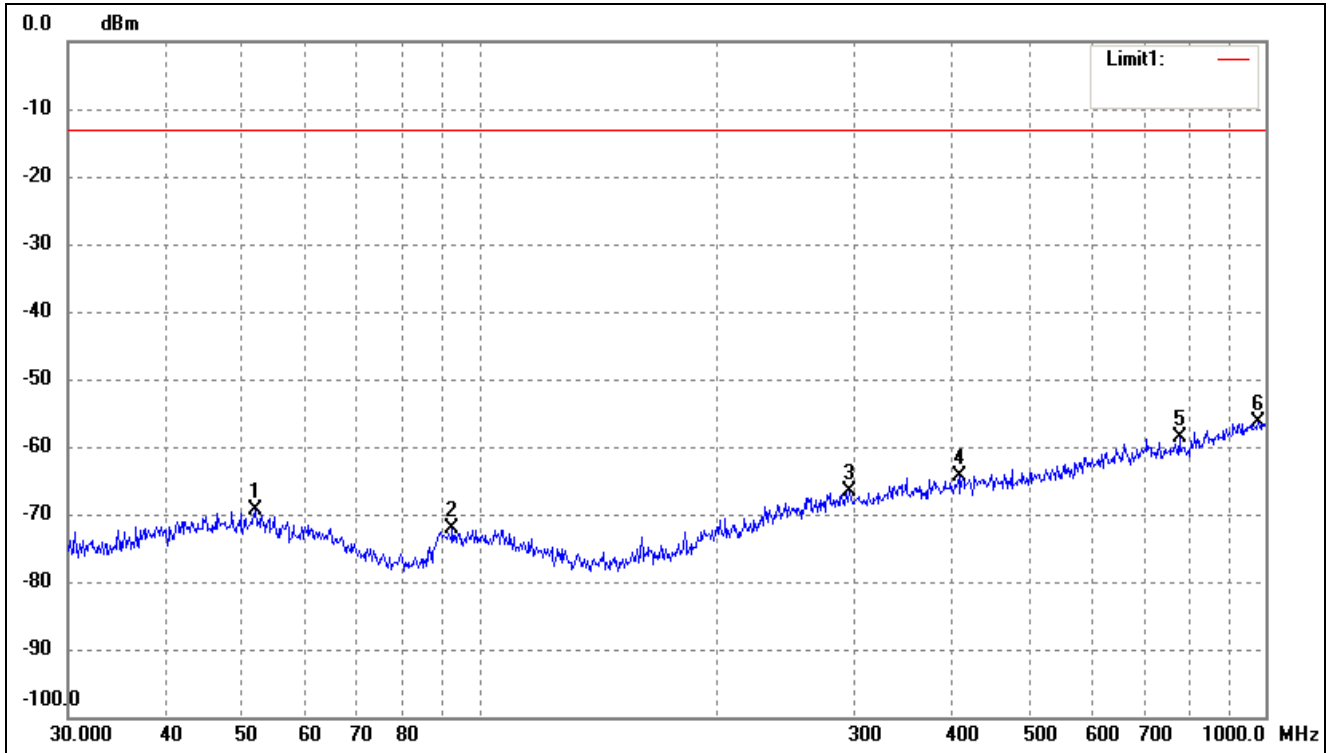

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	52.0251	-69.60	0.21	-69.39	-13.00	-56.39	ERP
2	92.4624	-70.14	-2.09	-72.23	-13.00	-59.23	ERP
3	295.1469	-70.23	3.63	-66.60	-13.00	-53.60	ERP
4	407.5145	-69.64	5.25	-64.39	-13.00	-51.39	ERP
5	776.8778	-68.84	10.13	-58.71	-13.00	-45.71	ERP
6	979.1804	-70.41	14.04	-56.37	-13.00	-43.37	ERP


For Cellular Band			
Test Channel	GSM1900	Polarity:	Vertical

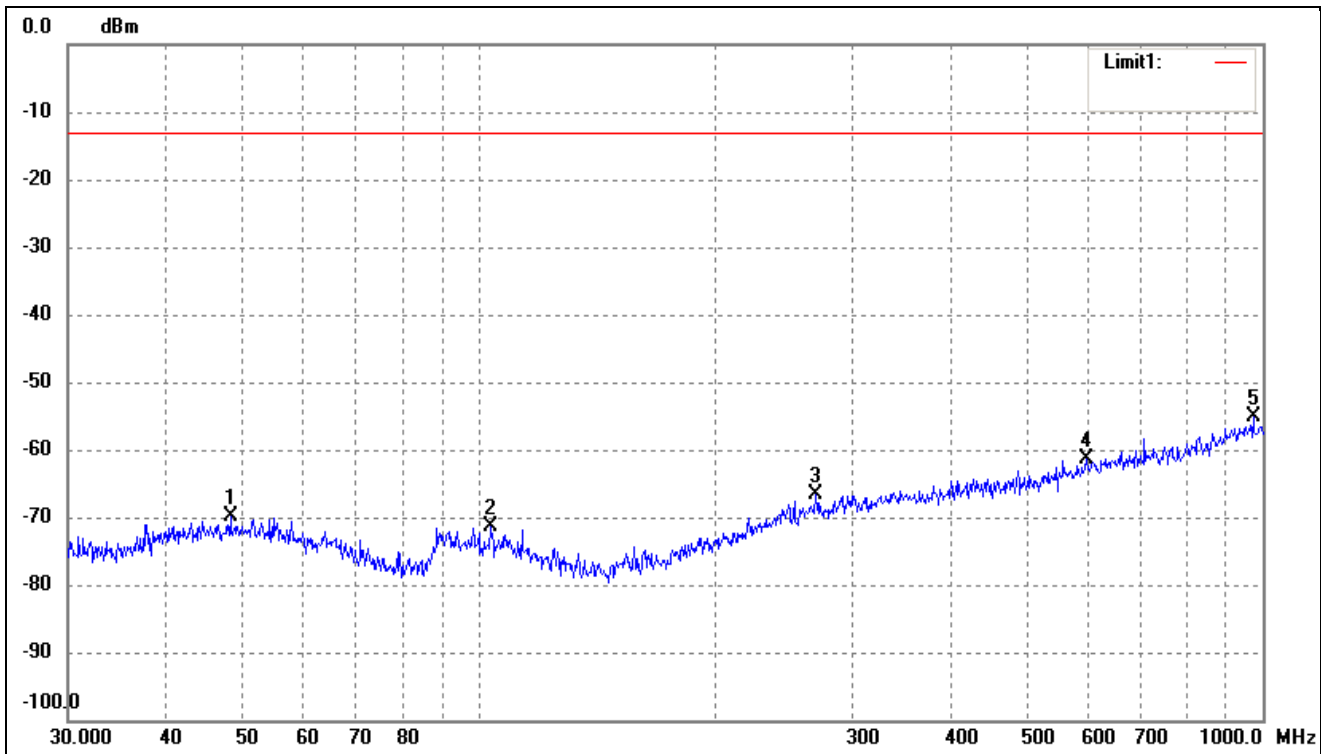

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	48.3318	-69.96	0.16	-69.80	-13.00	-56.80	ERP
2	103.8055	-69.74	-1.68	-71.42	-13.00	-58.42	ERP
3	269.4284	-69.43	2.72	-66.71	-13.00	-53.71	ERP
4	595.1329	-69.78	8.45	-61.33	-13.00	-48.33	ERP
5	972.3374	-68.95	13.74	-55.21	-13.00	-42.21	ERP


Note: Margin= (Reading+ Correct)- Limit

Test Channel	WCDMA Band V	Polarity:	Horizontal
--------------	--------------	-----------	------------

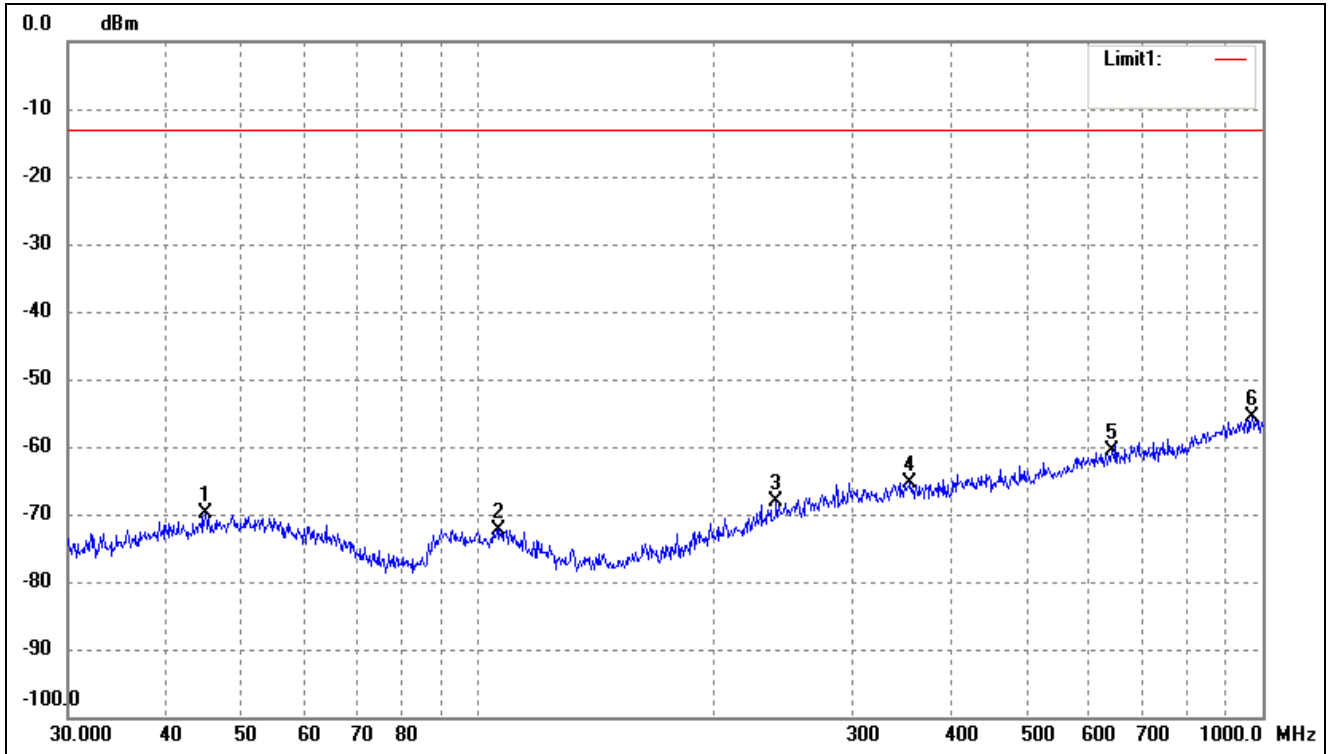

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	44.9006	-69.83	-0.15	-69.98	-13.00	-56.98	ERP
2	106.0126	-70.57	-1.68	-72.25	-13.00	-59.25	ERP
3	239.9874	-70.00	1.82	-68.18	-13.00	-55.18	ERP
4	355.4273	-70.05	4.77	-65.28	-13.00	-52.28	ERP
5	642.8613	-69.84	9.19	-60.65	-13.00	-47.65	ERP
6	968.9338	-69.36	13.66	-55.70	-13.00	-42.70	ERP


Test Channel	WCDMA Band V	Polarity:	Vertical
--------------	--------------	-----------	----------

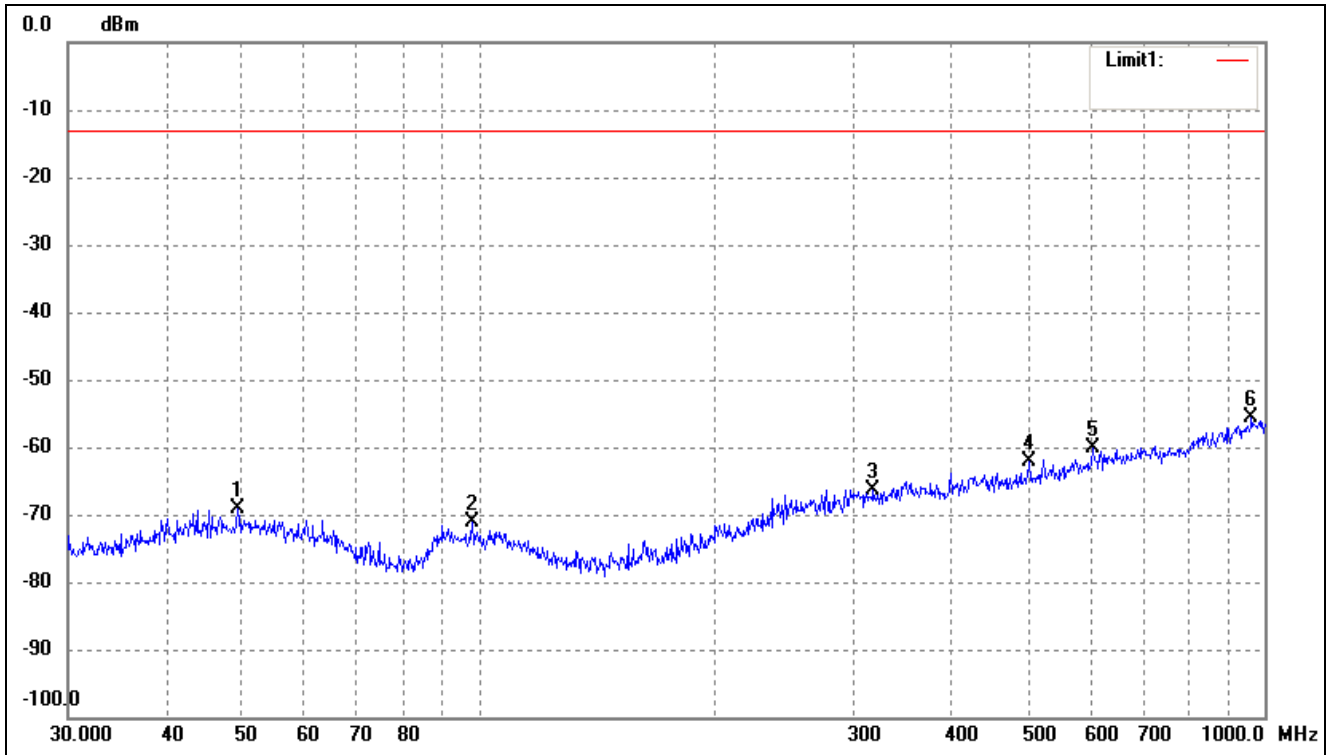

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	49.3594	-69.32	0.19	-69.13	-13.00	-56.13	ERP
2	98.1419	-69.00	-2.22	-71.22	-13.00	-58.22	ERP
3	317.7011	-69.91	3.59	-66.32	-13.00	-53.32	ERP
4	501.1790	-68.54	6.38	-62.16	-13.00	-49.16	ERP
5	603.5392	-68.53	8.52	-60.01	-13.00	-47.01	ERP
6	962.1623	-69.32	13.64	-55.68	-13.00	-42.68	ERP




Test Channel	WCDMA Band IV	Polarity:	Horizontal
--------------	---------------	-----------	------------

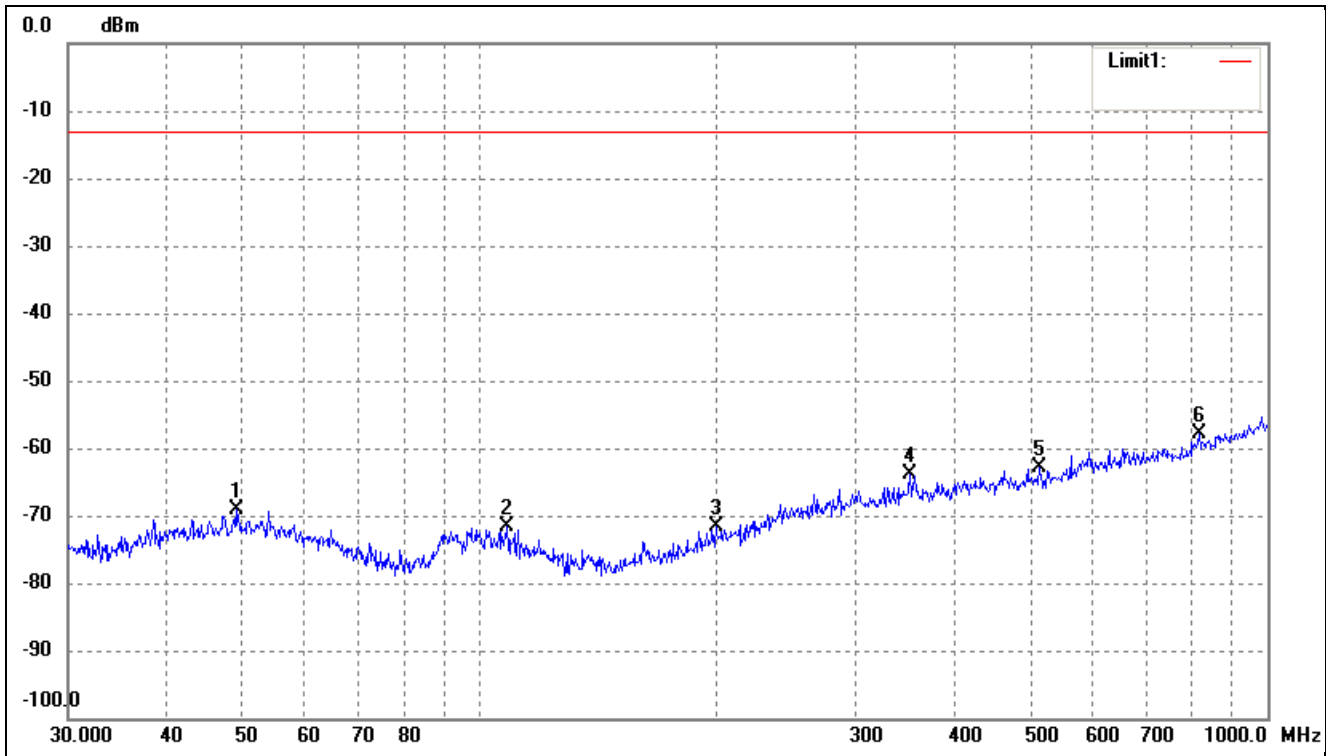

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	49.0145	-69.29	0.17	-69.12	-13.00	-56.12	ERP
2	108.2667	-69.68	-1.90	-71.58	-13.00	-58.58	ERP
3	199.2855	-70.15	-1.47	-71.62	-13.00	-58.62	ERP
4	351.7079	-68.78	4.88	-63.90	-13.00	-50.90	ERP
5	513.6331	-69.31	6.32	-62.99	-13.00	-49.99	ERP
6	818.8341	-69.40	11.42	-57.98	-13.00	-44.98	ERP


Test Channel	WCDMA Band IV	Polarity:	Vertical
--------------	---------------	-----------	----------

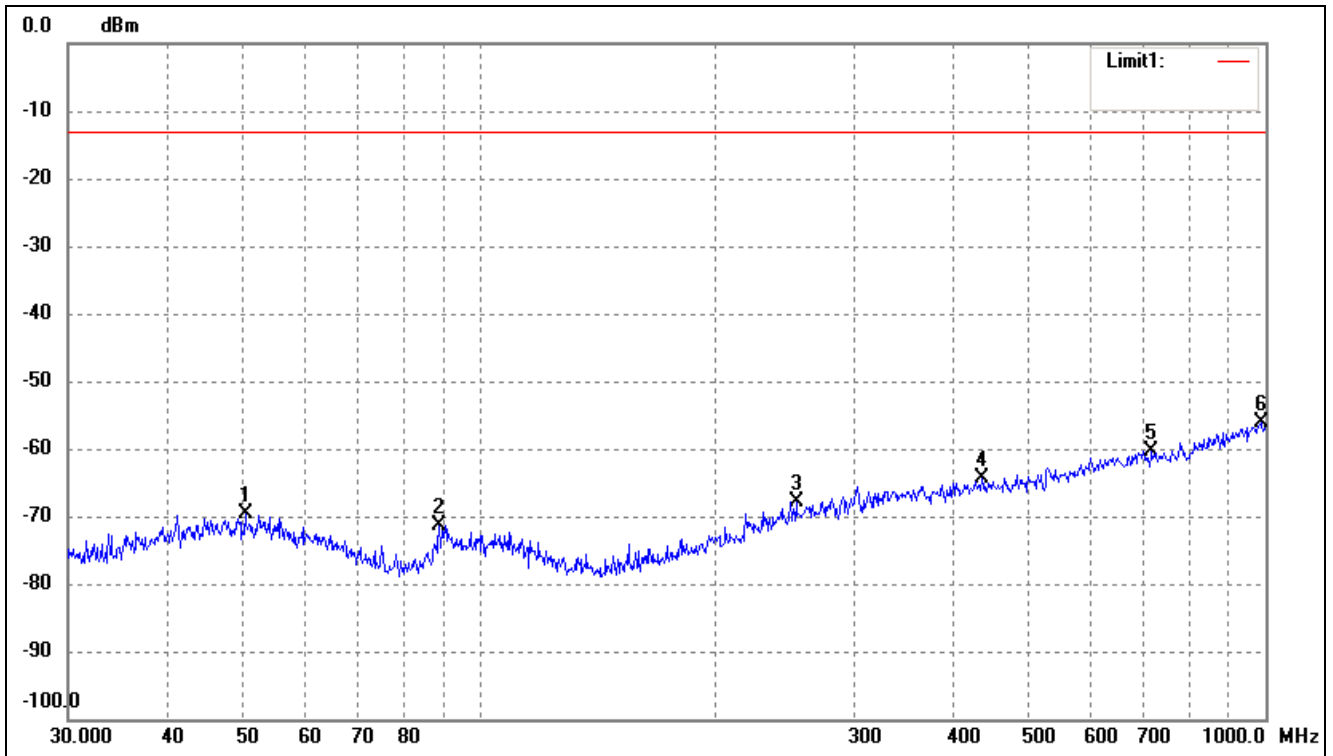

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	50.4089	-69.86	0.20	-69.66	-13.00	-56.66	ERP
2	88.9639	-69.07	-2.41	-71.48	-13.00	-58.48	ERP
3	252.9482	-69.91	2.13	-67.78	-13.00	-54.78	ERP
4	435.5898	-70.01	5.72	-64.29	-13.00	-51.29	ERP
5	716.6820	-70.11	9.86	-60.25	-13.00	-47.25	ERP
6	986.0717	-70.08	13.96	-56.12	-13.00	-43.12	ERP


Note: Margin= (Reading+ Correct)- Limit

Test Channel	WCDMA Band II	Polarity:	Horizontal
--------------	---------------	-----------	------------

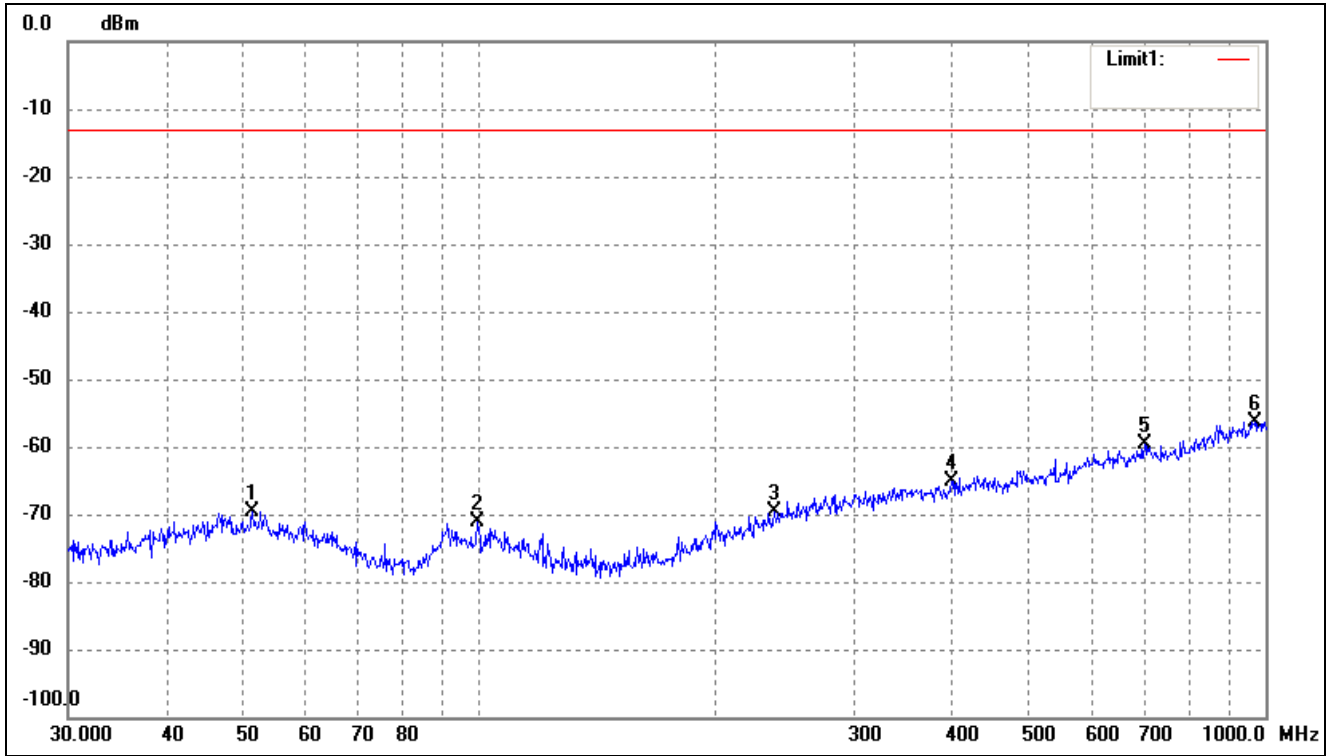

No.	Frequency (MHz)	Reading (dBm)	Correct (dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	51.4807	-69.77	0.21	-69.56	-13.00	-56.56	ERP
2	99.5281	-69.10	-2.06	-71.16	-13.00	-58.16	ERP
3	237.4760	-71.15	1.45	-69.70	-13.00	-56.70	ERP
4	399.0302	-70.09	5.01	-65.08	-13.00	-52.08	ERP
5	701.7610	-69.71	10.03	-59.68	-13.00	-46.68	ERP
6	968.9338	-70.03	13.66	-56.37	-13.00	-43.37	ERP

Test Channel	WCDMA Band II	Polarity:	Vertical
--------------	---------------	-----------	----------

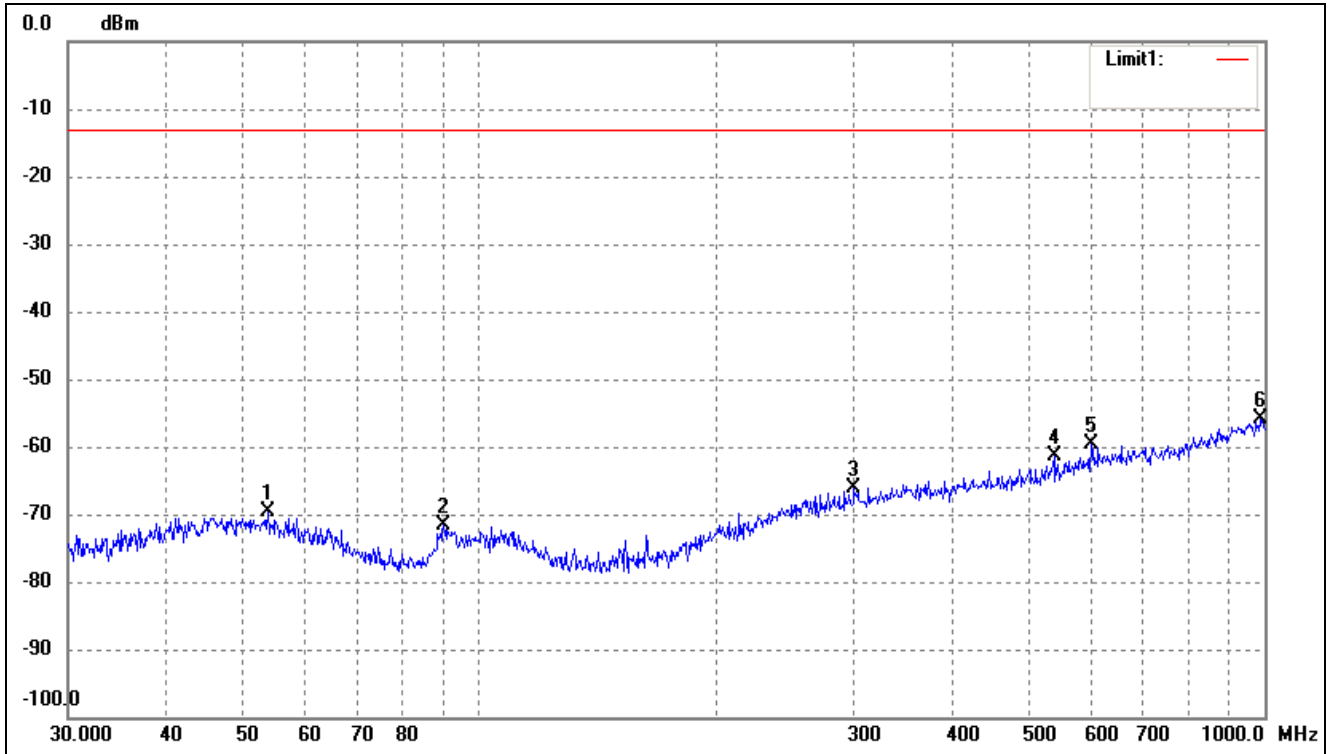

No.	Frequency (MHz)	Reading (dBm)	Correct Factor(dB)	Result (dBm)	Limit (dBm)	Margin (dB)	Remark
1	53.8818	-69.61	-0.05	-69.66	-13.00	-56.66	ERP
2	90.2205	-69.95	-1.64	-71.59	-13.00	-58.59	ERP
3	300.3673	-69.69	3.65	-66.04	-13.00	-53.04	ERP
4	539.4775	-68.33	6.86	-61.47	-13.00	-48.47	ERP
5	601.4265	-68.03	8.48	-59.55	-13.00	-46.55	ERP
6	986.0717	-69.72	13.96	-55.76	-13.00	-42.76	ERP

Note:  $Margin = (Reading + Correct) - Limit$

- Spurious Emissions Above 1GHz
- For Cellular Band\_GSM850 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (824.2MHz)						
1648.4	-35.88	4.94	-30.94	-13.00	-17.94	H
2472.6	-43.77	8.46	-35.31	-13.00	-22.31	H
1648.4	-36.13	4.94	-31.19	-13.00	-18.19	V
2472.6	-43.99	8.46	-35.53	-13.00	-22.53	V
Middle Channel (836.6MHz)						
1673.2	-36.68	4.94	-31.74	-13.00	-18.74	H
2509.8	-44.20	8.46	-35.74	-13.00	-22.74	H
1673.2	-35.30	4.94	-30.36	-13.00	-17.36	V
2509.8	-46.27	8.46	-37.81	-13.00	-24.81	V
High Channel (848.8MHz)						
1697.6	-34.38	5.25	-29.13	-13.00	-16.13	H
2546.4	-41.96	8.57	-33.39	-13.00	-20.39	H
1697.6	-37.06	5.25	-31.81	-13.00	-18.81	V
2546.4	-43.99	8.57	-35.42	-13.00	-22.42	V

- For PCS Band\_GSM1900 Mode

Frequency	Reading	Correct	Result	Limit	Margin	Polar
(MHz)	(dBm)	dB	(dBm)	(dBm)	(dB)	H/V
Low Channel (1850.2MHz)						
3700.4	-41.24	10.54	-30.70	-13.00	-17.70	H
5550.6	-48.48	13.37	-35.11	-13.00	-22.11	H
3700.4	-40.08	10.54	-29.54	-13.00	-16.54	V
5550.6	-46.80	13.37	-33.43	-13.00	-20.43	V
Middle Channel (1880MHz)						
3760.0	-40.97	10.64	-30.33	-13.00	-17.33	H
5640.0	-47.74	13.54	-34.20	-13.00	-21.20	H
3760.0	-41.15	10.64	-30.51	-13.00	-17.51	V
5640.0	-47.21	13.54	-33.67	-13.00	-20.67	V
High Channel (1909.8MHz)						
3819.6	-40.34	10.74	-29.60	-13.00	-16.60	H
5729.4	-50.26	13.71	-36.55	-13.00	-23.55	H
3819.6	-39.42	10.74	-28.68	-13.00	-15.68	V
5729.4	-47.49	13.71	-33.78	-13.00	-20.78	V

## ➤ For WCDMA Band V Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (826.4MHz)						
1652.8	-36.77	4.94	-31.83	-13.00	-18.83	H
2479.2	-44.30	8.46	-35.84	-13.00	-22.84	H
1652.8	-37.26	4.94	-32.32	-13.00	-19.32	V
2479.2	-41.79	8.46	-33.33	-13.00	-20.33	V
Middle Channel (836.6MHz)						
1672.8	-35.67	5.11	-30.56	-13.00	-17.56	H
2509.2	-44.56	8.54	-36.02	-13.00	-23.02	H
1672.8	-38.34	5.11	-33.23	-13.00	-20.23	V
2509.2	-43.78	8.54	-35.24	-13.00	-22.24	V
High Channel (846.6MHz)						
1693.2	-35.35	5.25	-30.10	-13.00	-17.10	H
2539.8	-43.39	8.57	-34.82	-13.00	-21.82	H
1693.2	-36.00	5.25	-30.75	-13.00	-17.75	V
2539.8	-42.52	8.57	-33.95	-13.00	-20.95	V

## ➤ For WCDMA Band IV Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1712.4MHz)						
3424.8	-34.61	9.87	-24.74	-13.00	-11.74	H
5137.2	-36.82	13.02	-23.80	-13.00	-10.80	H
3424.8	-33.16	9.87	-23.29	-13.00	-10.29	V
5137.2	-35.06	13.02	-22.04	-13.00	-9.04	V
Middle Channel (1732.4MHz)						
3464.8	-36.86	9.97	-26.89	-13.00	-13.89	H
5197.2	-40.64	12.54	-28.10	-13.00	-15.10	H
3464.8	-36.29	9.97	-26.32	-13.00	-13.32	V
5197.2	-40.62	12.54	-28.08	-13.00	-15.08	V
High Channel (1752.6MHz)						
3505.2	-35.66	10.03	-25.63	-13.00	-12.63	H
5257.8	-37.62	14.03	-23.59	-13.00	-10.59	H
3505.2	-34.89	10.03	-24.86	-13.00	-11.86	V
5257.8	-36.95	14.03	-22.92	-13.00	-9.92	V

## ➤ For WCDMA Band II Mode

Frequency (MHz)	Reading (dBm)	Correct dB	Result (dBm)	Limit (dBm)	Margin (dB)	Polar H/V
Low Channel (1852.4MHz)						
3704.8	-36.90	10.17	-26.73	-13.00	-13.73	H
5557.2	-42.82	14.69	-28.13	-13.00	-15.13	H
3704.8	-37.91	10.17	-27.74	-13.00	-14.74	V
5557.2	-40.94	14.69	-26.25	-13.00	-13.25	V
Middle Channel (1880MHz)						
3760.8	-37.58	10.26	-27.32	-13.00	-14.32	H
5640.0	-44.11	14.78	-29.33	-13.00	-16.33	H
3760.8	-34.01	10.26	-23.75	-13.00	-10.75	V
5640.0	-44.11	14.78	-29.33	-13.00	-16.33	V
High Channel (1907.6MHz)						
3815.2	-38.17	10.59	-27.58	-13.00	-14.58	H
5722.8	-41.76	15.03	-26.73	-13.00	-13.73	H
3815.2	-37.55	10.59	-26.96	-13.00	-13.96	V
5722.8	-47.10	15.03	-32.07	-13.00	-19.07	H

Note: Result=Reading+ Correct, Margin= Result- Limit

Note: Testing is carried out with frequency rang 9kHz to the tenth harmonics, other than listed in the table above are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

---

## 9. Frequency Stability

---

### 9.1 Standard Applicable

According to §22.355, §24.235, §27.54 the limit is 2.5ppm.

### 9.2 Test Procedure

According to §2.1055, the following test procedure was performed.

The Frequency Stability is measured directly with a Frequency Domain Analyzer. Frequency Deviation in ppm is calculated from the measured peak to peak value.

The Carrier Frequency Stability over Power Supply Voltage and over Temperature is measured with a Frequency Domain Analyzer in histogram mode

### 9.3 Summary of Test Results/Plots

Note: 1. Worst case at GSM850/PCS1900/WCDMA B2/B5 middle channel

2. Normal Voltage NV=DC3.8V; Low Voltage LV=DC3.5V;High Voltage HV=DC4.35V



## ➤ Frequency stability V.S. Temperature measurement

Reference Frequency: GSM850 Middle channel=190 channel=836.6MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	71	0.0849	2.50	Pass
	-20	64	0.0765		
	-10	53	0.0634		
	0	47	0.0562		
	10	39	0.0466		
	20	34	0.0406		
	30	38	0.0454		
	40	43	0.0514		
	50	47	0.0562		
Reference Frequency: PCS1900 Middle channel=661 channel=1880MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	51	0.0271	2.50	Pass
	-20	41	0.0218		
	-10	31	0.0165		
	0	26	0.0138		
	10	22	0.0117		
	20	17	0.0090		
	30	24	0.0128		
	40	32	0.0170		
	50	37	0.0197		

Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	40	0.0478	2.50	Pass
	-20	36	0.0430		
	-10	32	0.0383		
	0	28	0.0335		
	10	25	0.0299		
	20	20	0.0239		
	30	25	0.0299		
	40	30	0.0359		
	50	35	0.0418		
Reference Frequency: WCDMA Band IV Middle channel=1412 channel=1732.4MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	75	0.0433	2.50	Pass
	-20	64	0.0369		
	-10	54	0.0312		
	0	48	0.0277		
	10	42	0.0242		
	20	38	0.0219		
	30	45	0.0260		
	40	52	0.0300		
	50	58	0.0335		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Power supplied (Vdc)	Temperature ( °C)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
NV	-30	62	0.0330	2.50	Pass
	-20	47	0.0250		
	-10	35	0.0186		
	0	31	0.0165		
	10	23	0.0122		
	20	19	0.0101		
	30	25	0.0133		
	40	31	0.0165		
	50	37	0.0197		

## ➤ Frequency stability V.S. Voltage measurement

Reference Frequency: GSM850 (GSM link) Middle channel=190 channel=836.6MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	35	0.0418	2.50	Pass
	NV	32	0.0383		
	LV	40	0.0478		
Reference Frequency: PCS1900 (GSM link) Middle channel=661 channel=1880MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	32	0.0170	2.50	Pass
	NV	25	0.0133		
	LV	32	0.0170		
Reference Frequency: WCDMA Band V Middle channel=4183 channel=836.6MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	37	0.0442	2.50	Pass
	NV	31	0.0371		
	LV	45	0.0538		
Reference Frequency: WCDMA Band IV Middle channel=1412 channel=1732.4MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	24	0.0139	2.50	Pass
	NV	20	0.0115		
	LV	29	0.0167		
Reference Frequency: WCDMA Band II Middle channel=9400 channel=1880MHz					
Temperature ( °C)	Power supplied (Vdc)	Frequency error		Limit (ppm)	Result
		Hz	ppm		
25	HV	24	0.0128	2.50	Pass
	NV	19	0.0101		
	LV	30	0.0160		

## 10. Modulation characteristics


### 10.1 Standard Applicable

According to §2.1047, Measurements required: Modulation characteristics is given below:

- (a) Voice modulated communication equipment. A curve or equivalent data showing the frequency response of the audio modulating circuit over a range of 100 to 5000 Hz shall be submitted. For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter, or of all circuitry installed between the modulation limiter and the modulated stage shall be submitted.
- (b) Equipment which employs modulation limiting. A curve or family of curves showing the percentage of modulation versus the modulation input voltage shall be supplied. The information submitted shall be sufficient to show modulation limiting capability throughout the range of modulating frequencies and input modulating signal levels employed.
- (c) Single sideband and independent sideband radiotelephone transmitters which employ a device or circuit to limit peak envelope power. A curve showing the peak envelope power output versus the modulation input voltage shall be supplied. The modulating signals shall be the same in frequency as specified in paragraph (c) of §2.1049 for the occupied bandwidth tests.
- (d) Other types of equipment. A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

### 10.2 Test Procedure

According to ANSI C63.26-2015 section 5.3.2, the following test setup was performed.

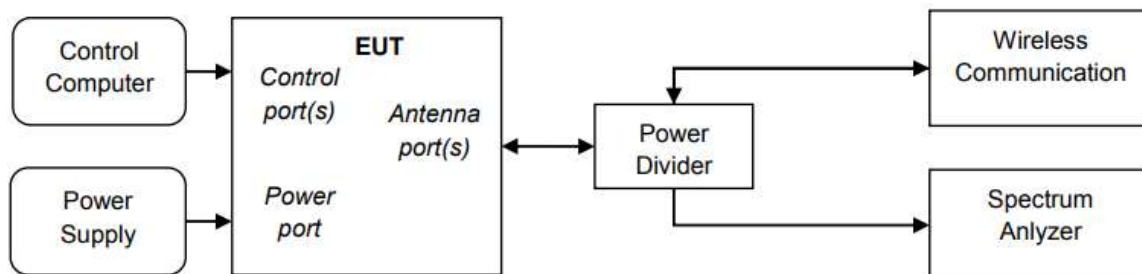


### 10.3 Summary of Test Results/Plots


Only the worst case was selected to record

## GSM850

Middle Channel-GMSK

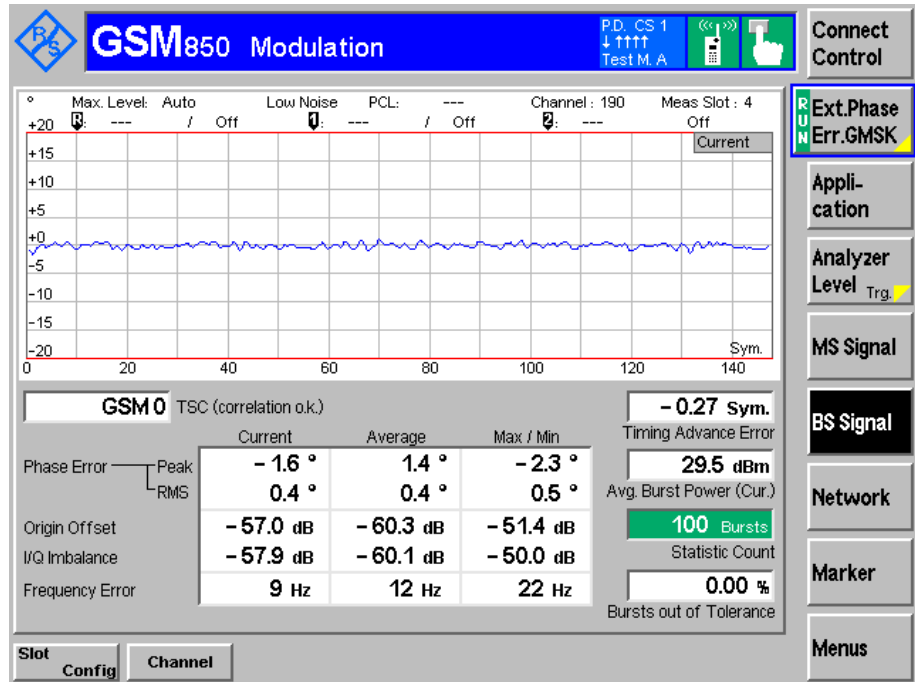


Middle Channel-8PSK

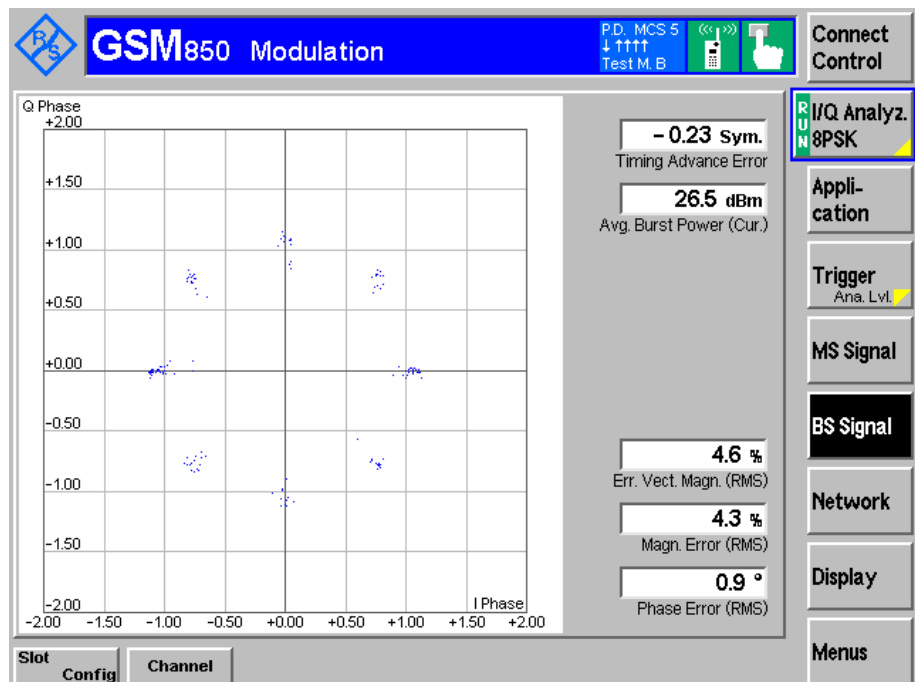


## GSM1900

Middle Channel-GMSK

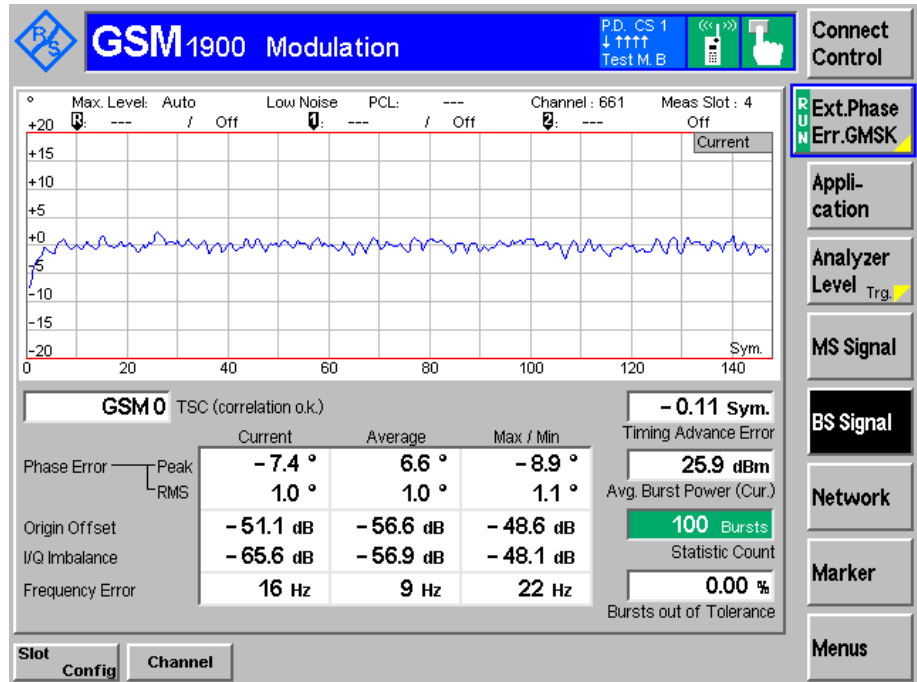


Middle Channel-8PSK

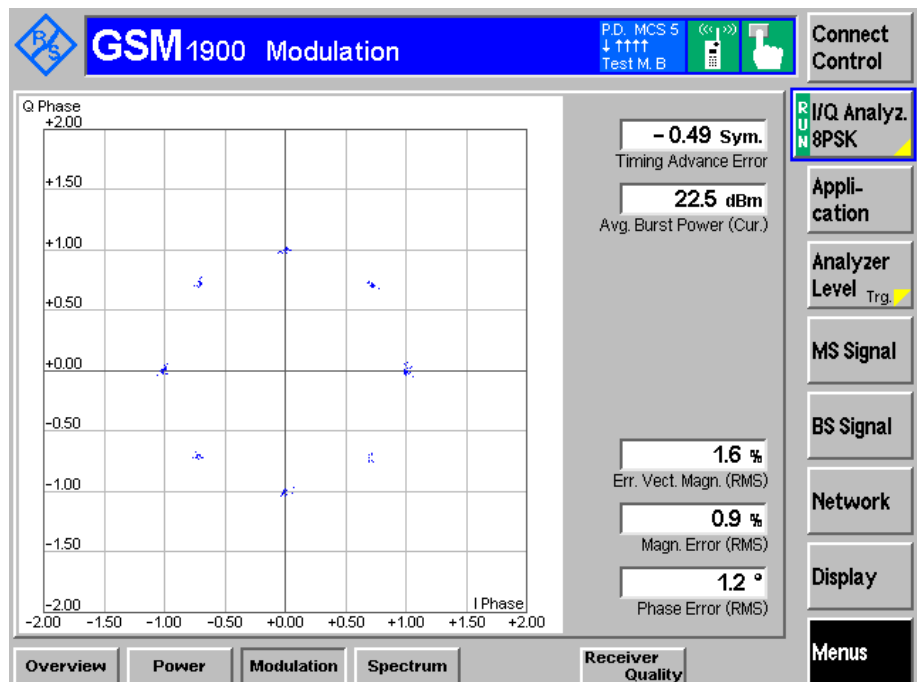

<p>WCDMA B5</p>	<p><b>WCDMA FDD Band V Modulation</b></p> <p>Measurement Length: 2560 Chip</p> <p>Q Phase vs I Phase plot showing constellation points.</p> <p>Key Metrics:</p> <ul style="list-style-type: none"> <li>Err. Vect. Magn. (RMS): 2.1 %</li> <li>Magn. Error (RMS): 1.3 %</li> <li>Phase Error (RMS): 1.0 °</li> <li>Slot Number: 0</li> <li>UE Power: 21.27 dBm</li> <li>I/Q Origin Offset: -71.26 dB</li> <li>I/Q Imbalance: -62.40 dB</li> </ul> <p>Buttons: RF Channel, RF Frequency, RF Freq.Offset, Release 5 Guard Per., Connect Control, I/Q Analyz. WCDMA, Applic. 1, Analyzer Lev. Trigg., Ana.Set. UE Signal, BS Sig. Lvl. HSDPA HSUPA, BS Signal Settings, Display, Menu.</p>
<p>WCDMA B4</p>	<p><b>WCDMA FDD Band IV Modulation</b></p> <p>Measurement Length: 2560 Chip</p> <p>Q Phase vs I Phase plot showing constellation points.</p> <p>Key Metrics:</p> <ul style="list-style-type: none"> <li>Err. Vect. Magn. (RMS): 3.2 %</li> <li>Magn. Error (RMS): 2.2 %</li> <li>Phase Error (RMS): 1.4 °</li> <li>Slot Number: 0</li> <li>UE Power: -19.54 dBm</li> <li>I/Q Origin Offset: -53.12 dB</li> <li>I/Q Imbalance: -48.81 dB</li> </ul> <p>Buttons: RF Channel, RF Frequency, RF Freq.Offset, Release 5 Guard Per., Connect Control, I/Q Analyz. WCDMA, Applic. 1, Analyzer Lev. Trigg., Ana.Set. UE Signal, BS Sig. Lvl. HSDPA HSUPA, BS Signal Settings, Display, Menu.</p>

WCDMA B2

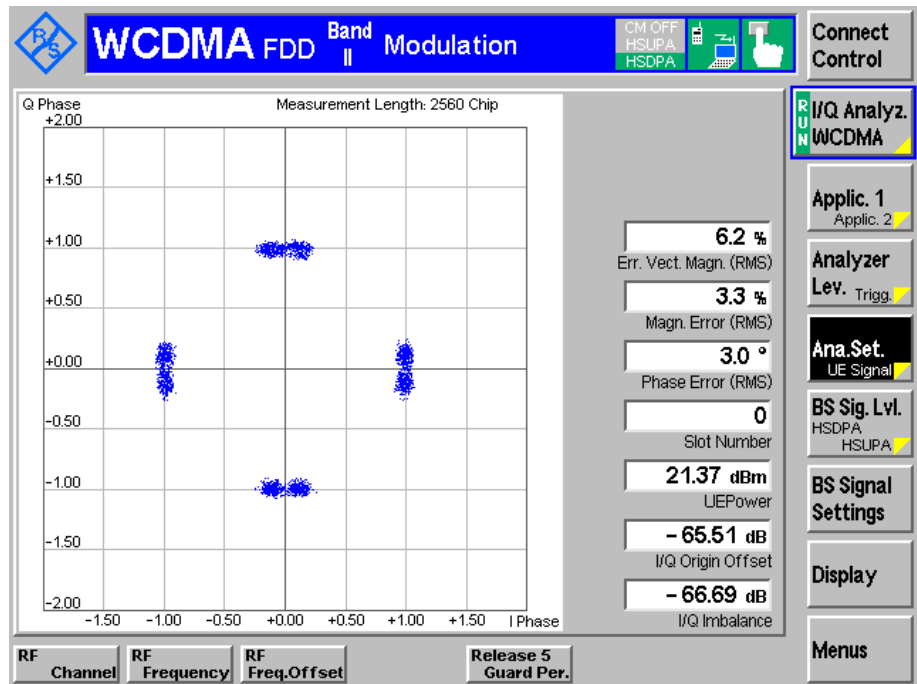

\*\*\*\*\* END OF REPORT \*\*\*\*\*