



# TEST REPORT

Report No. ....	<b>CHTEW20080090</b>	Report Verification: 
Project No. ....	<b>SHT2002002914EW</b>	
FCC ID ....	<b>2A1V9-AW2L</b>	
Applicant's name ....	<b>Beijing Visual World Technology Co., Ltd.</b>	
Address.....	501 & 5F,102 No, Building No. 2, No 6 Jiuxianqiao Rd, Chaoyang District, Beijing	
Manufacturer.....	Beijing Visual World Technology Co., Ltd.	
Address.....	501 & 5F,102 No, Building No. 2, No 6 Jiuxianqiao Rd, Chaoyang District, Beijing	
Test item description .....	<b>360 Smart Camera Outdoor Version</b>	
Trade Mark .....	+360	
Model/Type reference.....	AW2L	
Listed Model(s) .....	AW2LAS11, AW2LAS12, AW2LAS14, AW2LAS15, AW2LAS16 AW2LAS51, AW2LAS52, AW2LAT00, AW2LNA19, AW2LEU00 AW2LAS00, AW2LNA00	
Standard .....	<b>FCC CFR Title 47 Part 15 Subpart C Section 15.247</b>	
Date of receipt of test sample.....	Mar. 03, 2020	
Date of testing.....	Mar. 03, 2020- Aug. 11, 2020	
Date of issue.....	Aug. 12, 2020	
Result.....	<b>PASS</b>	

Compiled by ( Position+Printed name+Signature):	File administrator Silvia Li	
Supervised by (Position+Printed name+Signature):	Project Engineer Xiao Cheng	
Approved by (Position+Printed name+Signature):	RF Manager Hans Hu	

Testing Laboratory Name .....	<b>Shenzhen Huatongwei International Inspection Co., Ltd.</b>
Address.....	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

The test report merely correspond to the test sample.

## Contents

<u>1.</u>	<u>TEST STANDARDS AND REPORT VERSION</u>	3
1.1.	Test Standards	3
1.2.	Report version	3
<u>2.</u>	<u>TEST DESCRIPTION</u>	4
<u>3.</u>	<u>SUMMARY</u>	5
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Radio Specification Description	5
3.4.	Testing Laboratory Information	6
<u>4.</u>	<u>TEST CONFIGURATION</u>	7
4.1.	Test frequency list	7
4.2.	Descriptions of Test mode	7
4.3.	Test mode	7
4.4.	Support unit used in test configuration and system	8
4.5.	Testing environmental condition	8
4.6.	Measurement uncertainty	8
4.7.	Equipment Used during the Test	9
<u>5.</u>	<u>TEST CONDITIONS AND RESULTS</u>	11
5.1.	Antenna Requirement	11
5.2.	AC Conducted Emission	12
5.3.	Peak Output Power	15
5.4.	Power Spectral Density	16
5.5.	6dB bandwidth	17
5.6.	99% Occupied Bandwidth	18
5.7.	Duty Cycle	19
5.8.	Conducted Band edge and Spurious Emission	20
5.9.	Radiated Band edge Emission	22
5.10.	Radiated Spurious Emission	27
<u>6.</u>	<u>TEST SETUP PHOTOS</u>	35
<u>7.</u>	<u>EXTERANAL AND INTERNAL PHOTOS</u>	37
<u>8.</u>	<u>APPENDIX REPORT</u>	42

## 1. TEST STANDARDS AND REPORT VERSION

### 1.1. Test Standards

The tests were performed according to following standards:

- [FCC Rules Part 15.247](#): Frequency Hopping, Direct Spread Spectrum and Hybrid Systems that are in operation within the bands of 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz
- [ANSI C63.10:2013](#): American National Standard for Testing Unlicensed Wireless Devices
- [KDB 558074 D01 15.247 Meas Guidance v05r02](#): Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices Operating under Section 15.247 of The FCC Rules
- [KDB662911 D01 Multiple Transmitter Output v02r01](#): Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)
- [KDB662911 D02 MIMO with Cross-Polarized Antennas v01](#): MIMO with Cross-Polarized Antenna

### 1.2. Report version

Revision No.	Date of issue	Description
N/A	2020-08-12	Original

## 2. TEST DESCRIPTION

Report clause	Test Items	Standard Requirement	Result
5.1	Antenna Requirement	15.203/15.247(c)	PASS
5.2	AC Conducted Emission	15.207	PASS
5.3	Peak Output Power	15.247(b)(3)	PASS
5.4	Power Spectral Density	15.247(e)	PASS
5.5	6dB Bandwidth	15.247(a)(2)	PASS
5.6	99% Occupied Bandwidth	-	PASS <sup>*1</sup>
5.7	Duty cycle	-	PASS <sup>*1</sup>
5.8	Conducted Band Edge and Spurious Emission	15.247(d)/15.205	PASS
5.9	Radiated Band Edge Emission	15.205/15.209	PASS
5.10	Radiated Spurious Emission	15.247(d)/15.205/15.209	PASS

Note:

- The measurement uncertainty is not included in the test result.
- \*1: No requirement on standard, only report these test data.

### 3. **SUMMARY**

#### 3.1. Client Information

Applicant:	Beijing Visual World Technology Co., Ltd.
Address:	501 & 5F, 102 No, Building No. 2, No 6 Jiuxianqiao Rd, Chaoyang District, Beijing
Manufacturer:	Beijing Visual World Technology Co., Ltd.
Address:	501 & 5F, 102 No, Building No. 2, No 6 Jiuxianqiao Rd, Chaoyang District, Beijing

#### 3.2. Product Description

Name of EUT:	360 Smart Camera Outdoor Version
Trade Mark:	+360
Model No.:	AW2L
Listed Model(s):	AW2LAS11, AW2LAS12, AW2LAS14, AW2LAS15, AW2LAS16 AW2LAS51, AW2LAS52, AW2LAT00, AW2LNA19, AW2LEU00 AW2LAS00, AW2LNA00
Power supply:	DC 12V====1A
Hardware version:	HI3516EV200_V360P3_D901_QIANGj
Software version:	AW2LA1_A_20191205.7.2.11

#### 3.3. Radio Specification Description

Support type <sup>2</sup> :	802.11b, 802.11g, 802.11n(HT20), 802.11n(HT40)
Modulation:	DSSS for 802.11b OFDM for 802.11g/802.11n(HT20)/802.11n(HT40)
Operation frequency:	2412MHz~2462MHz for 802.11b/802.11g/802.11n(HT20) 2422MHz~2452MHz for 802.11n(HT40)
Channel number:	11 for 802.11b/802.11g/802.11n(HT20) 7 for 802.11n(HT40)
Channel separation:	5MHz
Antenna type:	extemal pingtail antenna
Antenna gain:	3.5dBi

Note:

<sup>2</sup>: only show the RF function associated with this report.

### 3.4. Testing Laboratory Information

Laboratory Name	Shenzhen Huatongwei International Inspection Co., Ltd.	
Laboratory Location	1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China	
Qualifications	Type	Accreditation Number
	CNAS	L1225
	A2LA	3902.01
	FCC	762235
	Canada	5377A

## 4. TEST CONFIGURATION

### 4.1. Test frequency list

According to section 15.31(m), regards to the operating frequency range over 10 MHz, must select three channels which were tested. The Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, please see the below blue front.

802.11b/802.11g/802.11n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	03	2422
02	2417	04	2427
.. :	.. :	.. :	.. :
06	2437	06	2437
.. :	.. :	.. :	.. :
10	2457	08	2447
11	2462	09	2452

### 4.2. Descriptions of Test mode

Preliminary tests were performed in different data rates, final test modes are considering the modulation and worse data rates as below table.

Modulation	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0

### 4.3. Test mode

For RF test items
The engineering test program was provided and enabled to make EUT continuous transmit.
For AC power line conducted emissions:
The EUT was set to connect with the WLAN AP under large package sizes transmission.
For Radiated spurious emissions test item:
The engineering test program was provided and enabled to make EUT continuous transmit. The EUT in each of three orthogonal axis emissions had been tested, but only the worst case (X axis) data Recorded in the report.

#### 4.4. Support unit used in test configuration and system

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

The following peripheral devices and interface cables were connected during the measurement:

Whether support unit is used?					
<input checked="" type="checkbox"/> No					
Item	Equipement	Trade Name	Model No.	FCC ID	Power cord
1					
2					

#### 4.5. Testing environmental condition

Type	Requirement	Actual
Temperature:	15~35°C	25°C
Relative Humidity:	25~75%	50%
Air Pressure:	860~1060mbar	1000mbar

#### 4.6. Measurement uncertainty

Test Item	Measurement Uncertainty
AC Conducted Emission (150kHz~30MHz)	3.02 dB
Radiated Emission (30MHz~1000MHz)	4.90 dB
Radiated Emissions (1GHz~25GHz)	4.96 dB
Peak Output Power	0.51 dB
Power Spectral Density	0.51 dB
Conducted Spurious Emission	0.51 dB
6dB Bandwidth	70 Hz

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .

## 4.7. Equipment Used during the Test

● Conducted Emission							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Shielded Room	Albatross projects	HTWE0114	N/A	N/A	2018/09/28	2023/09/27
●	EMI Test Receiver	R&S	HTWE0111	ESCI	101247	2019/10/26	2020/10/25
●	Artificial Mains	SCHWARZBECK	HTWE0113	NNLK 8121	573	2019/10/23	2020/10/22
●	Pulse Limiter	R&S	HTWE0033	ESH3-Z2	100499	2019/10/23	2020/10/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0113-02	ENVIROFLE_X_142	EF-NM-BNCM-2M	2019/10/23	2020/10/22
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-6th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0127	SAC-3m-02	C11121	2018/09/30	2021/09/29
●	EMI Test Receiver	R&S	HTWE0099	ESCI	100900	2019/10/26	2020/10/25
●	Loop Antenna	R&S	HTWE0170	HFH2-Z2	100020	2018/04/02	2021/04/01
●	Ultra-Broadband Antenna	SCHWARZBECK	HTWE0119	VULB9163	546	2018/04/04	2021/04/03
●	Pre-Amplifier	SCHWARZBECK	HTWE0295	BBV 9742	N/A	2019/11/14	2020/11/13
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-01	N/A	N/A	2019/08/21	2020/08/20
●	RF Connection Cable	HUBER+SUHNER	HTWE0062-02	SUCOFLEX 104	501184/4	2020/05/27	2021/05/26
●	Test Software	R&S	N/A	ES-K1	N/A	N/A	N/A

● Radiated emission-7th test site							
Used	Test Equipment	Manufacturer	Equipment No.	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Semi-Anechoic Chamber	Albatross projects	HTWE0122	SAC-3m-01	N/A	2018/09/27	2021/09/26
●	Spectrum Analyzer	R&S	HTWE0098	FSP40	100597	2019/10/26	2020/10/25
●	Horn Antenna	SCHWARZBECK	HTWE0126	9120D	1011	2020/04/01	2023/03/31
●	Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	25841	2018/10/11	2021/10/10
●	Broadband Horn Antenna	SCHWARZBECK	HTWE0103	BBHA9170	BBHA9170472	2018/10/11	2021/10/10
●	Pre-amplifier	CD	HTWE0071	PAP-0102	12004	2019/11/14	2020/11/13
●	Broadband Pre-amplifier	SCHWARZBECK	HTWE0201	BBV 9718	9718-248	2020/05/23	2021/05/22
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-01	6m 18GHz S Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-02	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-03	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0120-04	6m 3GHz RG Serisa	N/A	2020/05/10	2021/05/09
●	RF Connection Cable	HUBER+SUHNER	HTWE0121-01	6m 18GHz S Serisa	N/A	2020/05/10	2021/05/09
●	Test Software	Audix	N/A	E3	N/A	N/A	N/A

● RF Conducted Method						
Used	Test Equipment	Manufacturer	Model No.	Serial No.	Last Cal. Date (YY-MM-DD)	Next Cal. Date (YY-MM-DD)
●	Signal and spectrum Analyzer	R&S	FSV40	100048	2019/10/26	2020/10/25
●	Spectrum Analyzer	Agilent	N9020A	MY50510187	2019/10/26	2020/10/25
●	Power Meter	Anritsu	ML249A	N/A	2019/10/26	2020/10/25
○	Radio communication tester	R&S	CMW500	137688-Lv	2019/10/26	2020/10/25

## 5. TEST CONDITIONS AND RESULTS

### 5.1. Antenna Requirement

#### Requirement

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

##### **FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1)(i):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

#### TEST RESULT

Passed       Not Applicable

The product has two external antennas, both two are 3.5dBi antenna gain, and the product is a CDD device with the same gain, according to KDB 662911 D01 section F, the Directional gain=Gant + Array gain

For power spectral density measurements on all devices,

Array gain=10log(Nant/Nss) dB,

So the Directional gain=3.5+10log(2/2)=3.5dBi which is less than 6 dBi requirement

For power measurements on IEEE 802.11 devices,

Array gain=0 dB for Nant≤4

So the Directional gain=3.5+0=5dBi which is less than 6 dBi requirement,please refer to the below antenna photo.



## 5.2. AC Conducted Emission


### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.207

Frequency range (MHz)	Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\* Decreases with the logarithm of the frequency.

### TEST CONFIGURATION

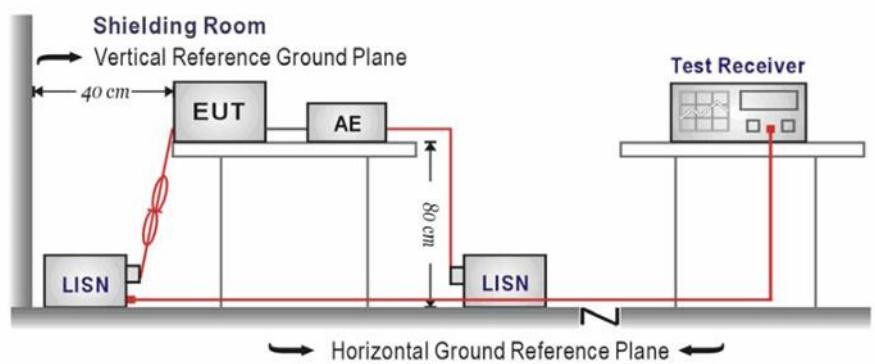

### TEST PROCEDURE

1. The EUT was setup according to ANSI C63.10 requirements.
2. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface.
3. The EUT and simulators are connected to the main power through a line impedances stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment.
4. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs)
5. Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.
6. The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.
7. Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.
8. During the above scans, the emissions were maximized by cable manipulation.


### TEST MODE:


Please refer to the clause 4.2

### TEST RESULT

Passed

Not Applicable

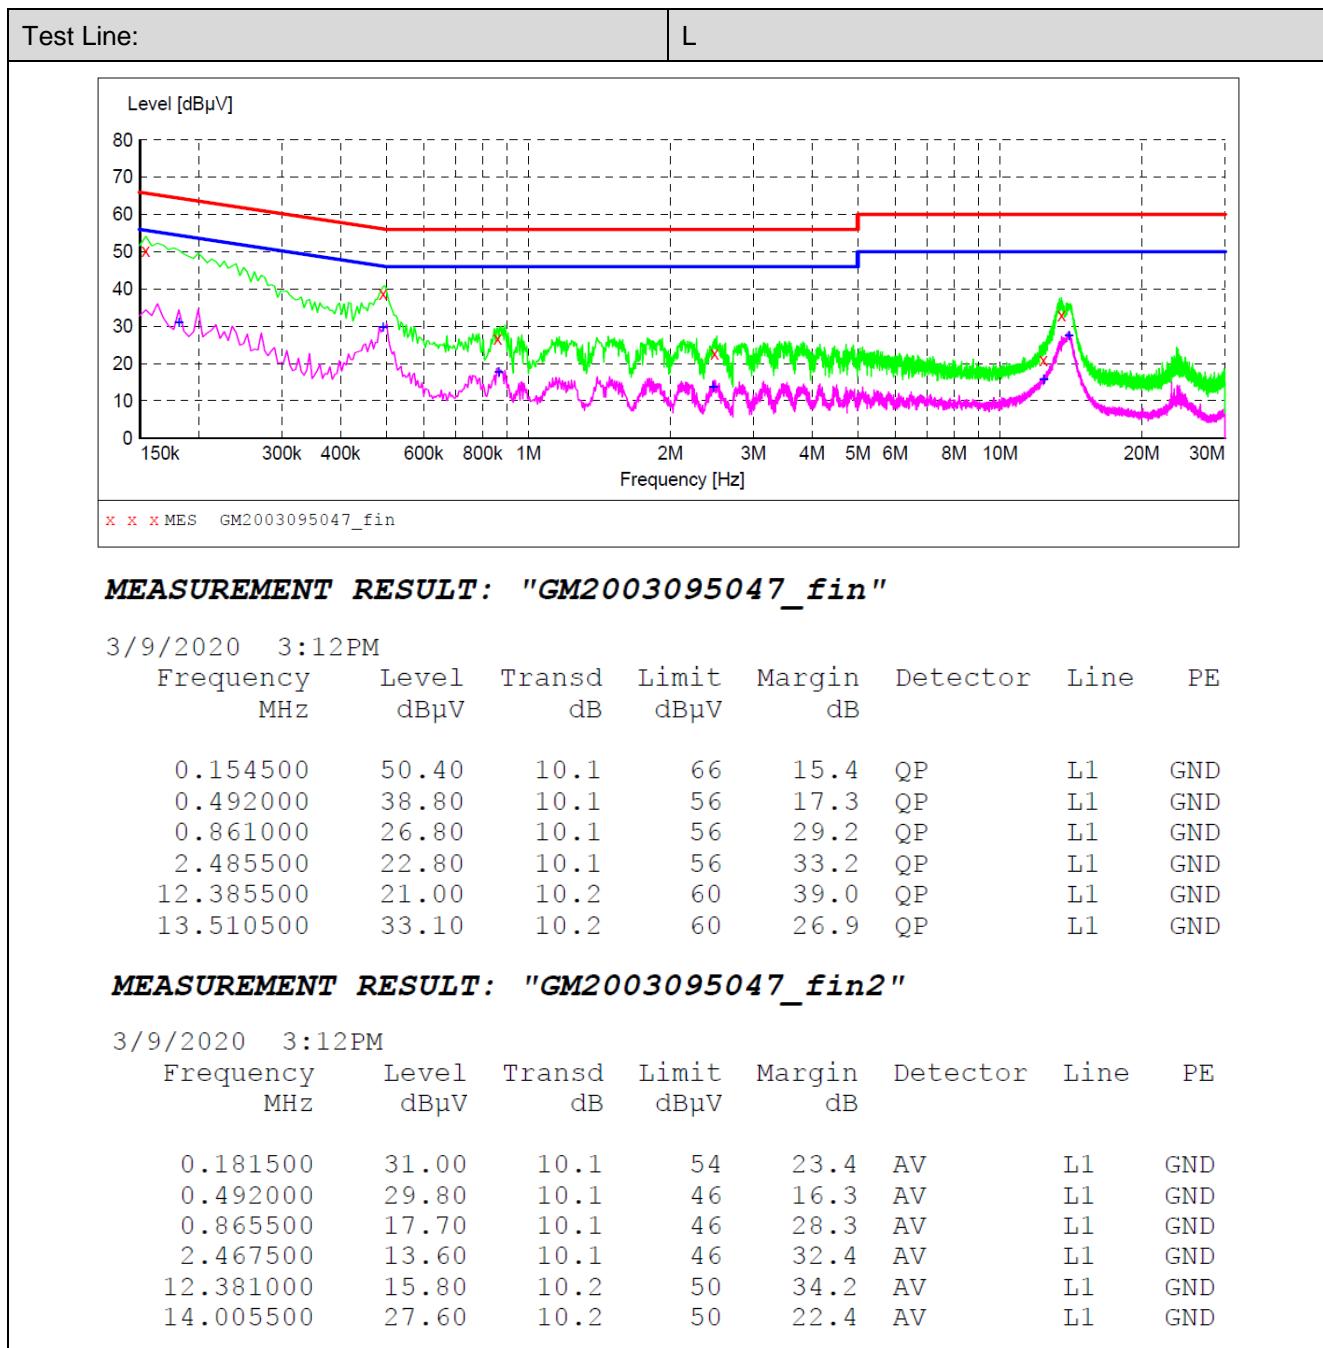

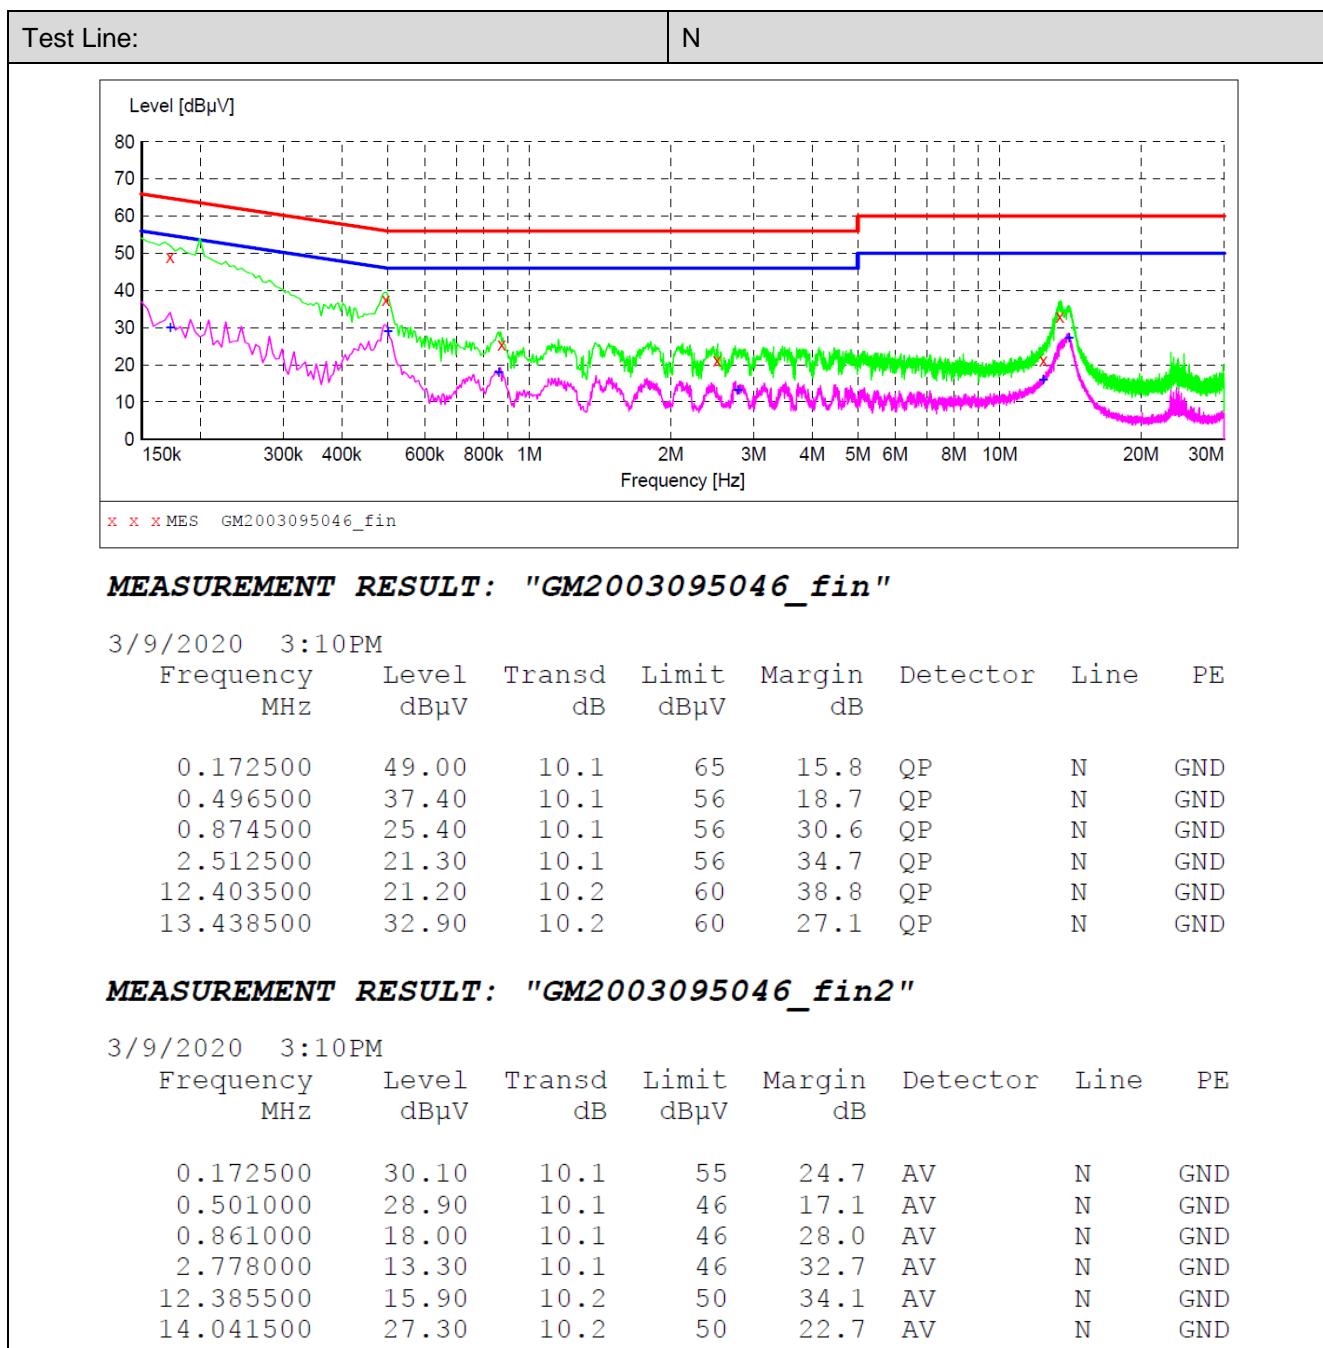


### 5.3. Peak Output Power

#### LIMIT

FCC CFR Title 47 Part 15 Subpart C Section 15.247 (b)(3): 30dBm

#### TEST CONFIGURATION

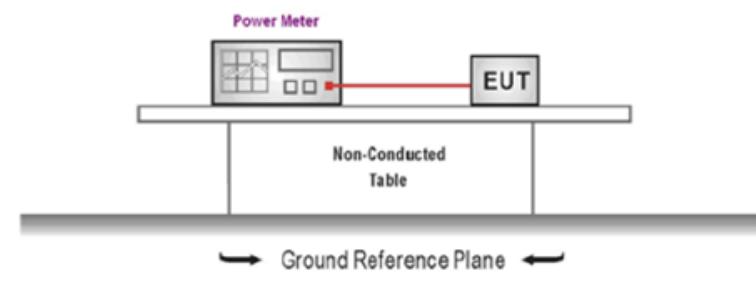

#### TEST PROCEDURE

1. The EUT was tested according to ANSI C63.10 and KDB 558074 D01 requirements.
2. The maximum peak conducted output power may be measured using a broadband peak RF power meter.
3. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall utilize a fast-responding diode detector.
4. Record the measurement data.

#### TEST MODE:

Please refer to the clause 4.2

#### TEST RESULT

Passed       Not Applicable

#### TEST Data

Please refer to appendix A on the appendix report


## 5.4. Power Spectral Density

### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

### TEST CONFIGURATION

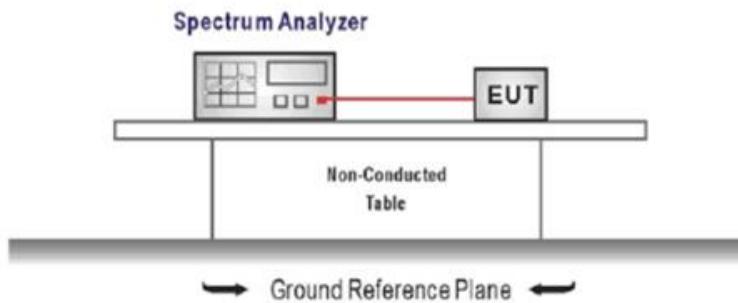

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input,
2. Configure the spectrum analyzer as shown below:  
Center frequency=DTS channel center frequency  
Span =1.5 times the DTS bandwidth  
 $RBW = 3 \text{ kHz} \leq RBW \leq 100 \text{ kHz}$ ,  $VBW \geq 3 \times RBW$   
Sweep time = auto couple  
Detector = peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter wave form on the spectrum analyzer.
4. Use the peak marker function to determine the maximum amplitude level within the RBW.
5. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.

### TEST MODE:

Please refer to the clause 4.2

### TEST RESULT

Passed       Not Applicable

### TEST Data

Please refer to appendix B on the appendix report


## 5.5. 6dB bandwidth

### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (a)(2):

For digital modulation systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

### TEST CONFIGURATION

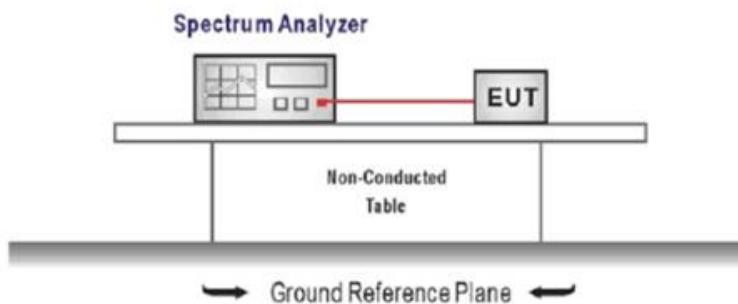

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
Center Frequency = DTS channel center frequency  
Span=2 x DTS bandwidth  
 $RBW = 100 \text{ kHz}$ ,  $VBW \geq 3 \times RBW$   
Sweep time= auto couple  
Detector = Peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission, and record the pertinent measurements.

### TEST MODE:

Please refer to the clause 4.2

### TEST RESULT

Passed       Not Applicable

### TEST Data


Please refer to appendix C on the appendix report

## 5.6. 99% Occupied Bandwidth

### LIMIT

N/A

### TEST CONFIGURATION

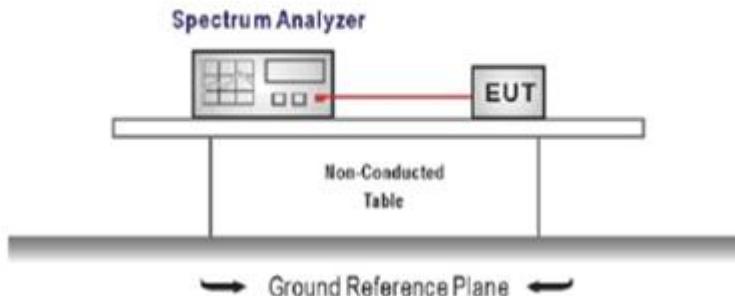

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).  
Center Frequency = channel center frequency  
Span  $\geq 1.5 \times$  OBW  
RBW = 1%~5%OBW  
VBW  $\geq 3 \times$  RBW  
Sweep time = auto couple  
Detector = Peak  
Trace mode = max hold
3. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.

### TEST MODE:

Please refer to the clause 4.2

### TEST RESULT

Passed       Not Applicable

### TEST Data


Please refer to appendix D on the appendix report

## 5.7. Duty Cycle

### LIMIT

N/A

### TEST CONFIGURATION

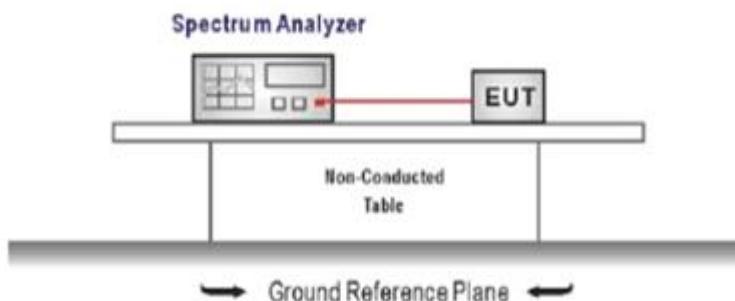

### TEST PROCEDURE

1. The transmitter output was connected to the spectrum analyzer through an attenuator, the path loss was compensated to the results for each measurement.
2. Set to the maximum power setting and enable the EUT transmit continuously
3. Use the following spectrum analyzer settings:  
Span=zero span, Frequency=centered channel, RBW= 1 MHz, VBW  $\geq$  RBW  
Sweep=as necessary to capture the entire dwell time,  
Detector function = peak, Trigger mode
4. Measure and record the duty cycle data

### TEST MODE:

Please refer to the clause 4.2

### TEST Data


Please refer to appendix E on the appendix report

## 5.8. Conducted Band edge and Spurious Emission

### LIMIT

**FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):** In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### TEST CONFIGURATION

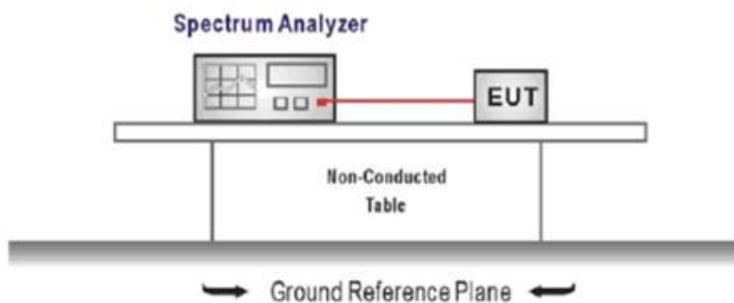

### TEST PROCEDURE

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Establish a reference level by using the following procedure  
Center frequency=DTS channel center frequency  
The span = 1.5 times the DTS bandwidth.  
RBW = 100 kHz, VBW  $\geq$  3 x RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum PSD level  
  
Note that the channel found to contain the maximum PSD level can be used to establish the reference level.
3. Emission level measurement  
Set the center frequency and span to encompass frequency range to be measured  
RBW = 100 kHz, VBW  $\geq$  3 x RBW  
Detector = peak, Sweep time = auto couple, Trace mode = max hold  
Allow trace to fully stabilize  
Use the peak marker function to determine the maximum amplitude level.
4. Place the radio in continuous transmit mode, allow the trace to stabilize, view the transmitter waveform on the spectrum analyzer.
5. Ensure that the amplitude of all unwanted emission outside of the authorized frequency band excluding restricted frequency bands) are attenuated by at least the minimum requirements specified (at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz). Report the three highest emission relative to the limit.

### TEST MODE:

Please refer to the clause 4.2

**TEST RESULT**

**Passed**       **Not Applicable**

**TEST Data**

Please refer to appendix F on the appendix report


## 5.9. Radiated Band edge Emission

### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.247 (d):

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, Radiated Emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the Radiated Emissions limits specified in §15.209(a) (see §15.205(c)).

### TEST CONFIGURATION

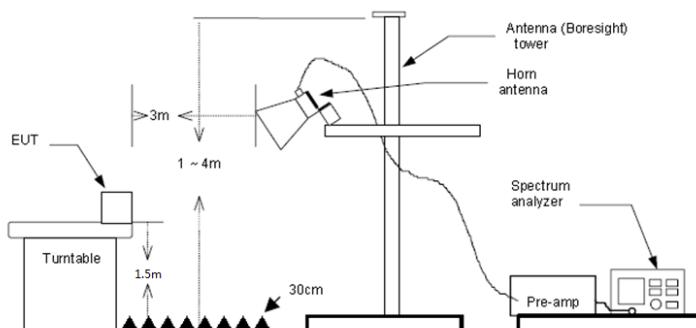

### TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.
4. The antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10 on radiated measurement.
5. Use the following spectrum analyzer settings:
  - a) Span shall wide enough to fully capture the emission being measured
  - b) Set RBW=100kHz for <1GHz, VBW=3\*RBW, Sweep time=auto, Detector=peak, Trace=max hold
  - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement

For average measurement:

- VBW=10Hz, When duty cycle is no less than 98 percent
- VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

### TEST MODE:

Please refer to the clause 4.2

### TEST RESULT

Passed       Not Applicable

Note:

- 1) Level= Reading + Factor; Factor =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m).
- 4) Pre-scan all modulation mode and antenna. 802.11b/g/n in the report only displays the worst antenna information. The worst antenna is antenna 1.

Type	802.11b		Test channel	CH01		Polarity	Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
2310.000	31.00	17.66	48.66	74.00	25.34	Horizontal	PK
2310.000	27.22	17.66	44.88	54.00	9.12	Horizontal	AV
2390.000	29.82	17.59	47.41	74.00	26.59	Horizontal	PK
2390.000	26.47	17.59	44.06	54.00	9.94	Horizontal	AV

Type	802.11b		Test channel	CH01		Polarity	Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
2310.000	29.49	17.66	47.15	74.00	26.85	Vertical	PK
2310.000	26.01	17.66	43.67	54.00	10.33	Vertical	AV
2390.000	30.09	17.59	47.68	74.00	26.32	Vertical	PK
2390.000	26.45	17.59	44.04	54.00	9.96	Vertical	AV

Type	802.11b		Test channel	CH11		Polarity	Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
2483.500	29.77	17.85	47.62	74.00	26.38	Horizontal	PK
2483.500	26.04	17.85	43.89	54.00	10.11	Horizontal	AV
2500.000	29.73	17.90	47.63	74.00	26.37	Horizontal	PK
2500.000	25.61	17.90	43.51	54.00	10.49	Horizontal	AV

Type	802.11b		Test channel	CH11		Polarity	Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
2483.500	29.49	17.85	47.34	74.00	26.66	Vertical	PK
2483.500	25.55	17.85	43.40	54.00	10.60	Vertical	AV
2500.000	30.68	17.90	48.58	74.00	25.42	Vertical	PK
2500.000	27.78	17.90	45.68	54.00	8.32	Vertical	AV

Type	802.11g		Test channel	CH01		Polarity	Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
2310.000	30.23	17.66	47.89	74.00	26.11	Horizontal	PK
2310.000	26.71	17.66	44.37	54.00	9.63	Horizontal	AV
2390.000	29.68	17.59	47.27	74.00	26.73	Horizontal	PK
2390.000	26.45	17.59	44.04	54.00	9.96	Horizontal	AV

Type	802.11g		Test channel	CH01		Polarity	Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
2310.000	29.76	17.66	47.42	74.00	26.58	Vertical	PK
2310.000	26.80	17.66	44.46	54.00	9.54	Vertical	AV
2390.000	30.53	17.59	48.12	74.00	25.88	Vertical	PK
2390.000	26.72	17.59	44.31	54.00	9.69	Vertical	AV

Type	802.11g		Test channel	CH11		Polarity	Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
2483.500	29.75	17.85	47.60	74.00	26.40	Horizontal	PK
2483.500	26.25	17.85	44.10	54.00	9.90	Horizontal	AV
2500.000	30.09	17.90	47.99	74.00	26.01	Horizontal	PK
2500.000	25.83	17.90	43.73	54.00	10.27	Horizontal	AV

Type	802.11g		Test channel	CH11		Polarity	Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Detector
2483.500	29.59	17.85	47.44	74.00	26.56	Vertical	PK
2483.500	26.37	17.85	44.22	54.00	9.78	Vertical	AV
2500.000	29.58	17.90	47.48	74.00	26.52	Vertical	PK
2500.000	25.13	17.90	43.03	54.00	10.97	Vertical	AV

Type	802.11n(HT20)		Test channel	CH01		Polarity	Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	
2310.000	30.51	17.66	48.17	74.00	25.83	Horizontal	PK
2310.000	26.72	17.66	44.38	54.00	9.62	Horizontal	AV
2390.000	30.05	17.59	47.64	74.00	26.36	Horizontal	PK
2390.000	26.88	17.59	44.47	54.00	9.53	Horizontal	AV

Type	802.11n(HT20)		Test channel	CH01		Polarity	Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	
2310.000	30.98	17.66	48.64	74.00	25.36	Vertical	PK
2310.000	27.02	17.66	44.68	54.00	9.32	Vertical	AV
2390.000	30.17	17.59	47.76	74.00	26.24	Vertical	PK
2390.000	25.77	17.59	43.36	54.00	10.64	Vertical	AV

Type	802.11n(HT20)		Test channel	CH11		Polarity	Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	
2483.500	29.87	17.85	47.72	74.00	26.28	Horizontal	PK
2483.500	26.19	17.85	44.04	54.00	9.96	Horizontal	AV
2500.000	30.64	17.90	48.54	74.00	25.46	Horizontal	PK
2500.000	27.23	17.90	45.13	54.00	8.87	Horizontal	AV

Type	802.11n(HT20)		Test channel	CH11		Polarity	Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	
2483.500	30.77	17.85	48.62	74.00	25.38	Vertical	PK
2483.500	27.40	17.85	45.25	54.00	8.75	Vertical	AV
2500.000	30.48	17.90	48.38	74.00	25.62	Vertical	PK
2500.000	26.51	17.90	44.41	54.00	9.59	Vertical	AV

Type	802.11n(HT40)		Test channel	CH03		Polarity		Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
2310.000	31.24	17.66	48.90	74.00	25.10	Horizontal	PK	
2310.000	27.59	17.66	45.25	54.00	8.75	Horizontal	AV	
2390.000	31.45	17.59	49.04	74.00	24.96	Horizontal	PK	
2390.000	27.77	17.59	45.36	54.00	8.64	Horizontal	AV	

Type	802.11n(HT40)		Test channel	CH03		Polarity		Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
2310.000	30.73	17.66	48.39	74.00	25.61	Vertical	PK	
2310.000	27.25	17.66	44.91	54.00	9.09	Vertical	AV	
2390.000	30.15	17.59	47.74	74.00	26.26	Vertical	PK	
2390.000	26.99	17.59	44.58	54.00	9.42	Vertical	AV	

Type	802.11n(HT40)		Test channel	CH09		Polarity		Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
2483.500	29.86	17.85	47.71	74.00	26.29	Horizontal	PK	
2483.500	26.23	17.85	44.08	54.00	9.92	Horizontal	AV	
2500.000	30.37	17.90	48.27	74.00	25.73	Horizontal	PK	
2500.000	26.67	17.90	44.57	54.00	9.43	Horizontal	AV	

Type	802.11n(HT40)		Test channel	CH09		Polarity		Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
2483.500	30.99	17.85	48.84	74.00	25.16	Vertical	PK	
2483.500	27.38	17.85	45.23	54.00	8.77	Vertical	AV	
2500.000	31.27	17.90	49.17	74.00	24.83	Vertical	PK	
2500.000	27.41	17.90	45.31	54.00	8.69	Vertical	AV	

## 5.10. Radiated Spurious Emission

### LIMIT

#### FCC CFR Title 47 Part 15 Subpart C Section 15.209

Frequency	Limit (dBuV/m)	Value
0.009 MHz ~0.49 MHz	2400/F(kHz) @300m	Quasi-peak
0.49 MHz ~ 1.705 MHz	24000/F(kHz) @30m	Quasi-peak
1.705 MHz ~30 MHz	30 @30m	Quasi-peak


Note: Limit dBuV/m @3m = Limit dBuV/m @300m + 40\*log(300/3)= Limit dBuV/m @300m +80,

Limit dBuV/m @3m = Limit dBuV/m @30m +40\*log(30/3)= Limit dBuV/m @30m + 40.


Frequency	Limit (dBuV/m @3m)	Value
30MHz~88MHz	40.00	Quasi-peak
88MHz~216MHz	43.50	Quasi-peak
216MHz~960MHz	46.00	Quasi-peak
960MHz~1GHz	54.00	Quasi-peak
Above 1GHz	54.00	Average
	74.00	Peak

### TEST CONFIGURATION


- 9 kHz ~ 30 MHz

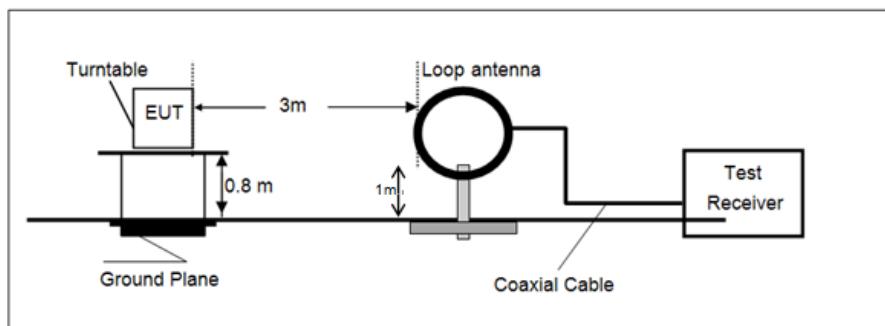

- 30 MHz ~ 1 GHz

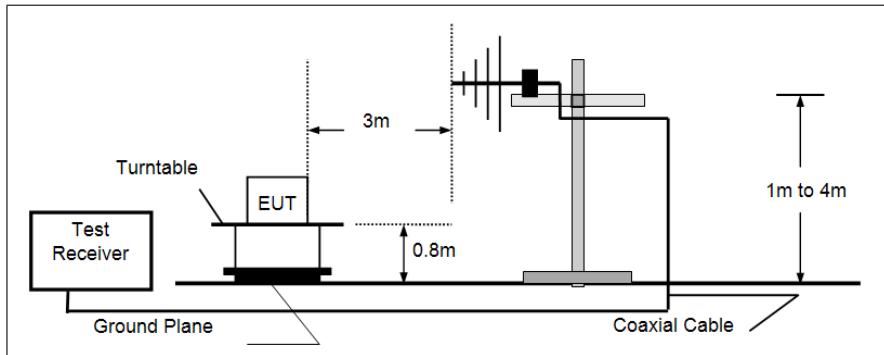

- Above 1 GHz

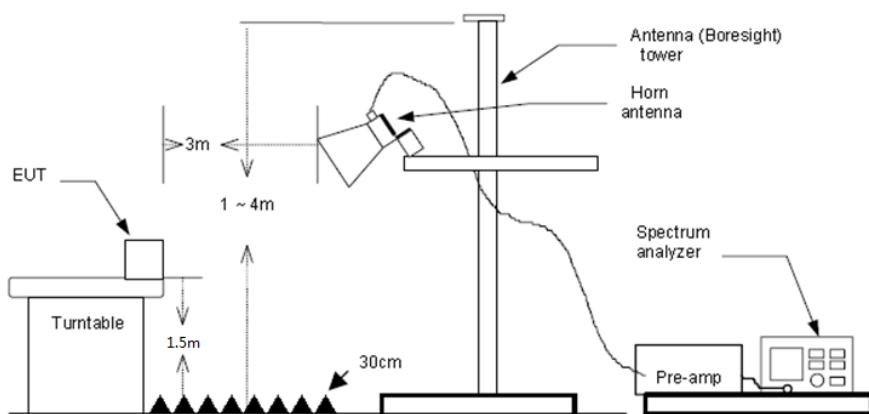

### TEST PROCEDURE

1. The EUT was setup and tested according to ANSI C63.10 .
2. The EUT is placed on a turn table which is 0.8 meter above ground for below 1 GHz, and 1.5 m for above 1 GHz. The turn table is rotated 360 degrees to determine the position of the maximum emission level.
3. The EUT was set 3 meters from the receiving antenna, which was mounted on the top of a variable height antenna tower.
4. For each suspected emission, the EUT was arranged to its worst case and then tune the Antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
5. Set to the maximum power setting and enable the EUT transmit continuously.
6. Use the following spectrum analyzer settings
  - a) Span shall wide enough to fully capture the emission being measured;
  - b) Below 1 GHz:  
RBW=120 kHz, VBW=300 kHz, Sweep=auto, Detector function=peak, Trace=max hold;  
If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
  - c) Set RBW=1MHz, VBW=3MHz for >1GHz, Sweep time=auto, Detector=peak, Trace=max hold for Peak measurement  
For average measurement:  
– VBW=10Hz, When duty cycle is no less than 98 percent  
– VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation, so refer to this clause 5.6 duty cycle.

### TEST MODE:

Please refer to the clause 4.2

### TEST RESULT

Passed       Not Applicable

Note:

- 1) Level= Reading + Factor/Transd; Factor/Transd =Antenna Factor+ Cable Loss- Preamp Factor
- 2) Margin = Limit – Level
- 3) Average measurement was not performed if peak level is lower than average limit(54 dBuV/m) for above 1GHz.

**TEST DATA FOR 9 kHz ~ 30 MHz**



The EUT was pre-scanned this frequency band, found the radiated level 20dB lower than the limit, so don't show data on this report.

**TEST DATA FOR 30 MHz ~ 1000 MHz**

Have pre-scan all test channel, found CH06 of 802.11B which it was worst case, so only show the worst case's data on this report.

**TEST DATA FOR 1 GHz ~ 25 GHz**

The EUT was pre-scanned all modulation mode and antenna. 802.11b/g/n in the report only displays the worst antenna information. The worst antenna is antenna 1.

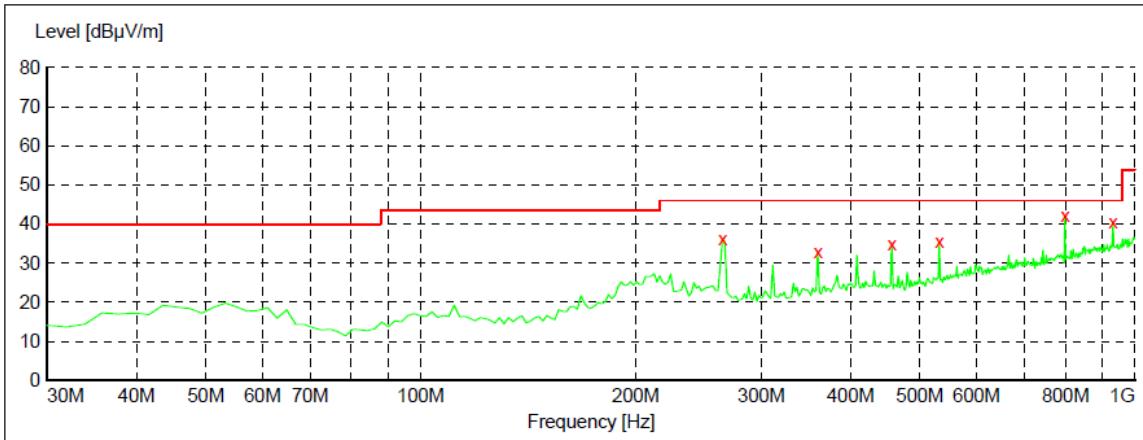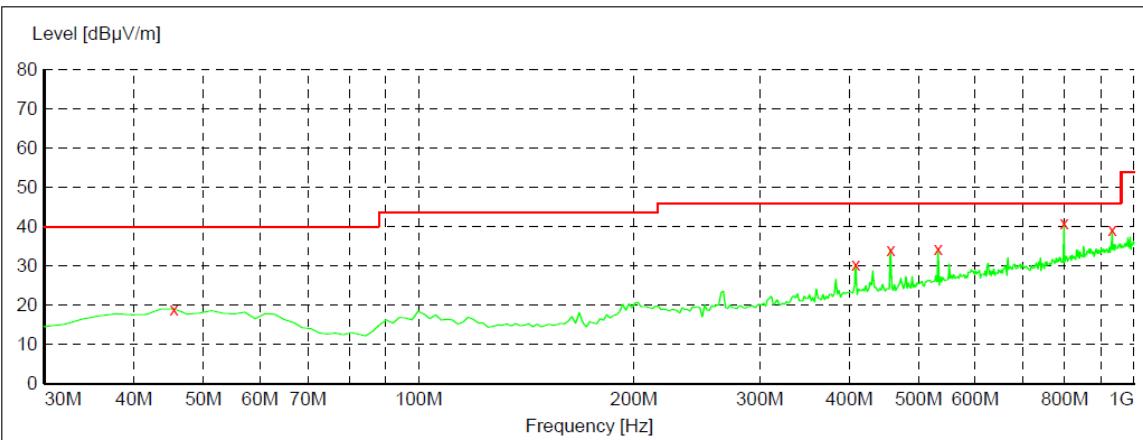Polarization:		Horizontal																																																																													
																																																																															
<table border="1"> <thead> <tr> <th>Frequency MHz</th><th>Level dB<math>\mu</math>V/m</th><th>Transd dB</th><th>Limit dB<math>\mu</math>V/m</th><th>Margin dB</th><th>Det.</th><th>Height cm</th><th>Azimuth deg</th><th>Polarization</th><th></th></tr> </thead> <tbody> <tr> <td>264.740000</td><td>36.20</td><td>-7.6</td><td>46.0</td><td>9.8</td><td>QP</td><td>100.0</td><td>356.00</td><td>HORIZONTAL</td><td></td></tr> <tr> <td>359.800000</td><td>32.90</td><td>-5.2</td><td>46.0</td><td>13.1</td><td>QP</td><td>100.0</td><td>121.00</td><td>HORIZONTAL</td><td></td></tr> <tr> <td>456.800000</td><td>35.00</td><td>-2.4</td><td>46.0</td><td>11.0</td><td>QP</td><td>100.0</td><td>215.00</td><td>HORIZONTAL</td><td></td></tr> <tr> <td>532.460000</td><td>35.40</td><td>-0.4</td><td>46.0</td><td>10.6</td><td>QP</td><td>100.0</td><td>38.00</td><td>HORIZONTAL</td><td></td></tr> <tr> <td>798.240000</td><td>42.20</td><td>5.6</td><td>46.0</td><td>3.8</td><td>QP</td><td>100.0</td><td>336.00</td><td>HORIZONTAL</td><td></td></tr> <tr> <td>932.100000</td><td>40.40</td><td>7.8</td><td>46.0</td><td>5.6</td><td>QP</td><td>100.0</td><td>49.00</td><td>HORIZONTAL</td><td></td></tr> </tbody> </table>	Frequency MHz									Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization		264.740000	36.20	-7.6	46.0	9.8	QP	100.0	356.00	HORIZONTAL		359.800000	32.90	-5.2	46.0	13.1	QP	100.0	121.00	HORIZONTAL		456.800000	35.00	-2.4	46.0	11.0	QP	100.0	215.00	HORIZONTAL		532.460000	35.40	-0.4	46.0	10.6	QP	100.0	38.00	HORIZONTAL		798.240000	42.20	5.6	46.0	3.8	QP	100.0	336.00	HORIZONTAL		932.100000	40.40	7.8	46.0	5.6	QP	100.0	49.00	HORIZONTAL		
Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization																																																																							
264.740000	36.20	-7.6	46.0	9.8	QP	100.0	356.00	HORIZONTAL																																																																							
359.800000	32.90	-5.2	46.0	13.1	QP	100.0	121.00	HORIZONTAL																																																																							
456.800000	35.00	-2.4	46.0	11.0	QP	100.0	215.00	HORIZONTAL																																																																							
532.460000	35.40	-0.4	46.0	10.6	QP	100.0	38.00	HORIZONTAL																																																																							
798.240000	42.20	5.6	46.0	3.8	QP	100.0	336.00	HORIZONTAL																																																																							
932.100000	40.40	7.8	46.0	5.6	QP	100.0	49.00	HORIZONTAL																																																																							
Polarization:		Vertical																																																																													
																																																																															
<table border="1"> <thead> <tr> <th>Frequency MHz</th><th>Level dB<math>\mu</math>V/m</th><th>Transd dB</th><th>Limit dB<math>\mu</math>V/m</th><th>Margin dB</th><th>Det.</th><th>Height cm</th><th>Azimuth deg</th><th>Polarization</th><th></th></tr> </thead> <tbody> <tr> <td>45.520000</td><td>19.10</td><td>-8.4</td><td>40.0</td><td>20.9</td><td>QP</td><td>100.0</td><td>360.00</td><td>VERTICAL</td><td></td></tr> <tr> <td>408.300000</td><td>30.40</td><td>-3.3</td><td>46.0</td><td>15.6</td><td>QP</td><td>100.0</td><td>360.00</td><td>VERTICAL</td><td></td></tr> <tr> <td>456.800000</td><td>34.20</td><td>-2.4</td><td>46.0</td><td>11.8</td><td>QP</td><td>100.0</td><td>356.00</td><td>VERTICAL</td><td></td></tr> <tr> <td>532.460000</td><td>34.40</td><td>-0.4</td><td>46.0</td><td>11.6</td><td>QP</td><td>100.0</td><td>62.00</td><td>VERTICAL</td><td></td></tr> <tr> <td>798.240000</td><td>40.90</td><td>5.6</td><td>46.0</td><td>5.1</td><td>QP</td><td>100.0</td><td>146.00</td><td>VERTICAL</td><td></td></tr> <tr> <td>932.100000</td><td>39.20</td><td>7.8</td><td>46.0</td><td>6.8</td><td>QP</td><td>100.0</td><td>146.00</td><td>VERTICAL</td><td></td></tr> </tbody> </table>	Frequency MHz									Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization		45.520000	19.10	-8.4	40.0	20.9	QP	100.0	360.00	VERTICAL		408.300000	30.40	-3.3	46.0	15.6	QP	100.0	360.00	VERTICAL		456.800000	34.20	-2.4	46.0	11.8	QP	100.0	356.00	VERTICAL		532.460000	34.40	-0.4	46.0	11.6	QP	100.0	62.00	VERTICAL		798.240000	40.90	5.6	46.0	5.1	QP	100.0	146.00	VERTICAL		932.100000	39.20	7.8	46.0	6.8	QP	100.0	146.00	VERTICAL		
Frequency MHz	Level dB $\mu$ V/m	Transd dB	Limit dB $\mu$ V/m	Margin dB	Det.	Height cm	Azimuth deg	Polarization																																																																							
45.520000	19.10	-8.4	40.0	20.9	QP	100.0	360.00	VERTICAL																																																																							
408.300000	30.40	-3.3	46.0	15.6	QP	100.0	360.00	VERTICAL																																																																							
456.800000	34.20	-2.4	46.0	11.8	QP	100.0	356.00	VERTICAL																																																																							
532.460000	34.40	-0.4	46.0	11.6	QP	100.0	62.00	VERTICAL																																																																							
798.240000	40.90	5.6	46.0	5.1	QP	100.0	146.00	VERTICAL																																																																							
932.100000	39.20	7.8	46.0	6.8	QP	100.0	146.00	VERTICAL																																																																							

**TEST DATA FOR 1 GHz ~ 25 GHz**

Type	802.11b		Test channel	CH01		Polarity	Horizontal	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3178.156	32.79	0.73	33.52	74.00	40.48	Horizontal	PK
	4823.156	35.77	7.08	42.85	74.00	31.15	Horizontal	PK
	8011.812	31.69	16.21	47.90	74.00	26.10	Horizontal	PK
	10332.43	31.73	17.48	49.21	74.00	24.79	Horizontal	PK
Type	802.11b		Test channel	CH01		Polarity	Vertical	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3059.187	34.20	0.14	34.34	74.00	39.66	Vertical	PK
	3211.937	23.85	0.70	24.55	54.00	29.45	Vertical	AV
	4823.156	51.13	7.08	58.21	74.00	15.79	Vertical	PK
	4823.156	45.97	7.08	53.05	54.00	0.95	Vertical	AV
	7953.062	31.48	16.25	47.73	74.00	26.27	Vertical	PK
	8047.062	21.34	16.26	37.60	54.00	16.40	Vertical	AV
	9414.468	32.19	17.45	49.64	74.00	24.36	Vertical	PK
	9483.500	21.19	17.90	39.09	54.00	14.91	Vertical	AV
Type	802.11b		Test channel	CH06		Polarity	Horizontal	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3178.156	34.30	0.73	35.03	74.00	38.97	Horizontal	PK
	4874.562	40.60	7.15	47.75	74.00	26.25	Horizontal	PK
	8070.562	31.72	16.30	48.02	74.00	25.98	Horizontal	PK
	9859.500	33.67	17.25	50.92	74.00	23.08	Horizontal	PK
Type	802.11b		Test channel	CH06		Polarity	Vertical	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3139.968	34.26	0.53	34.79	74.00	39.21	Vertical	PK
	4874.562	39.98	7.15	47.13	74.00	26.87	Vertical	PK
	7881.093	31.85	16.12	47.97	74.00	26.03	Vertical	PK
	9772.843	32.35	17.22	49.57	74.00	24.43	Vertical	PK
Type	802.11b		Test channel	CH11		Polarity	Horizontal	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3112.062	34.73	0.38	35.11	74.00	38.89	Horizontal	PK
	4943.593	37.08	7.47	44.55	74.00	29.45	Horizontal	PK
	7431.656	31.71	15.38	47.09	74.00	26.91	Horizontal	PK
	9878.593	32.58	17.26	49.84	74.00	24.16	Horizontal	PK
Type	802.11b		Test channel	CH11		Polarity	Vertical	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3184.031	34.49	0.76	35.25	74.00	38.75	Vertical	PK
	4943.593	45.78	7.47	53.25	74.00	20.75	Vertical	PK
	7484.531	32.69	15.40	48.09	74.00	25.91	Vertical	PK
	9570.156	32.02	17.37	49.39	74.00	24.61	Vertical	PK


Type	802.11g		Test channel	CH01		Polarity	Horizontal	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3116.468	34.15	0.41	34.56	74.00	39.44	Horizontal	PK
	4823.156	38.14	7.08	45.22	74.00	28.78	Horizontal	PK
	6839.750	31.90	13.56	45.46	74.00	28.54	Horizontal	PK
	9612.750	32.27	17.11	49.38	74.00	24.62	Horizontal	PK
Type	802.11g		Test channel	CH01		Polarity	Vertical	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3128.218	35.57	0.47	36.04	74.00	37.96	Vertical	PK
	4824.625	46.62	7.08	53.70	74.00	20.30	Vertical	PK
	7026.281	30.76	14.24	45.00	74.00	29.00	Vertical	PK
	9299.906	31.53	17.92	49.45	74.00	24.55	Vertical	PK
Type	802.11g		Test channel	CH06		Polarity	Horizontal	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3206.062	33.74	0.77	34.51	74.00	39.49	Horizontal	PK
	4874.562	37.97	7.15	45.12	74.00	28.88	Horizontal	PK
	7976.562	32.11	16.22	48.33	74.00	25.67	Horizontal	PK
	9518.750	31.99	17.84	49.83	74.00	24.17	Horizontal	PK
Type	802.11g		Test channel	CH06		Polarity	Vertical	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3169.343	34.27	0.68	34.95	74.00	39.05	Vertical	PK
	4874.562	40.26	7.15	47.41	74.00	26.59	Vertical	PK
	6595.937	30.01	13.12	43.13	74.00	30.87	Vertical	PK
	9465.875	32.24	17.78	50.02	74.00	23.98	Vertical	PK
Type	802.11g		Test channel	CH11		Polarity	Horizontal	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3126.750	34.25	0.46	34.71	74.00	39.29	Horizontal	PK
	4923.031	36.31	7.33	43.64	74.00	30.36	Horizontal	PK
	6713.437	32.14	13.43	45.57	74.00	28.43	Horizontal	PK
	9508.468	31.72	17.93	49.65	74.00	24.35	Horizontal	PK
Type	802.11g		Test channel	CH11		Polarity	Vertical	
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector
	3117.937	35.11	0.41	35.52	74.00	38.48	Vertical	PK
	4923.031	43.70	7.33	51.03	74.00	22.97	Vertical	PK
	7204.000	31.57	14.99	46.56	74.00	27.44	Vertical	PK
	9502.593	32.14	17.99	50.13	74.00	23.87	Vertical	PK

Type	802.11n(HT20)		Test channel		CH01		Polarity		Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
	3040.093	33.96	0.06	34.02	74.00	39.98	Horizontal	PK	
	4820.218	40.65	7.08	47.73	74.00	26.27	Horizontal	PK	
	7302.406	32.56	15.06	47.62	74.00	26.38	Horizontal	PK	
	10341.25	32.32	17.49	49.81	74.00	24.19	Horizontal	PK	
Type	802.11n(HT20)		Test channel		CH01		Polarity		Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
	3189.906	34.03	0.79	34.82	74.00	39.18	Vertical	PK	
	4823.156	45.74	7.08	52.82	74.00	21.18	Vertical	PK	
	7334.718	31.22	15.16	46.38	74.00	27.62	Vertical	PK	
	9581.906	31.83	17.26	49.09	74.00	24.91	Vertical	PK	
Type	802.11n(HT20)		Test channel		CH06		Polarity		Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
	3072.406	34.43	0.20	34.63	74.00	39.37	Horizontal	PK	
	4874.562	40.21	7.15	47.36	74.00	26.64	Horizontal	PK	
	6669.375	31.30	13.37	44.67	74.00	29.33	Horizontal	PK	
	9299.906	32.03	17.92	49.95	74.00	24.05	Horizontal	PK	
Type	802.11n(HT20)		Test channel		CH06		Polarity		Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
	3178.156	35.09	0.73	35.82	74.00	38.18	Vertical	PK	
	4874.562	42.79	7.15	49.94	74.00	24.06	Vertical	PK	
	7248.062	31.64	15.02	46.66	74.00	27.34	Vertical	PK	
	9464.406	31.80	17.78	49.58	74.00	24.42	Vertical	PK	
Type	802.11n(HT20)		Test channel		CH11		Polarity		Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
	3189.906	34.29	0.79	35.08	74.00	38.92	Horizontal	PK	
	4923.031	34.71	7.33	42.04	74.00	31.96	Horizontal	PK	
	7785.625	32.06	15.30	47.36	74.00	26.64	Horizontal	PK	
	10823.00	32.52	17.72	50.24	74.00	23.76	Horizontal	PK	
Type	802.11n(HT20)		Test channel		CH11		Polarity		Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
	3159.062	34.14	0.63	34.77	74.00	39.23	Vertical	PK	
	4923.031	42.69	7.33	50.02	74.00	23.98	Vertical	PK	
	7566.781	32.08	15.72	47.80	74.00	26.20	Vertical	PK	
	10909.65	31.40	17.77	49.17	74.00	24.83	Vertical	PK	


Type	802.11n(HT40)		Test channel		CH03		Polarity		Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
	3117.937	34.01	0.41	34.42	74.00	39.58	Horizontal	PK	
	4833.437	36.35	7.09	43.44	74.00	30.56	Horizontal	PK	
	8055.875	31.98	16.27	48.25	74.00	25.75	Horizontal	PK	
	9238.218	31.80	17.16	48.96	74.00	25.04	Horizontal	PK	
Type	802.11n(HT40)		Test channel		CH03		Polarity		Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
	3034.218	36.25	0.03	36.28	74.00	37.72	Vertical	PK	
	4845.187	43.54	7.11	50.65	74.00	23.35	Vertical	PK	
	7557.968	32.05	15.68	47.73	74.00	26.27	Vertical	PK	
	10084.21	32.16	17.36	49.52	74.00	24.48	Vertical	PK	
Type	802.11n(HT40)		Test channel		CH06		Polarity		Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
	3175.218	33.49	0.71	34.20	74.00	39.80	Horizontal	PK	
	4873.093	42.12	7.15	49.27	74.00	24.73	Horizontal	PK	
	7477.187	30.94	15.40	46.34	74.00	27.66	Horizontal	PK	
	9424.750	32.12	17.51	49.63	74.00	24.37	Horizontal	PK	
Type	802.11n(HT40)		Test channel		CH06		Polarity		Vertical
Suspected Data List									
NO.	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
1	3069.468	35.70	0.19	35.89	74.00	38.11	Vertical	PK	
2	4873.093	48.05	7.15	55.20	74.00	18.80	Vertical	PK	
3	4873.093	43.25	7.15	50.4	54.00	3.60	Vertical	AV	
4	8142.531	31.73	16.20	47.93	74.00	26.07	Vertical	PK	
5	9878.593	33.17	17.26	50.43	74.00	23.57	Vertical	PK	
Type	802.11n(HT40)		Test channel		CH09		Polarity		Horizontal
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
	3047.437	34.82	0.09	34.91	74.00	39.09	Horizontal	PK	
	4903.937	34.99	7.21	42.20	74.00	31.80	Horizontal	PK	
	7472.781	31.61	15.40	47.01	74.00	26.99	Horizontal	PK	
	10706.96	31.70	17.67	49.37	74.00	24.63	Horizontal	PK	
Type	802.11n(HT40)		Test channel		CH09		Polarity		Vertical
	Freq. [MHz]	Reading [dB $\mu$ V/m]	Factor [dB]	Level [dB $\mu$ V/m]	Limit [dB $\mu$ V/m]	Margin [dB]	Polarity	Detector	
	3871.406	34.01	2.48	36.49	74.00	37.51	Vertical	PK	
	4903.937	40.35	7.21	47.56	74.00	26.44	Vertical	PK	
	7989.781	32.37	16.20	48.57	74.00	25.43	Vertical	PK	
	9853.625	32.62	17.25	49.87	74.00	24.13	Vertical	PK	

## 6. TEST SETUP PHOTOS

Radiated Emission

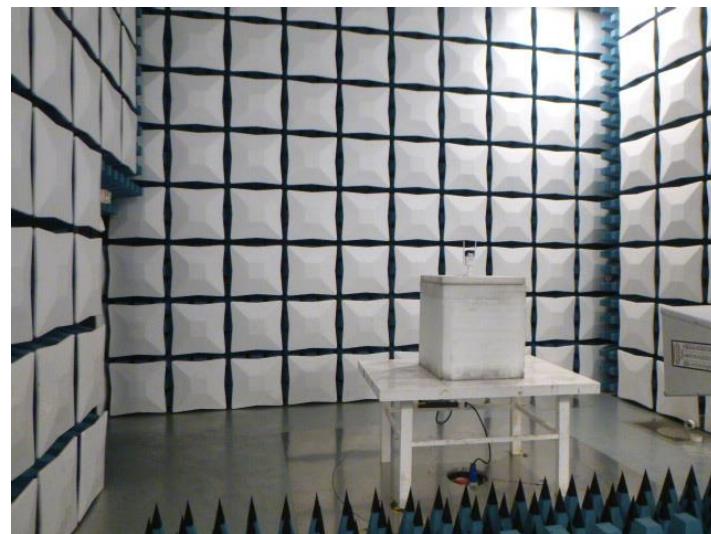

## AC Conducted Emission

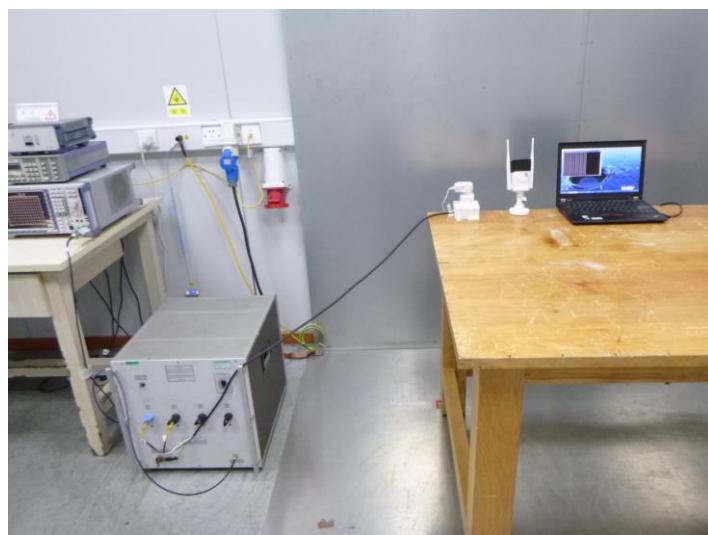

## **7. EXTERANAL AND INTERNAL PHOTOS**



### **External photos of EUT**










### Internal photos of EUT

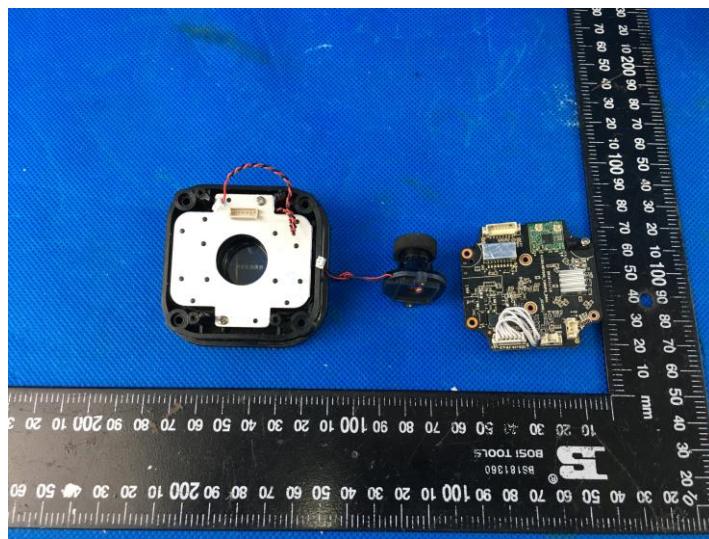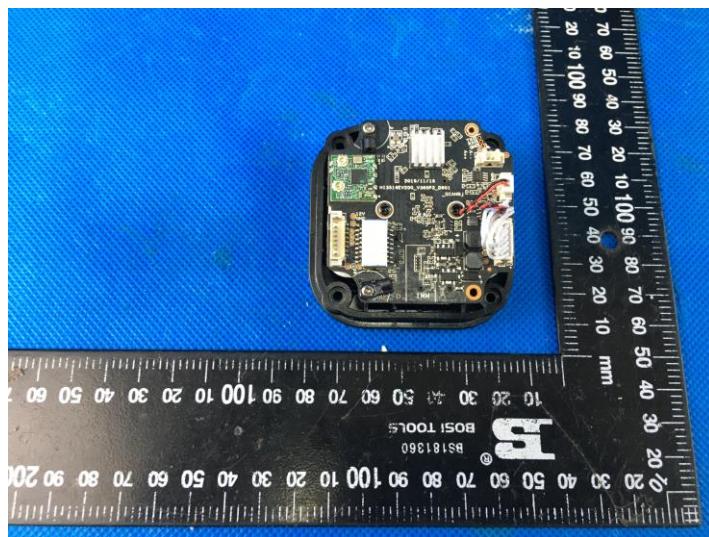

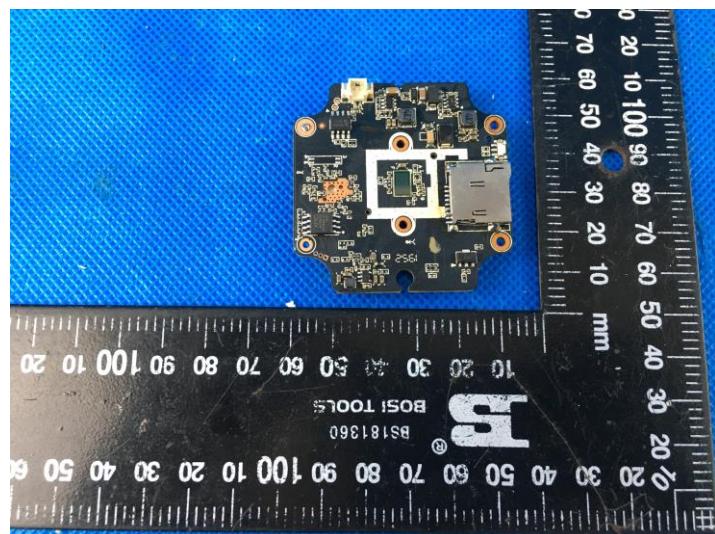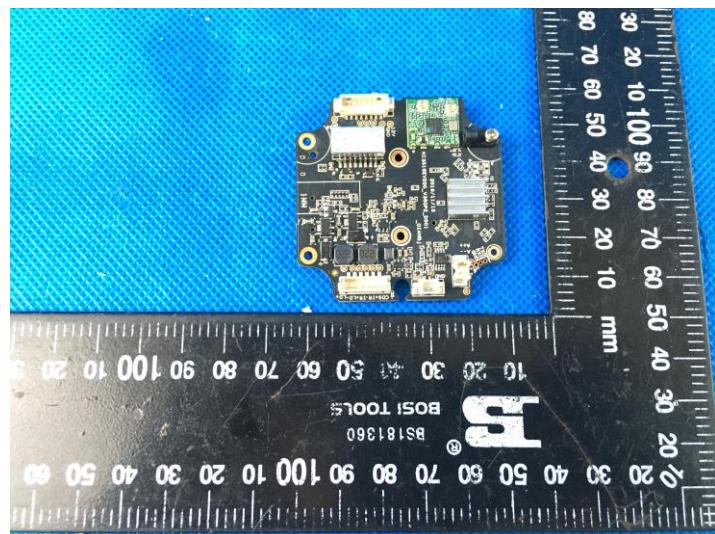

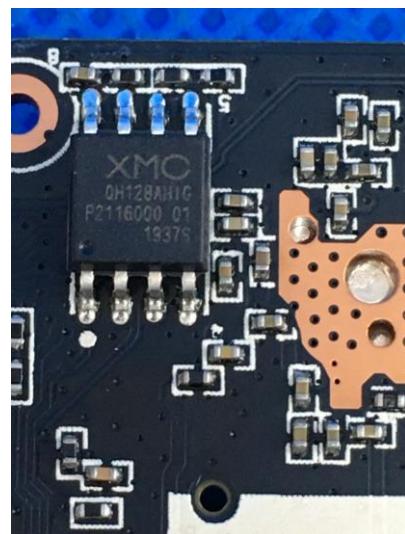

## **8 . APPENDIX REPORT**