

TEST REPORT

FCC ID: 2AIZN-X1101B

Product: Tablet

Model No.: X1101B

Trade Mark: Infinix

Report No.: WSCT-ANAB-R&E241100056A-RF

Issued Date: 14 November 2024

Issued for:

INFINIX MOBILITY LIMITED
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG

Issued By:

World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.
Building A-B, Baoli'an Industrial Park, No. 58 Tangtou Avenue, Shiyen Street,
Bao'an District, Shenzhen, Guangdong, China

TEL: +86-755-26996192

FAX: +86-755-86376605



Note: This report shall not be reproduced except in full, without the written approval of World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. This document may be altered or revised by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. personnel only, and shall be noted in the revision section of the document. The test results in the report only apply to the tested sample.



TABLE OF CONTENTS

1. GENERAL INFORMATION	3
2. GENERAL DESCRIPTION OF EUT	4
3. FACILITIES AND ACCREDITATIONS.....	8
3.1. FACILITIES	8
3.2. ACCREDITATIONS	8
3.3. EUT SYSTEM CONFIGURATION	9
3.4. DESCRIPTION OF TEST CHANNELS AND TEST MODES	10
3.5. EQUIPMENT MODIFICATIONS	16
4. SUMMARY OF TEST REQUIREMENTS AND RESULTS	17
5. MEASUREMENT INSTRUMENTS.....	18
6. Transmitter Radiated Power (EIRP/ERP)	19
7. Peak to Average Ratio.....	26
7.2. TEST RESULT	28
8. SPURIOUS EMISSION (Conducted and Radiated)	43
8.1. MEASUREMENT RESULT (PRE-MEASUREMENT).....	43
9. OCCUPIED BANDWIDTH& EMISSION BANDWIDTH	97
9.1. MEASUREMENT RESULT	99
10. BAND EDGE	116
10.1. MEASUREMENT RESULT	117
11. SPURIOUS EMISSION (Conducted and Radiated)	122
11.1. MEASUREMENT RESULT (PRE-MEASUREMENT).....	122
12. FREQUENCY STABILITY	140
12.1. MEASUREMENT RESULT (WORST).....	141
13. Test Setup Photographs	146

Report No.: WSCT-ANAB-R&E241100056A-RF

1. GENERAL INFORMATION

Product: Tablet
Model No.: X1101B
Additional Model: Infinix
Applicant: **INFINIX MOBILITY LIMITED**
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG
Manufacturer: **INFINIX MOBILITY LIMITED**
FLAT N 16/F BLOCK B UNIVERSAL INDUSTRIAL CENTRE 19-25 SHAN MEI
STREET FOTAN NT HONGKONG
Date of receipt: 29 September 2024
Date of Test: 30 September 2024 to 13 November 2024
Applicable Standards: FCC CFR Title 47 Part 2, 22, 24, 27, 90
ANSI C63.26-2015

The above equipment has been tested by World Standardization Certification & Testing Group (Shenzhen) Co., Ltd. And found compliance with the requirements set forth in the technical standards mentioned above. The results of testing in this report apply only to the product/system, which was tested. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Tested By: Wang Xiang

(Wang Xiang)

Checked By: Qin Shuiquan

(Qin Shuiquan)

Approved By: Li Huaibi

(Li Huaibi)

Date: 14 November 2024

Report No.: WSCT-ANAB-R&E241100056A-RF

2. GENERAL DESCRIPTION OF EUT

Equipment Type:	Tablet
Model	X1101B
Trade Mark	Infinix
Software version:	X1101B-M1101CDEGHIJKL
Hardware version:	V1.0
Operating Bands	GSM 850/1900 MHz WCDMA Band 2/4/5 FDD LTE Band 2/4/5/7/12/13/17/25/26/66 TDD LTE Band 38/41
Antenna Type:	Internal Antenna
Antenna gain:	GSM 850/WCDMA B5/LTE B5/26: 0.5dbi PCS 1900/WCDMA B2/LTE B2: -1dbi WCDMA B4/LTE B4/B66: -1dbi LTE B7/B38/B41: 1dbi LTE B12/B13/B17: -4dbi LTE B25:-3dbi
Radiated Power (EIRP/ERP) Limit	GSM 850/WCDMA B5/LTE B5/B26: 7.00W(38.45dBm) PCS 1900/WCDMA B2/LTE B2/25: 2.00W(33.01dBm) WCDMA B4/LTE B4/B66: 1.00W(30.00dBm) LTE B7/B38/B41: 2.00W(33.01dBm) LTE B12/B13/B17: 3.00W(34.77dBm)
Operation Frequency Range:	GSM850: 824-849MHz (TX), 869-894MHz (RX) PCS1900: 1850-1910MHz (TX), 1930-1990MHz (RX) WCDMA Band2: 1850-1910MHz (TX), 1930-1990MHz (RX); WCDMA Band4: 1710-1755MHz (TX), 2110-2155MHz (RX); WCDMA Band5: 824-849MHz (TX), 869-894MHz (RX); LTE Band2: 1850-1910MHz (TX), 1930-1990MHz (RX); LTE Band4: 1710-1755MHz (TX), 2110-2155MHz (RX); LTE Band5: 824-849MHz (TX), 869-894MHz (RX); LTE Band7: 2500-2570MHz (TX), 2620-2690MHz (RX); LTE Band12: 699-716MHz (TX), 729-746MHz (RX); LTE Band13: 777-787 MHz (TX), 746-756 MHz (RX); LTE Band17: 704-716MHz (TX), 734-746MHz (RX); LTE Band25: 1850-1910 MHz (TX), 1930-1995 MHz (RX); LTE Band26: 814~824MHz(TX), 859~869MHz(RX); LTE Band26: 824~849MHz(TX), 869~894MHz(RX); LTE Band38: 2570-2620MHz(TX), 2570-2620MHz(RX); LTE Band41: 2496-2690 MHz(TX), 2496-2690 MHz(RX); LTE Band66: 1710-1780 MHz(TX), 2110-2200 MHz(RX);
Modulation Type	GSM/GPRS: GMSK EGPRS: 8PSK WCDMA: QPSK HSDPA/HSUPA: QPSK /16QAM LTE: QPSK/16QAM
Operating Voltage:	Adapter1: U180XKB Input: 100-240V~50/60Hz 0.6A Output: 5.0V---2.4A , 7.5V---2.4A 18W max

Report No.: WSCT-ANAB-R&E241100056A-RF

	Adapter2: U180XED Input: 100-240V~50/60Hz 0.6A Output: 5.0V~2.4A , 7.5V~2.4A 18W max Rechargeable Li-ion Polymer Battery: BL-68CX Rated Voltage: 3.85V Rated Capacity: 6800mAh /26.18Wh Typical Capacity: 7000mAh /26.95Wh Limited Charge Voltage: 4.4V
Max power:	See Table 2.1
Remark:	N/A.

- Note:
1. The EUT is a Tablet, supporting dual SIM card slots under the same transceiver. Both SIM card slots support GSM, WCDMA, LTE, and both SIM card slots share the same transceiver, so only SIM1 is tested in this report.
 2. The antenna gain provided by the applicant, and the laboratory will not be responsible for the accumulated calculation results which covers the information provided by the applicant.
 3. N/A stands for no applicable.
 4. Antenna gain provided by the customer.

Report No.: WSCT-ANAB-R&E241100056A-RF

Table 2.1 Maximum power in the operating frequency band.

Operation Band (s)	Power Class	Modulation Type	Maximum conducted output power (dBm)	ERP/EIRP (dBm)
GSM 850	Class 4	GMSK	32.50	30.85
EGPRS 850	Class 4	8PSK	27.95	26.30
GSM 1900	Class 1	GMSK	30.00	29.00
EGPRS 1900	Class 1	8PSK	25.68	24.68
WCDMA Band 2	Class 3	QPSK	23.46	22.46
WCDMA Band 4	Class 3	QPSK	23.45	22.45
WCDMA Band 5	Class 3	QPSK	22.88	21.23
E-UTRA Band 2	Class 3	QPSK	23.00	22.00
	Class 3	16QAM	22.40	21.40
E-UTRA Band 4	Class 3	QPSK	23.06	22.06
	Class 3	16QAM	22.31	21.31
E-UTRA Band 5	Class 3	QPSK	23.04	21.39
	Class 3	16QAM	22.39	20.74
E-UTRA Band 7	Class 3	QPSK	22.32	23.32
	Class 3	16QAM	21.57	22.57
E-UTRA Band 12	Class 3	QPSK	22.97	16.82
	Class 3	16QAM	22.31	16.16
E-UTRA Band 13	Class 3	QPSK	22.81	16.66
	Class 3	16QAM	22.29	16.14
E-UTRA Band 17	Class 3	QPSK	22.82	16.67
	Class 3	16QAM	22.27	16.12
E-UTRA Band 25	Class 3	QPSK	23.21	22.21
	Class 3	16QAM	22.57	21.57
E-UTRA Band 26 (814-824MHz)	Class 3	QPSK	23.15	21.50
	Class 3	16QAM	22.61	20.96
E-UTRA Band 26 (824-849MHz)	Class 3	QPSK	23.27	21.62
	Class 3	16QAM	22.68	21.03
E-UTRA Band 38	Class 3	QPSK	22.34	23.34
	Class 3	16QAM	21.88	22.88

Report No.: WSCT-ANAB-R&E241100056A-RF

E-UTRA Band 41	Class 3	QPSK	22.28	23.28
	Class 3	16QAM	21.80	22.80
E-UTRA Band 66	Class 3	QPSK	23.22	22.22
	Class 3	16QAM	22.35	21.35

Report No.: WSCT-ANAB-R&E241100056A-RF

3. FACILITIES AND ACCREDITATIONS

3.1. Facilities

All measurement facilities used to collect the measurement data are located at **Building A-B, Baoli'an Industrial Park, No. 58 Tangtou Avenue, Shiyan Street, Bao'an District, Shenzhen, Guangdong, China of the World Standardization Certification & Testing Group (Shenzhen) Co., Ltd.**

The sites are constructed in conformance with the requirements of ANSI C63.4 and CISPR Publication 22. All receiving equipment conforms to CISPR Publication 16-1, "Radio Interference Measuring Apparatus and Measurement Methods."

3.2. ACCREDITATIONS

CNAS - Registration Number: L3732

China National Accreditation Service for Conformity Assessment, The test firm Registration Number: L3732

FCC - Designation Number: CN1303

World Standardization Certification & Testing Group(Shenzhen) CO., LTD. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Designation Number: CN1303.

ANAB - Certificate Number: AT-3951

The EMC Laboratory has been accredited by the American Association for Laboratory Accreditation (ANAB). Certification Number: AT-3951

Report No.: WSCT-ANAB-R&E241100056A-RF

3.3. EUT System Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

Fig. 3.2-1 Configuration of EUT System

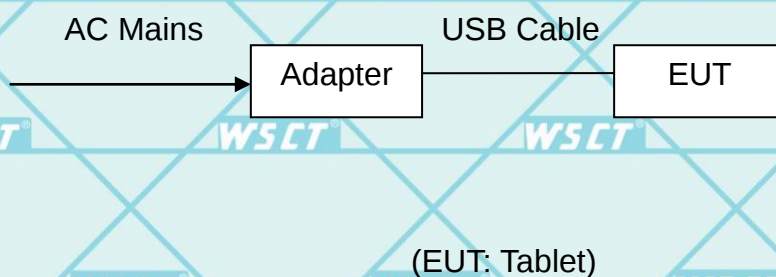


Table 3.2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Note
1	Adapter	Adapter1/2		Accessories

***Note: All the accessories have been used during the test. The following “EUT” in setup diagram means EUT system.

Report No.: WSCT-ANAB-R&E241100056A-RF

3.4. Description Of Test Channels And Test Modes

Test channels:

Test Mode	UL Channel	UL Channel No.	UL Frequency (MHz)
GSM/GPRS/EGPRS 850	Low Channel	128	824.2
	Middle Channel	190	836.6
	High Channel	251	848.8
GSM/GPRS/EGPRS 1900	Low Channel	512	1850.2
	Middle Channel	661	1880.0
	High Channel	810	1909.8
WCDMA Band 2	Low Channel	9262	1852.4
	Middle Channel	9400	1880.0
	High Channel	9538	1907.6
WCDMA Band 4	Low Channel	1312	1712.4
	Middle Channel	1412	1732.6
	High Channel	1513	1752.6
WCDMA Band 5	Low Channel	4132	826.4
	Middle Channel	4182	836.4
	High Channel	4233	846.6

LTE Band2			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	1.4	18607	1850.7
	3	18615	1851.5
	5	18625	1852.5
	10	18650	1855
	15	18675	1857.5
	20	18700	1860
Mid Range	1.4/3/5/10/15/20	18900	1880
High Range	1.4	19193	1909.3
	3	19185	1908.5
	5	19175	1907.5
	10	19150	1905
	15	19125	1902.5
	20	19100	1900

Report No.: WSCT-ANAB-R&E241100056A-RF

LTE Band4			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	1.4	19957	1710.7
	3	19965	1711.5
	5	19975	1712.5
	10	20000	1715
	15	20025	1717.5
	20	20050	1720
Mid Range	1.4/3/5/10/15/20	20175	1732.5
High Range	1.4	20393	1754.3
	3	20385	1753.5
	5	20375	1752.5
	10	20350	1750
	15	20325	1747.5
	20	20300	1745

LTE Band 5			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	1.4	20407	824.7
	3	20415	825.5
	5	20425	826.5
	10	20450	829
Mid Range	1.4/3/5/10	20525	836.5
High Range	1.4	20643	848.3
	3	20635	847.5
	5	20625	846.5
	10	20600	844

Report No.: WSCT-ANAB-R&E241100056A-RF

LTE Band 7			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	5	20775	2502.5
	10	20800	2505
	15	20825	2507.5
	20	20850	2510
Mid Range	5/10/15/20	21100	2535
High Range	5	21425	2567.5
	10	21400	2565
	15	21375	2562.5
	20	21350	2560

LTE Band 12			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	1.4	23017	699.7
	3	23025	700.5
	5	23035	701.5
	10	23060	704
Mid Range	1.4/3/5/10	23095	707.5
High Range	1.4	23173	715.3
	3	23165	714.5
	5	23155	713.5
	10	23130	711

LTE Band 13			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	5	23205	779.5
Mid Range	5/10	23230	782
High Range	5	23255	784.5

LTE Band 17			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	5	23755	706.5
	10	23780	709
Mid Range	5/10	23790	710
High Range	5	23825	713.5
	10	23800	711

Report No.: WSCT-ANAB-R&E241100056A-RF

LTE Band25			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	1.4	26047	1850.7
	3	26055	1851.5
	5	26065	1852.5
	10	26090	1855
	15	26115	1857.5
	20	26140	1860
Mid Range	1.4/3/5/10/15/20	26365	1880
High Range	1.4	26683	1909.3
	3	26675	1908.5
	5	26665	1907.5
	10	26640	1905
	15	26615	1902.5
	20	26590	1900

LTE Band26(814-824MHz)			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	1.4	26697	814.7
	3	26705	815.5
	5	26715	816.5
	10	26740	819
Mid Range	1.4/3/5/10	26740	819
High Range	1.4	26783	823.3
	3	26775	822.5
	5	26765	821.5
	10	26740	819

Report No.: WSCT-ANAB-R&E241100056A-RF

LTE Band26(824-849MHz)			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	1.4	26797	824.7
	3	26805	825.5
	5	26815	826.5
	10	26840	829
	15	26865	831.5
Mid Range	1.4/3/5/10/15	26915	836.5
High Range	1.4	27033	848.3
	3	27025	847.5
	5	27015	846.5
	10	26990	844
	15	26965	841.5

LTE Band 38			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	5	37775	2572.5
	10	37800	2575
	15	37825	2577.5
	20	37850	2580
Mid Range	5/10/15/20	38000	2595
High Range	5	38225	2617.5
	10	38200	2615
	15	38175	2612.5
	20	38150	2610

LTE Band 41			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	5	39675	2498.5
	10	39700	2501
	15	39725	2503.5
	20	39750	2506
Mid Range	5/10/15/20	40620	2593
High Range	5	41565	2687.5
	10	41540	2685
	15	41515	2682.5
	20	41490	2680

Report No.: WSCT-ANAB-R&E241100056A-RF

LTE Band66			
Test Channel	BW(MHz)	UL Channel	Frequency(MHz)
Low Range	1.4	131979	1710.7
	3	131987	1711.5
	5	131997	1712.5
	10	132022	1715
	15	132047	1717.5
	20	132322	1720
Mid Range	1.4/3/5/10/15/20	132322	1745
High Range	1.4	132665	1779.3
	3	132657	1778.5
	5	132647	1777.5
	10	132622	1775
	15	132597	1772.5
	20	132572	1770

Note 1: BPSK&QPSK&16QAM modulation has been measured;

Note 2: The worst condition was recorded in the test report if no other modes test data.

Report No.: WSCT-ANAB-R&E241100056A-RF

3.5. Equipment Modifications

Not available for this EUT intended for grant.

Report No.: WSCT-ANAB-R&E241100056A-RF

4. SUMMARY OF TEST REQUIREMENTS AND RESULTS

No.	Description	FCC Part No.	Test Verdict	Remark
1	Conducted RF Output Power	2.1046	Pass	--
2	Effective (Isotropic) Radiated Power	2.1046 22.913(a) 24.232(c) 27.50 90.635(b) 90.542(a) 90.1321(a)	Pass	--
3	Peak to Average Ratio	2.1046 22.913(d) 24.232(d) 27.50(d)	Pass	--
4	Occupied Bandwidth	2.1049 22.917(b) 24.238(b) 27.53 90.209	Pass	--
5	Frequency Stability	2.1055 22.355 24.235 27.54 90.213	Pass	--
6	Spurious Emission at Antenna Terminals	2.1051 22.917 24.238 27.53 90.691 90.543	Pass	--
7	Band Edge	2.1051 22.917 24.238 27.53 90.691 90.543	Pass	--
8	Field Strength of Spurious Radiation	2.1053 22.917 24.238 27.53 90.691 90.543	Pass	--

Report No.: WSCT-ANAB-R&E241100056A-RF

5. MEASUREMENT INSTRUMENTS

NAME OF EQUIPMENT	MANUFACTURER	MODEL	SERIAL NUMBER	Calibration Date	Calibration Due.
EMI Test Receiver	R&S	ESCI	100005	11/04/2024	11/03/2025
LISN	AFJ	LS16	16010222119	11/04/2024	11/03/2025
LISN(EUT)	Mestec	AN3016	04/10040	11/04/2024	11/03/2025
Universal Radio Communication Tester	R&S	CMU 200	1100.0008.02	11/04/2024	11/03/2025
Coaxial cable	Megalon	LMR400	N/A	11/04/2024	11/03/2025
GPIO cable	Megalon	GPIO	N/A	11/04/2024	11/03/2025
Spectrum Analyzer	R&S	FSU	100114	11/04/2024	11/03/2025
Pre Amplifier	H.P.	HP8447E	2945A02715	11/04/2024	11/03/2025
Pre-Amplifier	CDSI	PAP-1G18-38	--	11/04/2024	11/03/2025
Loop Antenna	R&S	HFH2-Z2	100296	11/04/2024	11/03/2025
Bi-log Antenna	SCHWARZBECK	VULB9168	01488	11/04/2024	11/03/2025
9*6*6 Anechoic	--	--	--	11/04/2024	11/03/2025
Horn Antenna	COMPLIANCE ENGINEERING	CE18000	--	11/04/2024	11/03/2025
Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-631	11/04/2024	11/03/2025
Power meter	Anritsu	ML2487A	6K00003613	11/04/2024	11/03/2025
Power meter	Anritsu	MA2491A	32263	11/04/2024	11/03/2025
Cable	TIME MICROWAVE	LMR-400	N-TYPE04	11/04/2024	11/03/2025
System-Controller	CCS	N/A	N/A	N.C.R	N.C.R
Turn Table	CCS	N/A	N/A	N.C.R	N.C.R
Antenna Tower	CCS	N/A	N/A	N.C.R	N.C.R
RF cable	Murata	MXHQ87WA3000	-	11/04/2024	11/03/2025
Loop Antenna	EMCO	6502	00042960	11/04/2024	11/03/2025
Wideband Radio Communication Tester	R&S	CMW 500	103974	11/04/2024	11/03/2025
Horn Antenna	SCHWARZBECK	BBHA 9170	1123	11/04/2024	11/03/2025
H & T Chamber	Guangzhou gongwen	GDJS-500-40	0329	11/04/2024	11/03/2025
UXM 5G Wireless Test Platform	KEYSIGHT	E7515B	MY60192341	11/04/2024	11/03/2025
Anechoic chamber	SAEMC	966	-	11/04/2024	11/03/2025
Spectrum Analyzer	KEYSIGHT	N9010B	MY60241089	11/04/2024	11/03/2025

Report No.: WSCT-ANAB-R&E241100056A-RF

6. Transmitter Radiated Power (EIRP/ERP)

Test limit:

FCC § 2.1046 & 22.913(a) & 24.232(c) & 27.50(a) & 27.50(b) & 27.50(c) & 27.50(d) & 27.50(h) & 27.50(j) & 27.50(k) & 90.635(b) & 90.542(a)

According to FCC section 22.913(a) (5), the Effective Radiated Power (ERP) of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

According to FCC section 24.232(c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

According to FCC section 27.50(a) (3), for mobile and portable stations transmitting in the 2305-2315MHz band or the 2350-2360MHz band, the average EIRP must not exceed 50 mill watts within any 1 megahertz of authorized bandwidth, except that for mobile and portable stations compliant with 3GPP LTE standards. For mobile and portable stations using time division depleting (TDD) technology, the duty cycle must not exceed 38 percent in the 2305-2315 MHz and 2350-2360 MHz bands.

FCC section 27.50(b) (10), portable stations (hand-held devices) transmitting in the 746-757MHz, 776-788MHz, and 805-806MHz bands are limited to 3 watts ERP.

FCC section 27.50(c) (10), portable stations (hand-held devices) in the 600MHz uplink band and the 698-746MHz band, and fixed and mobile stations in the 600MHz uplink band are limited to 3 watts ERP.

FCC section 27.50(d) (4), fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP. Fixed stations operating in the 1710-1755 MHz band are limited to a maximum antenna height of 10 meters above ground. Mobile and portable stations operating in these bands must employ a means for limiting power to the minimum necessary for successful communications.

(7) Fixed, mobile, and portable (hand-held) stations operating in the 2000-2020 MHz band are limited to 2 watts EIRP.

And FCC section 27.50(h) (2), for mobile and other user stations, mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

FCC section 27.50(j) (3), for mobile, and portable (hand-held) stations operating in the 3700-3980 MHz band are limited to 1 watt EIRP.

FCC section 27.50(k) (3), Mobile devices are limited to 1Watt (30 dBm) EIRP in the 3450-3550 MHz band.

Test procedure:

Description of the Conducted Output Power Measurement

The EUT is coupled to the SS with attenuator through power splitter; the RF load attached to EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. A system simulator is used to establish communication with the EUT, and its parameters are set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The relevant equation for determining the conducted measured value is:

Conducted Output Power Value (dBm) = Measured Value (dBm) + Path Loss (dB)

where:

Conducted Output Power Value = final conducted measured value in the conducted power test, in dBm;
Measured Value = measured conducted power received by spectrum analyzer or power meter, in dBm;
Path Loss = signal attenuation in the connecting cable between the transmitter and spectrum analyzer or power meter, including external cable loss, in dB;

During the test, the data of Path Loss (dB) is added in the spectrum analyzer or power meter, so Measured Value (dBm) is the final values which contains the data of Path Loss (dB).

Report No.: WSCT-ANAB-R&E241100056A-RF

Description of the Transmitter Radiated Power Measurement

In many cases, the RF output power limits for licensed digital transmission devices is specified in terms of effective radiated power (ERP) or equivalent isotropic radiated power (EIRP). Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

Final measurement calculation as below

The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = P_{\text{Meas}} + \text{GT} - \text{LC}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas}, typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

dBd (ERP)=dBi (EIRP) -2.15 dB

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

The relevant equation for determining the ERP/EIRP from the radiated RF output power is:

$$\text{ERP/EIRP (dBm)} = \text{SA Read Value (dBm)} + \text{Correction Factor (dB)}$$

where:

ERP/EIRP = effective or equivalent radiated power, in dBm;

SA Read Value = measured transmitter power received by EMI receiver or spectrum analyzer, in dBm;

Correction Factor = total correction factor including cable loss, in dB;

During the test, the data of Correction Factor (dB) is added in the EMI receiver or spectrum analyzer, so SA Read Value (dBm) is the final values which contains the data of Correction Factor (dB).

Report No.: WSCT-ANAB-R&E241100056A-RF

Test Result

GSM Mode Test Data:

Mode		Frequency (MHz)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	Limt (dBm)	Verdict
GSM850		824.2	32.50	0.5	-1.65	30.85	38.45	Pass
		836.6	32.24	0.5	-1.65	30.59	38.45	Pass
		848.8	31.89	0.5	-1.65	30.24	38.45	Pass
GPRS850	1 Tx Slots	824.2	29.36	0.5	-1.65	27.71	38.45	Pass
		836.6	29.67	0.5	-1.65	28.02	38.45	Pass
		848.8	29.85	0.5	-1.65	28.20	38.45	Pass
	2 Tx Slots	824.2	29.38	0.5	-1.65	27.73	38.45	Pass
		836.6	30.37	0.5	-1.65	28.72	38.45	Pass
		848.8	29.92	0.5	-1.65	28.27	38.45	Pass
	3 Tx Slots	824.2	29.32	0.5	-1.65	27.67	38.45	Pass
		836.6	30.3	0.5	-1.65	28.65	38.45	Pass
		848.8	30.3	0.5	-1.65	28.65	38.45	Pass
	4 Tx Slots	824.2	29.28	0.5	-1.65	27.63	38.45	Pass
		836.6	30.07	0.5	-1.65	28.42	38.45	Pass
		848.8	29.71	0.5	-1.65	28.06	38.45	Pass
EGPRS850	1 Tx Slots	824.2	27.95	0.5	-1.65	26.30	38.45	Pass
		836.6	27.21	0.5	-1.65	25.56	38.45	Pass
		848.8	26.35	0.5	-1.65	24.70	38.45	Pass
	2 Tx Slots	824.2	27.45	0.5	-1.65	25.80	38.45	Pass
		836.6	26.42	0.5	-1.65	24.77	38.45	Pass
		848.8	26.74	0.5	-1.65	25.09	38.45	Pass
	3 Tx Slots	824.2	27.85	0.5	-1.65	26.20	38.45	Pass
		836.6	27.25	0.5	-1.65	25.60	38.45	Pass
		848.8	26.98	0.5	-1.65	25.33	38.45	Pass
	4 Tx Slots	824.2	26.7	0.5	-1.65	25.05	38.45	Pass
		836.6	27.5	0.5	-1.65	25.85	38.45	Pass
		848.8	28.02	0.5	-1.65	26.37	38.45	Pass

Mode		Frequency (MHz)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limt (dBm)	Verdict
GSM1900		1850.2	30.00	-1	29.00	33.01	Pass
		1880	29.7	-1	28.70	33.01	Pass
		1909.8	29.32	-1	28.32	33.01	Pass
GPRS1900	1 Tx Slots	1850.2	26.44	-1	25.44	33.01	Pass
		1880	26.95	-1	25.95	33.01	Pass
		1909.8	26.77	-1	25.77	33.01	Pass
	2 Tx Slots	1850.2	26.4	-1	25.40	33.01	Pass
		1880	28.07	-1	27.07	33.01	Pass
		1909.8	27.04	-1	26.04	33.01	Pass
	3 Tx Slots	1850.2	26.97	-1	25.97	33.01	Pass
		1880	27.5	-1	26.50	33.01	Pass
		1909.8	28.28	-1	27.28	33.01	Pass
	4 Tx Slots	1850.2	26.33	-1	25.33	33.01	Pass
		1880	26.82	-1	25.82	33.01	Pass
		1909.8	27.37	-1	26.37	33.01	Pass
EGPRS1900	1 Tx Slots	1850.2	25.19	-1	24.19	33.01	Pass
		1880	24.28	-1	23.28	33.01	Pass
		1909.8	25.21	-1	24.21	33.01	Pass
	2 Tx Slots	1850.2	24.41	-1	23.41	33.01	Pass
		1880	25.66	-1	24.66	33.01	Pass
		1909.8	25.31	-1	24.31	33.01	Pass
	3 Tx Slots	1850.2	24.95	-1	23.95	33.01	Pass
		1880	24.97	-1	23.97	33.01	Pass
		1909.8	25.68	-1	24.68	33.01	Pass
		1850.2	25.4	-1	24.40	33.01	Pass
	4 Tx Slots	1880	25.27	-1	24.27	33.01	Pass

Report No.: WSCT-ANAB-R&E241100056A-RF

		1909.8	23.99	-1	22.99	33.01	Pass
--	--	--------	-------	----	-------	-------	------

Note 1: For the GPRS and EGPRS mode, all slots were tested and just the worst data were recorded in this table.

Note 2: ERP/EIRP = P_{Meas} + GT - LC

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as

P_{Meas}, typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

ERP = EIRP - 2.15; where ERP and EIRP are expressed in consistent units.

Note 3: Set PCL to 5 for GSM/GPRS 850 (power class 4) and 0 for GSM/GPRS 1900 (power class 1). Set PCL to 8 for EGPRS850 (power class E2) and 2 for EGPRS1900 (power class E2)

Report No.: WSCT-ANAB-R&E241100056A-RF

WCDMA Mode Test Data:

Mode Test Data:									
Band	Mode		Frequency (MHz)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict	
Band 2	RMC 12.2K		1852.4	22.85	-1	21.85	33.01	Pass	
			1880	23.34	-1	22.34	33.01	Pass	
			1907.6	23.16	-1	22.16	33.01	Pass	
	HSDPA	1 Tx Slots	1852.4	22.88	-1	21.88	33.01	Pass	
			1880	23.18	-1	22.18	33.01	Pass	
			1907.6	23.46	-1	22.46	33.01	Pass	
		2 Tx Slots	1852.4	23.23	-1	22.23	33.01	Pass	
			1880	23.00	-1	22.00	33.01	Pass	
			1907.6	23.02	-1	22.02	33.01	Pass	
		3 Tx Slots	1852.4	22.51	-1	21.51	33.01	Pass	
			1880	22.54	-1	21.54	33.01	Pass	
			1907.6	22.72	-1	21.72	33.01	Pass	
		4 Tx Slots	1852.4	23.22	-1	22.22	33.01	Pass	
			1880	23.26	-1	22.26	33.01	Pass	
			1907.6	23.23	-1	22.23	33.01	Pass	
		HSUPA	1 Tx Slots	1852.4	22.71	-1	21.71	33.01	Pass
				1880	22.51	-1	21.51	33.01	Pass
				1907.6	23.32	-1	22.32	33.01	Pass
			2 Tx Slots	1852.4	22.59	-1	21.59	33.01	Pass
				1880	23.16	-1	22.16	33.01	Pass
				1907.6	22.6	-1	21.60	33.01	Pass
	3 Tx Slots		1852.4	22.76	-1	21.76	33.01	Pass	
			1880	22.95	-1	21.95	33.01	Pass	
			1907.6	23.09	-1	22.09	33.01	Pass	
	4 Tx Slots		1852.4	23.33	-1	22.33	33.01	Pass	
			1880	23.27	-1	22.27	33.01	Pass	
			1907.6	23.33	-1	22.33	33.01	Pass	
	5 Tx Slots	1852.4	23.2	-1	22.20	33.01	Pass		
		1880	23.41	-1	22.41	33.01	Pass		
		1907.6	22.63	-1	21.63	33.01	Pass		

Report No.: WSCT-ANAB-R&E241100056A-RF

Band	Mode	Frequency (MHz)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Verdict
Band 4	RMC 12.2K	1712.4	23.32	-1	22.32	30.00	Pass
		1732.6	22.98	-1	21.98	30.00	Pass
		1752.6	22.53	-1	21.53	30.00	Pass
	HSDPA	1 Tx Slots	1712.4	-1	22.32	30.00	Pass
			1732.6	-1	21.98	30.00	Pass
			1752.6	-1	21.53	30.00	Pass
		2 Tx Slots	1712.4	-1	21.84	30.00	Pass
			1732.6	-1	21.80	30.00	Pass
			1752.6	-1	21.77	30.00	Pass
		3 Tx Slots	1712.4	-1	21.97	30.00	Pass
			1732.6	-1	21.63	30.00	Pass
			1752.6	-1	22.20	30.00	Pass
		4 Tx Slots	1712.4	-1	21.86	30.00	Pass
			1732.6	-1	22.38	30.00	Pass
			1752.6	-1	21.74	30.00	Pass
	HSUPA	1 Tx Slots	1712.4	-1	22.06	30.00	Pass
			1732.6	-1	21.79	30.00	Pass
			1752.6	-1	22.40	30.00	Pass
		2 Tx Slots	1712.4	-1	22.10	30.00	Pass
			1732.6	-1	22.07	30.00	Pass
			1752.6	-1	21.70	30.00	Pass
		3 Tx Slots	1712.4	-1	21.92	30.00	Pass
			1732.6	-1	22.42	30.00	Pass
			1752.6	-1	21.93	30.00	Pass
		4 Tx Slots	1712.4	-1	21.90	30.00	Pass
			1732.6	-1	21.75	30.00	Pass
			1752.6	-1	22.40	30.00	Pass
		5 Tx Slots	1712.4	-1	22.45	30.00	Pass
			1732.6	-1	21.52	30.00	Pass
			1752.6	-1	22.17	30.00	Pass

Report No.: WSCT-ANAB-R&E241100056A-RF

Band	Mode	Frequency (MHz)	Conducted Output AV Power (dBm)	Antenna Gain (dBi)	Antenna Gain (dBd)	ERP (dBm)	Limit (dBm)	Verdict
Band 5	RMC 12.2K	826.4	22.88	0.5	-1.65	21.23	38.45	Pass
		836.4	22.44	0.5	-1.65	20.79	38.45	Pass
		846.6	22.81	0.5	-1.65	21.16	38.45	Pass
	1 Tx Slots	826.4	22.51	0.5	-1.65	20.86	38.45	Pass
		836.4	22.55	0.5	-1.65	20.90	38.45	Pass
		846.6	22.23	0.5	-1.65	20.58	38.45	Pass
		826.4	22.3	0.5	-1.65	20.65	38.45	Pass
		836.4	22.45	0.5	-1.65	20.80	38.45	Pass
		846.6	22.1	0.5	-1.65	20.45	38.45	Pass
	2 Tx Slots	826.4	22.13	0.5	-1.65	20.48	38.45	Pass
		836.4	22.2	0.5	-1.65	20.55	38.45	Pass
		846.6	22.83	0.5	-1.65	21.18	38.45	Pass
		826.4	22.34	0.5	-1.65	20.69	38.45	Pass
		836.4	22.33	0.5	-1.65	20.68	38.45	Pass
		846.6	22.02	0.5	-1.65	20.37	38.45	Pass
	HSDPA	826.4	22.42	0.5	-1.65	20.77	38.45	Pass
		836.4	22.16	0.5	-1.65	20.51	38.45	Pass
		846.6	22.23	0.5	-1.65	20.58	38.45	Pass
		826.4	22.77	0.5	-1.65	21.12	38.45	Pass
		836.4	22.63	0.5	-1.65	20.98	38.45	Pass
		846.6	22.48	0.5	-1.65	20.83	38.45	Pass
		826.4	22.79	0.5	-1.65	21.14	38.45	Pass
		836.4	22.66	0.5	-1.65	21.01	38.45	Pass
		846.6	22.56	0.5	-1.65	20.91	38.45	Pass
		826.4	22.42	0.5	-1.65	20.77	38.45	Pass
		836.4	22.69	0.5	-1.65	21.04	38.45	Pass
		846.6	22.11	0.5	-1.65	20.46	38.45	Pass
		826.4	22.39	0.5	-1.65	20.74	38.45	Pass
		836.4	22.72	0.5	-1.65	21.07	38.45	Pass
		846.6	22.55	0.5	-1.65	20.90	38.45	Pass
	HSUPA	826.4	22.42	0.5	-1.65	20.77	38.45	Pass
		836.4	22.16	0.5	-1.65	20.51	38.45	Pass
		846.6	22.23	0.5	-1.65	20.58	38.45	Pass
		826.4	22.77	0.5	-1.65	21.12	38.45	Pass
		836.4	22.63	0.5	-1.65	20.98	38.45	Pass
		846.6	22.48	0.5	-1.65	20.83	38.45	Pass
		826.4	22.79	0.5	-1.65	21.14	38.45	Pass
		836.4	22.66	0.5	-1.65	21.01	38.45	Pass
		846.6	22.56	0.5	-1.65	20.91	38.45	Pass

Note 1: For the HSDPA and HSUPA mode, all subtests were tested and just the worst data we rerecorded in this table.

Note 2: ERP/EIRP = P_{Meas} + GT - LC

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as P_{Meas}, typically dBW or dBm);

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

ERP = EIRP - 2.15; where ERP and EIRP are expressed in consistent units.

Note: Please refer to Annex (LTE Chapter 1 Transmitter Radiated Power) for more test data

Report No.: WSCT-ANAB-R&E241100056A-RF

7. Peak to Average Ratio

7.1.1. Limit

FCC § 2.1046 & 24.232(d) & 27.50(d) & 27.50(j) & 27.50(k)

In addition, when the transmitter power is measured in terms of average value, the peak-to-average power ratio (PAPR) of the transmitter shall not exceed 13 dB for more than 0.1% of the time using a signal corresponding to the highest PAPR during periods of continuous transmission.

According to FCC section 24.232(d), power measurements for transmissions by stations authorized under this section may be made either in accordance with a Commission-approved average power technique or in compliance with 24.232 (e) of this section. In both instances, equipment employed must be authorized in accordance with the provisions of § 24.51. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

FCC section 24.232(e), peak transmit power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms equivalent voltage. The measurement results shall be properly adjusted for any instrument limitations, such as detector response times, limited resolution bandwidth capability when compared to the emission bandwidth, sensitivity, etc., so as to obtain a true peak measurement for the emission in question over the full bandwidth of the channel.

According to FCC section 27.50(d) (5) & 27.50(j) & 27.50(k), in measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

7.1.2. Test Procedure

Here the lowest, middle and highest channels are selected to perform testing to verify the peak-to-average ratio.

According to KDB 971168 D01, there is CCDF procedure for PAPR:

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval as follows:
 - 1) for continuous transmissions, set to 1 ms,

Report No.: WSCT-ANAB-R&E241100056A-RF

2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.

e) Record the maximum PAPR level associated with a probability of 0.1%.

Report No.: WSCT-ANAB-R&E241100056A-RF

7.2. Test Result


Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
GSM850	128	10.61	13	Pass
	190	9.39	13	Pass
	251	9.32	13	Pass
GPRS850	128	11.64	13	Pass
	190	9.18	13	Pass
	251	12.04	13	Pass
EGPRS850	128	8.28	13	Pass
	190	9.99	13	Pass
	251	10.20	13	Pass
GSM1900	512	10.74	13	Pass
	661	9.10	13	Pass
	810	9.55	13	Pass
GPRS1900	512	9.42	13	Pass
	661	9.14	13	Pass
	810	9.90	13	Pass
EGPRS1900	512	10.99	13	Pass
	661	9.09	13	Pass
	810	11.48	13	Pass

WCDMA Band	Channel	Peak-to-Average Ratio(dB)	Limit(dBm)	Verdict
Band 2	9262	3.52	13	Pass
	9400	3.53	13	Pass
	9538	3.51	13	Pass
Band 4	1312	3.48	13	Pass
	1413	3.50	13	Pass
	1513	3.50	13	Pass
Band 5	4132	3.51	13	Pass
	4182	3.48	13	Pass
	4233	3.50	13	Pass


Report No.: WSCT-ANAB-R&E241100056A-RF

Test diagram

GSM850 128

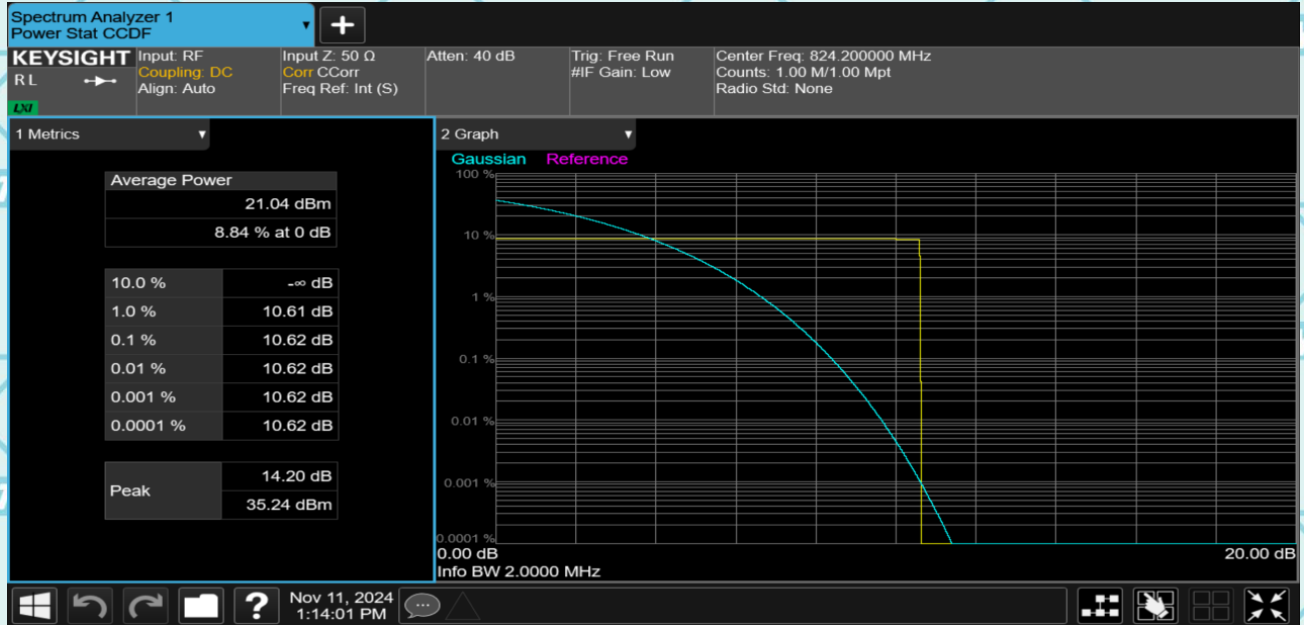

GSM850 190

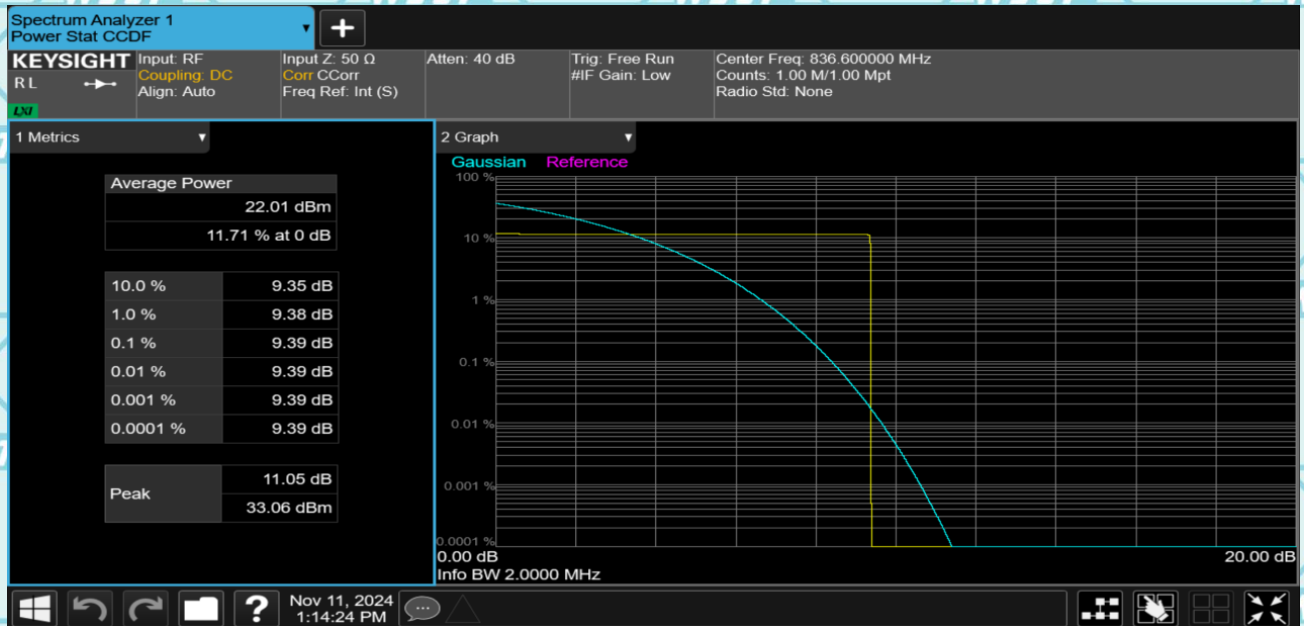

Report No.: WSCT-ANAB-R&E241100056A-RF

GSM850 251




GPRS850 128



Report No.: WSCT-ANAB-R&E241100056A-RF

GPRS850 190

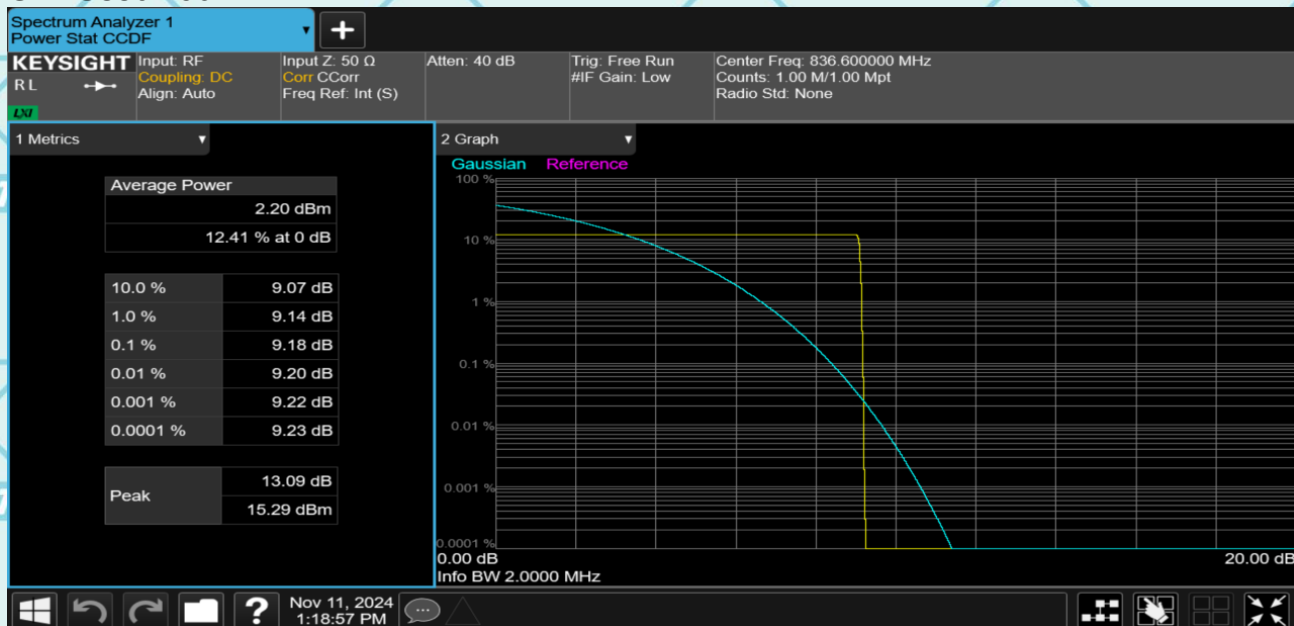


GPRS850 251




Report No.: WSCT-ANAB-R&E241100056A-RF

EPRS850 128

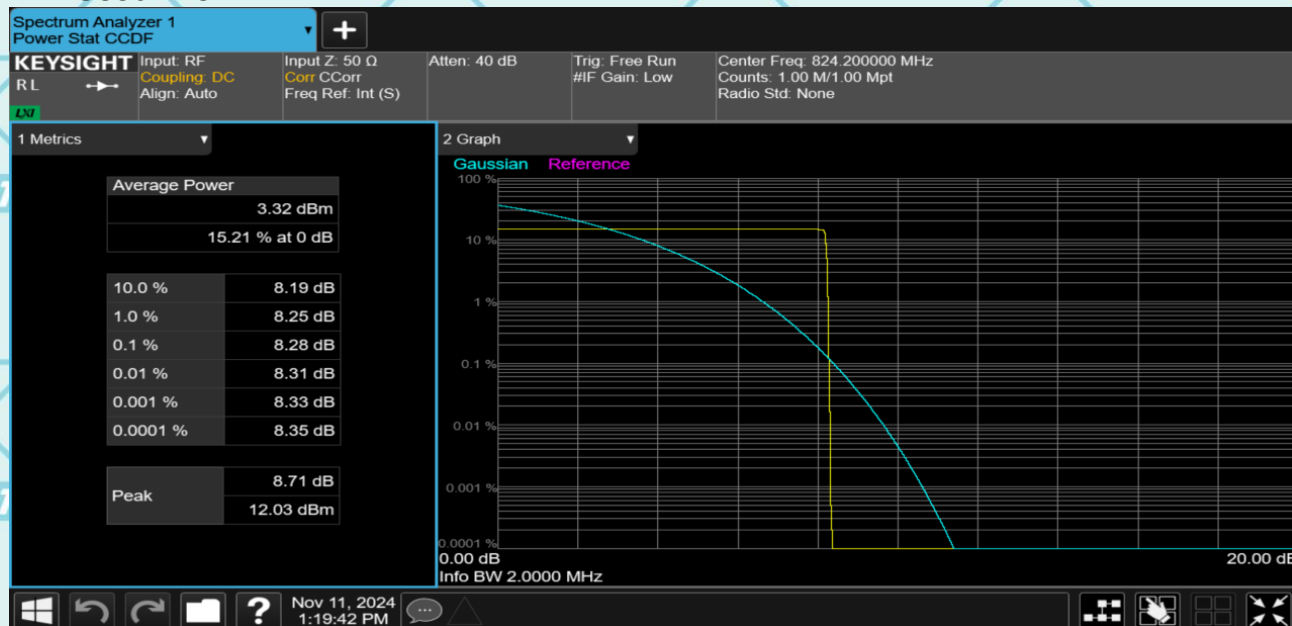


EPRS850 190

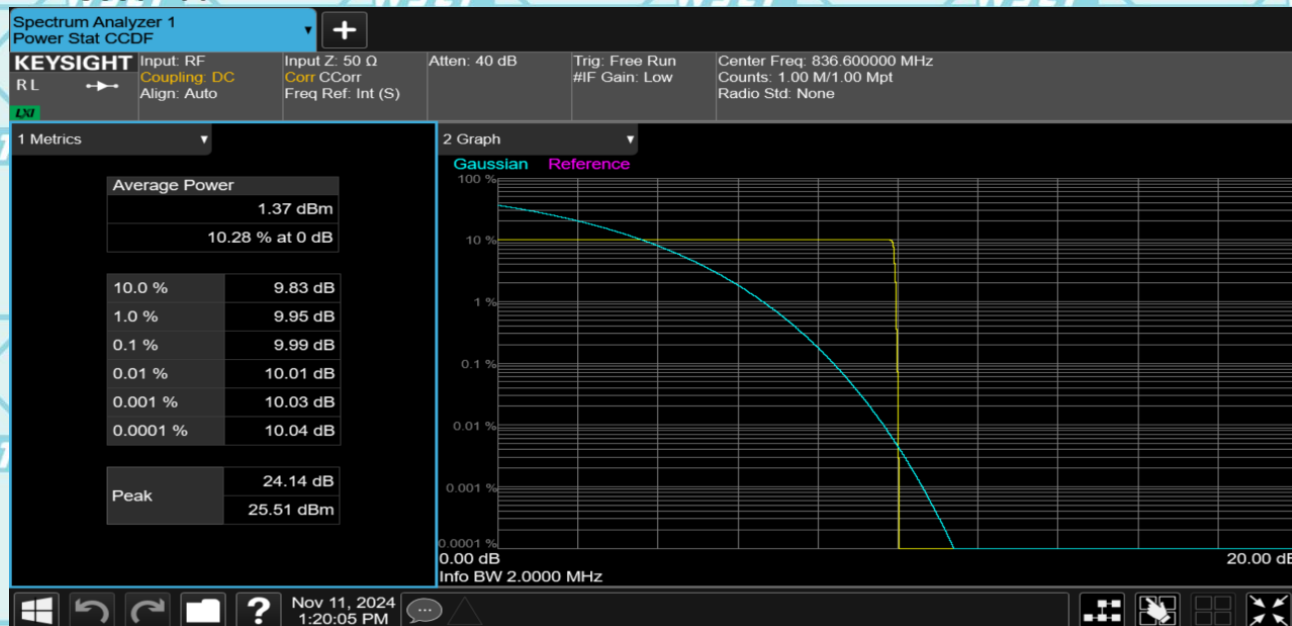


Report No.: WSCT-ANAB-R&E241100056A-RF

EPRS850 251

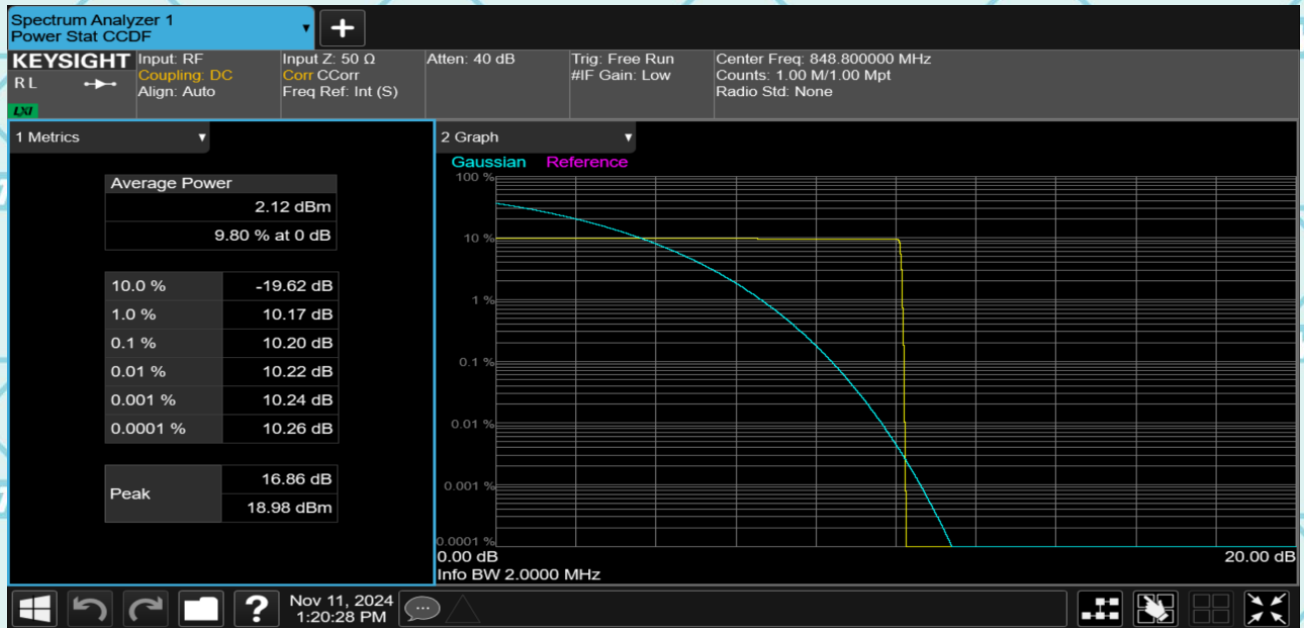


GSM1900 512

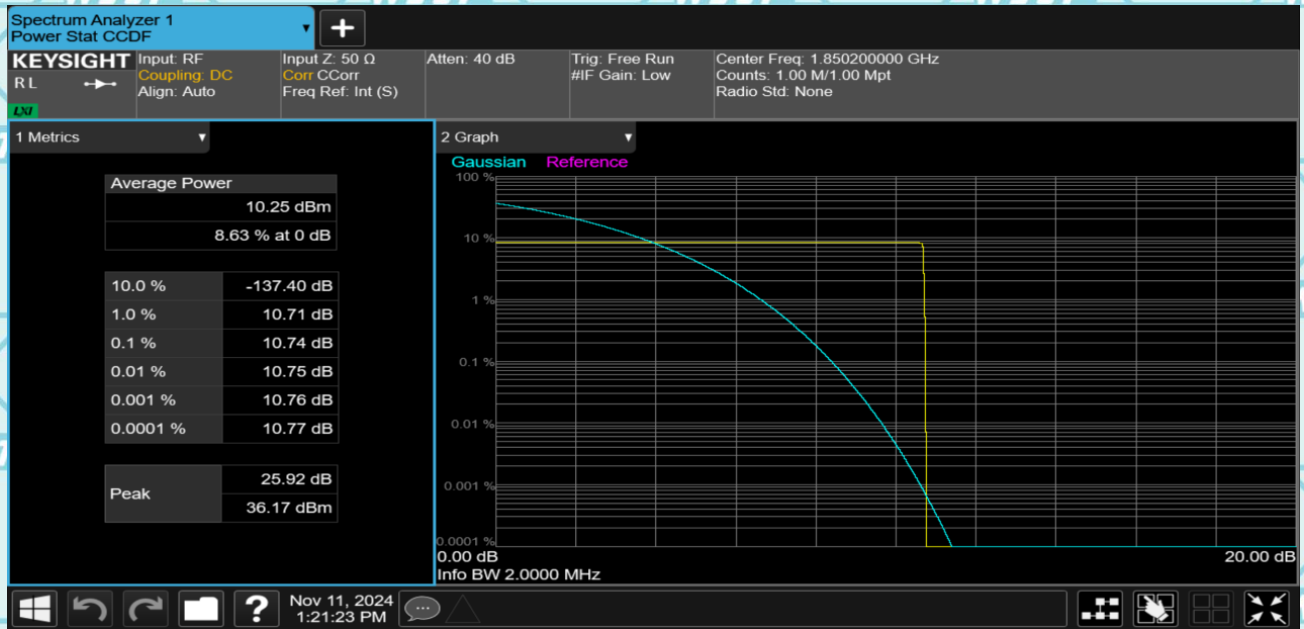

Report No.: WSCT-ANAB-R&E241100056A-RF

GSM1900 661

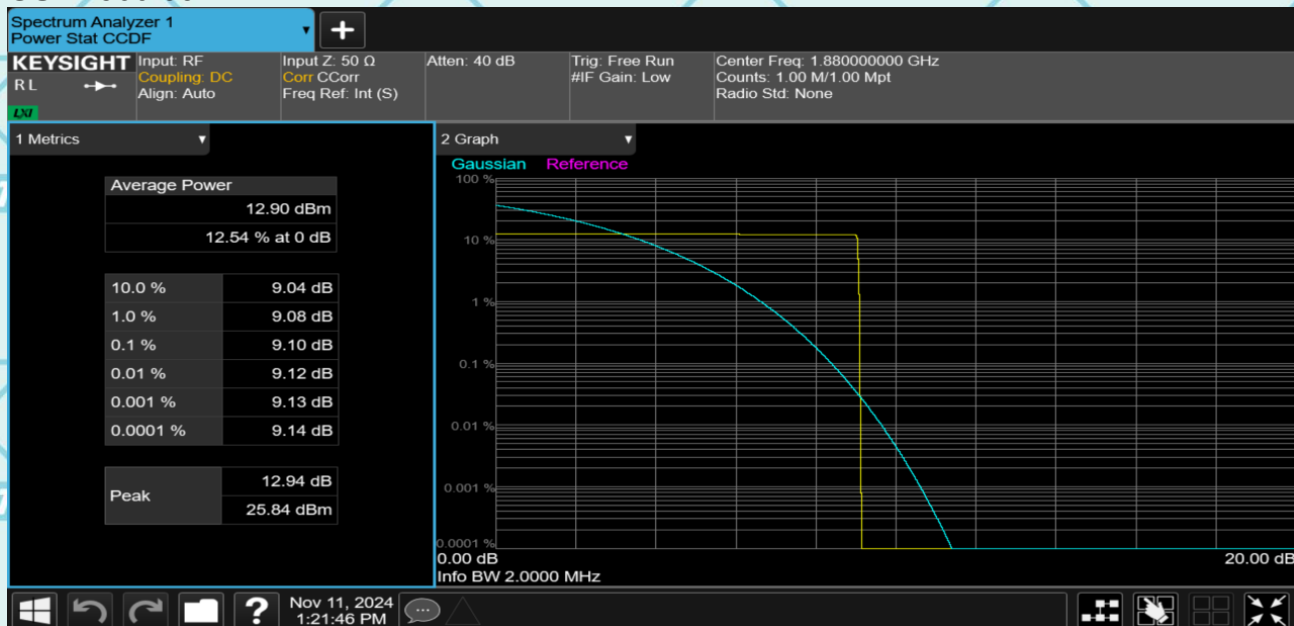


GSM1900 810




Report No.: WSCT-ANAB-R&E241100056A-RF

GPRS1900 512

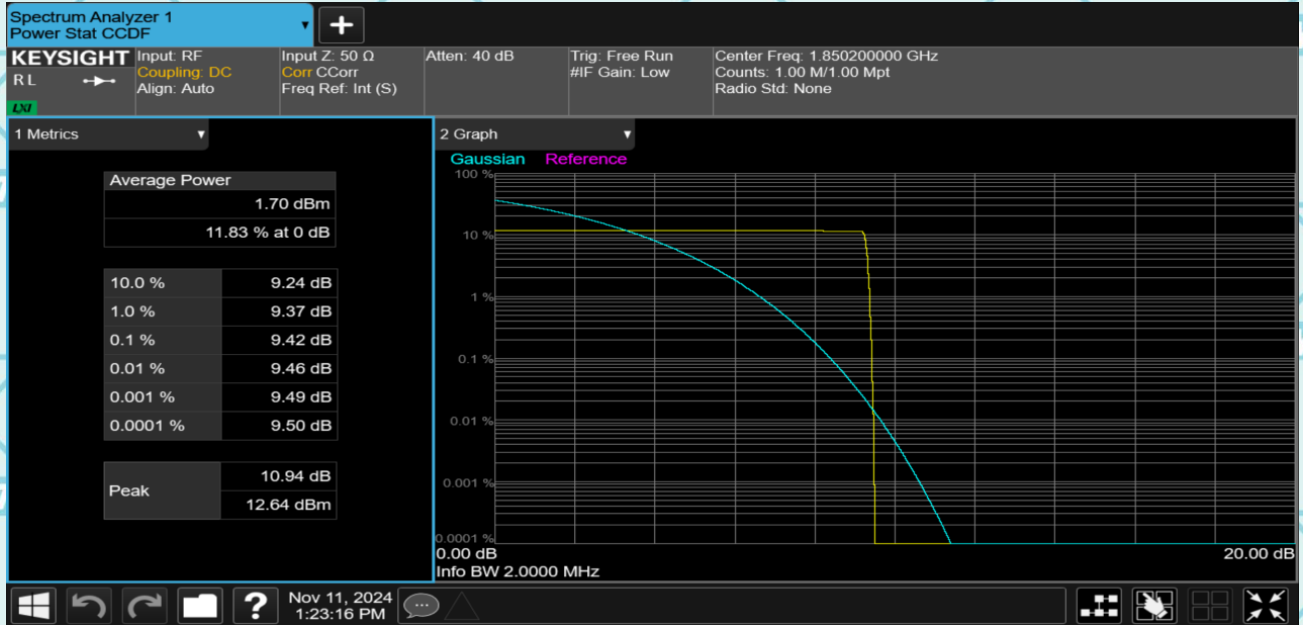


GPRS1900 661

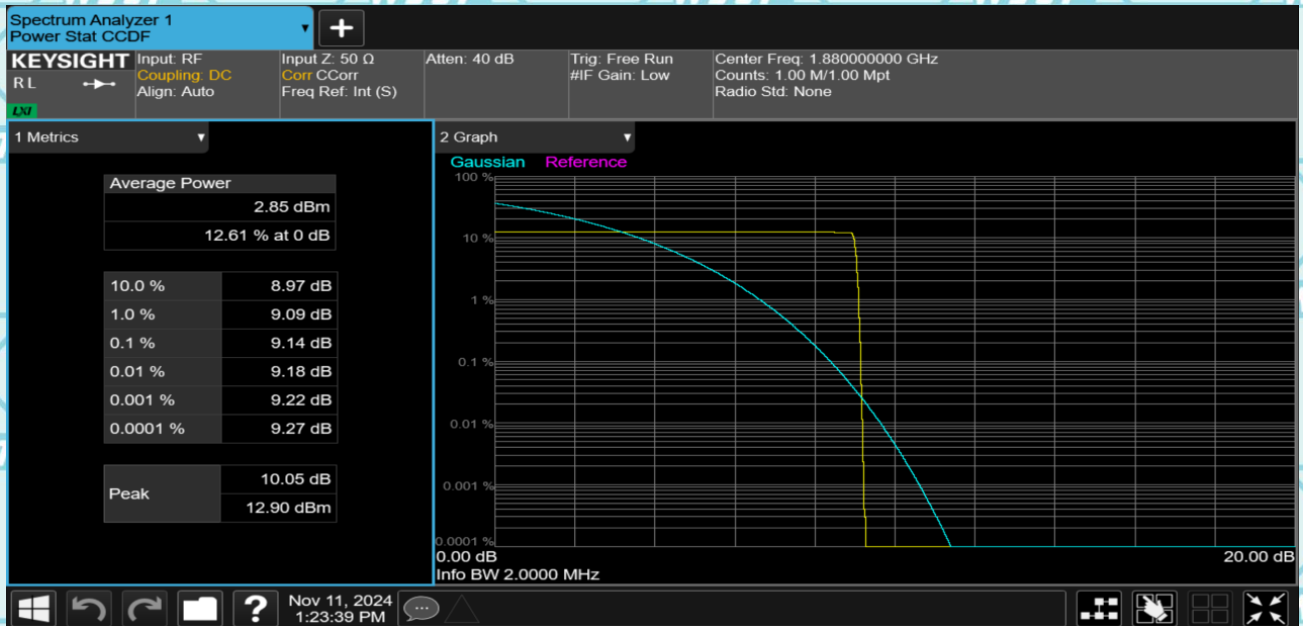


Report No.: WSCT-ANAB-R&E241100056A-RF

GPRS1900 810

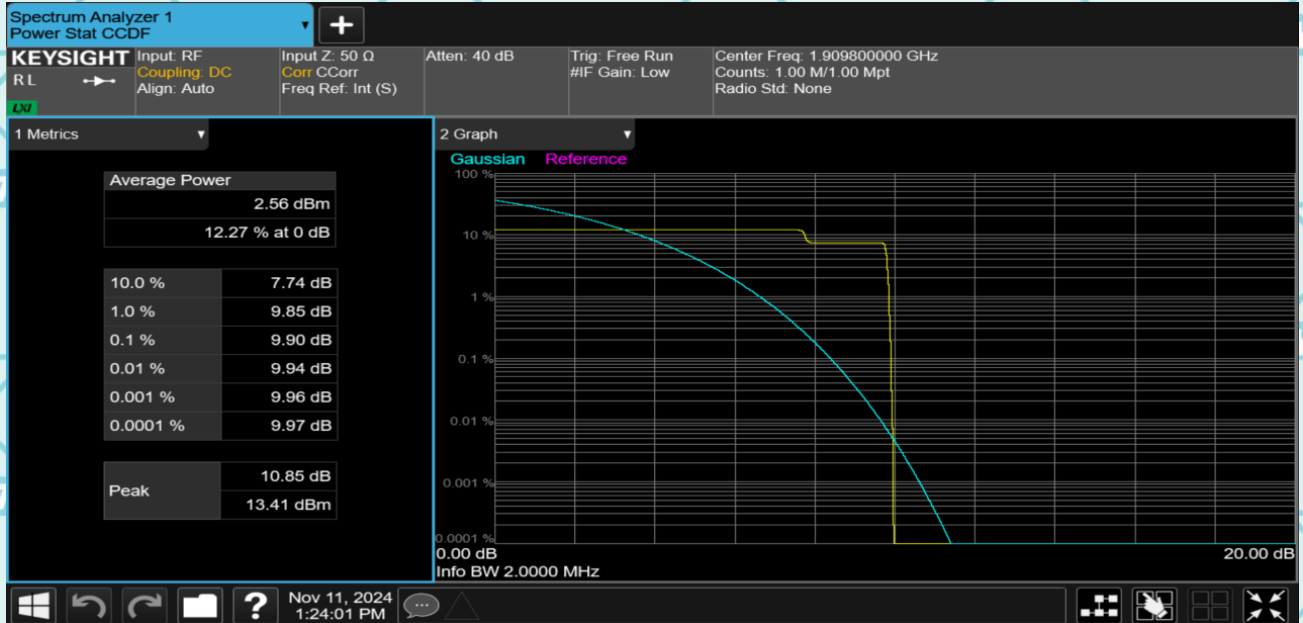


EPRS1900 512

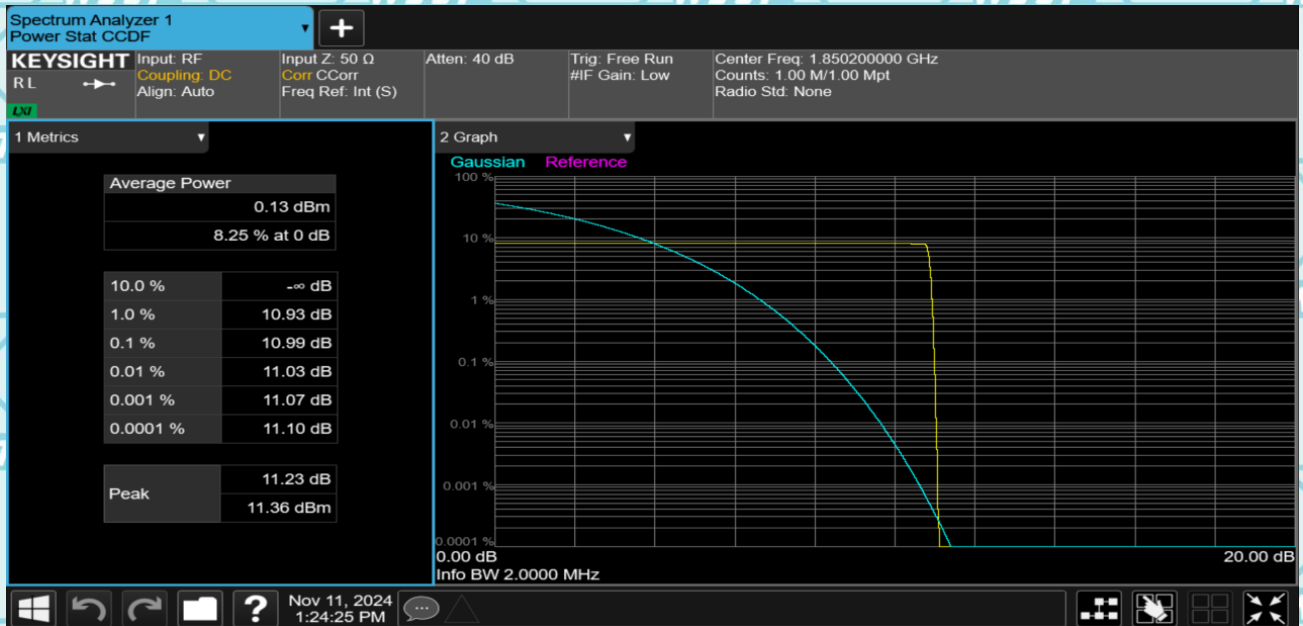

Report No.: WSCT-ANAB-R&E241100056A-RF

EPRS1900 661

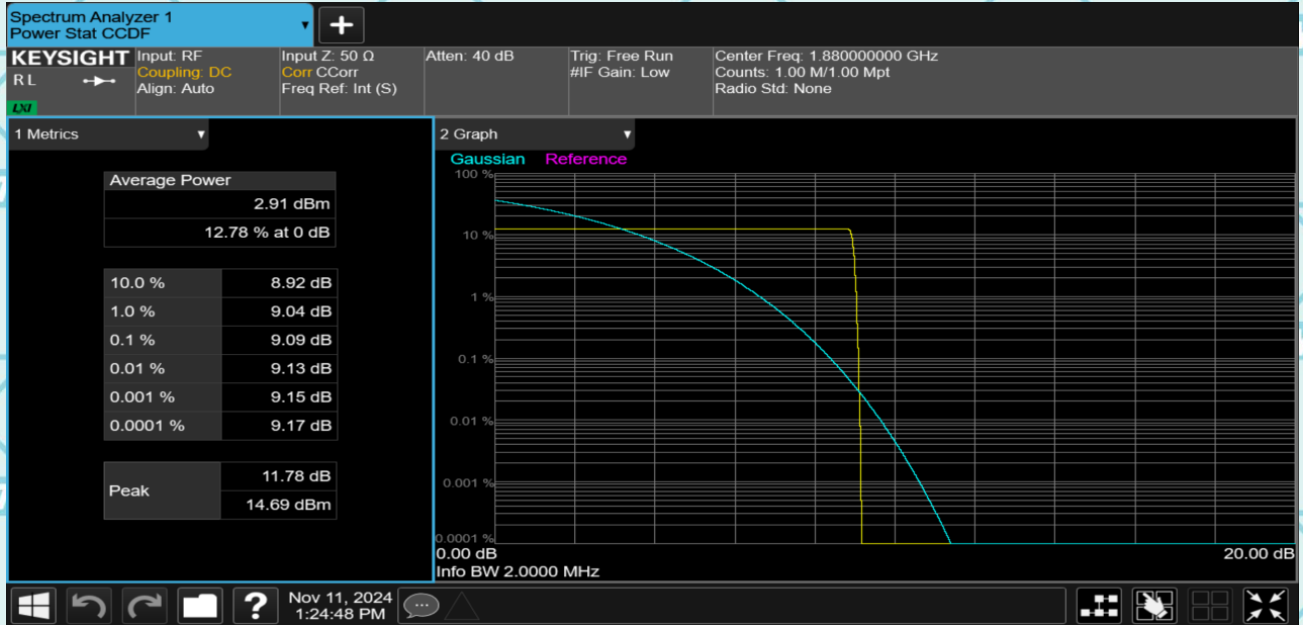


EPRS1900 810



Report No.: WSCT-ANAB-R&E241100056A-RF

Band2 9262

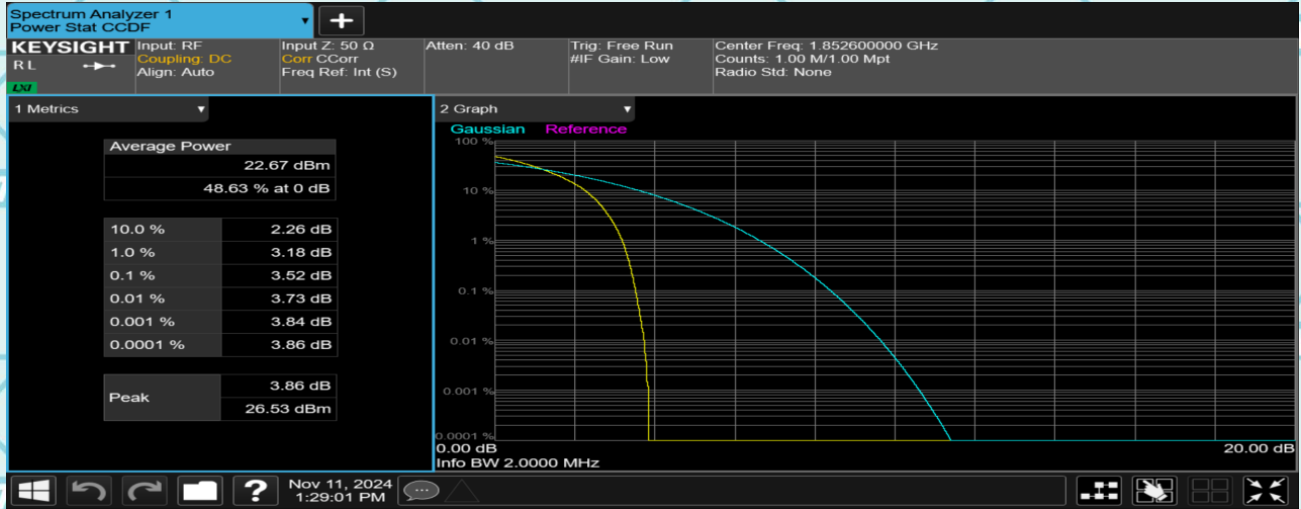

Band2 9400

