



Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency	Antenna	Conducted Power	Duty Factor	Total Power	Limit	Verdict
		(MHz)		(dBm)	(dB)	(dBm)	(dBm)	
NVNT	BLE	2402	Ant1	-4.632	0	-4.632	30	Pass
NVNT	BLE	2442	Ant1	-4.756	0	-4.756	30	Pass
NVNT	BLE	2480	Ant1	-6.556	0	-6.556	30	Pass







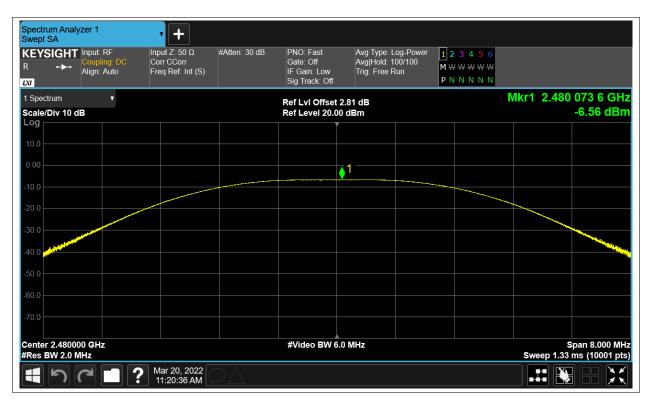






-6dB Bandwidth

Condition	Mode	Frequency (MHz) Antenna		-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	1.162	0.5	Pass
NVNT	BLE	2442	Ant1	1.15	0.5	Pass
NVNT	BLE	2480	Ant1	1.164	0.5	Pass







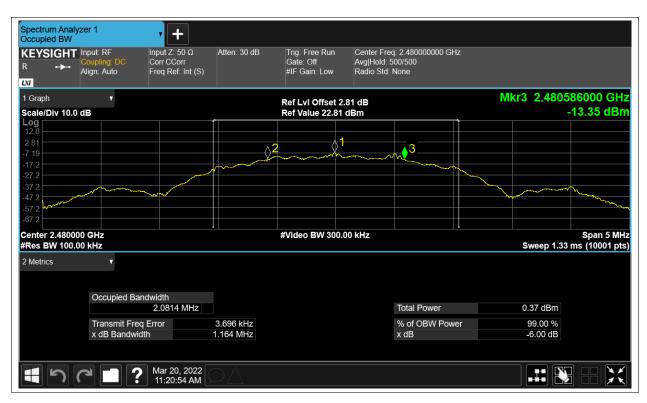






Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.076659789	
NVNT	BLE	2442	Ant1	2.082821283	
NVNT	BLE	2480	Ant1	2.084136737	







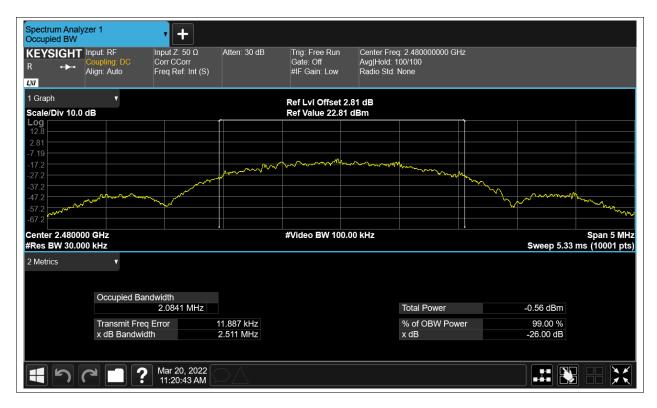






Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-23.405	8	Pass
NVNT	BLE	2442	Ant1	-23.437	8	Pass
NVNT	BLE	2480	Ant1	-25.34	8	Pass







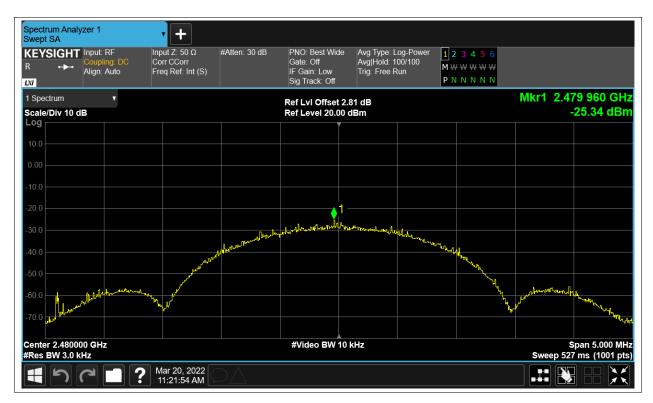






Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-51.47	-20	Pass
NVNT	BLE	2480	Ant1	-48.65	-20	Pass







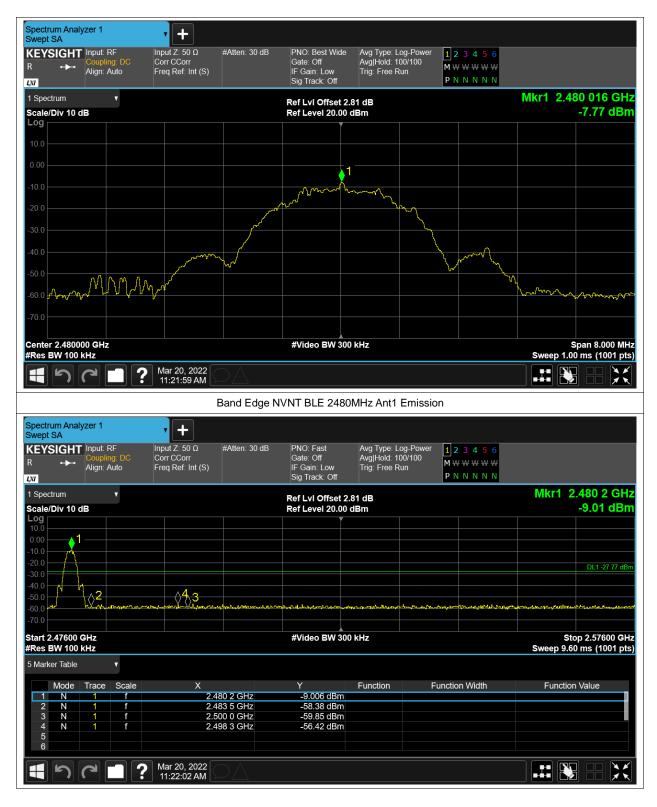





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-42.57	-20	Pass
NVNT	BLE	2442	Ant1	-40.08	-20	Pass
NVNT	BLE	2480	Ant1	-41.41	-20	Pass



