




Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	0.45	30	Pass
NVNT	BLE	2442	Ant1	0.939	30	Pass
NVNT	BLE	2480	Ant1	-0.697	30	Pass



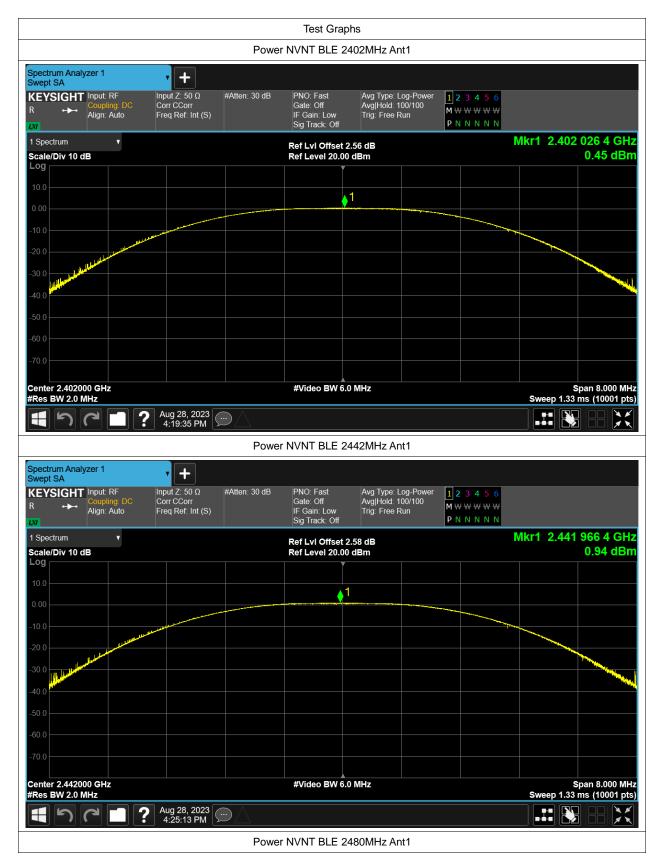



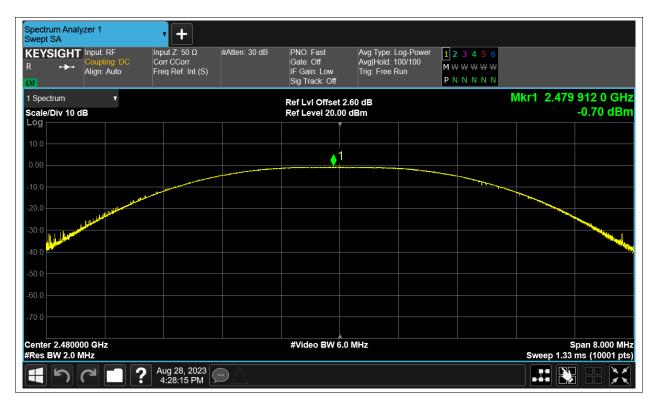





-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	1.19	0.5	Pass
NVNT	BLE	2442	Ant1	1.132	0.5	Pass
NVNT	BLE	2480	Ant1	1.076	0.5	Pass














Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.039	
NVNT	BLE	2442	Ant1	2.041	
NVNT	BLE	2480	Ant1	2.038	

Project No.: JYTSZR2308048



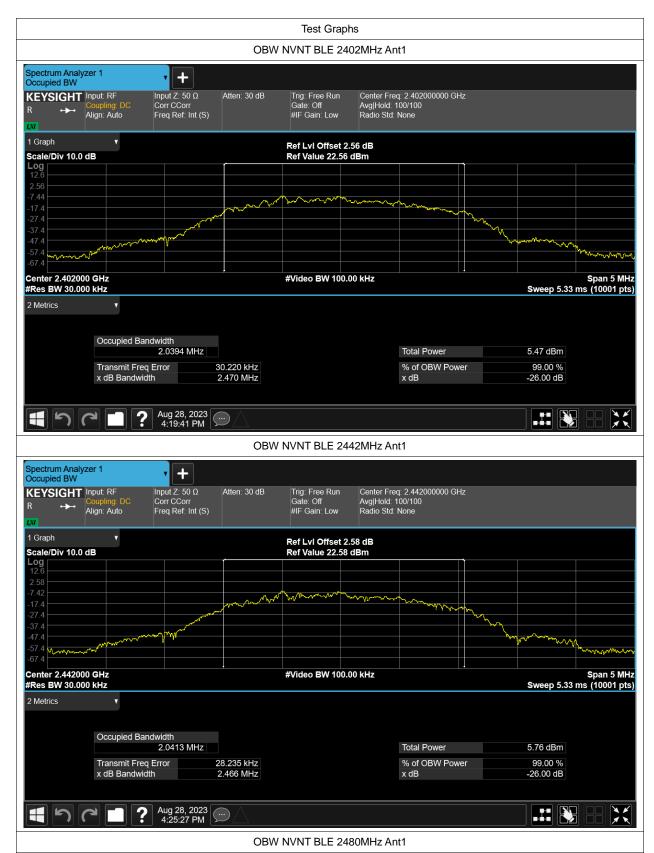











Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-17.444	8	Pass
NVNT	BLE	2442	Ant1	-16.952	8	Pass
NVNT	BLE	2480	Ant1	-18.612	8	Pass



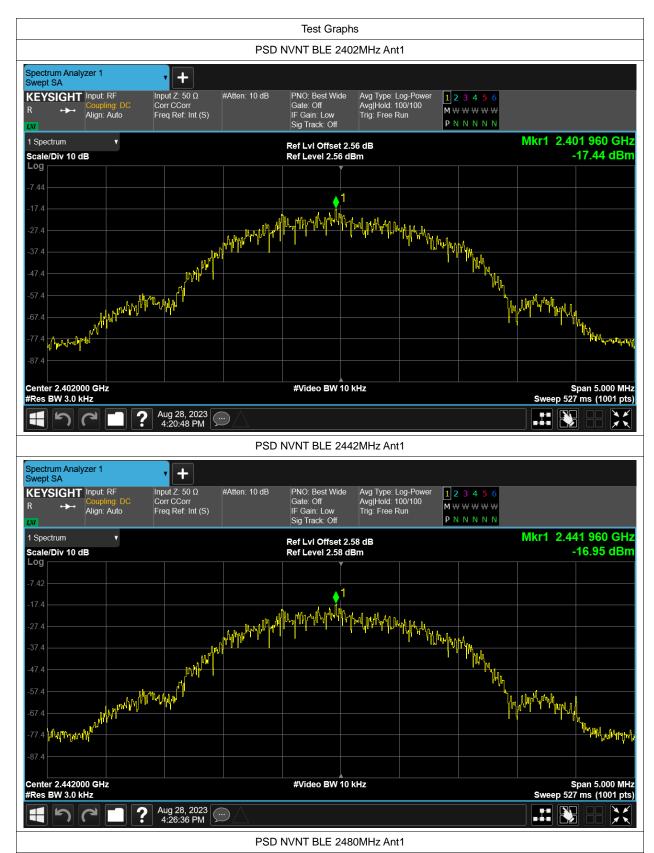



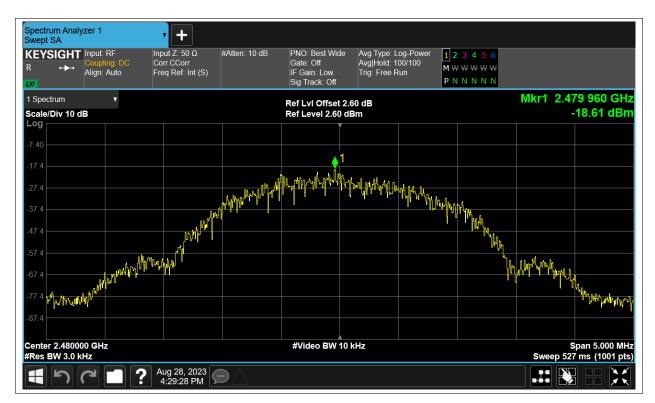







Band Edge

Со	ndition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
١	TNVN	BLE	2402	Ant1	-52.7	-20	Pass
١	TNVV	BLE	2480	Ant1	-49.6	-20	Pass



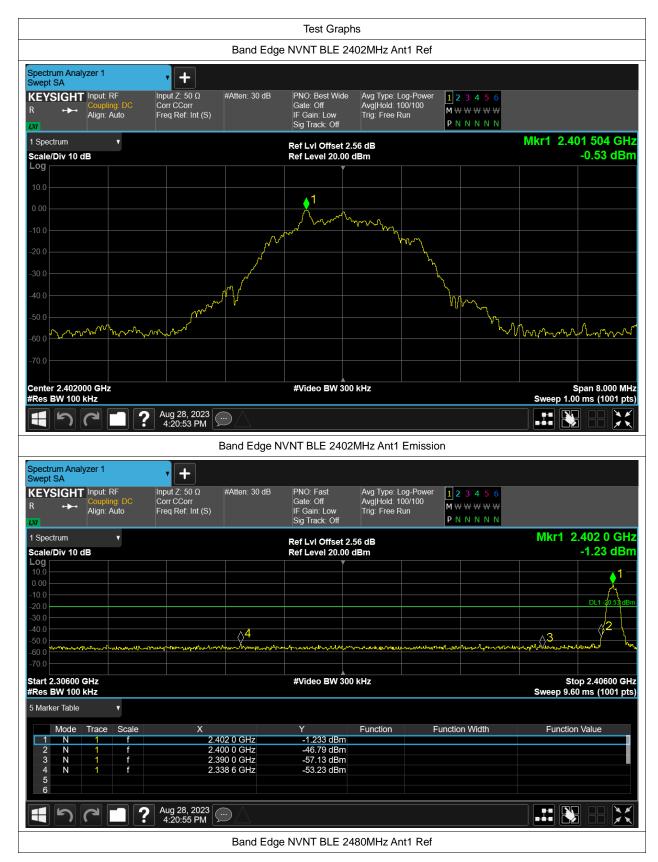



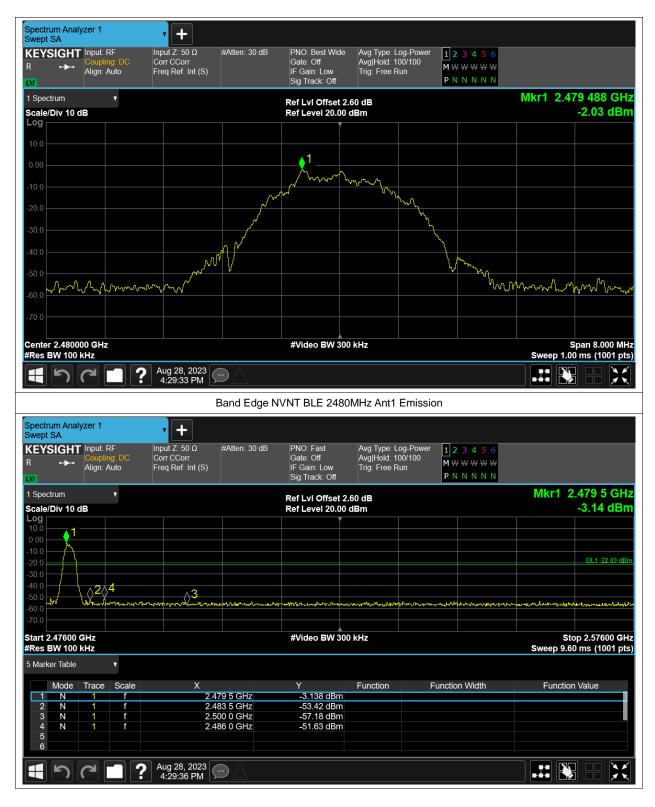





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-48.23	-20	Pass
NVNT	BLE	2442	Ant1	-48.72	-20	Pass
NVNT	BLE	2480	Ant1	-46.67	-20	Pass







