

**Test Plot 1#: GSM 850\_Head Left Cheek\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.694 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $19.88 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.878 \text{ W/kg}$   
**SAR(1 g) =  $0.569 \text{ W/kg}$ ; SAR(10 g) =  $0.377 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.592 \text{ W/kg}$

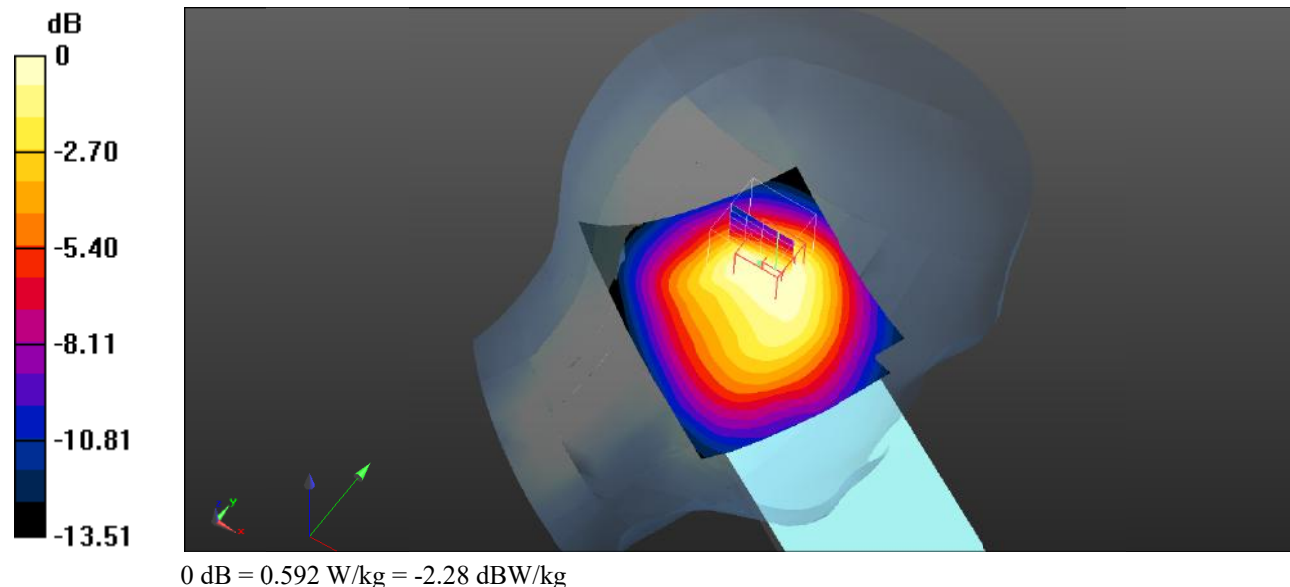

**Test Plot 2#: GSM 850\_Head Left Tilt\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.888$  S/m;  $\epsilon_r = 43.093$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.673 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 20.94 V/m; Power Drift = -0.16 dB  
Peak SAR (extrapolated) = 1.01 W/kg

**SAR(1 g) = 0.534 W/kg; SAR(10 g) = 0.316 W/kg**  
Maximum value of SAR (measured) = 0.565 W/kg

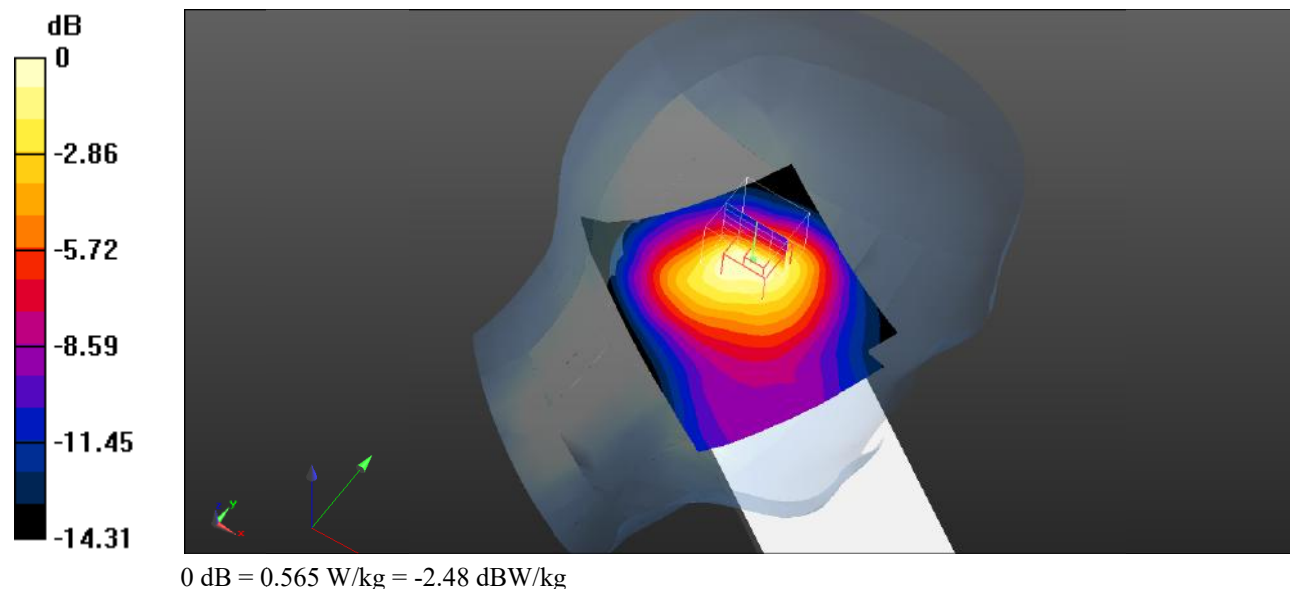

**Test Plot 3#: GSM 850\_Head Right Cheek\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.888$  S/m;  $\epsilon_r = 43.093$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.394 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 19.93 V/m; Power Drift = -0.13 dB  
Peak SAR (extrapolated) = 0.470 W/kg  
**SAR(1 g) = 0.357 W/kg; SAR(10 g) = 0.266 W/kg**  
Maximum value of SAR (measured) = 0.379 W/kg

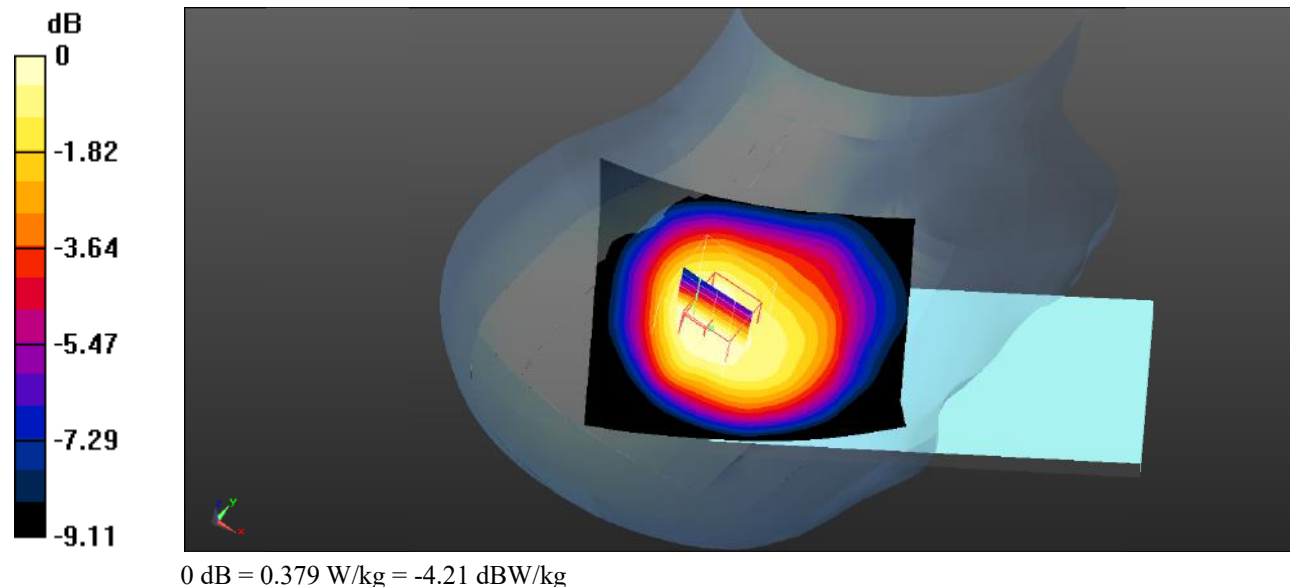

**Test Plot 4#: GSM 850\_Head Right Tilt\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.410 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $20.06 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
Peak SAR (extrapolated) =  $0.543 \text{ W/kg}$   
**SAR(1 g) =  $0.353 \text{ W/kg}$ ; SAR(10 g) =  $0.218 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.385 \text{ W/kg}$

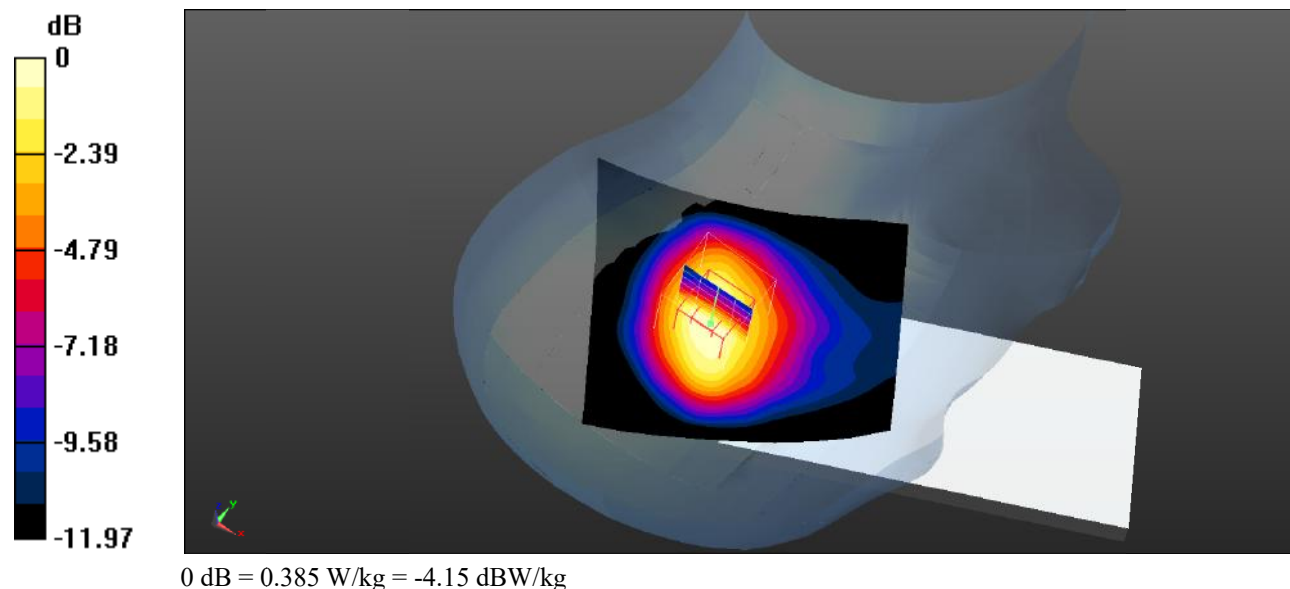

**Test Plot 5#: GSM 850\_Body Worn Back\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic GSM; Frequency: 836.6 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.221 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 13.42 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.314 W/kg

**SAR(1 g) = 0.210 W/kg; SAR(10 g) = 0.138 W/kg**

Maximum value of SAR (measured) = 0.226 W/kg

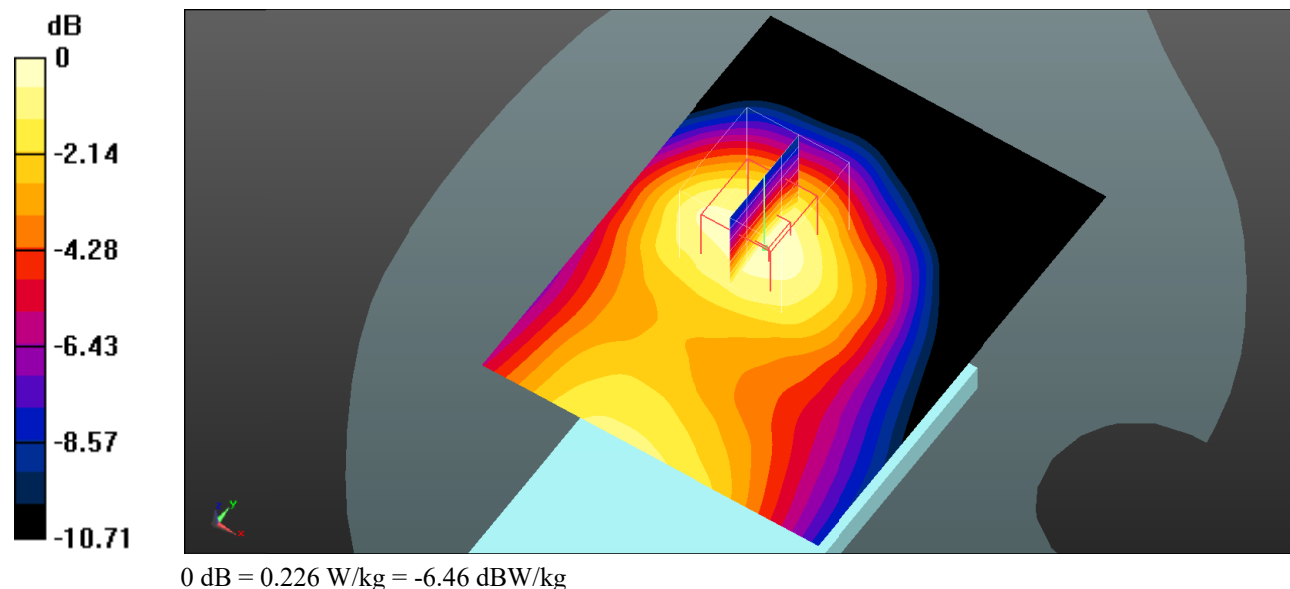

**Test Plot 6#: GSM 850\_Body Front\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.888$  S/m;  $\epsilon_r = 43.093$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.288 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 13.86 V/m; Power Drift = -0.20 dB  
Peak SAR (extrapolated) = 0.428 W/kg  
**SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.170 W/kg**  
Maximum value of SAR (measured) = 0.282 W/kg

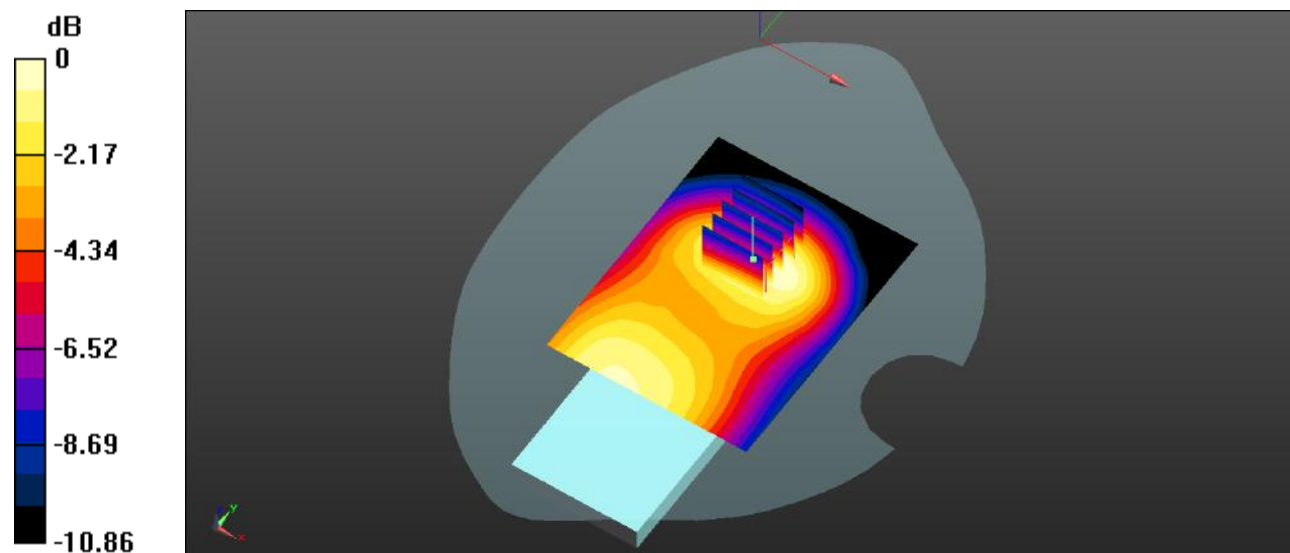

0 dB = 0.282 W/kg = -5.50 dBW/kg

**Test Plot 7#: GSM 850\_Body Back\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.326 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $16.14 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.460 \text{ W/kg}$   
**SAR(1 g) =  $0.308 \text{ W/kg}$ ; SAR(10 g) =  $0.202 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.331 \text{ W/kg}$

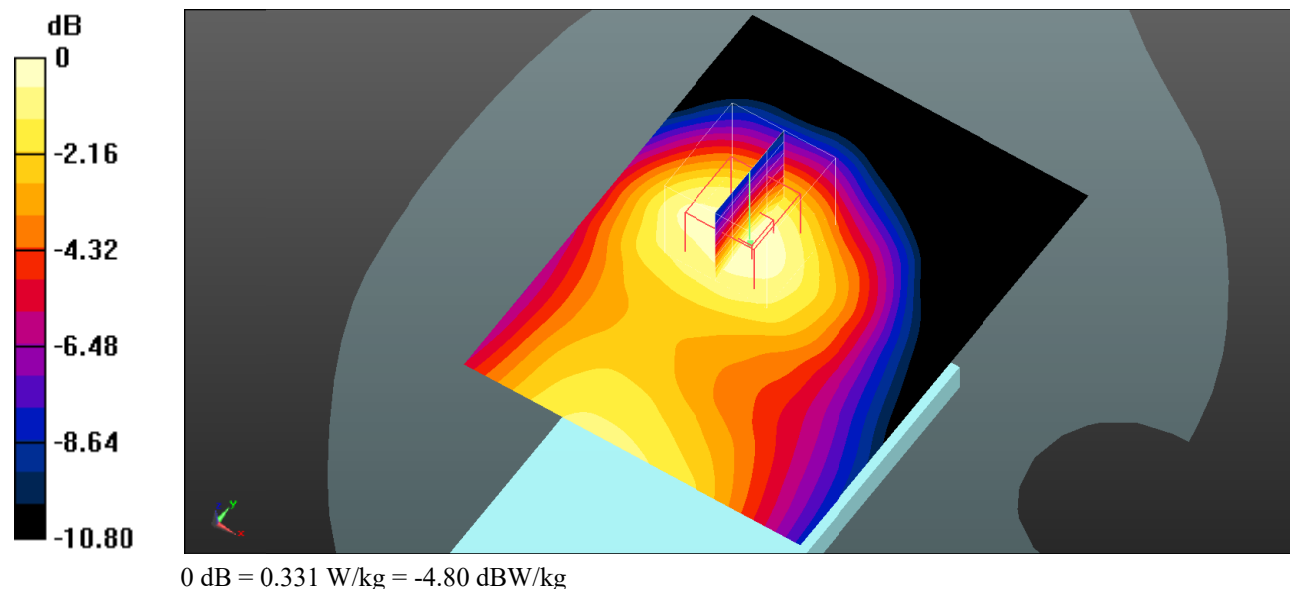

**Test Plot 8#: GSM 850\_Body Right\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.228 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $14.89 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$   
Peak SAR (extrapolated) =  $0.267 \text{ W/kg}$   
**SAR(1 g) =  $0.211 \text{ W/kg}$ ; SAR(10 g) =  $0.155 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.218 \text{ W/kg}$

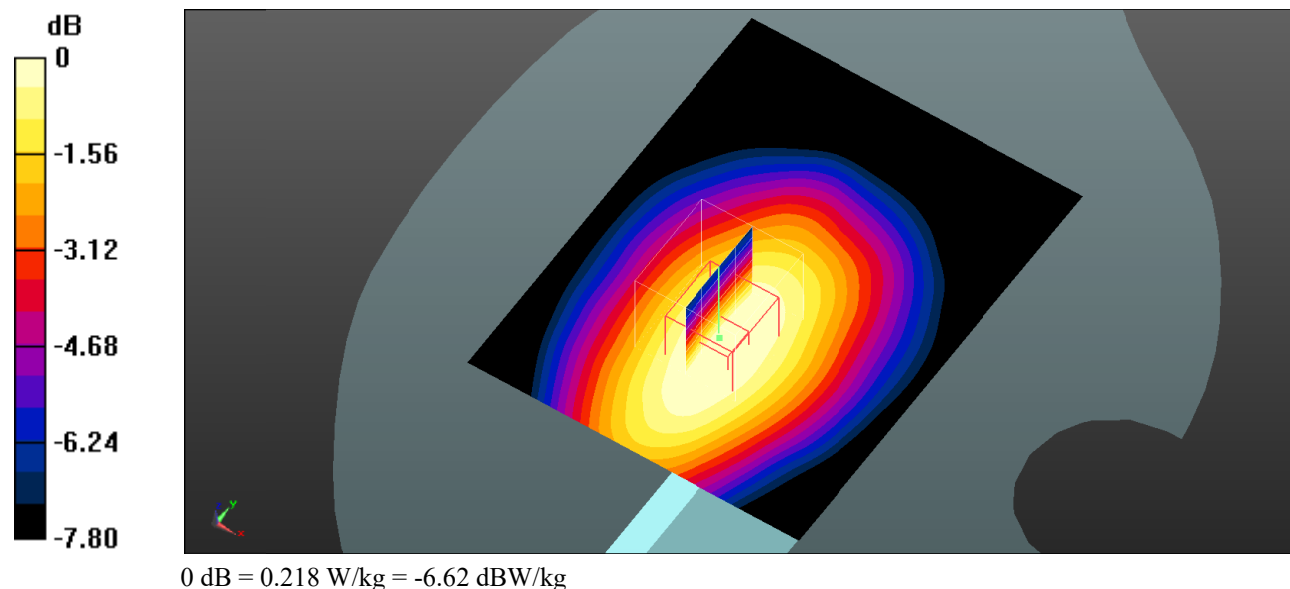



**Test Plot 9#: GSM 850\_Body Top\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic GPRS-2 slots; Frequency: 836.6 MHz; Duty Cycle: 1:4  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.888$  S/m;  $\epsilon_r = 43.093$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.285 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.09 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.414 W/kg

**SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.163 W/kg**

Maximum value of SAR (measured) = 0.285 W/kg

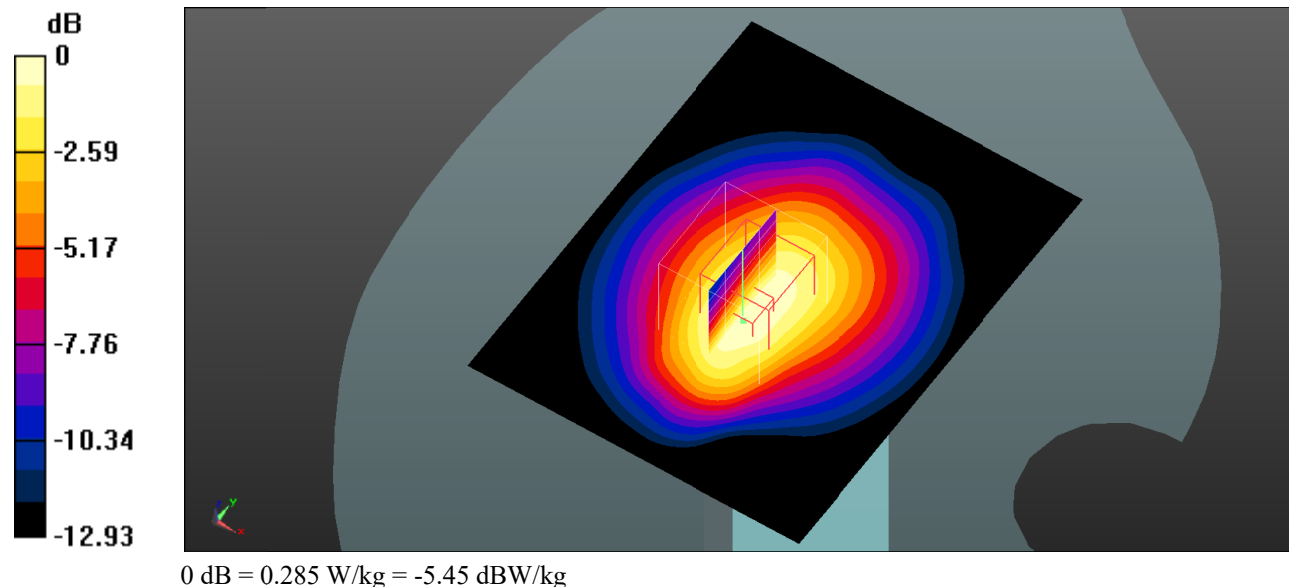

**Test Plot 10#: PCS 1900\_Head Left Cheek\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GSM; Frequency: 1850.2 MHz;Duty Cycle: 1:8  
 Medium parameters used:  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.405 \text{ S/m}$ ;  $\epsilon_r = 40.996$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.17 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 15.39 V/m; Power Drift = -0.13 dB  
 Peak SAR (extrapolated) = 1.55 W/kg  
**SAR(1 g) = 0.947 W/kg; SAR(10 g) = 0.513 W/kg**  
 Maximum value of SAR (measured) = 1.04 W/kg

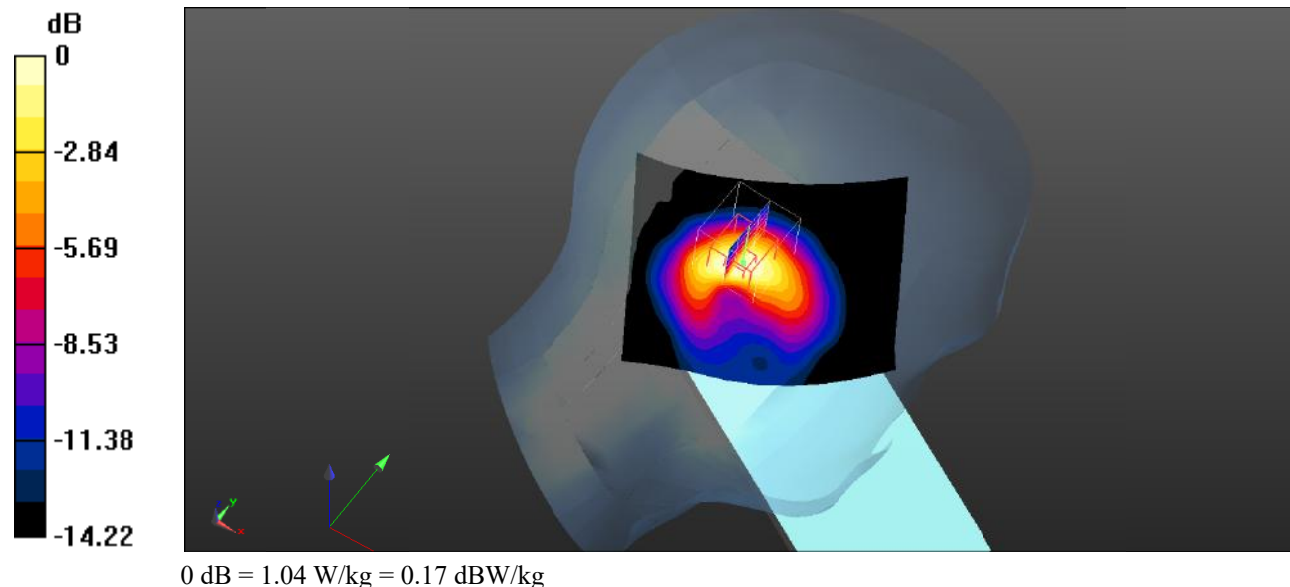

**Test Plot 11#: PCS 1900\_Head Left Cheek\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.932 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $12.88 \text{ V/m}$ ; Power Drift =  $0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.32 \text{ W/kg}$   
**SAR(1 g) =  $0.796 \text{ W/kg}$ ; SAR(10 g) =  $0.435 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.863 \text{ W/kg}$

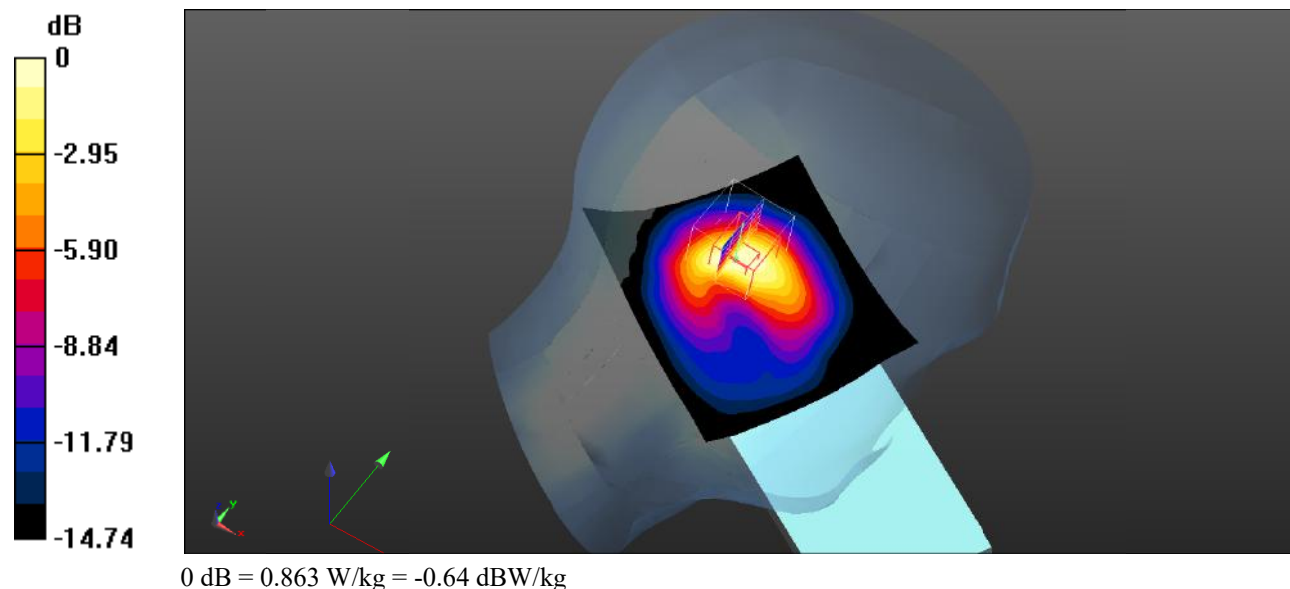

**Test Plot 12#: PCS 1900\_Head Left Cheek\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.427 \text{ S/m}$ ;  $\epsilon_r = 40.959$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.763 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $12.46 \text{ V/m}$ ; Power Drift =  $-0.19 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.00 \text{ W/kg}$   
**SAR(1 g) =  $0.603 \text{ W/kg}$ ; SAR(10 g) =  $0.330 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.655 \text{ W/kg}$

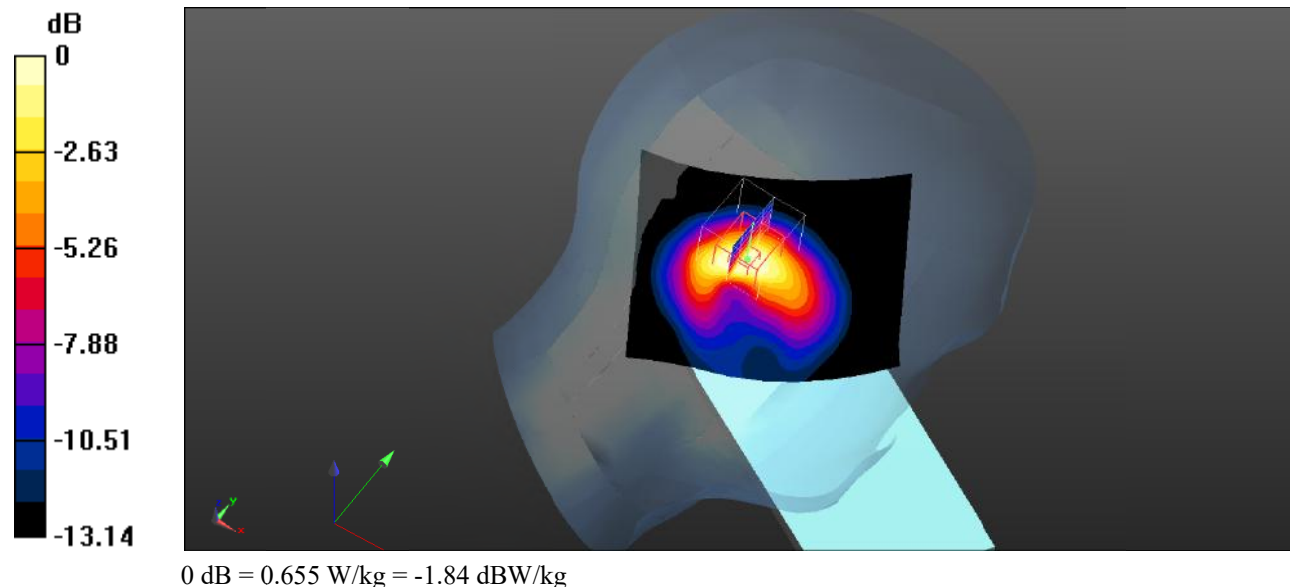

**Test Plot 13#: PCS 1900\_Head Left Tilt\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1850.2$  MHz;  $\sigma = 1.405$  S/m;  $\epsilon_r = 40.996$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.33 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.36 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.81 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.571 W/kg**

Maximum value of SAR (measured) = 1.17 W/kg

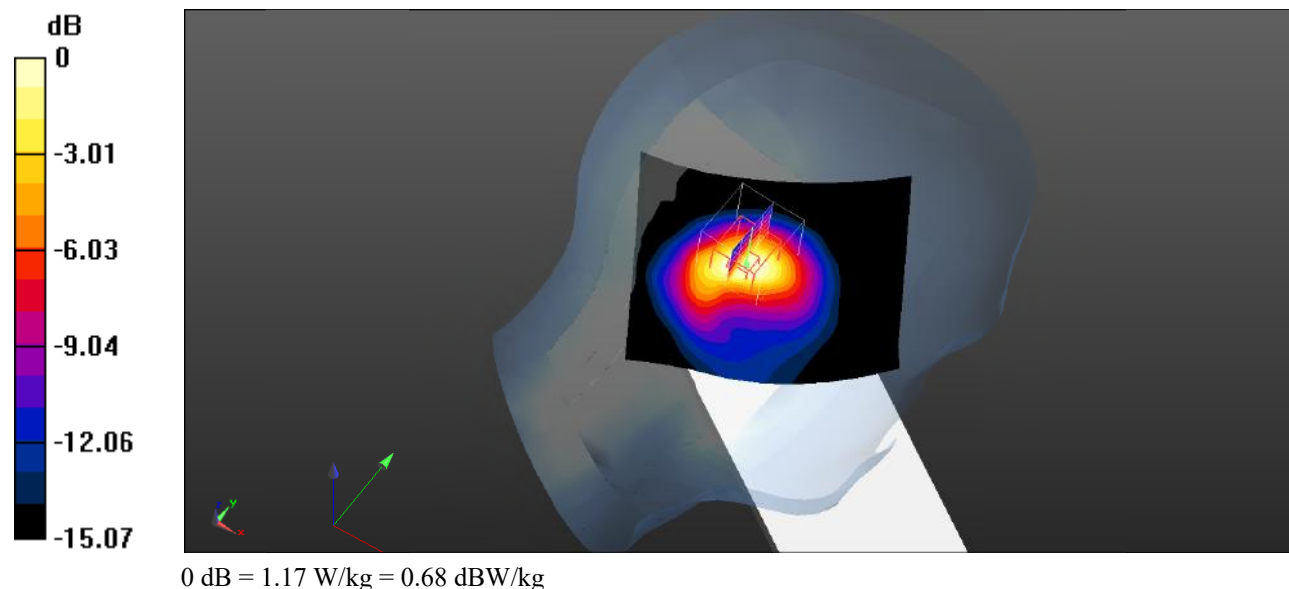

**Test Plot 14#: PCS 1900\_Head Left Tilt\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.16 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $18.79 \text{ V/m}$ ; Power Drift =  $-0.21 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.53 \text{ W/kg}$   
**SAR(1 g) =  $0.920 \text{ W/kg}$ ; SAR(10 g) =  $0.493 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.976 \text{ W/kg}$

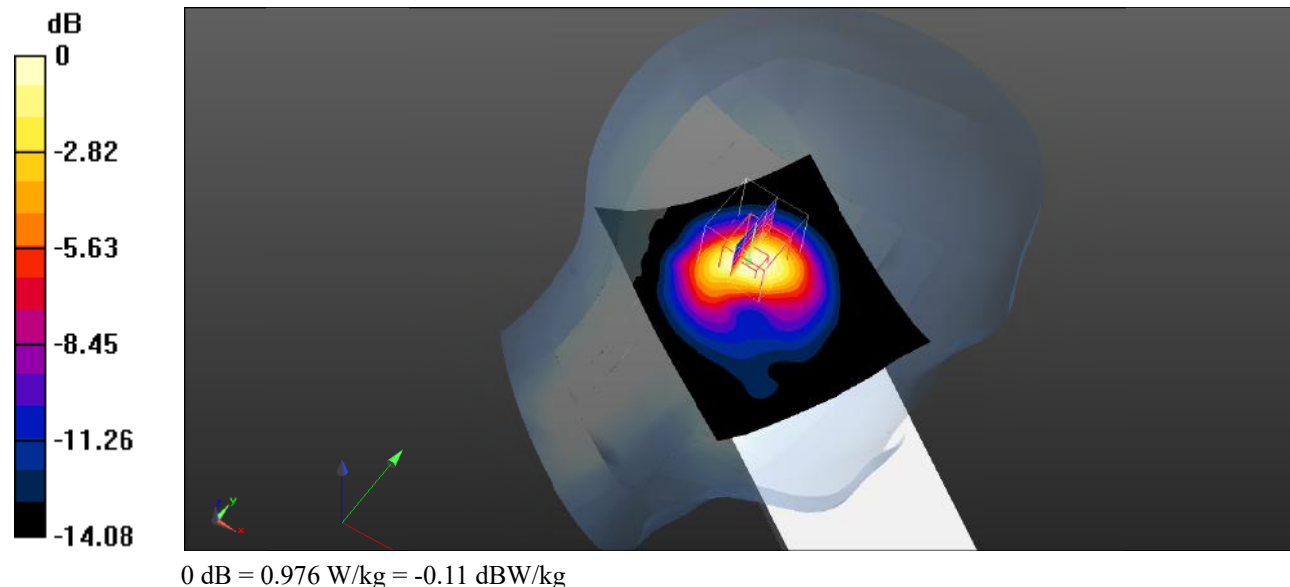

**Test Plot 15#: PCS 1900\_Head Left Tilt\_High****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.427$  S/m;  $\epsilon_r = 40.959$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.845 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.62 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.711 W/kg; SAR(10 g) = 0.380 W/kg**

Maximum value of SAR (measured) = 0.759 W/kg

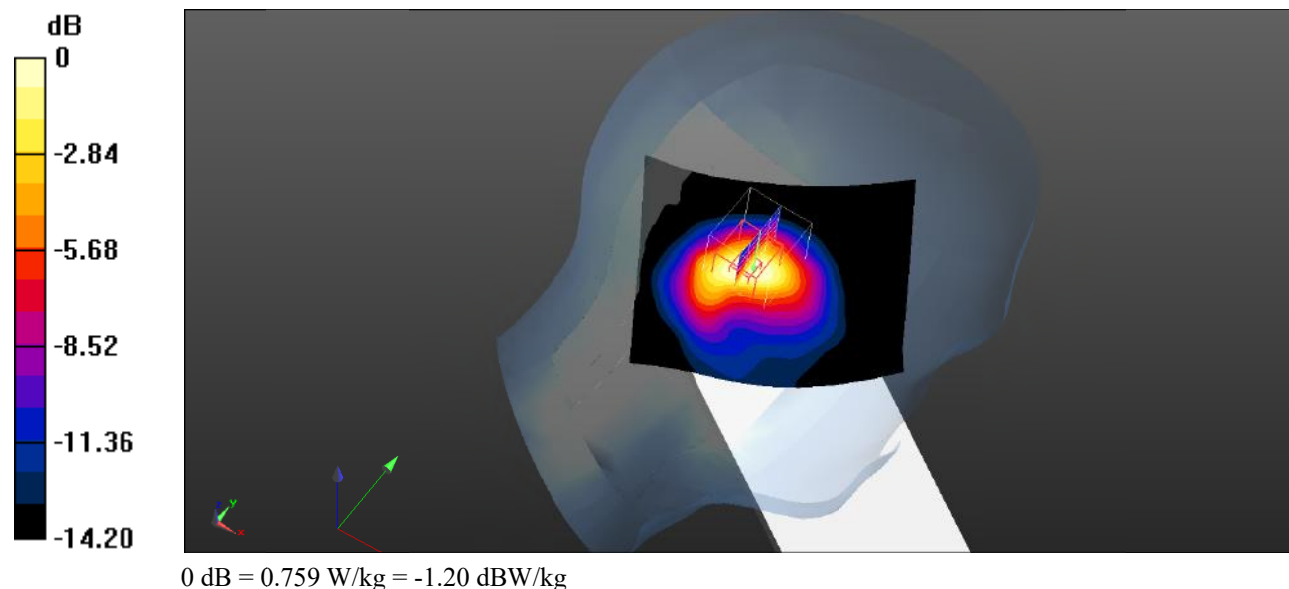

**Test Plot 16#: PCS 1900\_Head Right Cheek\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.429$  S/m;  $\epsilon_r = 41.457$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.824 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.20 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.19 W/kg

**SAR(1 g) = 0.695 W/kg; SAR(10 g) = 0.376 W/kg**

Maximum value of SAR (measured) = 0.805 W/kg

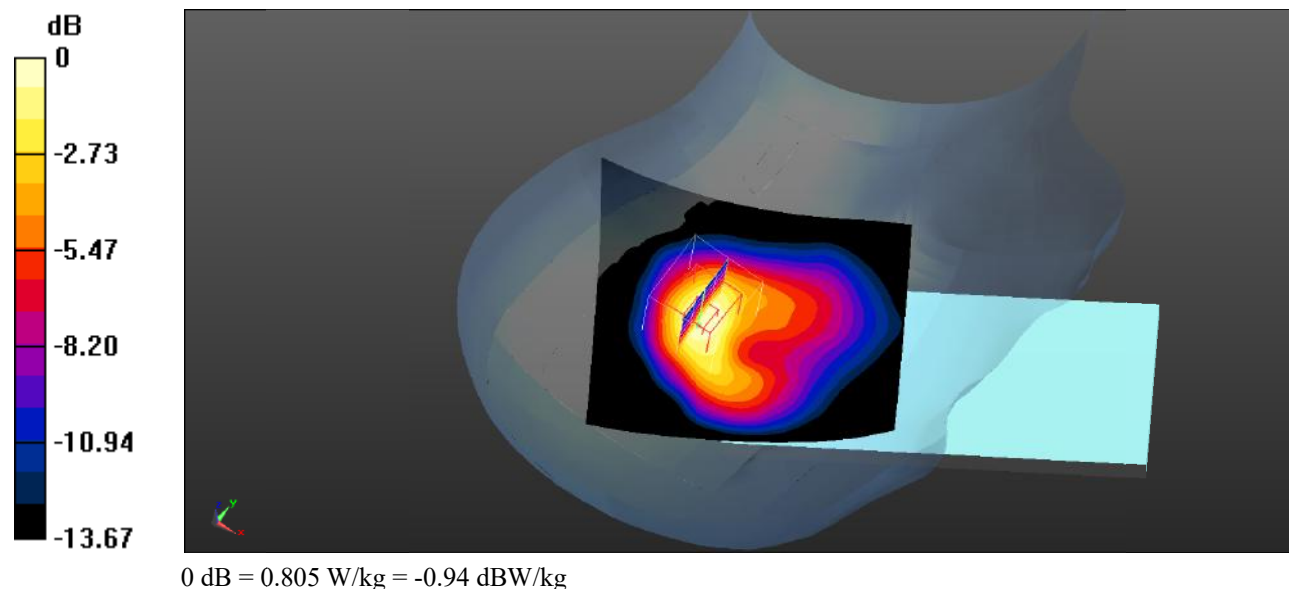



**Test Plot 17#: PCS 1900\_Head Right Tilt\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.405 \text{ S/m}$ ;  $\epsilon_r = 40.996$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.09 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 24.68 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 1.52 W/kg  
**SAR(1 g) = 0.919 W/kg; SAR(10 g) = 0.496 W/kg**  
 Maximum value of SAR (measured) = 1.04 W/kg

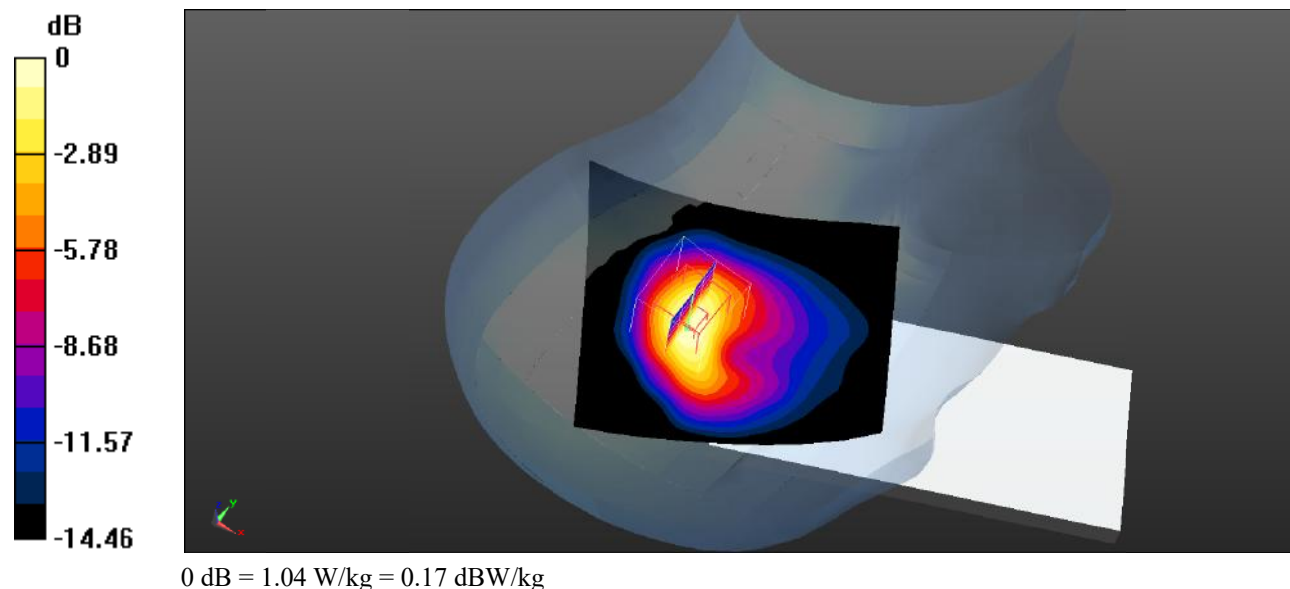

**Test Plot 18#: PCS 1900\_Head Right Tilt\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.429$  S/m;  $\epsilon_r = 41.457$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.931 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 23.01 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 1.30 W/kg  
**SAR(1 g) = 0.779 W/kg; SAR(10 g) = 0.423 W/kg**  
Maximum value of SAR (measured) = 0.894 W/kg

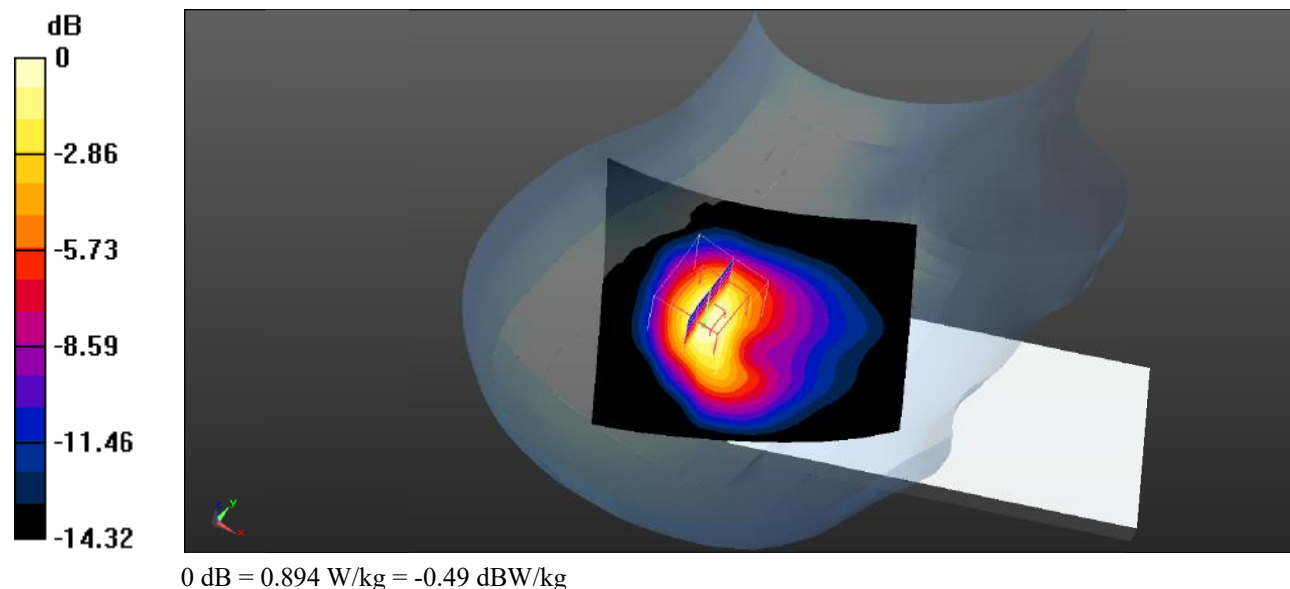

**Test Plot 19#: PCS 1900\_Head Right Tilt\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8  
Medium parameters used:  $f = 1909.8 \text{ MHz}$ ;  $\sigma = 1.427 \text{ S/m}$ ;  $\epsilon_r = 40.959$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.769 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $20.35 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$

Peak SAR (extrapolated) =  $1.05 \text{ W/kg}$

**SAR(1 g) =  $0.628 \text{ W/kg}$ ; SAR(10 g) =  $0.340 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.725 \text{ W/kg}$

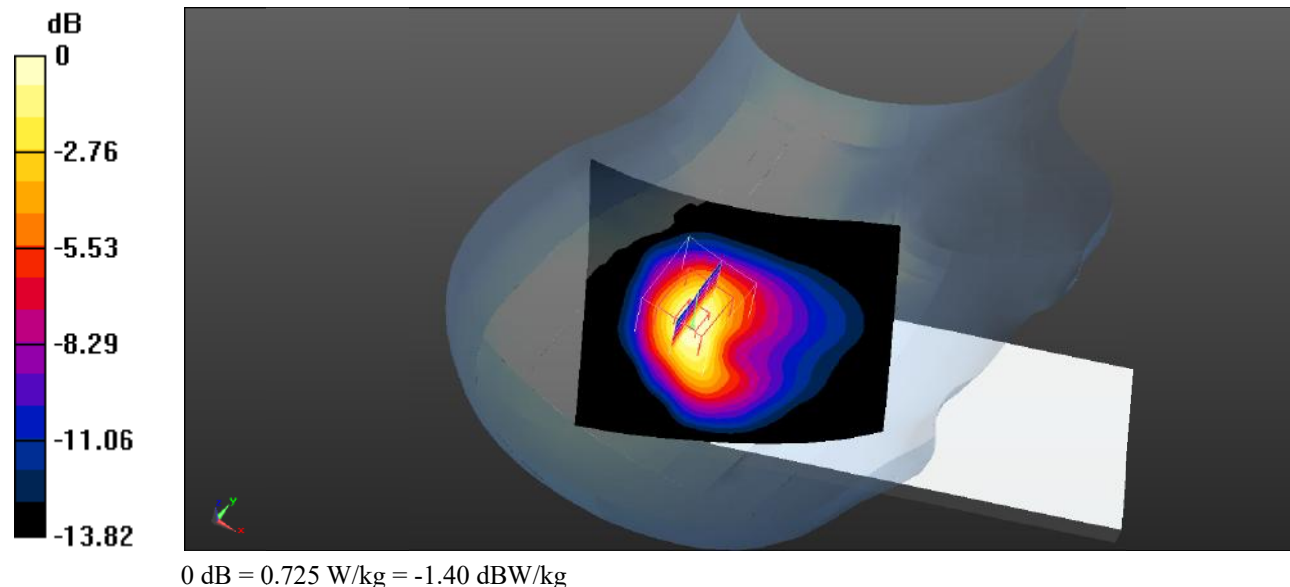

**Test Plot 20#: PCS 1900\_Body Worn Back\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GSM; Frequency: 1880 MHz; Duty Cycle: 1:8  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.400 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.226 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.508 \text{ W/kg}$   
**SAR(1 g) =  $0.341 \text{ W/kg}$ ; SAR(10 g) =  $0.203 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.375 \text{ W/kg}$

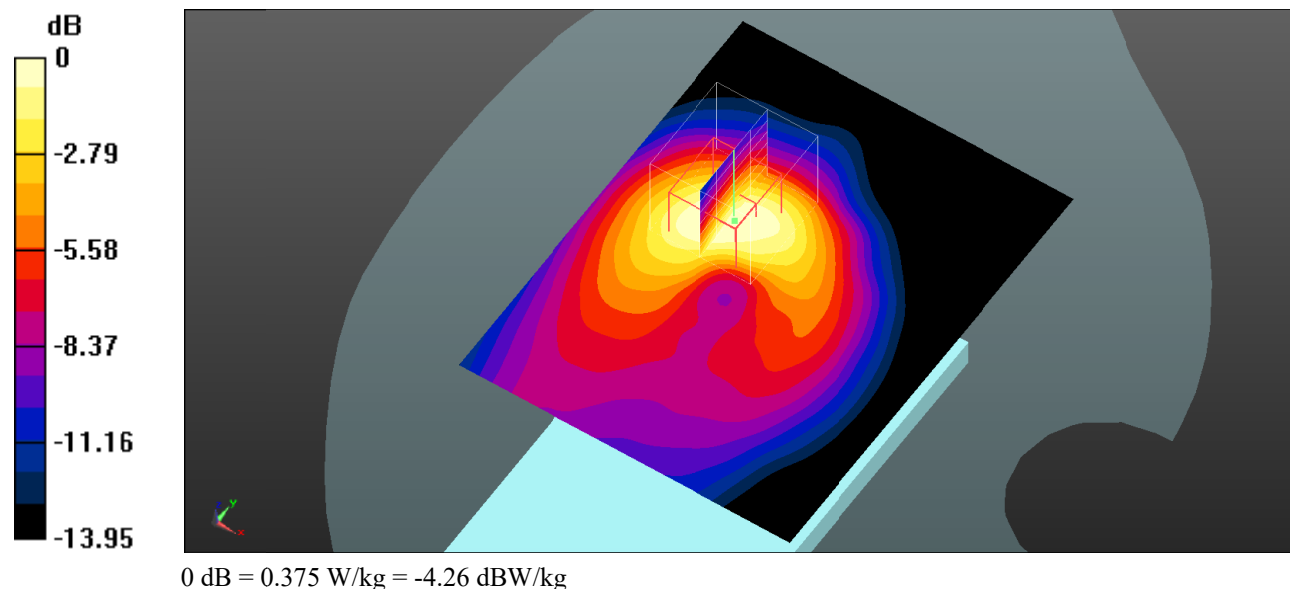

**Test Plot 21#: PCS 1900\_Body Front\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section


DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.817 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.61 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.03 \text{ W/kg}$

**SAR(1 g) = 0.716 W/kg; SAR(10 g) = 0.428 W/kg**  
 Maximum value of SAR (measured) =  $0.818 \text{ W/kg}$

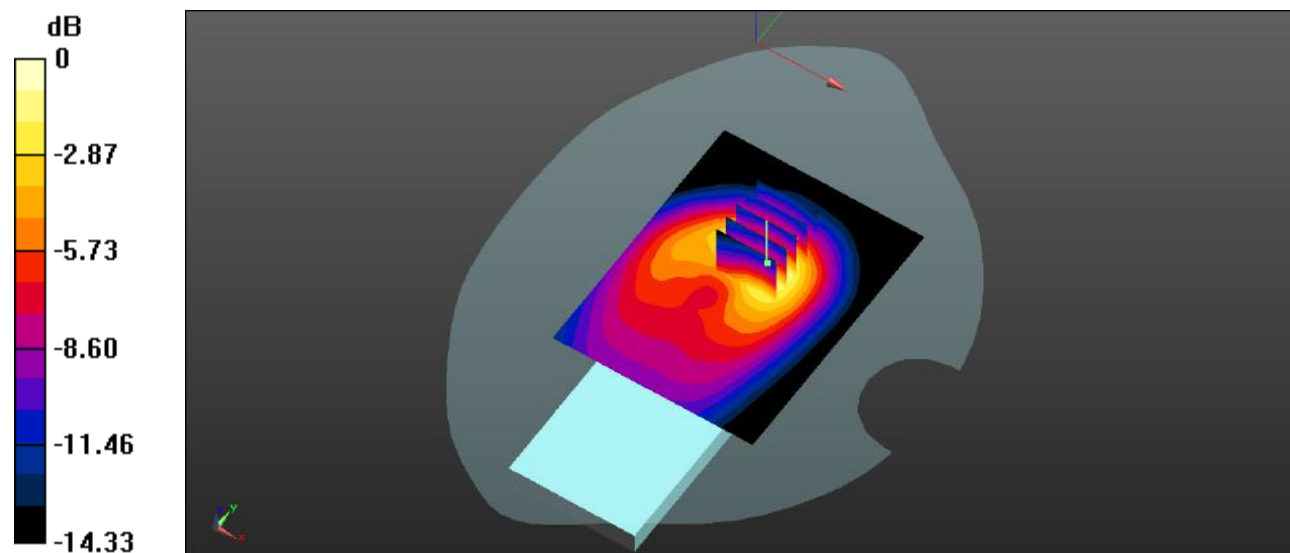

0 dB =  $0.818 \text{ W/kg}$  =  $-0.87 \text{ dBW/kg}$

**Test Plot 22#: PCS 1900\_Body Back\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.841 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $10.73 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$

Peak SAR (extrapolated) =  $1.12 \text{ W/kg}$

**SAR(1 g) =  $0.756 \text{ W/kg}$ ; SAR(10 g) =  $0.451 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.829 \text{ W/kg}$

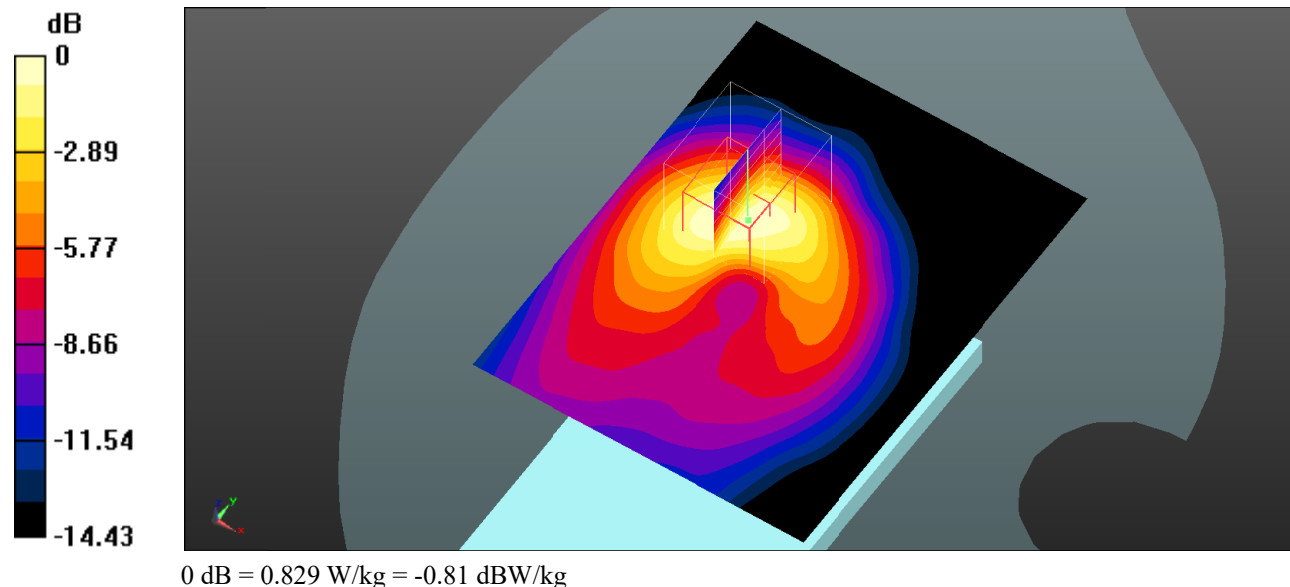

**Test Plot 23#: PCS 1900\_Body Right\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.106 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $7.623 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$

Peak SAR (extrapolated) =  $0.129 \text{ W/kg}$

**SAR(1 g) =  $0.090 \text{ W/kg}$ ; SAR(10 g) =  $0.059 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.0963 \text{ W/kg}$

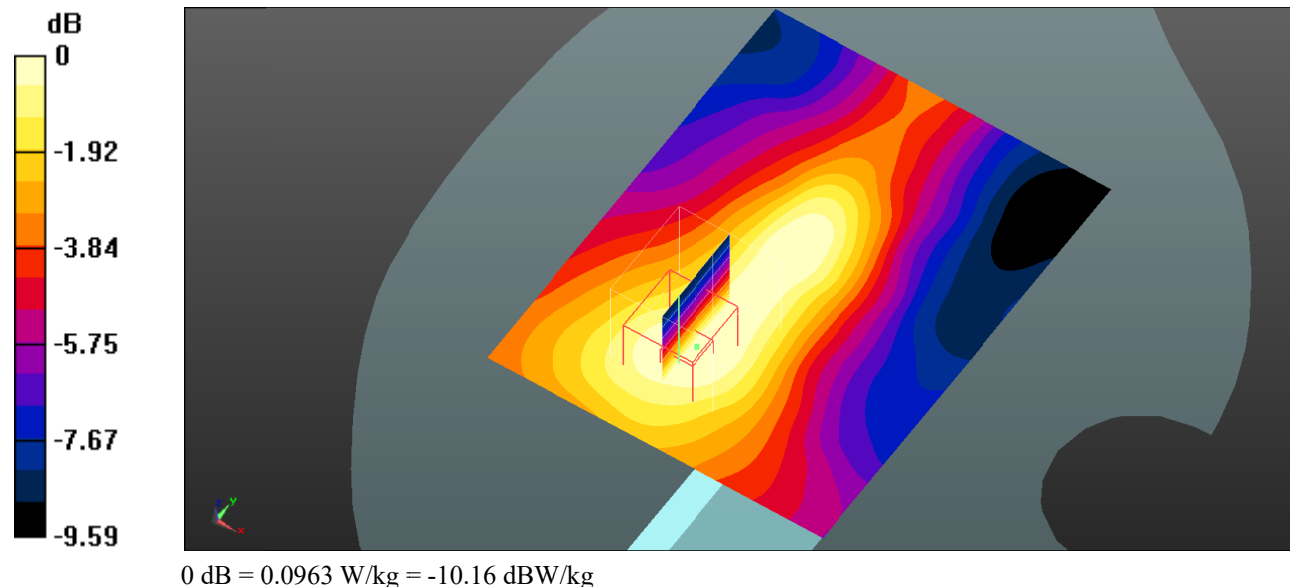

**Test Plot 24#: PCS 1900\_Body Top\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1850.2 \text{ MHz}$ ;  $\sigma = 1.405 \text{ S/m}$ ;  $\epsilon_r = 40.996$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.05 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $27.82 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.61 \text{ W/kg}$   
**SAR(1 g) =  $1.01 \text{ W/kg}$ ; SAR(10 g) =  $0.563 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $1.10 \text{ W/kg}$

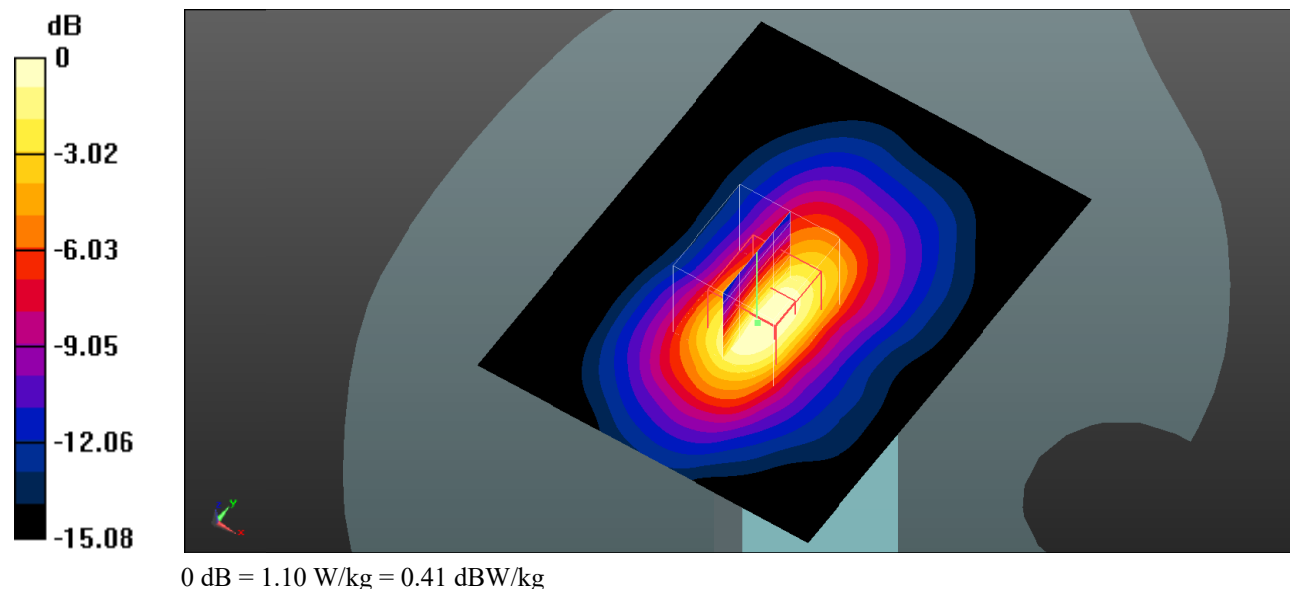



**Test Plot 25#: PCS 1900\_Body Top\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4  
Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.967 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $25.86 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
Peak SAR (extrapolated) =  $1.46 \text{ W/kg}$   
**SAR(1 g) =  $0.892 \text{ W/kg}$ ; SAR(10 g) =  $0.487 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $1.01 \text{ W/kg}$

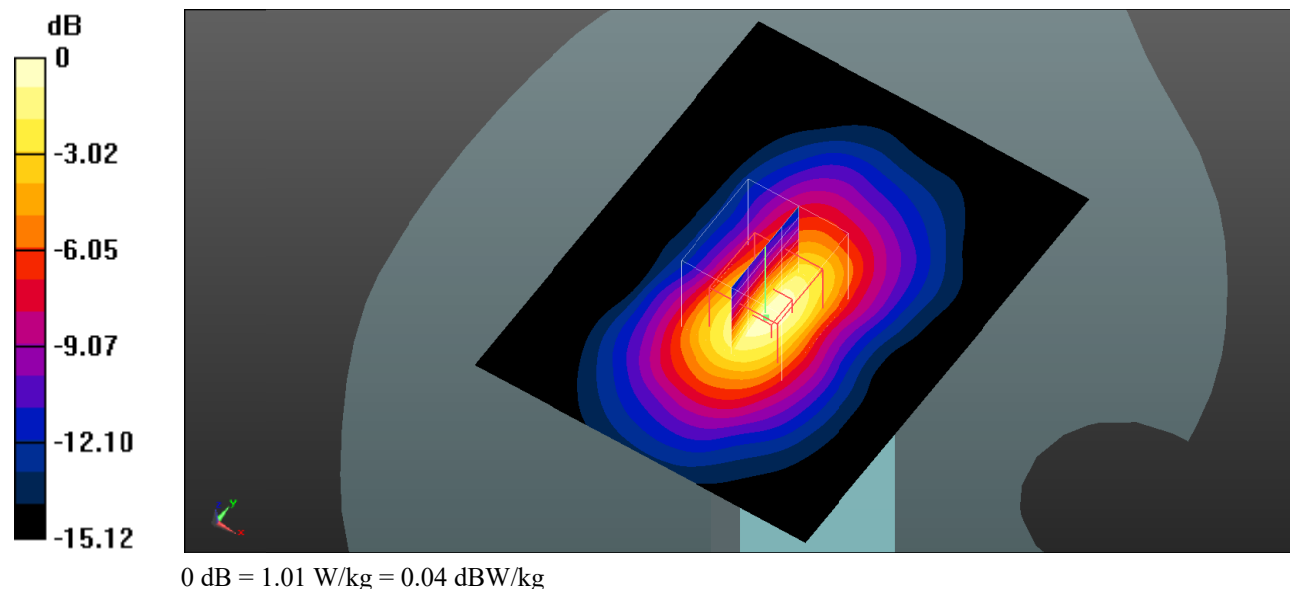

**Test Plot 26#: PCS 1900\_Body Top\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic GPRS-2 slots; Frequency: 1880 MHz; Duty Cycle: 1:4  
 Medium parameters used:  $f = 1909.8$  MHz;  $\sigma = 1.427$  S/m;  $\epsilon_r = 40.959$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.927 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 24.00 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 1.18 W/kg  
**SAR(1 g) = 0.743 W/kg; SAR(10 g) = 0.414 W/kg**  
 Maximum value of SAR (measured) = 0.831 W/kg

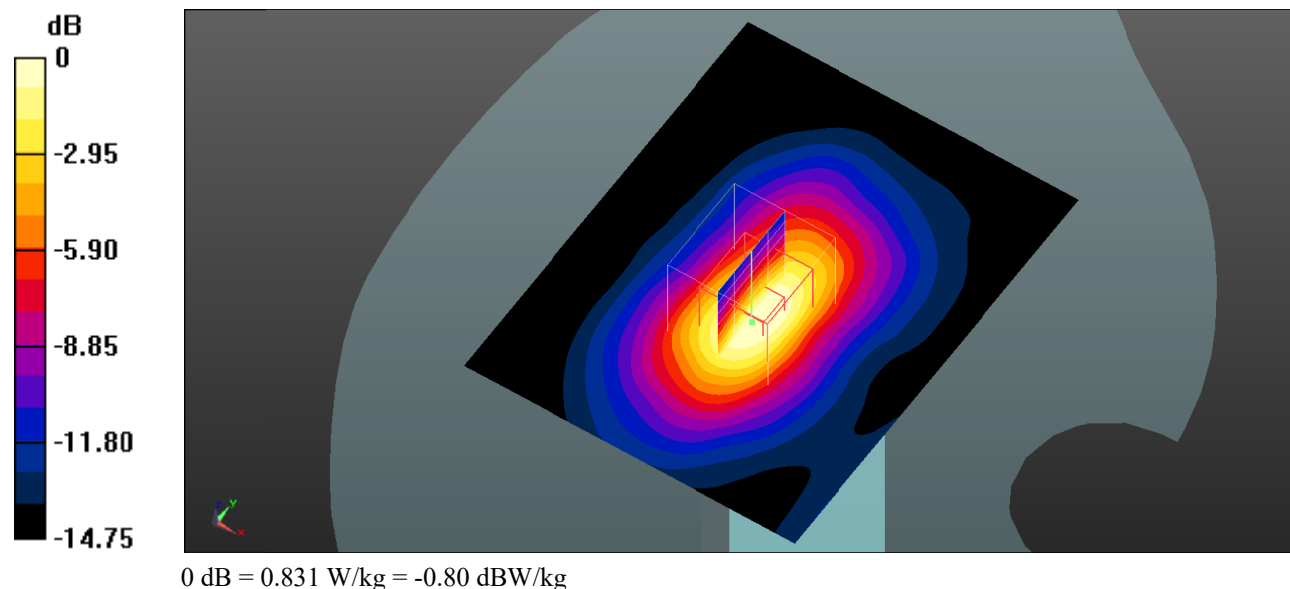

**Test Plot 27#: WCDMA Band 2\_Head Left Cheek\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1852.4 \text{ MHz}$ ;  $\sigma = 1.402 \text{ S/m}$ ;  $\epsilon_r = 41.193$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $1.02 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $16.58 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$

Peak SAR (extrapolated) =  $1.47 \text{ W/kg}$

**SAR(1 g) =  $0.873 \text{ W/kg}$ ; SAR(10 g) =  $0.474 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.934 \text{ W/kg}$

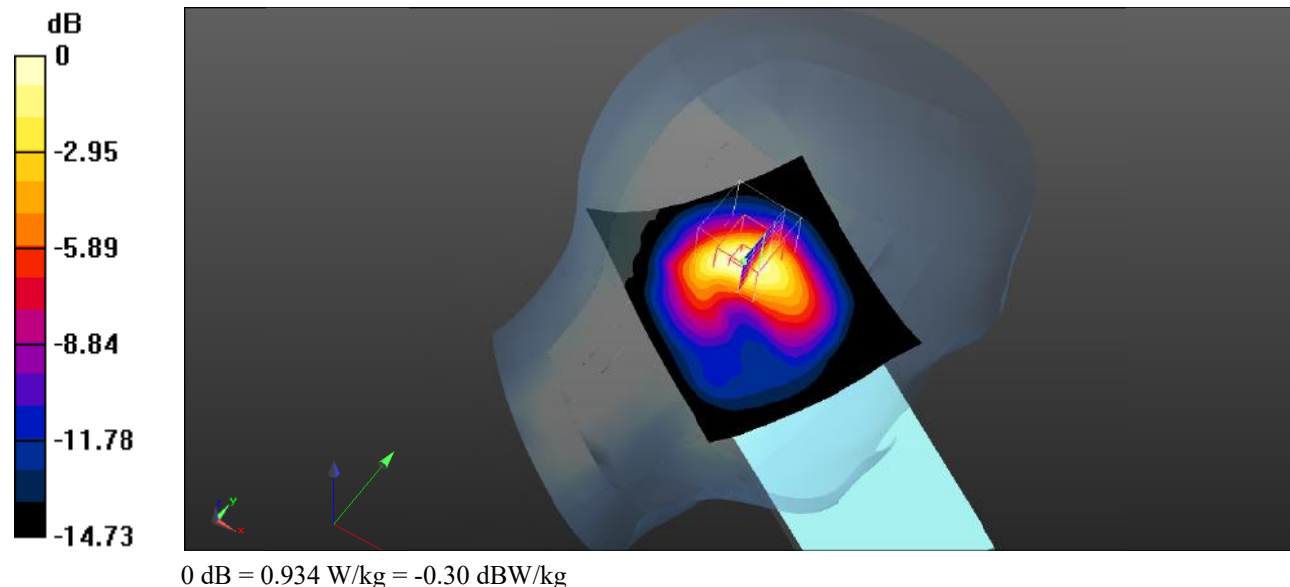

**Test Plot 28#: WCDMA Band 2\_Head Left Cheek\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.979 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $16.88 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.37 \text{ W/kg}$   
**SAR(1 g) =  $0.821 \text{ W/kg}$ ; SAR(10 g) =  $0.447 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.885 \text{ W/kg}$

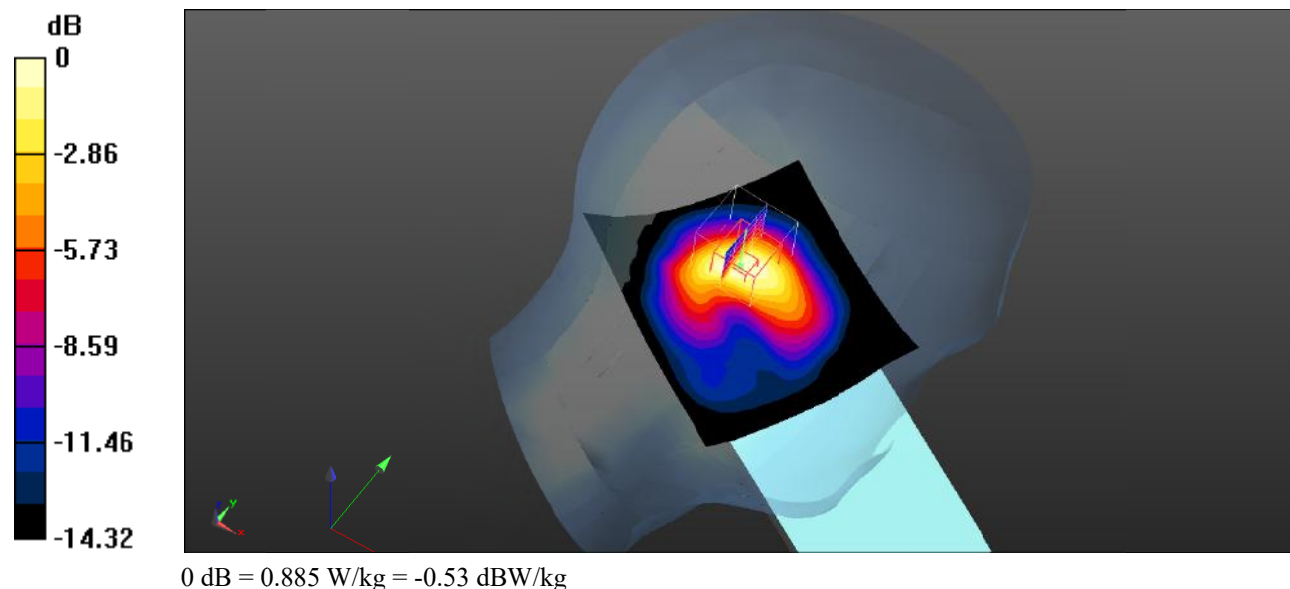

**Test Plot 29#: WCDMA Band 2\_Head Left Check\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1907.6 \text{ MHz}$ ;  $\sigma = 1.433 \text{ S/m}$ ;  $\epsilon_r = 41.179$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.974 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $16.11 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$

Peak SAR (extrapolated) =  $1.37 \text{ W/kg}$

**SAR(1 g) =  $0.821 \text{ W/kg}$ ; SAR(10 g) =  $0.448 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.901 \text{ W/kg}$

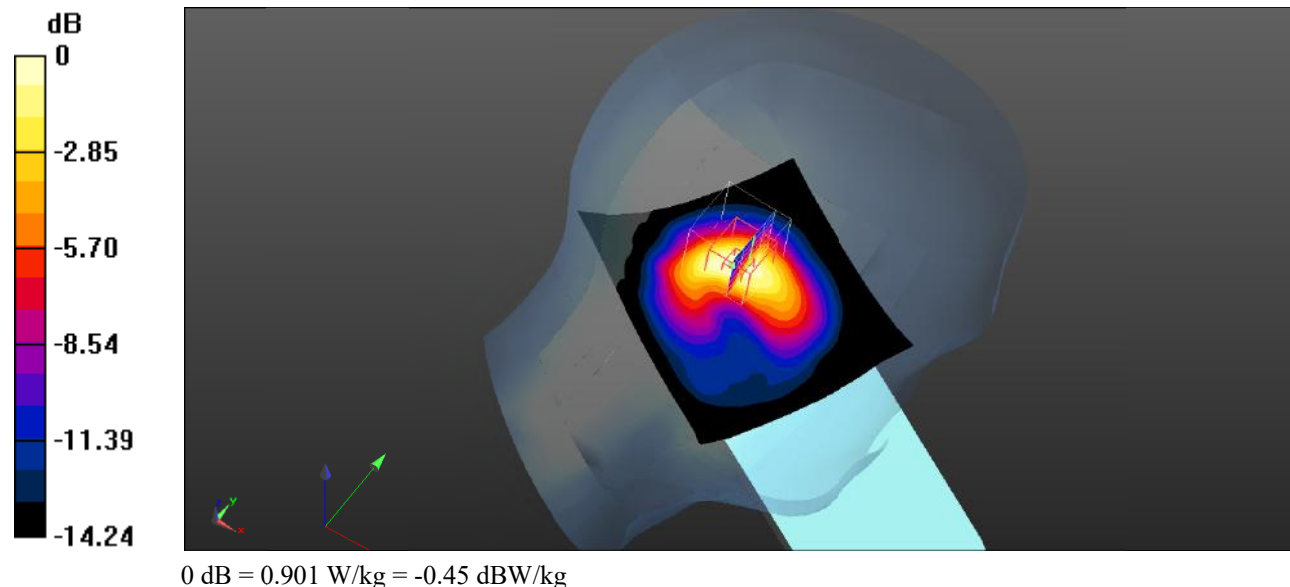

**Test Plot 30#: WCDMA Band 2\_Head Left Tilt\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 41.193$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.21 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.57 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.64 W/kg

**SAR(1 g) = 0.997 W/kg; SAR(10 g) = 0.532 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

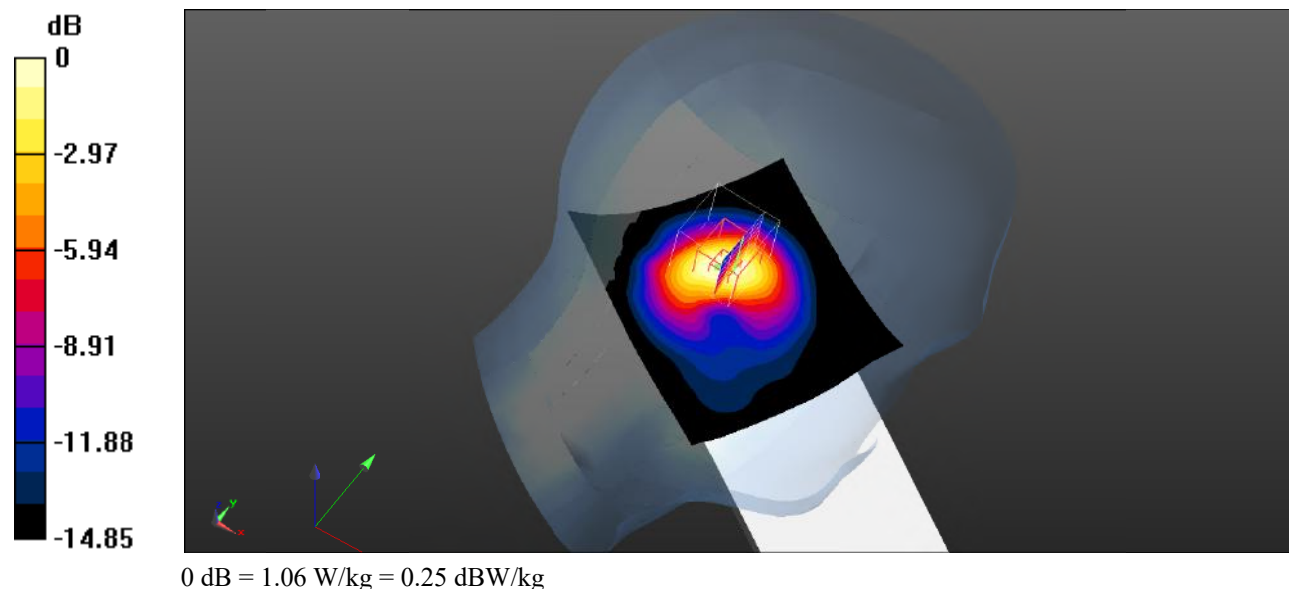

**Test Plot 31#: WCDMA Band 2\_Head Left Tilt\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.18 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 21.62 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 1.60 W/kg  
**SAR(1 g) = 0.963 W/kg; SAR(10 g) = 0.516 W/kg**  
 Maximum value of SAR (measured) = 1.04 W/kg

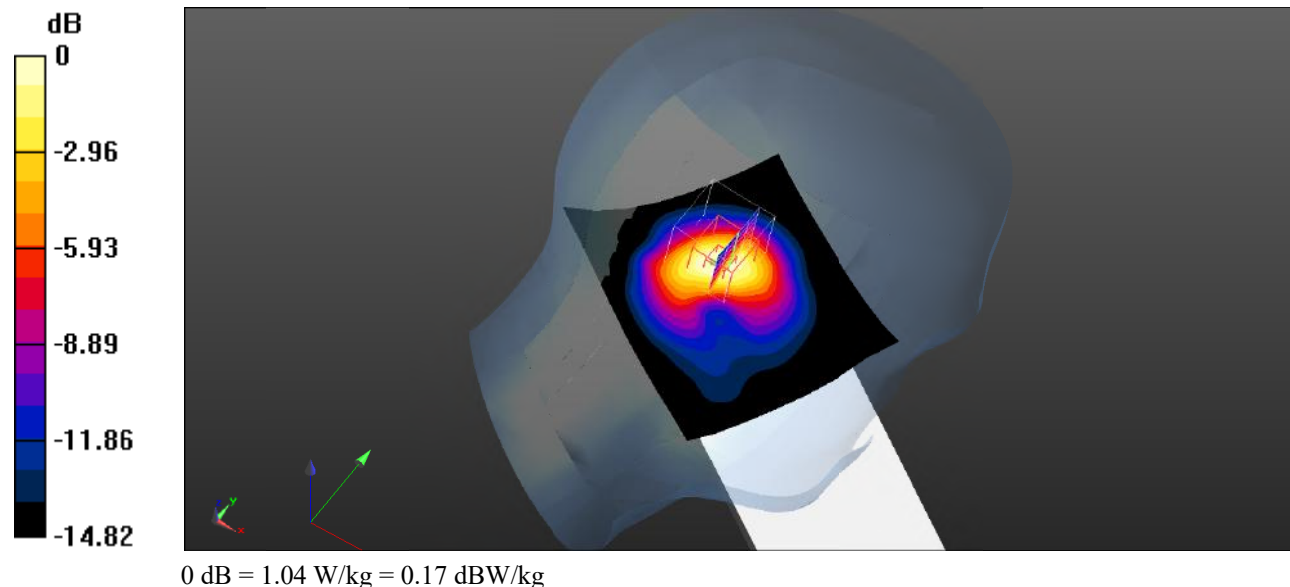

**Test Plot 32#: WCDMA Band 2\_Head Left Tilt\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1907.6 \text{ MHz}$ ;  $\sigma = 1.433 \text{ S/m}$ ;  $\epsilon_r = 41.179$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.19 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 20.12 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 1.55 W/kg  
**SAR(1 g) = 0.941 W/kg; SAR(10 g) = 0.503 W/kg**  
 Maximum value of SAR (measured) = 1.05 W/kg

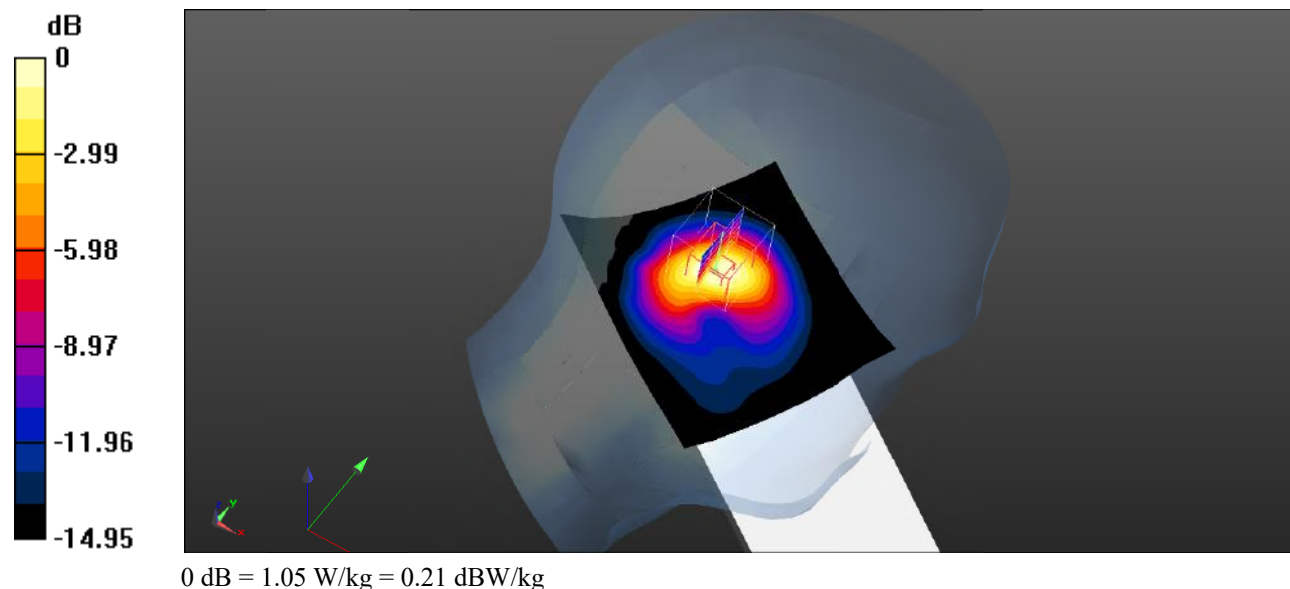



**Test Plot 33#: WCDMA Band 2\_Head Right Cheek\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1852.4$  MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 41.193$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.810 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.66 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.16 W/kg

**SAR(1 g) = 0.706 W/kg; SAR(10 g) = 0.392 W/kg**

Maximum value of SAR (measured) = 0.790 W/kg

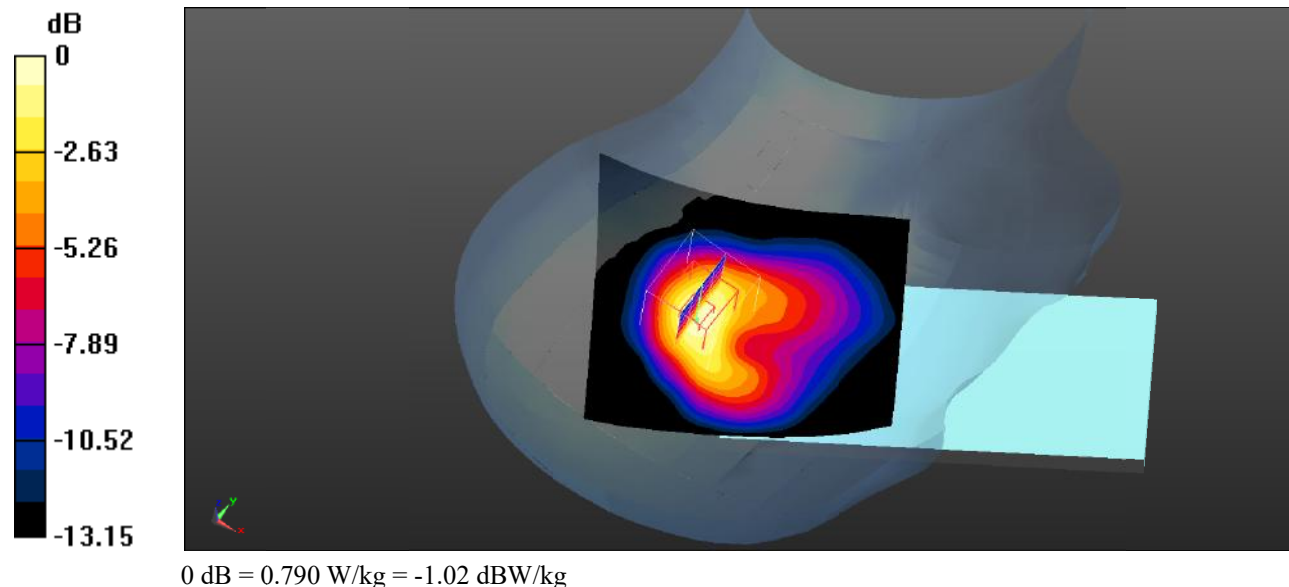

**Test Plot 34#: WCDMA Band 2\_Head Right Cheek\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.844 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $21.14 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.25 \text{ W/kg}$   
**SAR(1 g) =  $0.736 \text{ W/kg}$ ; SAR(10 g) =  $0.399 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.855 \text{ W/kg}$

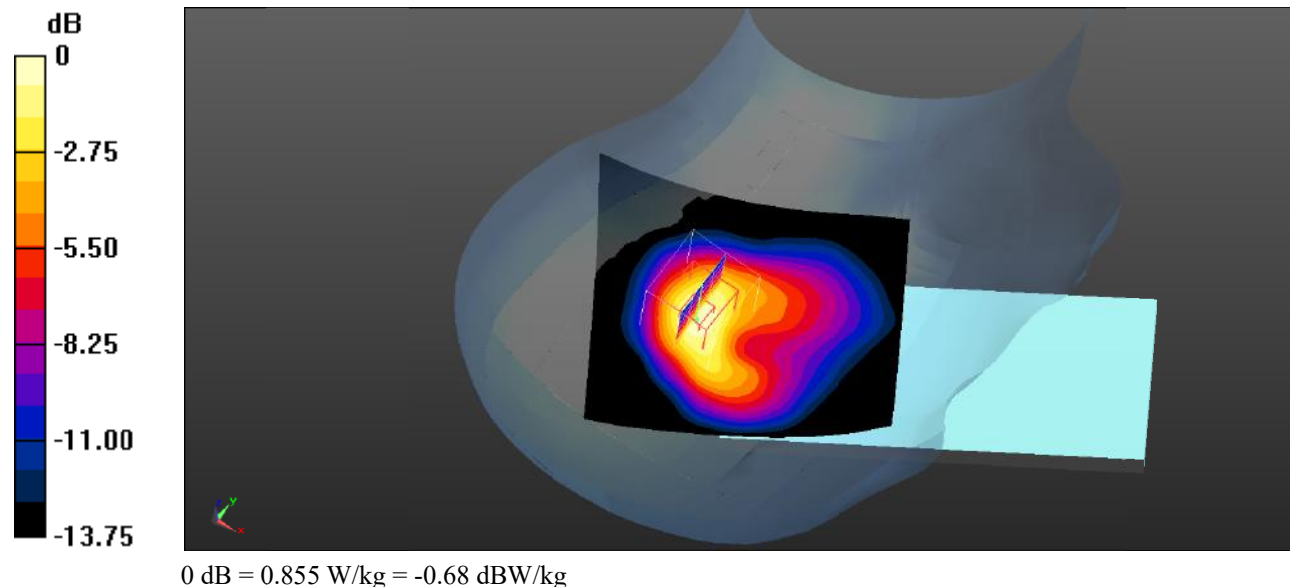

**Test Plot 35#: WCDMA Band 2\_Head Right Cheek\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1907.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1907.6 \text{ MHz}$ ;  $\sigma = 1.433 \text{ S/m}$ ;  $\epsilon_r = 41.179$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.788 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $21.20 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.14 \text{ W/kg}$   
**SAR(1 g) =  $0.677 \text{ W/kg}$ ; SAR(10 g) =  $0.375 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.760 \text{ W/kg}$

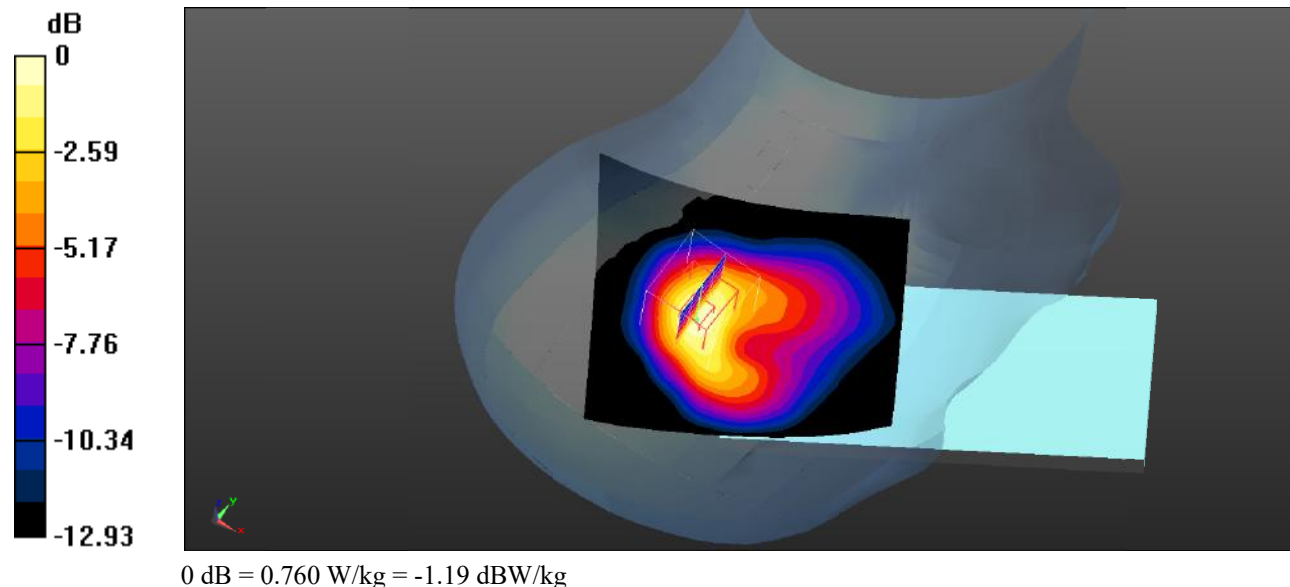

**Test Plot 36#: WCDMA Band 2\_Head Right Tilt\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1852.4 \text{ MHz}$ ;  $\sigma = 1.402 \text{ S/m}$ ;  $\epsilon_r = 41.193$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 1.02 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 22.55 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.42 W/kg  
**SAR(1 g) = 0.858 W/kg; SAR(10 g) = 0.469 W/kg**  
Maximum value of SAR (measured) = 0.935 W/kg

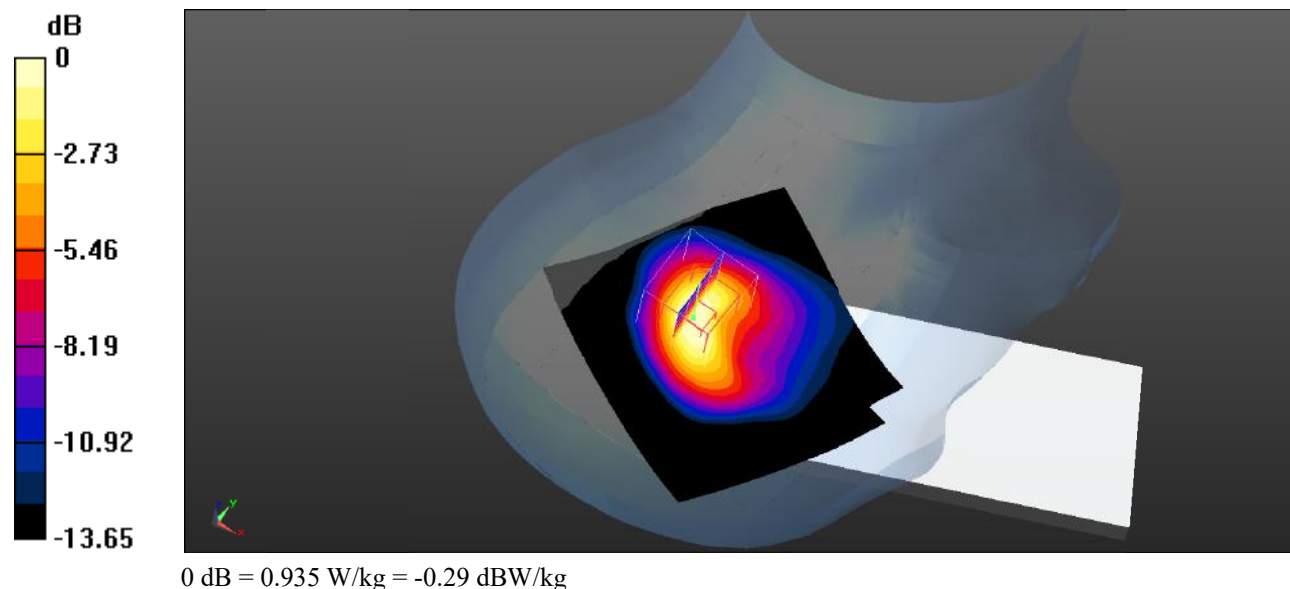

**Test Plot 37#: WCDMA Band 2\_Head Right Tilt\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.983 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $22.23 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$

Peak SAR (extrapolated) =  $1.37 \text{ W/kg}$

**SAR(1 g) =  $0.830 \text{ W/kg}$ ; SAR(10 g) =  $0.452 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.955 \text{ W/kg}$

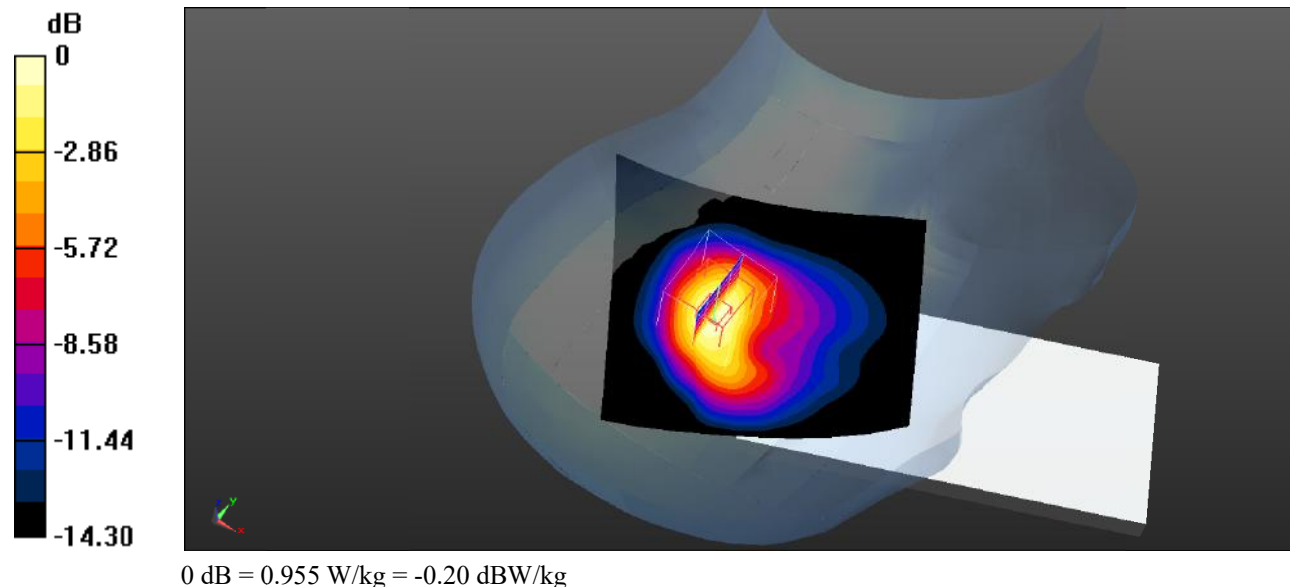

**Test Plot 38#: WCDMA Band 2\_Head Right Tilt\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1907.6 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f = 1907.6$  MHz;  $\sigma = 1.433$  S/m;  $\epsilon_r = 41.179$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.989 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 22.13 V/m; Power Drift = -0.06 dB  
Peak SAR (extrapolated) = 1.34 W/kg  
**SAR(1 g) = 0.815 W/kg; SAR(10 g) = 0.444 W/kg**  
Maximum value of SAR (measured) = 0.926 W/kg

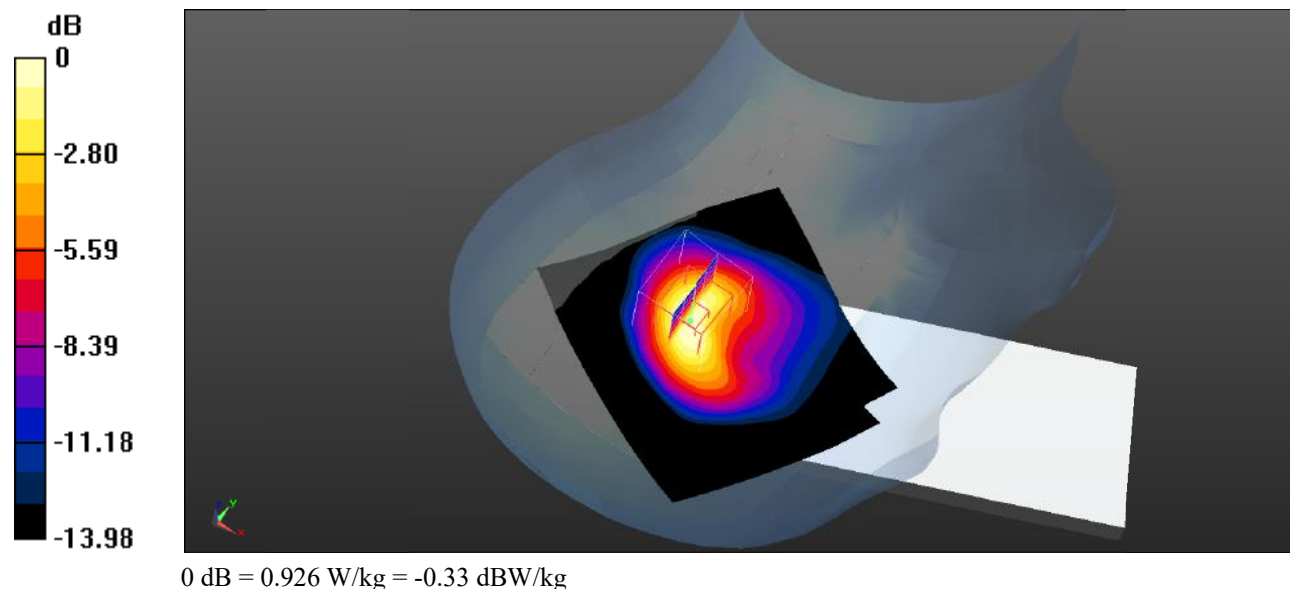

**Test Plot 39#: WCDMA Band 2\_Body Front\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.359 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $7.123 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$

Peak SAR (extrapolated) =  $0.493 \text{ W/kg}$

**SAR(1 g) =  $0.346 \text{ W/kg}$ ; SAR(10 g) =  $0.209 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.346 \text{ W/kg}$

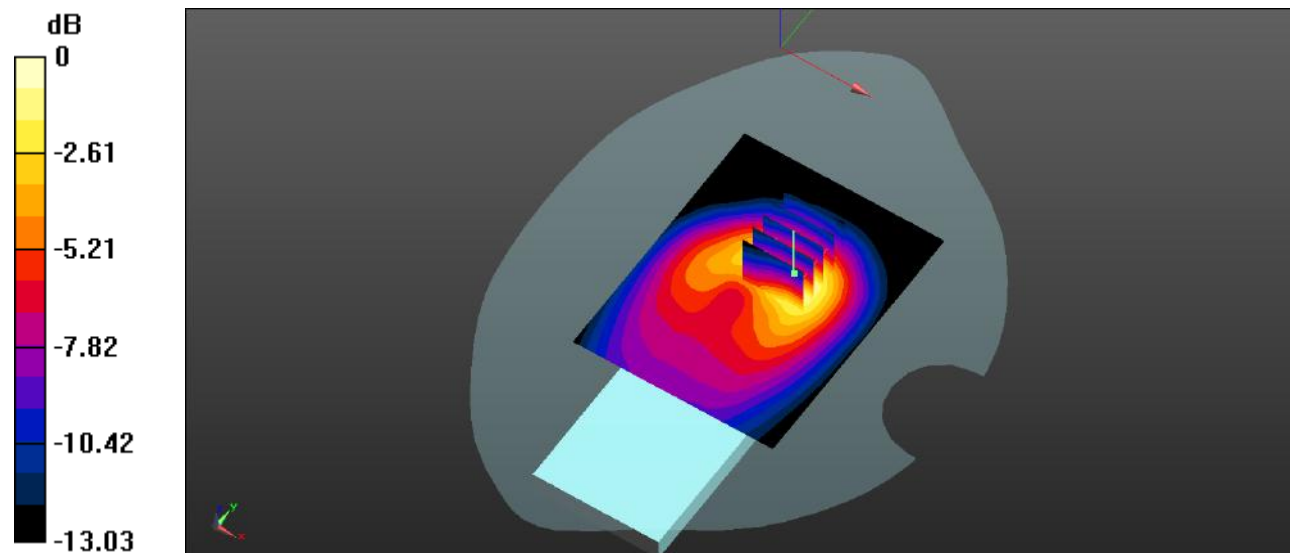

0 dB =  $0.346 \text{ W/kg} = -4.61 \text{ dBW/kg}$

**Test Plot 40#: WCDMA Band 2\_Body Back\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.430 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.257 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.570 \text{ W/kg}$   
**SAR(1 g) =  $0.377 \text{ W/kg}$ ; SAR(10 g) =  $0.225 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.410 \text{ W/kg}$

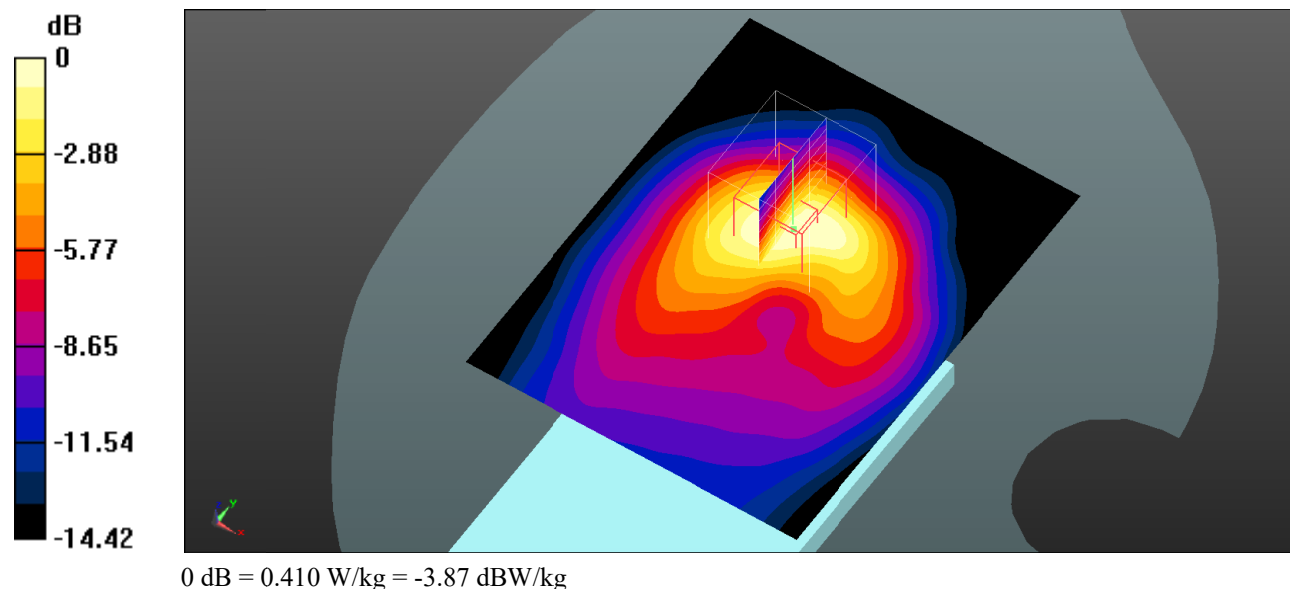



**Test Plot 41#: WCDMA Band 2\_Body Right\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0375 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.447 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0500 \text{ W/kg}$   
**SAR(1 g) =  $0.034 \text{ W/kg}$ ; SAR(10 g) =  $0.024 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0362 \text{ W/kg}$

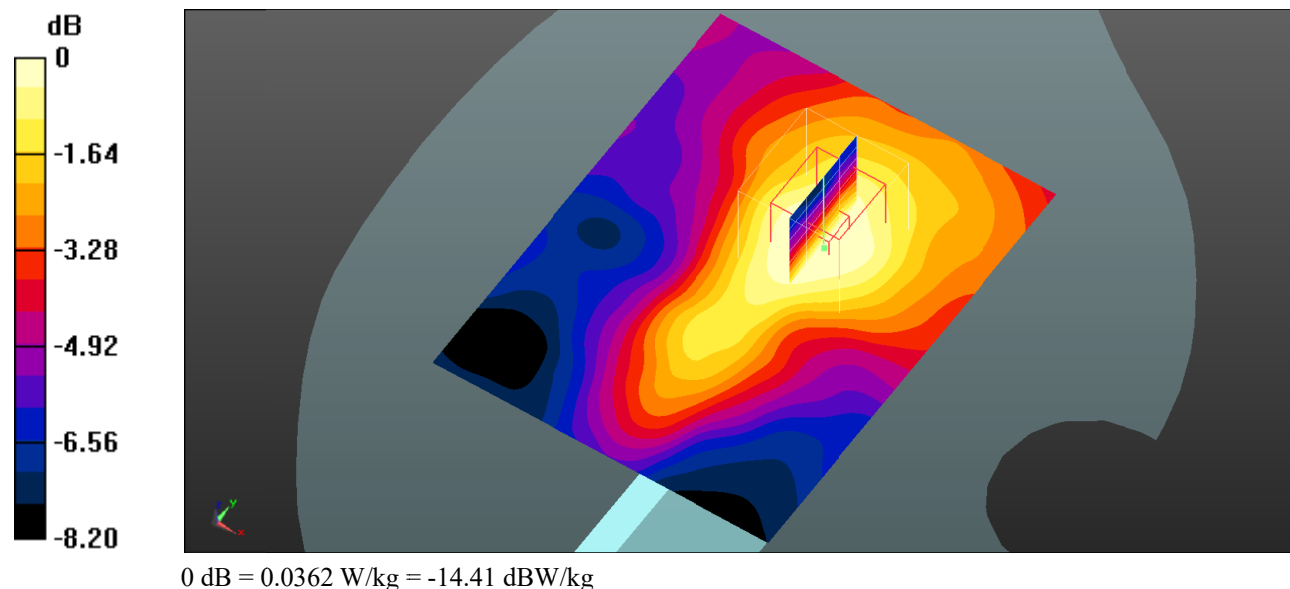

**Test Plot 42#: WCDMA Band 2\_Body Top\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.429 \text{ S/m}$ ;  $\epsilon_r = 41.457$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.573 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $16.97 \text{ V/m}$ ; Power Drift =  $-0.22 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.746 \text{ W/kg}$   
**SAR(1 g) =  $0.468 \text{ W/kg}$ ; SAR(10 g) =  $0.260 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.526 \text{ W/kg}$

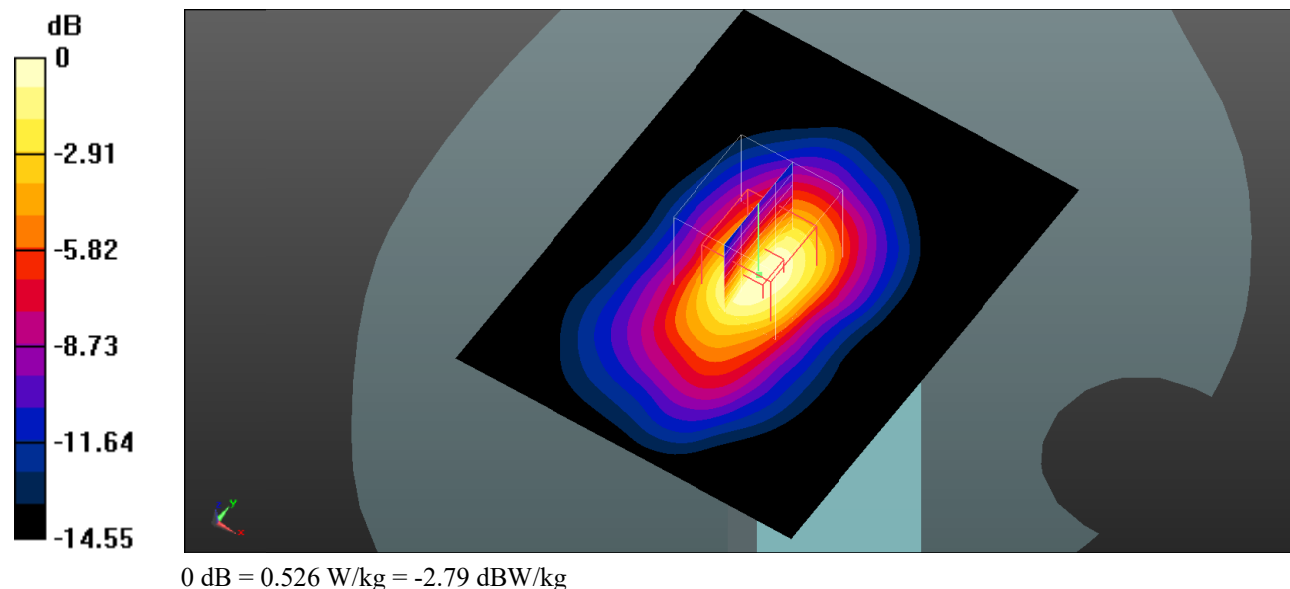

**Test Plot 43#: WCDMA Band 4\_Head Left Cheek\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1712.4 \text{ MHz}$ ;  $\sigma = 1.369 \text{ S/m}$ ;  $\epsilon_r = 41.038$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.25 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 17.50 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 1.77 W/kg  
**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.600 W/kg**  
 Maximum value of SAR (measured) = 1.14 W/kg

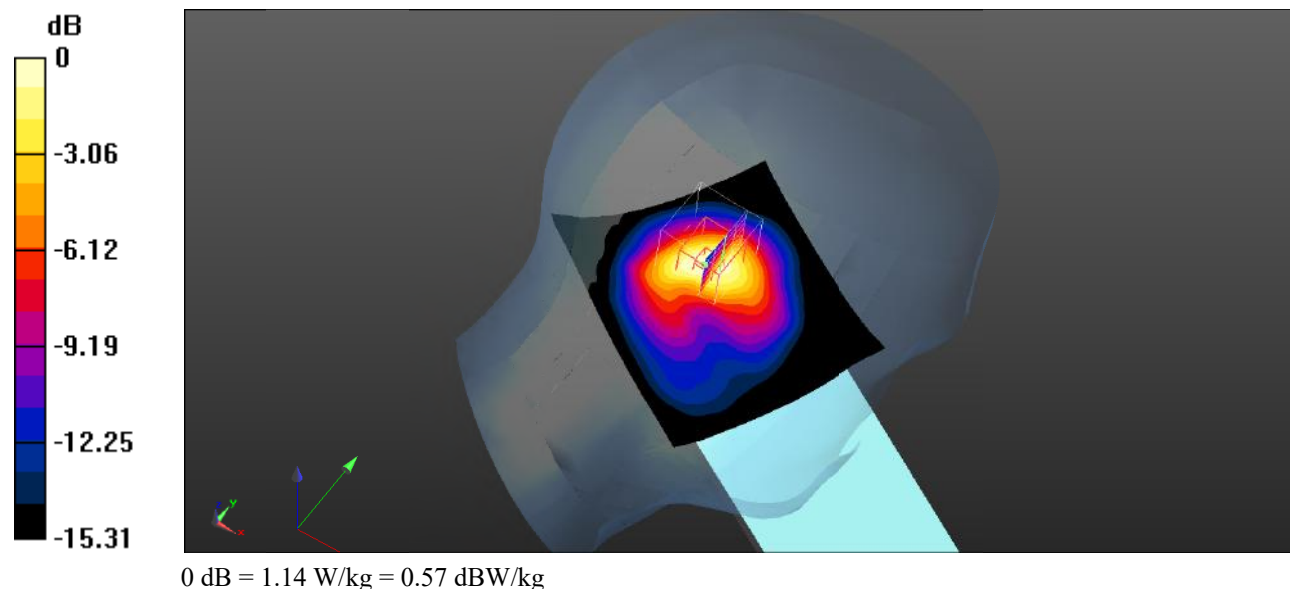

**Test Plot 44#: WCDMA Band 4\_Head Left Cheek\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.375$  S/m;  $\epsilon_r = 41.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.27 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.73 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.76 W/kg

**SAR(1 g) = 1.08 W/kg; SAR(10 g) = 0.585 W/kg**

Maximum value of SAR (measured) = 1.18 W/kg

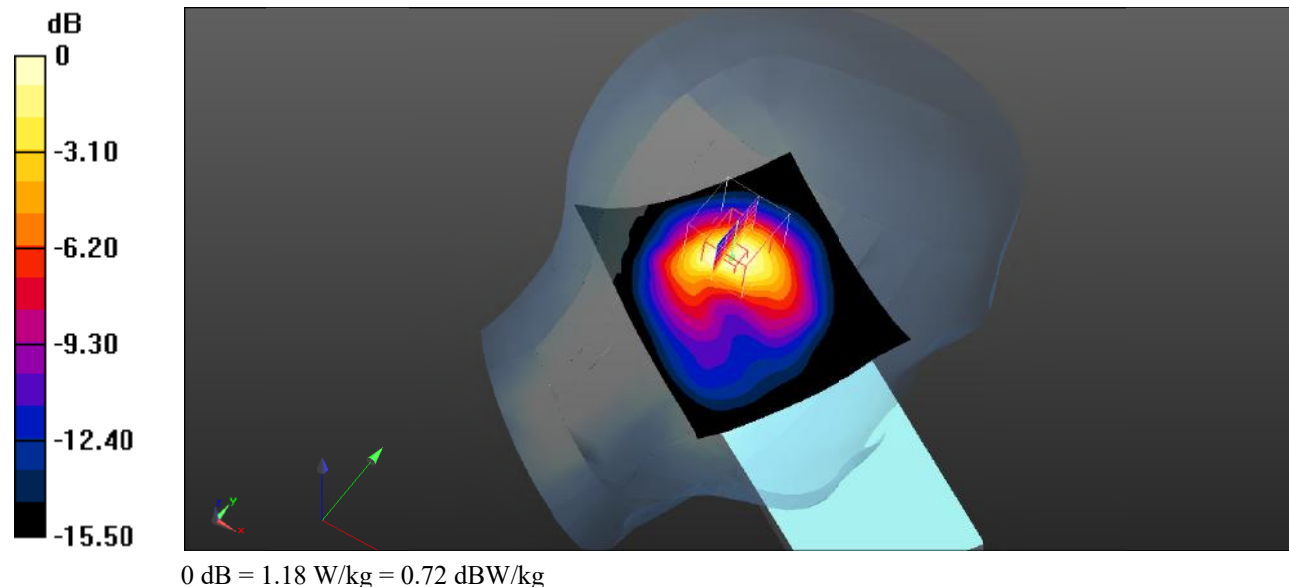

**Test Plot 45#: WCDMA Band 4\_Head Left Check\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1752.6$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 40.963$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.21 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 17.42 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 1.71 W/kg  
**SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.579 W/kg**  
Maximum value of SAR (measured) = 1.12 W/kg

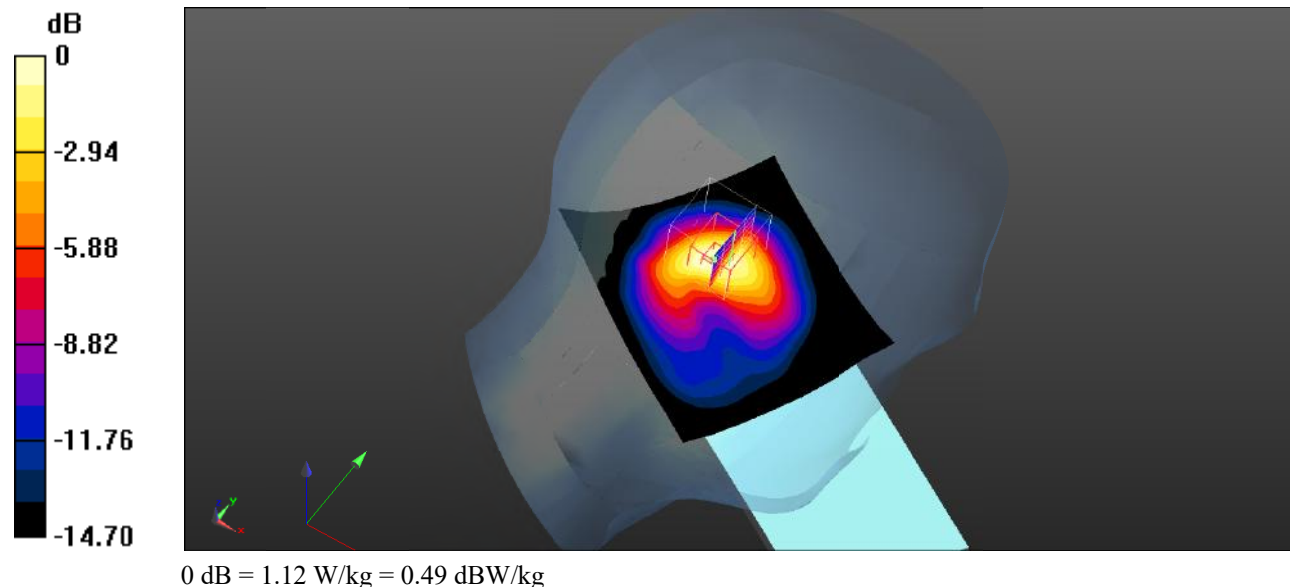

**Test Plot 46#: WCDMA Band 4\_Head Left Tilt\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1712.4 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1712.4 \text{ MHz}$ ;  $\sigma = 1.369 \text{ S/m}$ ;  $\epsilon_r = 41.038$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.31 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 21.07 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 2.14 W/kg  
**SAR(1 g) = 1.21 W/kg; SAR(10 g) = 0.596 W/kg**  
 Maximum value of SAR (measured) = 1.27 W/kg

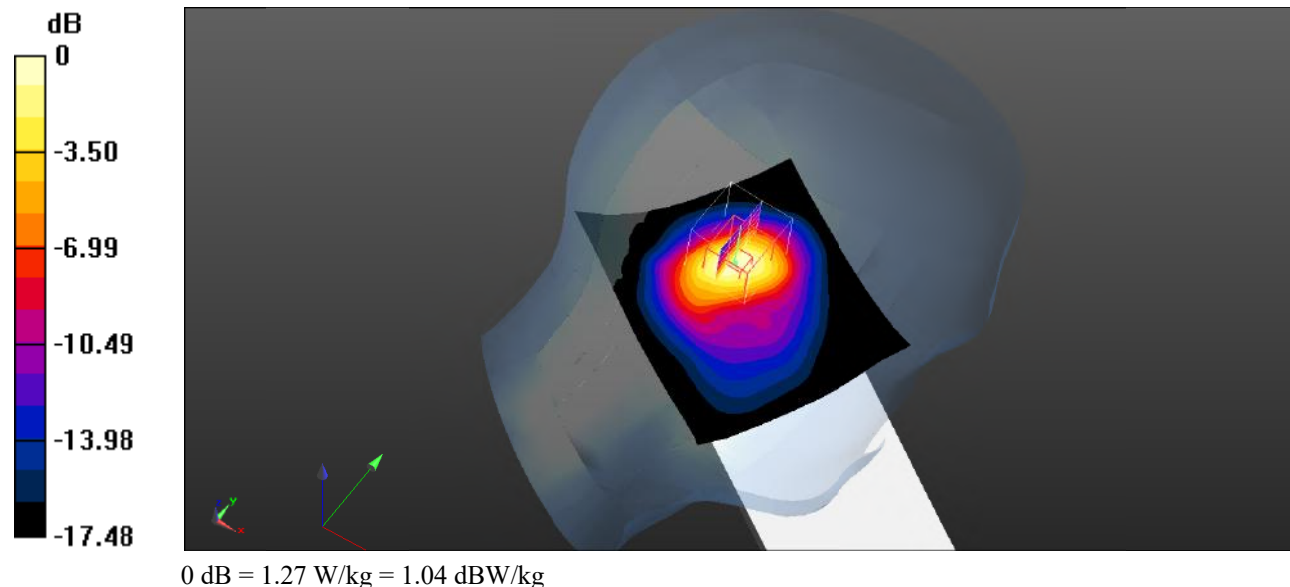

**Test Plot 47#: WCDMA Band 4\_Head Left Tilt\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.375$  S/m;  $\epsilon_r = 41.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.34 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.13 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 2.08 W/kg

**SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.583 W/kg**

Maximum value of SAR (measured) = 1.23 W/kg

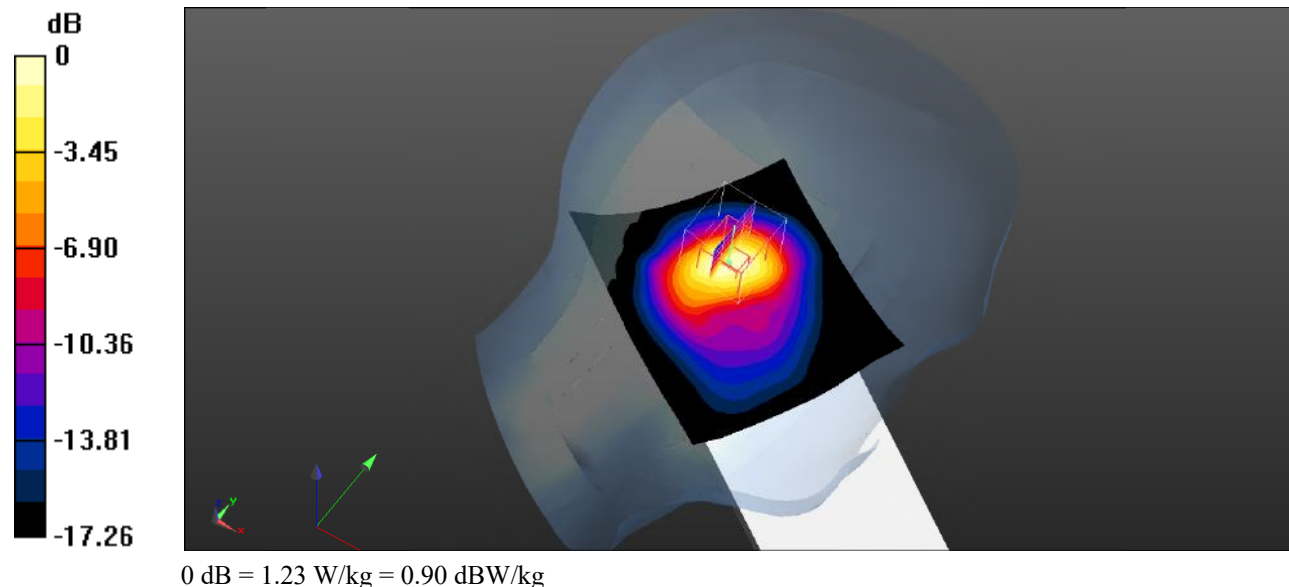

**Test Plot 48#: WCDMA Band 4\_Head Left Tilt\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1752.6 \text{ MHz}$ ;  $\sigma = 1.367 \text{ S/m}$ ;  $\epsilon_r = 40.963$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.30 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 21.54 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 2.06 W/kg  
**SAR(1 g) = 1.16 W/kg; SAR(10 g) = 0.575 W/kg**  
 Maximum value of SAR (measured) = 1.20 W/kg

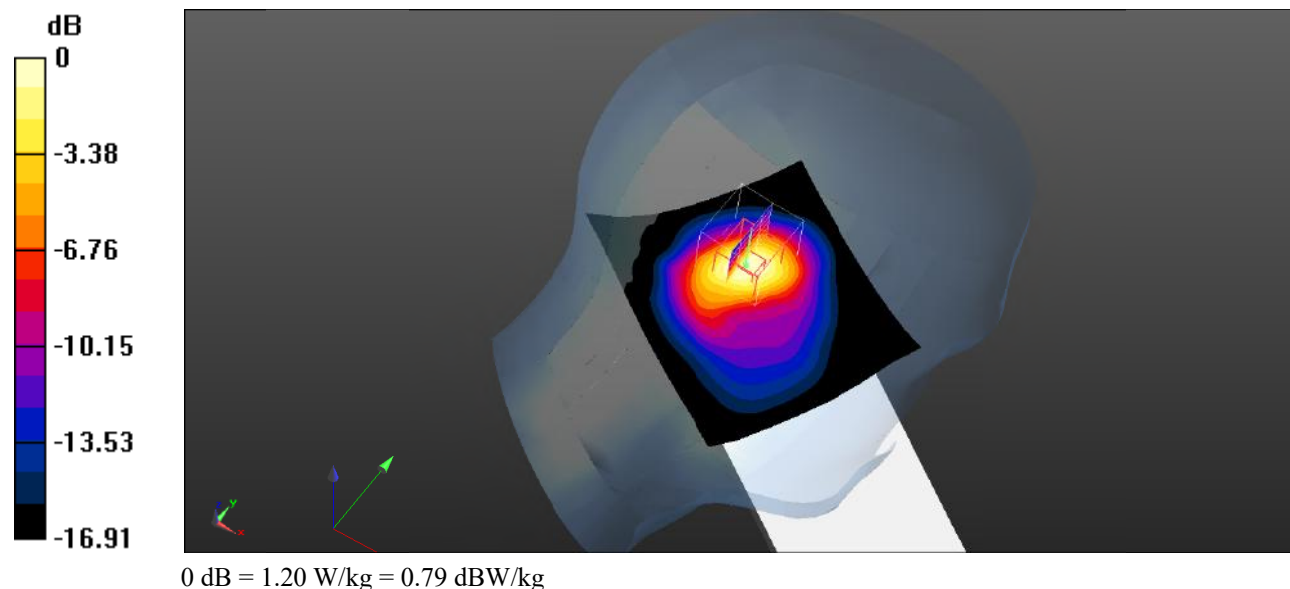



**Test Plot 49#: WCDMA Band 4\_Head Right Cheek\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1712.4 \text{ MHz}$ ;  $\sigma = 1.369 \text{ S/m}$ ;  $\epsilon_r = 41.038$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.902 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $21.73 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.35 \text{ W/kg}$   
**SAR(1 g) =  $0.788 \text{ W/kg}$ ; SAR(10 g) =  $0.410 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.893 \text{ W/kg}$

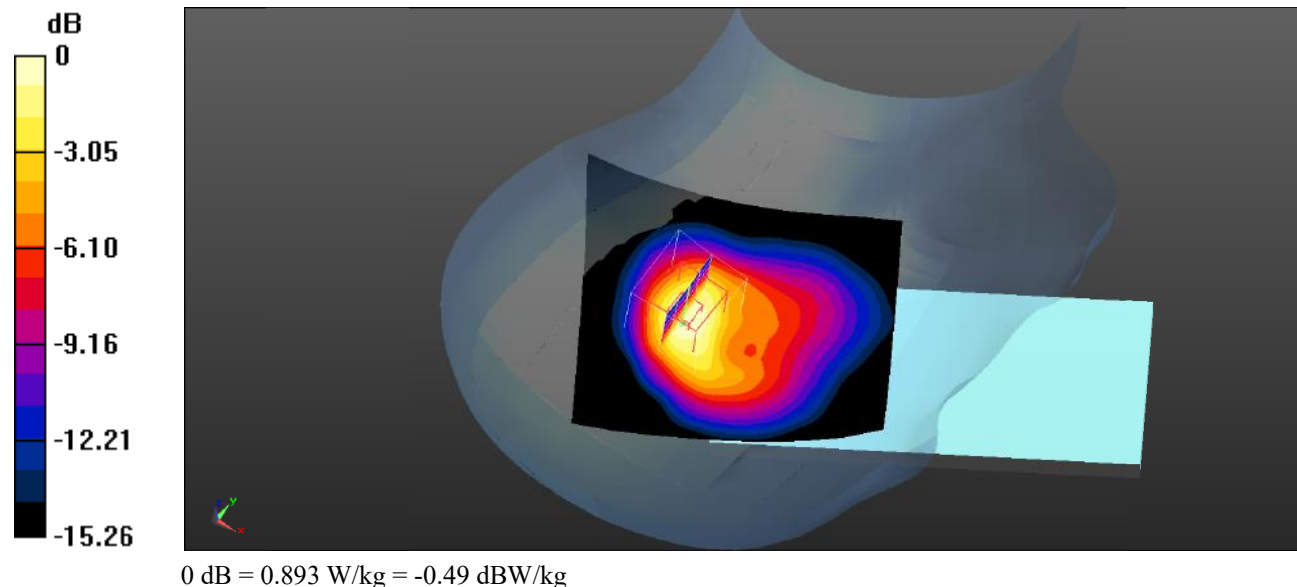

**Test Plot 50#: WCDMA Band 4\_Head Right Cheek\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.375 \text{ S/m}$ ;  $\epsilon_r = 41.101$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.898 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $23.26 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.36 \text{ W/kg}$   
**SAR(1 g) =  $0.790 \text{ W/kg}$ ; SAR(10 g) =  $0.407 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.897 \text{ W/kg}$

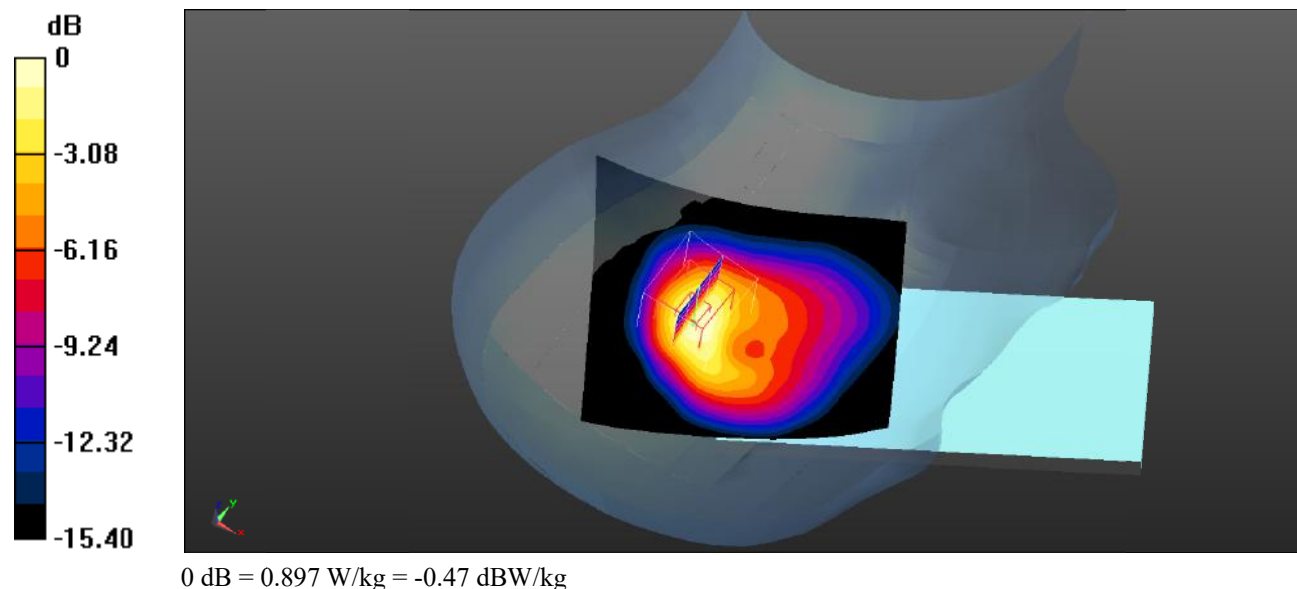

**Test Plot 51#: WCDMA Band 4\_Head Right Cheek\_High****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1752.6$  MHz;  $\sigma = 1.367$  S/m;  $\epsilon_r = 40.963$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.850 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.28 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.33 W/kg

**SAR(1 g) = 0.772 W/kg; SAR(10 g) = 0.399 W/kg**

Maximum value of SAR (measured) = 0.877 W/kg

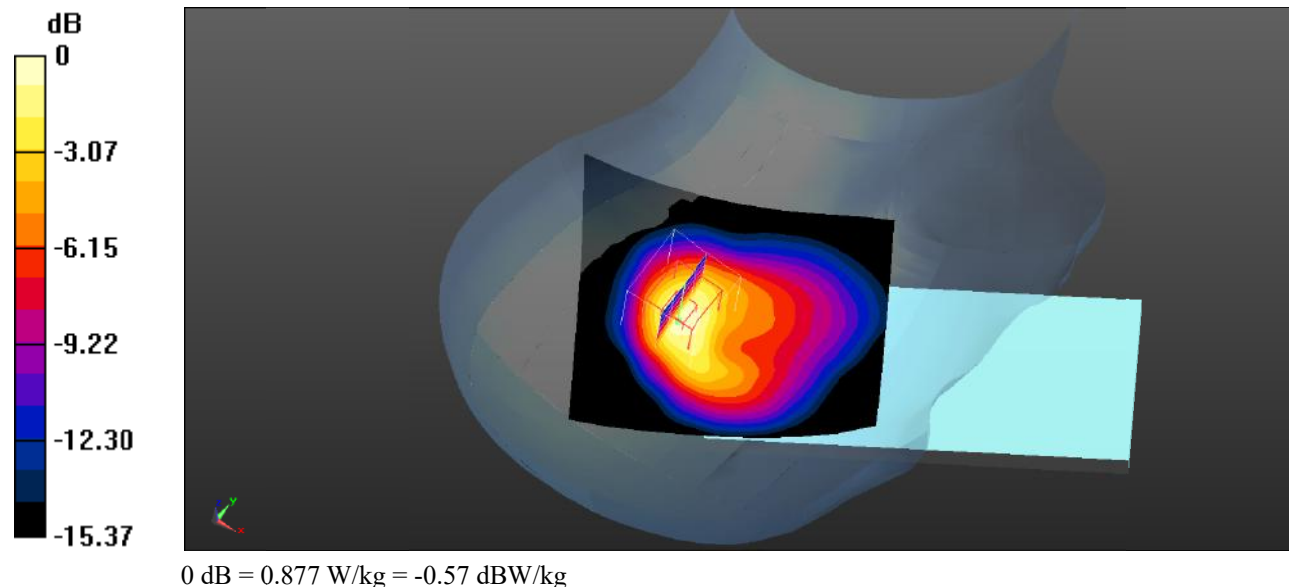

**Test Plot 52#: WCDMA Band 4\_Head Right Tilt\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1712.4 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1712.4 \text{ MHz}$ ;  $\sigma = 1.369 \text{ S/m}$ ;  $\epsilon_r = 41.038$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.978 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $23.46 \text{ V/m}$ ; Power Drift =  $-0.07 \text{ dB}$   
Peak SAR (extrapolated) =  $1.45 \text{ W/kg}$   
**SAR(1 g) =  $0.875 \text{ W/kg}$ ; SAR(10 g) =  $0.458 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.983 \text{ W/kg}$

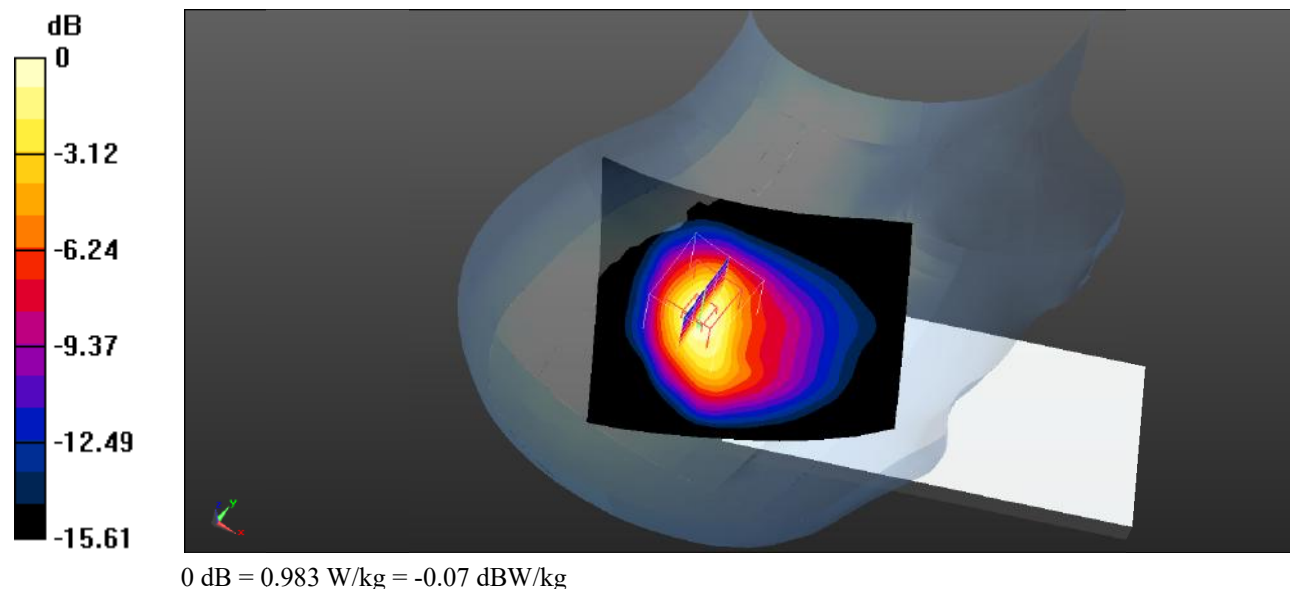

**Test Plot 53#: WCDMA Band 4\_Head Right Tilt\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.375 \text{ S/m}$ ;  $\epsilon_r = 41.101$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.978 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $23.05 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.55 \text{ W/kg}$   
**SAR(1 g) =  $0.899 \text{ W/kg}$ ; SAR(10 g) =  $0.469 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.990 \text{ W/kg}$

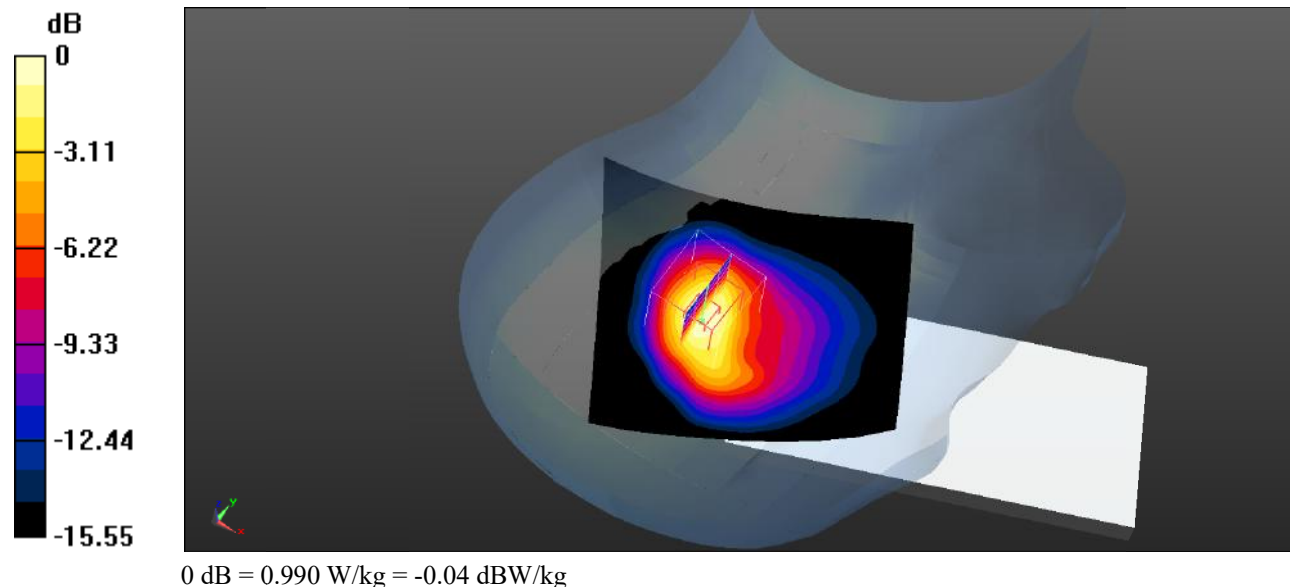

**Test Plot 54#: WCDMA Band 4\_Head Right Tilt\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1752.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1752.6 \text{ MHz}$ ;  $\sigma = 1.367 \text{ S/m}$ ;  $\epsilon_r = 40.963$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.998 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $22.99 \text{ V/m}$ ; Power Drift =  $-0.15 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.48 \text{ W/kg}$   
**SAR(1 g) =  $0.884 \text{ W/kg}$ ; SAR(10 g) =  $0.459 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $1.00 \text{ W/kg}$

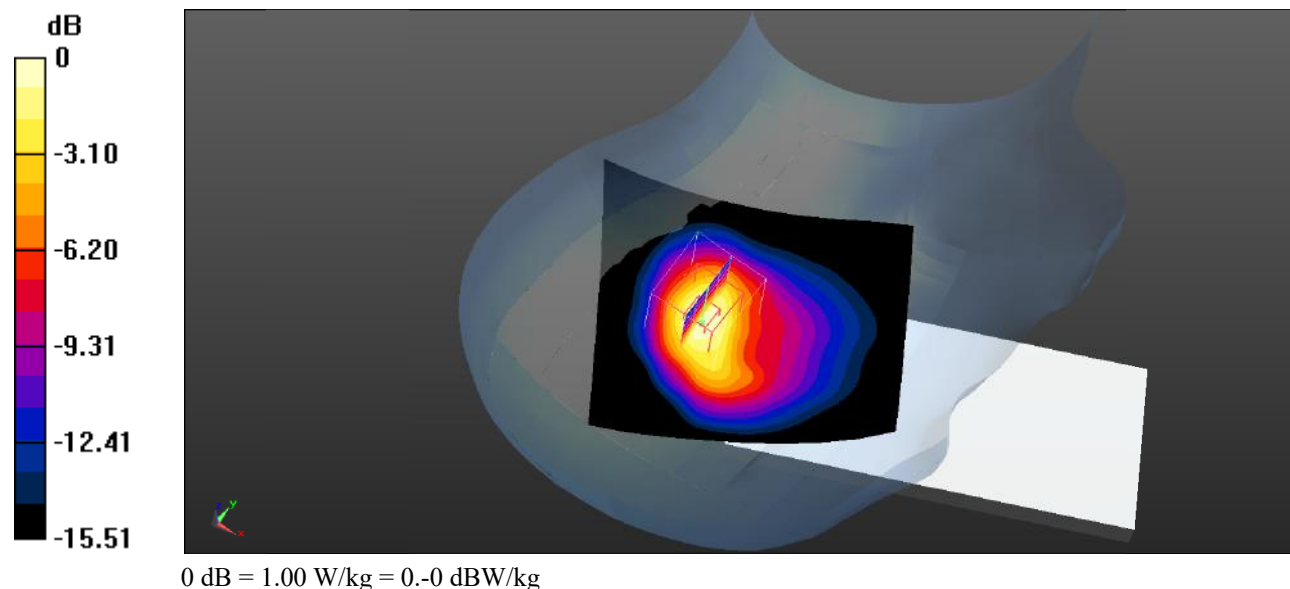

**Test Plot 55#: WCDMA Band 4\_Body Front\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.375$  S/m;  $\epsilon_r = 41.101$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.425 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.16 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.522 W/kg

**SAR(1 g) = 0.391 W/kg; SAR(10 g) = 0.229 W/kg**

Maximum value of SAR (measured) = 0.416 W/kg

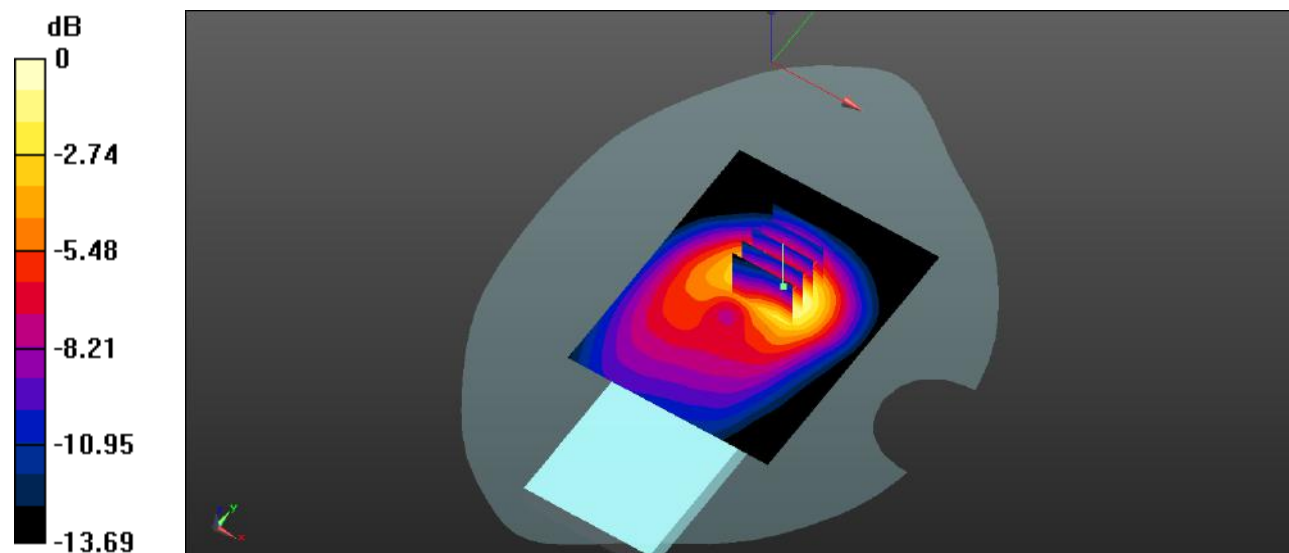

0 dB = 0.416 W/kg = -3.81 dBW/kg

**Test Plot 56#: WCDMA Band 4\_Body Back\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.375 \text{ S/m}$ ;  $\epsilon_r = 41.101$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.483 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.792 \text{ V/m}$ ; Power Drift =  $0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.580 \text{ W/kg}$   
**SAR(1 g) =  $0.421 \text{ W/kg}$ ; SAR(10 g) =  $0.258 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.451 \text{ W/kg}$

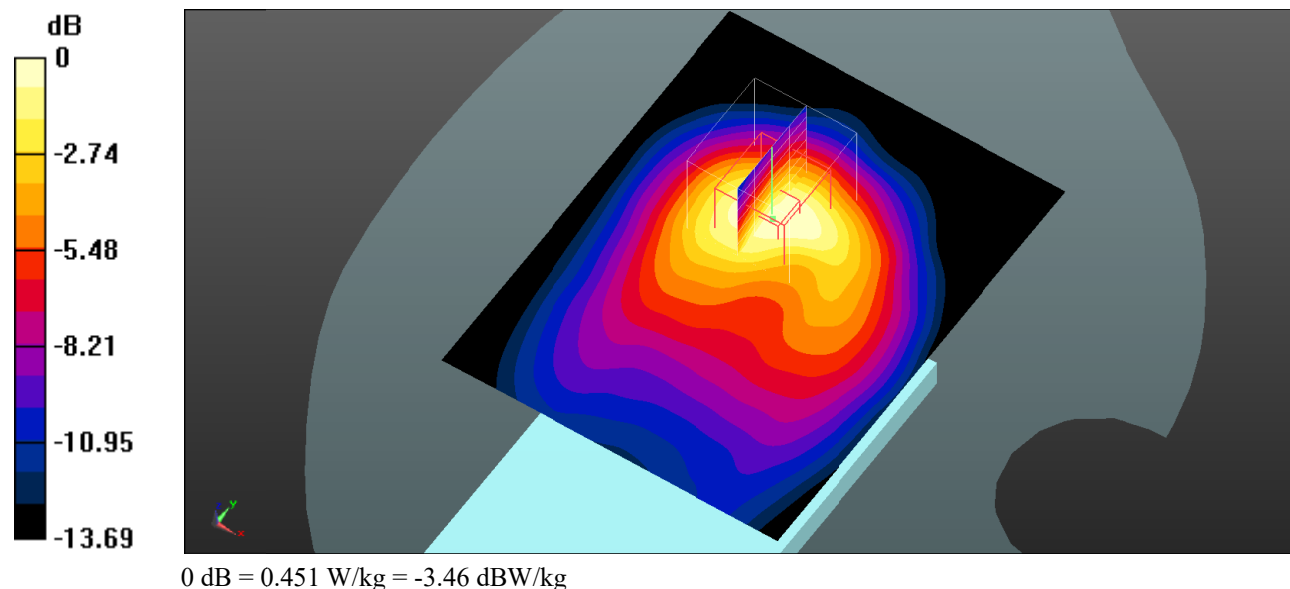



**Test Plot 57#: WCDMA Band 4\_Body Right\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6 \text{ MHz}$ ;  $\sigma = 1.375 \text{ S/m}$ ;  $\epsilon_r = 41.101$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0527 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $2.872 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0700 \text{ W/kg}$   
**SAR(1 g) =  $0.048 \text{ W/kg}$ ; SAR(10 g) =  $0.032 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0496 \text{ W/kg}$

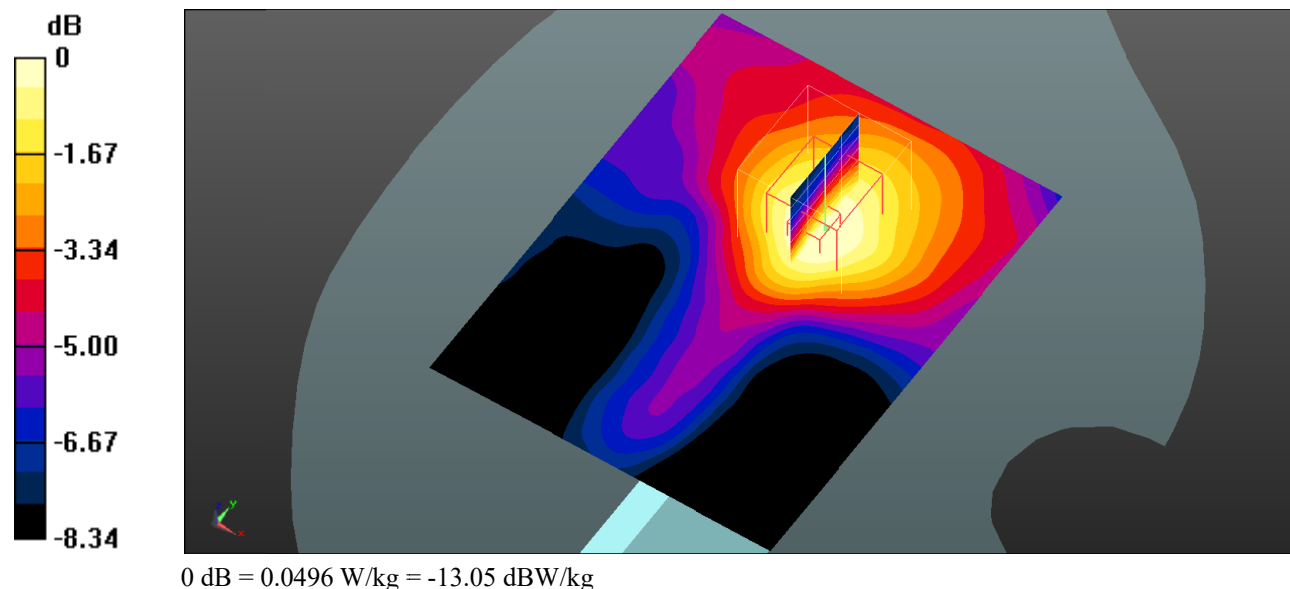

**Test Plot 58#: WCDMA Band 4\_Body Top\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 1732.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.6$  MHz;  $\sigma = 1.375$  S/m;  $\epsilon_r = 41.101$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.597 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 18.30 V/m; Power Drift = -0.17 dB  
 Peak SAR (extrapolated) = 0.730 W/kg  
**SAR(1 g) = 0.480 W/kg; SAR(10 g) = 0.267 W/kg**  
 Maximum value of SAR (measured) = 0.526 W/kg

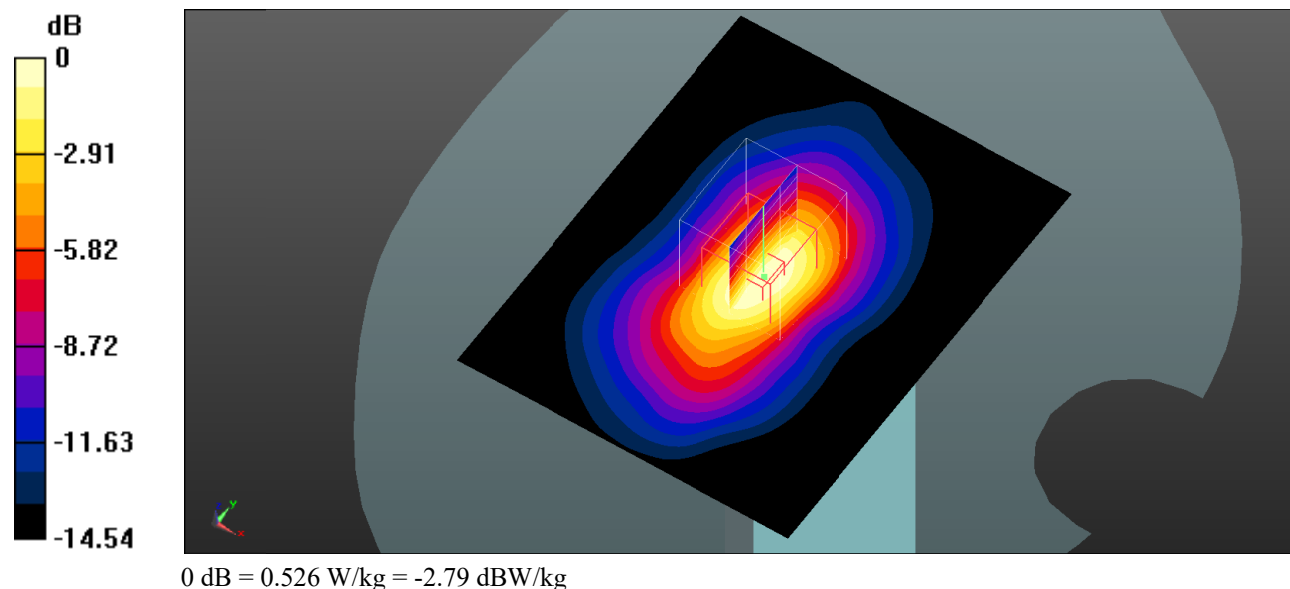

**Test Plot 59#: WCDMA Band 5\_Head Left Cheek\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.554 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $18.33 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.694 \text{ W/kg}$   
**SAR(1 g) =  $0.438 \text{ W/kg}$ ; SAR(10 g) =  $0.301 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.460 \text{ W/kg}$

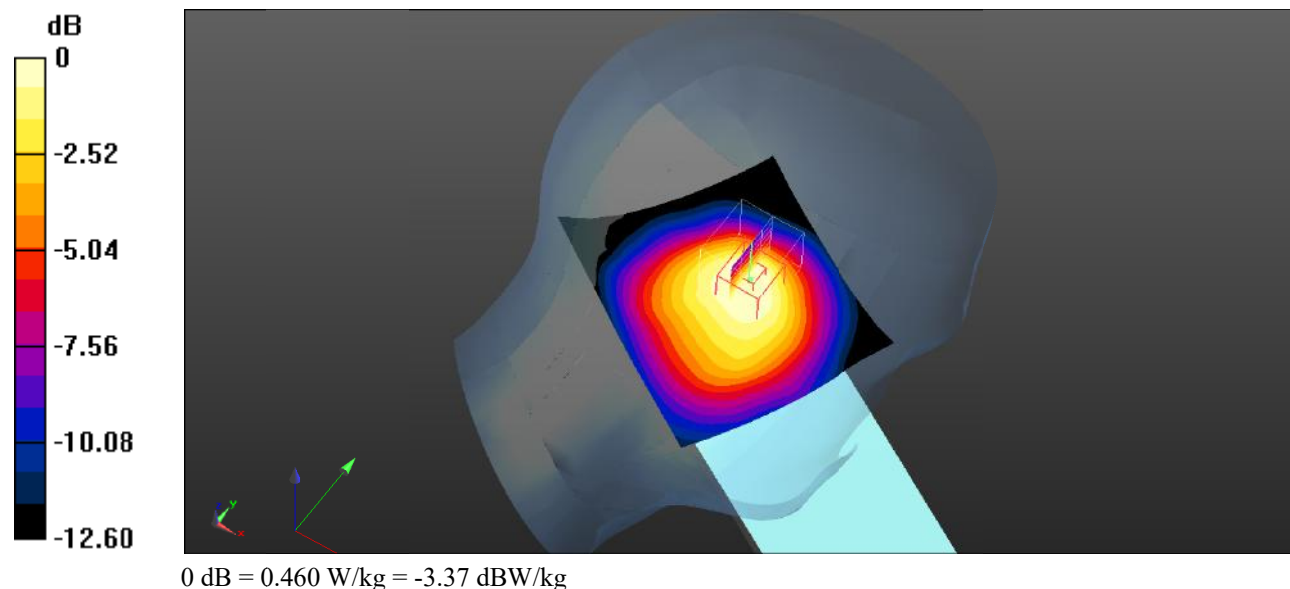

**Test Plot 60#: WCDMA Band 5\_Head Left Tilt\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.390 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $17.19 \text{ V/m}$ ; Power Drift =  $-0.17 \text{ dB}$   
Peak SAR (extrapolated) =  $0.628 \text{ W/kg}$   
**SAR(1 g) =  $0.337 \text{ W/kg}$ ; SAR(10 g) =  $0.204 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.356 \text{ W/kg}$

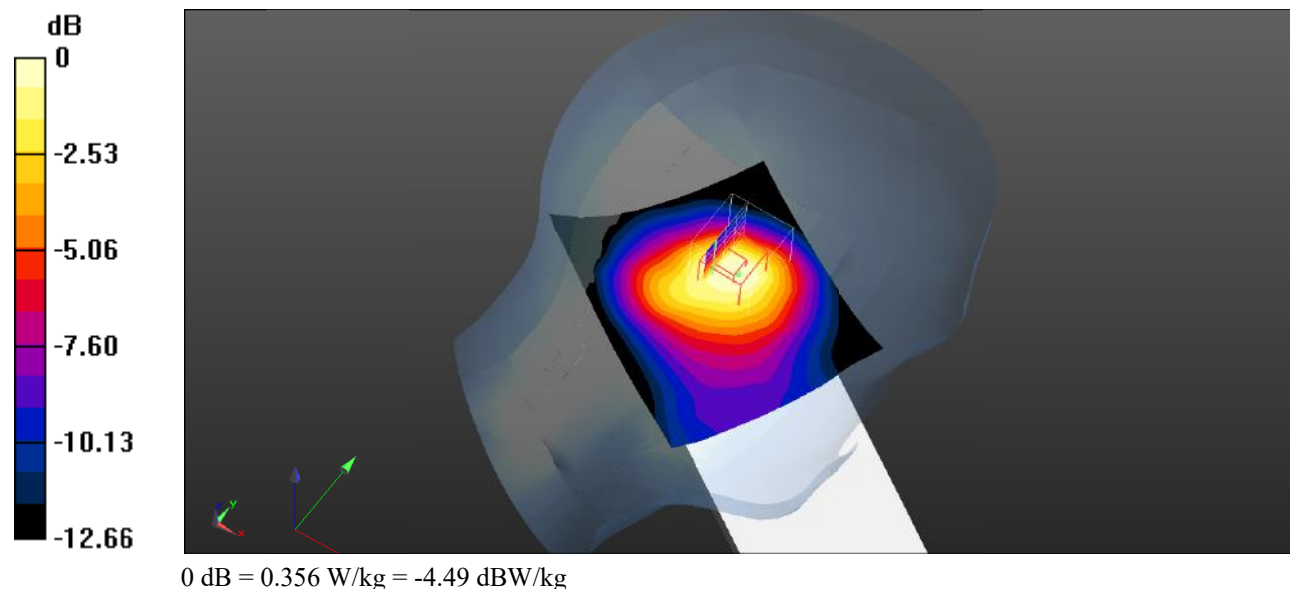

**Test Plot 61#: WCDMA Band 5\_Head Right Cheek\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.419 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $19.44 \text{ V/m}$ ; Power Drift =  $-0.15 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.510 \text{ W/kg}$   
**SAR(1 g) =  $0.355 \text{ W/kg}$ ; SAR(10 g) =  $0.247 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.367 \text{ W/kg}$

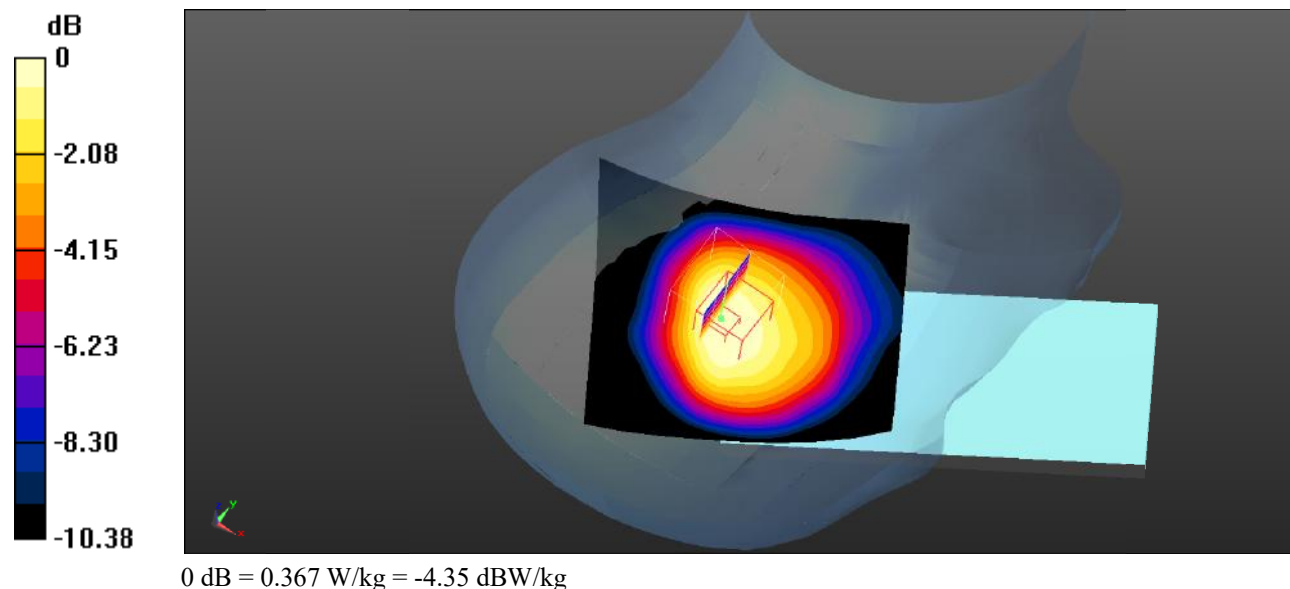

**Test Plot 62#: WCDMA Band 5\_Head Right Tilt\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.257 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $16.31 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.364 \text{ W/kg}$   
**SAR(1 g) =  $0.233 \text{ W/kg}$ ; SAR(10 g) =  $0.144 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.254 \text{ W/kg}$

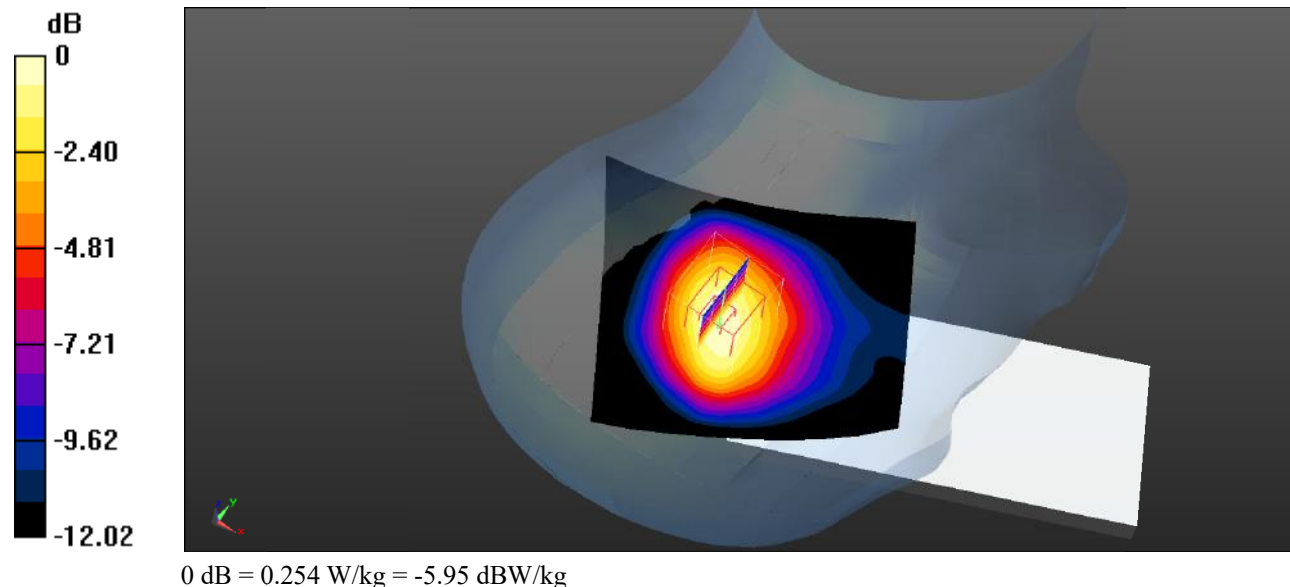

**Test Plot 63#: WCDMA Band 5\_Body Front\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.6$  MHz;  $\sigma = 0.888$  S/m;  $\epsilon_r = 43.093$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.128 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.11 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.205 W/kg

**SAR(1 g) = 0.126 W/kg; SAR(10 g) = 0.082 W/kg**

Maximum value of SAR (measured) = 0.133 W/kg

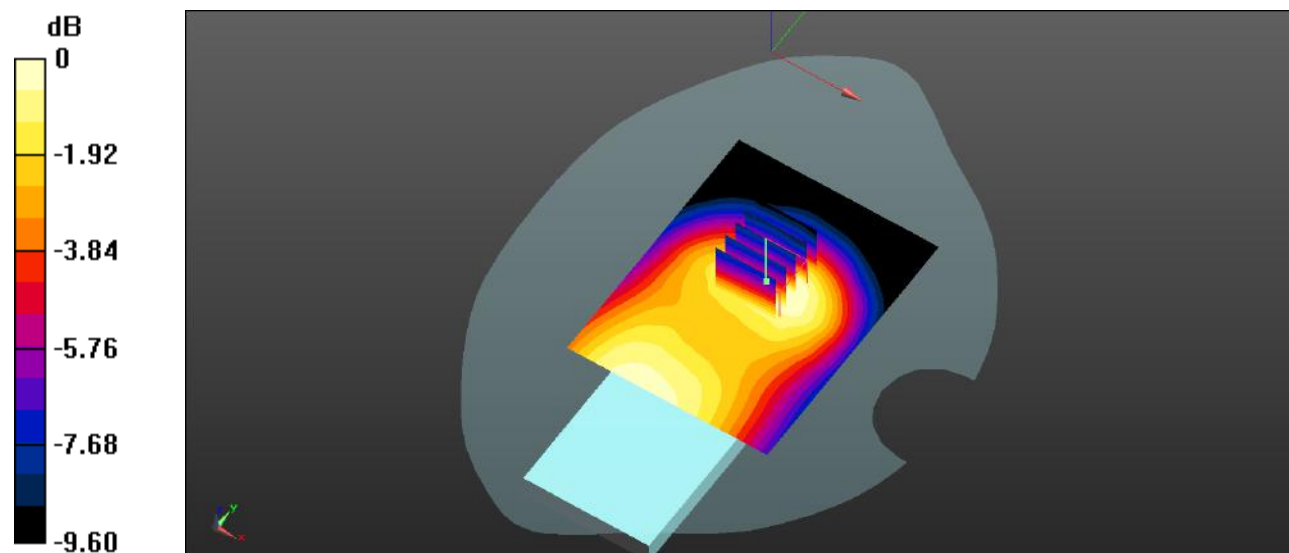

0 dB = 0.133 W/kg = -8.76 dBW/kg

**Test Plot 64#: WCDMA Band 5\_Body Back\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.140 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.33 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.197 \text{ W/kg}$   
**SAR(1 g) =  $0.132 \text{ W/kg}$ ; SAR(10 g) =  $0.087 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.137 \text{ W/kg}$

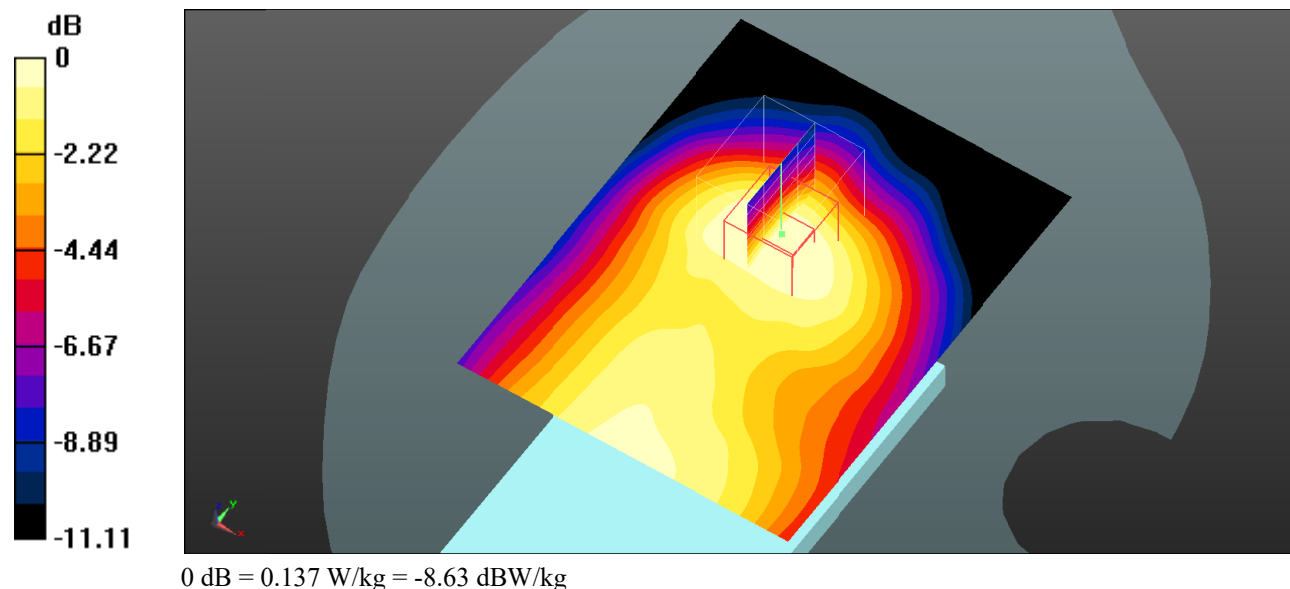



**Test Plot 65#: WCDMA Band 5\_Body Right\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.147 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $8.893 \text{ V/m}$ ; Power Drift =  $-0.15 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.176 \text{ W/kg}$   
**SAR(1 g) =  $0.136 \text{ W/kg}$ ; SAR(10 g) =  $0.099 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.143 \text{ W/kg}$

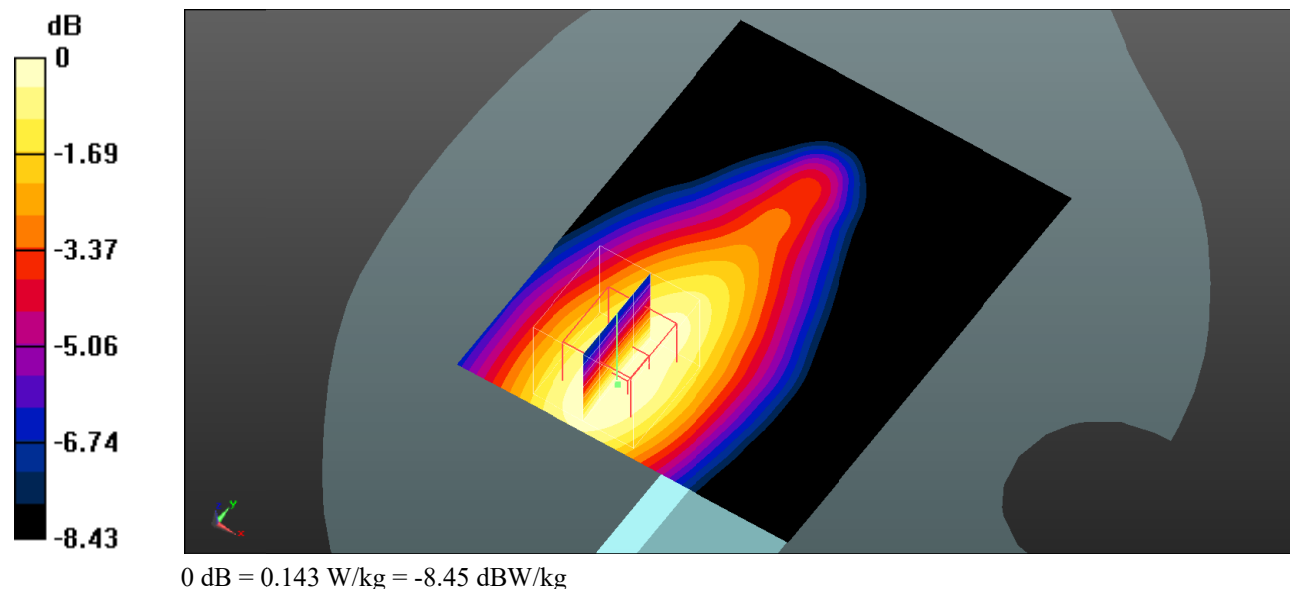

**Test Plot 66#: WCDMA Band 5\_Body Top\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Communication System: UID 0, WCDMA; Frequency: 836.6 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.6 \text{ MHz}$ ;  $\sigma = 0.888 \text{ S/m}$ ;  $\epsilon_r = 43.093$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.130 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $9.496 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.176 \text{ W/kg}$   
**SAR(1 g) =  $0.108 \text{ W/kg}$ ; SAR(10 g) =  $0.068 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.116 \text{ W/kg}$

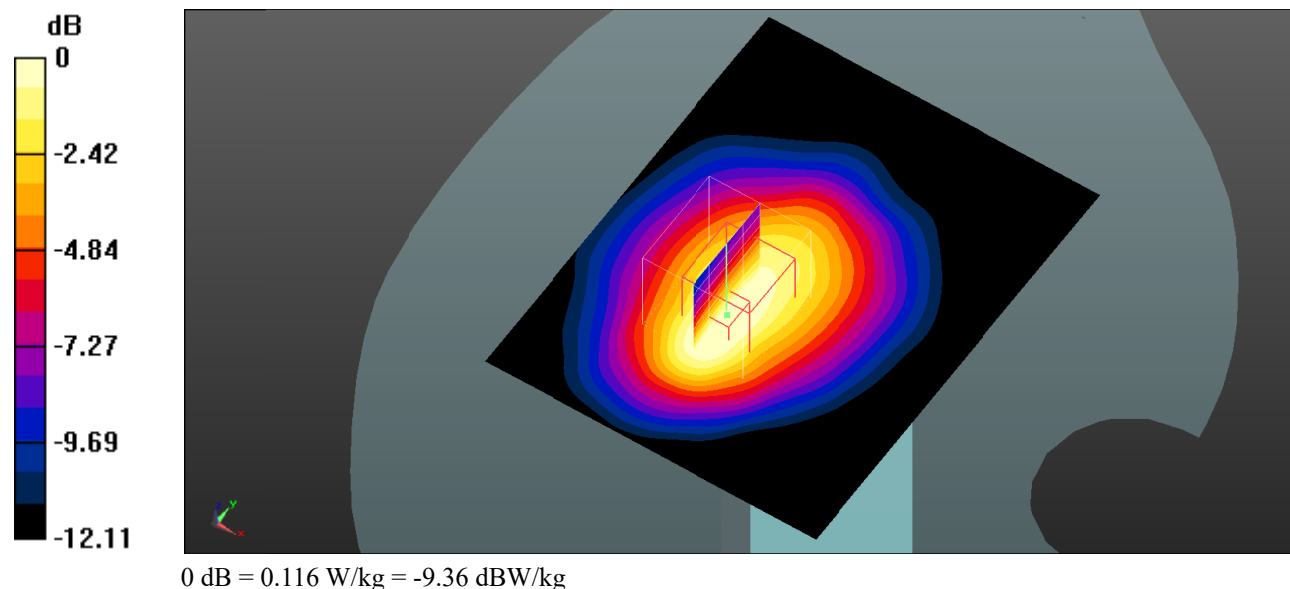

**Test Plot 67#: LTE Band 2\_Head Left Cheek\_1RB\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.416 \text{ S/m}$ ;  $\epsilon_r = 40.737$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.10 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 16.78 V/m; Power Drift = -0.12 dB  
 Peak SAR (extrapolated) = 1.73 W/kg  
**SAR(1 g) = 0.969 W/kg; SAR(10 g) = 0.506 W/kg**  
 Maximum value of SAR (measured) = 1.04 W/kg

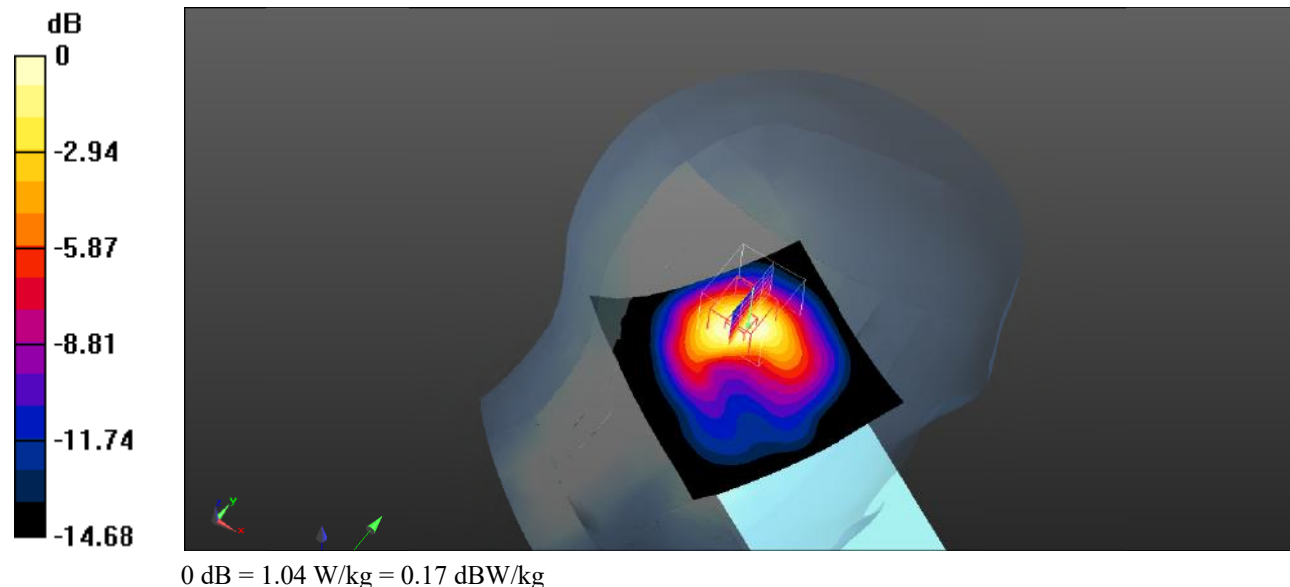

**Test Plot 68#: LTE Band 2\_Head Left Cheek\_1RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.432$  S/m;  $\epsilon_r = 40.836$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.11 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.92 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.68 W/kg

**SAR(1 g) = 0.959 W/kg; SAR(10 g) = 0.503 W/kg**

Maximum value of SAR (measured) = 1.04 W/kg

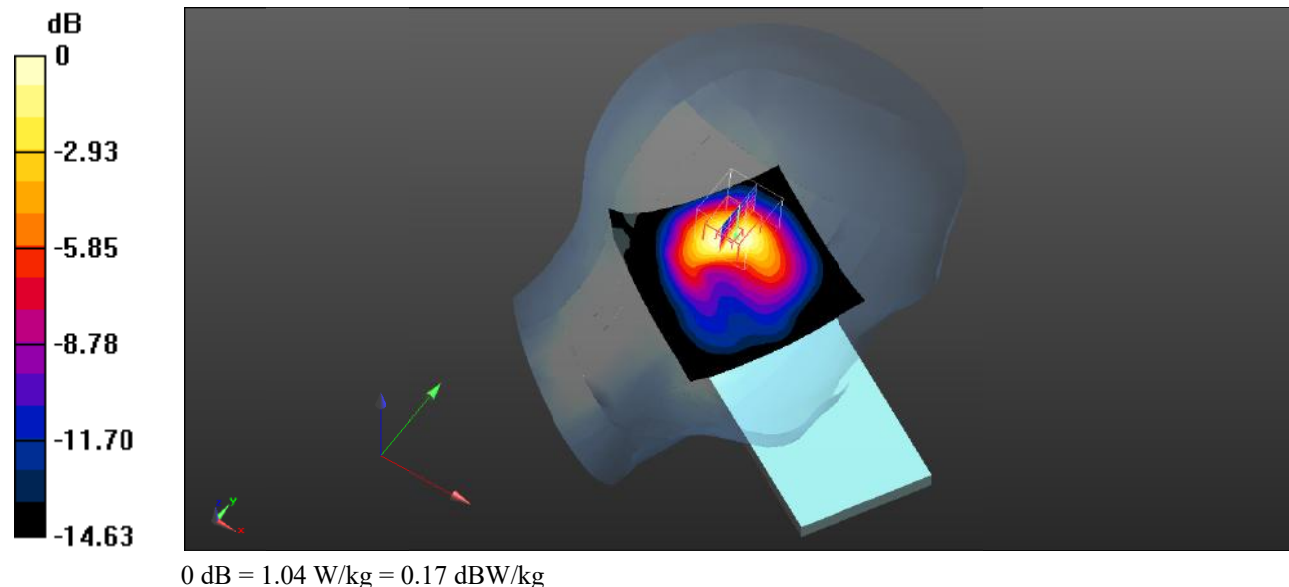

**Test Plot 69#: LTE Band 2\_Head Left Cheek\_1RB\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 40.829$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.10 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 16.28 V/m; Power Drift = -0.19 dB  
Peak SAR (extrapolated) = 1.63 W/kg  
**SAR(1 g) = 0.917 W/kg; SAR(10 g) = 0.484 W/kg**  
Maximum value of SAR (measured) = 1.01 W/kg

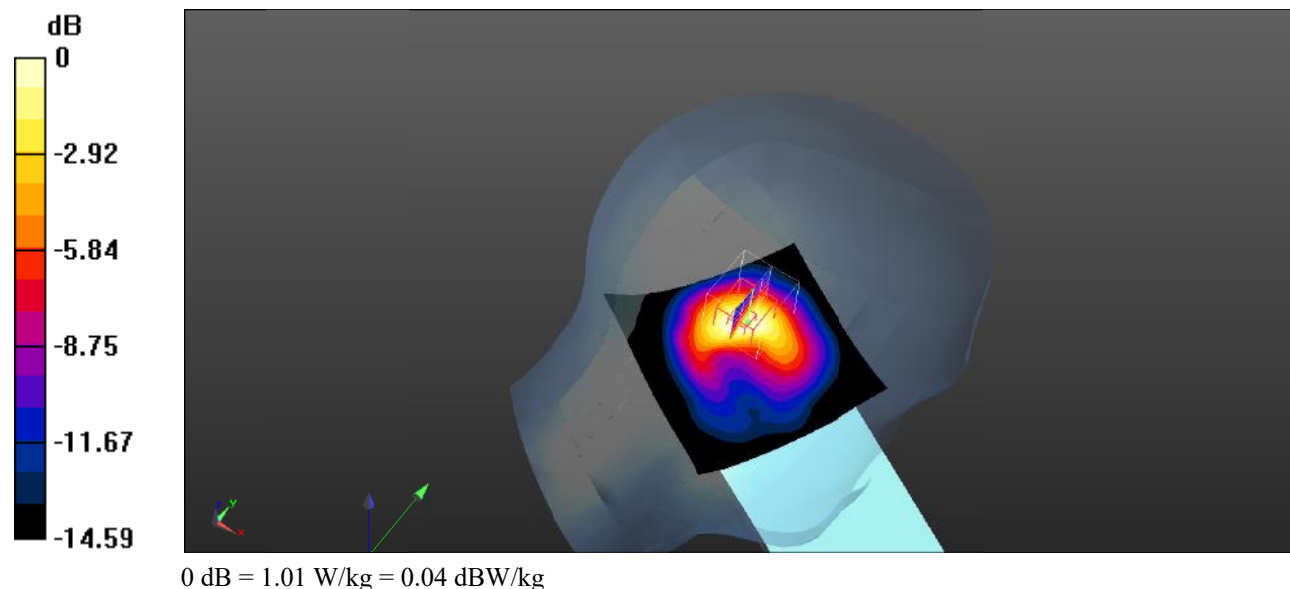

**Test Plot 70#: LTE Band 2\_Head Left Cheek\_50%RB\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.416 \text{ S/m}$ ;  $\epsilon_r = 40.737$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.958 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $15.63 \text{ V/m}$ ; Power Drift =  $-0.11 \text{ dB}$

Peak SAR (extrapolated) =  $1.48 \text{ W/kg}$

**SAR(1 g) =  $0.842 \text{ W/kg}$ ; SAR(10 g) =  $0.441 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.906 \text{ W/kg}$

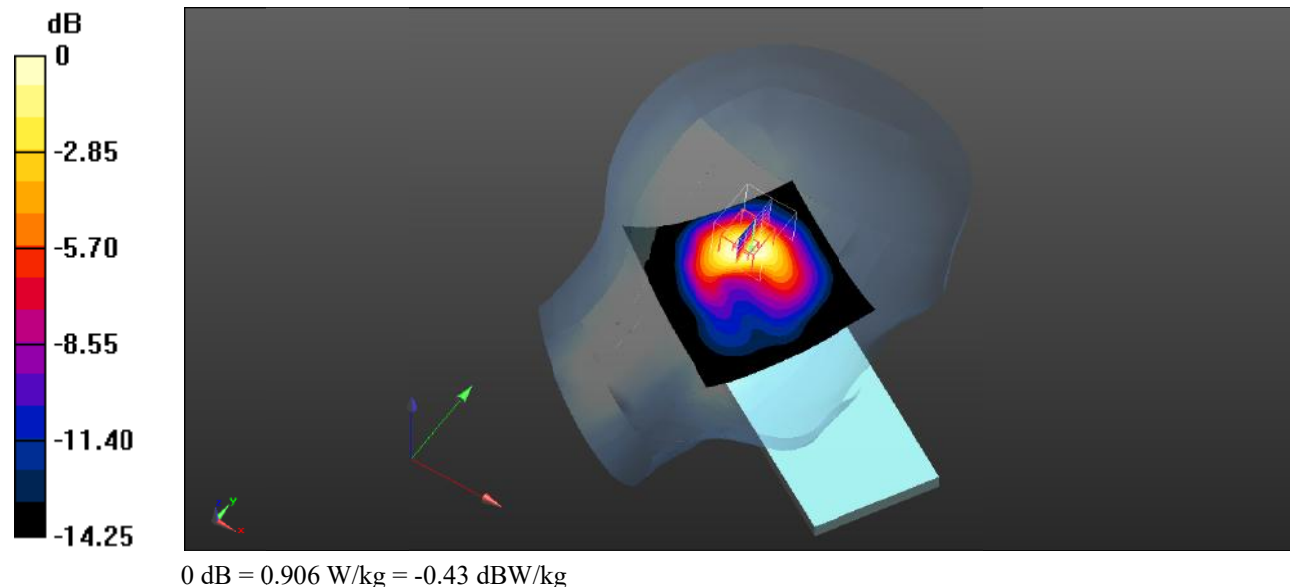

**Test Plot 71#: LTE Band 2\_Head Left Cheek\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.926 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $15.36 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.38 \text{ W/kg}$   
**SAR(1 g) =  $0.780 \text{ W/kg}$ ; SAR(10 g) =  $0.407 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.840 \text{ W/kg}$

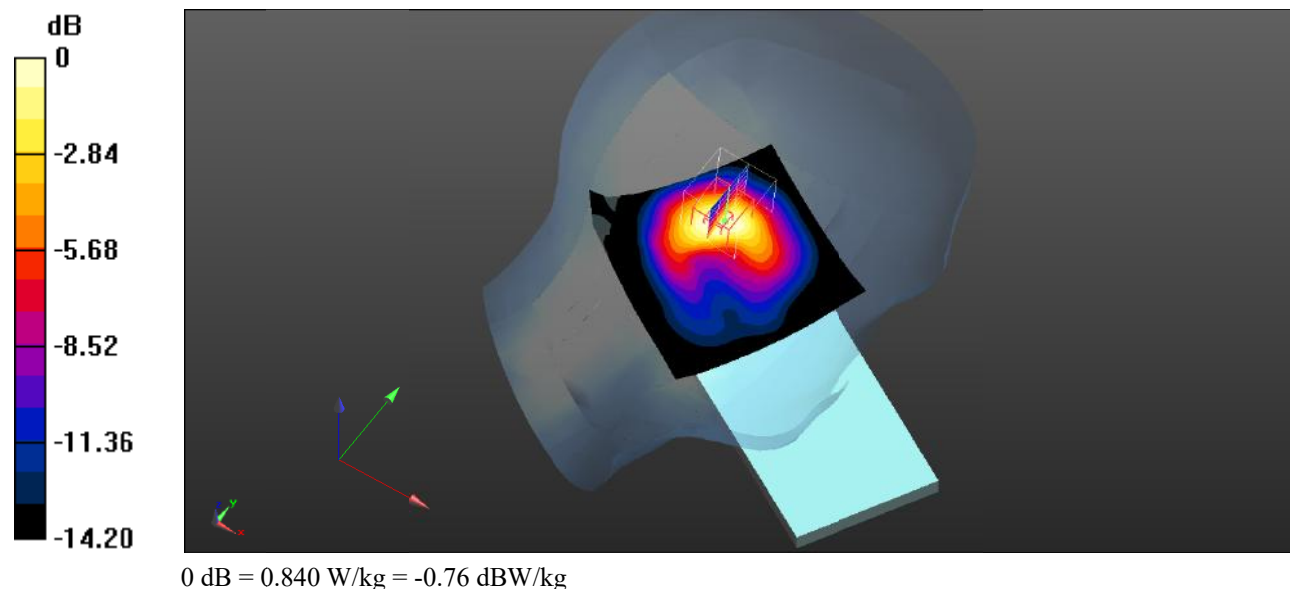

**Test Plot 72#: LTE Band 2\_Head Left Cheek\_50%RB\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 40.829$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.973 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 15.47 V/m; Power Drift = -0.09 dB  
Peak SAR (extrapolated) = 1.45 W/kg  
**SAR(1 g) = 0.823 W/kg; SAR(10 g) = 0.434 W/kg**  
Maximum value of SAR (measured) = 0.911 W/kg

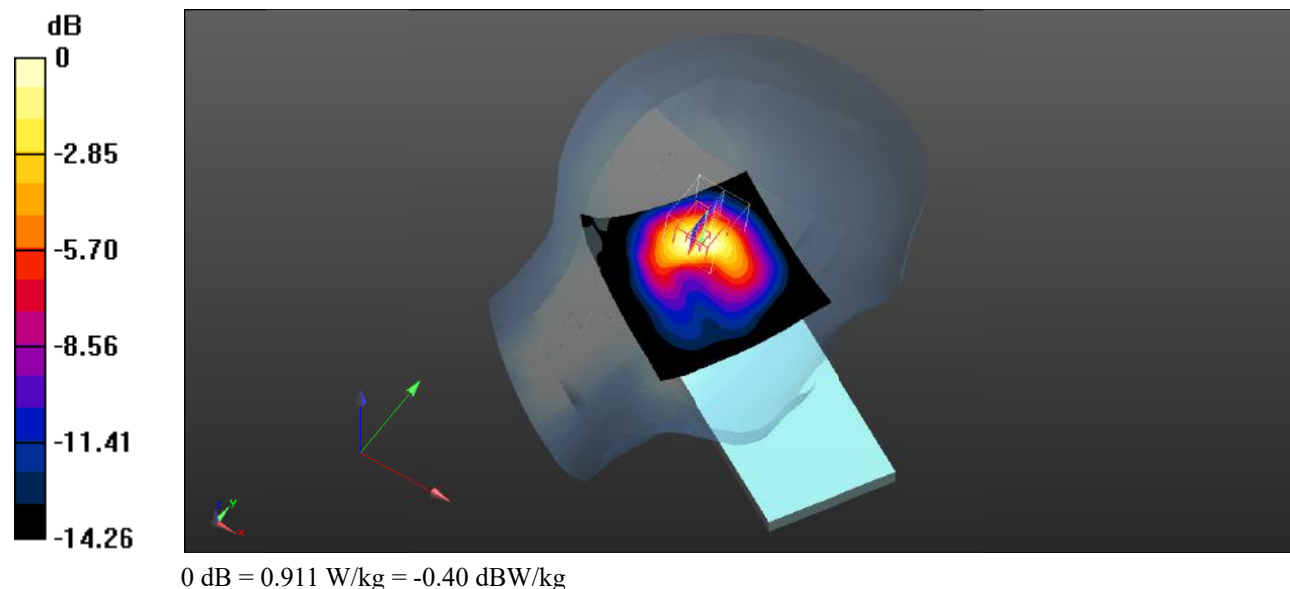



**Test Plot 73#: LTE Band 2\_Head Left Cheek\_100%RB\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.416 \text{ S/m}$ ;  $\epsilon_r = 40.737$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.965 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $15.56 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
Peak SAR (extrapolated) =  $1.46 \text{ W/kg}$   
**SAR(1 g) =  $0.828 \text{ W/kg}$ ; SAR(10 g) =  $0.434 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.893 \text{ W/kg}$

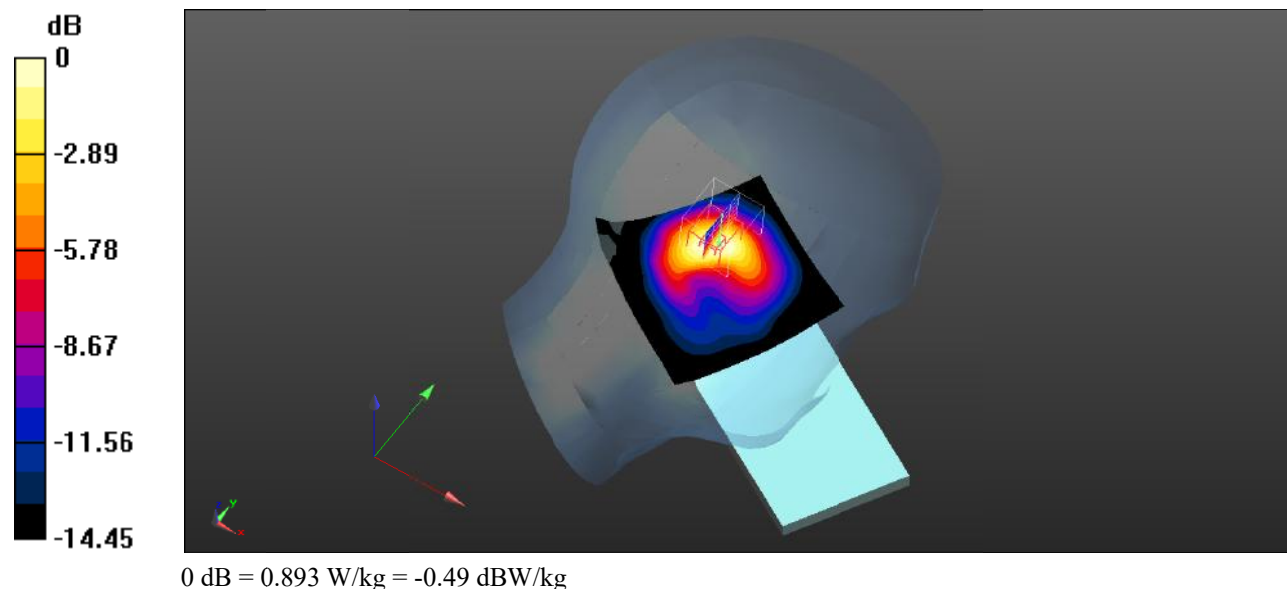

**Test Plot 74#: LTE Band 2\_Head Left Cheek\_100%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.432$  S/m;  $\epsilon_r = 40.836$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.907 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.26 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.38 W/kg

**SAR(1 g) = 0.783 W/kg; SAR(10 g) = 0.412 W/kg**

Maximum value of SAR (measured) = 0.843 W/kg

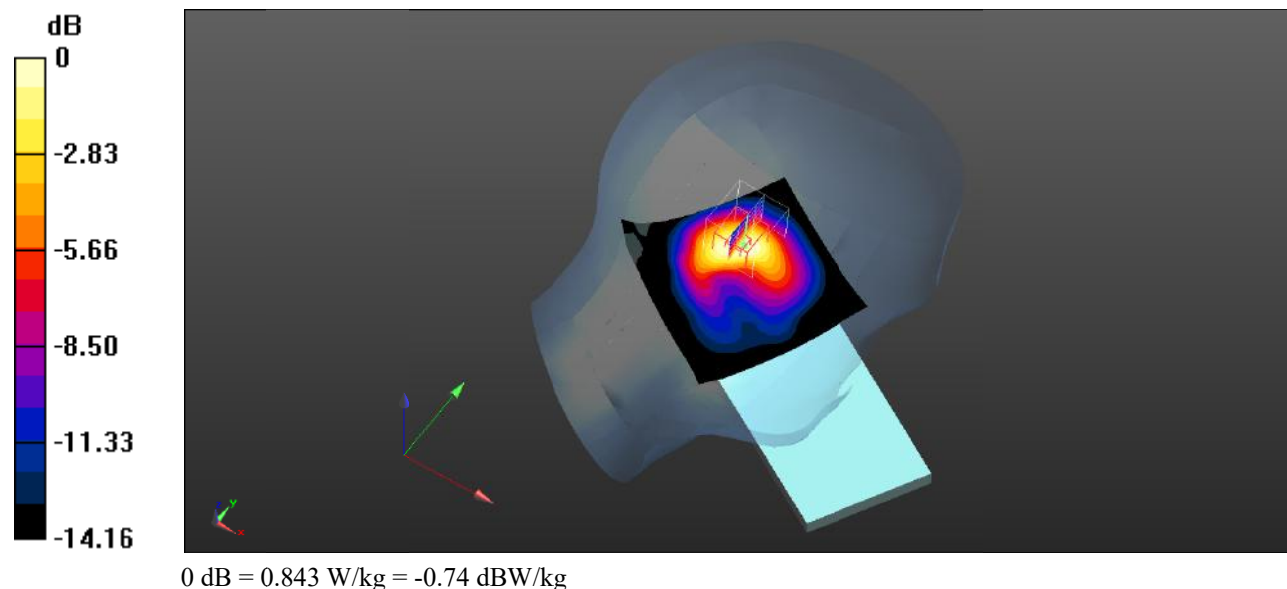

**Test Plot 75#: LTE Band 2\_Head Left Cheek\_100%RB\_High****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 40.829$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.914 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.16 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.40 W/kg

**SAR(1 g) = 0.800 W/kg; SAR(10 g) = 0.421 W/kg**

Maximum value of SAR (measured) = 0.859 W/kg

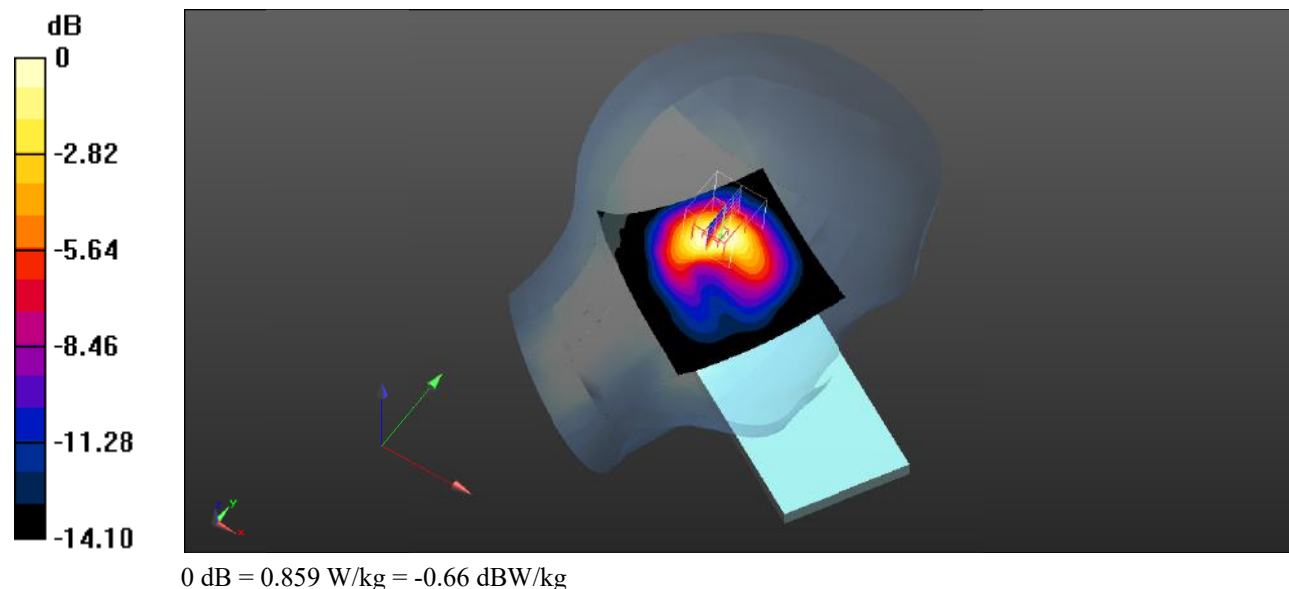

**Test Plot 76#: LTE Band 2\_Head Left Tilt\_1RB\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.416 \text{ S/m}$ ;  $\epsilon_r = 40.737$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.37 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 22.01 V/m; Power Drift = -0.03 dB  
 Peak SAR (extrapolated) = 1.93 W/kg  
**SAR(1 g) = 1.12 W/kg; SAR(10 g) = 0.582 W/kg**  
 Maximum value of SAR (measured) = 1.27 W/kg

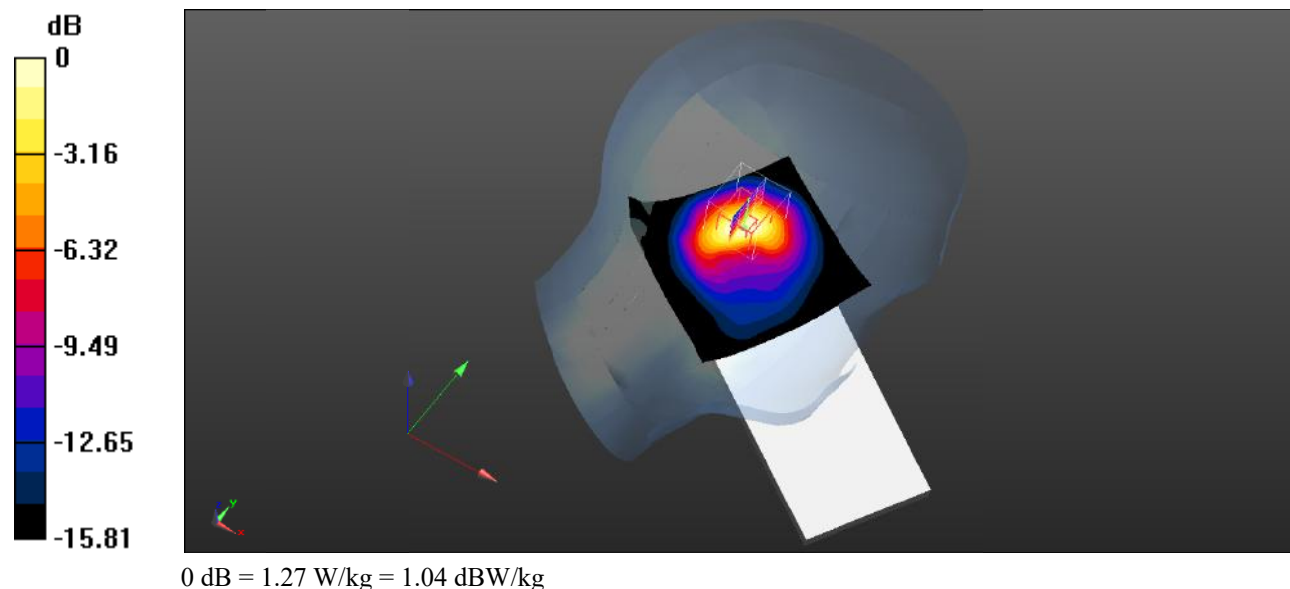

**Test Plot 77#: LTE Band 2\_Head Left Tilt\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 1.31 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 21.82 V/m; Power Drift = -0.05 dB  
Peak SAR (extrapolated) = 1.96 W/kg  
**SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.576 W/kg**  
Maximum value of SAR (measured) = 1.24 W/kg

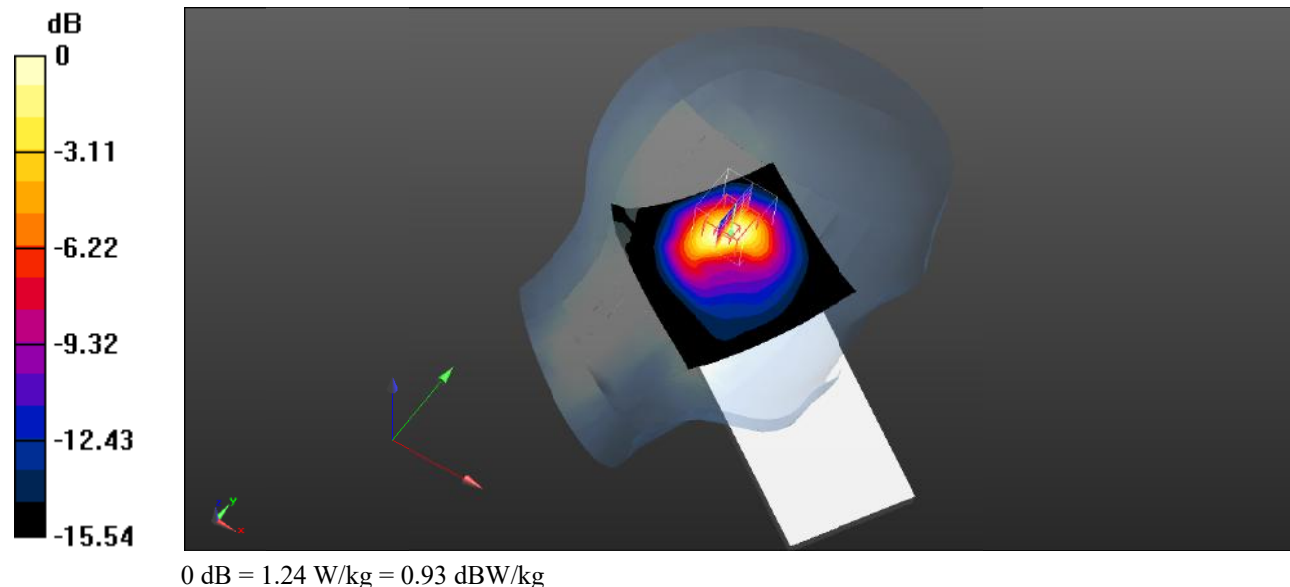

**Test Plot 78#: LTE Band 2\_Head Left Tilt\_1RB\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.418 \text{ S/m}$ ;  $\epsilon_r = 40.829$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.30 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 21.68 V/m; Power Drift = -0.11 dB  
 Peak SAR (extrapolated) = 1.91 W/kg  
**SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.567 W/kg**  
 Maximum value of SAR (measured) = 1.23 W/kg

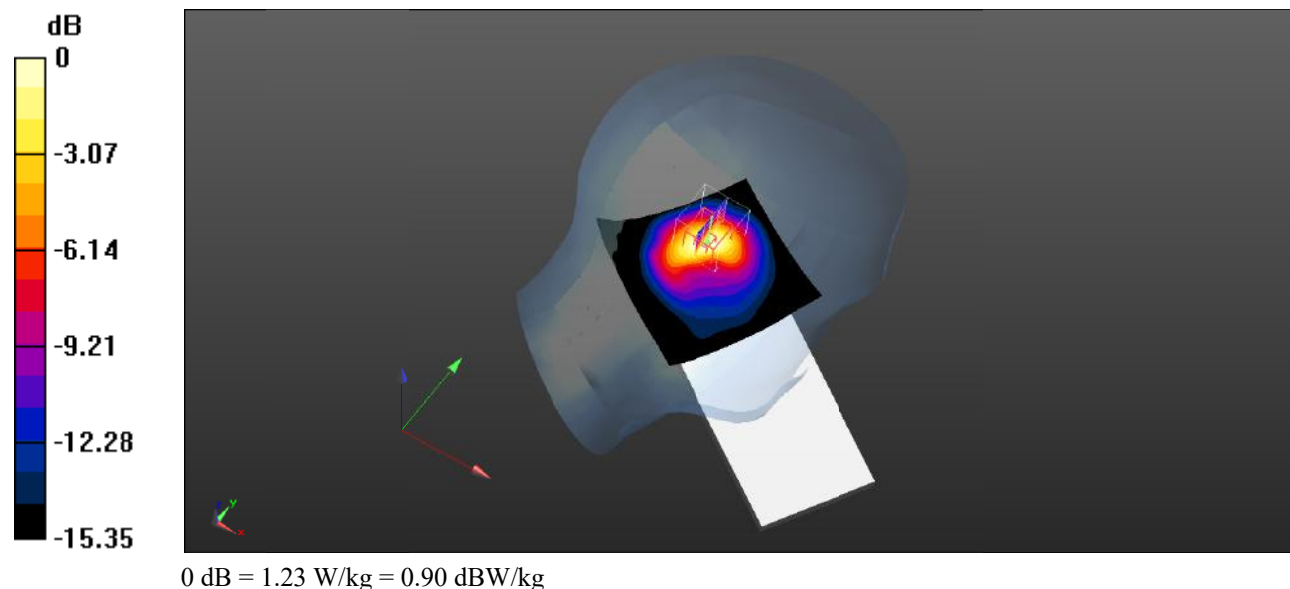

**Test Plot 79#: LTE Band 2\_Head Left Tilt\_50%RB\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1860 \text{ MHz}$ ;  $\sigma = 1.416 \text{ S/m}$ ;  $\epsilon_r = 40.737$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.20 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 20.57 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 1.70 W/kg  
**SAR(1 g) = 0.975 W/kg; SAR(10 g) = 0.505 W/kg**  
 Maximum value of SAR (measured) = 1.06 W/kg

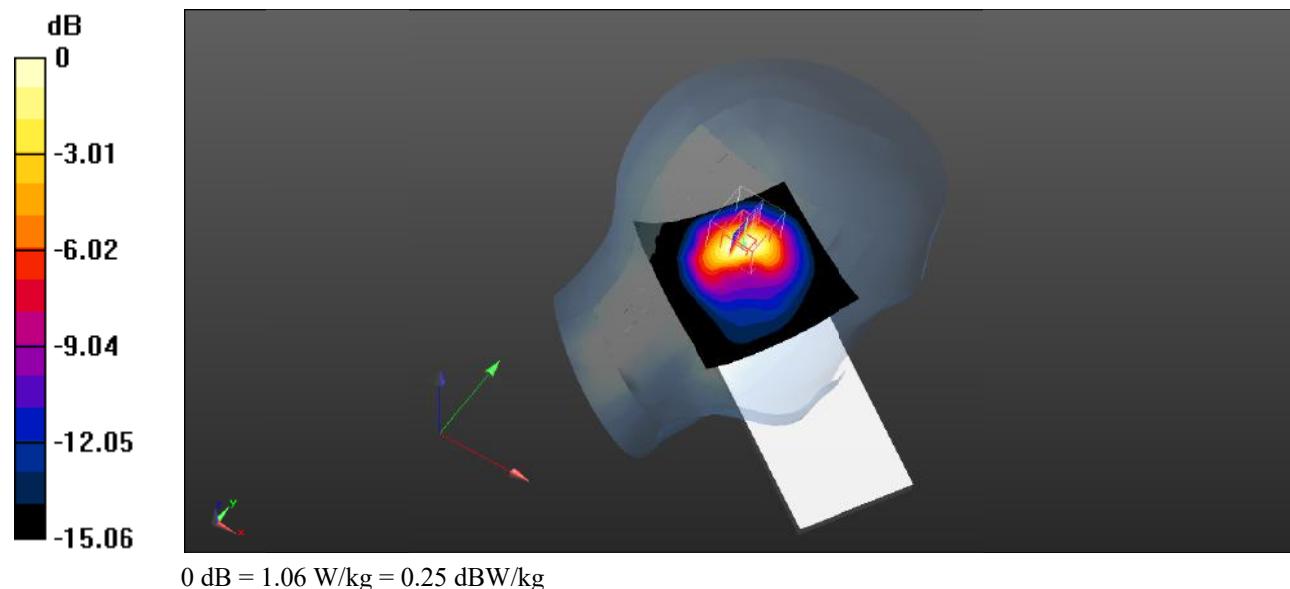

**Test Plot 80#: LTE Band 2\_Head Left Tilt\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Left Section


DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 1.12 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 19.97 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 1.57 W/kg

**SAR(1 g) = 0.906 W/kg; SAR(10 g) = 0.471 W/kg**  
Maximum value of SAR (measured) = 0.985 W/kg

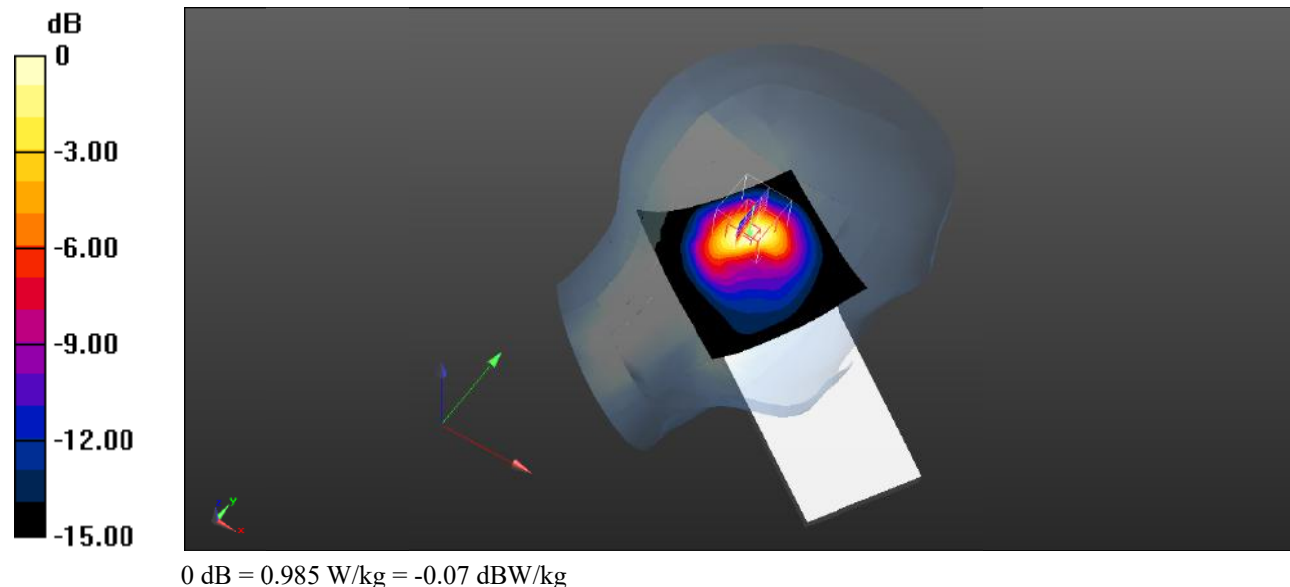



**Test Plot 81#: LTE Band 2\_Head Left Tilt\_50%RB\_High****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 40.829$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.16 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.69 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.72 W/kg

**SAR(1 g) = 0.979 W/kg; SAR(10 g) = 0.506 W/kg**

Maximum value of SAR (measured) = 1.05 W/kg

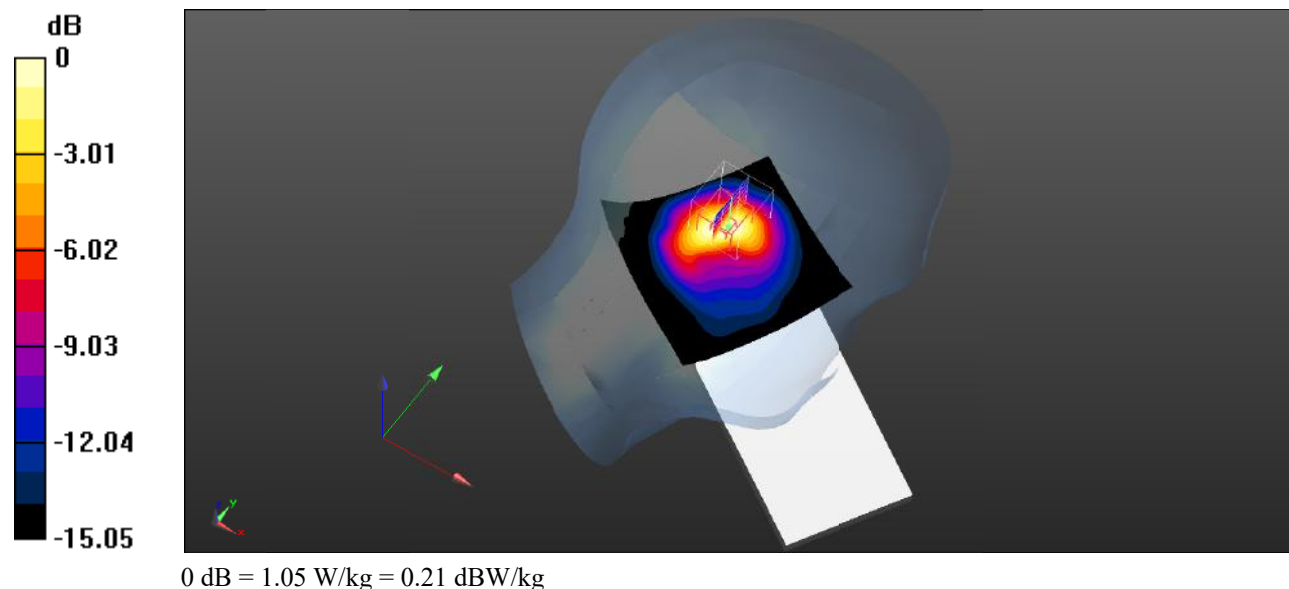

**Test Plot 82#: LTE Band 2\_Head Left Tilt\_100%RB\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.737$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.12 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.47 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.64 W/kg

**SAR(1 g) = 0.928 W/kg; SAR(10 g) = 0.481 W/kg**

Maximum value of SAR (measured) = 1.02 W/kg

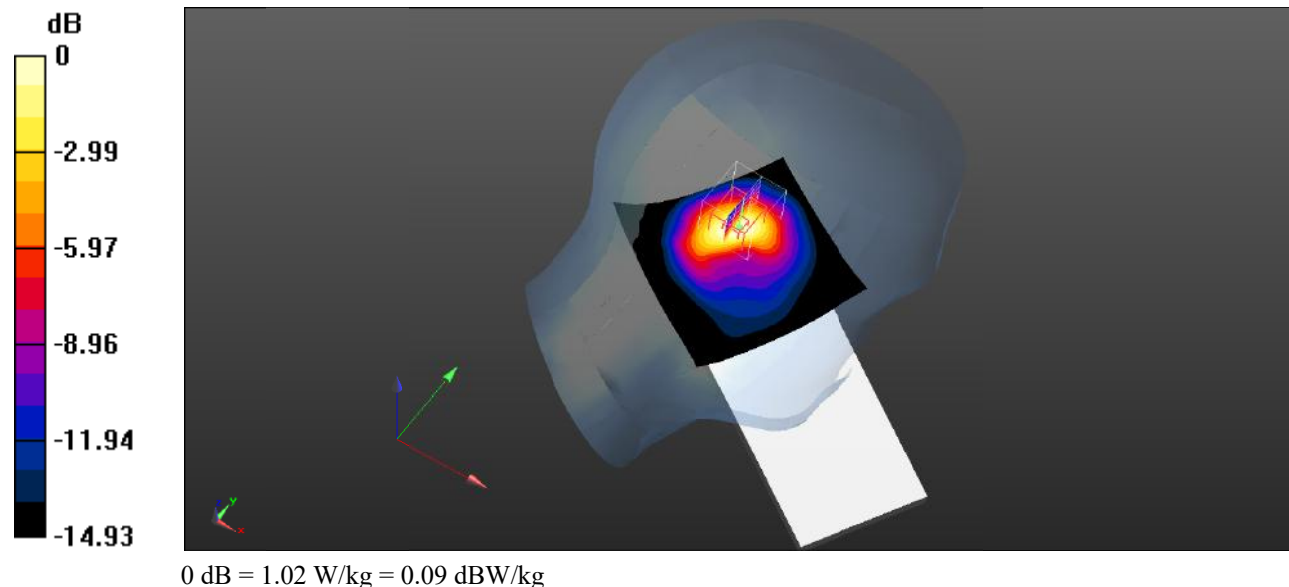

**Test Plot 83#: LTE Band 2\_Head Left Tilt\_100%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.432$  S/m;  $\epsilon_r = 40.836$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.14 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.15 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 1.61 W/kg

**SAR(1 g) = 0.928 W/kg; SAR(10 g) = 0.480 W/kg**

Maximum value of SAR (measured) = 1.06 W/kg

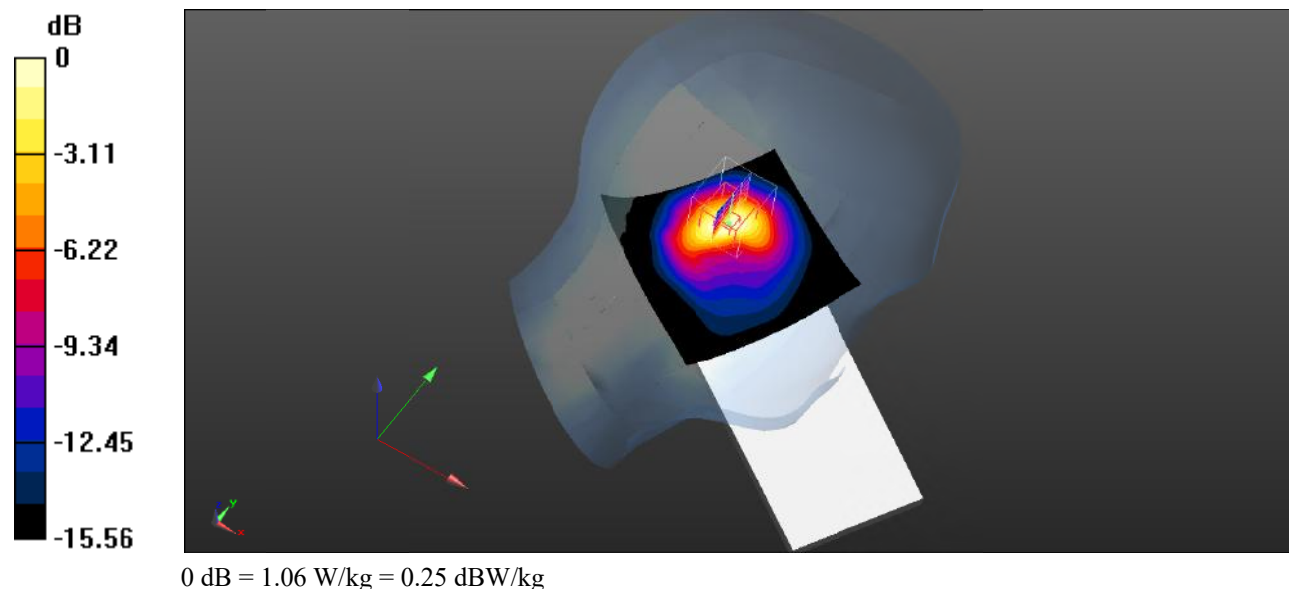

**Test Plot 84#: LTE Band 2\_Head Left Tilt\_100%RB\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 40.829$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 1.17 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 20.30 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 1.66 W/kg  
**SAR(1 g) = 0.951 W/kg; SAR(10 g) = 0.492 W/kg**  
 Maximum value of SAR (measured) = 1.08 W/kg

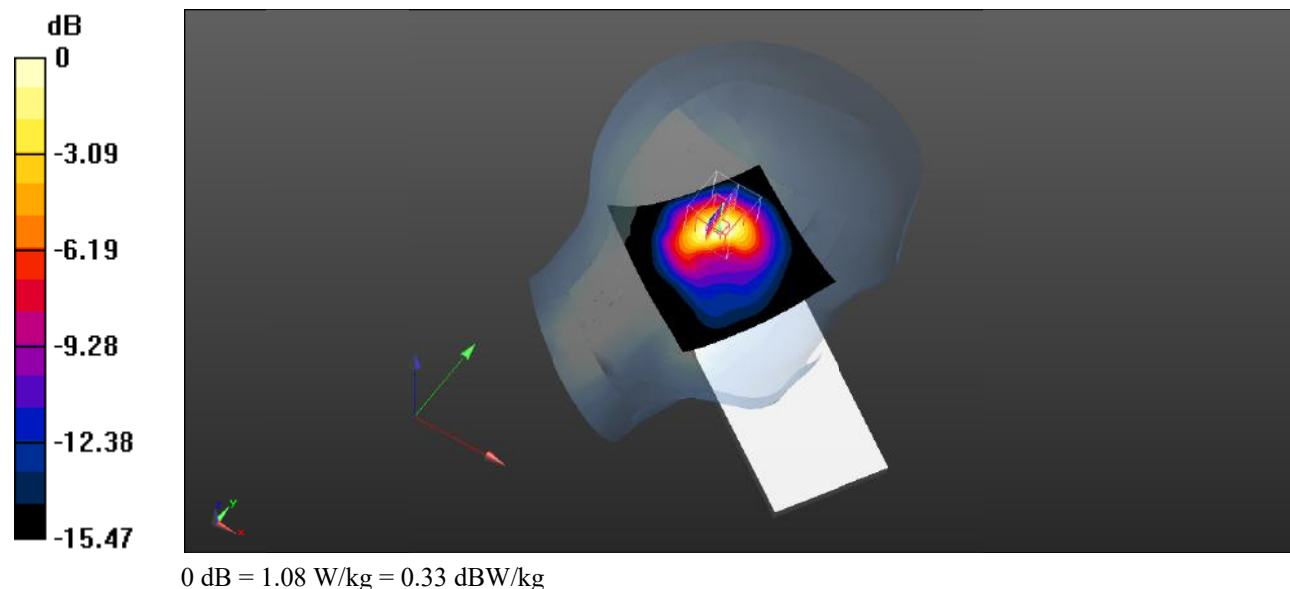

**Test Plot 85#: LTE Band 2\_Head Right Cheek\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.902 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $20.98 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$

Peak SAR (extrapolated) =  $1.25 \text{ W/kg}$

**SAR(1 g) =  $0.742 \text{ W/kg}$ ; SAR(10 g) =  $0.403 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.840 \text{ W/kg}$

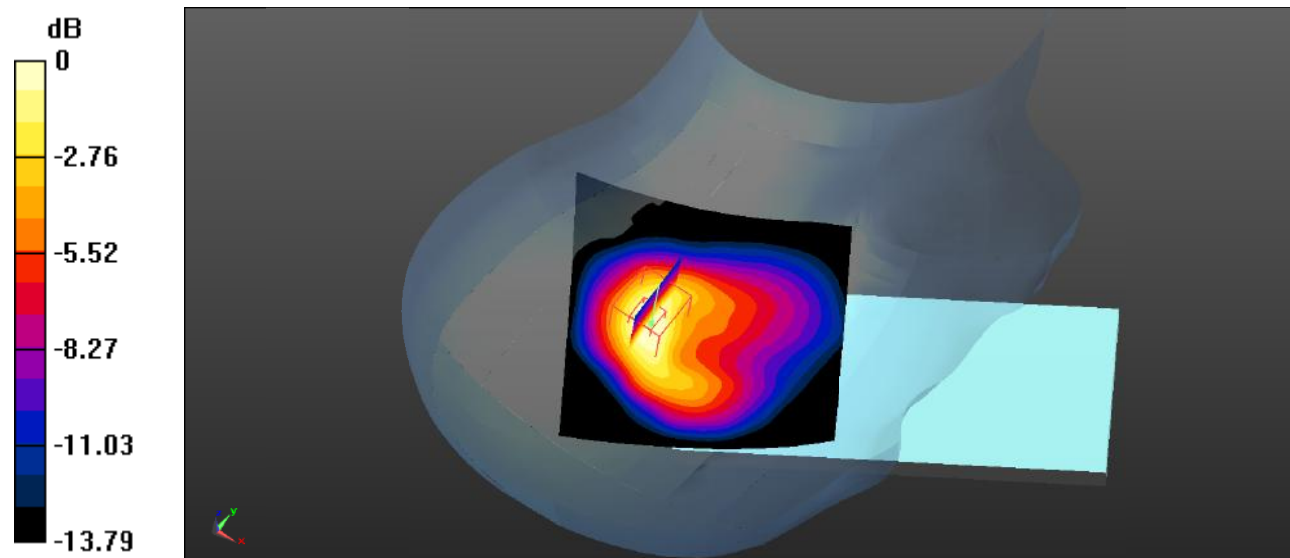

0 dB =  $0.840 \text{ W/kg}$  =  $-0.76 \text{ dBW/kg}$

**Test Plot 86#: LTE Band 2\_Head Right Cheek\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.432$  S/m;  $\epsilon_r = 40.836$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.742 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 19.18 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 1.02 W/kg  
**SAR(1 g) = 0.604 W/kg; SAR(10 g) = 0.328 W/kg**  
Maximum value of SAR (measured) = 0.685 W/kg

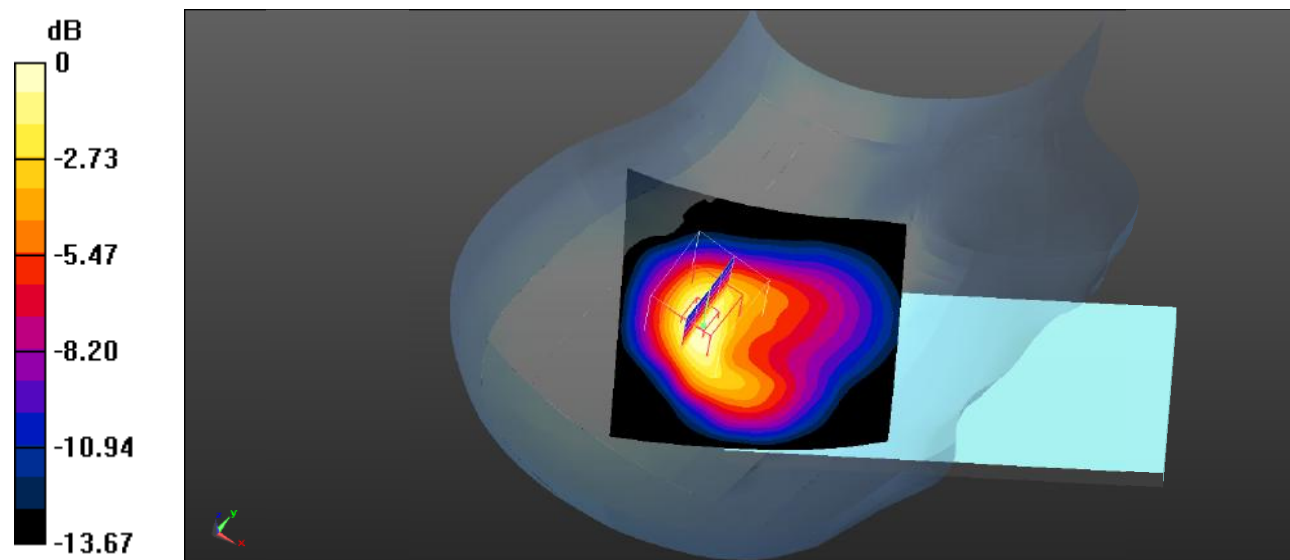

0 dB = 0.685 W/kg = -1.64 dBW/kg

**Test Plot 87#: LTE Band 2\_Head Right Tilt\_1RB\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1860 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1860$  MHz;  $\sigma = 1.416$  S/m;  $\epsilon_r = 40.737$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.06 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.09 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.46 W/kg

**SAR(1 g) = 0.880 W/kg; SAR(10 g) = 0.477 W/kg**

Maximum value of SAR (measured) = 1.00 W/kg

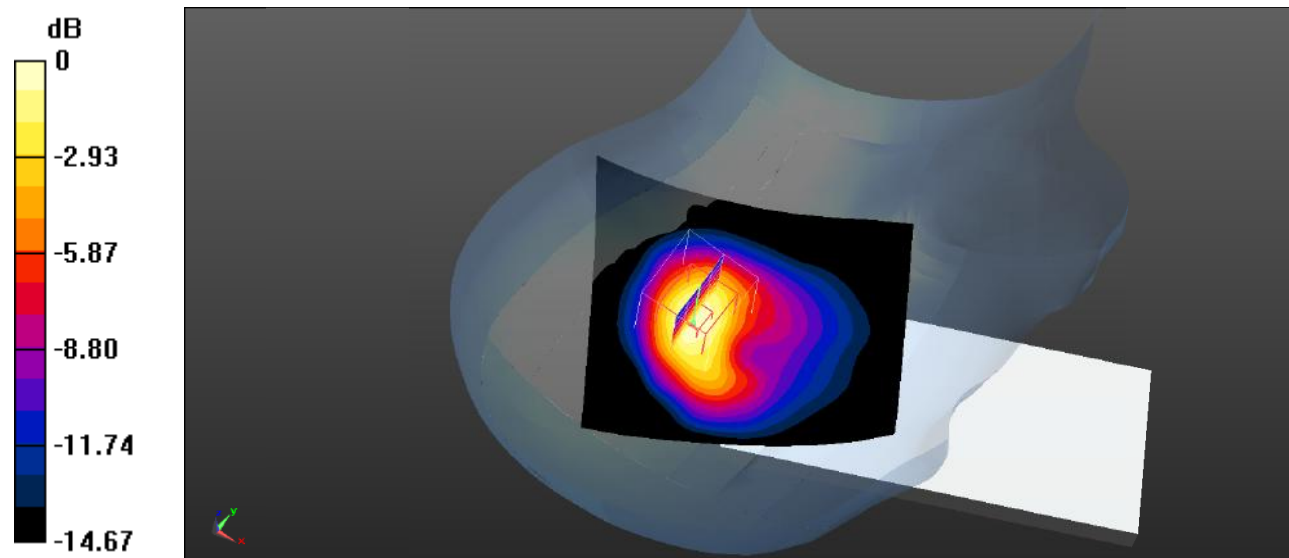

**Test Plot 88#: LTE Band 2\_Head Right Tilt\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.03 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 22.93 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 1.66 W/kg  
**SAR(1 g) = 0.922 W/kg; SAR(10 g) = 0.490 W/kg**  
 Maximum value of SAR (measured) = 1.05 W/kg

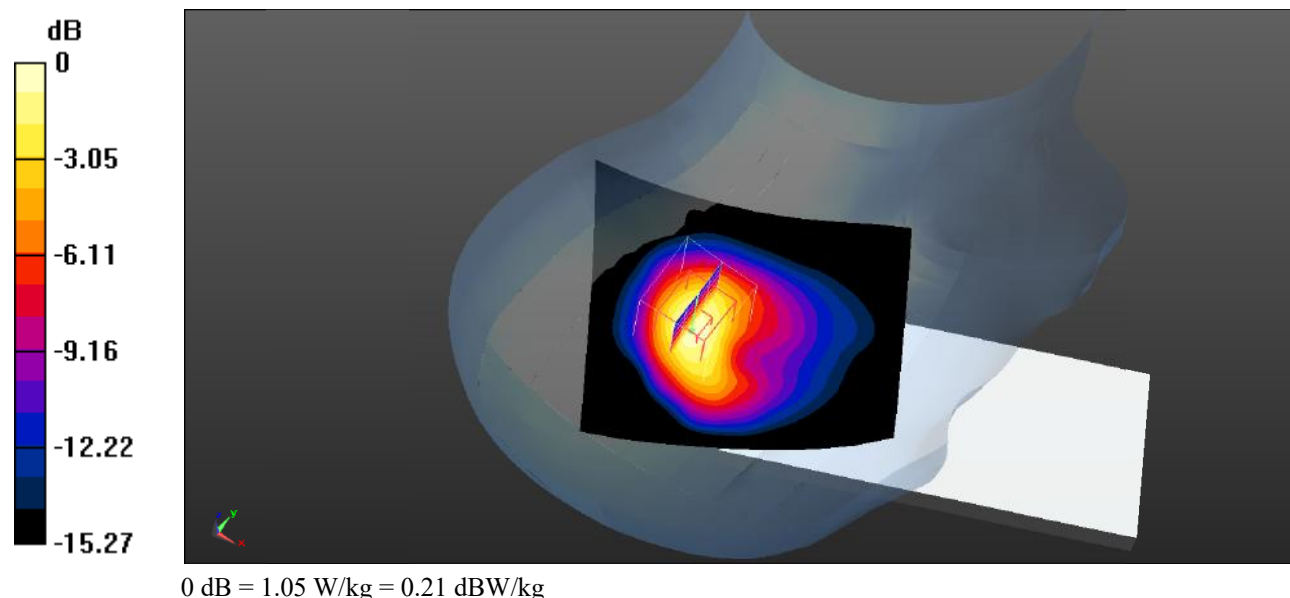



**Test Plot 89#: LTE Band 2\_Head Right Tilt\_1RB\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1900 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.418$  S/m;  $\epsilon_r = 40.829$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 1.01 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 21.71 V/m; Power Drift = -0.18 dB  
Peak SAR (extrapolated) = 1.42 W/kg  
**SAR(1 g) = 0.853 W/kg; SAR(10 g) = 0.462 W/kg**  
Maximum value of SAR (measured) = 0.977 W/kg

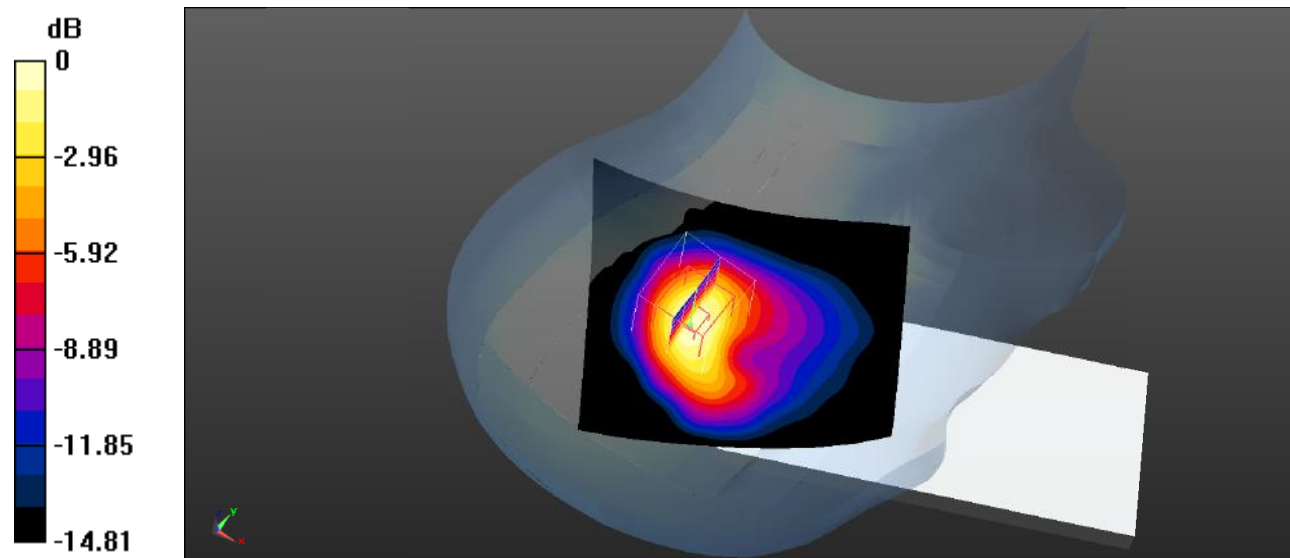

0 dB = 0.977 W/kg = -0.10 dBW/kg

**Test Plot 90#: LTE Band 2\_Head Right Tilt\_50%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.432$  S/m;  $\epsilon_r = 40.836$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.857 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.08 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.726 W/kg; SAR(10 g) = 0.393 W/kg**

Maximum value of SAR (measured) = 0.816 W/kg

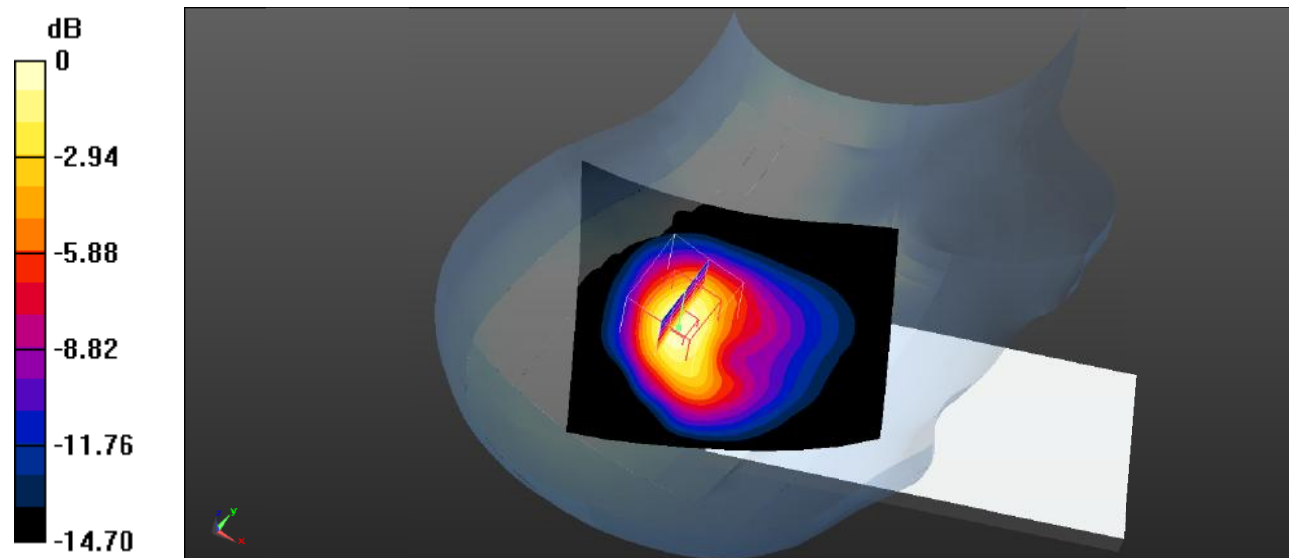

0 dB = 0.816 W/kg = -0.88 dBW/kg

**Test Plot 91#: LTE Band 2\_Head Right Tilt\_100%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.432$  S/m;  $\epsilon_r = 40.836$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.849 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.84 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.21 W/kg

**SAR(1 g) = 0.716 W/kg; SAR(10 g) = 0.387 W/kg**

Maximum value of SAR (measured) = 0.820 W/kg

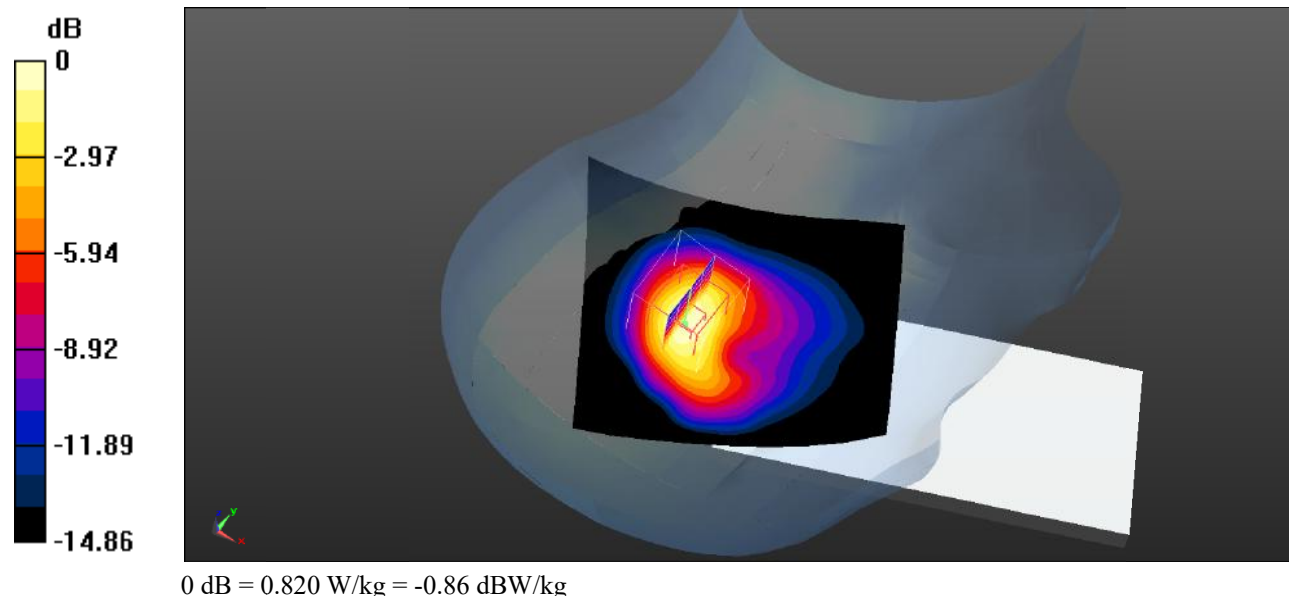

**Test Plot 92#: LTE Band 2\_Body Front\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) = 0.352 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value = 8.441 V/m; Power Drift = -0.08 dB  
Peak SAR (extrapolated) = 0.500 W/kg  
**SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.192 W/kg**  
Maximum value of SAR (measured) = 0.352 W/kg

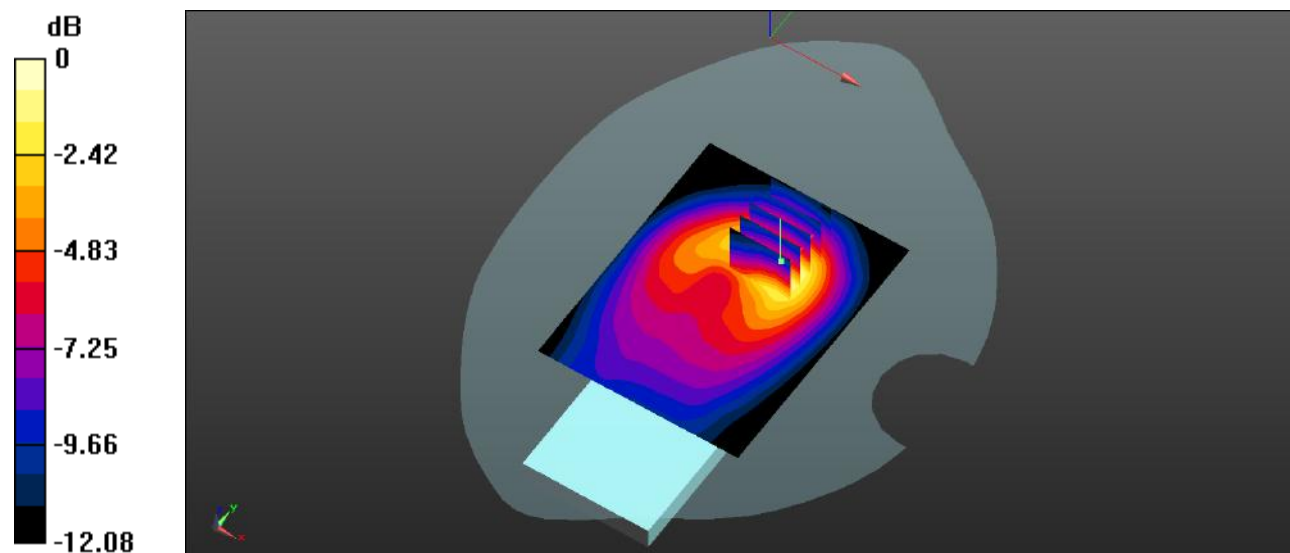

0 dB = 0.352 W/kg = -4.53 dBW/kg

**Test Plot 93#: LTE Band 2\_Body Front\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.290 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.525 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.414 \text{ W/kg}$   
**SAR(1 g) =  $0.263 \text{ W/kg}$ ; SAR(10 g) =  $0.156 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.290 \text{ W/kg}$

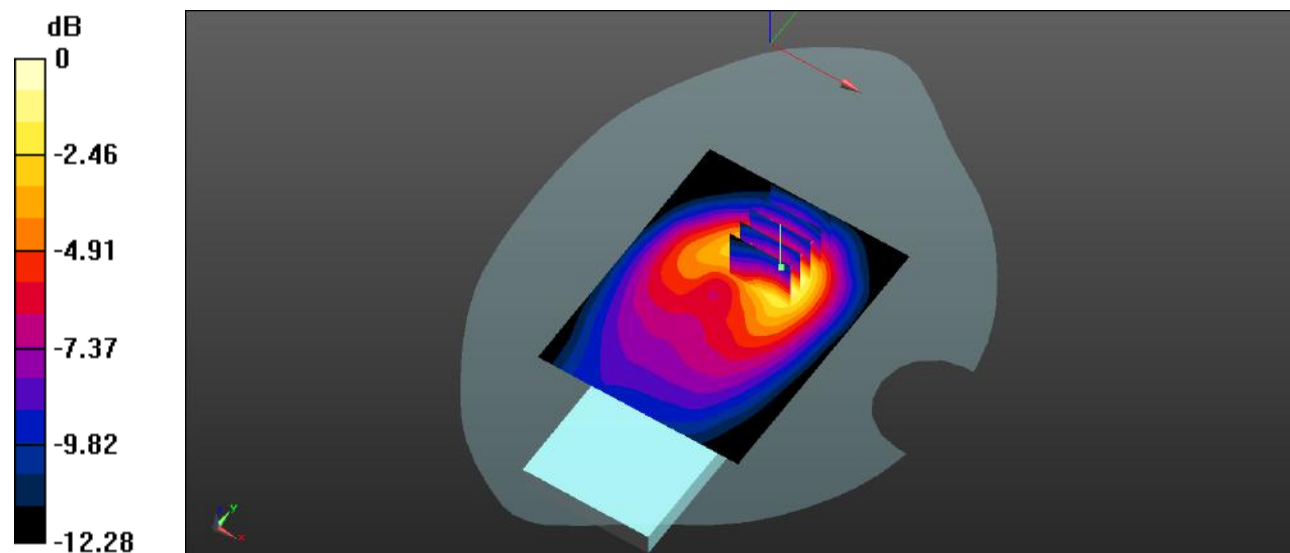

0 dB =  $0.290 \text{ W/kg}$  =  $-5.38 \text{ dBW/kg}$

**Test Plot 94#: LTE Band 2\_Body Back\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.430 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.654 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.575 \text{ W/kg}$   
**SAR(1 g) =  $0.376 \text{ W/kg}$ ; SAR(10 g) =  $0.223 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.411 \text{ W/kg}$

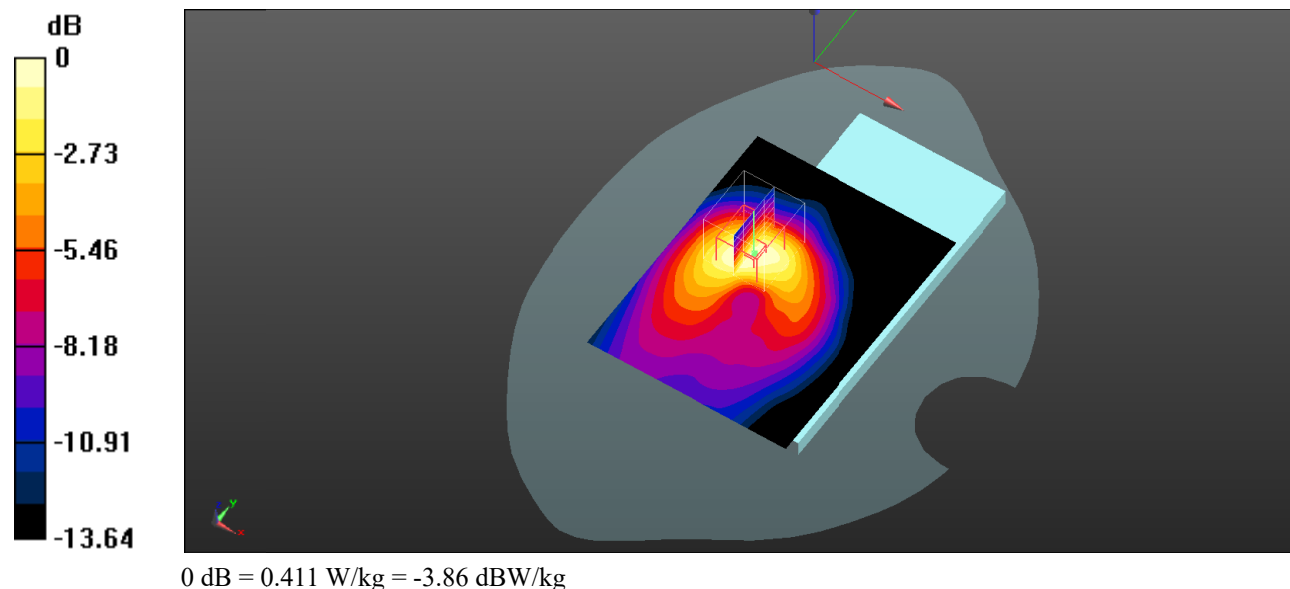

**Test Plot 95#: LTE Band 2\_Body Back\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.334 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $6.954 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$

Peak SAR (extrapolated) =  $0.438 \text{ W/kg}$

**SAR(1 g) =  $0.296 \text{ W/kg}$ ; SAR(10 g) =  $0.177 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.320 \text{ W/kg}$

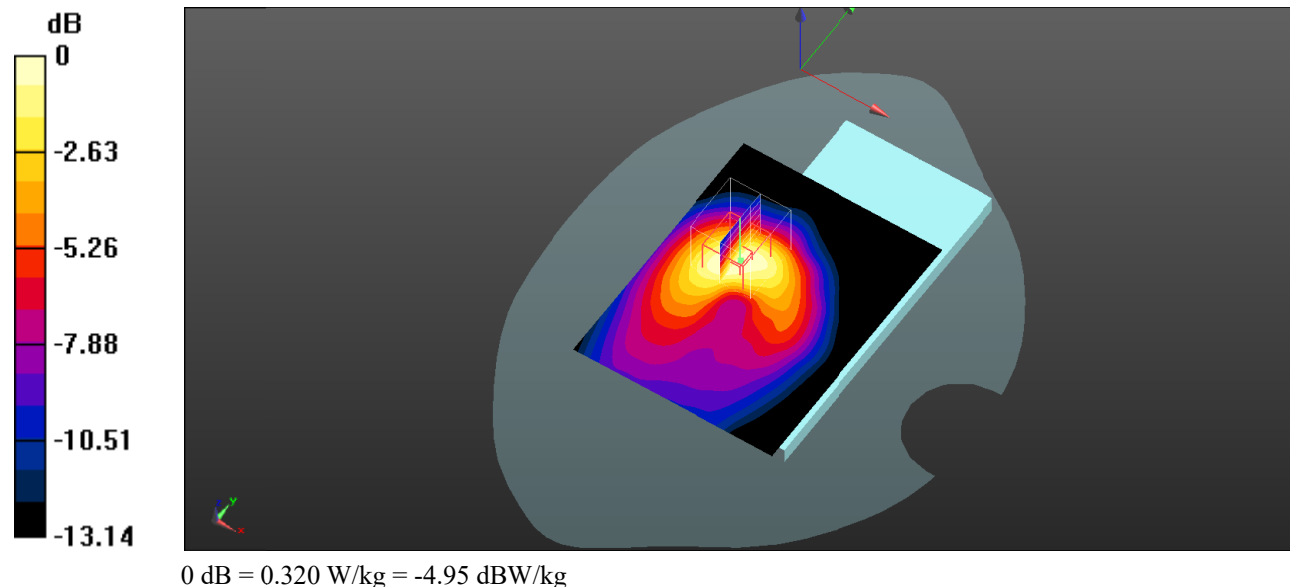

**Test Plot 96#: LTE Band 2\_Body Right\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.0536 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $5.046 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
Peak SAR (extrapolated) =  $0.0650 \text{ W/kg}$   
**SAR(1 g) =  $0.047 \text{ W/kg}$ ; SAR(10 g) =  $0.032 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.0505 \text{ W/kg}$

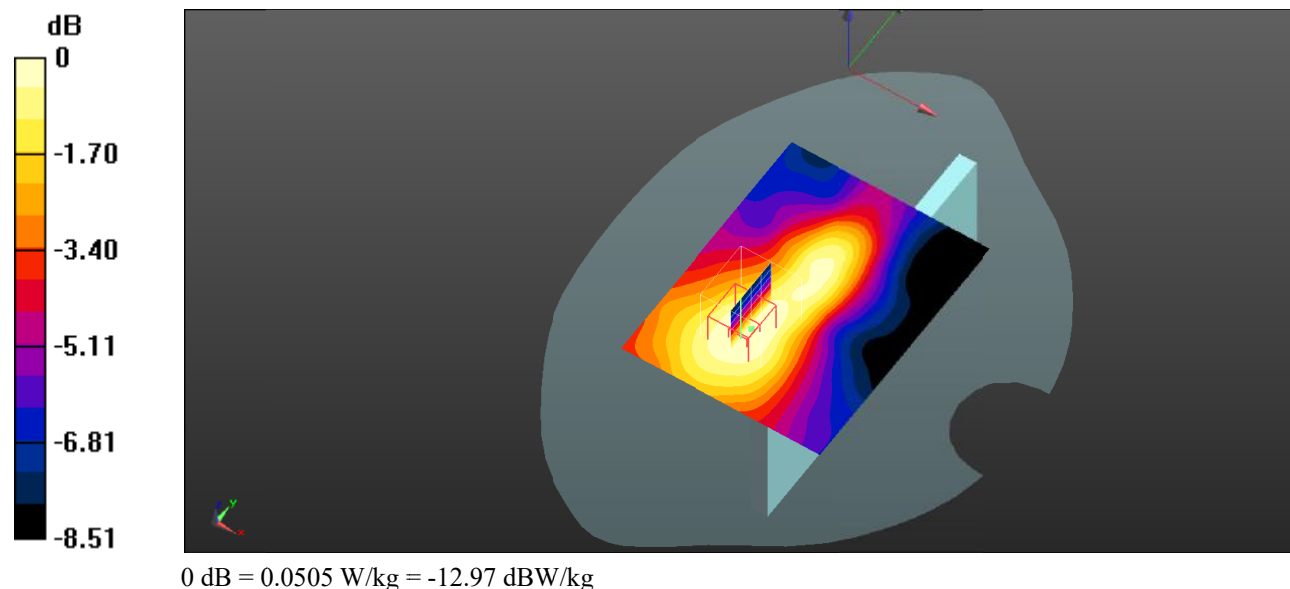



**Test Plot 97#: LTE Band 2\_Body Right\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0440 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.558 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0530 \text{ W/kg}$   
**SAR(1 g) =  $0.038 \text{ W/kg}$ ; SAR(10 g) =  $0.026 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0414 \text{ W/kg}$

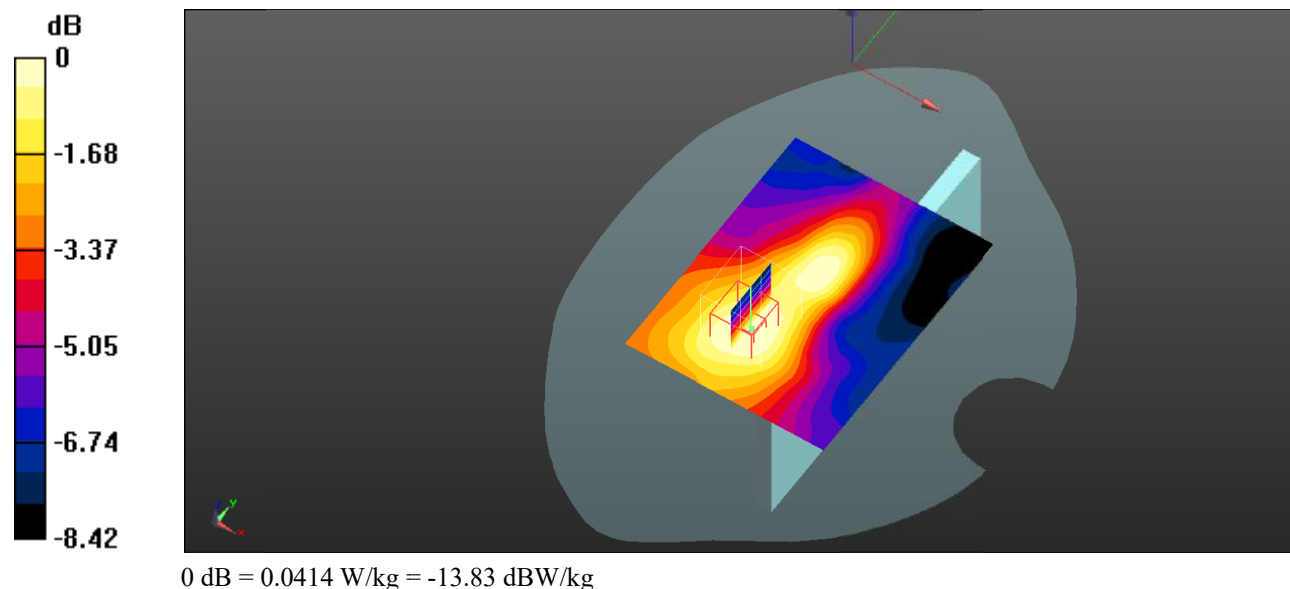

**Test Plot 98#: LTE Band 2\_Body Top\_1RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1880$  MHz;  $\sigma = 1.432$  S/m;  $\epsilon_r = 40.836$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.539 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.69 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.702 W/kg

**SAR(1 g) = 0.452 W/kg; SAR(10 g) = 0.258 W/kg**

Maximum value of SAR (measured) = 0.505 W/kg

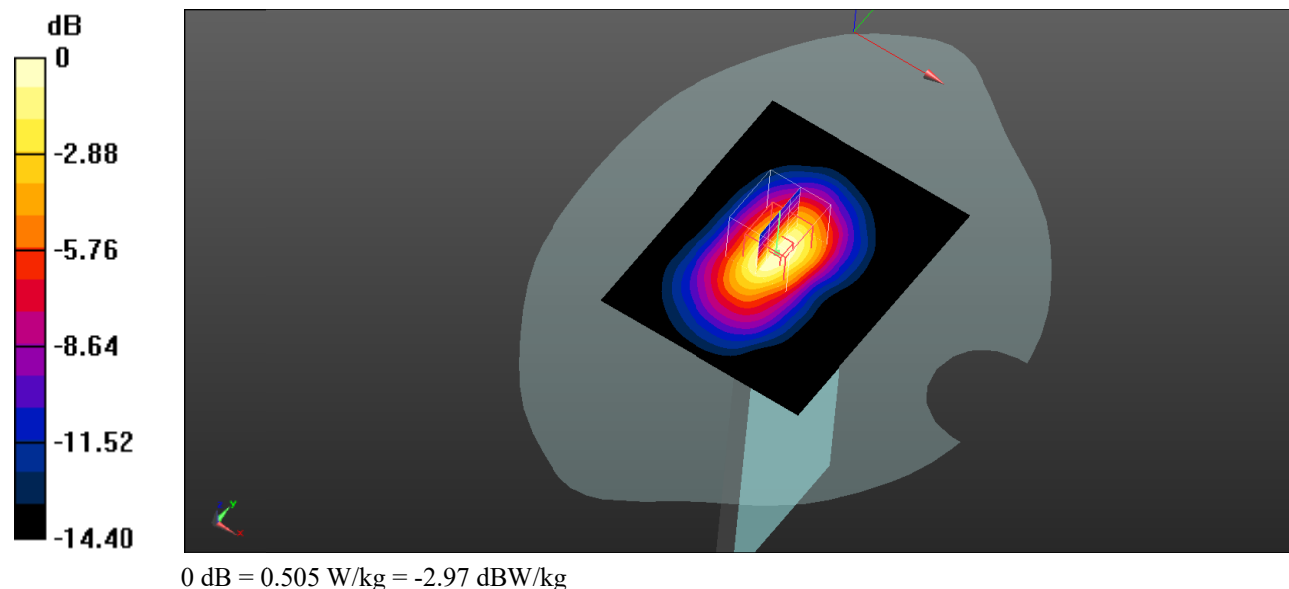

**Test Plot 99#: LTE Band 2\_Body Top\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.432 \text{ S/m}$ ;  $\epsilon_r = 40.836$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.07, 7.07, 7.07); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.440 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $13.98 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.572 \text{ W/kg}$   
**SAR(1 g) =  $0.370 \text{ W/kg}$ ; SAR(10 g) =  $0.211 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.412 \text{ W/kg}$

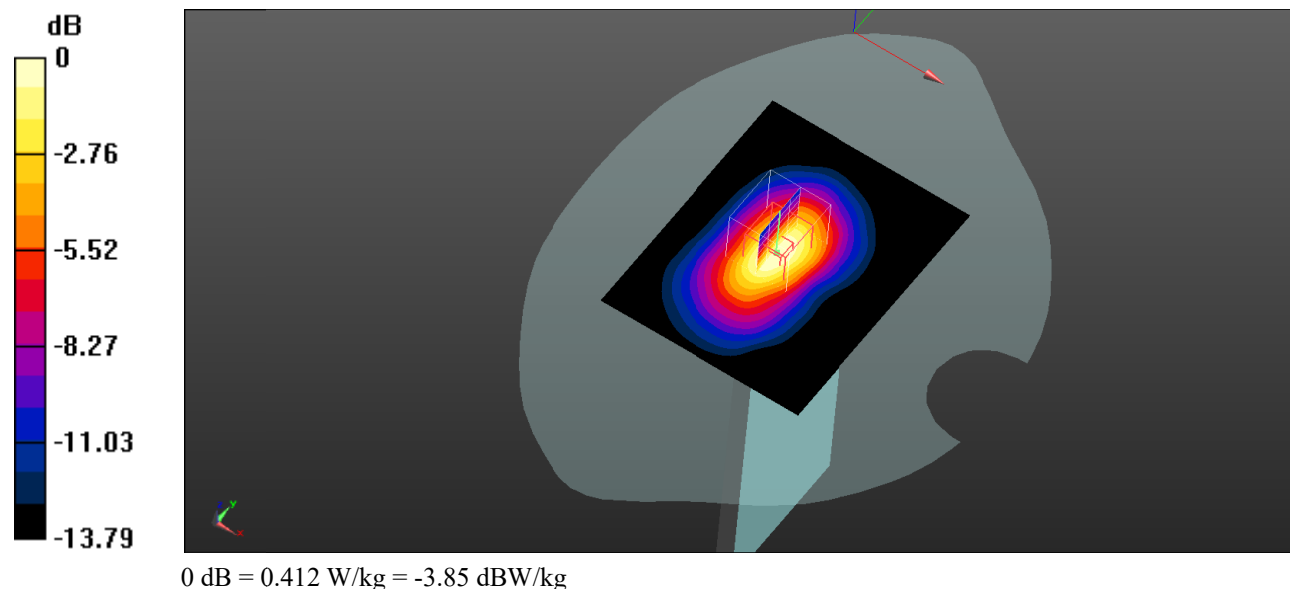

**Test Plot 100#: LTE Band 4\_Head Left Cheek\_1RB\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1720 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1720 \text{ MHz}$ ;  $\sigma = 1.362 \text{ S/m}$ ;  $\epsilon_r = 41.412$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.09 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 15.34 V/m; Power Drift = 0.10 dB  
 Peak SAR (extrapolated) = 1.58 W/kg  
**SAR(1 g) = 0.935 W/kg; SAR(10 g) = 0.492 W/kg**  
 Maximum value of SAR (measured) = 1.00 W/kg

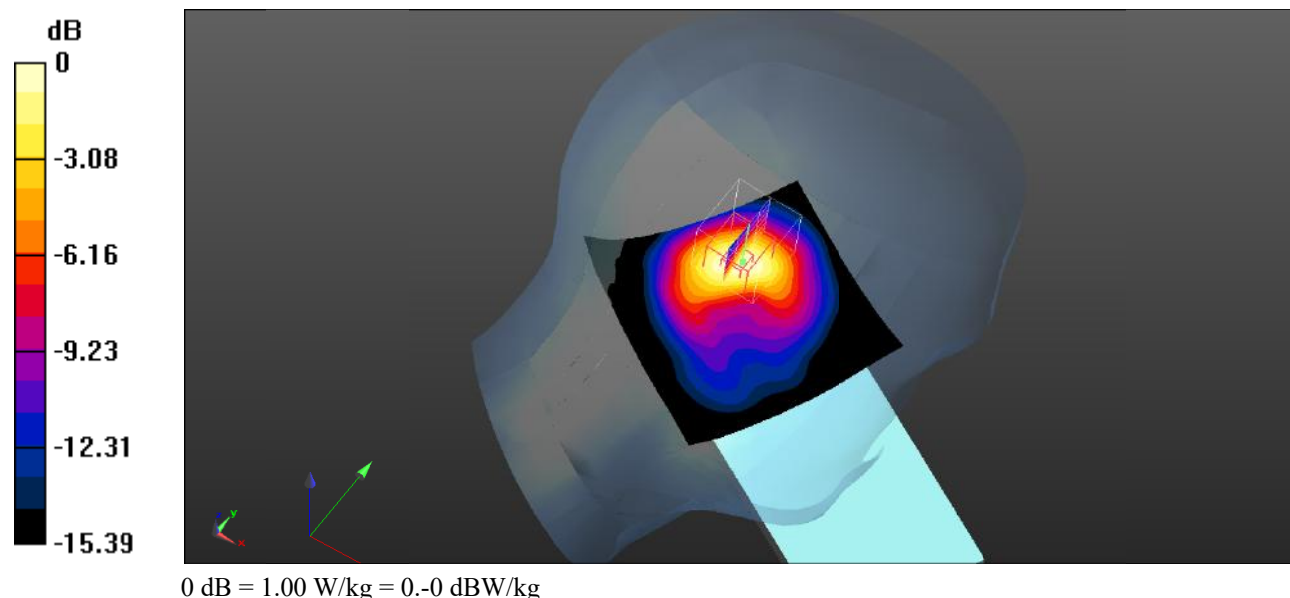

**Test Plot 101#: LTE Band 4\_Head Left Cheek\_1RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.974 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.83 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.53 W/kg

**SAR(1 g) = 0.891 W/kg; SAR(10 g) = 0.469 W/kg**

Maximum value of SAR (measured) = 0.947 W/kg

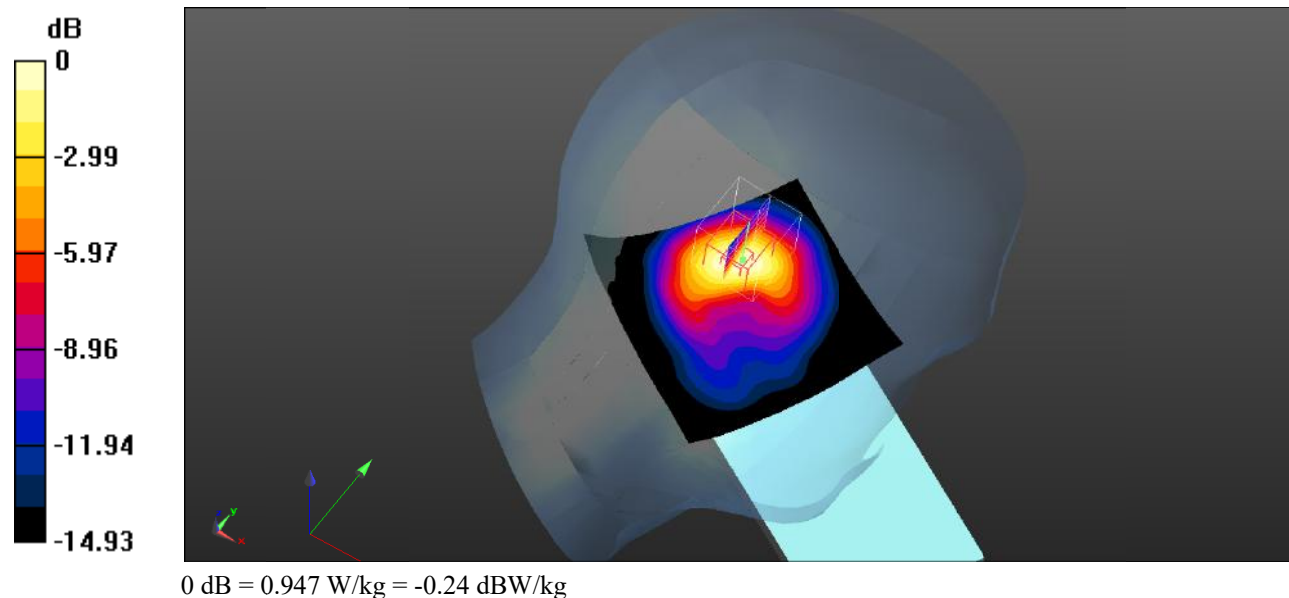

**Test Plot 102#: LTE Band 4\_Head Left Cheek\_1RB\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.389 \text{ S/m}$ ;  $\epsilon_r = 41.815$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.07 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 16.70 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.59 W/kg

**SAR(1 g) = 0.925 W/kg; SAR(10 g) = 0.486 W/kg**

Maximum value of SAR (measured) = 0.977 W/kg

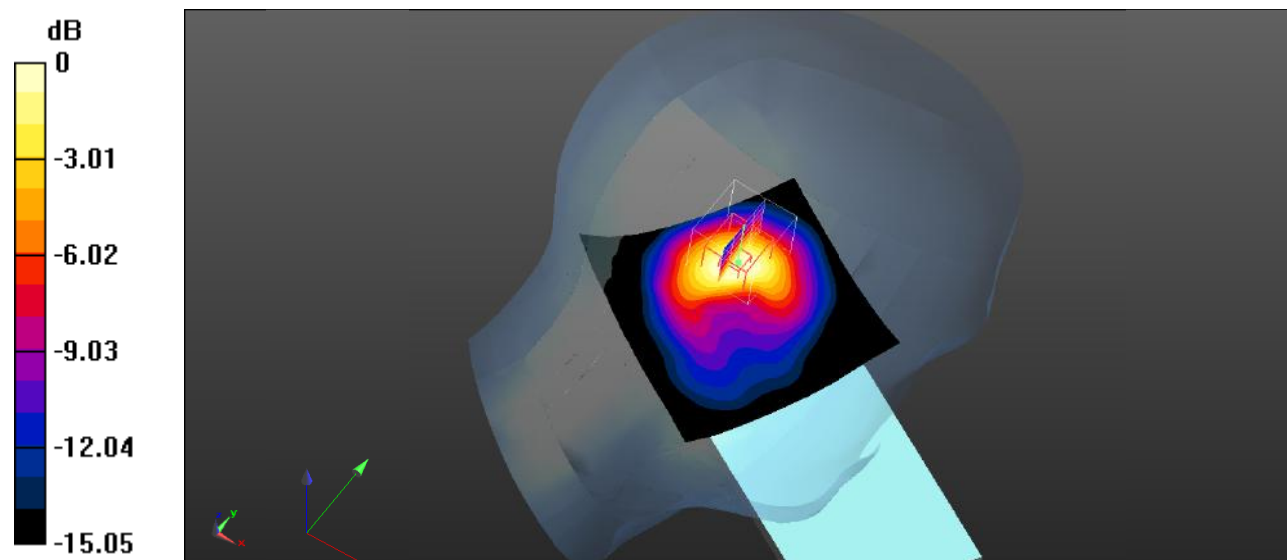

0 dB = 0.977 W/kg = -0.10 dBW/kg

**Test Plot 103#: LTE Band 4\_Head Left Cheek\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.829 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 12.62 V/m; Power Drift = -0.14 dB  
 Peak SAR (extrapolated) = 1.26 W/kg  
**SAR(1 g) = 0.737 W/kg; SAR(10 g) = 0.388 W/kg**  
 Maximum value of SAR (measured) = 0.784 W/kg

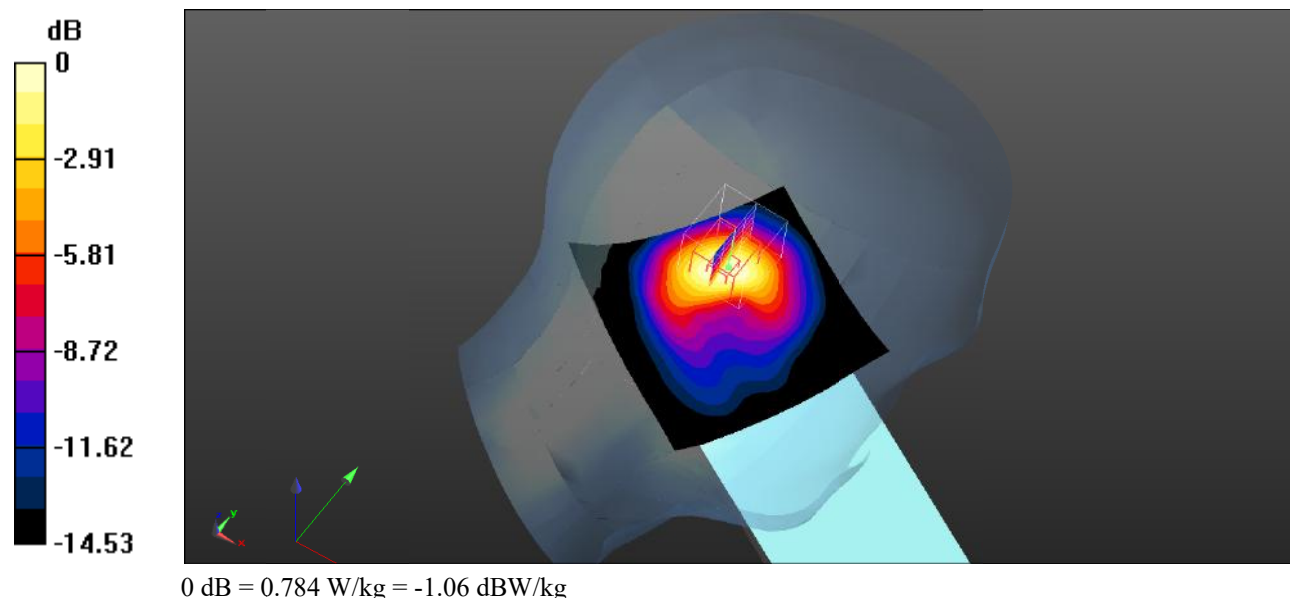

**Test Plot 104#: LTE Band 4\_Head Left Cheek\_100%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.824 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.64 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.25 W/kg

**SAR(1 g) = 0.738 W/kg; SAR(10 g) = 0.392 W/kg**

Maximum value of SAR (measured) = 0.775 W/kg

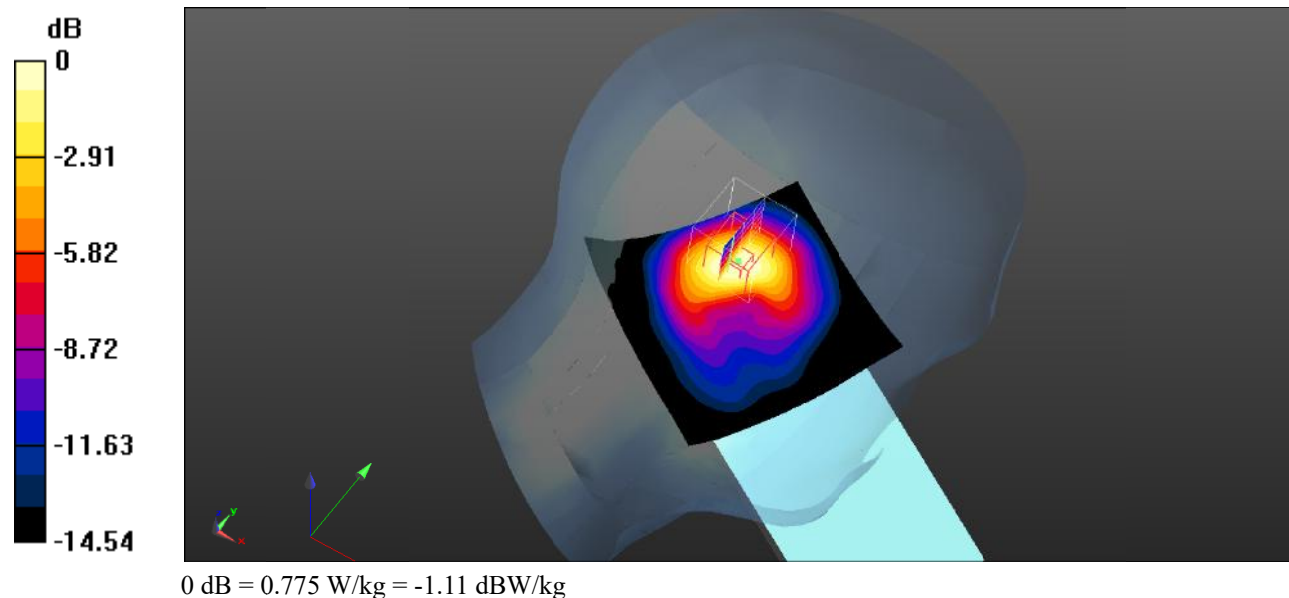



**Test Plot 105#: LTE Band 4\_Head Left Tilt\_1RB\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1720 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1720 \text{ MHz}$ ;  $\sigma = 1.362 \text{ S/m}$ ;  $\epsilon_r = 41.412$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.21 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 19.91 V/m; Power Drift = -0.09 dB  
 Peak SAR (extrapolated) = 1.72 W/kg  
**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.532 W/kg**  
 Maximum value of SAR (measured) = 1.07 W/kg

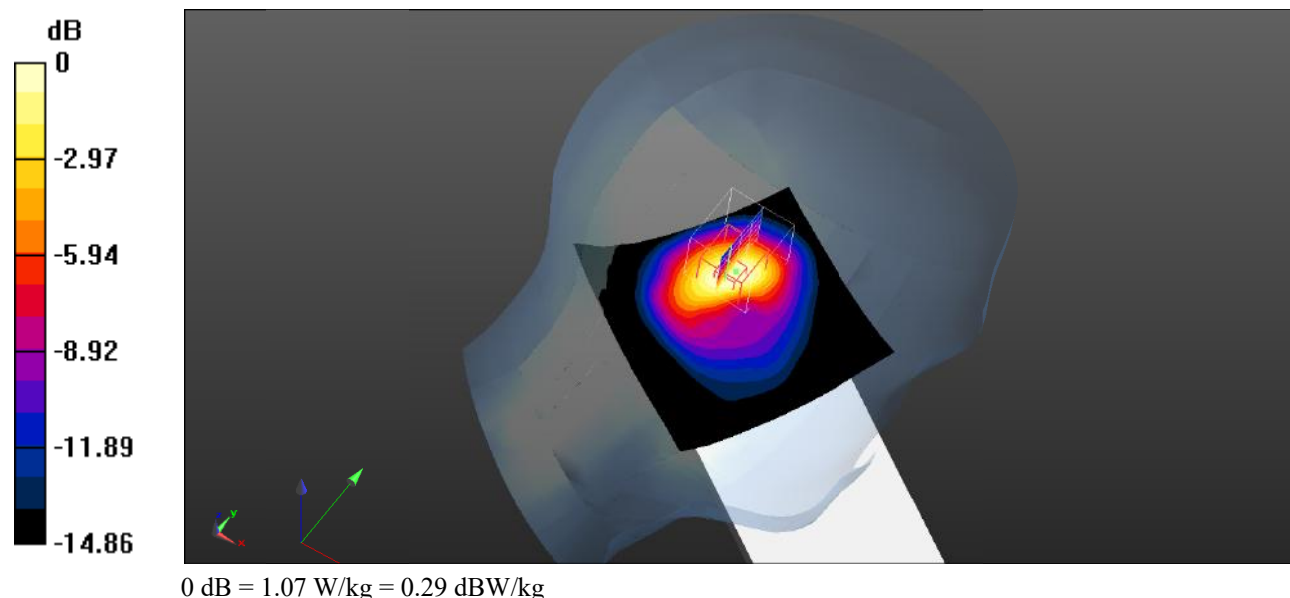

**Test Plot 106#: LTE Band 4\_Head Left Tilt\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.372 \text{ S/m}$ ;  $\epsilon_r = 41.158$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.21 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 19.93 V/m; Power Drift = -0.07 dB  
 Peak SAR (extrapolated) = 1.75 W/kg  
**SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.536 W/kg**  
 Maximum value of SAR (measured) = 1.11 W/kg

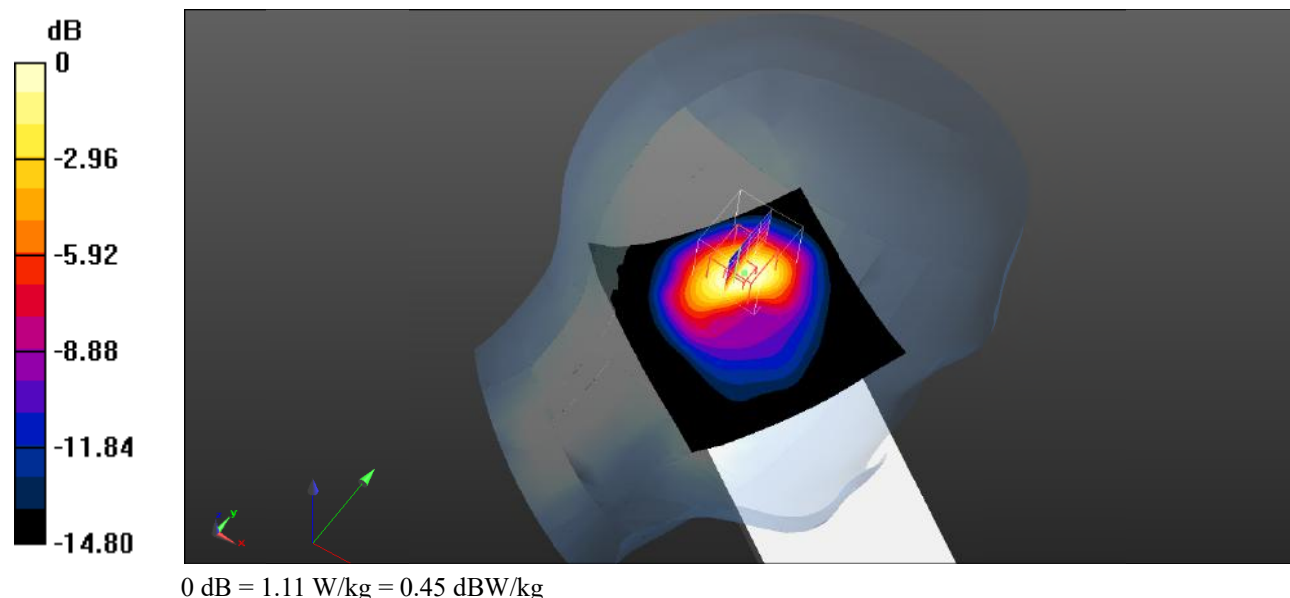

**Test Plot 107#: LTE Band 4\_Head Left Tilt\_1RB\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.389 \text{ S/m}$ ;  $\epsilon_r = 41.815$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.22 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 19.87 V/m; Power Drift = -0.08 dB  
 Peak SAR (extrapolated) = 1.73 W/kg  
**SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.534 W/kg**  
 Maximum value of SAR (measured) = 1.08 W/kg

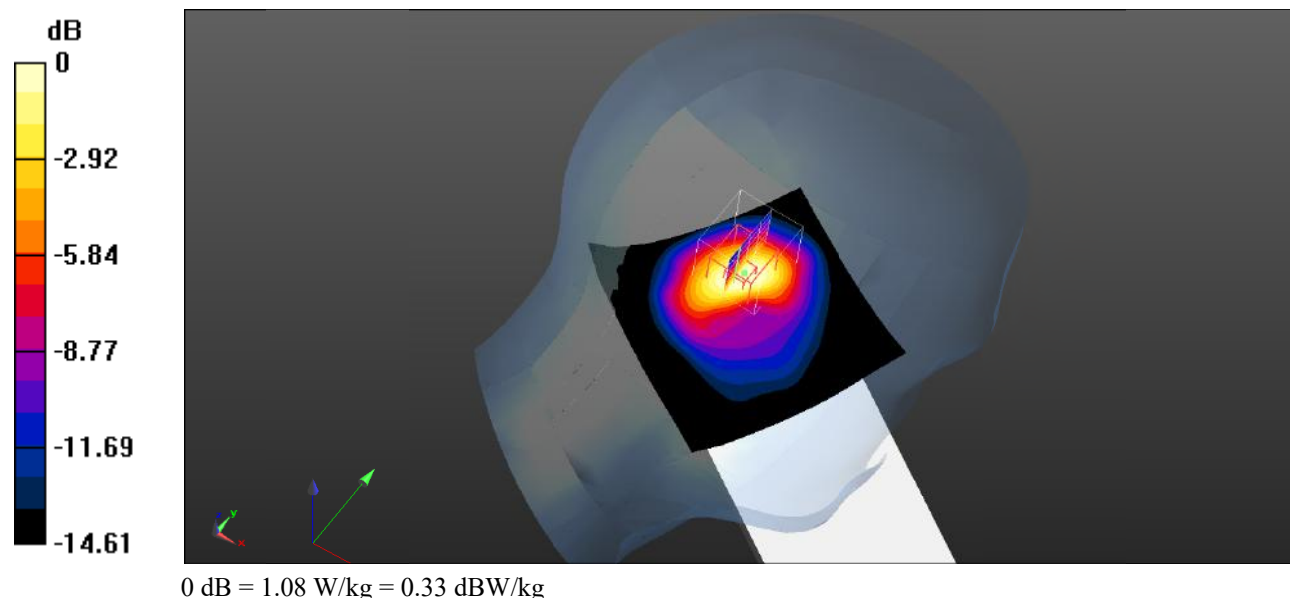

**Test Plot 108#: LTE Band 4\_Head Left Tilt\_50%RB\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.362$  S/m;  $\epsilon_r = 41.412$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.06 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.52 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.875 W/kg; SAR(10 g) = 0.459 W/kg**

Maximum value of SAR (measured) = 0.929 W/kg

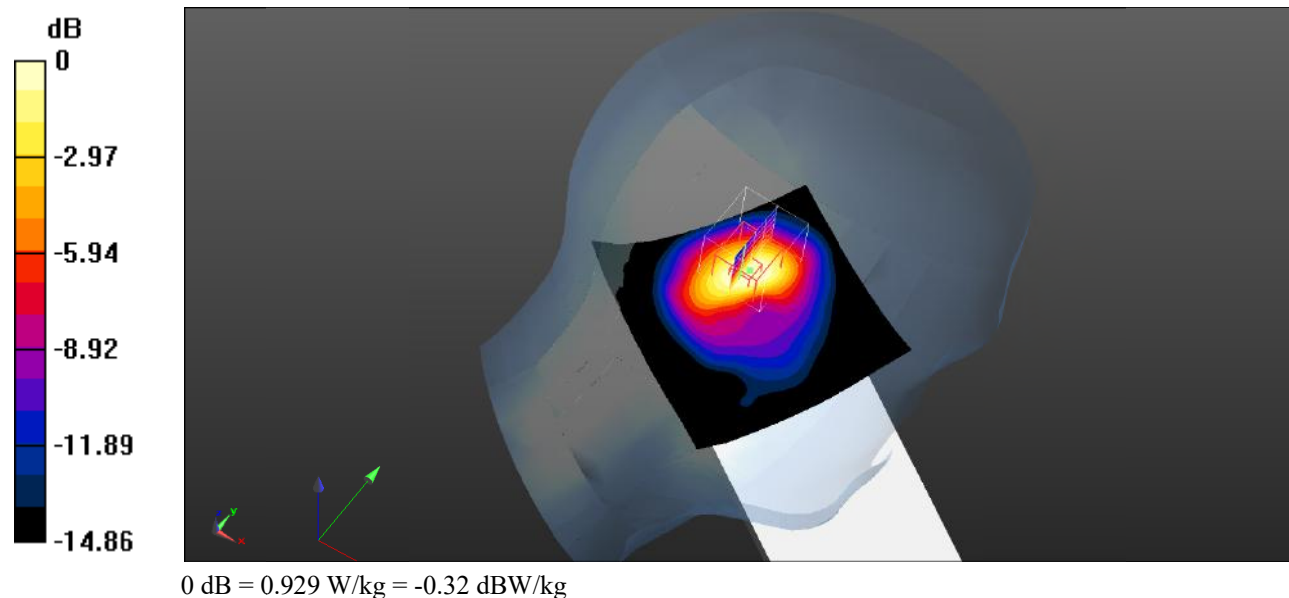

**Test Plot 109#: LTE Band 4\_Head Left Tilt\_50%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.03 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.36 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 1.45 W/kg

**SAR(1 g) = 0.859 W/kg; SAR(10 g) = 0.449 W/kg**

Maximum value of SAR (measured) = 0.902 W/kg

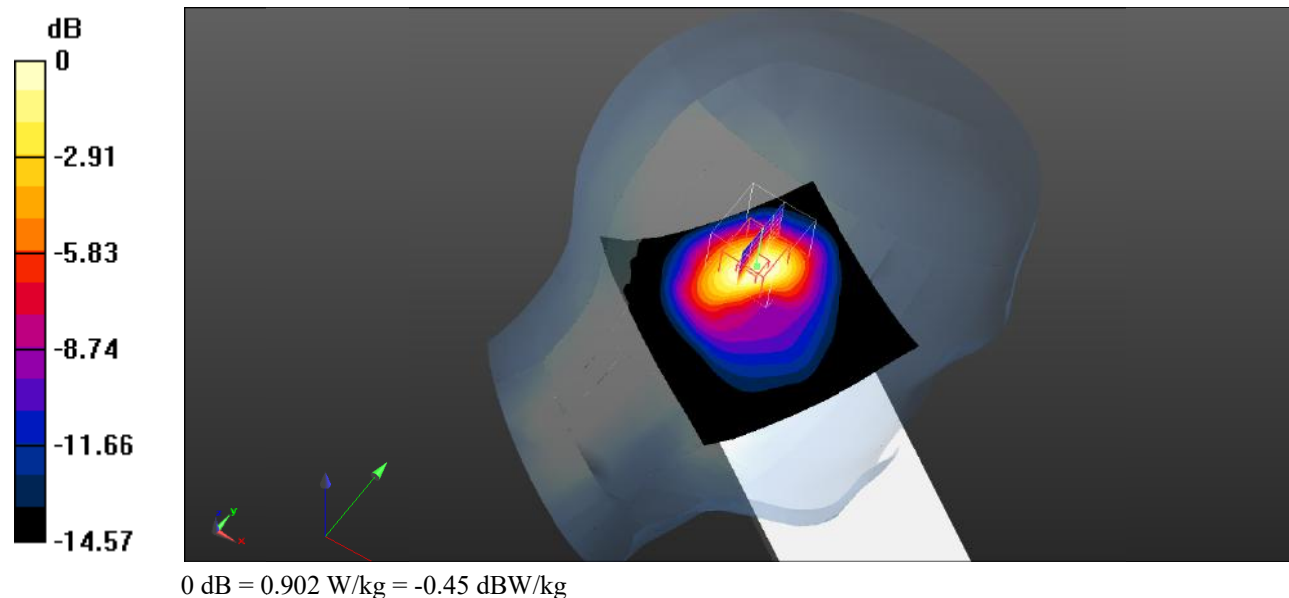

**Test Plot 110#: LTE Band 4\_Head Left Tilt\_50%RB\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.389 \text{ S/m}$ ;  $\epsilon_r = 41.815$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.08 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 18.56 V/m; Power Drift = -0.14 dB  
 Peak SAR (extrapolated) = 1.52 W/kg  
**SAR(1 g) = 0.897 W/kg; SAR(10 g) = 0.467 W/kg**  
 Maximum value of SAR (measured) = 0.946 W/kg

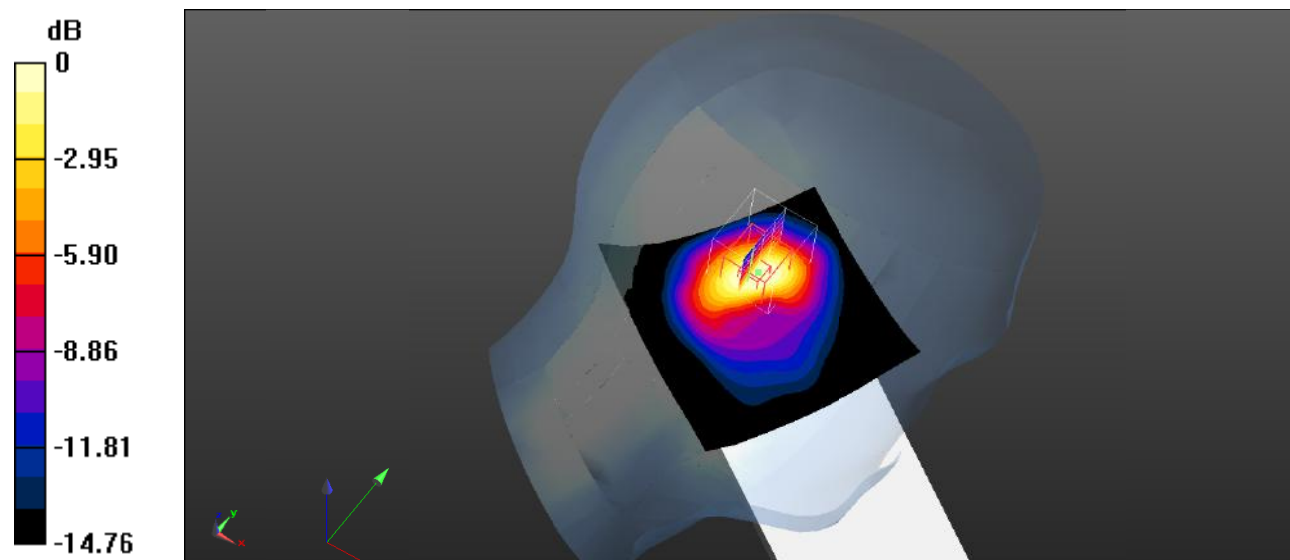

0 dB = 0.946 W/kg = -0.24 dBW/kg

**Test Plot 111#: LTE Band 4\_Head Left Tilt\_100%RB\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1720 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.362$  S/m;  $\epsilon_r = 41.412$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.07 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.52 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 1.52 W/kg

**SAR(1 g) = 0.892 W/kg; SAR(10 g) = 0.464 W/kg**

Maximum value of SAR (measured) = 0.941 W/kg

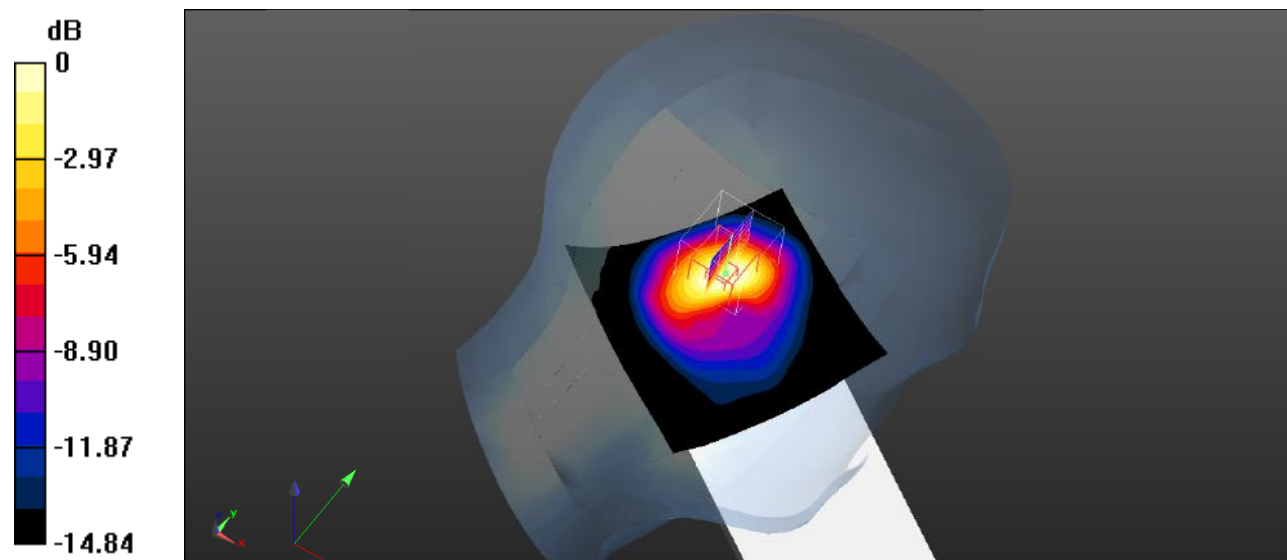

0 dB = 0.941 W/kg = -0.26 dBW/kg

**Test Plot 112#: LTE Band 4\_Head Left Tilt\_100%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.04 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.24 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.49 W/kg

**SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.453 W/kg**

Maximum value of SAR (measured) = 0.919 W/kg

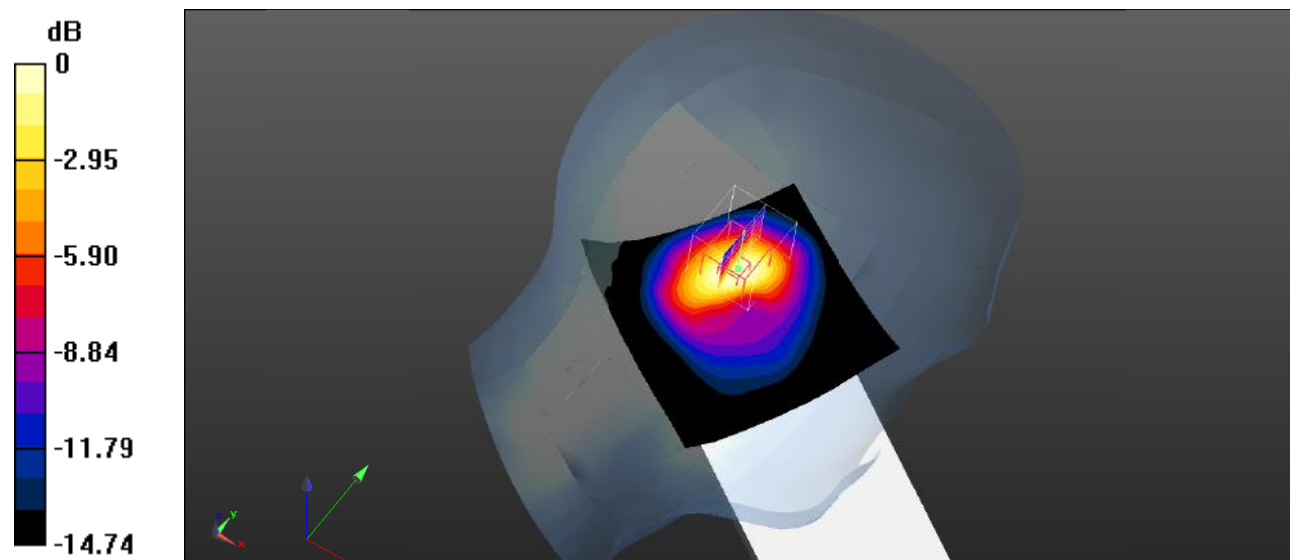

0 dB = 0.919 W/kg = -0.37 dBW/kg



**Test Plot 113#: LTE Band 4\_Head Left Tilt\_100%RB\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1745 MHz;Duty Cycle: 1:1  
 Medium parameters used:  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.389 \text{ S/m}$ ;  $\epsilon_r = 41.815$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) = 1.06 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 18.22 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.47 W/kg

**SAR(1 g) = 0.866 W/kg; SAR(10 g) = 0.451 W/kg**

Maximum value of SAR (measured) = 0.914 W/kg

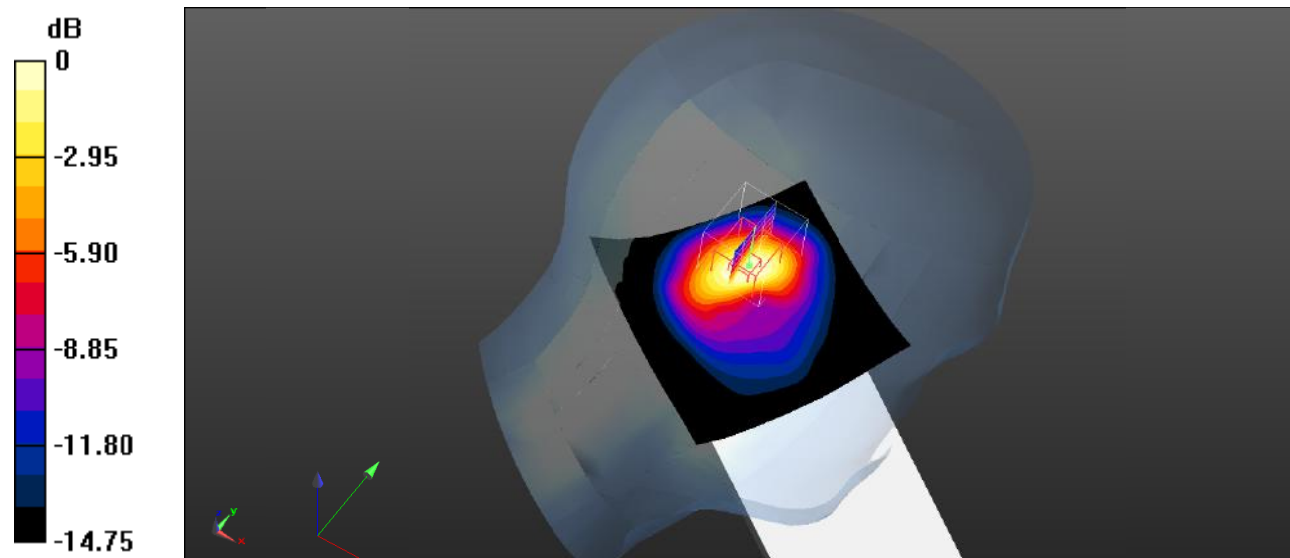

0 dB = 0.914 W/kg = -0.39 dBW/kg

**Test Plot 114#: LTE Band 4\_Head Right Cheek\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.792 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 20.84 V/m; Power Drift = -0.16 dB  
 Peak SAR (extrapolated) = 1.08 W/kg  
**SAR(1 g) = 0.678 W/kg; SAR(10 g) = 0.374 W/kg**  
 Maximum value of SAR (measured) = 0.756 W/kg

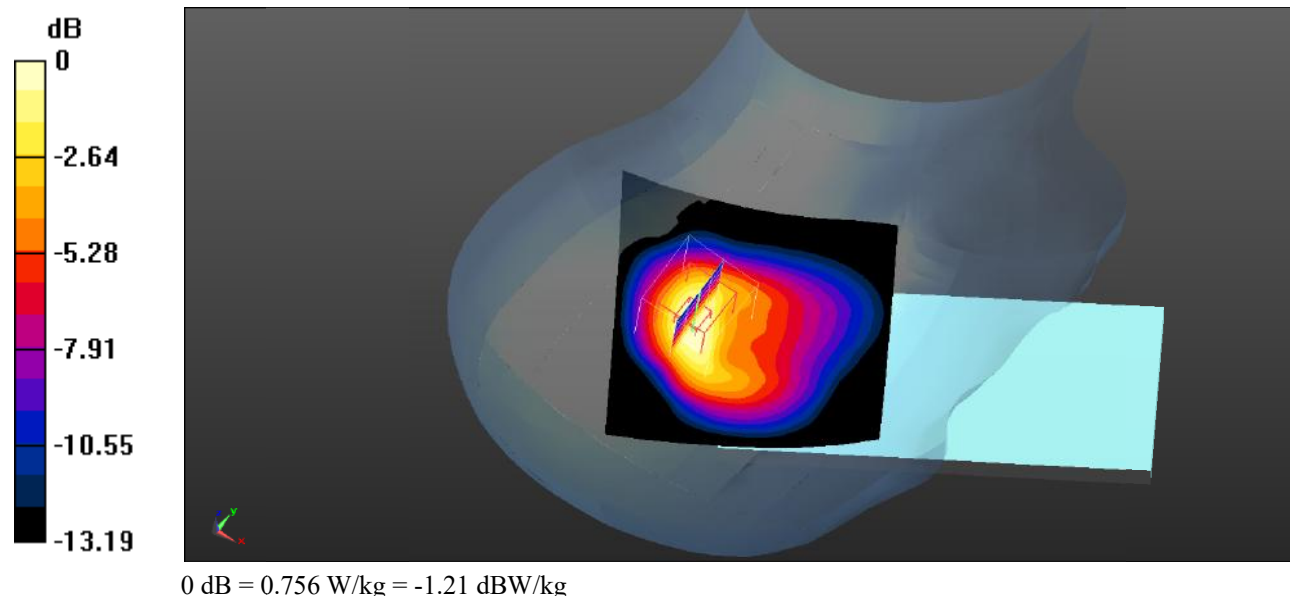

**Test Plot 115#: LTE Band 4\_Head Right Cheek\_50%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x71x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.670 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.01 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.903 W/kg

**SAR(1 g) = 0.564 W/kg; SAR(10 g) = 0.311 W/kg**

Maximum value of SAR (measured) = 0.635 W/kg

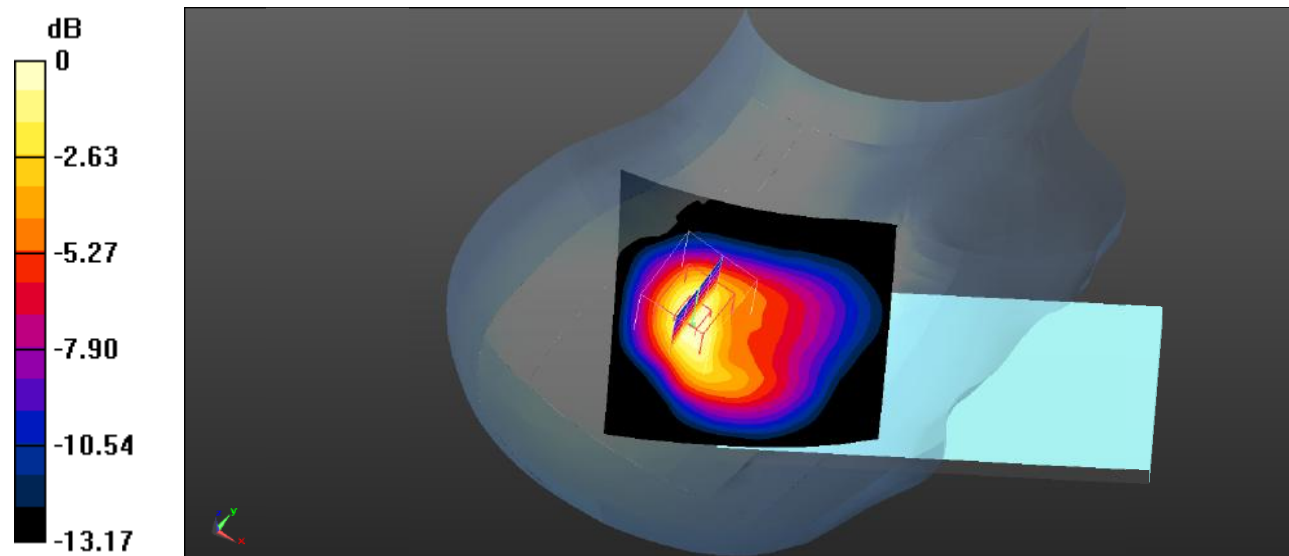

0 dB = 0.635 W/kg = -1.97 dBW/kg

**Test Plot 116#: LTE Band 4\_Head Right Tilt\_1RB\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1720 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1720$  MHz;  $\sigma = 1.362$  S/m;  $\epsilon_r = 41.412$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.914 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.21 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.22 W/kg

**SAR(1 g) = 0.789 W/kg; SAR(10 g) = 0.434 W/kg**

Maximum value of SAR (measured) = 0.889 W/kg

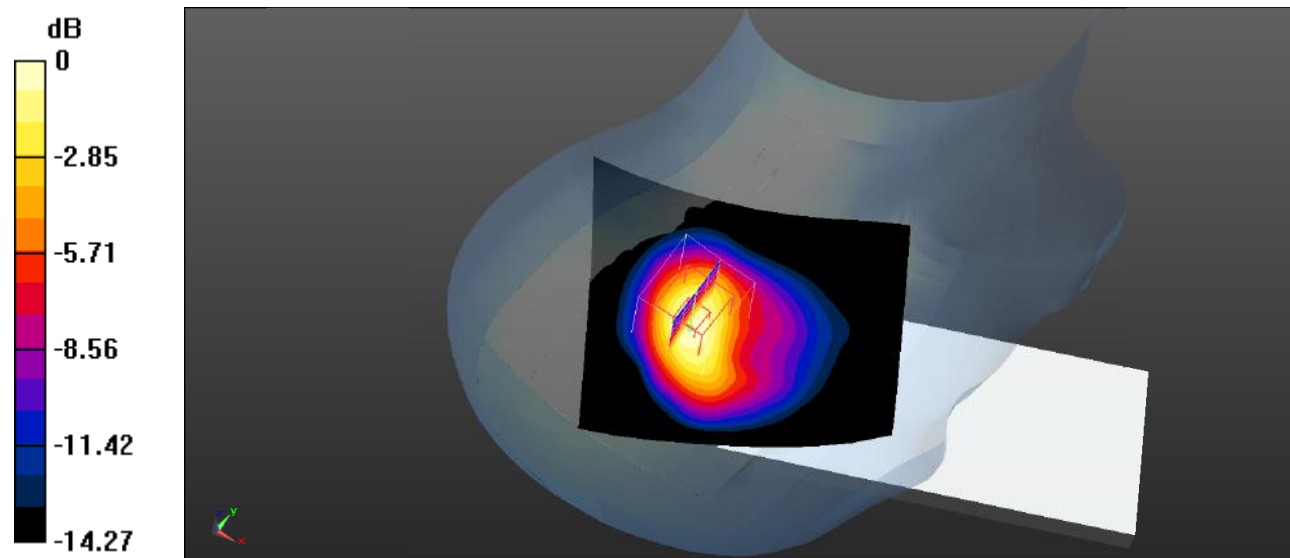

0 dB = 0.889 W/kg = -0.51 dBW/kg

**Test Plot 117#: LTE Band 4\_Head Right Tilt\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.962 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 22.08 V/m; Power Drift = -0.07 dB  
Peak SAR (extrapolated) = 1.23 W/kg  
**SAR(1 g) = 0.796 W/kg; SAR(10 g) = 0.439 W/kg**  
Maximum value of SAR (measured) = 0.893 W/kg

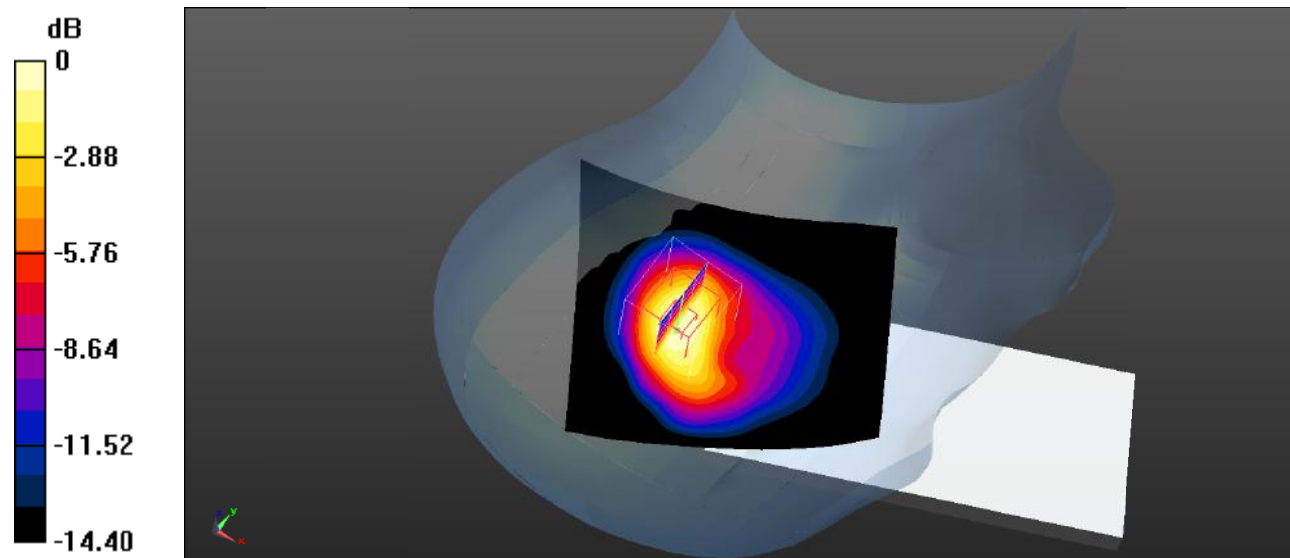

0 dB = 0.893 W/kg = -0.49 dBW/kg

**Test Plot 118#: LTE Band 4\_Head Right Tilt\_1RB\_High**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1745 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1745 \text{ MHz}$ ;  $\sigma = 1.389 \text{ S/m}$ ;  $\epsilon_r = 41.815$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.947 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $21.89 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $1.25 \text{ W/kg}$   
**SAR(1 g) =  $0.795 \text{ W/kg}$ ; SAR(10 g) =  $0.437 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.893 \text{ W/kg}$

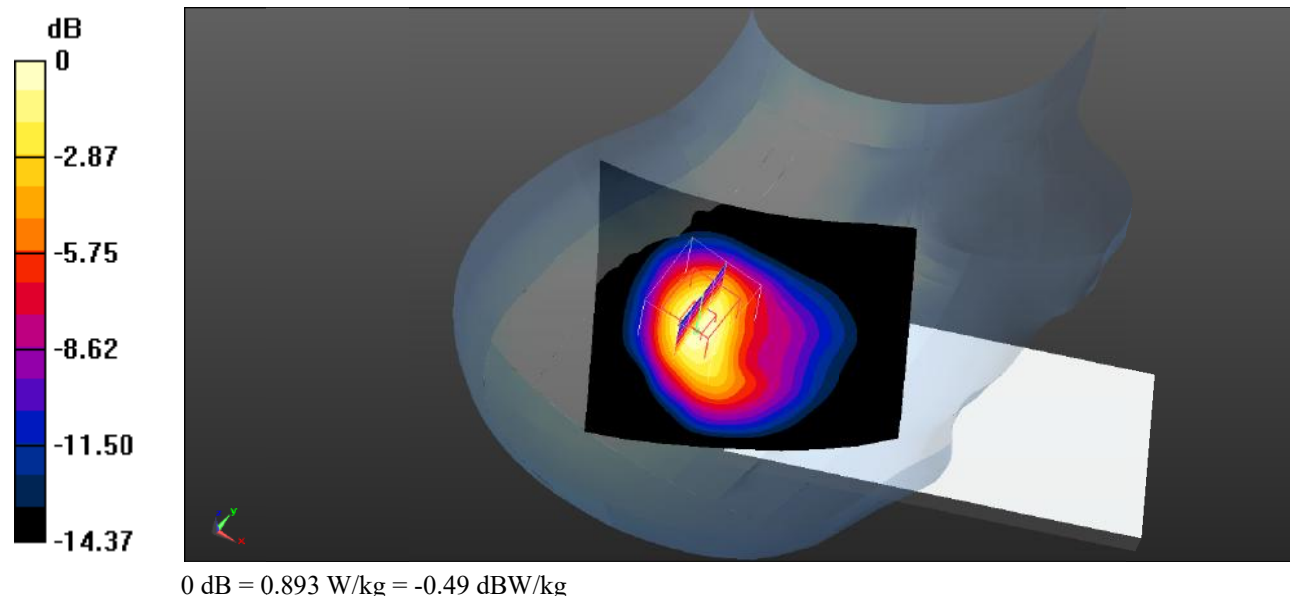

**Test Plot 119#: LTE Band 4\_Head Right Tilt\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.773 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 20.06 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 1.04 W/kg  
**SAR(1 g) = 0.667 W/kg; SAR(10 g) = 0.367 W/kg**  
Maximum value of SAR (measured) = 0.748 W/kg

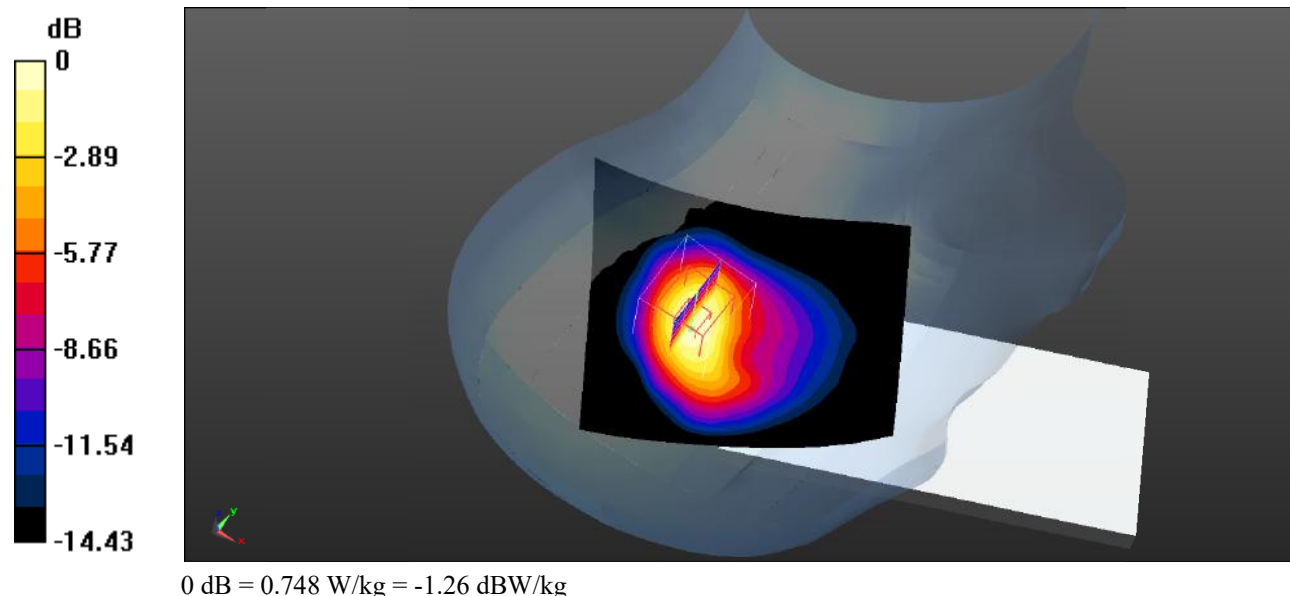

**Test Plot 120#: LTE Band 4\_Head Right Tilt\_100%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.701 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.23 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.958 W/kg

**SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.353 W/kg**

Maximum value of SAR (measured) = 0.677 W/kg

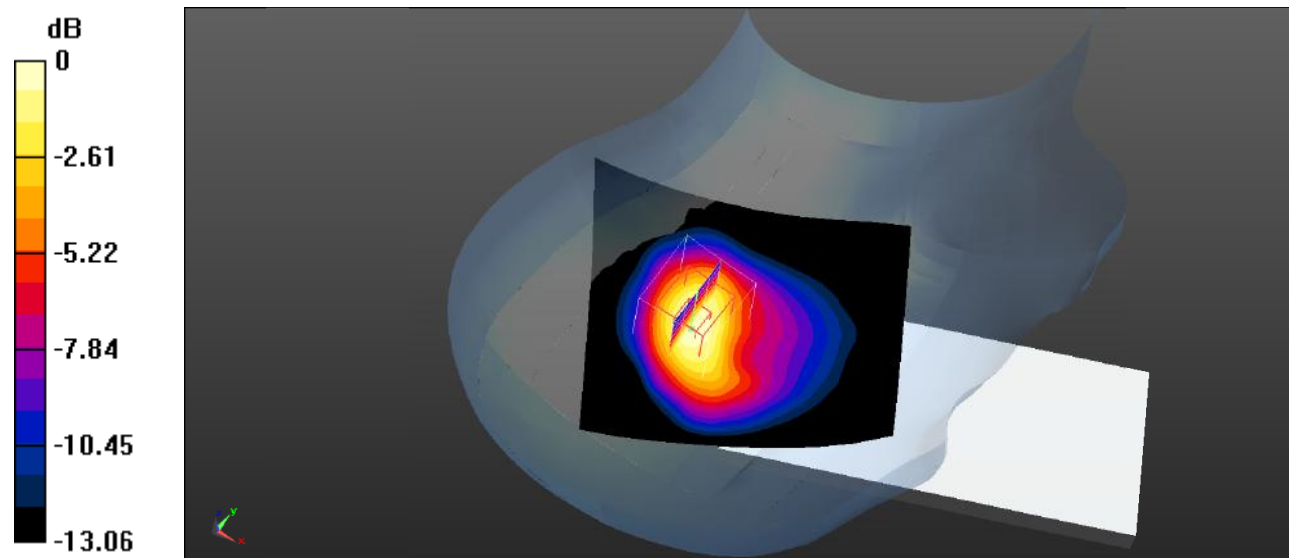

0 dB = 0.677 W/kg = -1.69 dBW/kg



**Test Plot 121#: LTE Band 4\_Body Front\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.372 \text{ S/m}$ ;  $\epsilon_r = 41.158$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.332 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.146 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.480 \text{ W/kg}$   
**SAR(1 g) =  $0.309 \text{ W/kg}$ ; SAR(10 g) =  $0.182 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.330 \text{ W/kg}$

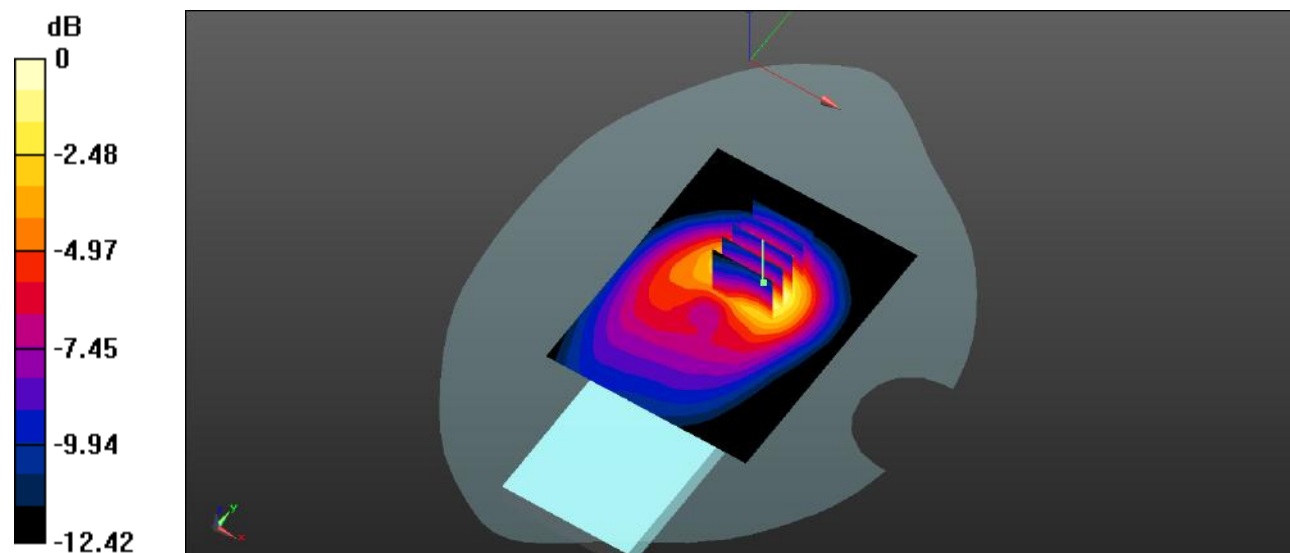

0 dB =  $0.330 \text{ W/kg}$  =  $-4.81 \text{ dBW/kg}$

**Test Plot 122#: LTE Band 4\_Body Front\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.280 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 6.347 V/m; Power Drift = -0.05 dB  
 Peak SAR (extrapolated) = 0.394 W/kg  
**SAR(1 g) = 0.255 W/kg; SAR(10 g) = 0.152 W/kg**  
 Maximum value of SAR (measured) = 0.273 W/kg

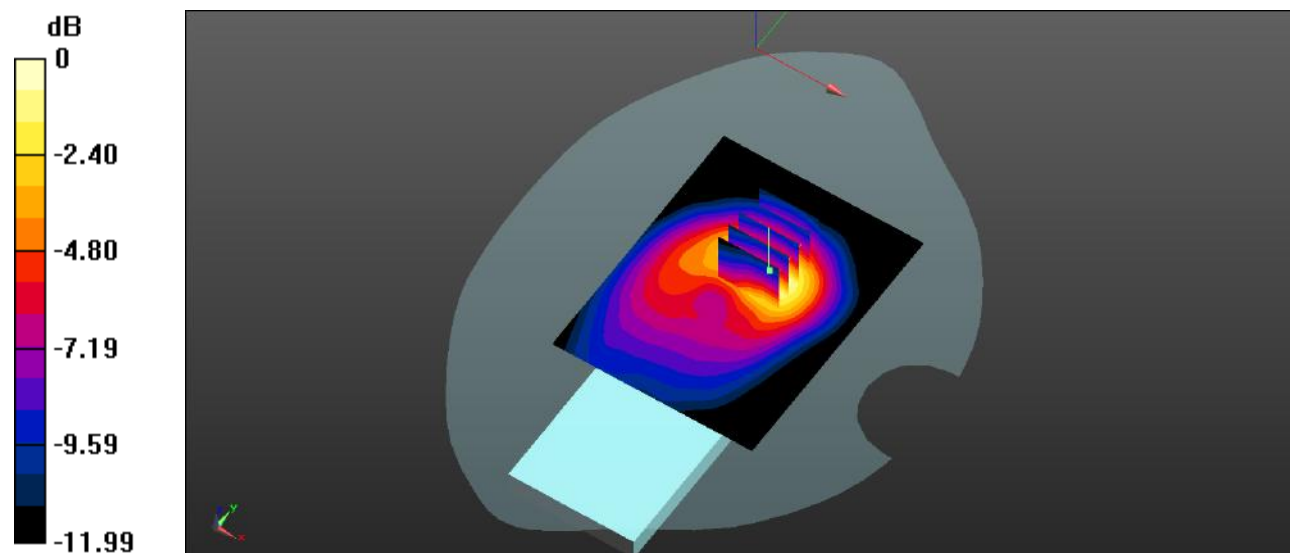

0 dB = 0.273 W/kg = -5.64 dBW/kg

**Test Plot 123#: LTE Band 4\_Body Back\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.337 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 8.558 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 0.413 W/kg  
**SAR(1 g) = 0.299 W/kg; SAR(10 g) = 0.184 W/kg**  
 Maximum value of SAR (measured) = 0.320 W/kg

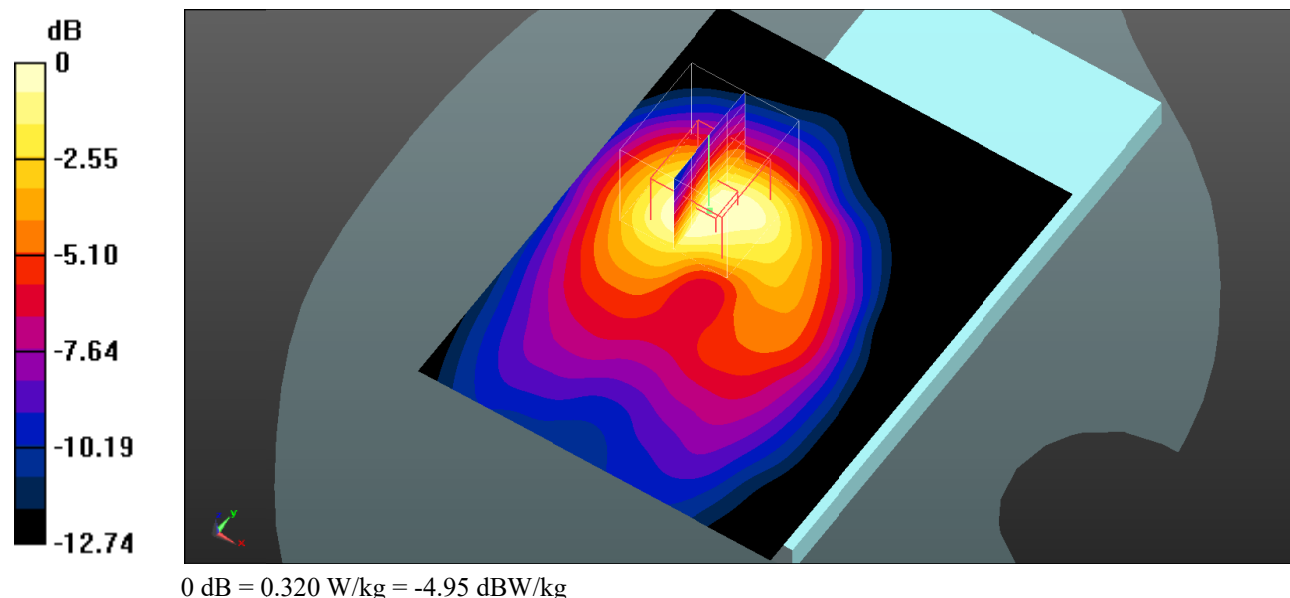

**Test Plot 124#: LTE Band 4\_Body Back\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.372 \text{ S/m}$ ;  $\epsilon_r = 41.158$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.278 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.801 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.349 \text{ W/kg}$   
**SAR(1 g) =  $0.253 \text{ W/kg}$ ; SAR(10 g) =  $0.155 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.266 \text{ W/kg}$

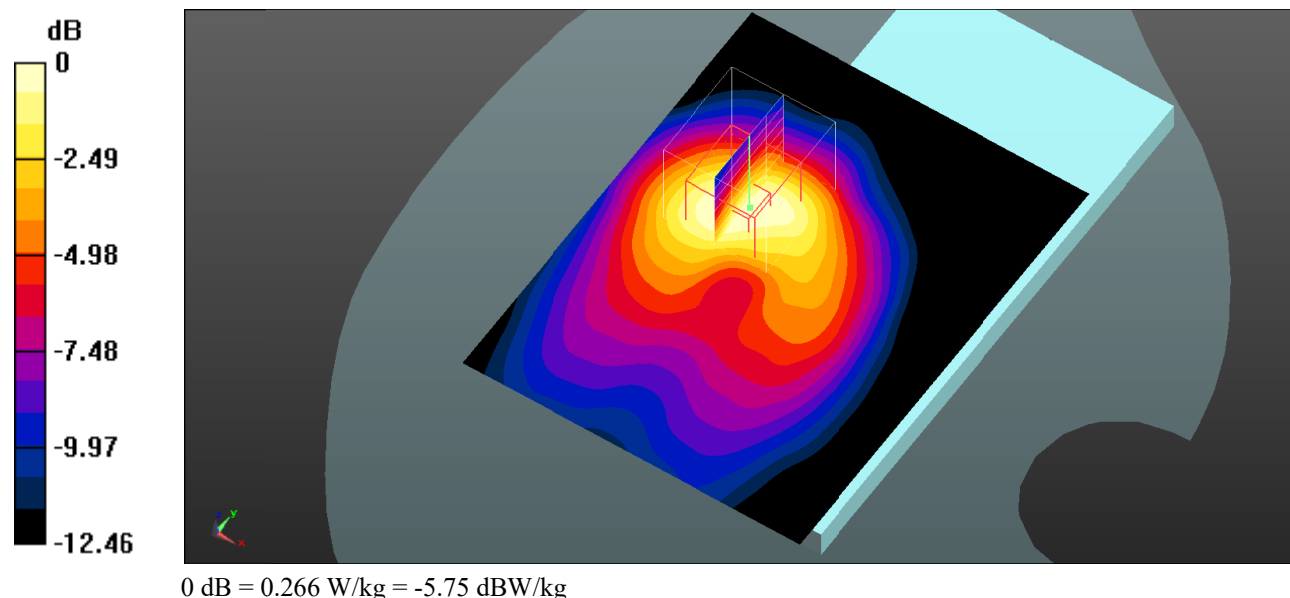

**Test Plot 125#: LTE Band 4\_Body Right\_1RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0488 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.510 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.0600 W/kg

**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.0452 W/kg

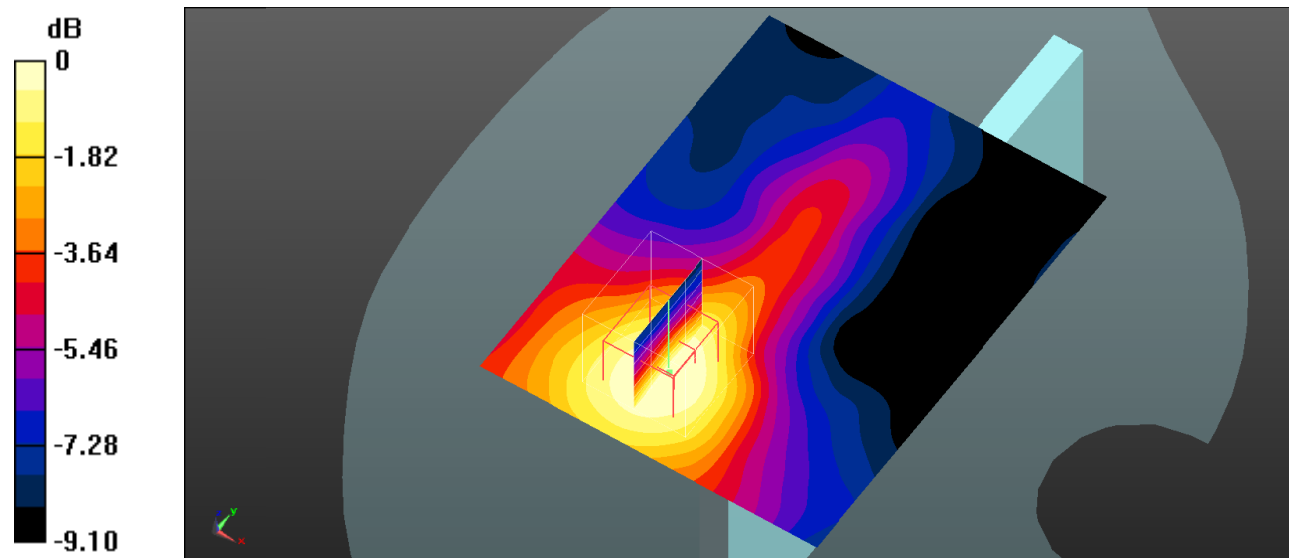

**Test Plot 126#: LTE Band 4\_Body Right\_50%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup>;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.0402 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.196 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.0470 W/kg

**SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.023 W/kg**

Maximum value of SAR (measured) = 0.0355 W/kg

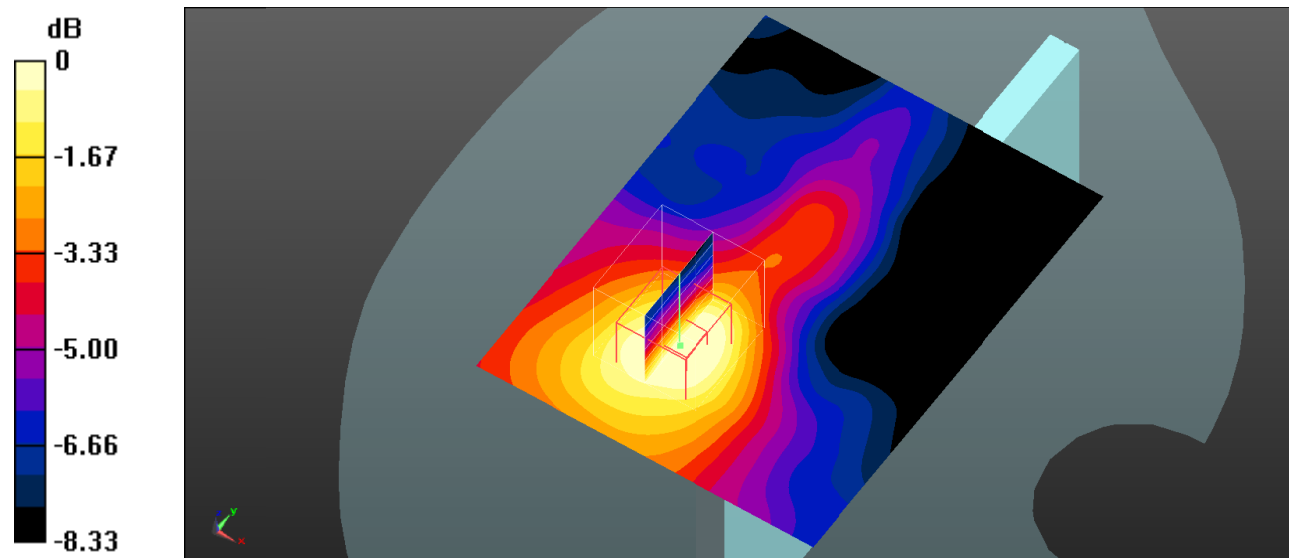

0 dB = 0.0355 W/kg = -14.50 dBW/kg

**Test Plot 127#: LTE Band 4\_Body Top\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.372 \text{ S/m}$ ;  $\epsilon_r = 41.158$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.418 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $13.91 \text{ V/m}$ ; Power Drift =  $-0.19 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.527 \text{ W/kg}$   
**SAR(1 g) =  $0.353 \text{ W/kg}$ ; SAR(10 g) =  $0.201 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.387 \text{ W/kg}$

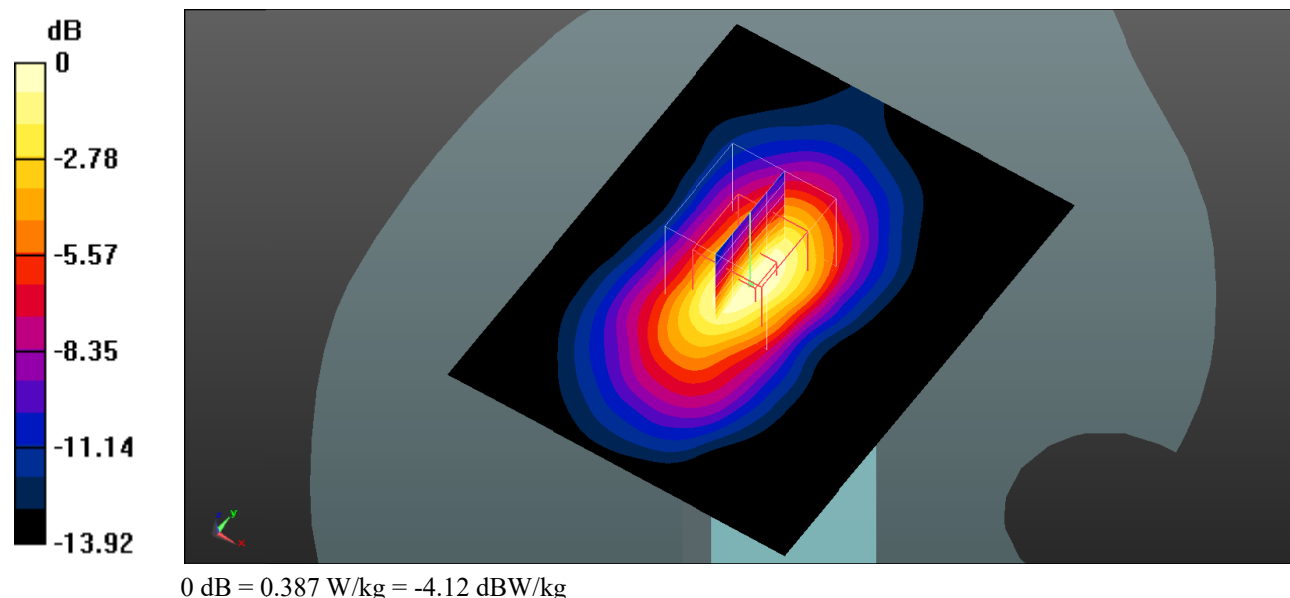

**Test Plot 128#: LTE Band 4\_Body Top\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 1732.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 1732.5$  MHz;  $\sigma = 1.372$  S/m;  $\epsilon_r = 41.158$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(7.33, 7.33, 7.33); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.345 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 12.71 V/m; Power Drift = -0.13 dB  
 Peak SAR (extrapolated) = 0.435 W/kg  
**SAR(1 g) = 0.292 W/kg; SAR(10 g) = 0.167 W/kg**  
 Maximum value of SAR (measured) = 0.319 W/kg

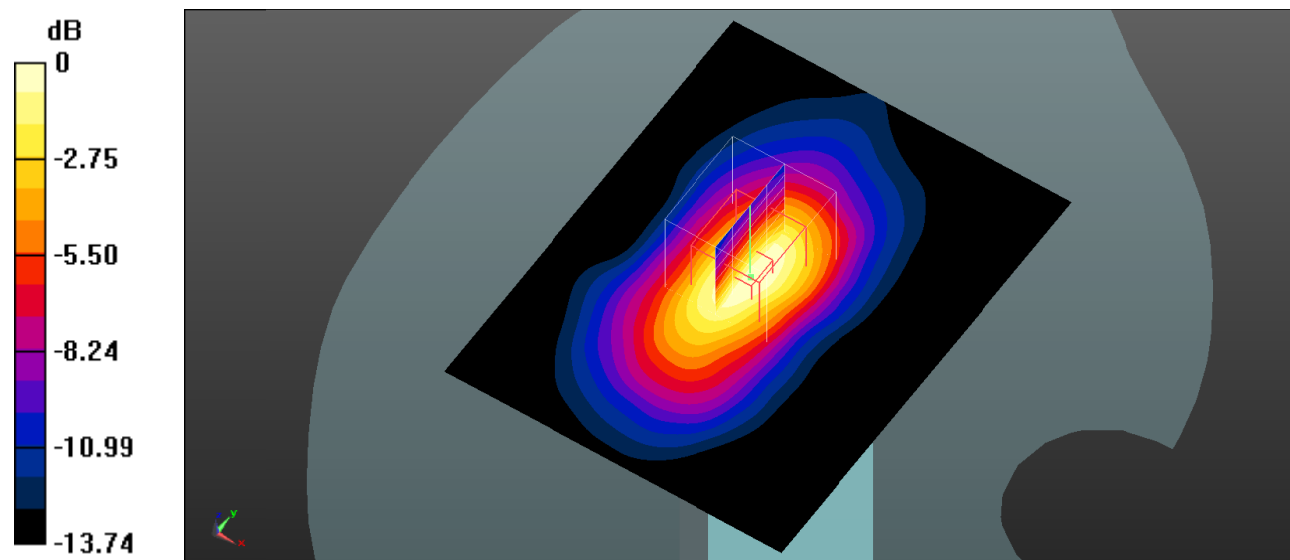

0 dB = 0.319 W/kg = -4.96 dBW/kg



**Test Plot 129#: LTE Band 5\_Head Left Cheek\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.889 \text{ S/m}$ ;  $\epsilon_r = 43.023$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.403 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $15.13 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.554 \text{ W/kg}$   
**SAR(1 g) =  $0.338 \text{ W/kg}$ ; SAR(10 g) =  $0.232 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.347 \text{ W/kg}$

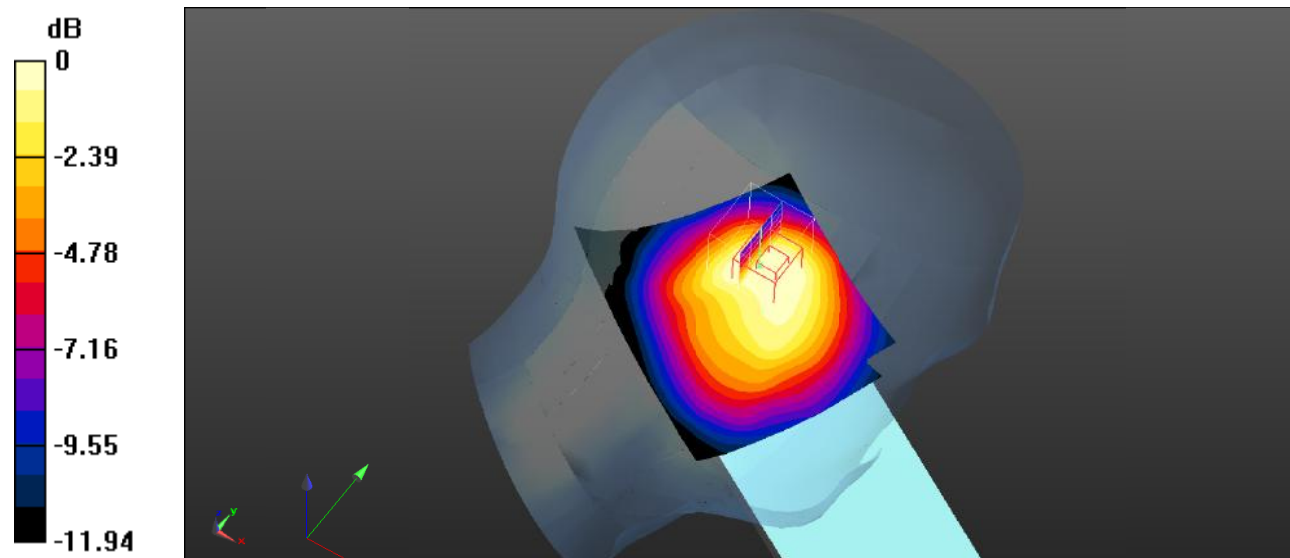

0 dB =  $0.347 \text{ W/kg}$  =  $-4.60 \text{ dBW/kg}$

**Test Plot 130#: LTE Band 5\_Head Left Cheek\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.889 \text{ S/m}$ ;  $\epsilon_r = 43.023$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.300 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $12.58 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.434 \text{ W/kg}$   
**SAR(1 g) =  $0.257 \text{ W/kg}$ ; SAR(10 g) =  $0.176 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.267 \text{ W/kg}$

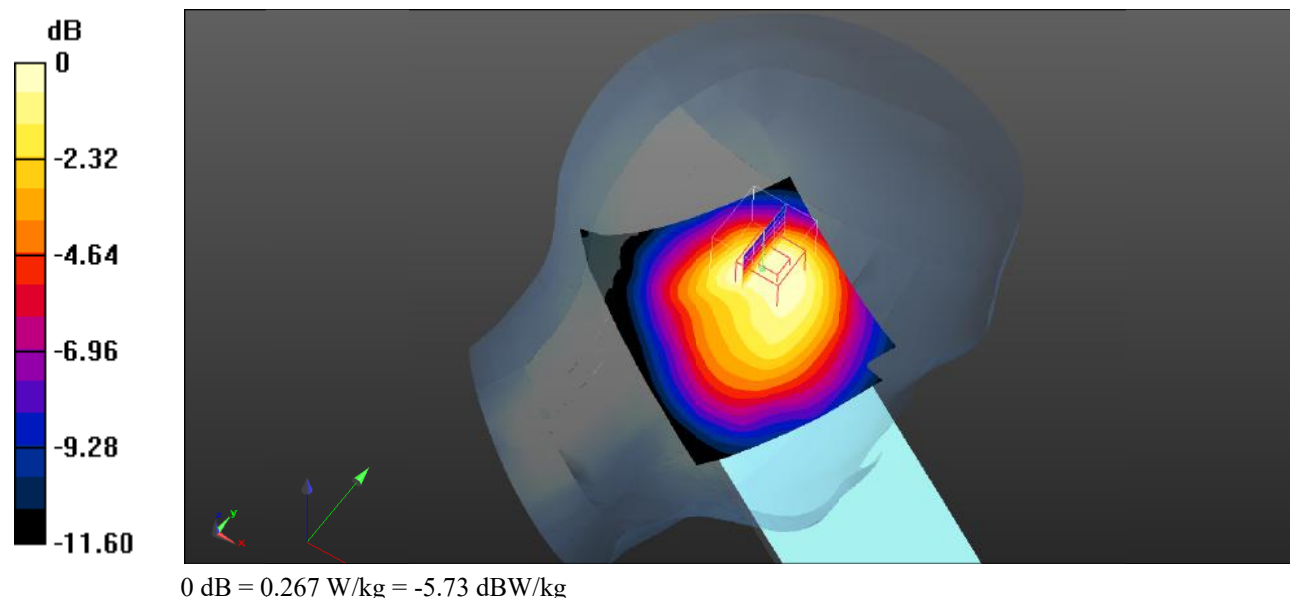

**Test Plot 131#: LTE Band 5\_Head Left Tilt\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.889 \text{ S/m}$ ;  $\epsilon_r = 43.023$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.376 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $14.25 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.660 \text{ W/kg}$   
**SAR(1 g) =  $0.342 \text{ W/kg}$ ; SAR(10 g) =  $0.201 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.360 \text{ W/kg}$

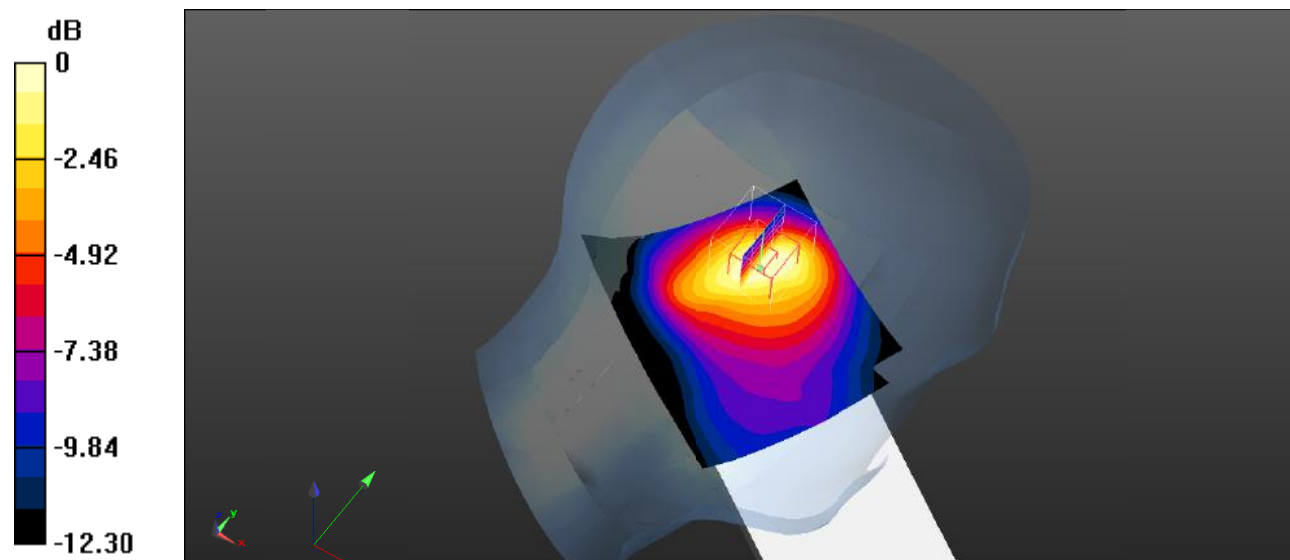

0 dB =  $0.360 \text{ W/kg}$  =  $-4.44 \text{ dBW/kg}$

**Test Plot 132#: LTE Band 5\_Head Left Tilt\_50%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 43.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.289 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.32 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.500 W/kg

**SAR(1 g) = 0.259 W/kg; SAR(10 g) = 0.154 W/kg**

Maximum value of SAR (measured) = 0.273 W/kg

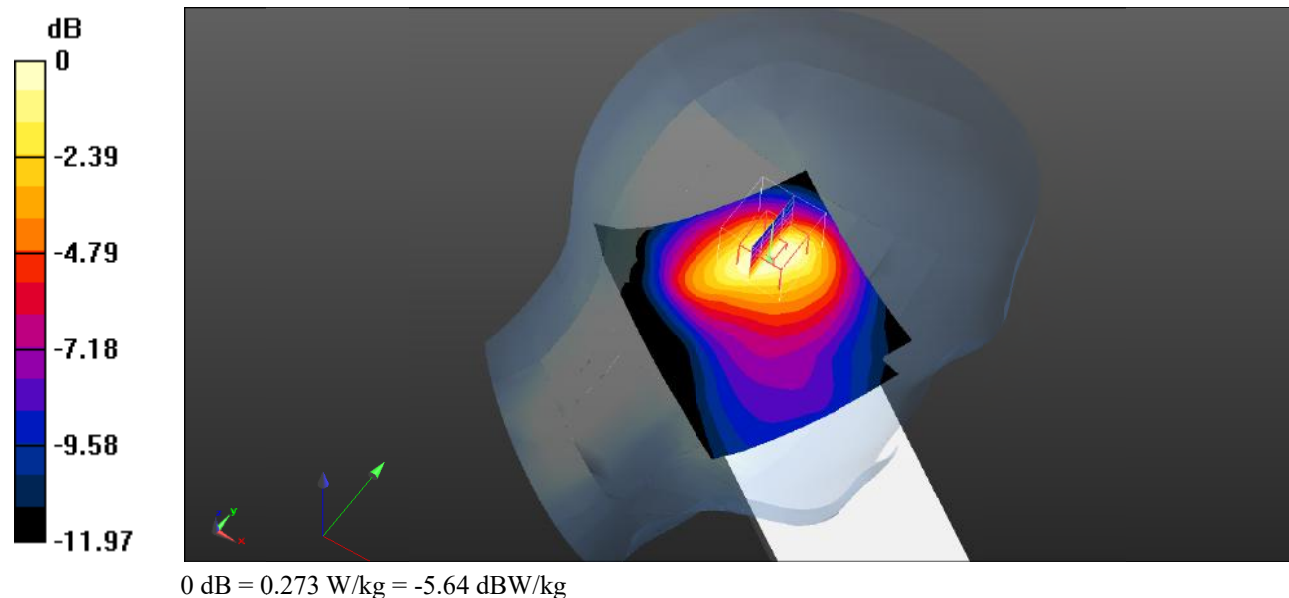

**Test Plot 133#: LTE Band 5\_Head Right Cheek\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.889 \text{ S/m}$ ;  $\epsilon_r = 43.023$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.280 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $16.47 \text{ V/m}$ ; Power Drift =  $-0.02 \text{ dB}$

Peak SAR (extrapolated) =  $0.339 \text{ W/kg}$

**SAR(1 g) =  $0.249 \text{ W/kg}$ ; SAR(10 g) =  $0.182 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.259 \text{ W/kg}$

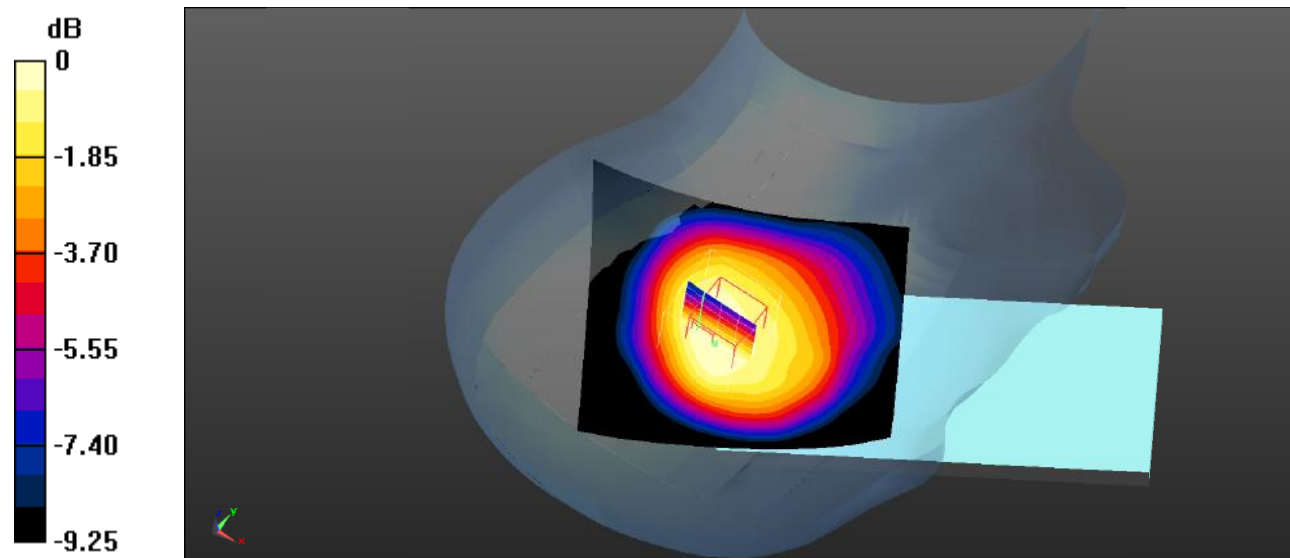

0 dB =  $0.259 \text{ W/kg}$  =  $-5.87 \text{ dBW/kg}$

**Test Plot 134#: LTE Band 5\_Head Right Cheek\_50%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 43.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.220 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.80 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.263 W/kg

**SAR(1 g) = 0.191 W/kg; SAR(10 g) = 0.139 W/kg**

Maximum value of SAR (measured) = 0.200 W/kg

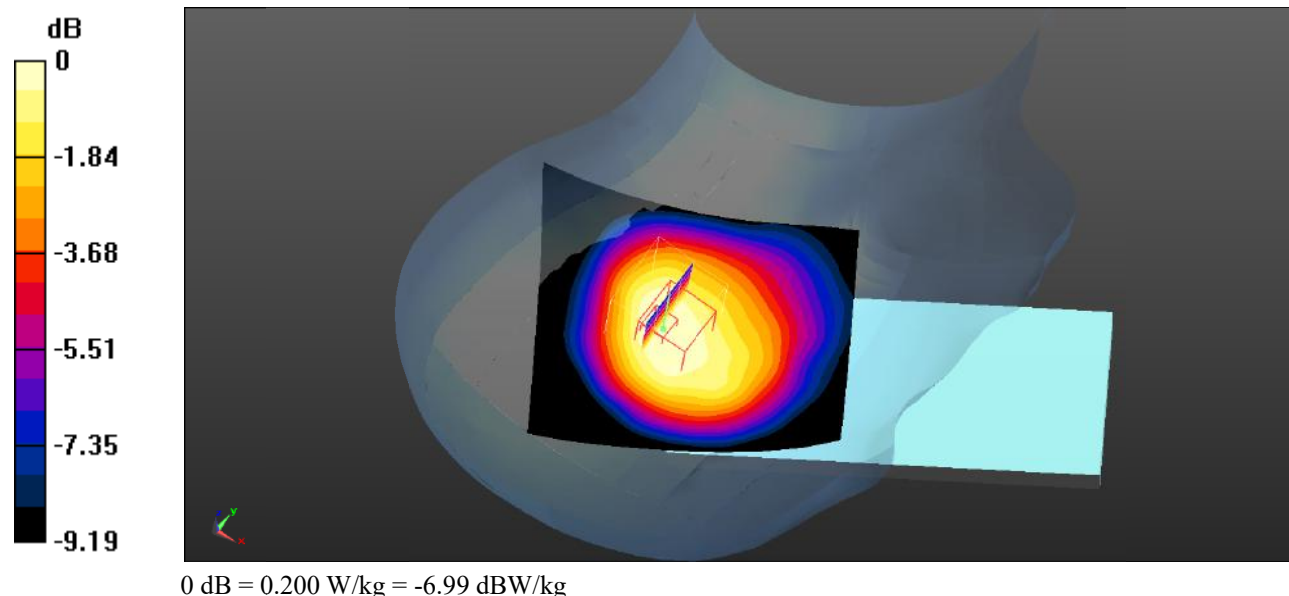

**Test Plot 135#: LTE Band 5\_Head Right Tilt\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.889 \text{ S/m}$ ;  $\epsilon_r = 43.023$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.250 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $16.18 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.354 \text{ W/kg}$   
**SAR(1 g) =  $0.226 \text{ W/kg}$ ; SAR(10 g) =  $0.139 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.242 \text{ W/kg}$

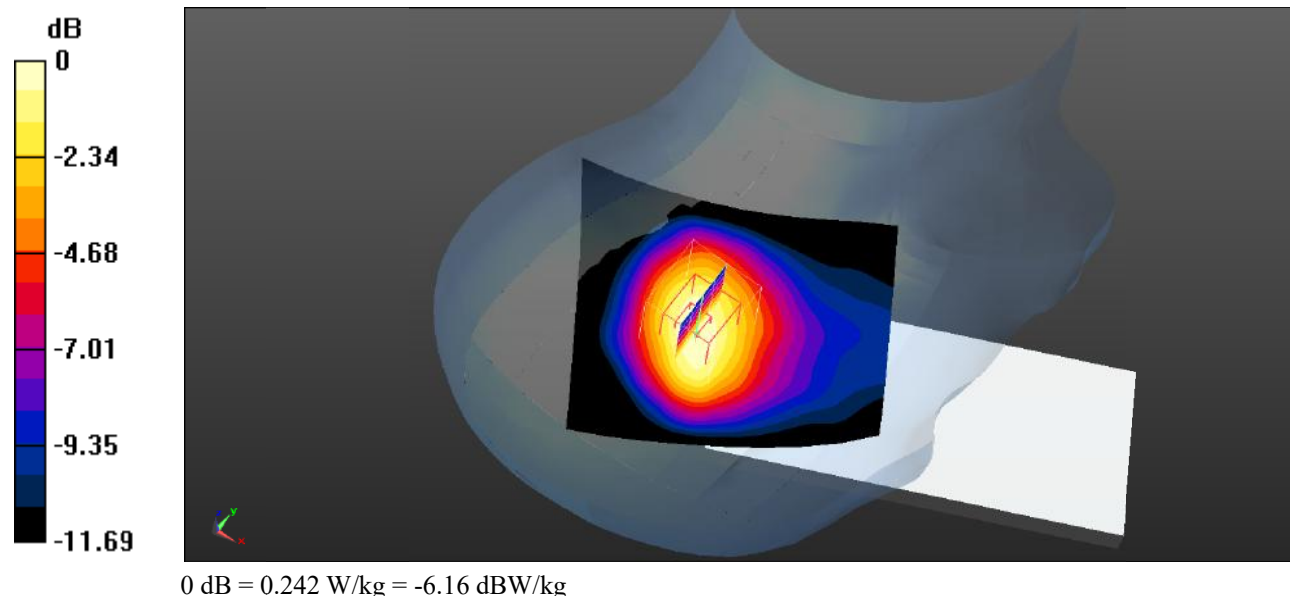

**Test Plot 136#: LTE Band 5\_Head Right Tilt\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 43.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x81x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.191 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 14.17 V/m; Power Drift = -0.19 dB  
Peak SAR (extrapolated) = 0.272 W/kg  
**SAR(1 g) = 0.173 W/kg; SAR(10 g) = 0.106 W/kg**  
Maximum value of SAR (measured) = 0.186 W/kg

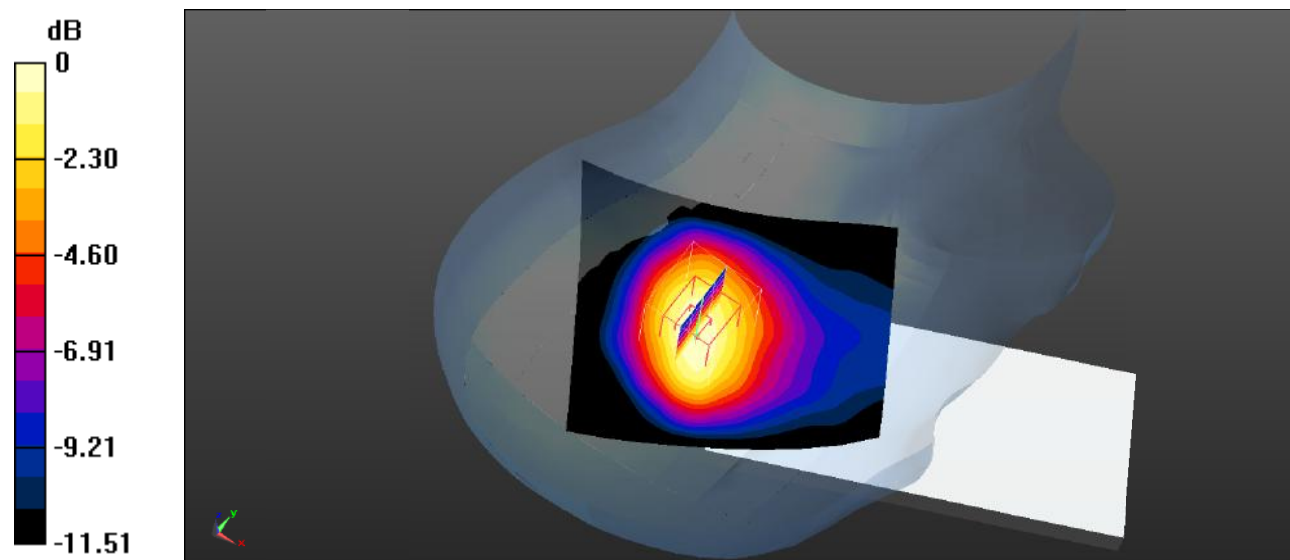

0 dB = 0.186 W/kg = -7.30 dBW/kg



**Test Plot 137#: LTE Band 5\_Body Front\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 43.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
Maximum value of SAR (interpolated) = 0.120 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 9.583 V/m; Power Drift = -0.14 dB  
Peak SAR (extrapolated) = 0.175 W/kg  
**SAR(1 g) = 0.111 W/kg; SAR(10 g) = 0.074 W/kg**  
Maximum value of SAR (measured) = 0.118 W/kg

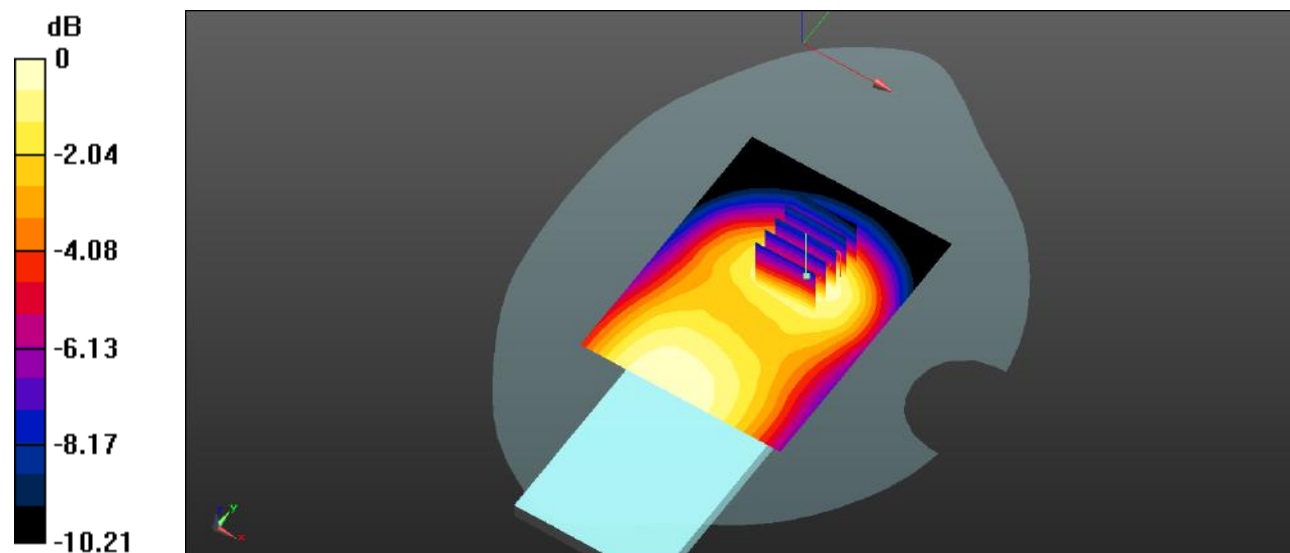

0 dB = 0.118 W/kg = -9.28 dBW/kg

**Test Plot 138#: LTE Band 5\_Body Front\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.889 \text{ S/m}$ ;  $\epsilon_r = 43.023$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0925 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 8.343 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.131 W/kg

**SAR(1 g) = 0.084 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.0891 W/kg

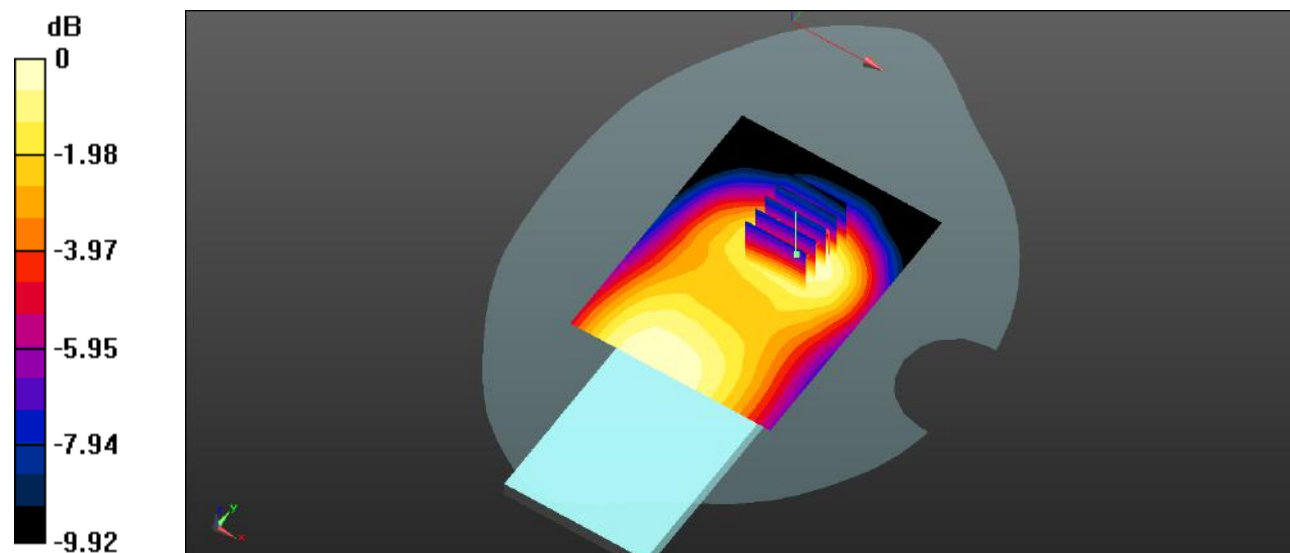

0 dB = 0.0891 W/kg = -10.50 dBW/kg

**Test Plot 139#: LTE Band 5\_Body Back\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.889 \text{ S/m}$ ;  $\epsilon_r = 43.023$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.163 \text{ W/kg}$


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $11.40 \text{ V/m}$ ; Power Drift =  $-0.16 \text{ dB}$

Peak SAR (extrapolated) =  $0.214 \text{ W/kg}$

**SAR(1 g) =  $0.141 \text{ W/kg}$ ; SAR(10 g) =  $0.093 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.150 \text{ W/kg}$

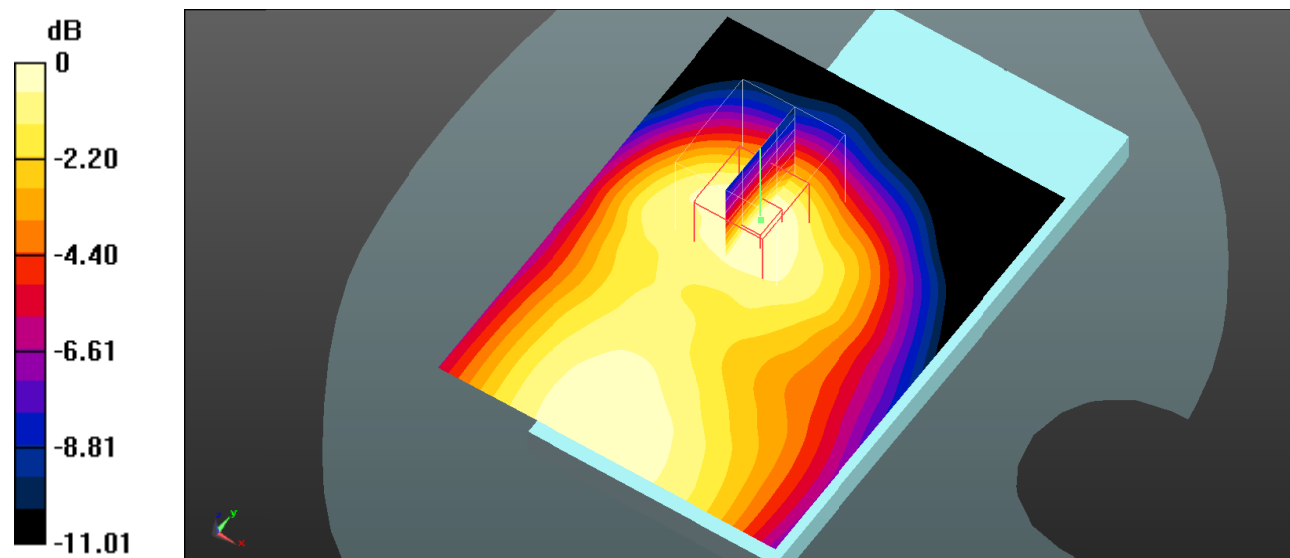

0 dB =  $0.150 \text{ W/kg}$  =  $-8.24 \text{ dBW/kg}$

**Test Plot 140#: LTE Band 5\_Body Back\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.889 \text{ S/m}$ ;  $\epsilon_r = 43.023$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.126 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $10.00 \text{ V/m}$ ; Power Drift =  $-0.19 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.161 \text{ W/kg}$   
**SAR(1 g) =  $0.107 \text{ W/kg}$ ; SAR(10 g) =  $0.070 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.115 \text{ W/kg}$

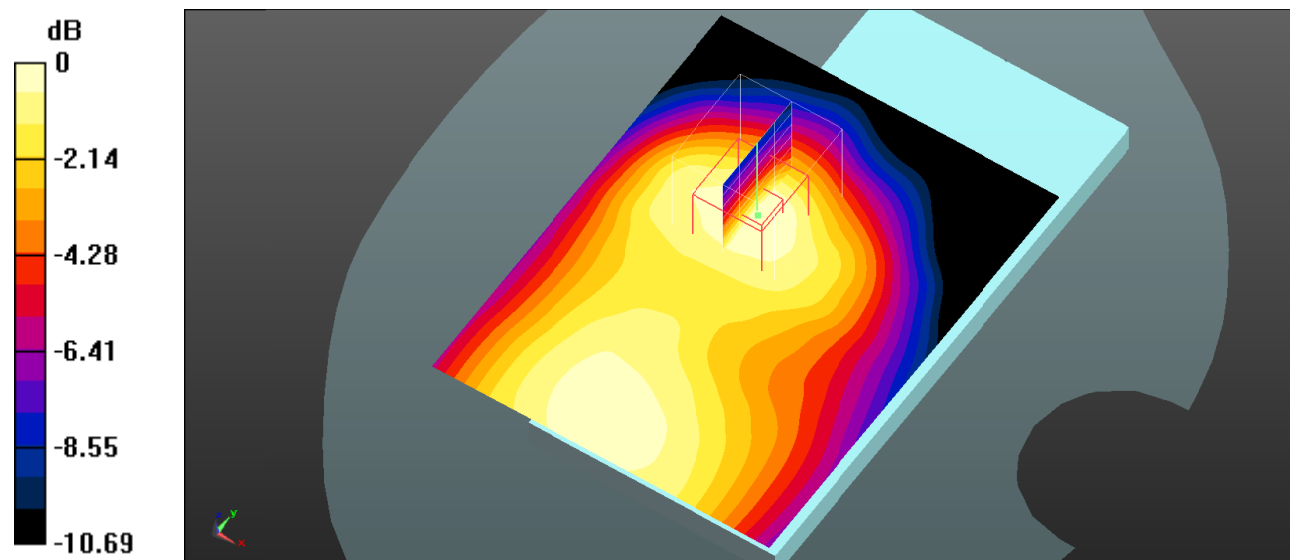

0 dB =  $0.115 \text{ W/kg}$  =  $-9.39 \text{ dBW/kg}$

**Test Plot 141#: LTE Band 5\_Body Right\_1RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 43.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.165 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.376 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.204 W/kg

**SAR(1 g) = 0.151 W/kg; SAR(10 g) = 0.110 W/kg**

Maximum value of SAR (measured) = 0.158 W/kg

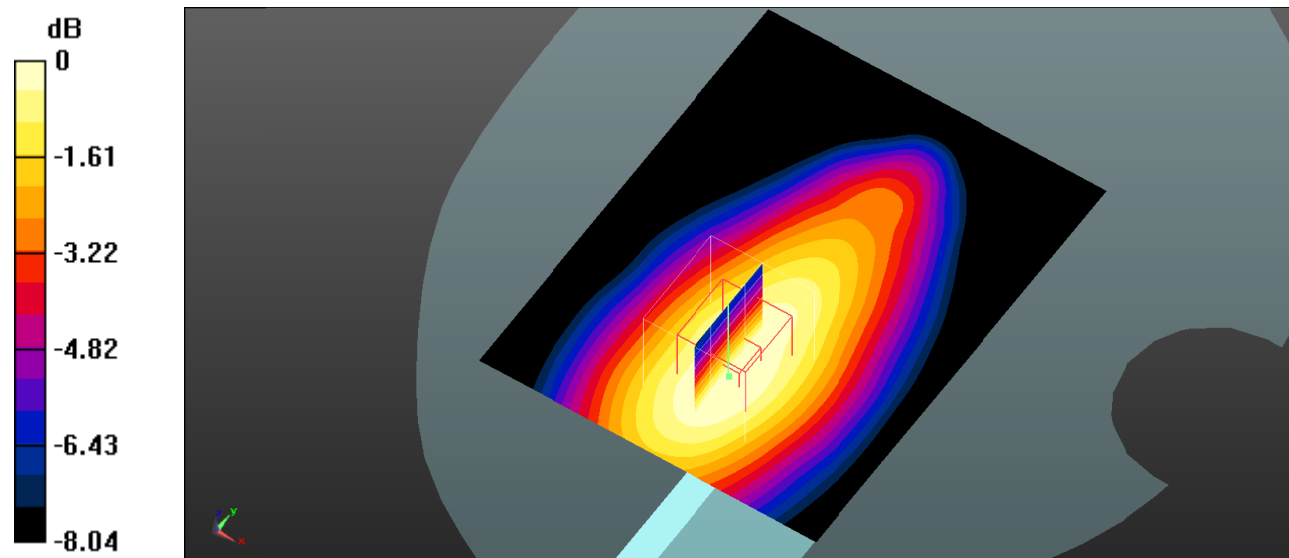

0 dB = 0.158 W/kg = -8.01 dBW/kg

**Test Plot 142#: LTE Band 5\_Body Right\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5$  MHz;  $\sigma = 0.889$  S/m;  $\epsilon_r = 43.023$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid: dx=1.500 mm, dy=1.500 mm  
 Maximum value of SAR (interpolated) = 0.125 W/kg

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
 Reference Value = 8.259 V/m; Power Drift = -0.10 dB  
 Peak SAR (extrapolated) = 0.154 W/kg  
**SAR(1 g) = 0.115 W/kg; SAR(10 g) = 0.084 W/kg**  
 Maximum value of SAR (measured) = 0.122 W/kg

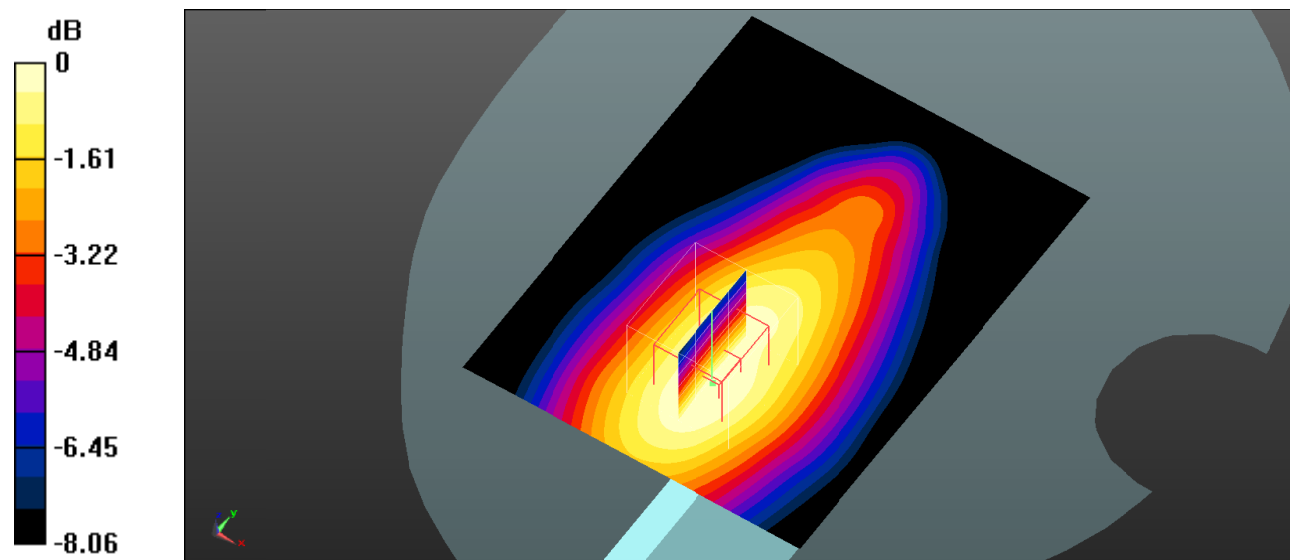

0 dB = 0.122 W/kg = -9.14 dBW/kg

**Test Plot 143#: LTE Band 5\_Body Top\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.889 \text{ S/m}$ ;  $\epsilon_r = 43.023$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.127 \text{ W/kg}$

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $11.73 \text{ V/m}$ ; Power Drift =  $-0.08 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.196 \text{ W/kg}$   
**SAR(1 g) =  $0.114 \text{ W/kg}$ ; SAR(10 g) =  $0.070 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.124 \text{ W/kg}$

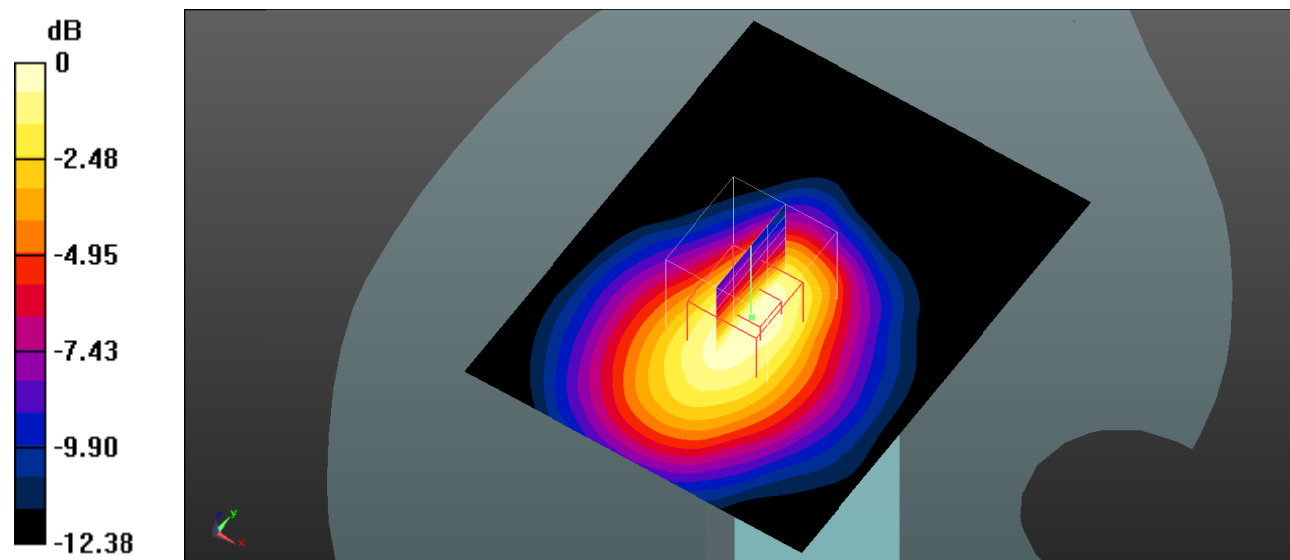

0 dB =  $0.124 \text{ W/kg}$  =  $-9.07 \text{ dBW/kg}$

**Test Plot 144#: LTE Band 5\_Body Top\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 836.5 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 836.5 \text{ MHz}$ ;  $\sigma = 0.889 \text{ S/m}$ ;  $\epsilon_r = 43.023$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(8.5, 8.5, 8.5); Calibrated: 2021/08/25;
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (71x91x1):** Interpolated grid:  $dx=1.500 \text{ mm}$ ,  $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0954 W/kg


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 10.17 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.149 W/kg

**SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.054 W/kg**

Maximum value of SAR (measured) = 0.0942 W/kg

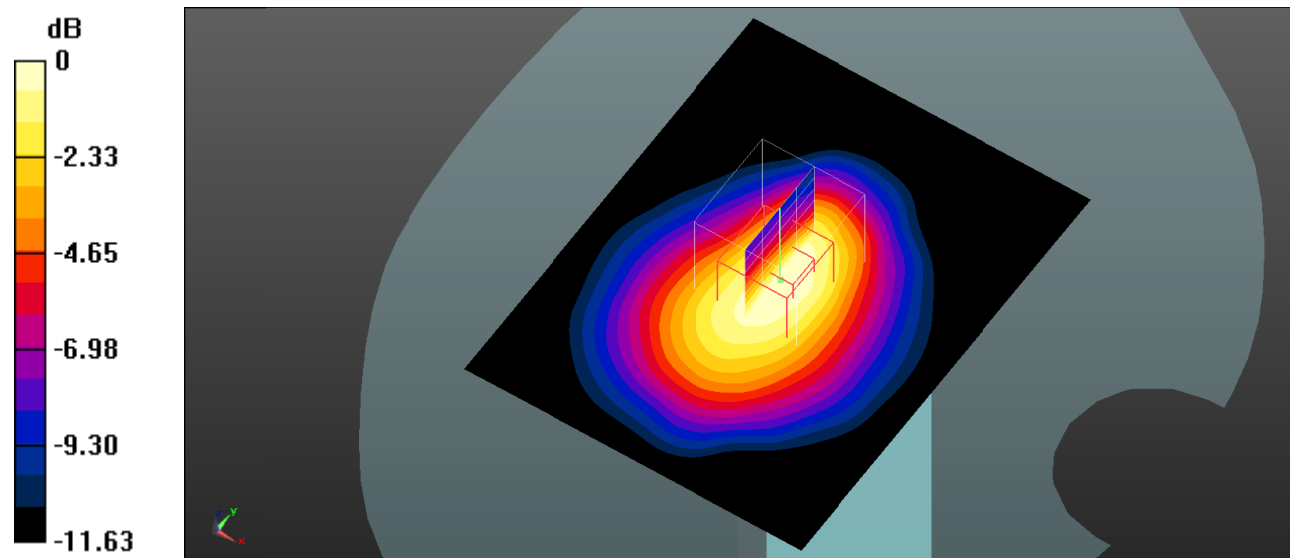

0 dB = 0.0942 W/kg = -10.26 dBW/kg



**Test Plot 145#: LTE Band 7\_Head Left Cheek\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.287 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $7.314 \text{ V/m}$ ; Power Drift =  $0.15 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.492 \text{ W/kg}$   
**SAR(1 g) =  $0.246 \text{ W/kg}$ ; SAR(10 g) =  $0.125 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.277 \text{ W/kg}$

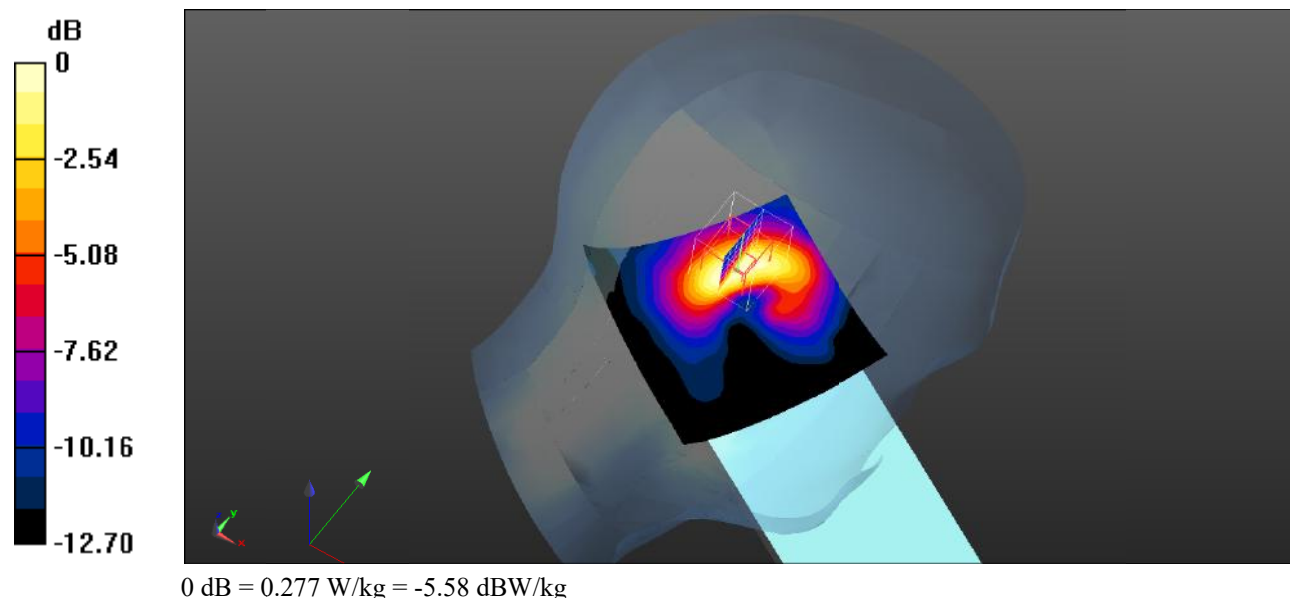

**Test Plot 146#: LTE Band 7\_Head Left Cheek\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.238 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $6.980 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$   
Peak SAR (extrapolated) =  $0.418 \text{ W/kg}$   
**SAR(1 g) =  $0.209 \text{ W/kg}$ ; SAR(10 g) =  $0.107 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.236 \text{ W/kg}$

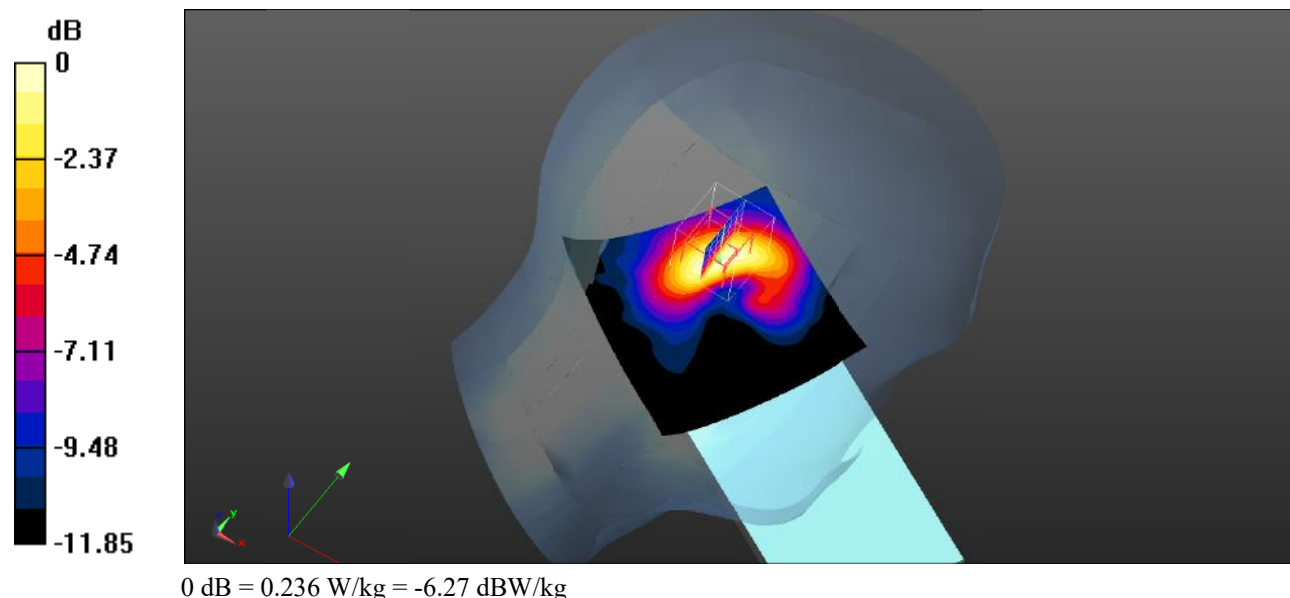

**Test Plot 147#: LTE Band 7\_Head Left Tilt\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x111x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.388 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $5.847 \text{ V/m}$ ; Power Drift =  $-0.17 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.575 \text{ W/kg}$   
**SAR(1 g) =  $0.312 \text{ W/kg}$ ; SAR(10 g) =  $0.163 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.352 \text{ W/kg}$

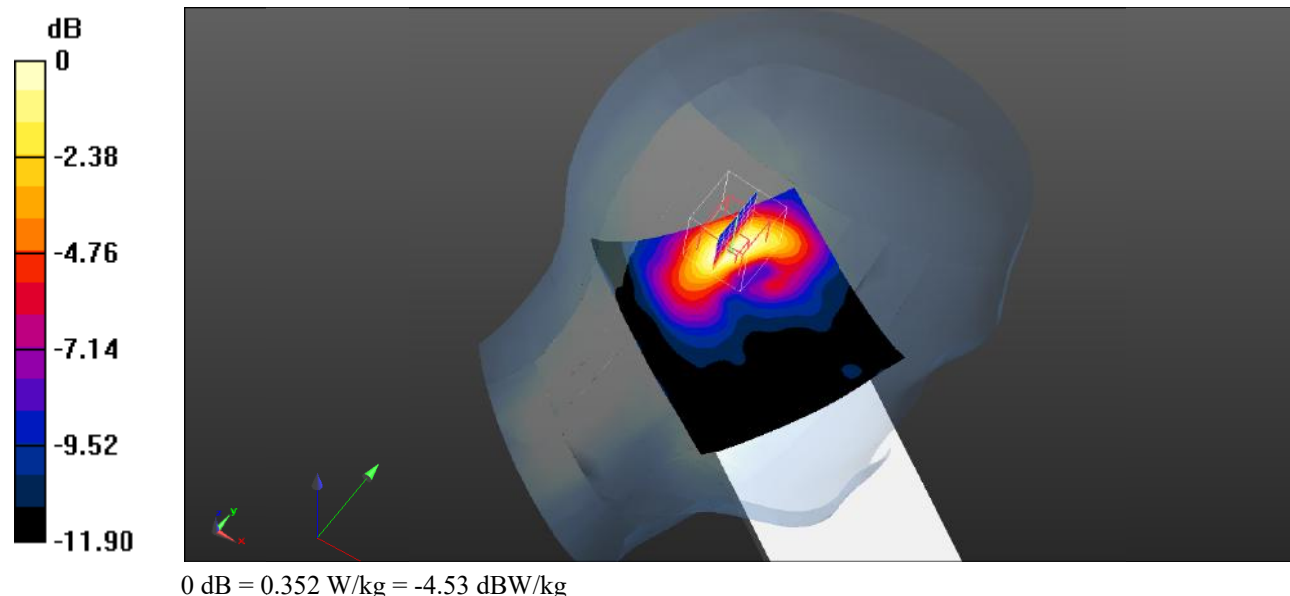

**Test Plot 148#: LTE Band 7\_Head Left Tilt\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.846$  S/m;  $\epsilon_r = 40.505$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.331 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.692 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.511 W/kg

**SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.137 W/kg**

Maximum value of SAR (measured) = 0.295 W/kg

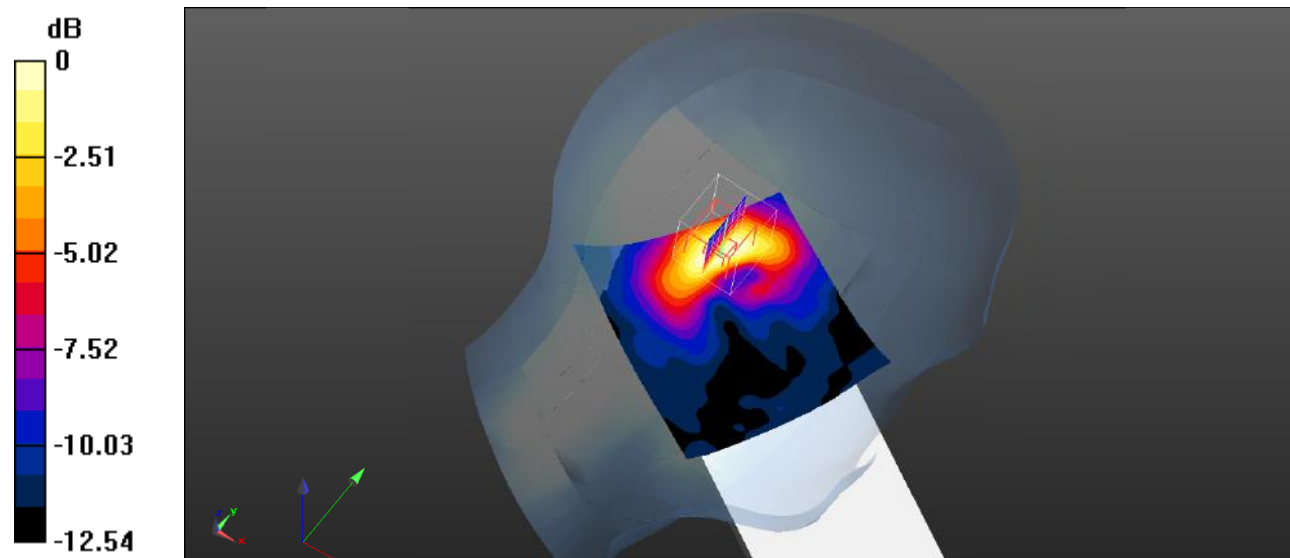

0 dB = 0.295 W/kg = -5.30 dBW/kg

**Test Plot 149#: LTE Band 7\_Head Right Cheek\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x111x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.141 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.563 \text{ V/m}$ ; Power Drift =  $0.07 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.202 \text{ W/kg}$   
**SAR(1 g) =  $0.116 \text{ W/kg}$ ; SAR(10 g) =  $0.065 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.127 \text{ W/kg}$

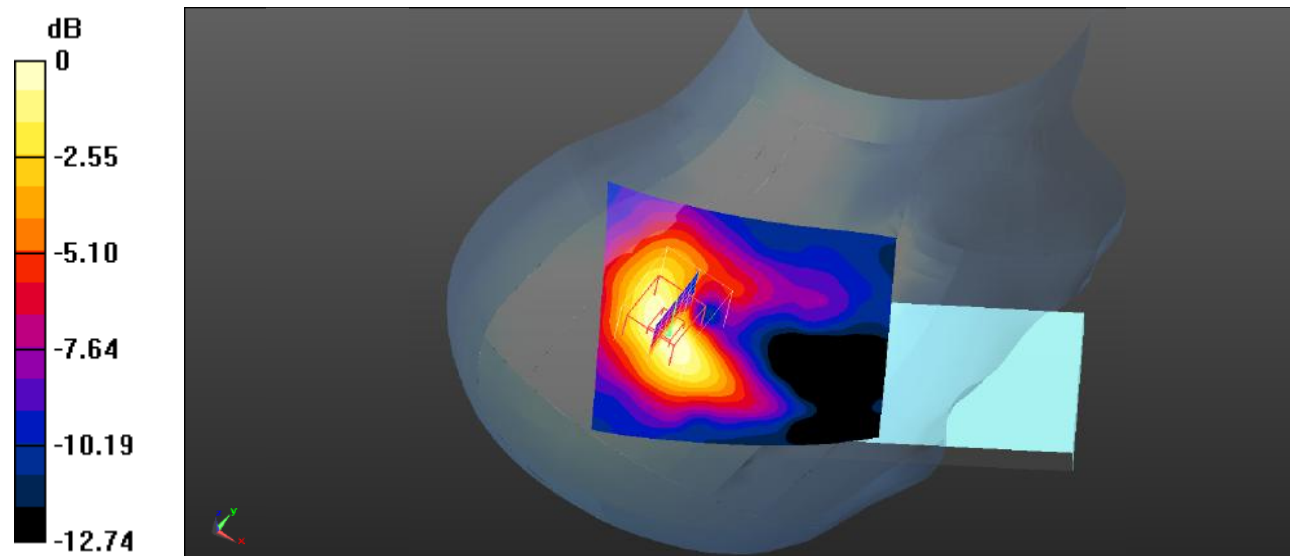

0 dB =  $0.127 \text{ W/kg}$  =  $-8.96 \text{ dBW/kg}$

**Test Plot 150#: LTE Band 7\_Head Right Cheek\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x111x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.122 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.174 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.167 \text{ W/kg}$   
**SAR(1 g) =  $0.097 \text{ W/kg}$ ; SAR(10 g) =  $0.055 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.107 \text{ W/kg}$

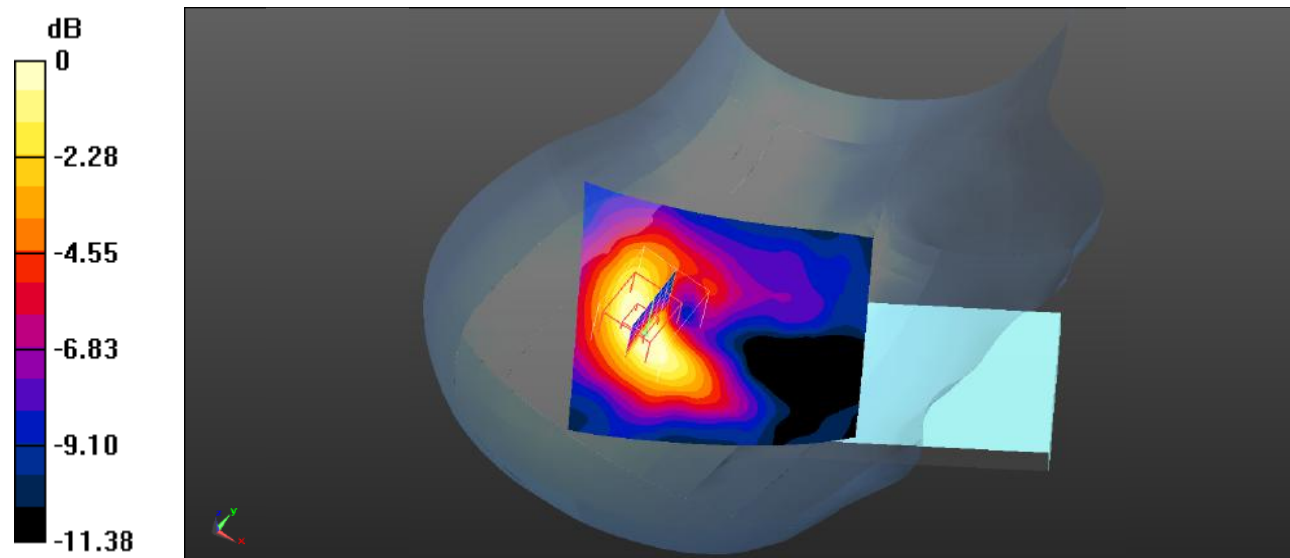

0 dB =  $0.107 \text{ W/kg}$  =  $-9.71 \text{ dBW/kg}$

**Test Plot 151#: LTE Band 7\_Head Right Tilt\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.218 \text{ W/kg}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $7.154 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$

Peak SAR (extrapolated) =  $0.309 \text{ W/kg}$

**SAR(1 g) =  $0.161 \text{ W/kg}$ ; SAR(10 g) =  $0.080 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.183 \text{ W/kg}$

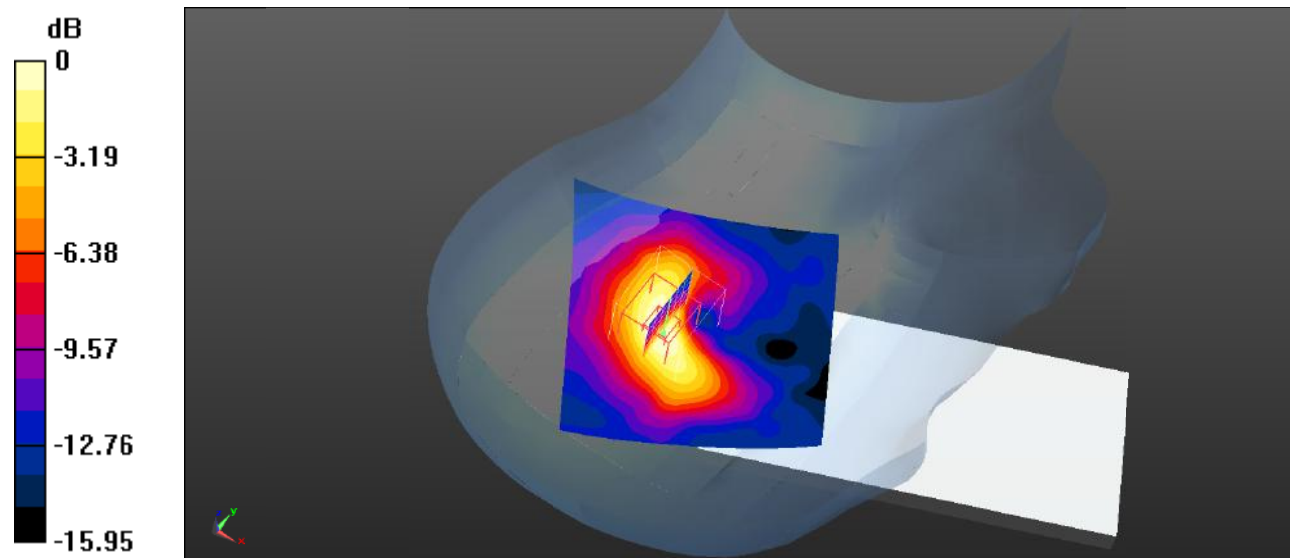

0 dB =  $0.183 \text{ W/kg}$  =  $-7.38 \text{ dBW/kg}$

**Test Plot 152#: LTE Band 7\_Head Right Tilt\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz;Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.846$  S/m;  $\epsilon_r = 40.505$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.164 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 6.316 V/m; Power Drift = -0.16 dB  
Peak SAR (extrapolated) = 0.256 W/kg  
**SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.065 W/kg**  
Maximum value of SAR (measured) = 0.150 W/kg

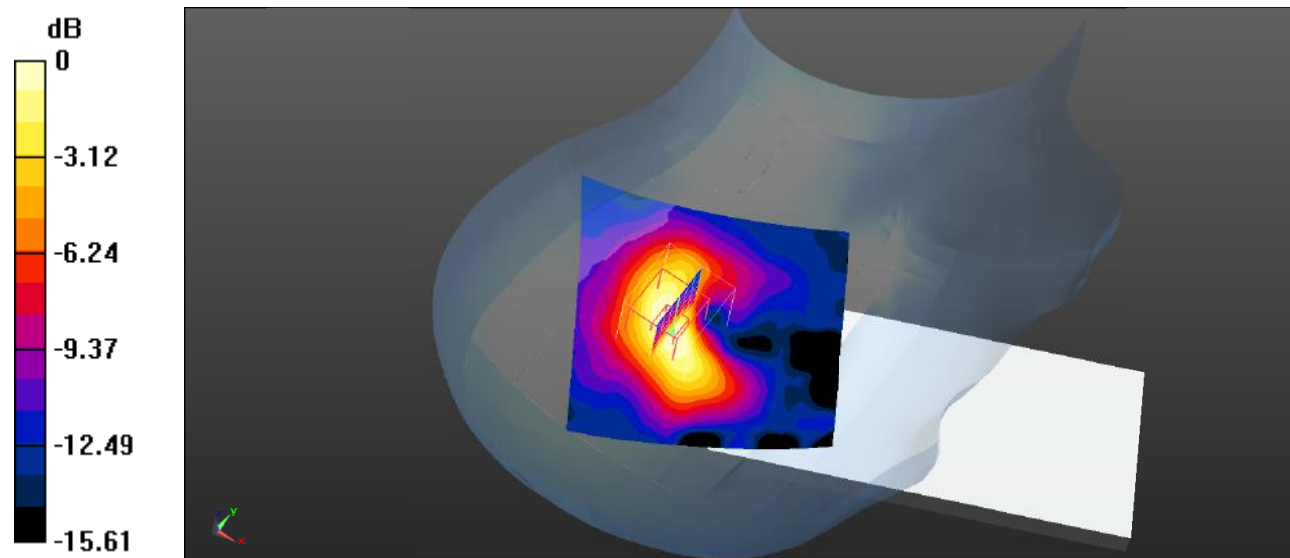

0 dB = 0.150 W/kg = -8.24 dBW/kg



**Test Plot 153#: LTE Band 7\_Body Front\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.0643 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $1.631 \text{ V/m}$ ; Power Drift =  $-0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.0980 \text{ W/kg}$   
**SAR(1 g) =  $0.058 \text{ W/kg}$ ; SAR(10 g) =  $0.036 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.0626 \text{ W/kg}$

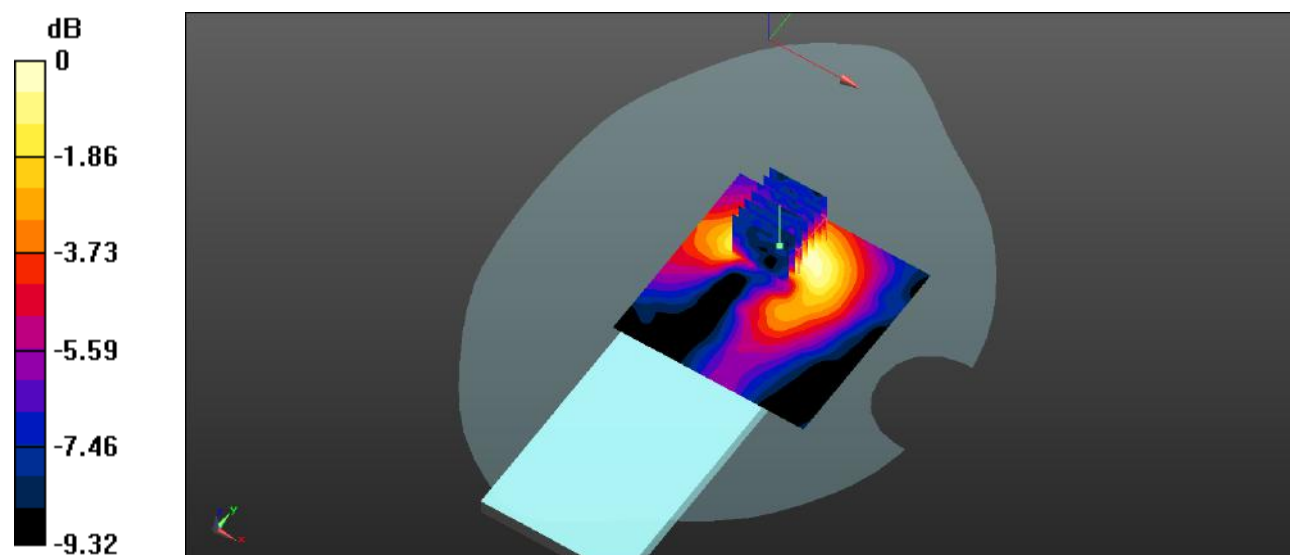

0 dB =  $0.0626 \text{ W/kg}$  =  $-12.03 \text{ dBW/kg}$

**Test Plot 154#: LTE Band 7\_Body Front\_1RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.846$  S/m;  $\epsilon_r = 40.505$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0530 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.954 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.0860 W/kg

**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.0500 W/kg

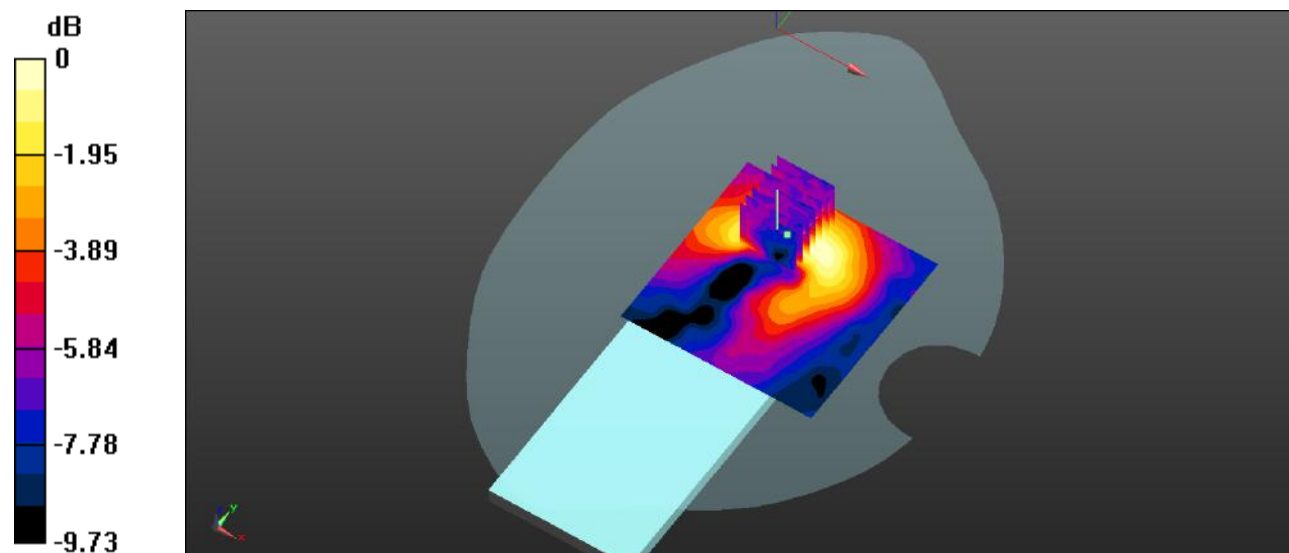

0 dB = 0.0500 W/kg = -13.01 dBW/kg

**Test Plot 155#: LTE Band 7\_Body Back\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.402 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $5.847 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.547 \text{ W/kg}$   
**SAR(1 g) =  $0.311 \text{ W/kg}$ ; SAR(10 g) =  $0.155 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.359 \text{ W/kg}$

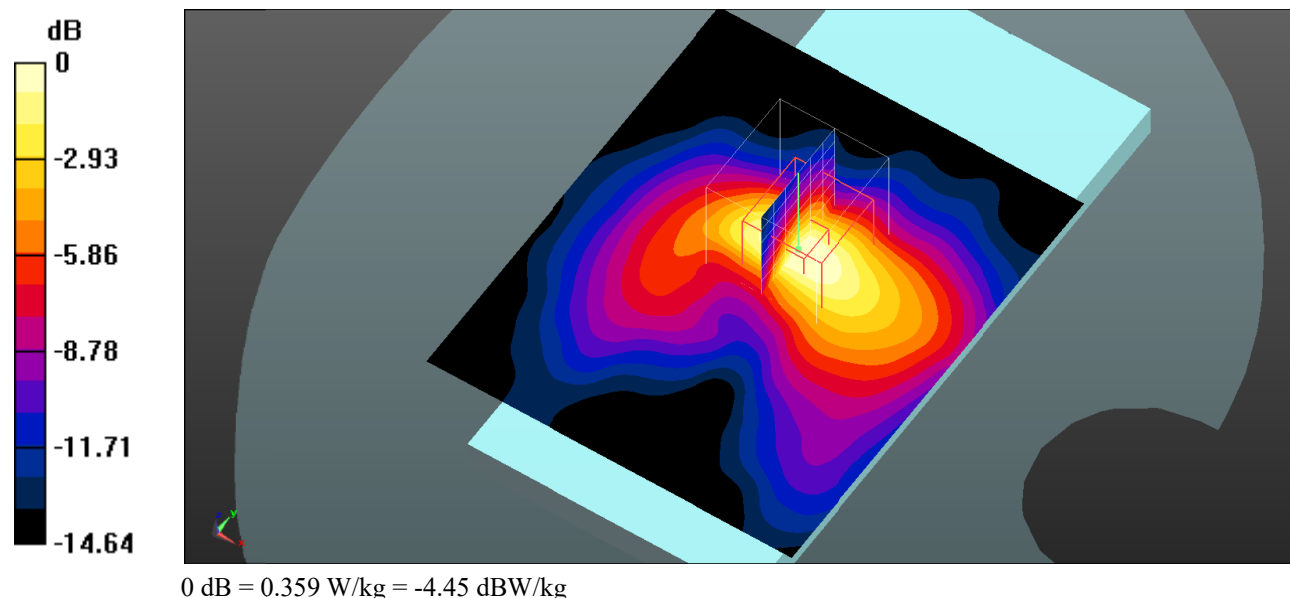

**Test Plot 156#: LTE Band 7\_Body Back\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.334 \text{ W/kg}$


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $5.622 \text{ V/m}$ ; Power Drift =  $-0.13 \text{ dB}$

Peak SAR (extrapolated) =  $0.462 \text{ W/kg}$

**SAR(1 g) =  $0.264 \text{ W/kg}$ ; SAR(10 g) =  $0.132 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.303 \text{ W/kg}$

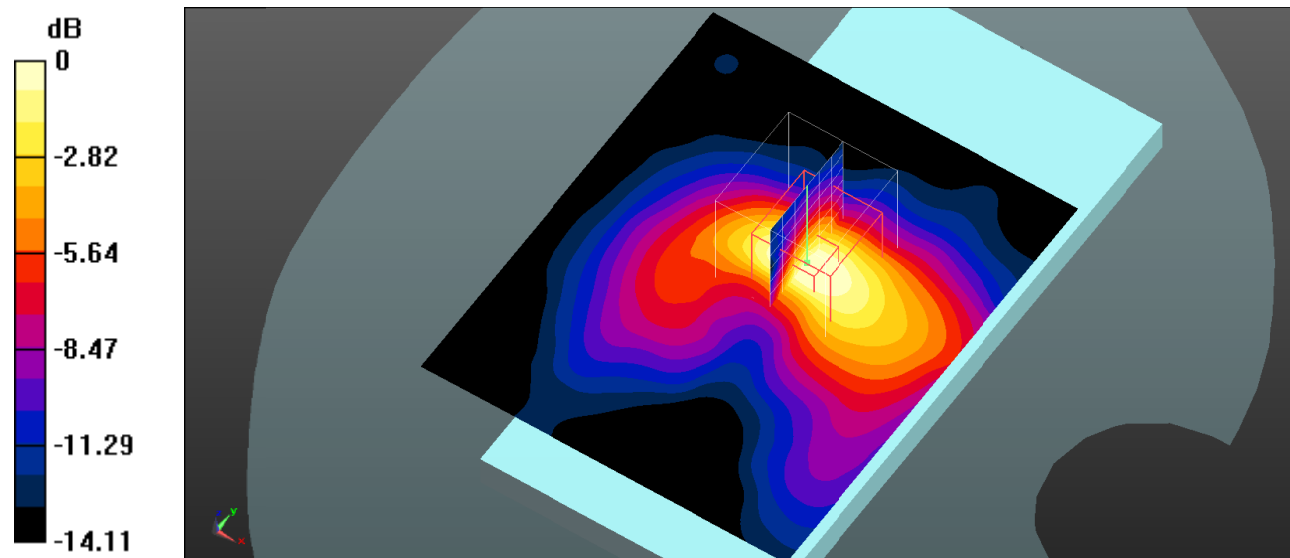

0 dB =  $0.303 \text{ W/kg}$  =  $-5.19 \text{ dBW/kg}$

**Test Plot 157#: LTE Band 7\_Body Right\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0560 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.777 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.0710 W/kg

**SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.029 W/kg**

Maximum value of SAR (measured) = 0.0512 W/kg

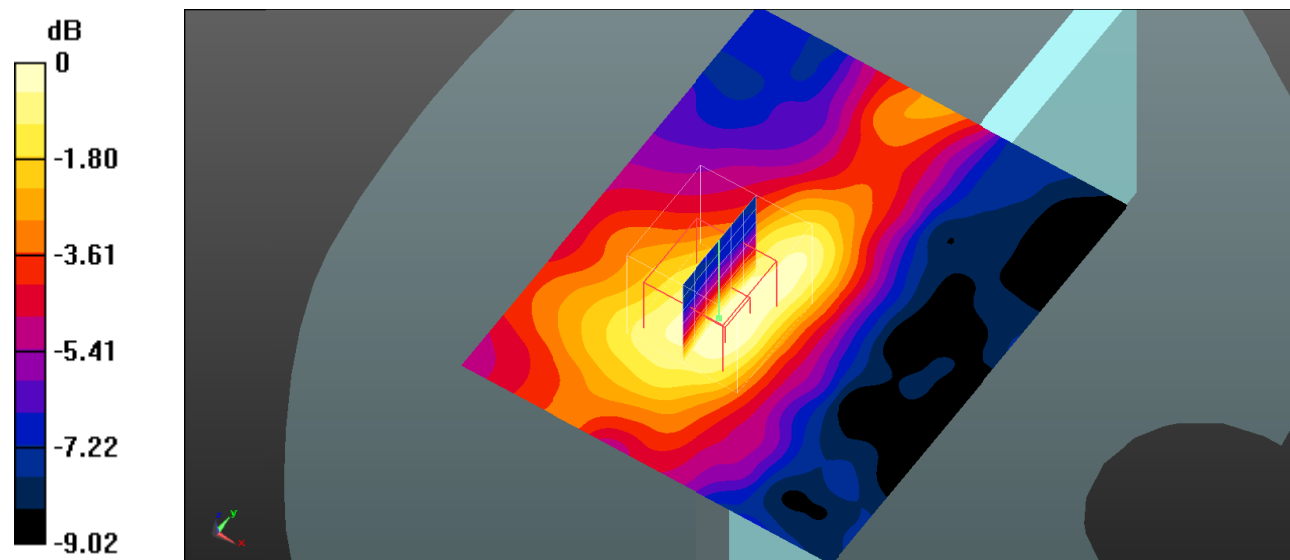

0 dB = 0.0512 W/kg = -12.91 dBW/kg

**Test Plot 158#: LTE Band 7\_Body Right\_50%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
Medium parameters used:  $f = 2535$  MHz;  $\sigma = 1.846$  S/m;  $\epsilon_r = 40.505$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0475 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 4.285 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 0.0660 W/kg

**SAR(1 g) = 0.041 W/kg; SAR(10 g) = 0.026 W/kg**

Maximum value of SAR (measured) = 0.0432 W/kg

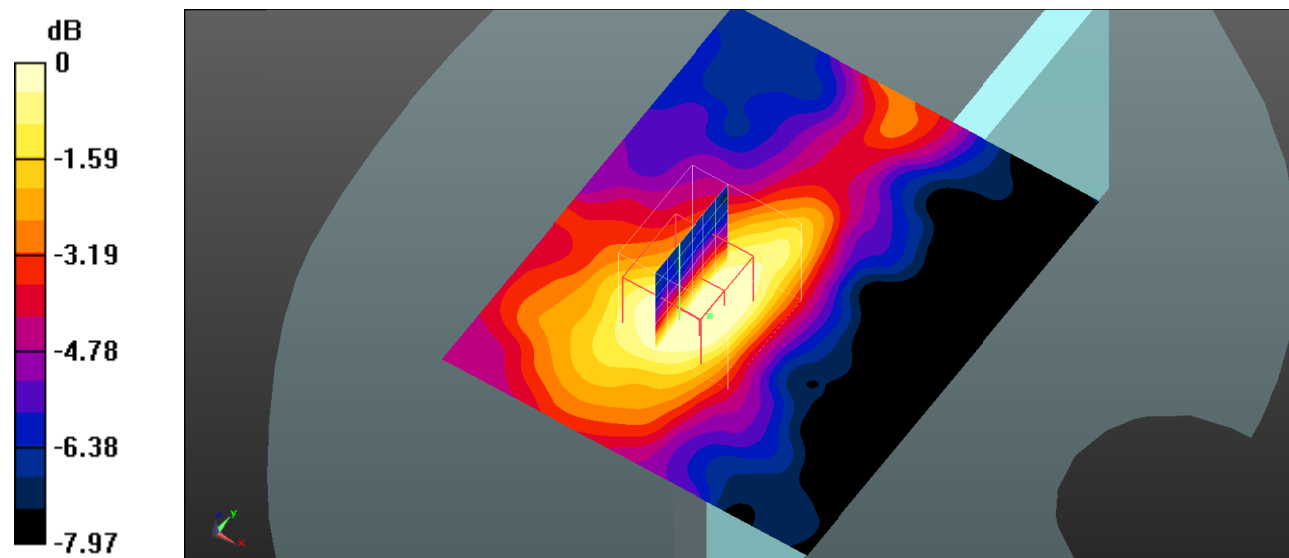

0 dB = 0.0432 W/kg = -13.65 dBW/kg

**Test Plot 159#: LTE Band 7\_Body Bottom\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.268 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $4.445 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.399 \text{ W/kg}$   
**SAR(1 g) =  $0.221 \text{ W/kg}$ ; SAR(10 g) =  $0.112 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.249 \text{ W/kg}$

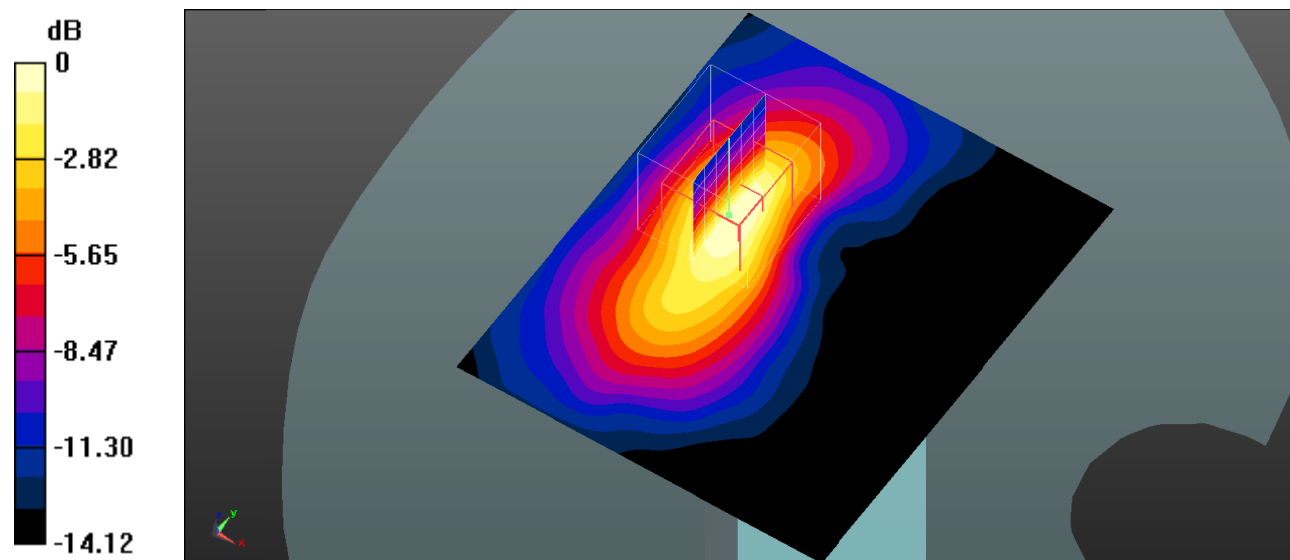

0 dB =  $0.249 \text{ W/kg}$  =  $-6.04 \text{ dBW/kg}$

**Test Plot 160#: LTE Band 7\_Body Bottom\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic FDD-LTE; Frequency: 2535 MHz; Duty Cycle: 1:1  
 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.846 \text{ S/m}$ ;  $\epsilon_r = 40.505$ ;  $\rho = 1000 \text{ kg/m}^3$  ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x121x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.217 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value =  $3.929 \text{ V/m}$ ; Power Drift =  $-0.12 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.346 \text{ W/kg}$   
**SAR(1 g) =  $0.187 \text{ W/kg}$ ; SAR(10 g) =  $0.095 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.209 \text{ W/kg}$

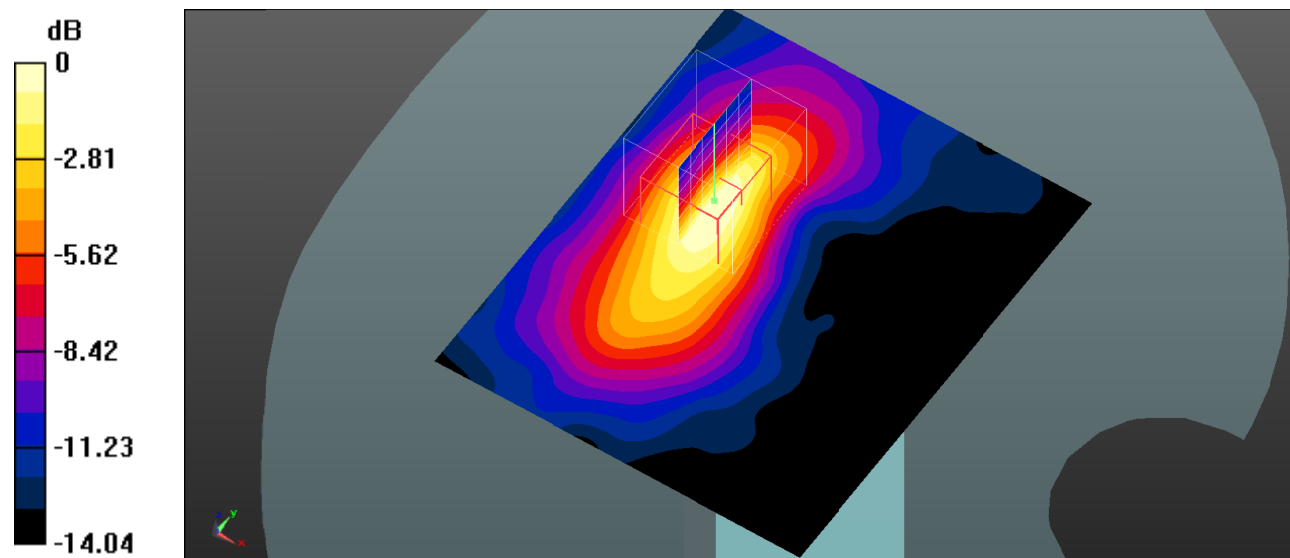

0 dB =  $0.209 \text{ W/kg}$  =  $-6.80 \text{ dBW/kg}$



**Test Plot 161#: LTE Band 41\_Head Left Cheek\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.181 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 3.513 V/m; Power Drift = -0.15 dB  
 Peak SAR (extrapolated) = 0.305 W/kg  
**SAR(1 g) = 0.165 W/kg; SAR(10 g) = 0.090 W/kg**  
 Maximum value of SAR (measured) = 0.181 W/kg

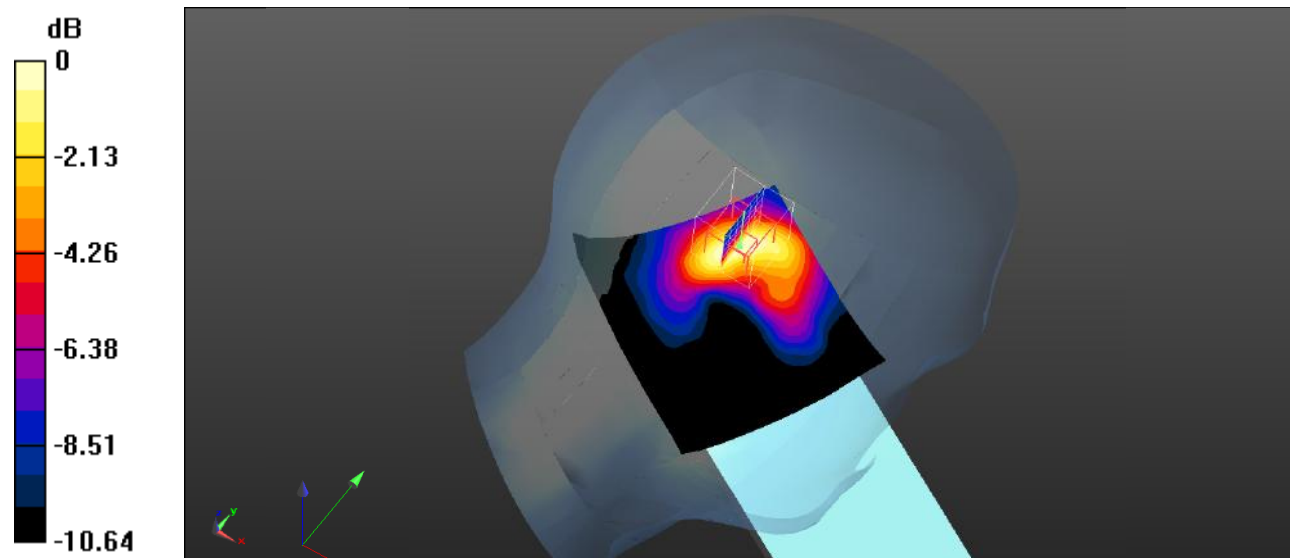

0 dB = 0.181 W/kg = -7.42 dBW/kg

**Test Plot 162#: LTE Band 41\_Head Left Cheek\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.153 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 2.843 V/m; Power Drift = 0.09 dB  
 Peak SAR (extrapolated) = 0.232 W/kg  
**SAR(1 g) = 0.133 W/kg; SAR(10 g) = 0.074 W/kg**  
 Maximum value of SAR (measured) = 0.147 W/kg

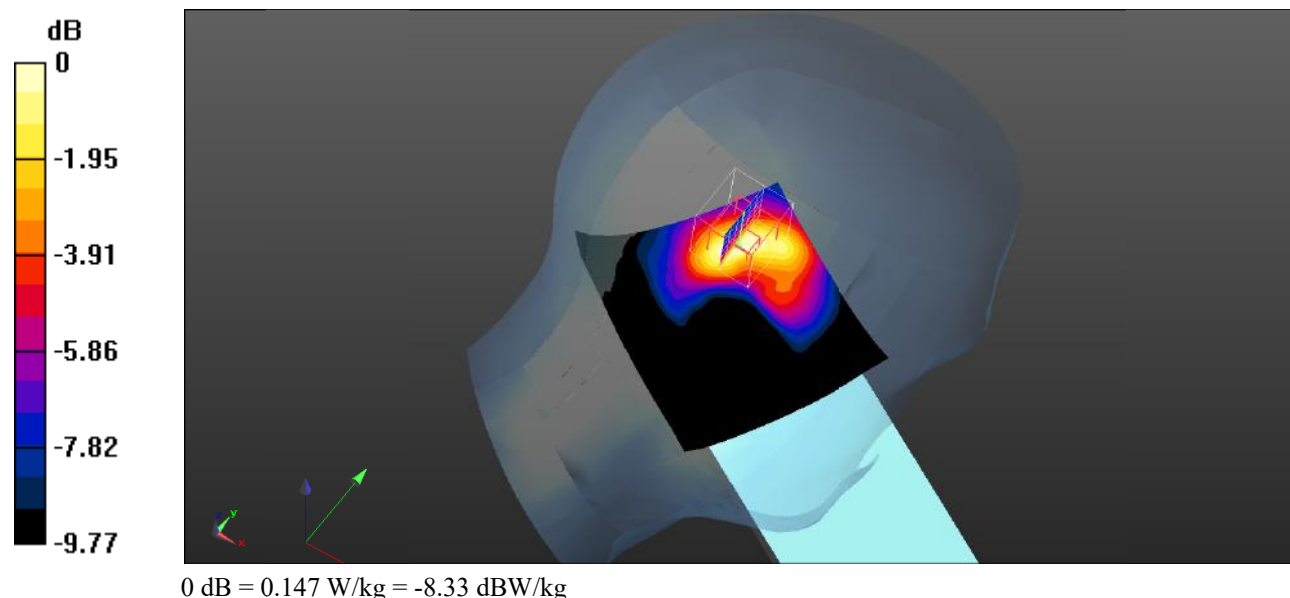

**Test Plot 163#: LTE Band 41\_Head Left Tilt\_1RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.299 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.333 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.496 W/kg

**SAR(1 g) = 0.260 W/kg; SAR(10 g) = 0.132 W/kg**

Maximum value of SAR (measured) = 0.294 W/kg

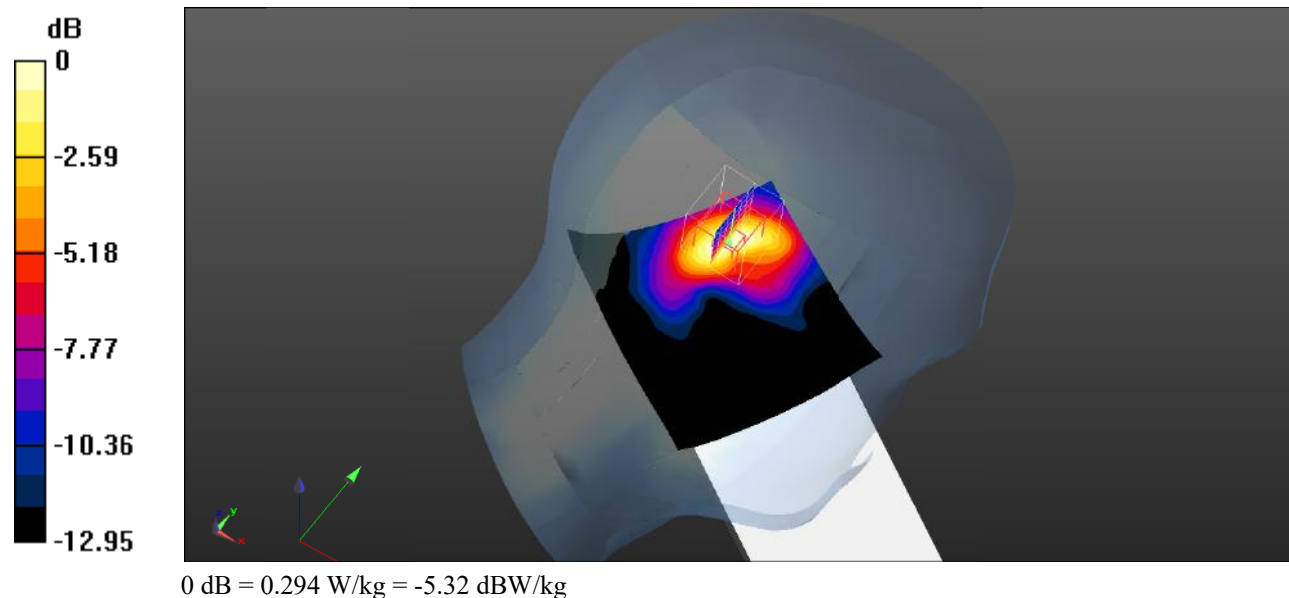

**Test Plot 164#: LTE Band 41\_Head Left Tilt\_50%RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.261 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.146 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.398 W/kg

**SAR(1 g) = 0.214 W/kg; SAR(10 g) = 0.110 W/kg**

Maximum value of SAR (measured) = 0.242 W/kg

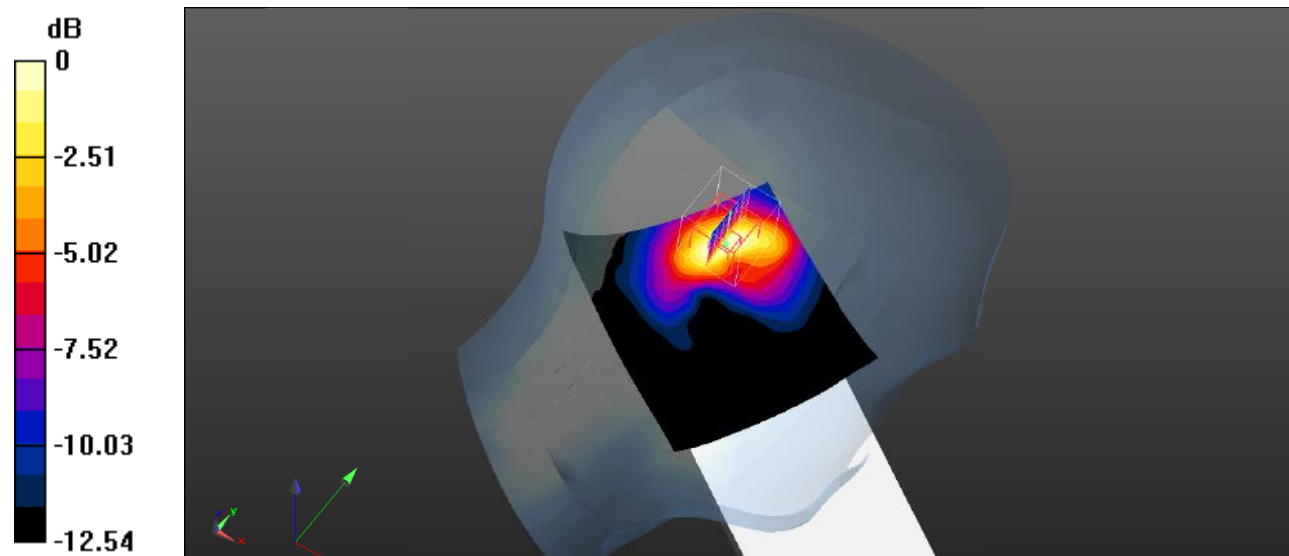

0 dB = 0.242 W/kg = -6.16 dBW/kg

**Test Plot 165#: LTE Band 41\_Head Right Cheek\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.108 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 3.211 V/m; Power Drift = -1.18 dB  
Peak SAR (extrapolated) = 0.149 W/kg  
**SAR(1 g) = 0.092 W/kg; SAR(10 g) = 0.051 W/kg**  
Maximum value of SAR (measured) = 0.102 W/kg

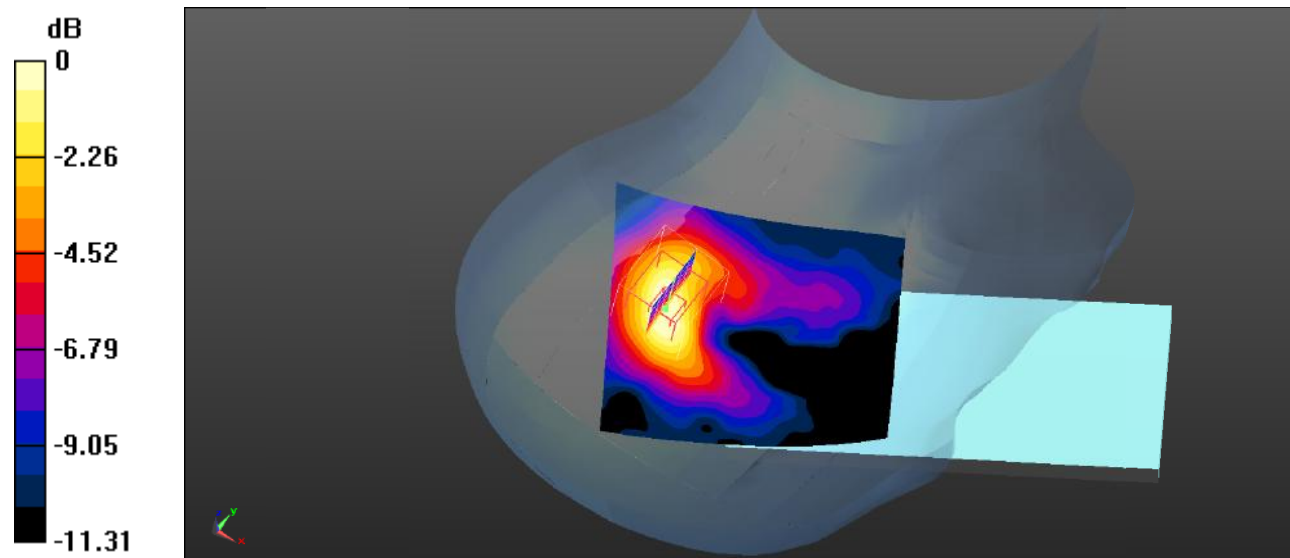

0 dB = 0.102 W/kg = -9.91 dBW/kg

**Test Plot 166#: LTE Band 41\_Head Right Cheek\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x111x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.0869 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 2.454 V/m; Power Drift = 0.05 dB  
 Peak SAR (extrapolated) = 0.118 W/kg  
**SAR(1 g) = 0.073 W/kg; SAR(10 g) = 0.042 W/kg**  
 Maximum value of SAR (measured) = 0.0791 W/kg

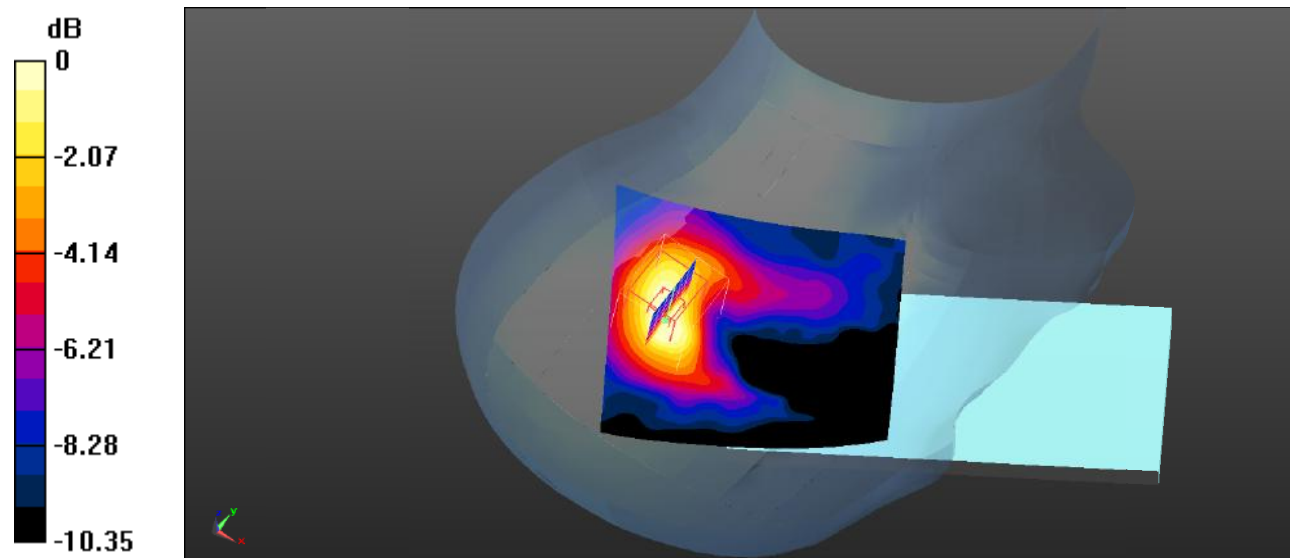

0 dB = 0.0791 W/kg = -11.02 dBW/kg

**Test Plot 167#: LTE Band 41\_Head Right Tilt\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x121x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.123 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 5.371 V/m; Power Drift = -0.09 dB  
 Peak SAR (extrapolated) = 0.200 W/kg  
**SAR(1 g) = 0.105 W/kg; SAR(10 g) = 0.053 W/kg**  
 Maximum value of SAR (measured) = 0.117 W/kg

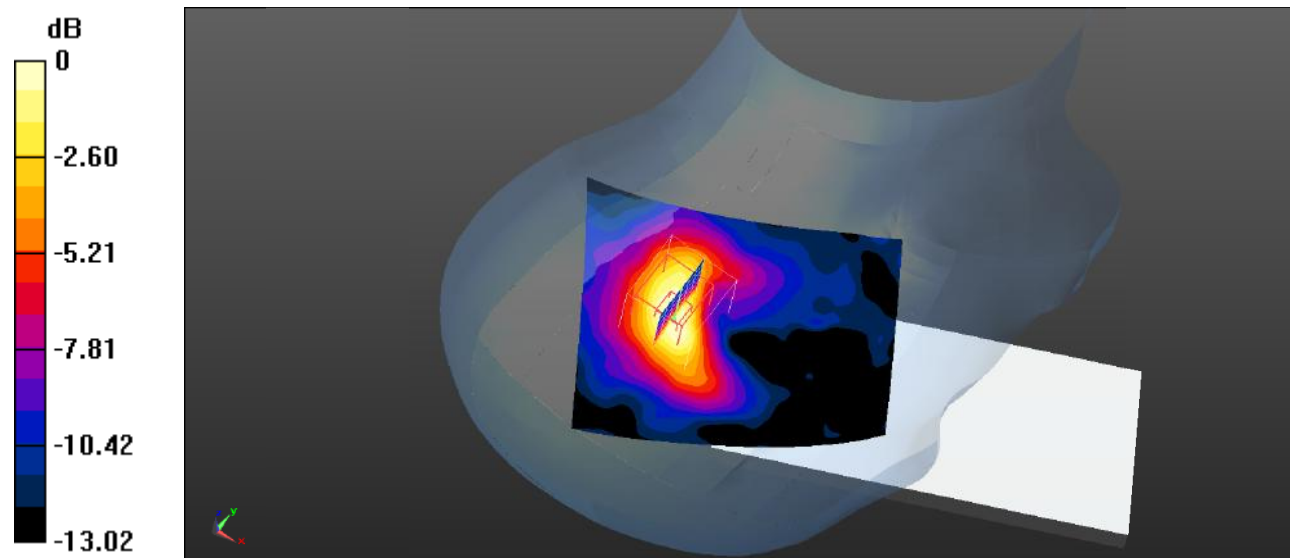

0 dB = 0.117 W/kg = -9.32 dBW/kg

**Test Plot 168#: LTE Band 41\_Head Right Tilt\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.0996 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 4.531 V/m; Power Drift = -0.19 dB  
 Peak SAR (extrapolated) = 0.164 W/kg  
**SAR(1 g) = 0.085 W/kg; SAR(10 g) = 0.043 W/kg**  
 Maximum value of SAR (measured) = 0.0939 W/kg

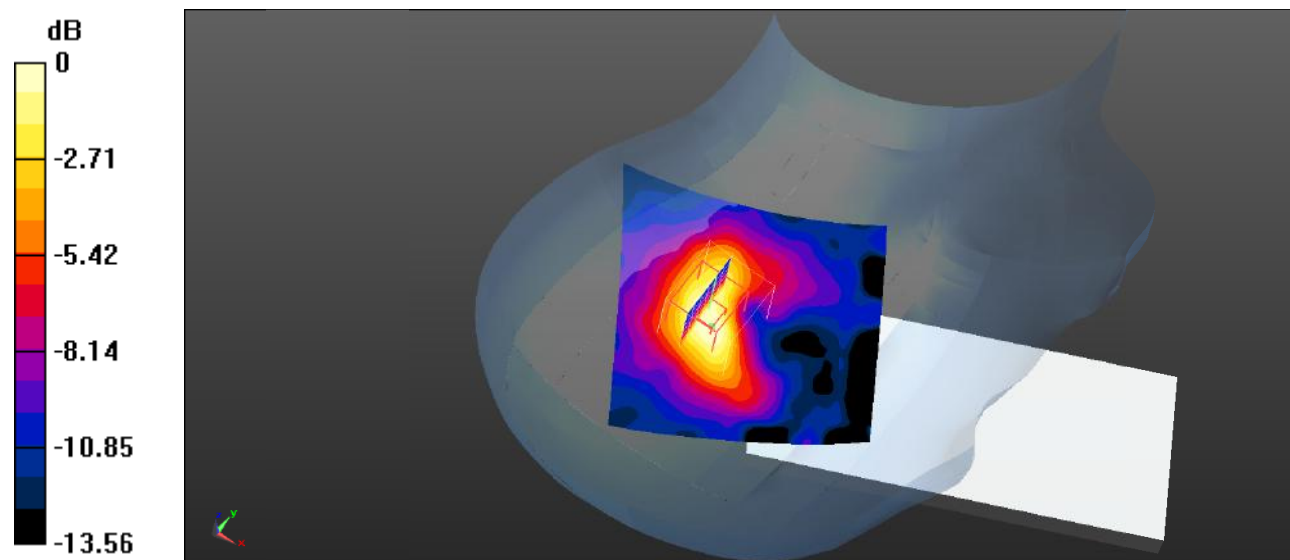

0 dB = 0.0939 W/kg = -10.27 dBW/kg



**Test Plot 169#: LTE Band 41\_Body Front\_1RB\_Mid****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0477 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.336 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.268 W/kg

**SAR(1 g) = 0.048 W/kg; SAR(10 g) = 0.016 W/kg**

Maximum value of SAR (measured) = 0.0452 W/kg

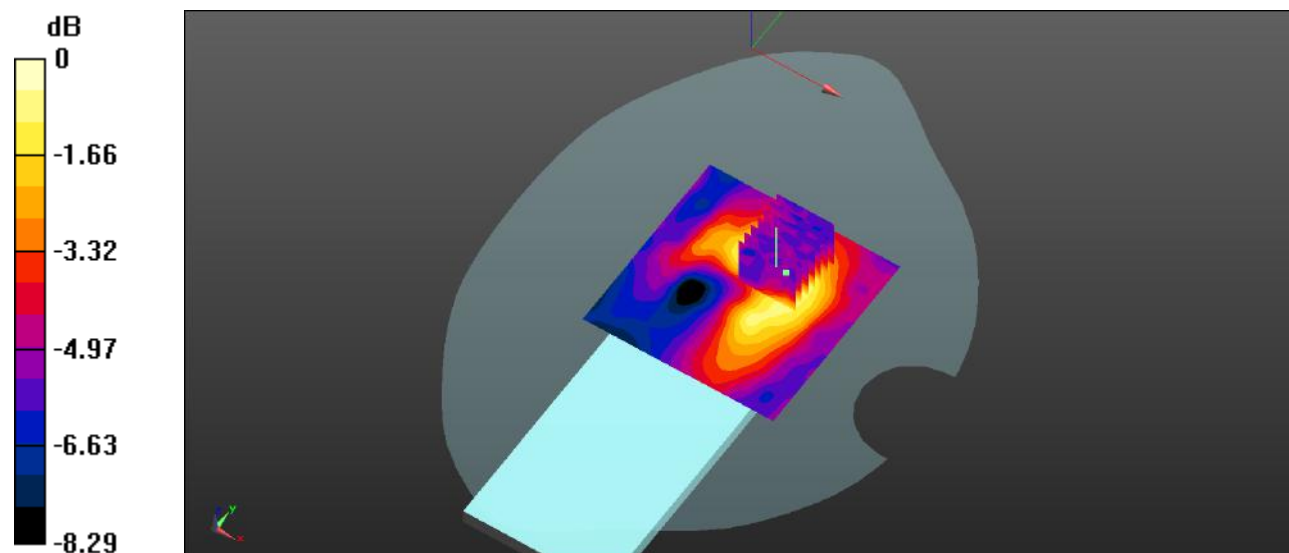

**Test Plot 170#: LTE Band 41\_Body Front\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.0386 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 2.354 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 0.0640 W/kg  
**SAR(1 g) = 0.035 W/kg; SAR(10 g) = 0.024 W/kg**  
Maximum value of SAR (measured) = 0.0375 W/kg

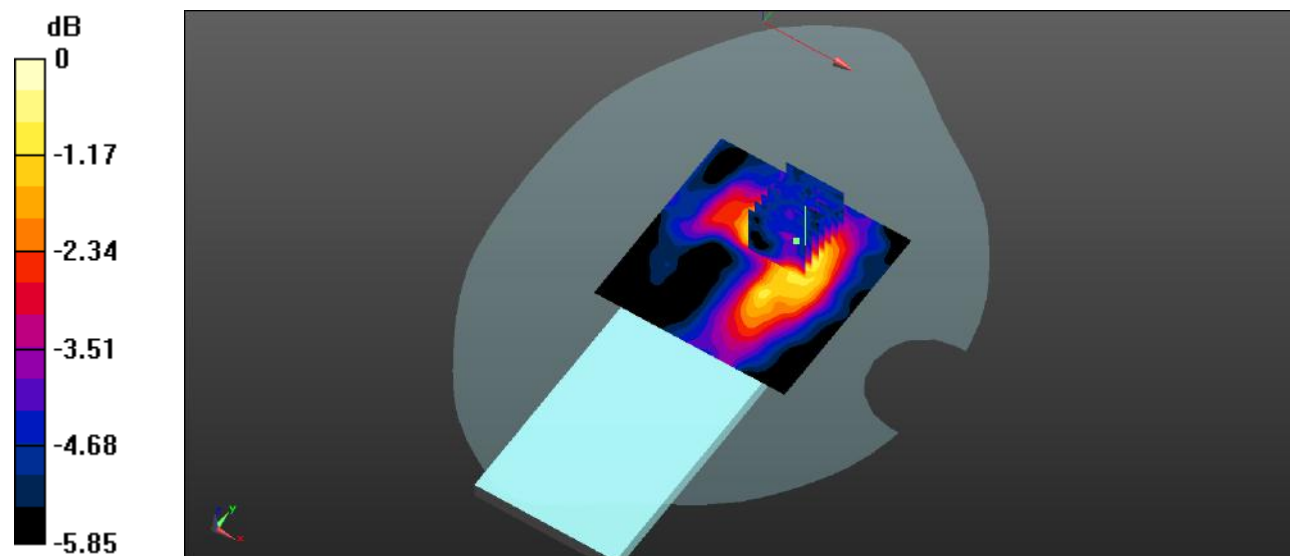

0 dB = 0.0375 W/kg = -14.26 dBW/kg

**Test Plot 171#: LTE Band 41\_Body Back\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.242 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.396 V/m; Power Drift = -0.10 dB  
Peak SAR (extrapolated) = 0.364 W/kg  
**SAR(1 g) = 0.209 W/kg; SAR(10 g) = 0.105 W/kg**  
Maximum value of SAR (measured) = 0.240 W/kg

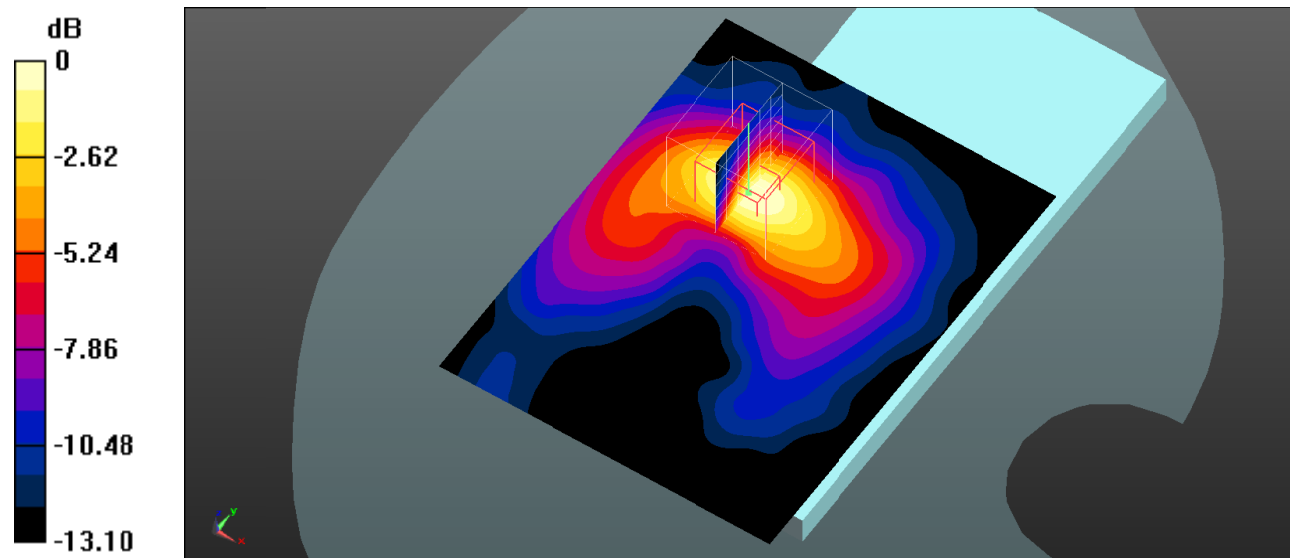

0 dB = 0.240 W/kg = -6.20 dBW/kg

**Test Plot 172#: LTE Band 41\_Body Back\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.211 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 3.884 V/m; Power Drift = -0.54 dB  
Peak SAR (extrapolated) = 0.306 W/kg  
**SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.088 W/kg**  
Maximum value of SAR (measured) = 0.195 W/kg

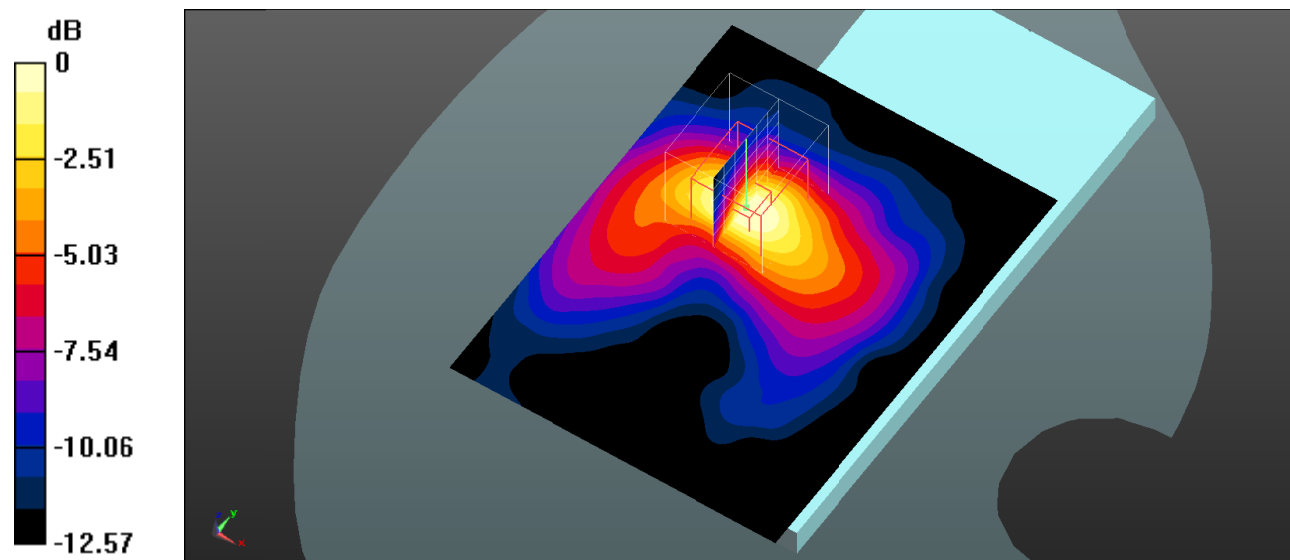

0 dB = 0.195 W/kg = -7.10 dBW/kg

**Test Plot 173#: LTE Band 41\_Body Right\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.0503 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 4.309 V/m; Power Drift = -0.12 dB  
Peak SAR (extrapolated) = 0.0680 W/kg  
**SAR(1 g) = 0.043 W/kg; SAR(10 g) = 0.026 W/kg**  
Maximum value of SAR (measured) = 0.0464 W/kg

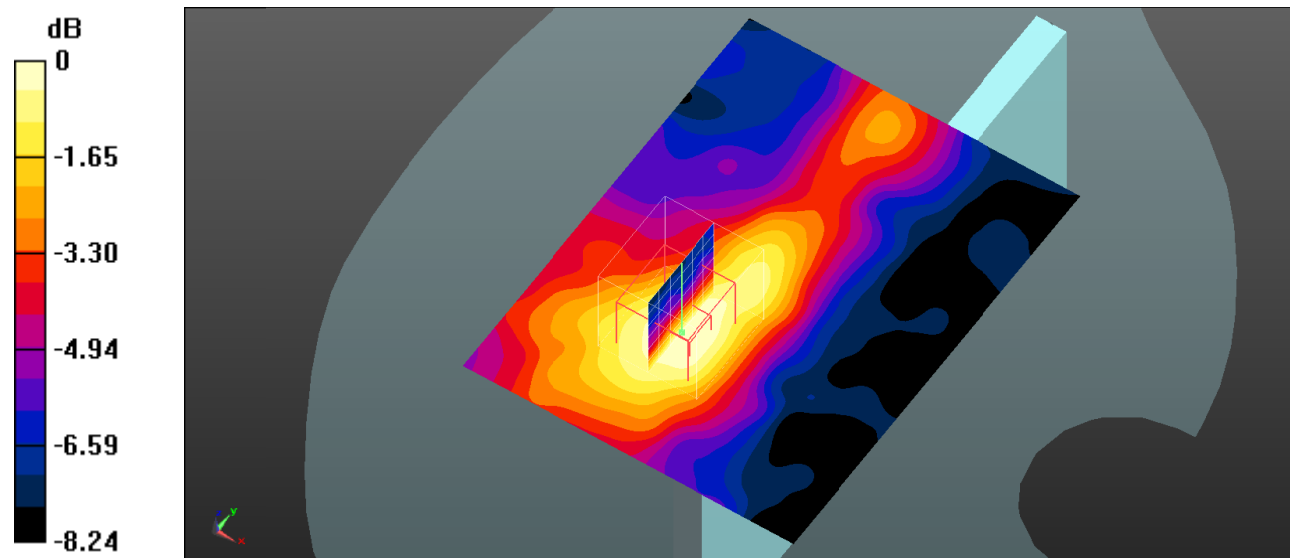

0 dB = 0.0464 W/kg = -13.33 dBW/kg

**Test Plot 174#: LTE Band 41\_Body Right\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
 Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
 Maximum value of SAR (interpolated) = 0.0426 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 3.751 V/m; Power Drift = -0.04 dB  
 Peak SAR (extrapolated) = 0.131 W/kg  
**SAR(1 g) = 0.036 W/kg; SAR(10 g) = 0.023 W/kg**  
 Maximum value of SAR (measured) = 0.0375 W/kg

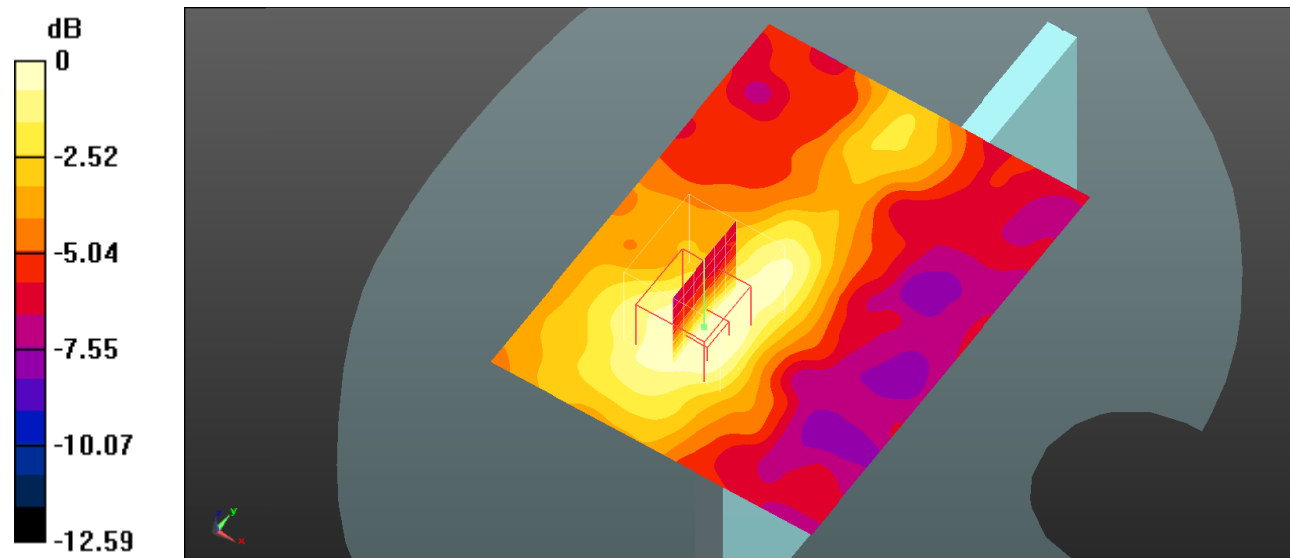

0 dB = 0.0375 W/kg = -14.26 dBW/kg

**Test Plot 175#: LTE Band 41\_Body Top\_1RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.226 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 5.795 V/m; Power Drift = -0.15 dB  
Peak SAR (extrapolated) = 0.346 W/kg  
**SAR(1 g) = 0.190 W/kg; SAR(10 g) = 0.096 W/kg**  
Maximum value of SAR (measured) = 0.211 W/kg

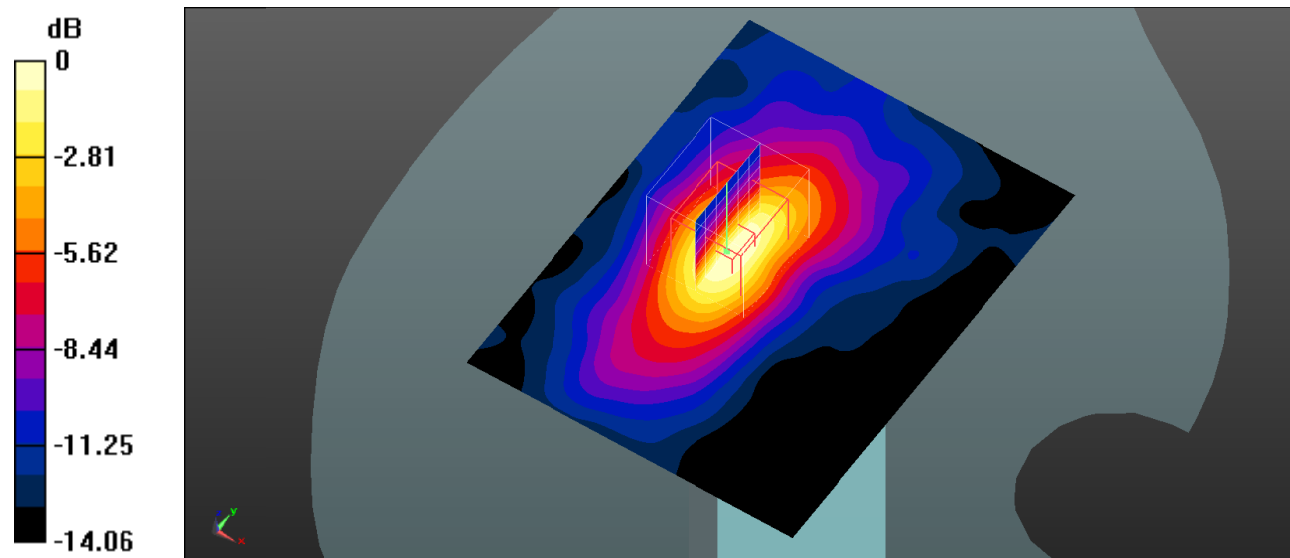

0 dB = 0.211 W/kg = -6.76 dBW/kg

**Test Plot 176#: LTE Band 41\_Body Top\_50%RB\_Mid**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: Generic TDD-LTE; Frequency: 2595 MHz; Duty Cycle: 1:1.58  
Medium parameters used:  $f = 2595$  MHz;  $\sigma = 1.952$  S/m;  $\epsilon_r = 39.60$ ;  $\rho = 1000$  kg/m<sup>3</sup> ;  
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.53, 6.53, 6.53); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x131x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm  
Maximum value of SAR (interpolated) = 0.191 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm  
Reference Value = 5.224 V/m; Power Drift = -0.11 dB  
Peak SAR (extrapolated) = 0.278 W/kg  
**SAR(1 g) = 0.155 W/kg; SAR(10 g) = 0.079 W/kg**  
Maximum value of SAR (measured) = 0.173 W/kg

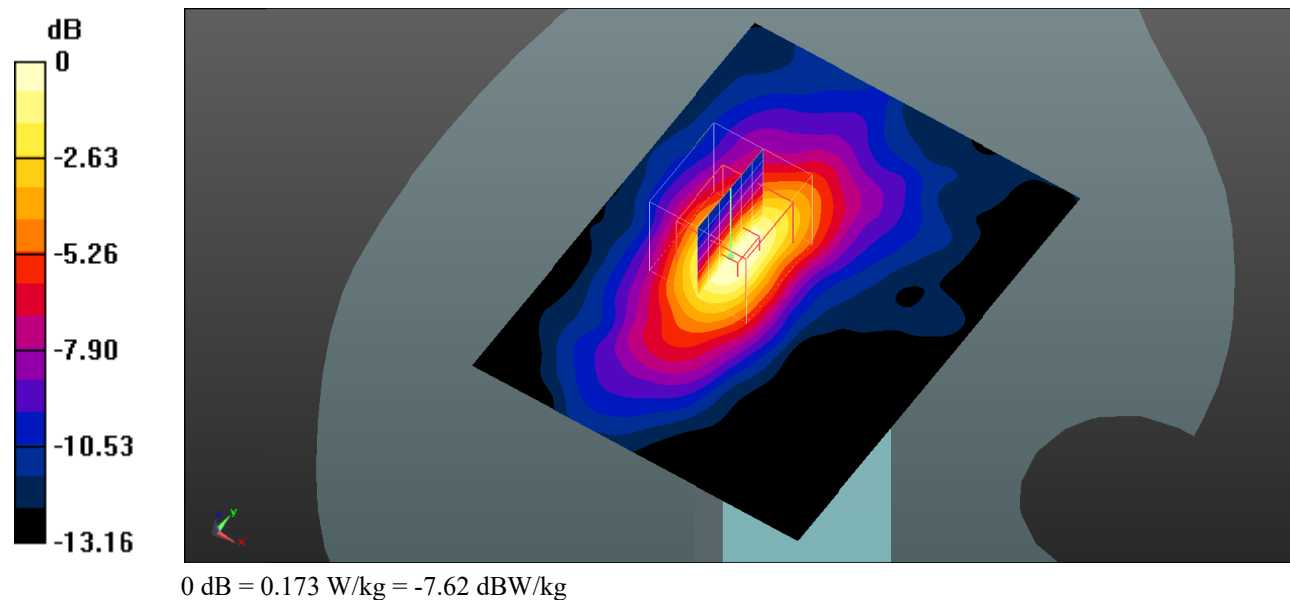



**Test Plot 177#: 2.4G WLAN 802.11b\_Head Left Cheek\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.732 \text{ S/m}$ ;  $\epsilon_r = 40.750$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0992 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 5.039 V/m; Power Drift = 0.03 dB  
 Peak SAR (extrapolated) = 0.124 W/kg  
**SAR(1 g) = 0.087 W/kg; SAR(10 g) = 0.063 W/kg**  
 Maximum value of SAR (measured) = 0.0925 W/kg

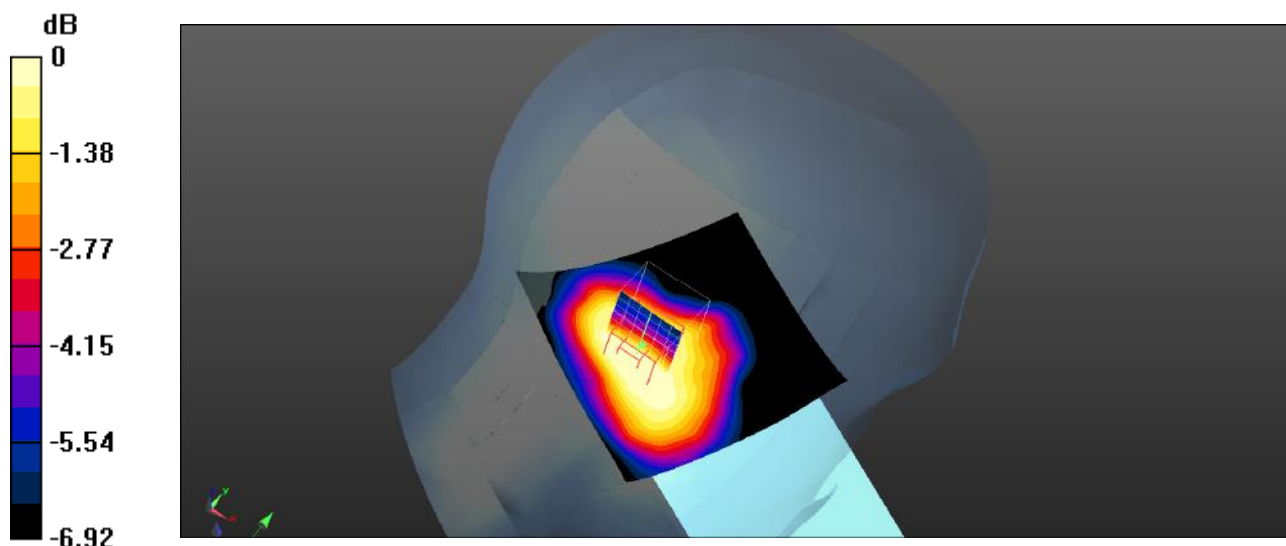

0 dB = 0.0925 W/kg = -10.34 dBW/kg

**Test Plot 178#: 2.4G WLAN 802.11b\_Head Left Tilt\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.732\text{S/m}$ ;  $\epsilon_r = 40.750$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.0920 W/kg

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
 Reference Value = 5.779 V/m; Power Drift = 0.14 dB  
 Peak SAR (extrapolated) = 0.135 W/kg  
**SAR(1 g) = 0.081 W/kg; SAR(10 g) = 0.054 W/kg**  
 Maximum value of SAR (measured) = 0.0856 W/kg

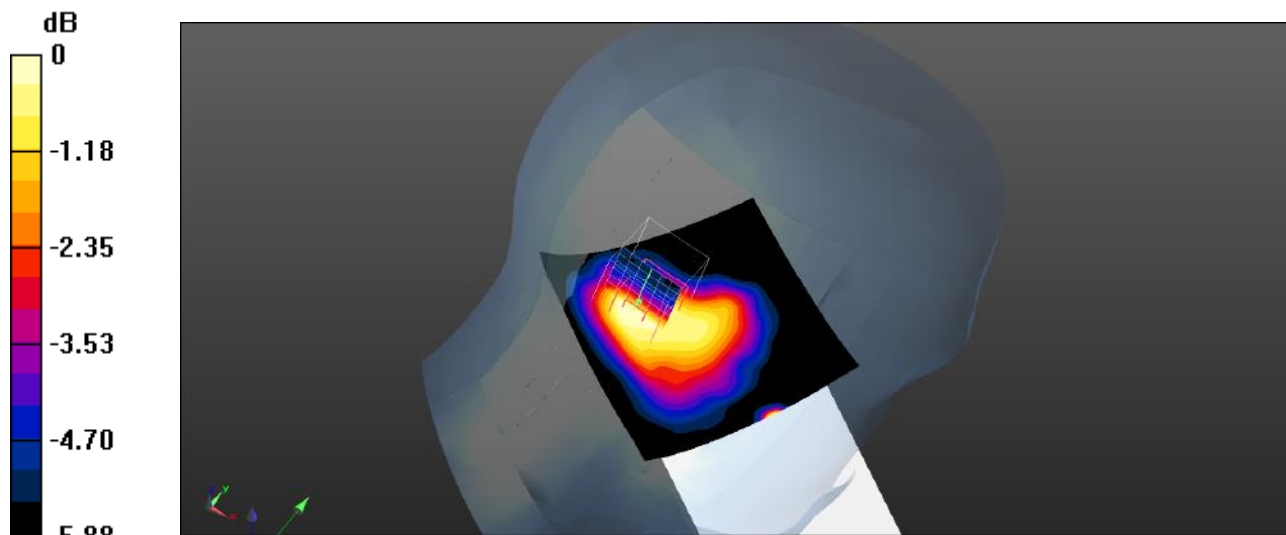

0 dB = 0.0856 W/kg = -10.68 dBW/kg

**Test Plot 179#:2.4G WLAN 802.11b\_Head Right Cheek\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.732$  S/m;  $\epsilon_r = 40.750$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.221 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.461 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.332 W/kg

**SAR(1 g) = 0.193 W/kg; SAR(10 g) = 0.114 W/kg**

Maximum value of SAR (measured) = 0.213 W/kg

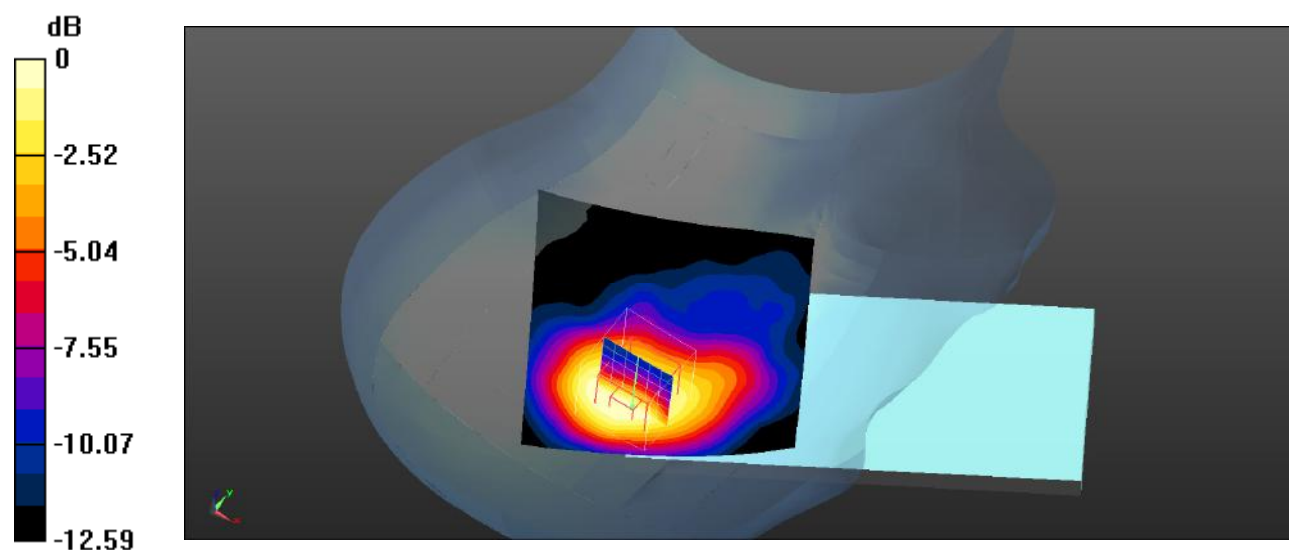

0 dB = 0.213 W/kg = -6.72 dBW/kg

**Test Plot 180#: 2.4G WLAN 802.11b\_Head Right Tilt\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.732$  S/m;  $\epsilon_r = 40.750$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000$  mm,  $dy=1.000$  mm

Maximum value of SAR (interpolated) = 0.188 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5$ mm,  $dy=5$ mm,  $dz=5$ mm

Reference Value = 6.137 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 0.347 W/kg

**SAR(1 g) = 0.161 W/kg; SAR(10 g) = 0.085 W/kg**

Maximum value of SAR (measured) = 0.176 W/kg

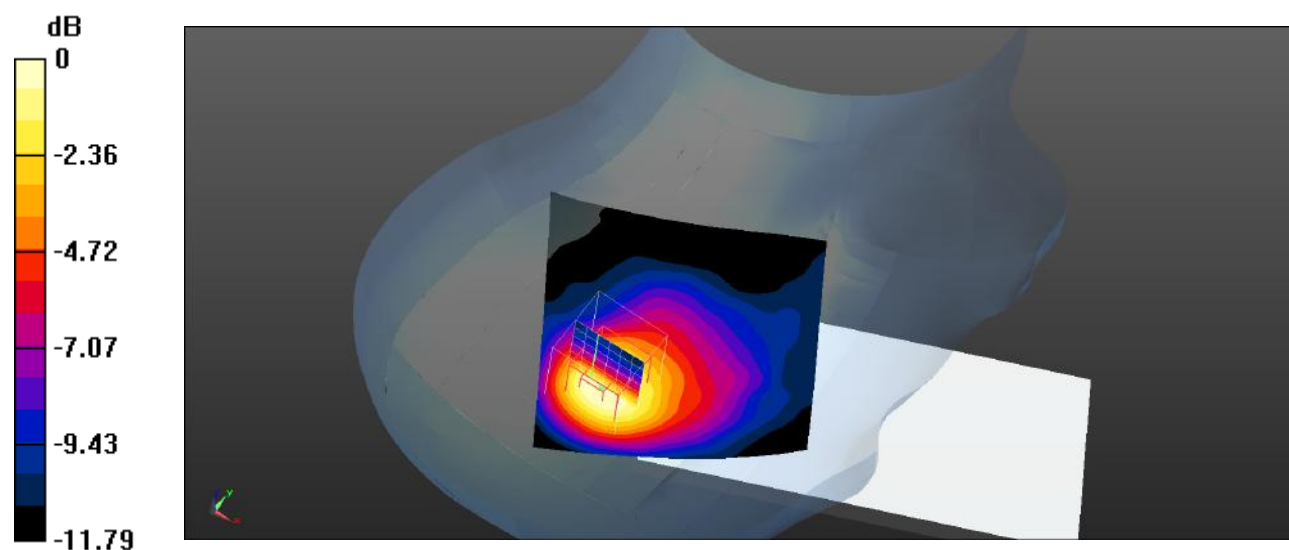

0 dB = 0.176 W/kg = -7.54 dBW/kg

**Test Plot 181#:2.4G WLAN 802.11b\_Body Front\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.793$  S/m;  $\epsilon_r = 41.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0131 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.245 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 0.0230 W/kg

**SAR(1 g) = 0.019 W/kg; SAR(10 g) = 0.013 W/kg**

Maximum value of SAR (measured) = 0.0231 W/kg

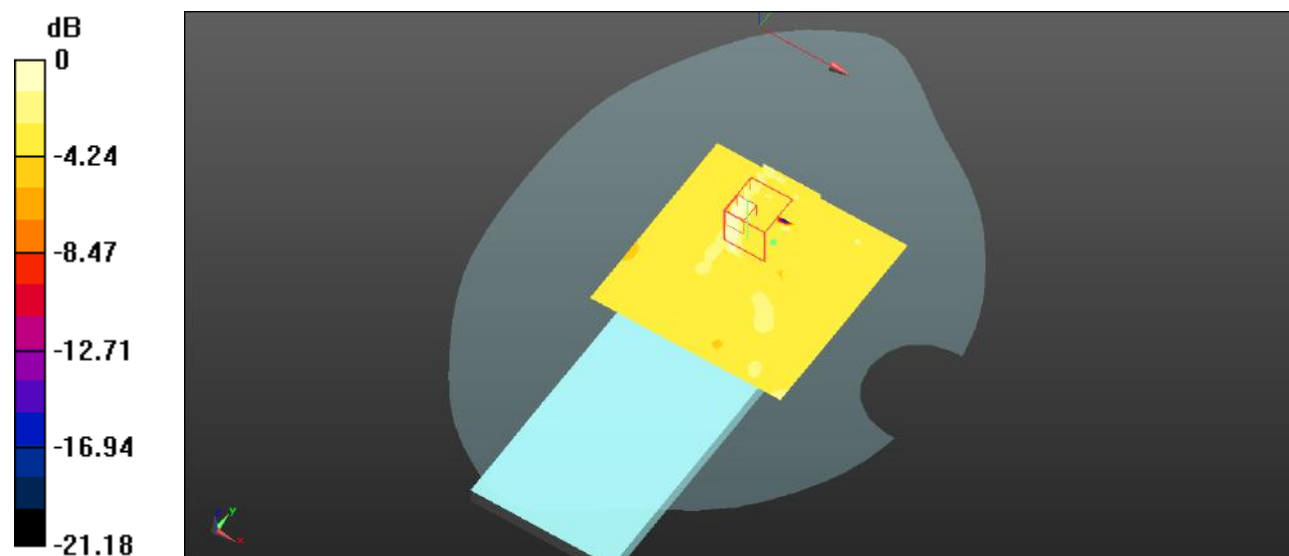

0 dB = 0.0231 W/kg = -16.36 dBW/kg

**Test Plot 182#:2.4G WLAN 802.11b\_Body Back\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.793$  S/m;  $\epsilon_r = 41.025$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.125 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.494 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.186 W/kg

**SAR(1 g) = 0.102 W/kg; SAR(10 g) = 0.056 W/kg**

Maximum value of SAR (measured) = 0.112 W/kg

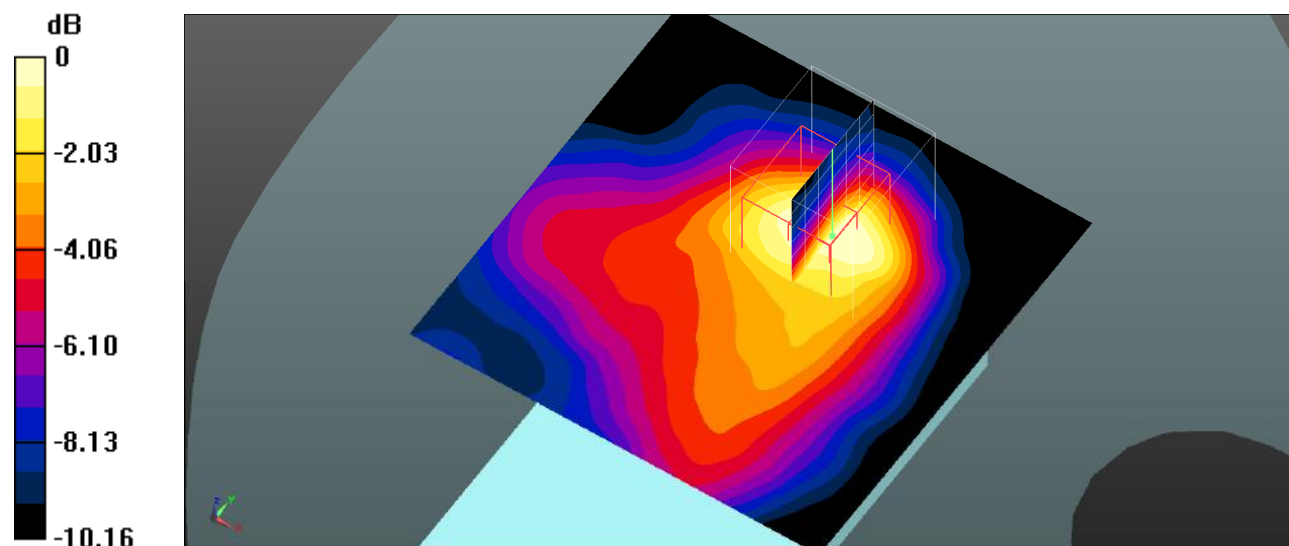

0 dB = 0.112 W/kg = -9.51 dBW/kg

**Test Plot 183#:2.4G WLAN 802.11b\_Body Left\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 2412$  MHz;  $\sigma = 1.732$ S/m;  $\epsilon_r = 40.750$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.0658 W/kg


**Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 5.559 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.0920 W/kg

**SAR(1 g) = 0.057 W/kg; SAR(10 g) = 0.036 W/kg**

Maximum value of SAR (measured) = 0.0618 W/kg

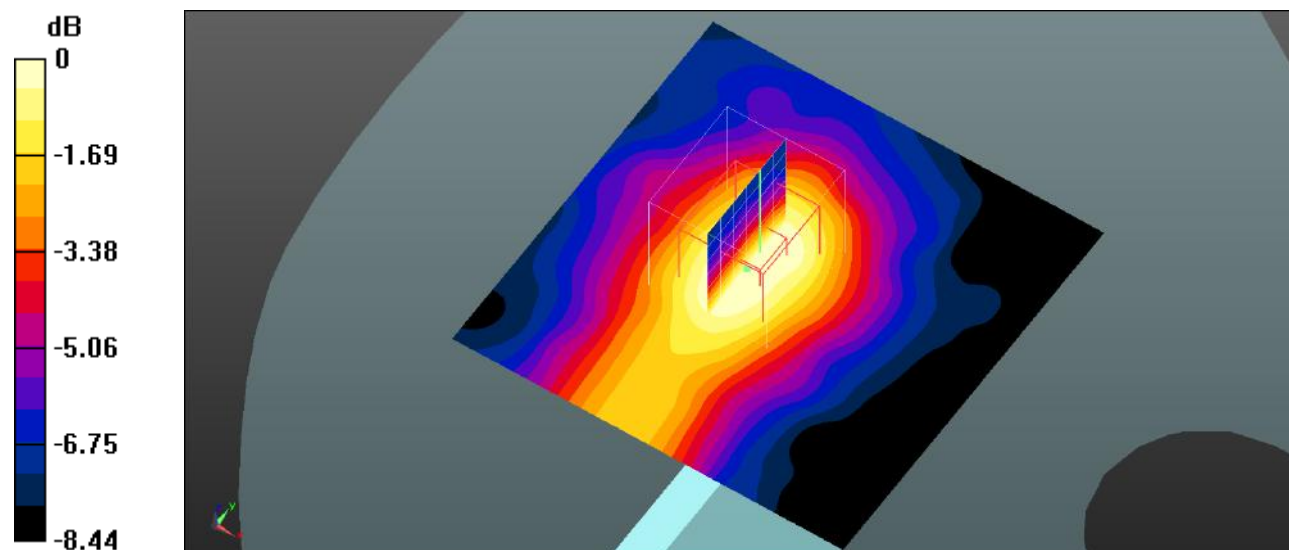

0 dB = 0.0618 W/kg = -12.09 dBW/kg

**Test Plot 184#:2.4G WLAN 802.11b\_Body Top\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: UID 0, 2.4G DTS (0); Frequency: 2412 MHz;Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 2412 \text{ MHz}$ ;  $\sigma = 1.732\text{S/m}$ ;  $\epsilon_r = 40.750$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(6.69, 6.69, 6.69); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.0846 \text{ W/kg}$

**Zoom Scan (7x7x7)/Cube 0:** Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$   
Reference Value =  $4.512 \text{ V/m}$ ; Power Drift =  $0.14 \text{ dB}$   
Peak SAR (extrapolated) =  $0.125 \text{ W/kg}$   
**SAR(1 g) =  $0.072 \text{ W/kg}$ ; SAR(10 g) =  $0.039 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.0808 \text{ W/kg}$

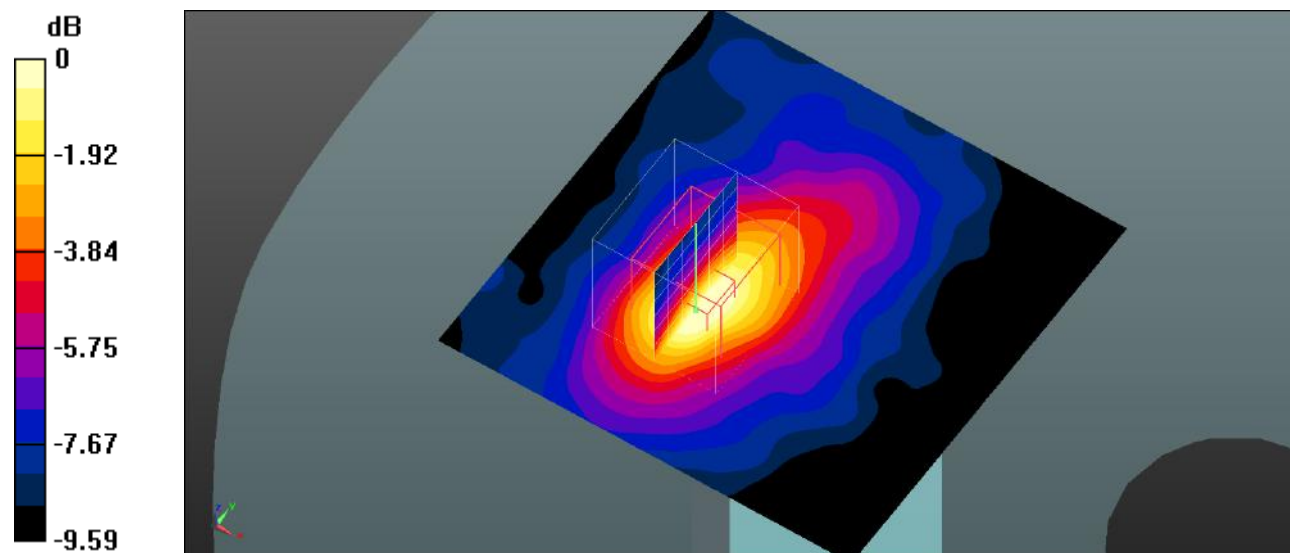

$0 \text{ dB} = 0.0808 \text{ W/kg} = -10.93 \text{ dBW/kg}$



**Test Plot 185#:5.8G WLAN 802.11a\_Head Left Cheek\_Low****DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5745$  MHz;  $\sigma = 4.972$  S/m;  $\epsilon_r = 37.066$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.376 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.576 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.521 W/kg

**SAR(1 g) = 0.232 W/kg; SAR(10 g) = 0.135 W/kg**

Maximum value of SAR (measured) = 0.360 W/kg

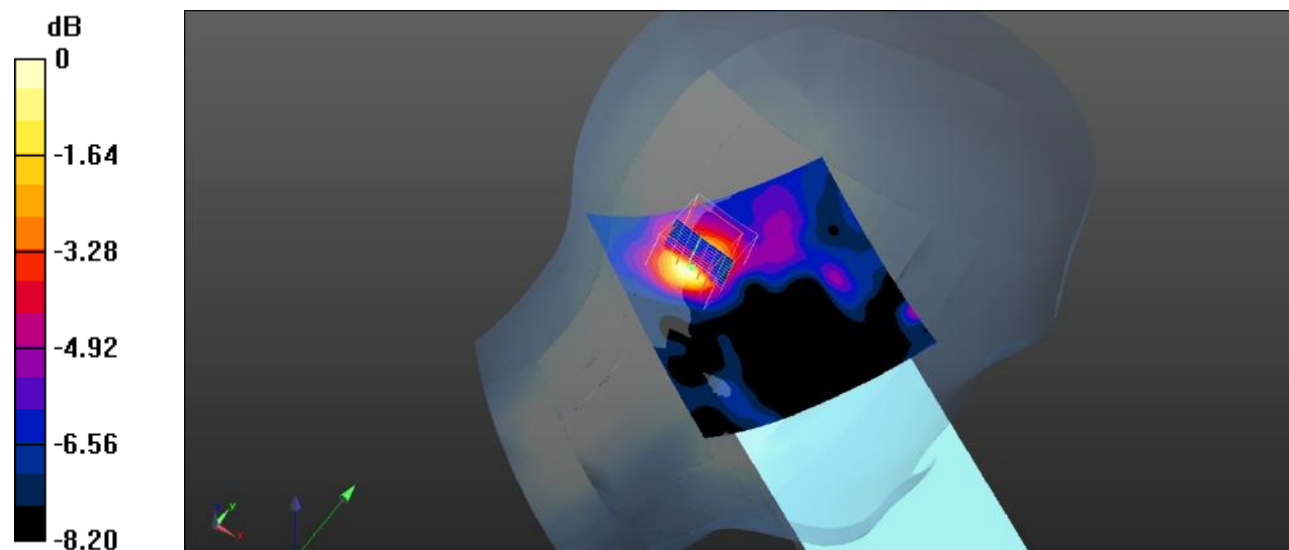

0 dB = 0.360 W/kg = -4.44 dBW/kg

**Test Plot 186#:5.8G WLAN 802.11a\_Head Left Tilt\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5745 \text{ MHz}$ ;  $\sigma = 4.972 \text{ S/m}$ ;  $\epsilon_r = 37.066$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Left Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.465 \text{ W/kg}$


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value =  $3.066 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $0.660 \text{ W/kg}$

**SAR(1 g) =  $0.277 \text{ W/kg}$ ; SAR(10 g) =  $0.152 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.437 \text{ W/kg}$

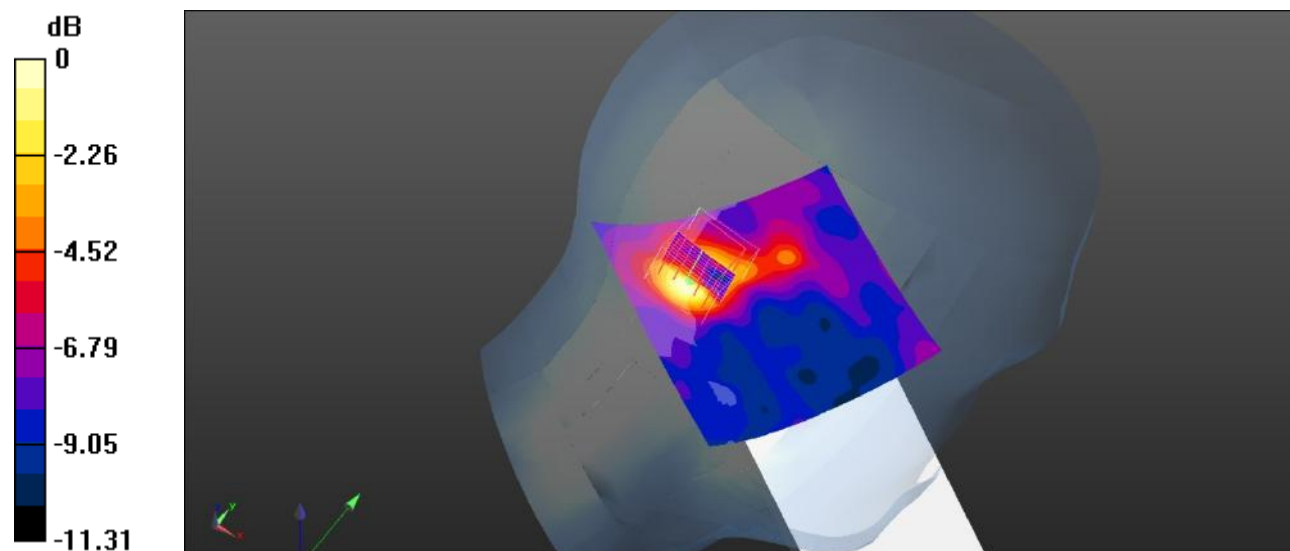

$0 \text{ dB} = 0.437 \text{ W/kg} = -3.60 \text{ dBW/kg}$

**Test Plot 187#:5.8G WLAN 802.11a\_Head Right Cheek\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1  
Medium parameters used (interpolated):  $f = 5745 \text{ MHz}$ ;  $\sigma = 4.972 \text{ S/m}$ ;  $\epsilon_r = 37.066$ ;  $\rho = 1000 \text{ kg/m}^3$   
Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
Maximum value of SAR (interpolated) =  $0.608 \text{ W/kg}$

**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$   
Reference Value =  $2.433 \text{ V/m}$ ; Power Drift =  $-0.10 \text{ dB}$   
Peak SAR (extrapolated) =  $1.02 \text{ W/kg}$   
**SAR(1 g) =  $0.298 \text{ W/kg}$ ; SAR(10 g) =  $0.115 \text{ W/kg}$**   
Maximum value of SAR (measured) =  $0.573 \text{ W/kg}$

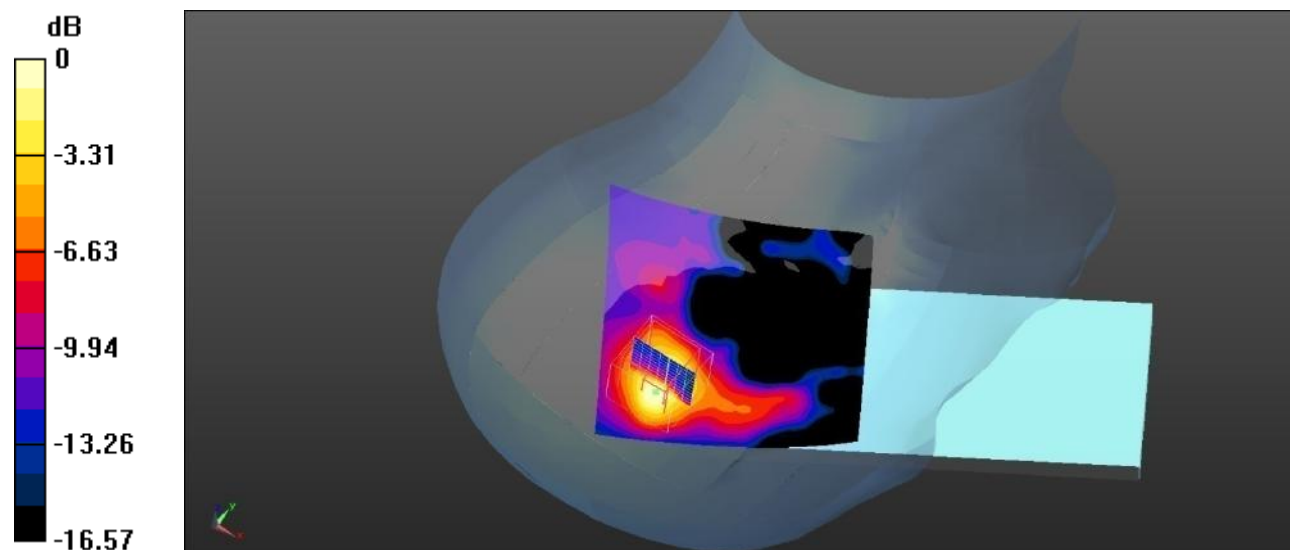

0 dB =  $0.573 \text{ W/kg}$  =  $-2.42 \text{ dBW/kg}$

**Test Plot 188#:5.8G WLAN 802.11a\_Head Right Tilt\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5745 \text{ MHz}$ ;  $\sigma = 4.972 \text{ S/m}$ ;  $\epsilon_r = 37.066$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Right Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) =  $0.851 \text{ W/kg}$


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value =  $2.611 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $1.35 \text{ W/kg}$

**SAR(1 g) =  $0.424 \text{ W/kg}$ ; SAR(10 g) =  $0.158 \text{ W/kg}$**

Maximum value of SAR (measured) =  $0.807 \text{ W/kg}$

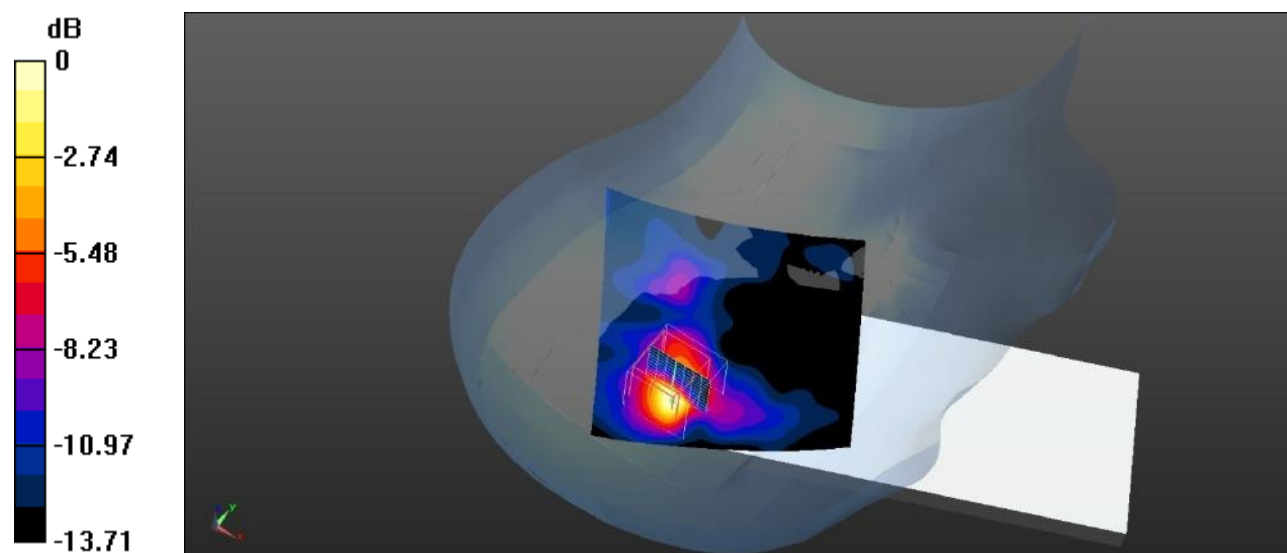

$0 \text{ dB} = 0.807 \text{ W/kg} = -0.93 \text{ dBW/kg}$

**Test Plot 189#:5.8G WLAN 802.11a \_Body Front \_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5745 \text{ MHz}$ ;  $\sigma = 4.972 \text{ S/m}$ ;  $\epsilon_r = 37.066$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid:  $dx=1.000 \text{ mm}$ ,  $dy=1.000 \text{ mm}$   
 Maximum value of SAR (interpolated) =  $0.237 \text{ W/kg}$

**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value =  $2.170 \text{ V/m}$ ; Power Drift =  $0.18 \text{ dB}$   
 Peak SAR (extrapolated) =  $0.420 \text{ W/kg}$   
**SAR(1 g) =  $0.137 \text{ W/kg}$ ; SAR(10 g) =  $0.066 \text{ W/kg}$**   
 Maximum value of SAR (measured) =  $0.230 \text{ W/kg}$

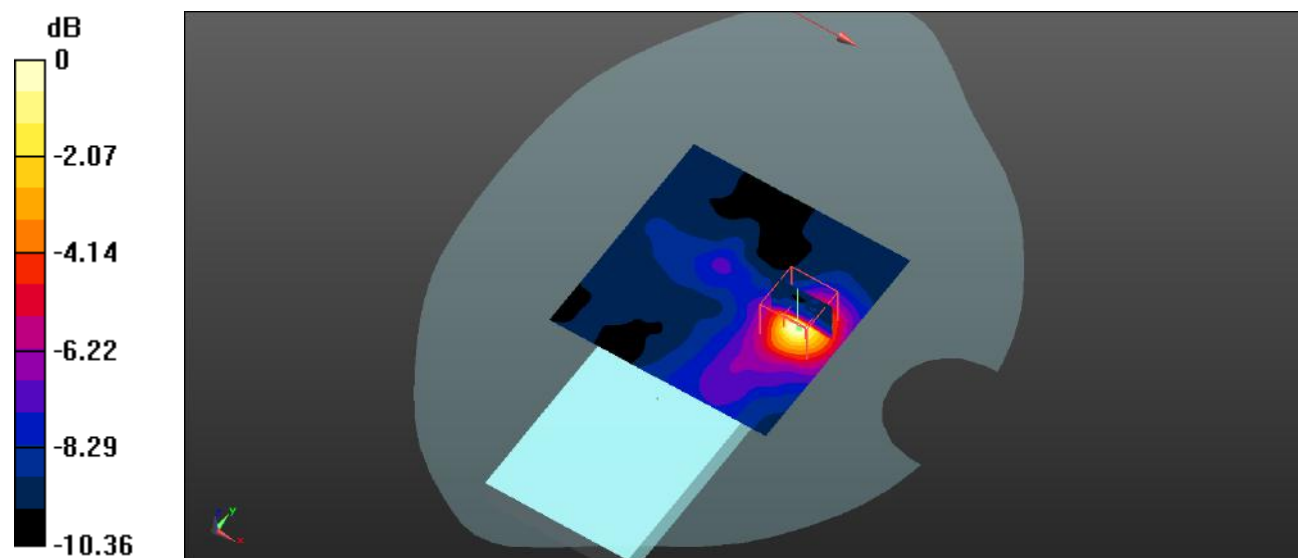

0 dB =  $0.230 \text{ W/kg}$  =  $-6.38 \text{ dBW/kg}$

**Test Plot 190#:5.8G WLAN 802.11a\_Body Back\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5745$  MHz;  $\sigma = 4.972$  S/m;  $\epsilon_r = 37.066$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (101x101x1):** Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.223 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid: dx=4mm, dy=4mm, dz=2mm

Reference Value = 3.177 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.448 W/kg

**SAR(1 g) = 0.132 W/kg; SAR(10 g) = 0.070 W/kg**

Maximum value of SAR (measured) = 0.217 W/kg

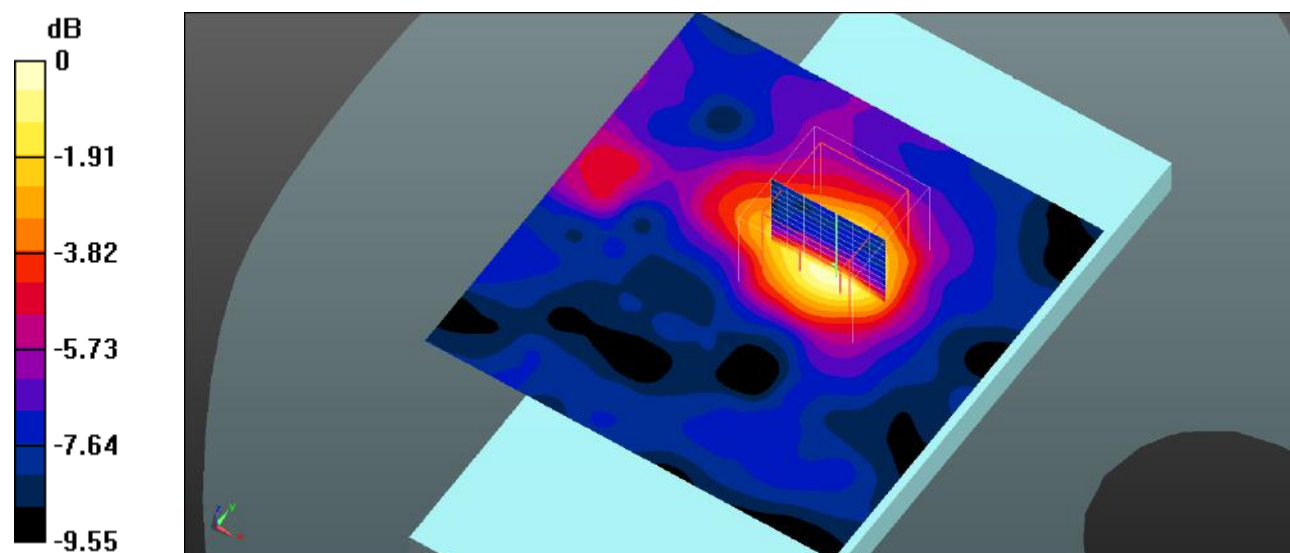

0 dB = 0.217 W/kg = -6.64 dBW/kg

**Test Plot 191#:5.8G WLAN 802.11a\_Body Left\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**

Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1

Medium parameters used (interpolated):  $f = 5745 \text{ MHz}$ ;  $\sigma = 4.972 \text{ S/m}$ ;  $\epsilon_r = 37.066$ ;  $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (121x121x1):** Interpolated grid:  $dx=0.8000 \text{ mm}$ ,  $dy=0.8000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.0796 W/kg


**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 2.863 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.230 W/kg

**SAR(1 g) = 0.053 W/kg; SAR(10 g) = 0.041 W/kg**

Maximum value of SAR (measured) = 0.0769 W/kg

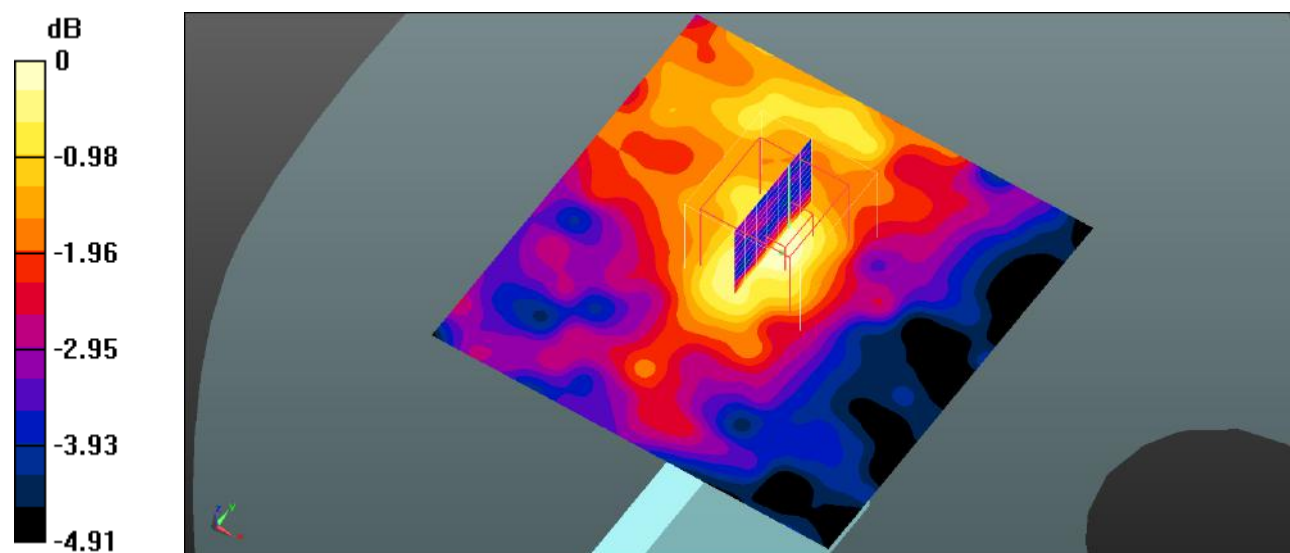

0 dB = 0.0769 W/kg = -11.14 dBW/kg

**Test Plot 192#:5.8G WLAN 802.11a\_Body Top\_Low**

**DUT: Mobile Phone; Type: X665B; Serial: SZNS220215-04501E-SA-S\_XKV**


Communication System: UID 0, 5.8G Wi-Fi (0); Frequency: 5745 MHz;Duty Cycle: 1:1  
 Medium parameters used (interpolated):  $f = 5745 \text{ MHz}$ ;  $\sigma = 4.972 \text{ S/m}$ ;  $\epsilon_r = 37.066$ ;  $\rho = 1000 \text{ kg/m}^3$   
 Phantom section: Flat Section

DASY5 Configuration:

- Probe: EX3DV4 - SN3619; ConvF(3.93, 3.93, 3.93); Calibrated: 2021/08/25
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 SN1562; Calibrated: 2021/12/13
- Phantom: Twin SAM; Type: QD000P40CD; Serial: TP:1744
- Measurement SW: DASY52, Version 52.10 (4);

**Area Scan (121x121x1):** Interpolated grid:  $dx=0.8000 \text{ mm}$ ,  $dy=0.8000 \text{ mm}$   
 Maximum value of SAR (interpolated) = 0.230 W/kg

**Zoom Scan (8x8x12)/Cube 0:** Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$   
 Reference Value = 4.448 V/m; Power Drift = 0.04 dB  
 Peak SAR (extrapolated) = 0.379 W/kg  
**SAR(1 g) = 0.129 W/kg; SAR(10 g) = 0.070 W/kg**  
 Maximum value of SAR (measured) = 0.215 W/kg

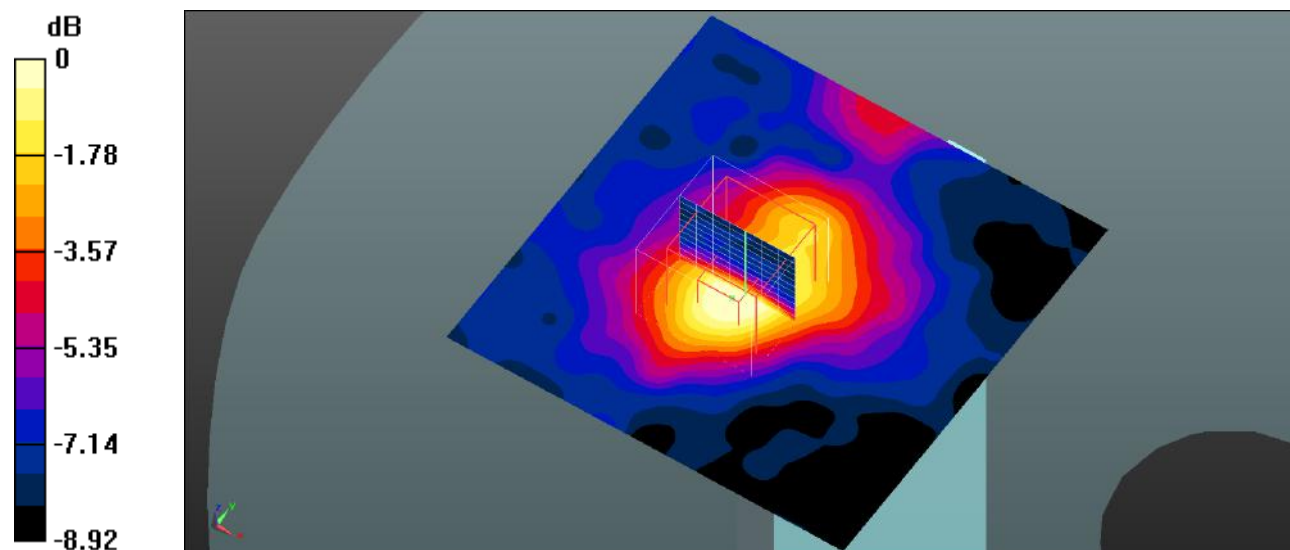

0 dB = 0.215 W/kg = -6.68 dBW/kg