




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-3.287	30	Pass
NVNT	BLE	2442	Ant1	-2.894	30	Pass
NVNT	BLE	2480	Ant1	-3.193	30	Pass



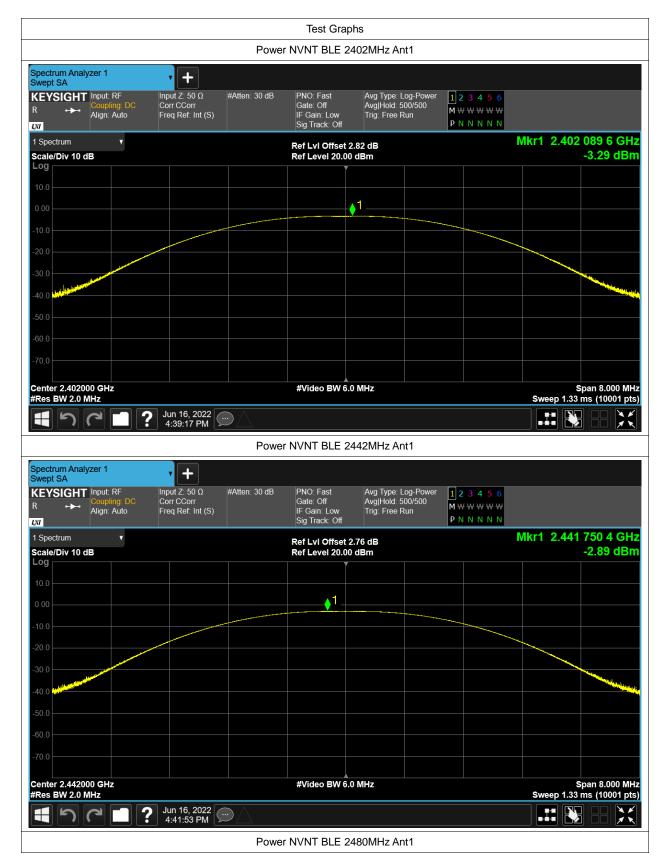









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.684	0.5	Pass
NVNT	BLE	2442	Ant1	0.685	0.5	Pass
NVNT	BLE	2480	Ant1	0.686	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.053541322	
NVNT	BLE	2442	Ant1	1.059297254	
NVNT	BLE	2480	Ant1	1.054151642	

Page 7 of 19













Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-9.655	8	Pass
NVNT	BLE	2442	Ant1	-9.239	8	Pass
NVNT	BLE	2480	Ant1	-9.541	8	Pass















Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-43.33	-20	Pass
NVNT	BLE	2480	Ant1	-43.99	-20	Pass



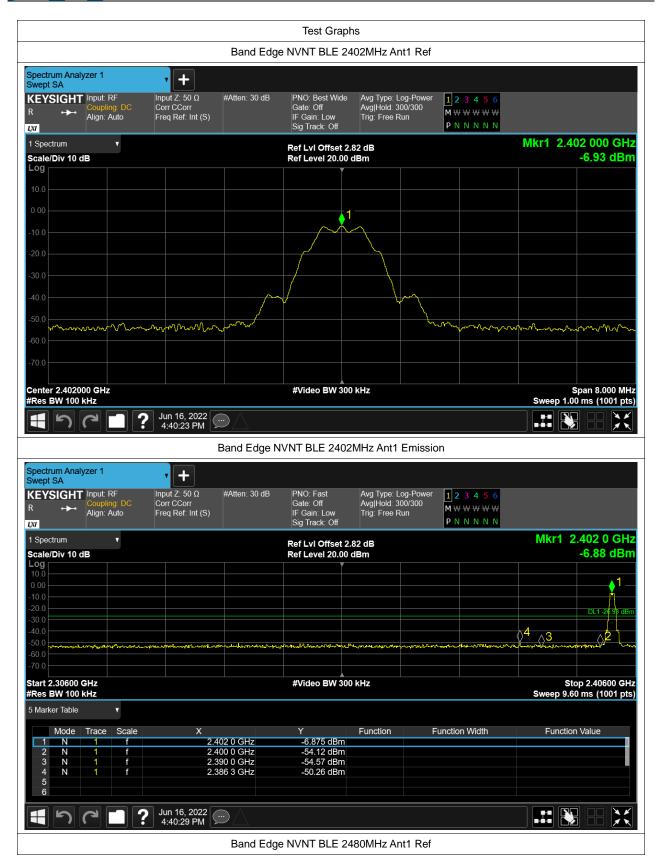



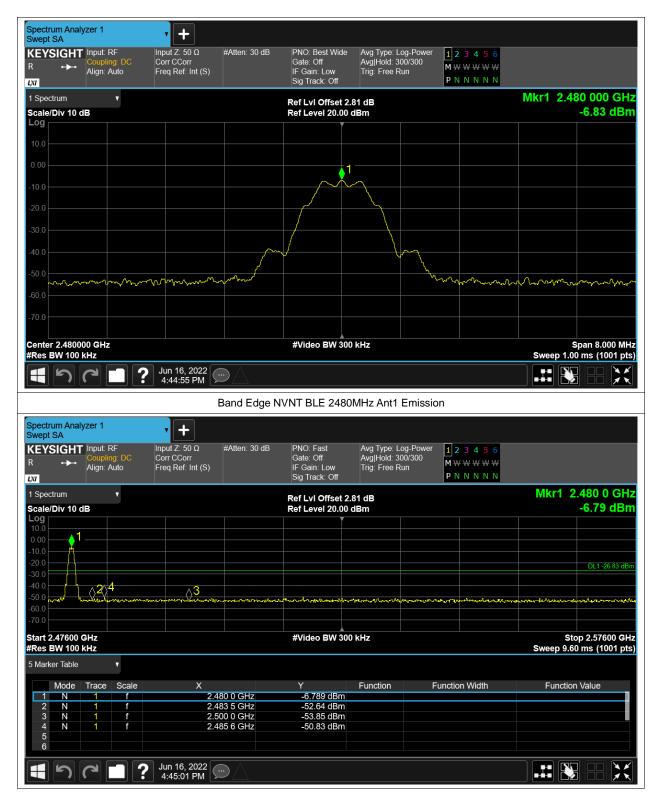





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-39.21	-20	Pass
NVNT	BLE	2442	Ant1	-39.35	-20	Pass
NVNT	BLE	2480	Ant1	-38.87	-20	Pass







