




FCC EMC Test Report

Applicant: INFINIX MOBILITY LIMITED
Address of Applicant: FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT
Equipment Under Test (EUT)
Product Name: Mobile Phone
Model No.: X671B
Trade mark: Infinix
FCC ID: 2AIZN-X671B
Applicable standards: FCC CFR Title 47 Part 15B
Date of sample receipt: 25 Feb., 2022
Date of Test: 26 Feb., to 17 Mar., 2022
Date of report issued: 18 Mar., 2022
Test Result: PASS *

Tested by:	 _____	Date:	18 Mar., 2022 _____
Reviewed by:	 _____	Date:	18 Mar., 2022 _____
Approved by:	 _____	Date:	18 Mar., 2022 _____

Manager

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in above the application standard version. Test results reported herein relate only to the item(s) tested.

This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

2 Version

Version No.	Date	Description
00	18 Mar., 2022	Original

3 Contents

Page

1	COVER PAGE.....	1
2	VERSION	2
3	CONTENTS	3
4	GENERAL INFORMATION.....	4
4.1	CLIENT INFORMATION	4
4.2	GENERAL DESCRIPTION OF E.U.T.	4
4.3	TEST MODE AND TEST SAMPLES PLANS	4
4.4	DESCRIPTION OF SUPPORT UNITS	4
4.5	DESCRIPTION OF CABLE USED	4
4.6	MEASUREMENT UNCERTAINTY.....	5
4.7	ADDITIONS TO, DEVIATIONS, OR EXCLUSIONS FROM THE METHOD.....	5
4.8	LABORATORY FACILITY	5
4.9	LABORATORY LOCATION	5
4.10	TEST INSTRUMENTS LIST	6
5	MEASUREMENT SETUP AND PROCEDURE	7
5.1	TEST SETUP	7
5.2	TEST PROCEDURE.....	8
6	TEST RESULTS.....	9
6.1	SUMMARY	9
6.1.1	Clause and data summary	9
6.1.2	Test Limit	9
6.2	CONDUCTED EMISSION.....	10
6.3	RADIATED EMISSION	12

4 General Information

4.1 Client Information

Applicant:	INFINIX MOBILITY LIMITED
Address:	FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT
Manufacturer:	INFINIX MOBILITY LIMITED
Address:	FLAT 39 8/F BLOCK D WAH LOK INDUSTRIAL CENTRE 31-35 SHAN MEI STREET FOTAN NT
Factory:	SHENZHEN TECNO TECHNOLOGY CO., LTD.
Address:	101, Building 24, Waijing Industrial Park, Fumin Community, Fucheng Street, Longhua District, Shenzhen City, P.R.China

4.2 General Description of E.U.T.

Product Name:	Mobile Phone
Model No.:	X671B
Power supply:	Rechargeable Li-ion Polymer Battery DC3.87V, 4900mAh
AC adapter:	Model: U330XSA Input: AC100-240V, 50/60Hz, 1.5A Output: DC 5.0V/3A, 10V/3.3A
Test Sample Condition:	The test samples were provided in good working order with no visible defects.

4.3 Test Mode and test samples plans

Operating mode	Detail description
PC mode	Keep the EUT in Downloading mode(Worst case for radiated emission)
Charging+Recording mode	Keep the EUT in Charging+Recording mode(Worst case for conducted emission)
Charging+Playing mode	Keep the EUT in Charging+Playing mode
FM mode	Keep the EUT in FM receiver mode
GPS mode	Keep the EUT in GPS receiver mode

The sample was placed 0.8m above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.

4.4 Description of Support Units

Manufacturer	Description	Model	S/N	FCC ID/DoC
Lenovo	Laptop	ThinkPad T14 Gen 1	SL10Z47277	DoC
HP	Printer	HP LaserJet P1007	VNFP409729	DoC

4.5 Description of Cable Used

Cable Type	Description	Length	From	To
Detached USB Cable	Shielding	1.0m	EUT	PC/Adapter
Detached headset cable	Unshielded	1.2m	EUT	Headset

4.6 Measurement Uncertainty

Parameter	Expanded Uncertainty (Confidence of 95%(U = 2Uc(y)))
Conducted Emission for LISN (9kHz ~ 150kHz)	±3.11 dB
Conducted Emission for LISN (150kHz ~ 30MHz)	±2.62 dB
Radiated Emission (30MHz ~ 1GHz) (3m SAC)	±4.45 dB
Radiated Emission (1GHz ~ 18GHz) (3m SAC)	±5.34 dB
Radiated Emission (18GHz ~ 40GHz) (3m SAC)	±5.34 dB

Note: All the measurement uncertainty value were shown with a coverage k=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

4.7 Additions to, Deviations, or Exclusions from the Method

No

4.8 Laboratory Facility

The test facility is recognized, certified, or accredited by the following organizations:

- **FCC - Designation No.: CN1211**
JianYan Testing Group Shenzhen Co., Ltd. has been accredited as a testing laboratory by FCC(Federal Communications Commission). The test firm Registration No. is 727551.
- **ISED – CAB identifier.: CN0021**
The 3m Semi-anechoic chamber and 10m Semi-anechoic chamber of JianYan Testing Group Shenzhen Co., Ltd. has been Registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 10106A-1.
- **CNAS - Registration No.: CNAS L15527**
JianYan Testing Group Shenzhen Co., Ltd. is accredited to ISO/IEC 17025:2017 General Requirements for the Competence of Testing and Calibration laboratories for the competence of testing. The Registration No. is CNAS L15527.
- **A2LA - Registration No.: 4346.01**
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. The test scope can be found as below link: <https://portal.a2la.org/scopepdf/4346-01.pdf>

4.9 Laboratory Location

JianYan Testing Group Shenzhen Co., Ltd.
 Address: No.101, Building 8, Innovation Wisdom Port, No.155 Hongtian Road, Huangpu Community, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, People's Republic of China.
 Tel: +86-755-23118282, Fax: +86-755-23116366
 Email: info-JYTee@lets.com, Website: <http://jyt.lets.com>

4.10 Test Instruments list


Radiated Emission(3m SAC):					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal.Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
3m SAC	ETS	9m*6m*6m	WXJ001-1	01-19-2021	01-18-2024
BiConiLog Antenna	Schwarzbeck	VULB9163	WXJ002	02-17-2022	02-16-2023
Biconical Antenna	Schwarzbeck	VUBA9117	WXJ002-1	06-20-2021	06-19-2022
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-2	02-17-2022	02-16-2023
Horn Antenna	Schwarzbeck	BBHA9120D	WXJ002-3	06-18-2021	06-17-2022
Pre-amplifier (30MHz ~ 1GHz)	Schwarzbeck	BBV9743B	WXG001-7	02-17-2022	02-16-2023
Pre-amplifier (1GHz ~ 18GHz)	SKET	LNPA_0118G-50	WXG001-3	02-17-2022	02-16-2023
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXG001-9	02-17-2022	02-16-2023
EMI Test Receiver	Rohde & Schwarz	ESRP7	WXJ003-1	02-17-2022	02-16-2023
Pre-amplifier (18GHz ~ 40GHz)	RF System	TRLA-180400G45B	WXG001-9	02-17-2022	02-16-2023
Coaxial Cable (30MHz ~ 1GHz)	JYTSZ	JYT3M-1G-NN-8M	WXG001-4	02-17-2022	02-16-2023
Coaxial Cable (1GHz ~ 18GHz)	JYTSZ	JYT3M-18G-NN-8M	WXG001-5	02-17-2022	02-16-2023
Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYT3M-1G-BB-5M	WXG001-6	02-17-2022	02-16-2023
Coaxial Cable (18GHz ~ 40GHz)	JYTSZ	JYT3M-40G-SS-8M	WXG001-7	02-17-2022	02-16-2023
Band Reject Filter Group	Tonscend	JS0806-F	WXJ089	N/A	
Test Software	Tonscend	TS+	Version: 3.0.0.1		

Conducted Emission:					
Test Equipment	Manufacturer	Model No.	Manage No.	Cal.Date (mm-dd-yy)	Cal. Due date (mm-dd-yy)
EMI Test Receiver	Rohde & Schwarz	ESCI 3	WXJ003	02-17-2022	02-16-2023
RF Switch	TOP PRECISION	RSU0301	WXG003	02-17-2022	02-16-2023
LISN	Schwarzbeck	NSLK 8127	QCJ001-13	02-17-2022	02-16-2023
LISN	Rohde & Schwarz	ESH3-Z5	WXJ005-1	06-18-2021	06-17-2022
ISN Coaxial Cable (9kHz ~ 30MHz)	JYTSZ	JYTCE-1G-BN-3M	WXG003-2	02-17-2022	02-16-2023
Test Software	AUDIX	E3	Version: 6.110919b		

5 Measurement setup and procedure

5.1 Test setup


1) Conducted emission measurement:

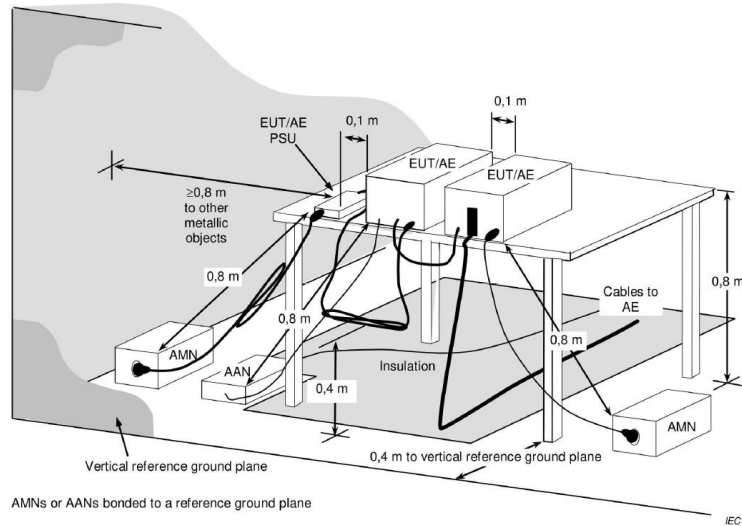


Note: The 0.8 m distance specified between EUT/AE/PSU and AMN/AAN, is applicable only to the EUT being measured. If the device is AE then it shall be >0.8 m.

2) Radiated emission measurement:

Below 1GHz (3m SAC)

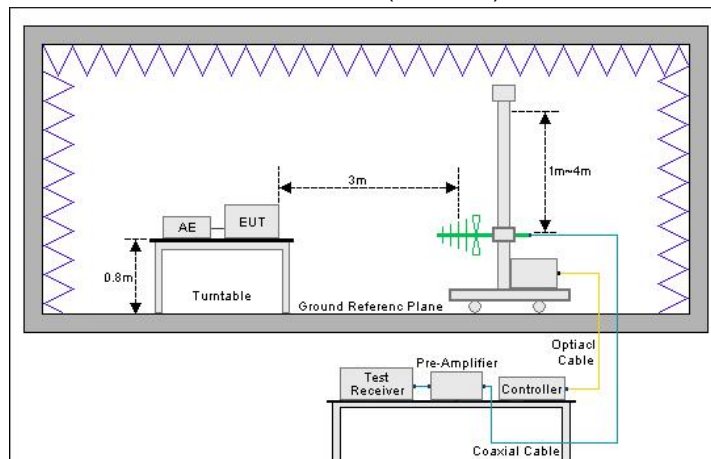

Above 1GHz (3m SAC)

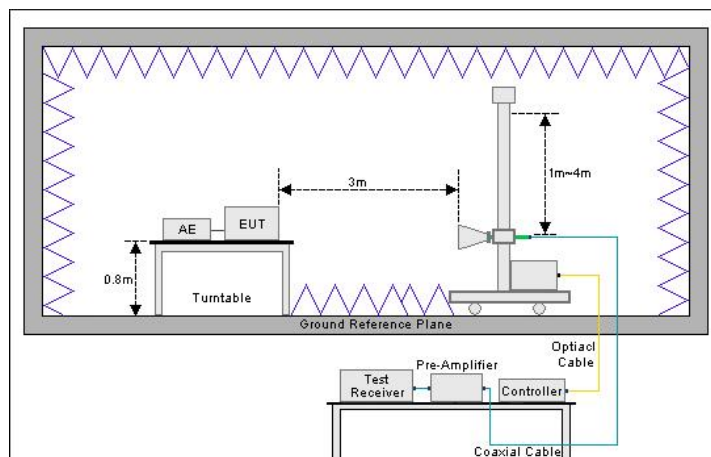

5.2 Test procedure

Test method	Test step
Conducted emission	<ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.
Radiated emission	<p>For below 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 0.8 m the ground at a 3 m semi anechoic chamber. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data. <p>For above 1GHz:</p> <ol style="list-style-type: none"> 1. The EUT was placed on the tabletop of a rotating table 1.5 m the ground at a 3 m fully anechoic room. The measurement distance from the EUT to the receiving antenna is 3 m. 2. EUT works in each mode of operation that needs to be tested, and having the EUT continuously working, respectively on 3 axis (X, Y & Z) and considered typical configuration to obtain worst position. The highest signal levels relative to the limit shall be determined by rotating the EUT from 0° to 360° and with varying the measurement antenna height between 1 m and 4 m in vertical and horizontal polarizations. 3. Open the test software to control the test antenna and test turntable. Perform the test, save the test results, and export the test data.

6 Test Results

6.1 Summary

6.1.1 Clause and data summary


Test Items	FCC Part Section(s)	Test Data	Result
Conducted Emission	Part 15.107	See Section 6.2	Pass
Radiated Emission	Part 15.109	See Section 6.3	Pass
Remark:			
1. Pass: The EUT complies with the essential requirements in the standard.			
2. N/A: Not Applicable.			
Test Method:	ANSI C63.4:2014		

6.1.2 Test Limit

Items	Limit															
Conducted Emission	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50	
	Frequency range (MHz)		Limit (dBuV)													
		Quasi-peak	Average													
	0.15-0.5	66 to 56*	56 to 46*													
	0.5-5	56	46													
5-30	60	50														
* Decreases with the logarithm of the frequency.																
Radiated Emission	Below 1GHz (Measurement distance for 3 m):															
	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>30MHz-88MHz</td> <td>40.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>88MHz-216MHz</td> <td>43.5</td> <td>Quasi-peak Value</td> </tr> <tr> <td>216MHz-960MHz</td> <td>46.0</td> <td>Quasi-peak Value</td> </tr> <tr> <td>960MHz-1GHz</td> <td>54.0</td> <td>Quasi-peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dBuV/m @3m)	Remark	30MHz-88MHz	40.0	Quasi-peak Value	88MHz-216MHz	43.5	Quasi-peak Value	216MHz-960MHz	46.0	Quasi-peak Value	960MHz-1GHz	54.0	Quasi-peak Value
	Frequency	Limit (dBuV/m @3m)	Remark													
	30MHz-88MHz	40.0	Quasi-peak Value													
	88MHz-216MHz	43.5	Quasi-peak Value													
	216MHz-960MHz	46.0	Quasi-peak Value													
	960MHz-1GHz	54.0	Quasi-peak Value													
	Above 1GHz (Measurement distance for 3 m):															
	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Limit (dBuV/m @3m)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td> <td>54.0</td> <td>Average Value</td> </tr> <tr> <td>74.0</td> <td>Peak Value</td> </tr> </tbody> </table>	Frequency	Limit (dBuV/m @3m)	Remark	Above 1GHz	54.0	Average Value	74.0	Peak Value							
	Frequency	Limit (dBuV/m @3m)	Remark													
Above 1GHz	54.0	Average Value														
	74.0	Peak Value														

6.2 Conducted Emission

Product name:	Mobile Phone	Product model:	X671B
Test by:	Mike	Test mode:	Charging & Recording
Test frequency:	150 kHz ~ 30 MHz	Phase:	Line
Test voltage:	AC 120 V/60 Hz		

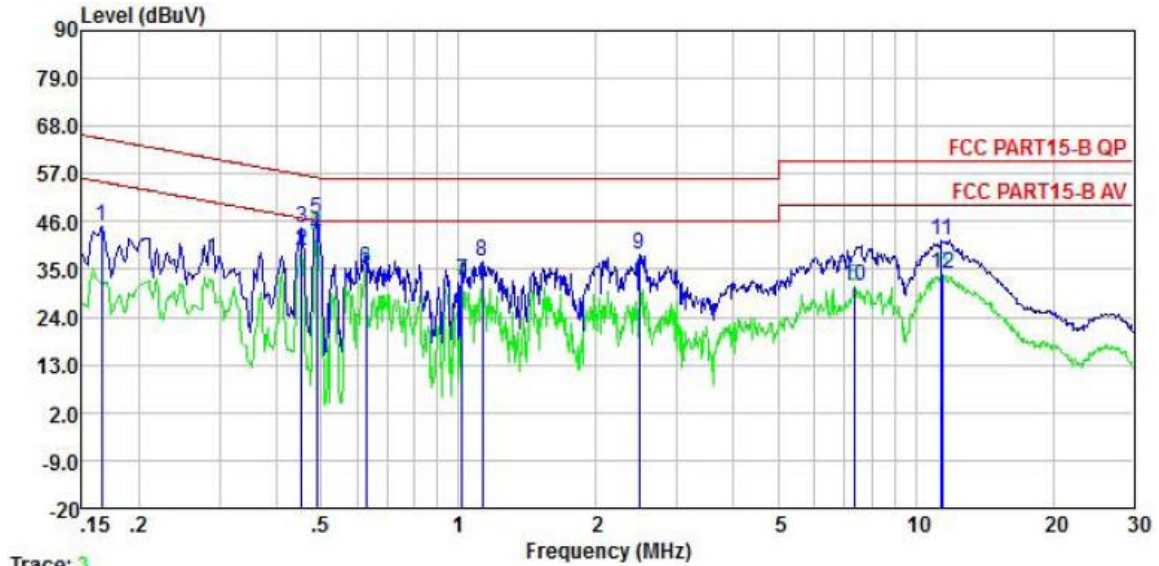


Trace: 3

	Read Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.166	44.69	0.04	0.01	44.74	65.16	-20.42	QP
2	0.454	39.19	0.04	0.03	39.26	46.80	-7.54	Average
3	0.454	44.47	0.04	0.03	44.54	56.80	-12.26	QP
4	0.489	42.84	0.04	0.03	42.91	46.19	-3.28	Average
5	0.489	46.56	0.04	0.03	46.63	56.19	-9.56	QP
6	0.627	35.11	0.04	0.02	35.17	46.00	-10.83	Average
7	1.016	32.20	0.05	0.05	32.30	46.00	-13.70	Average
8	1.129	36.75	0.05	0.08	36.88	56.00	-19.12	QP
9	2.487	38.23	0.08	0.13	38.44	56.00	-17.56	QP
10	7.329	31.00	0.16	0.10	31.26	50.00	-18.74	Average
11	11.377	41.48	0.23	0.11	41.82	60.00	-18.18	QP
12	11.498	33.75	0.23	0.11	34.09	50.00	-15.91	Average

Remark:

1. Level = Read level + LISN Factor + Cable Loss.

Product name:	Mobile Phone	Product model:	X671B
Test by:	Mike	Test mode:	Charging & Recording
Test frequency:	150 kHz ~ 30 MHz	Phase:	Neutral
Test voltage:	AC 120 V/60 Hz		

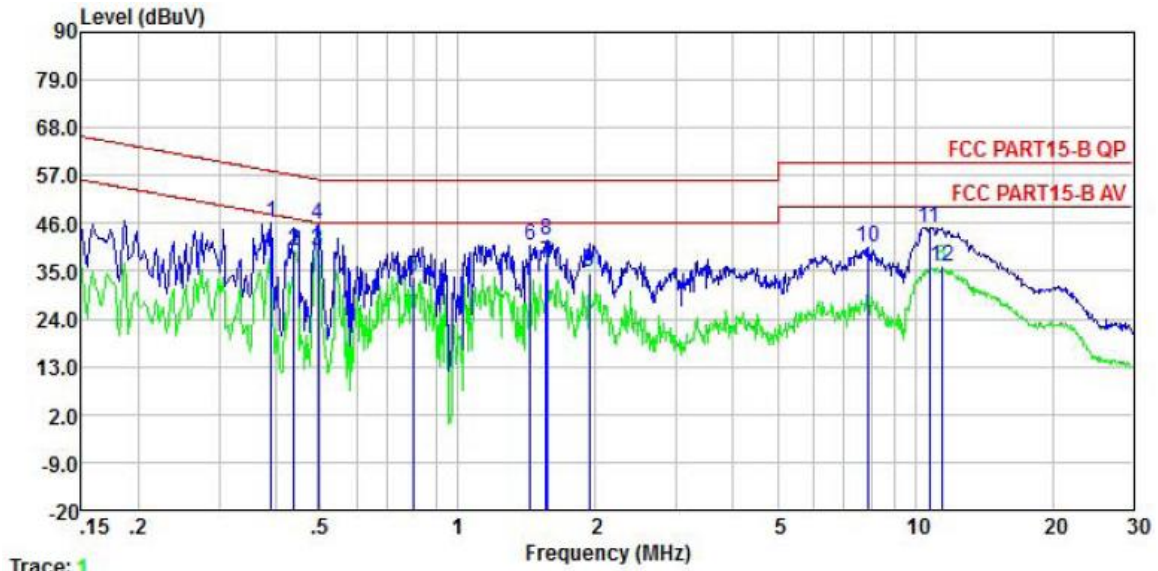

	Read Freq	Read Level	LISN Factor	Cable Loss	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB	dB	dBuV	dBuV	dB	
1	0.389	45.92	0.04	0.04	46.00	58.08	-12.08	QP
2	0.437	39.59	0.04	0.03	39.66	47.11	-7.45	Average
3	0.494	39.70	0.04	0.03	39.77	46.10	-6.33	Average
4	0.494	45.80	0.04	0.03	45.87	56.10	-10.23	QP
5	0.796	33.41	0.04	0.03	33.48	46.00	-12.52	Average
6	1.441	40.90	0.06	0.13	41.09	56.00	-14.91	QP
7	1.560	36.48	0.06	0.15	36.69	46.00	-9.31	Average
8	1.568	41.70	0.06	0.15	41.91	56.00	-14.09	QP
9	1.939	34.33	0.06	0.20	34.59	46.00	-11.41	Average
10	7.893	40.12	0.16	0.10	40.38	60.00	-19.62	QP
11	10.733	44.75	0.20	0.12	45.07	60.00	-14.93	QP
12	11.438	35.54	0.21	0.11	35.86	50.00	-14.14	Average


Remark:

1. Level = Read level + LISN Factor + Cable Loss.

6.3 Radiated Emission

Below 1GHz:

Product Name:	Mobile Phone	Product Model:	X671B
Test By:	Mike	Test mode:	PC
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

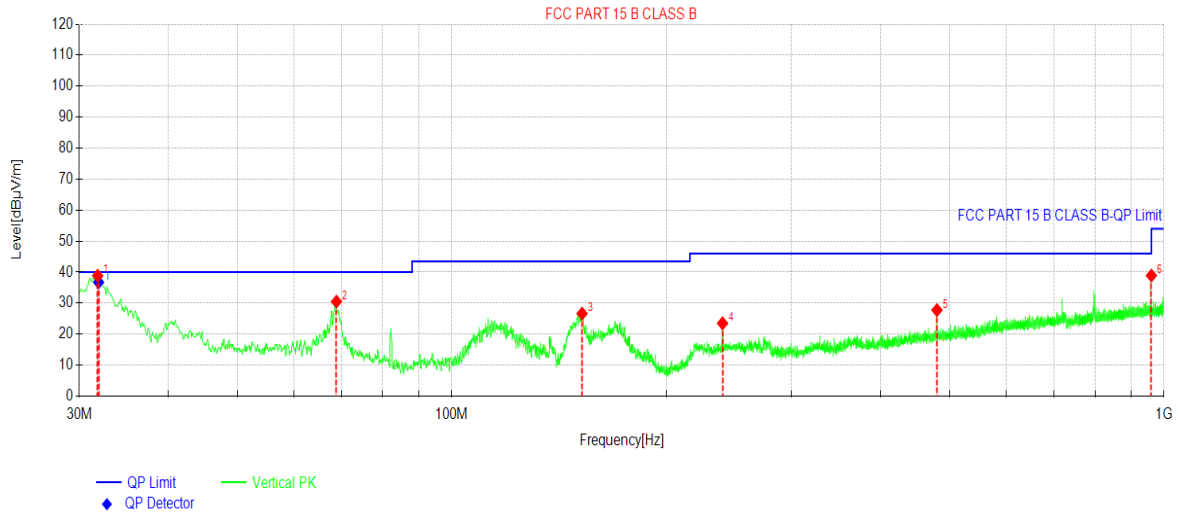


NO.	Freq. [MHz]	Reading[dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	31.8432	53.59	38.84	-14.75	40.00	1.16	PK	Vertical
2	68.9009	47.22	30.49	-16.73	40.00	9.51	PK	Vertical
3	152.426	40.27	26.63	-13.64	43.50	16.87	PK	Vertical
4	240.026	38.01	23.49	-14.52	46.00	22.51	PK	Vertical
5	480.028	35.98	27.75	-8.23	46.00	18.25	PK	Vertical
6	960.129	38.38	38.90	0.52	54.00	15.10	PK	Vertical

NO.	Freq. [MHz]	Factor [dB]	QP Value [dBµV/m]	QP Limit [dBµV/m]	QP Margin [dB]	QP Reading [dBµV/m]	Angle [°]	Verdict
1	31.9399	-14.75	36.74	40.00	3.26	51.49	215.7	PASS

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

Product Name:	Mobile Phone	Product Model:	X671B
Test By:	Mike	Test mode:	PC
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

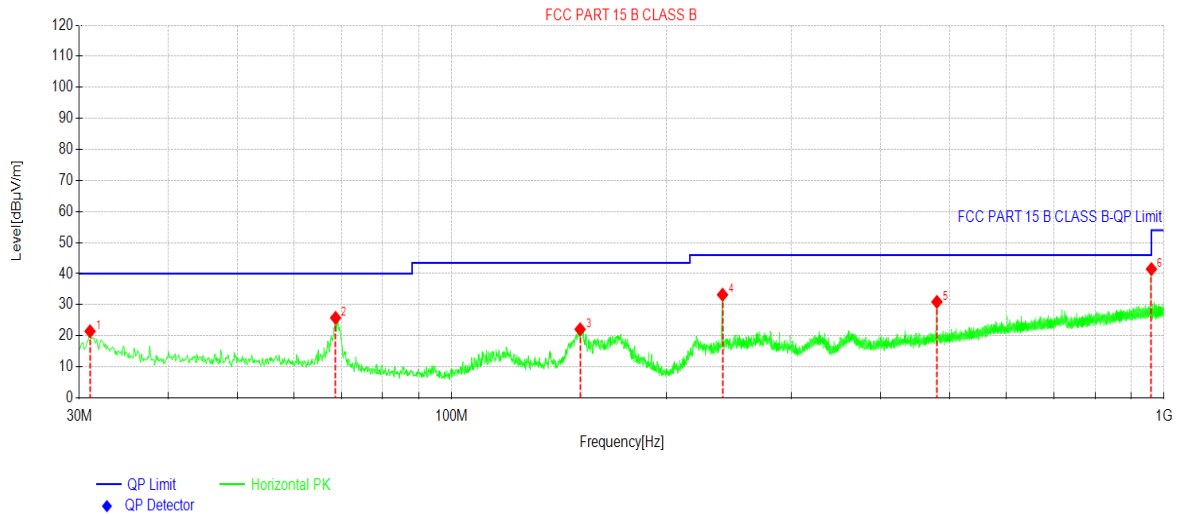


NO.	Freq. [MHz]	Reading[dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	31.0671	36.32	21.44	-14.88	40.00	18.56	PK	Horizontal
2	68.7069	42.47	25.78	-16.69	40.00	14.22	PK	Horizontal
3	151.456	35.79	22.09	-13.70	43.50	21.41	PK	Horizontal
4	240.026	47.74	33.22	-14.52	46.00	12.78	PK	Horizontal
5	480.028	39.14	30.91	-8.23	46.00	15.09	PK	Horizontal
6	960.129	40.96	41.48	0.52	54.00	12.52	PK	Horizontal

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.

Above 1GHz:

Product Name:	Mobile Phone	Product Model:	X671B
Test By:	Mike	Test mode:	PC
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Vertical
Test Voltage:	AC 120/60Hz		

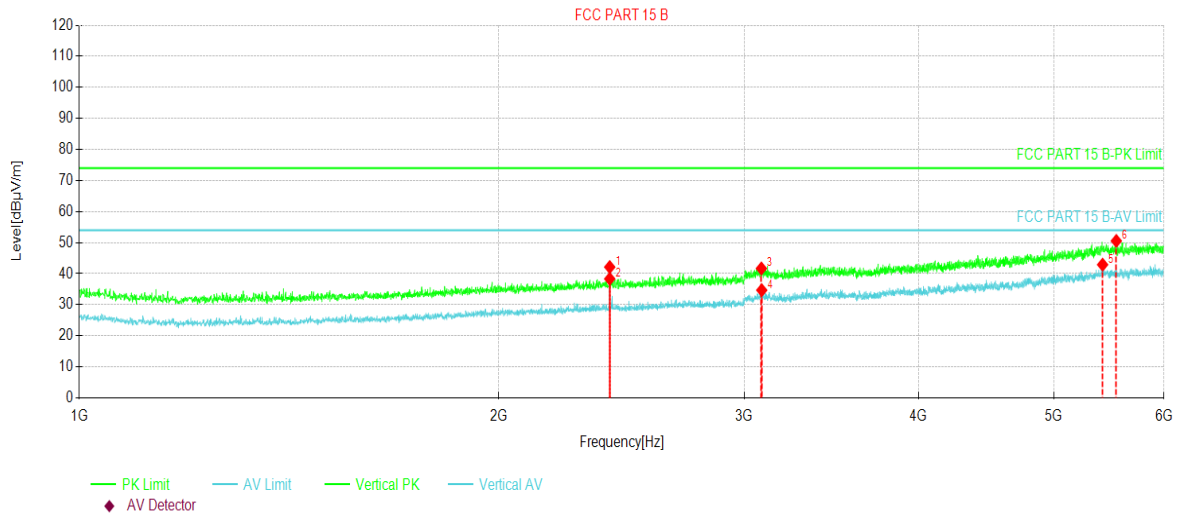


NO.	Freq. [MHz]	Reading [dBuV/m]	Level [dBuV/m]	Factor [dB]	Limit [dBuV/m]	Margin [dB]	Trace	Polarity
1	2401.87	60.91	42.12	-18.79	74.00	31.88	PK	Vertical
2	2401.87	57.13	38.34	-18.79	54.00	15.66	AV	Vertical
3	3085.62	57.76	41.68	-16.08	74.00	32.32	PK	Vertical
4	3087.50	50.76	34.69	-16.07	54.00	19.31	AV	Vertical
5	5421.25	48.85	42.89	-5.96	54.00	11.11	AV	Vertical
6	5545.62	56.62	50.54	-6.08	74.00	23.46	PK	Vertical

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.

Product Name:	Mobile Phone	Product Model:	X671B
Test By:	Mike	Test mode:	PC
Test Frequency:	1000 MHz ~ 6000 MHz	Polarization:	Horizontal
Test Voltage:	AC 120/60Hz		

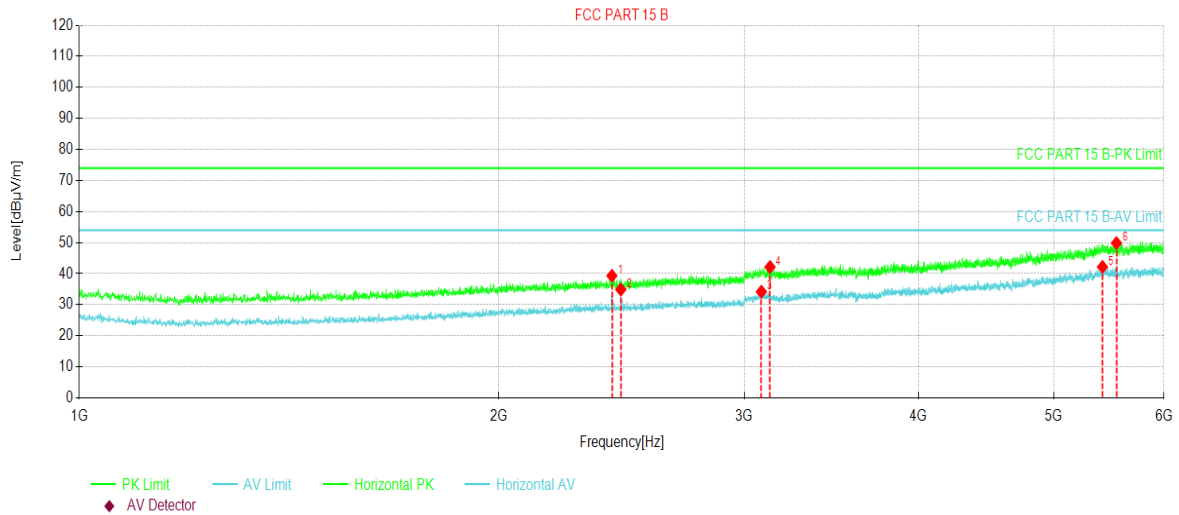

NO.	Freq. [MHz]	Reading [dBµV/m]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Trace	Polarity
1	2410.62	58.09	39.32	-18.77	74.00	34.68	PK	Horizontal
2	2446.25	53.60	34.89	-18.71	54.00	19.11	AV	Horizontal
3	3085.62	50.26	34.18	-16.08	54.00	19.82	AV	Horizontal
4	3130.00	58.09	42.15	-15.94	74.00	31.85	PK	Horizontal
5	5420.00	48.14	42.18	-5.96	54.00	11.82	AV	Horizontal
6	5546.87	55.93	49.85	-6.08	74.00	24.15	PK	Horizontal

Remark:

1. Level = Read level + Antenna Factor + Cable Loss – Preamplifier Factor.

-----End of report-----