




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-4.597	30	Pass
NVNT	BLE	2442	Ant1	-3.352	30	Pass
NVNT	BLE	2480	Ant1	-3.801	30	Pass



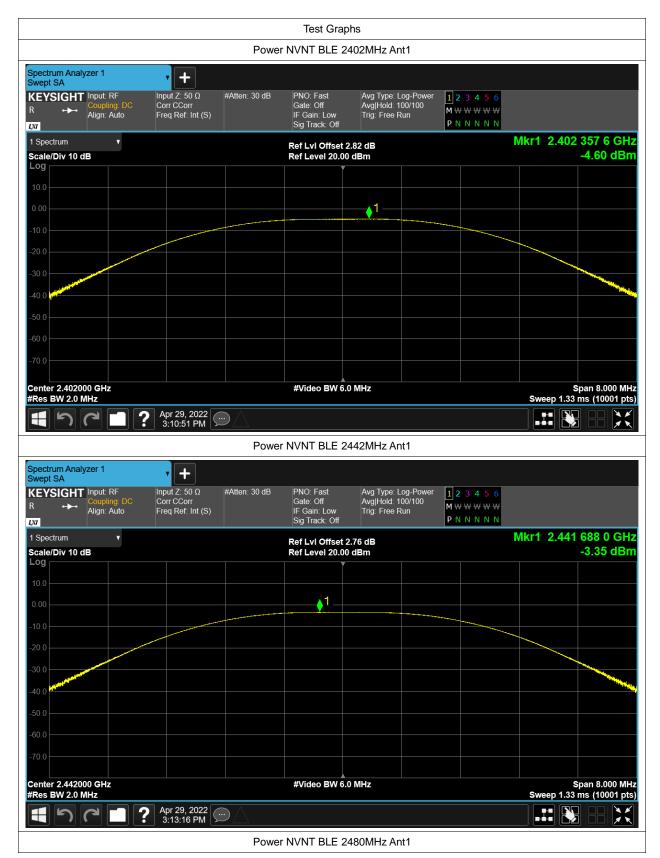









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	1.308	0.5	Pass
NVNT	BLE	2442	Ant1	1.221	0.5	Pass
NVNT	BLE	2480	Ant1	1.257	0.5	Pass













Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.08129065	
NVNT	BLE	2442	Ant1	2.087533722	
NVNT	BLE	2480	Ant1	2.086661256	

Project No.: JYTSZR2204126














Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-23.228	8	Pass
NVNT	BLE	2442	Ant1	-22.063	8	Pass
NVNT	BLE	2480	Ant1	-22.576	8	Pass



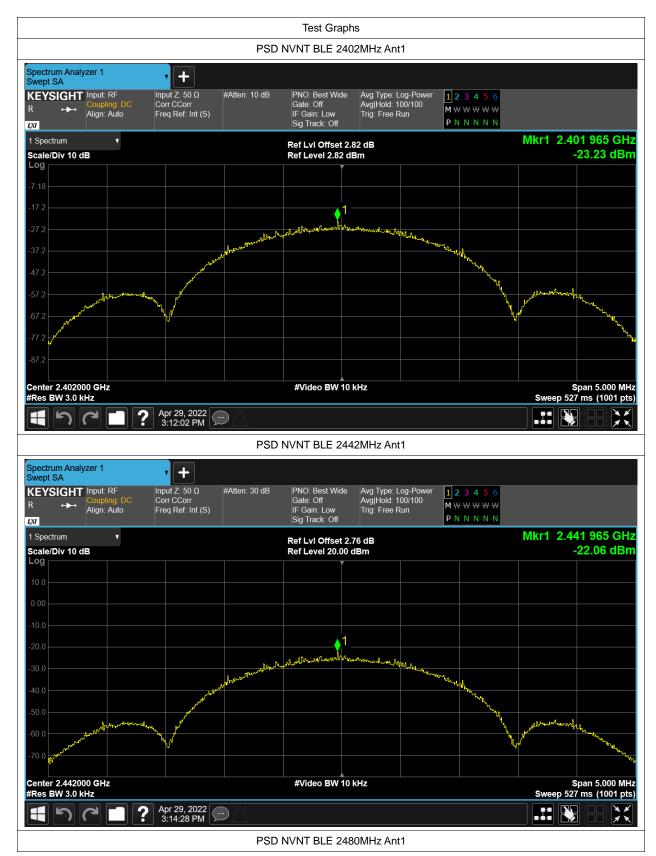










Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-49.54	-20	Pass
NVNT	BLE	2480	Ant1	-50.86	-20	Pass







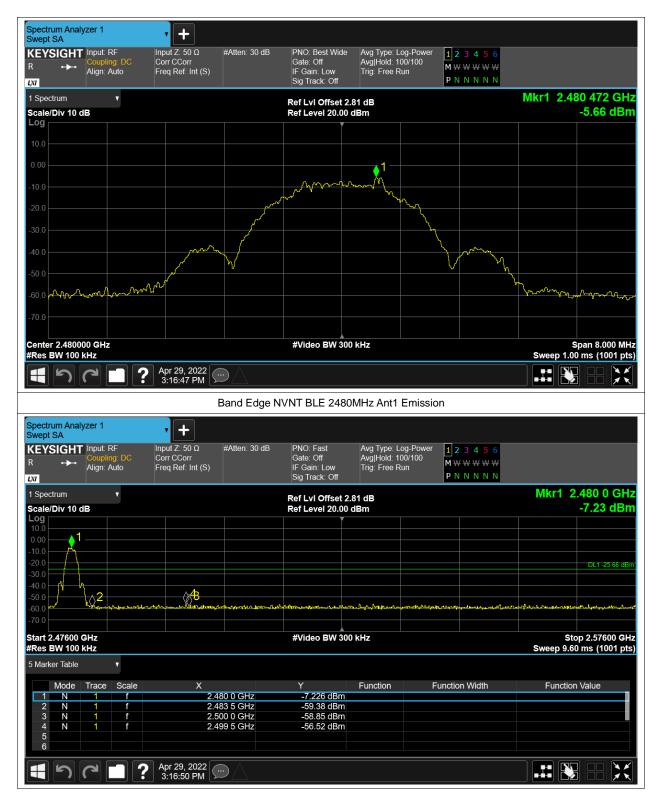





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-41.92	-20	Pass
NVNT	BLE	2442	Ant1	-44.97	-20	Pass
NVNT	BLE	2480	Ant1	-44.12	-20	Pass

Page 16 of 19



