


Test Data


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-4.483	30	Pass
NVNT	BLE	2442	Ant1	-2.909	30	Pass
NVNT	BLE	2480	Ant1	-3.322	30	Pass



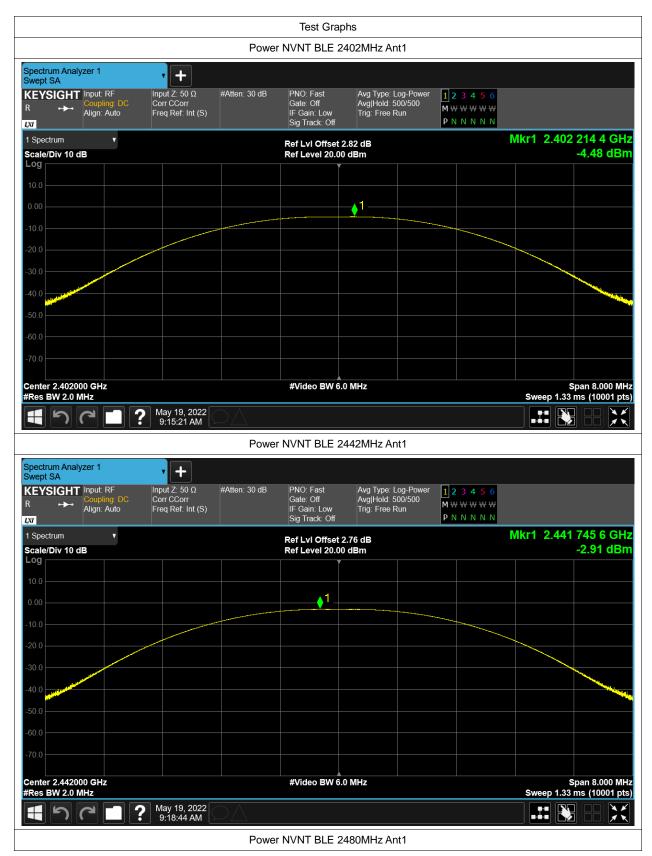



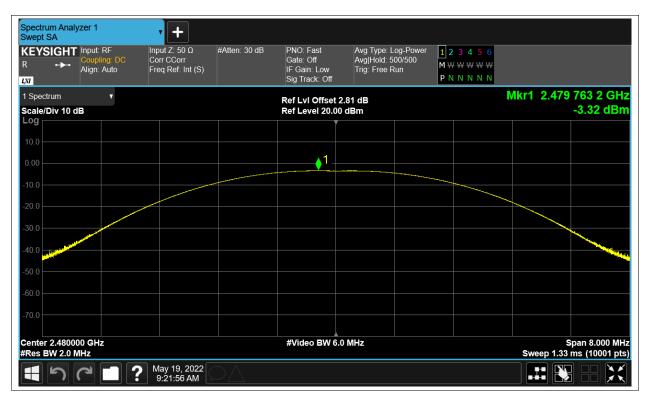




-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	limit	Verdic
NVNT	BLE	2402	Ant1	0.687	0.5	Pass
NVNT	BLE	2442	Ant1	0.685	0.5	Pass
NVNT	BLE	2480	Ant1	0.683	0.5	Pass







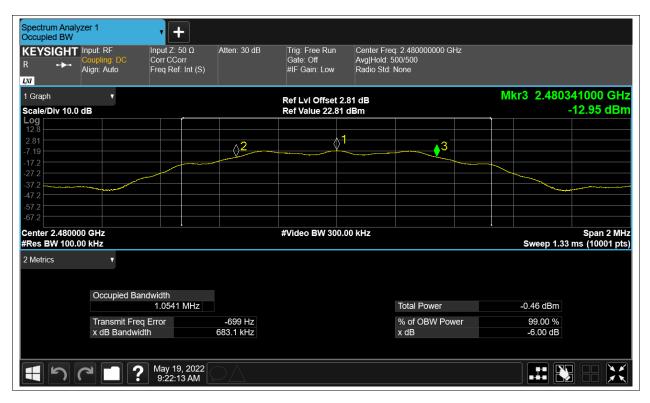



Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	1.05214448	
NVNT	BLE	2442	Ant1	1.049737422	
NVNT	BLE	2480	Ant1	1.056081749	












Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-10.786	8	Pass
NVNT	BLE	2442	Ant1	-9.231	8	Pass
NVNT	BLE	2480	Ant1	-9.639	8	Pass







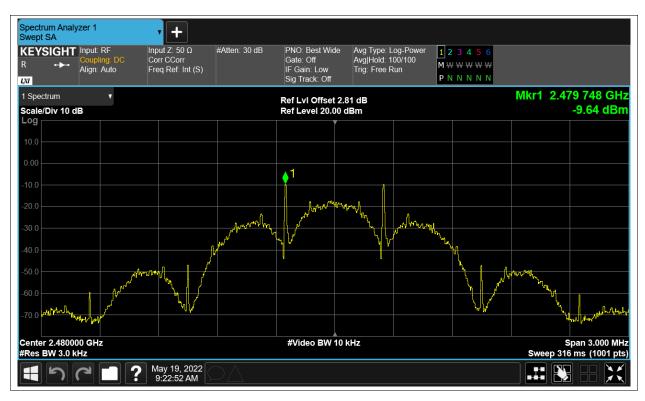





Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-46.34	-20	Pass
NVNT	BLE	2480	Ant1	-49.19	-20	Pass



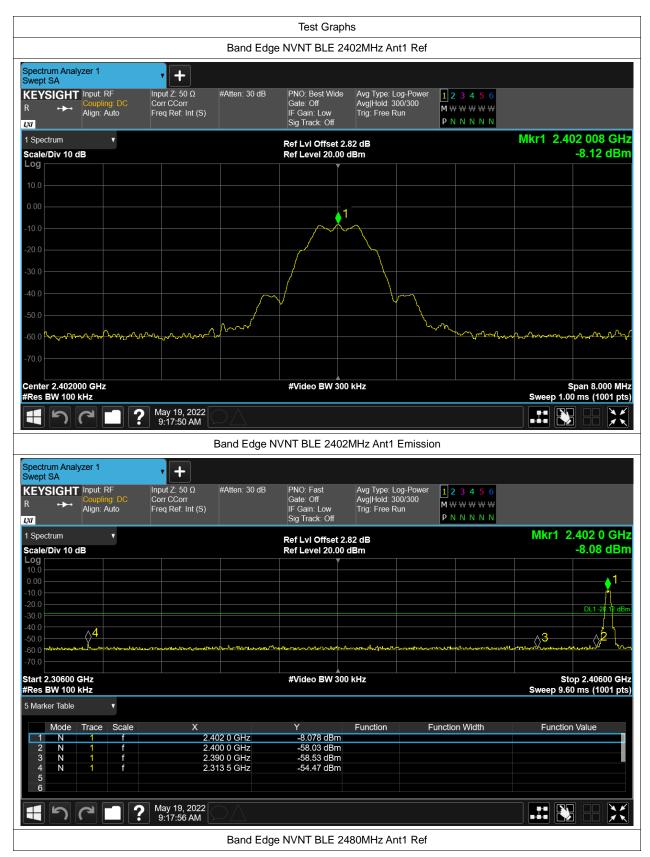



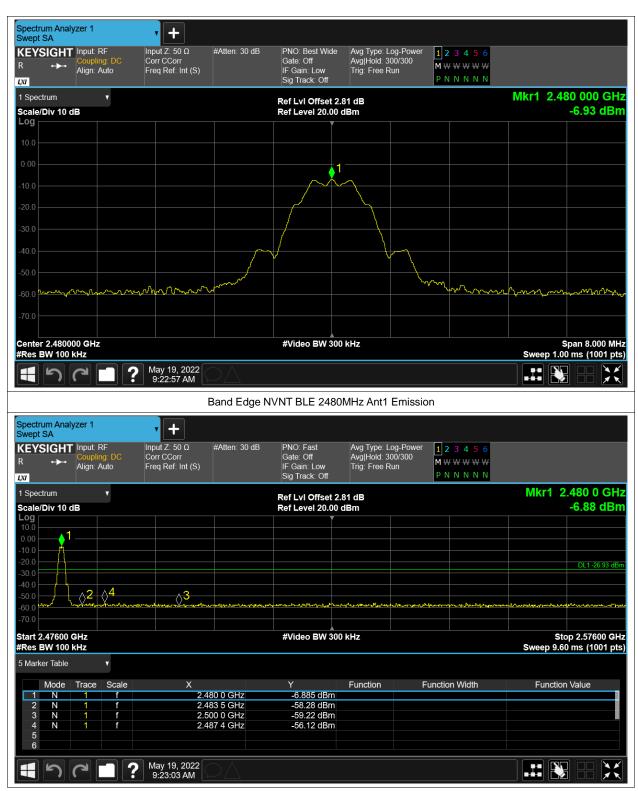



Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-41.42	-20	Pass
NVNT	BLE	2442	Ant1	-43.85	-20	Pass
NVNT	BLE	2480	Ant1	-43.64	-20	Pass











